

TEST REPORT

Product Name : CozyAir A3 humidifier
Brand Mark : CozyAir
Model No. : A1320
FCC ID : 2A259-A1320
Report Number : BLA-EMC-202109-A2405
Date of Sample Receipt : 2021/9/6
Date of Test : 2021/9/6 to 2021/11/26
Date of Issue : 2021/11/26
Test Standard : 47 CFR Part 15, Subpart C 15.249
Test Result : Pass

Prepared for:

Beijing Miaoxin Technology Co., Ltd.
022, 1st floor, East Annex Building, Beipu Factory (118 Zhongguancun East Road), West Academy of Agricultural Sciences, Dazhongsi No.2 Food Factory, Haidian District, Beijing City

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyao Sub-District, Baoan District, Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

Jozu

Approved by:

Blue Zhong

Review by:

Sueels

Date:

2021/11/26



REPORT REVISE RECORD

Version No.	Date	Description
00	2021/11/26	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY.....	5
2	GENERAL INFORMATION.....	6
3	GENERAL DESCRIPTION OF E.U.T.....	6
4	TEST ENVIRONMENT.....	7
5	TEST MODE.....	7
6	MEASUREMENT UNCERTAINTY.....	7
7	DESCRIPTION OF SUPPORT UNIT.....	8
8	LABORATORY LOCATION.....	8
9	TEST INSTRUMENTS LIST.....	9
10	RADIATED EMISSIONS.....	11
1.1	LIMITS.....	11
1.2	BLOCK DIAGRAM OF TEST SETUP.....	12
1.3	PROCEDURE.....	12
1.4	TEST DATA.....	13
10	RESTRICTED BAND AROUND FUNDAMENTAL FREQUENCY.....	21
10.1	LIMITS.....	21
10.2	BLOCK DIAGRAM OF TEST SETUP.....	22
10.3	PROCEDURE.....	22
10.4	TEST DATA.....	24
11	FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.249(A)).....	28
11.1	LIMITS.....	28
11.2	BLOCK DIAGRAM OF TEST SETUP.....	29
11.3	PROCEDURE.....	29
11.4	TEST DATA.....	31
12	20DB BANDWIDTH.....	43
12.1	LIMITS.....	43
12.2	BLOCK DIAGRAM OF TEST SETUP.....	43
12.3	TEST DATA.....	44
12.4	TEST PLOTS.....	44
13	ANTENNA REQUIREMENT.....	46

13.1	CONCLUSION.....	46
14	AC POWER LINE CONDUCTED EMISSION.....	47
14.1	LIMITS.....	47
14.2	BLOCK DIAGRAM OF TEST SETUP.....	47
14.3	PROCEDURE.....	47
14.4	TEST DATA.....	49
APPENDIX A: PHOTOGRAPHS OF TEST SETUP.....		51
APPENDIX B: PHOTOGRAPHS OF EUT.....		53

1 TEST SUMMARY

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Field Strength of the Fundamental Signal	47 CFR Part 15 Subpart C Section 15.249 (a)	ANSI C63.10-2013	PASS
Radiated Emissions	47 CFR Part 15 Subpart C Section 15.249 (a)/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency	47 CFR Part 15 Subpart C Section 15.249(a)/15.205	ANSI C63.10-2013	PASS
20dB Bandwidth	47 CFR Part 15 Subpart C Section 15.215 (c)	ANSI C63.10-2013	PASS

2 GENERAL INFORMATION

Applicant	Beijing Miaoxin Technology Co., Ltd.
Address	022, 1st floor, East Annex Building, Beipu Factory (118 Zhongguancun East Road), West Academy of Agricultural Sciences, Dazhongsi No.2 Food Factory, Haidian District, Beijing City
Manufacturer	Beijing Miaoxin Technology Co., Ltd.
Address	022, 1st floor, East Annex Building, Beipu Factory (118 Zhongguancun East Road), West Academy of Agricultural Sciences, Dazhongsi No.2 Food Factory, Haidian District, Beijing City
Factory	Dongguan JingNuo Environment Science and Technology Inc.
Address	#2 Limin Road, JinXiaoTang, ZhuTang, FengGang, DongGuan, GuangDong, China
Product Name	CozyAir A3 humidifier
Test Model No.	A1320

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	N/A
Software Version	N/A
Operation Frequency:	5730MHz-5870MHz
Channel spacing:	1MHz
Channel numbers:	141
Modulation type:	CW
Antenna Type:	PCB antenna
Antenna gain:	0dBi(Provided by customer)
Power supply:	DC 5.0V

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC5V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
DC power supply (LODESTAR)	LODESTAR	LP305DE	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	BBHA 9170	00939	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

Test Equipment Of Restricted Band Around Fundamental Frequency					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022
--------------	-------------	-----------	-------	-----------	-----------

Test Equipment Of Field Strength of the Fundamental Signal (15.249(a))

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

Test Equipment Of 20dB Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	25/11/2020	24/11/2023
Receiver	R&S	ESPI3	101082	24/9/2021	23/9/2022
LISN	R&S	ENV216	3560.6550.15	24/9/2021	23/9/2022
LISN	AT	AT166-2	AKK1806000003	26/9/2021	25/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

10 RADIATED EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.4&6.5&6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

1.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

1.2 BLOCK DIAGRAM OF TEST SETUP

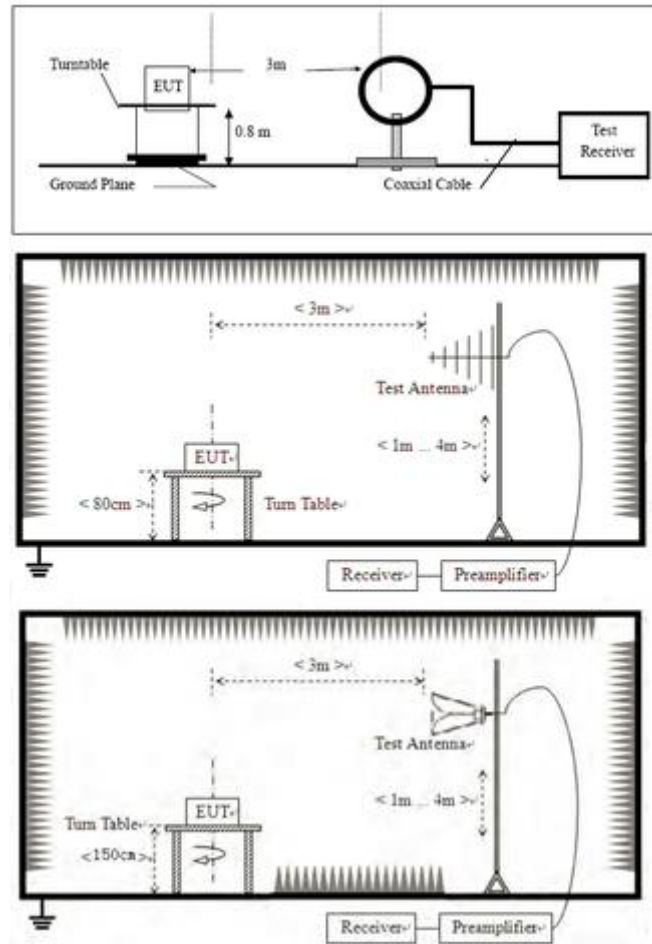

1.3 PROCEDURE


For testing performed with the loop antenna, the center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. Only the worst position of vertical was shown in the report.

Remark: Test from 30MHz to 40GHz, For above 12.75GHz, no emission found.

1.4 TEST DATA

[TestMode: TX below 1G]; [Polarity: Vertical]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202109-A31
EUT: CozyAir A3 humidifier	Test Engineer: Charlie
M/N: A1320	Temperature:
S/N:	Humidity:
Test Mode: 5.8G TX mode	Test Voltage:
Note:	Test Data: 2021-11-19 14:39:20

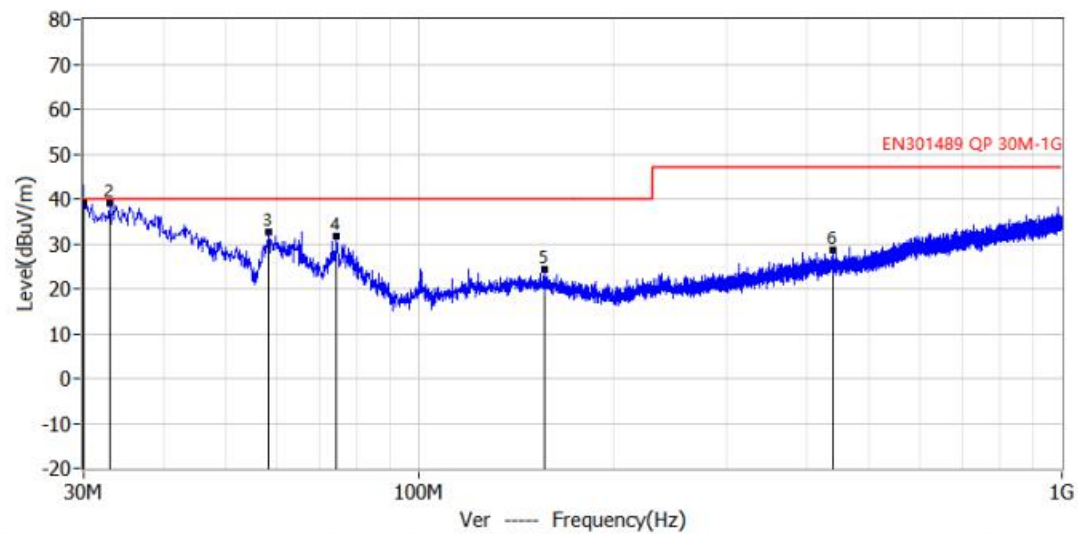


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	30.000MHz	40.0	39.1	-0.9	16.9	22.2	QP	Ver	100.0	110.0
2*	32.910MHz	40.0	39.0	-1.0	16.0	23.0	QP	Ver	100.0	68.0
3*	58.251MHz	40.0	32.6	-7.4	9.1	23.5	QP	Ver	100.0	100.0
4*	74.256MHz	40.0	31.7	-8.3	11.0	20.7	QP	Ver	100.0	94.0
5*	156.343MHz	40.0	24.3	-15.7	0.9	23.4	QP	Ver	100.0	100.0
6*	438.976MHz	47.0	28.7	-18.3	1.0	27.7	QP	Ver	100.0	98.0

Test Result: Pass

[TestMode: TX below 1G]; [Polarity: Horizontal]


Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202109-A31
EUT: CozyAir A3 humidifier	Test Engineer: Charlie
M/N: A1320	Temperature:
S/N:	Humidity:
Test Mode: 5.8G TX mode	Test Voltage:
Note:	Test Data: 2021-11-19 14:41:00

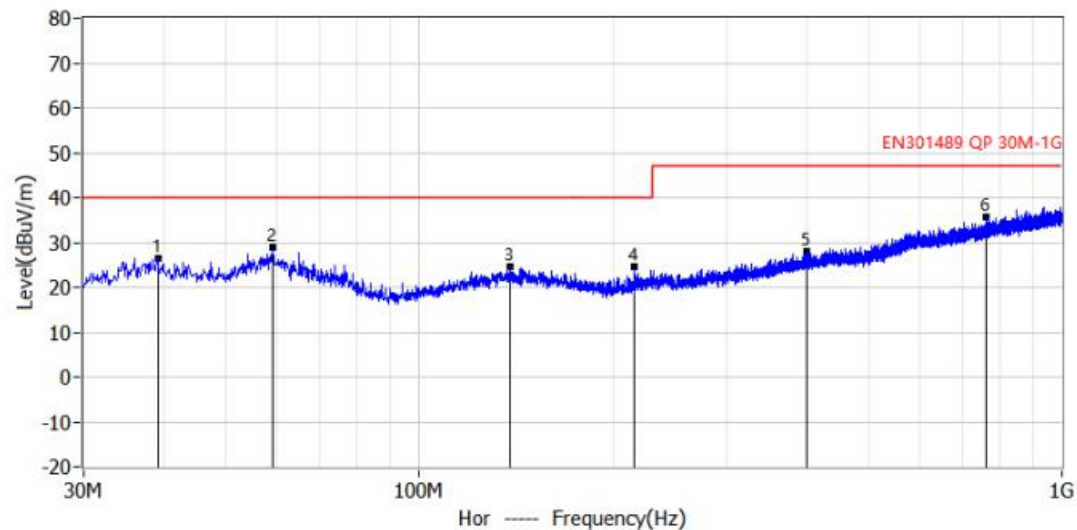

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	39.094MHz	40.0	26.6	-13.4	2.6	24.0	QP	Hor	100.0	175.0
2*	58.979MHz	40.0	28.8	-11.2	5.3	23.5	QP	Hor	100.0	0.0
3*	138.155MHz	40.0	24.5	-15.5	0.9	23.6	QP	Hor	100.0	356.0
4*	216.240MHz	40.0	24.5	-15.5	2.9	21.6	QP	Hor	100.0	177.0
5*	400.904MHz	47.0	27.9	-19.1	0.6	27.3	QP	Hor	100.0	359.0
6*	760.774MHz	47.0	35.6	-11.4	2.3	33.3	QP	Hor	100.0	312.0

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

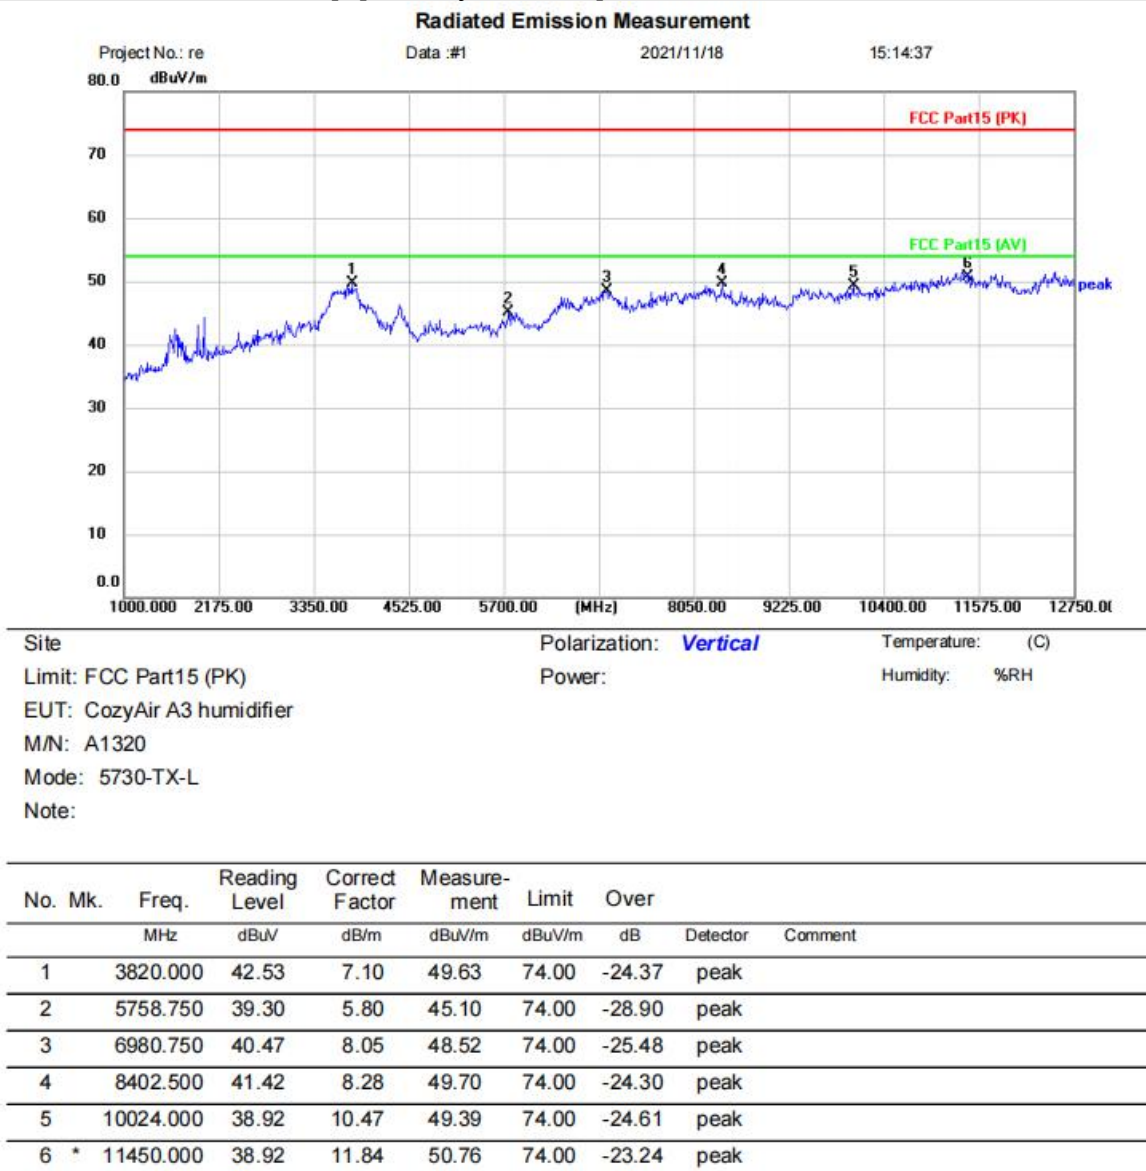


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Horizontal]

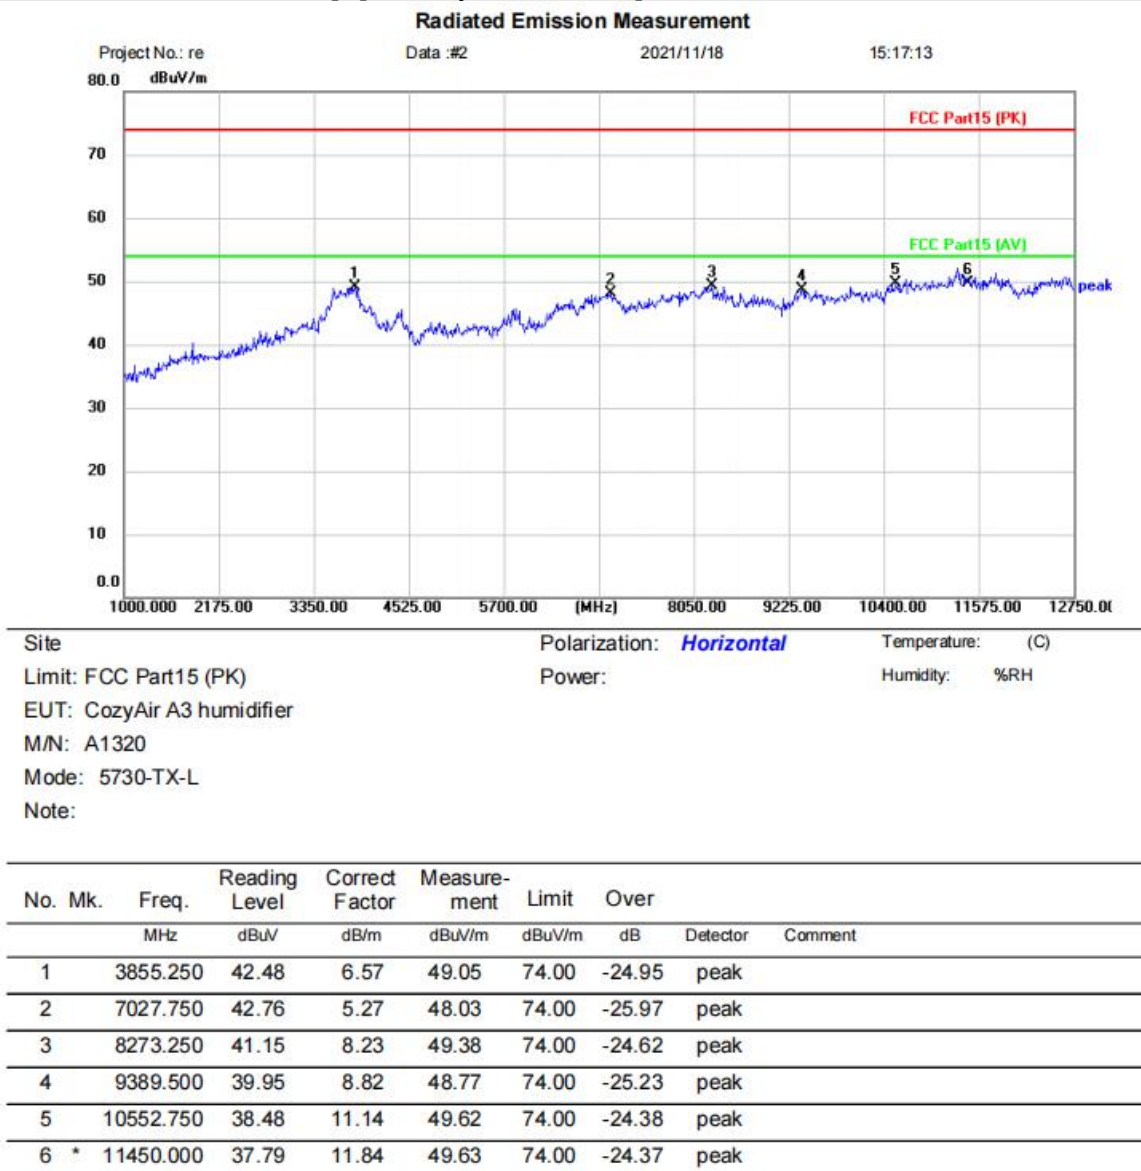


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

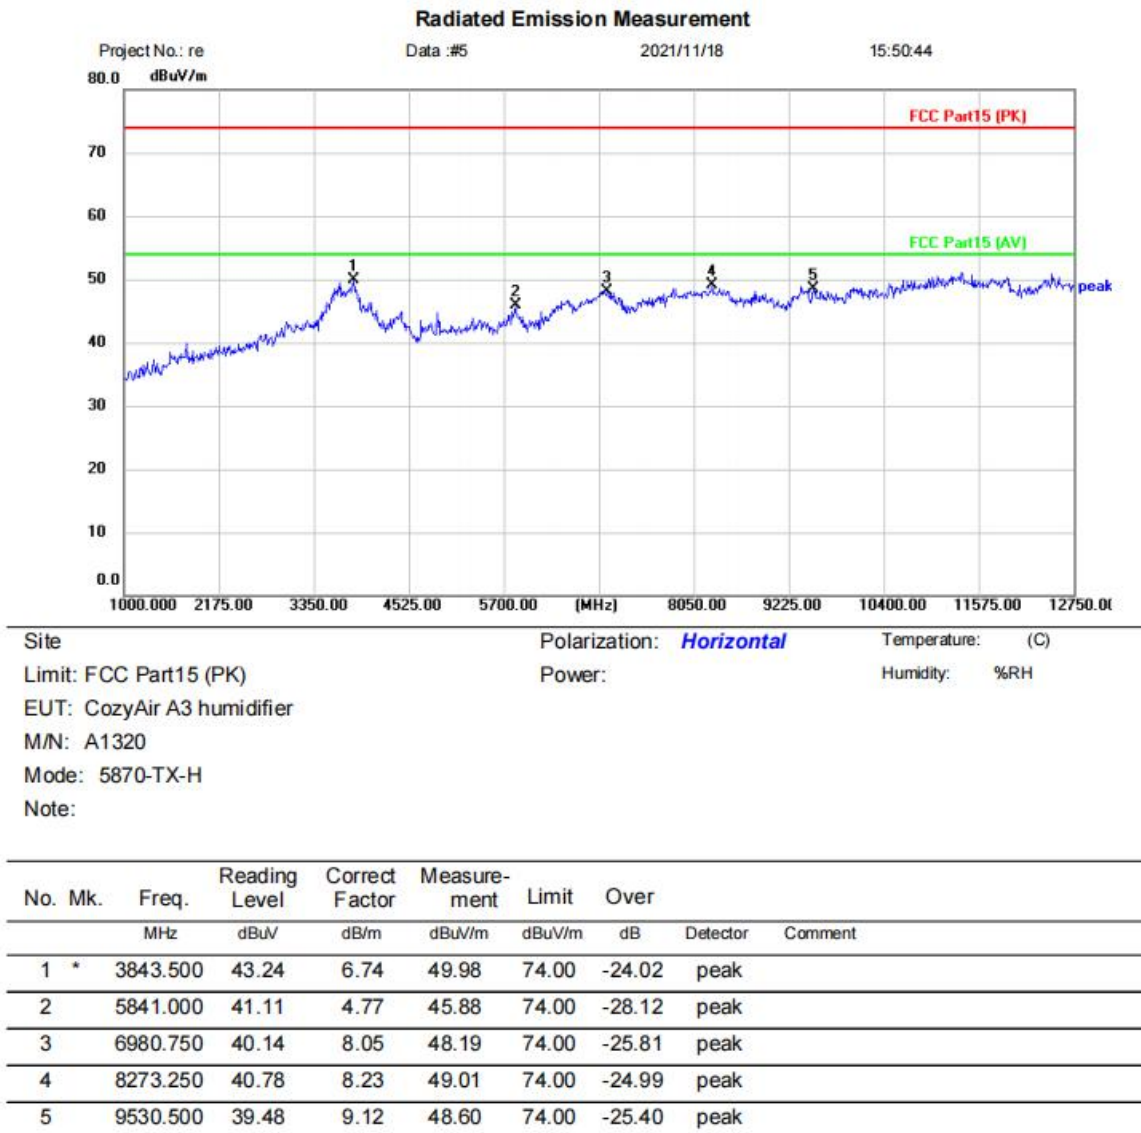


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

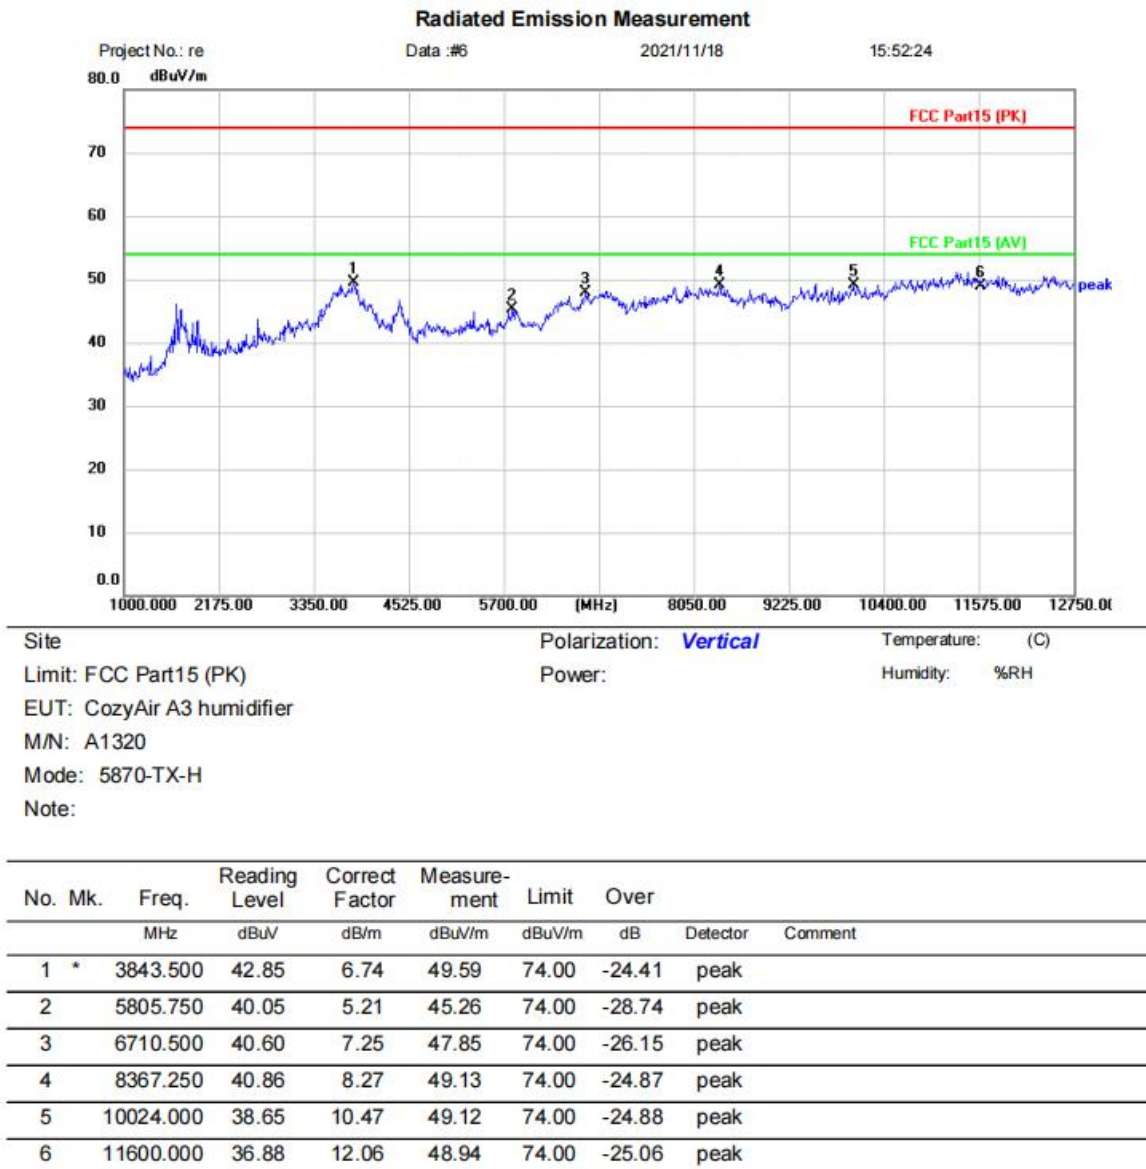


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX mid channel]; [Polarity: Horizontal]

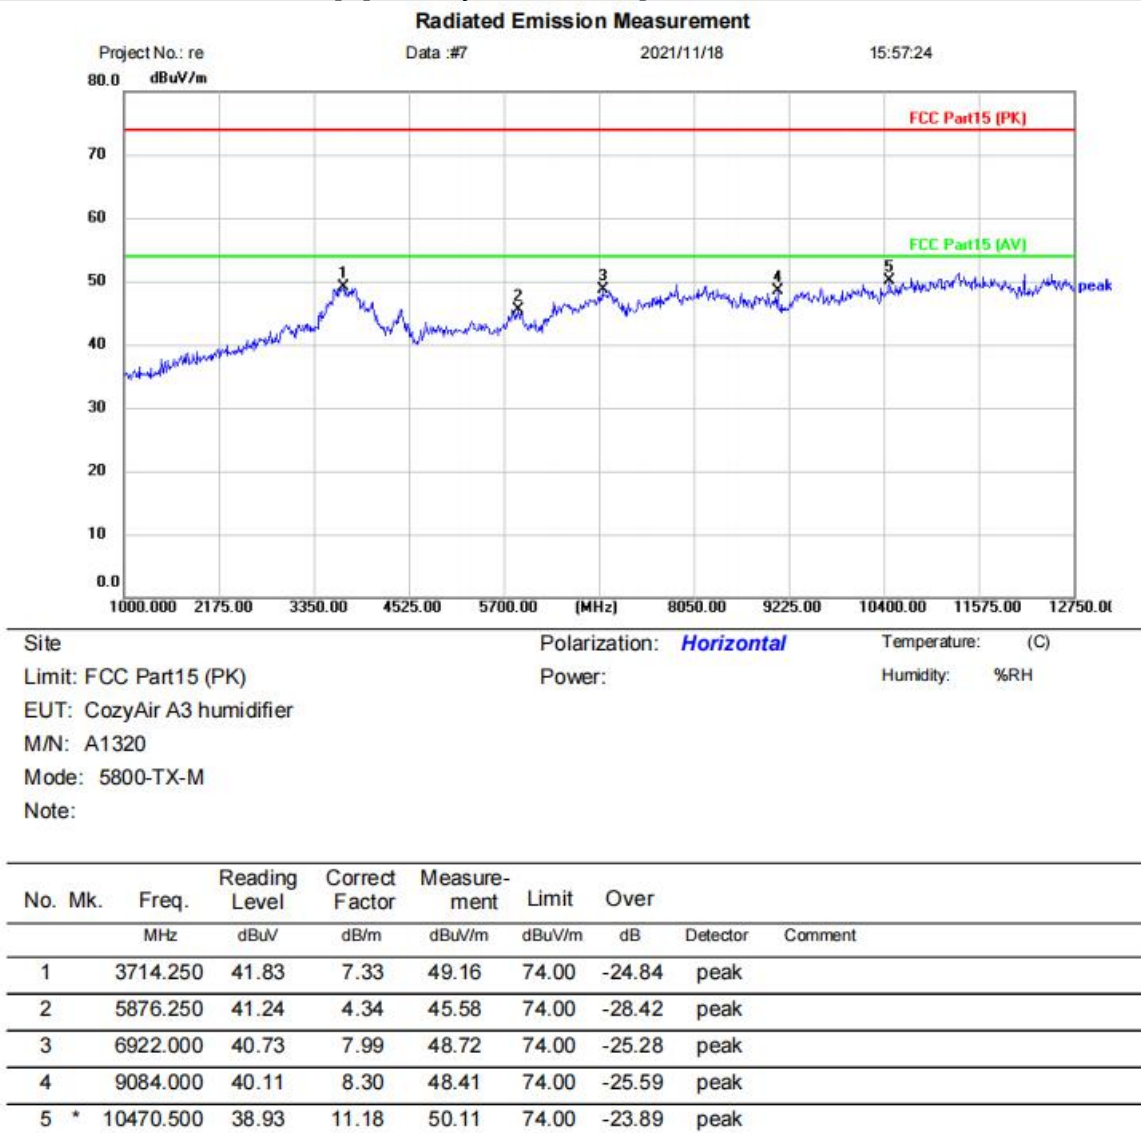


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX mid channel]; [Polarity: Vertical]

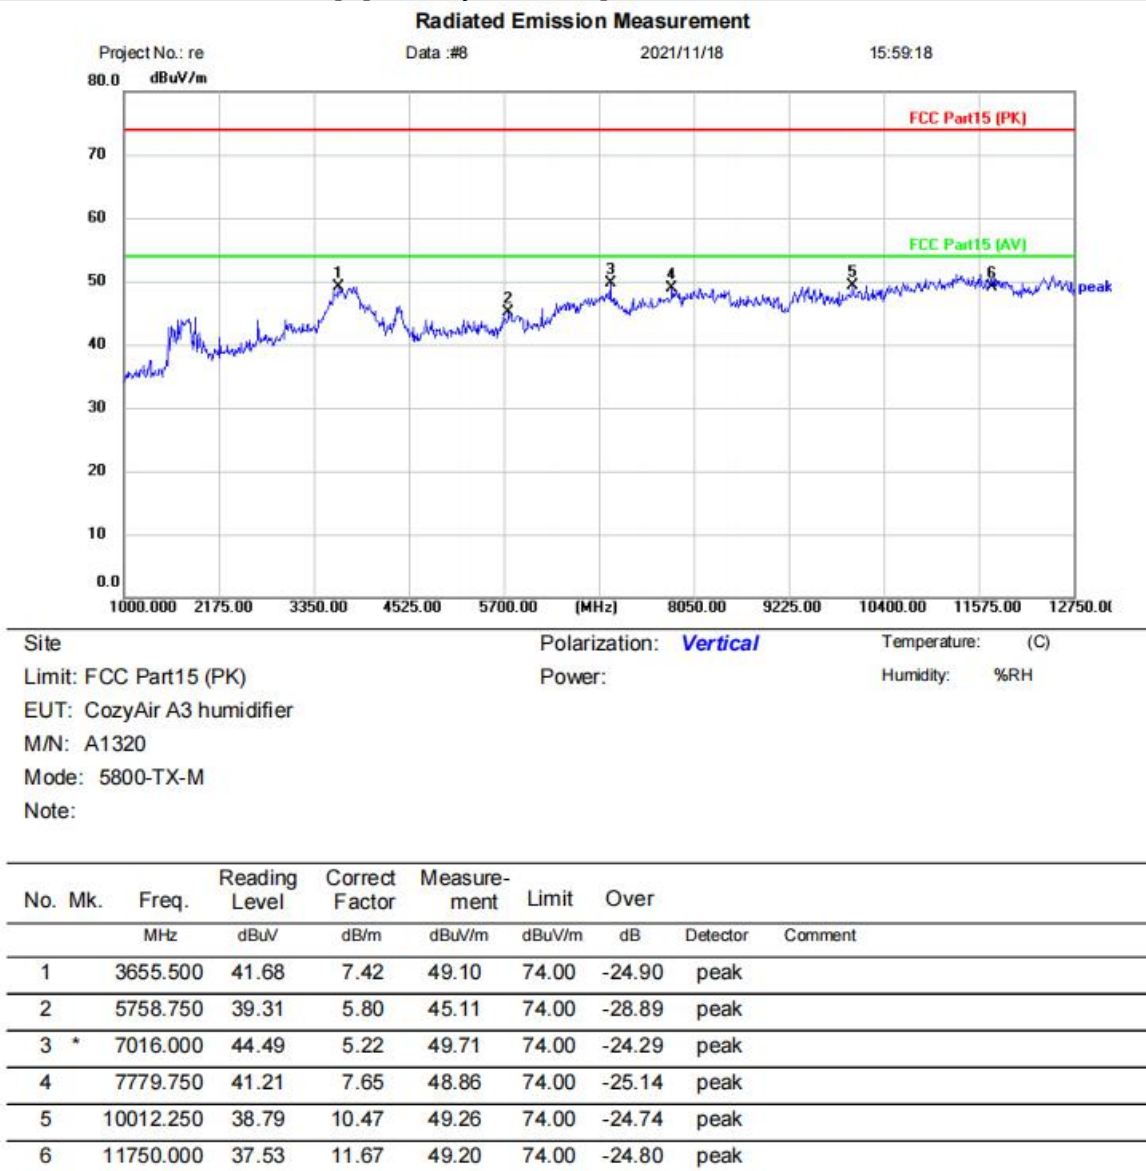

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass


10 RESTRICTED BAND AROUND FUNDAMENTAL FREQUENCY

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.4&6.5&6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

10.1 LIMITS

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
Above 1GHz	74.0	Peak Value
Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.		

10.2 BLOCK DIAGRAM OF TEST SETUP

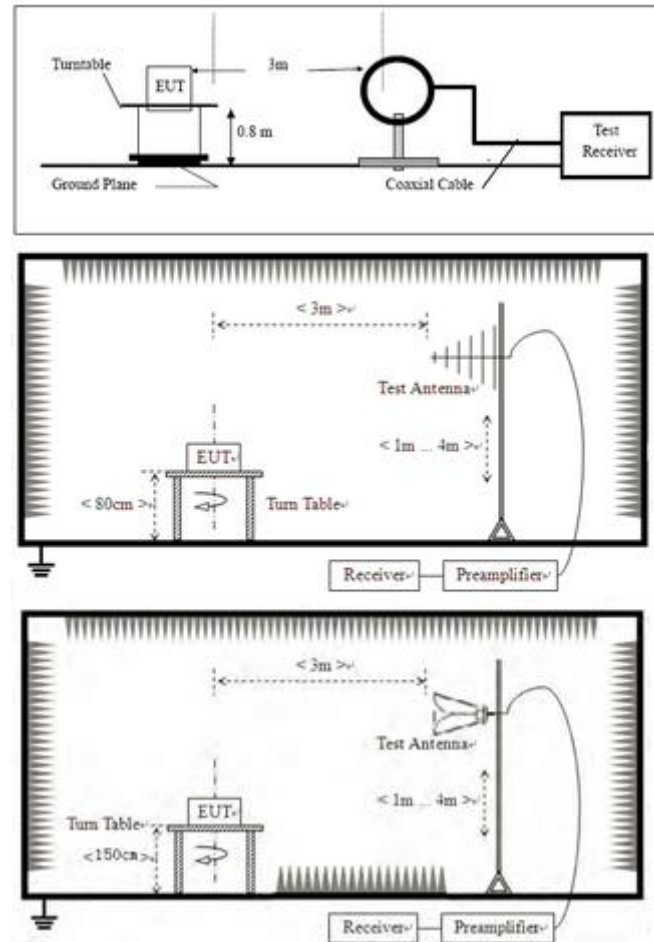

10.3 PROCEDURE


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - j. Repeat above procedures until all frequencies measured was complete.
- Remark: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

BlueAsia

10.4 TEST DATA

[TestMode: TX low channel]; [Polarity: Horizontal]

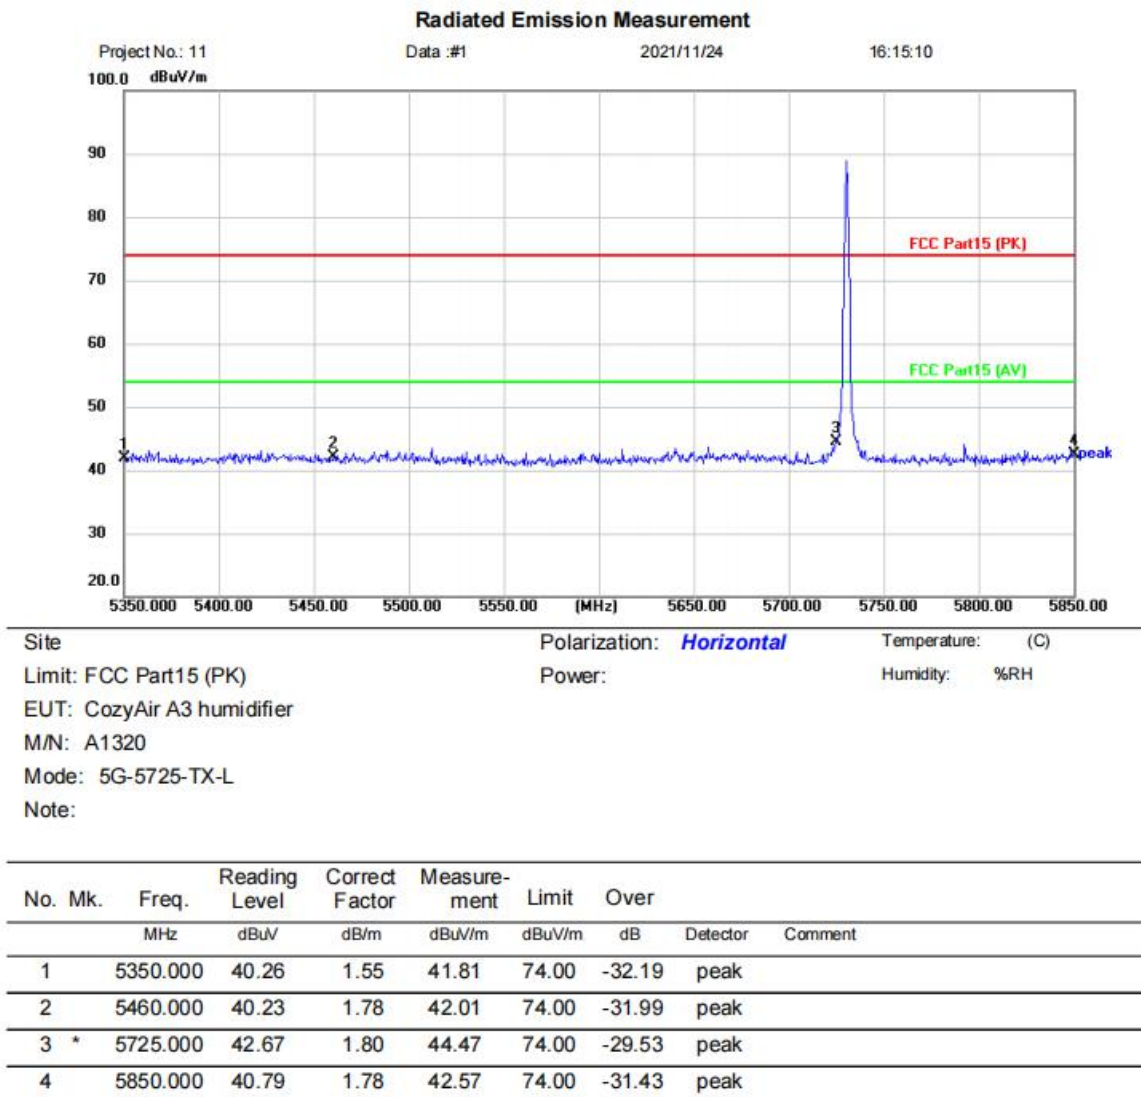


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

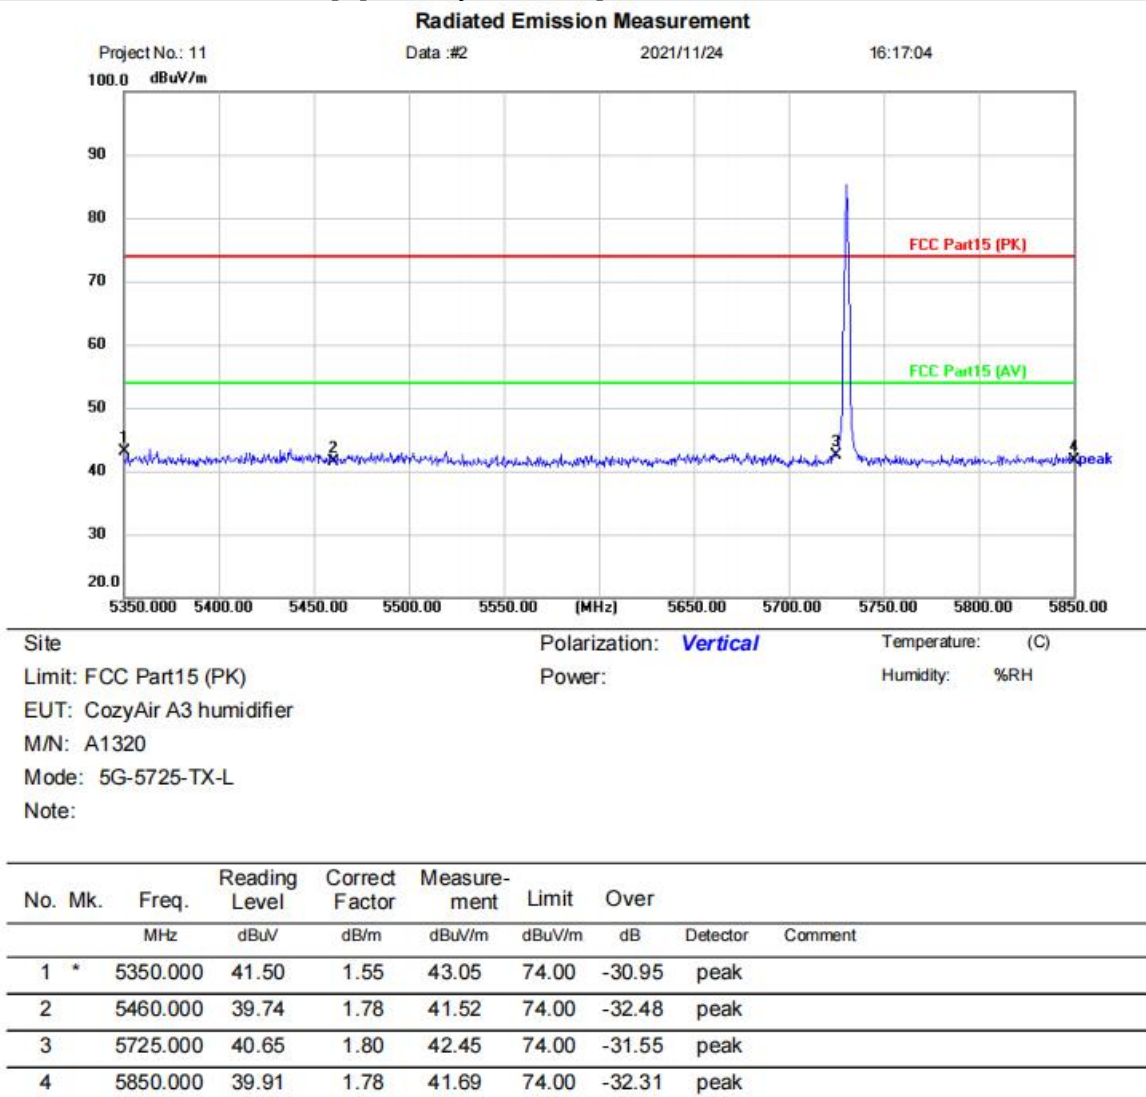


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

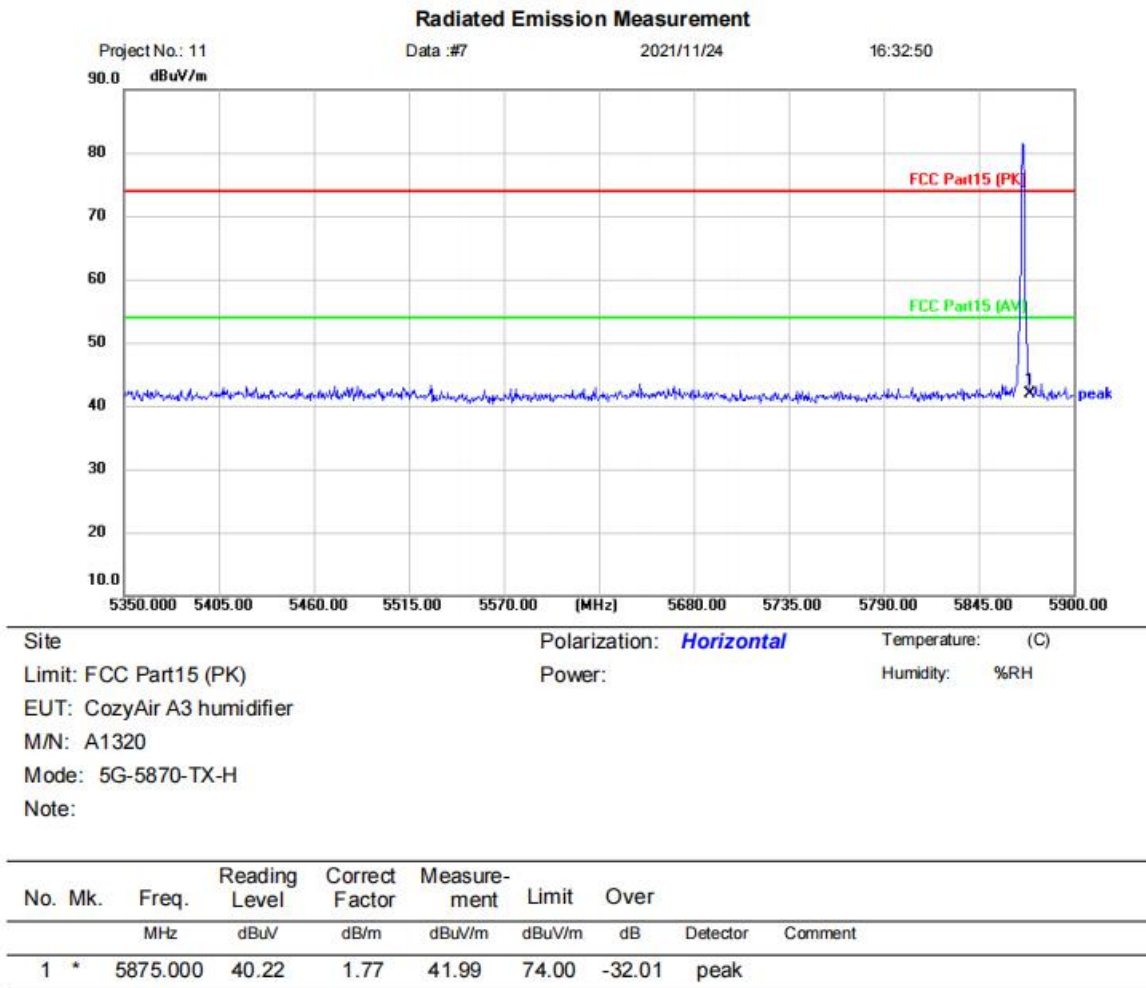


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

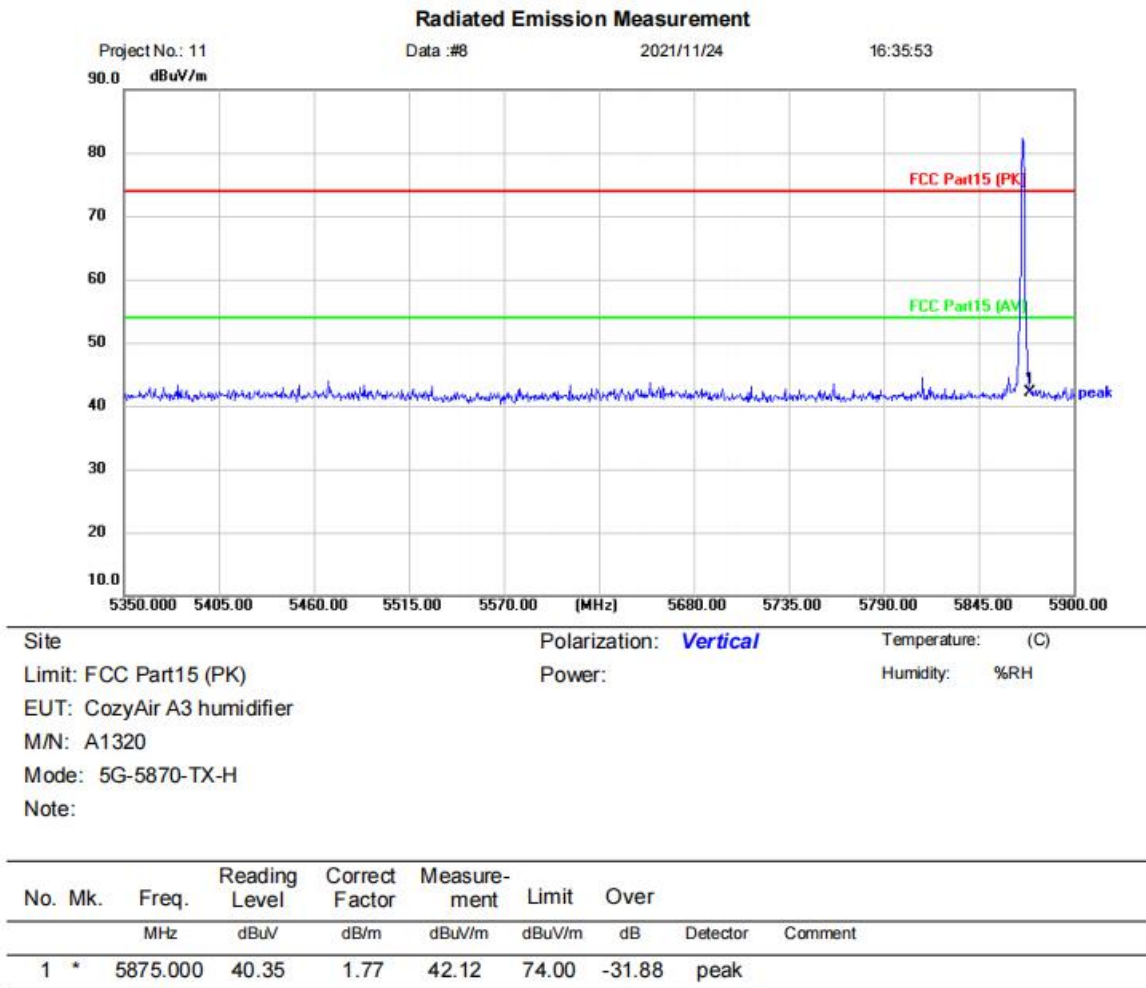

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

11 FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.249(A))

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.5&6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%


11.1 LIMITS

Fundamental frequency(MHz)	Field strength of fundamental(microvolts/meter)	Field strength of harmonics(microvolts/meter)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

Remark: The frequencies above 1000MHz are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

Frequency	Limit (dBμV/m @3m)	Remark
Field strength of fundamental 5725MHz-5875MHz	94.0	Average Value
	114.0	Peak Value

11.2 BLOCK DIAGRAM OF TEST SETUP

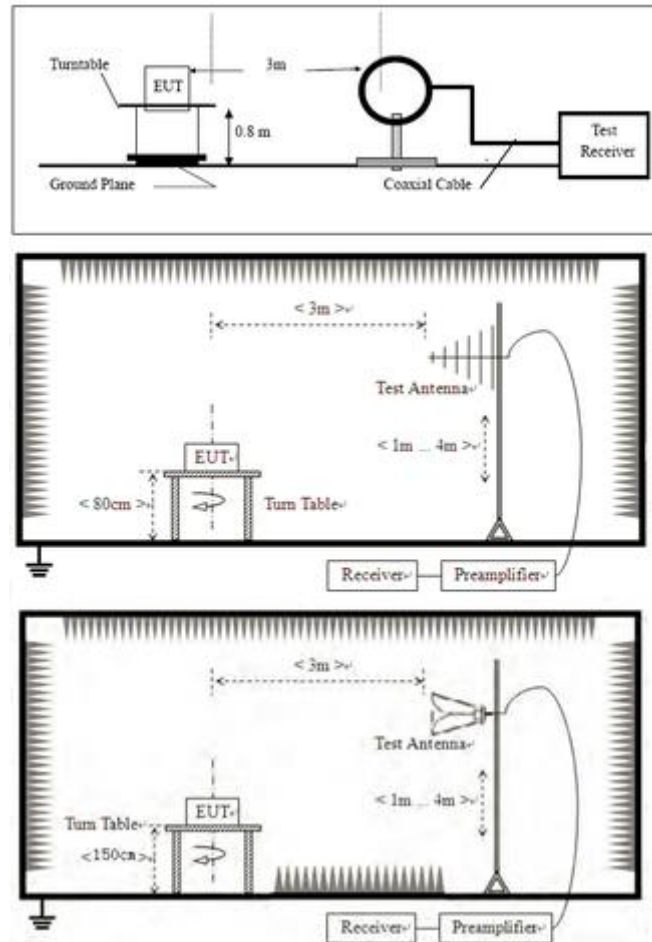

11.3 PROCEDURE


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - j. Repeat above procedures until all frequencies measured was complete.
- Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


BlueAsia

11.4 TEST DATA


Low channel vertical avg:

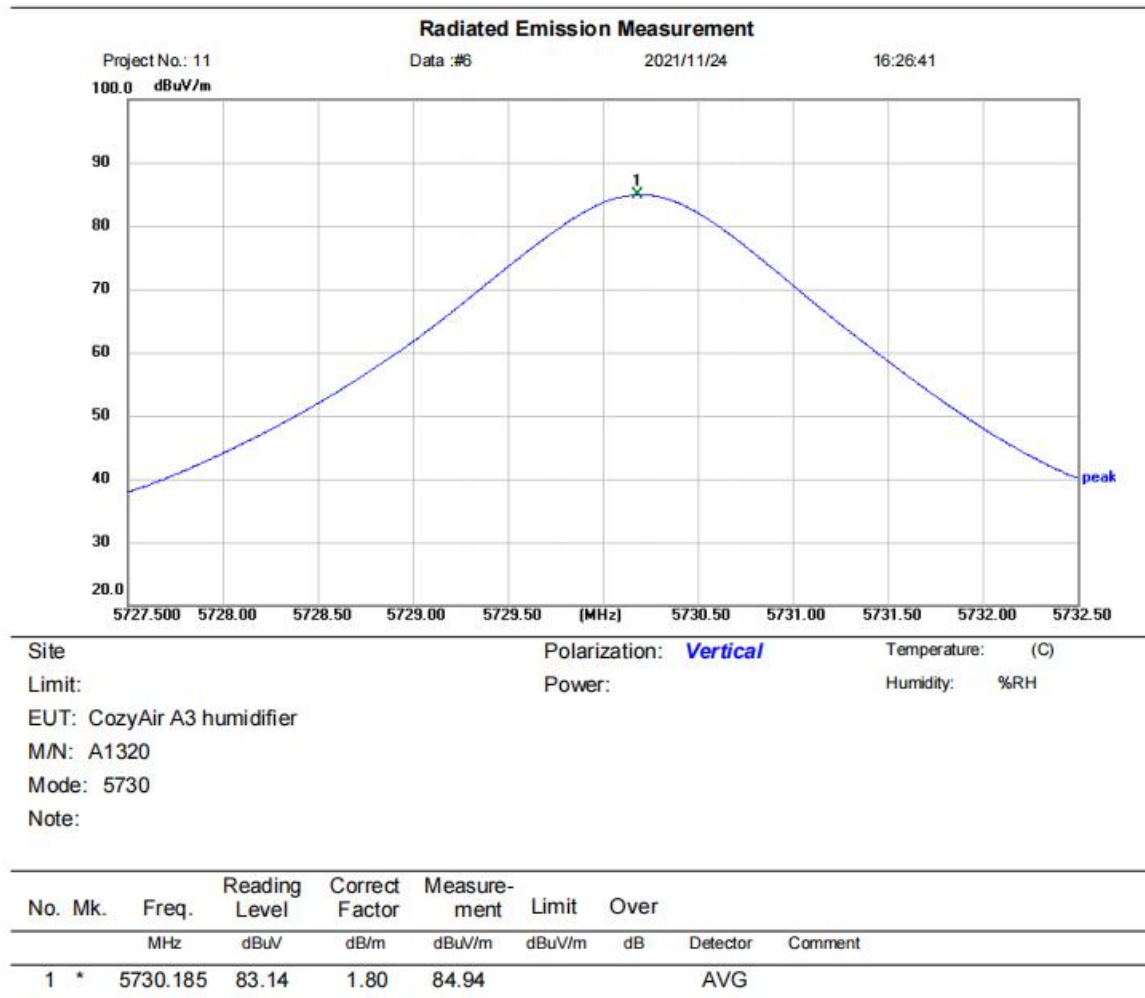


low channel vertical peak

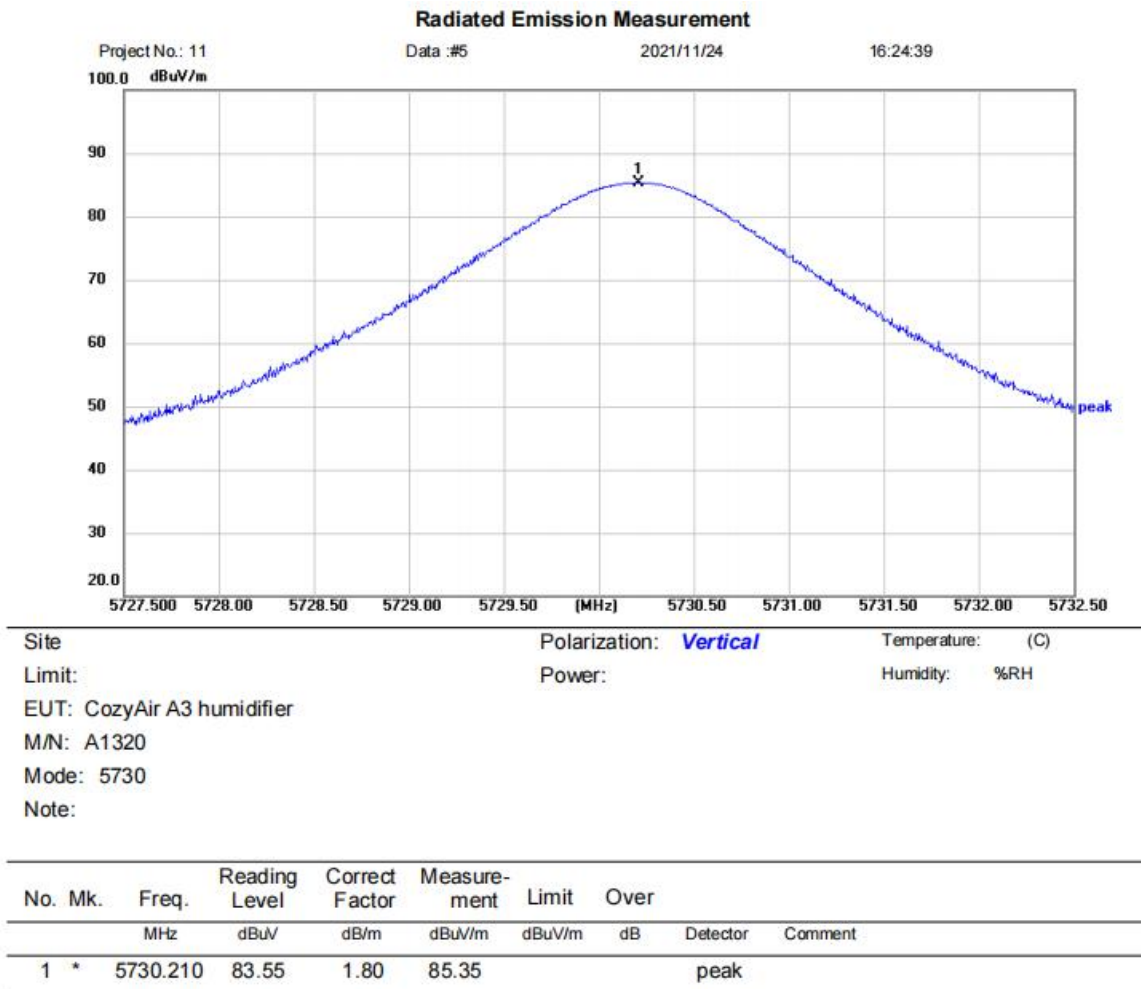


Low channel horizontal avg

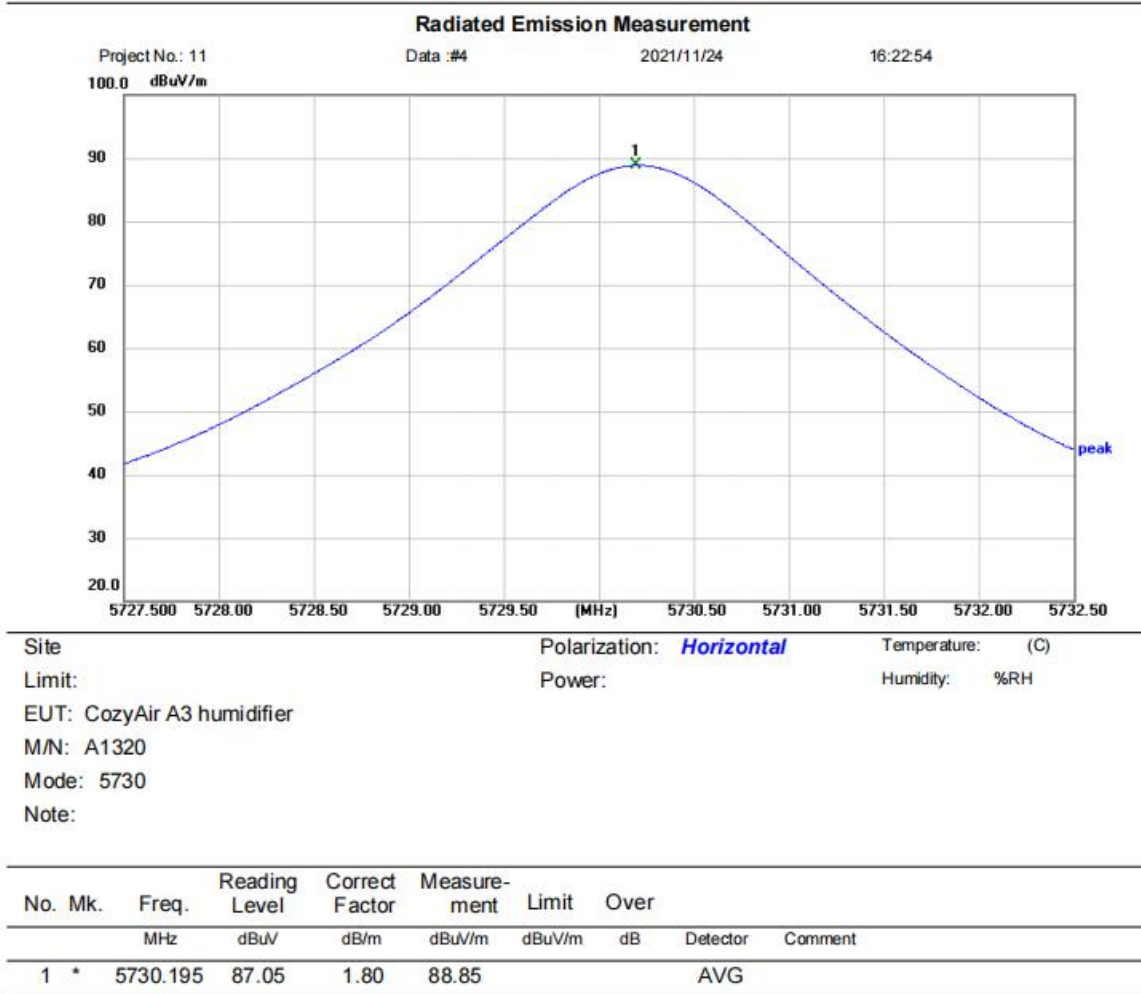


Low channel horizontal peak

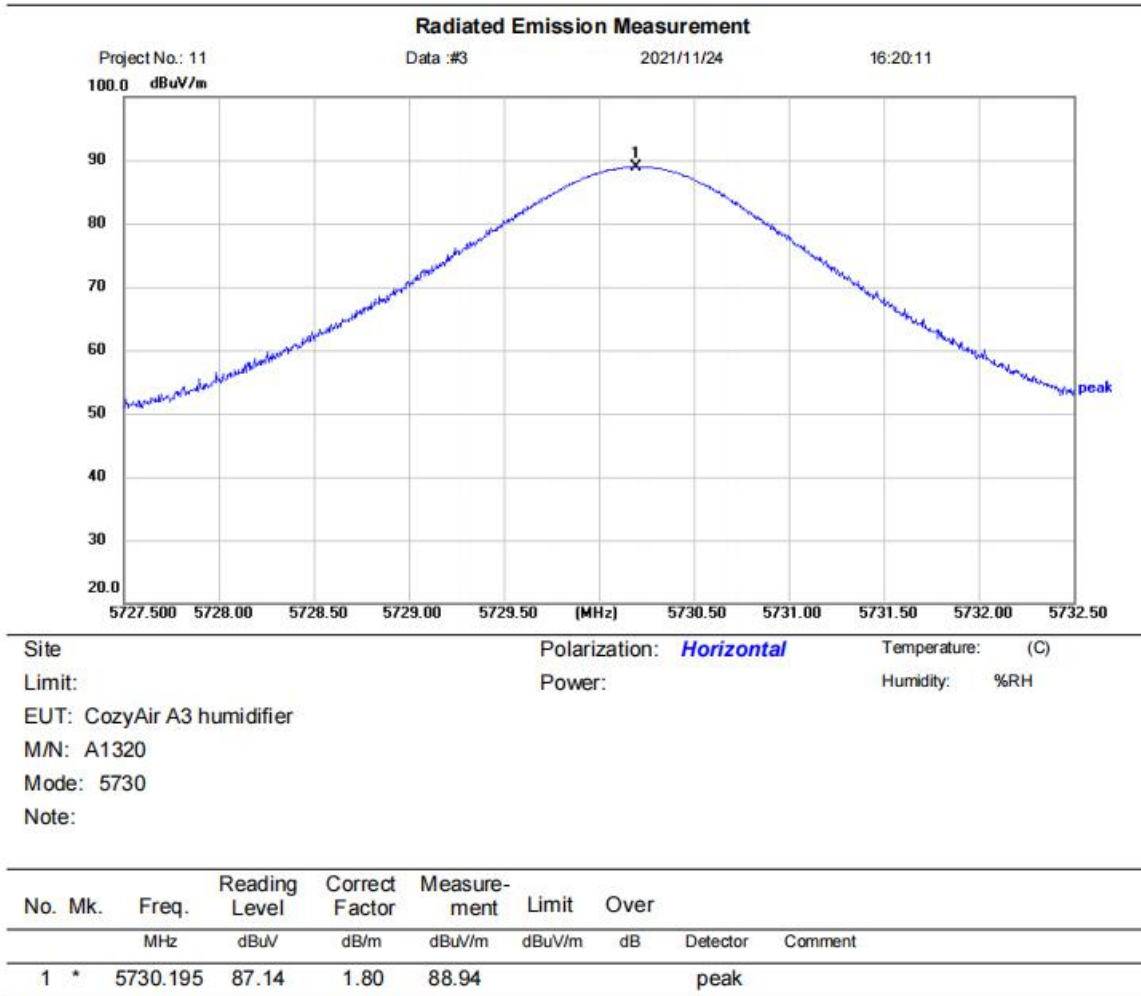


Mid channel horizontal avg

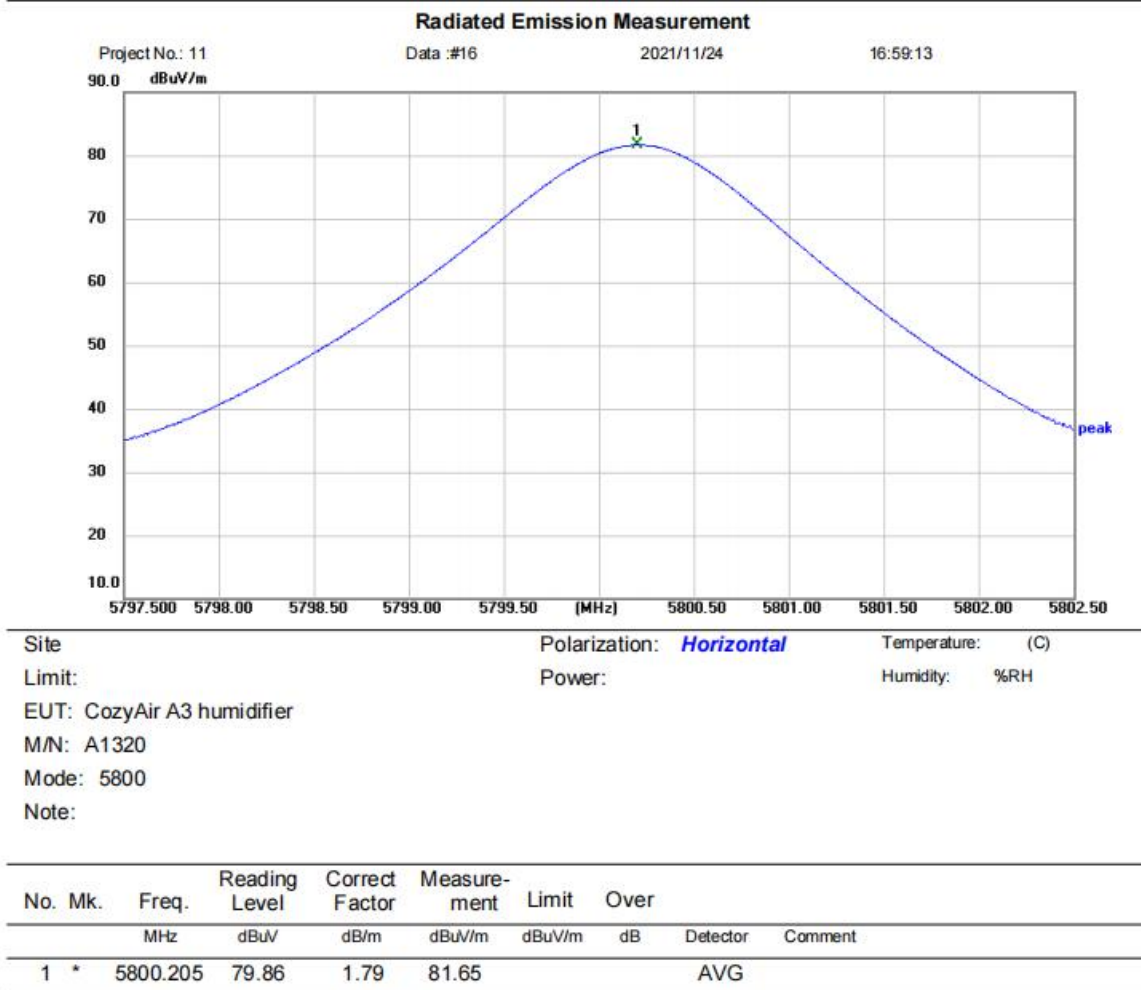


Mid channel horizontal peak

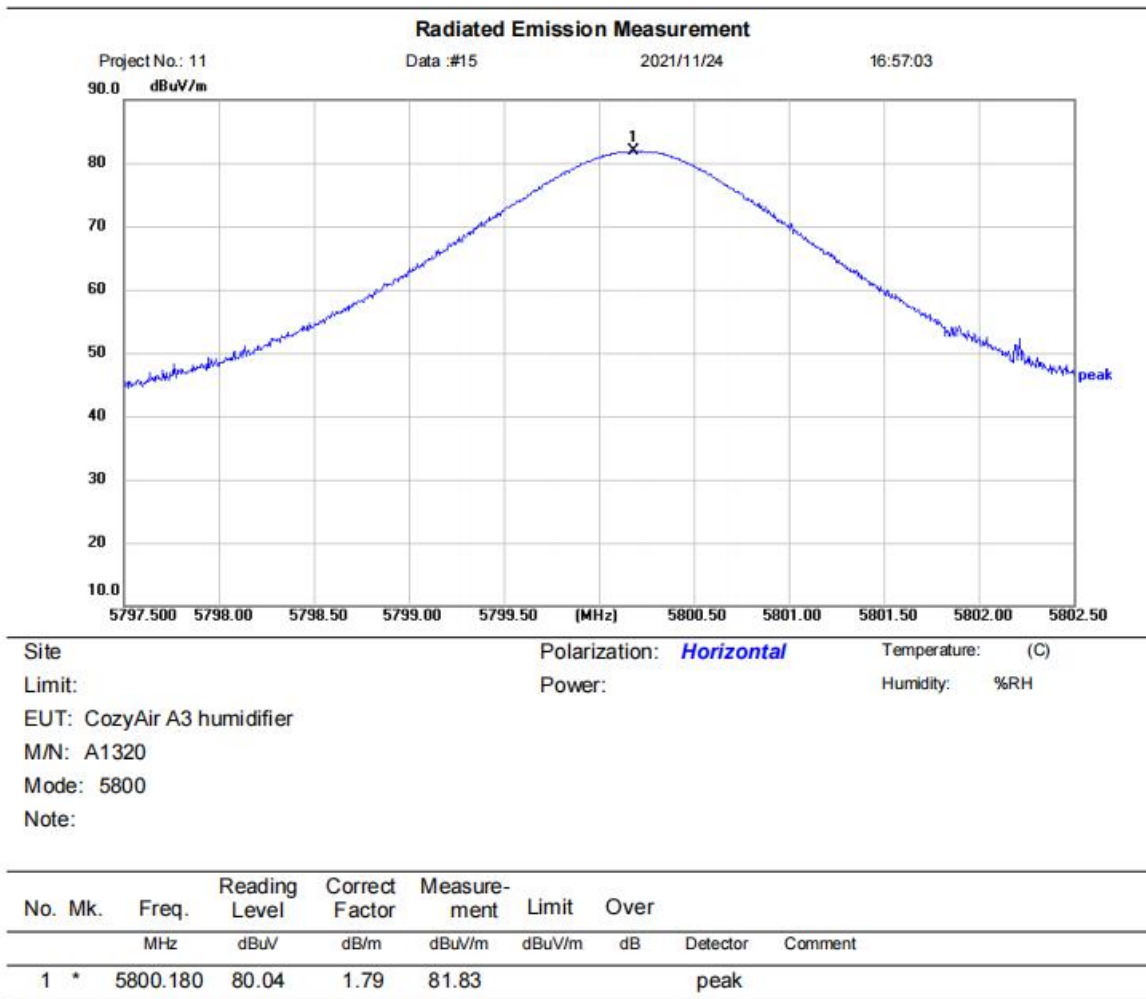


Mid channel vertical avg

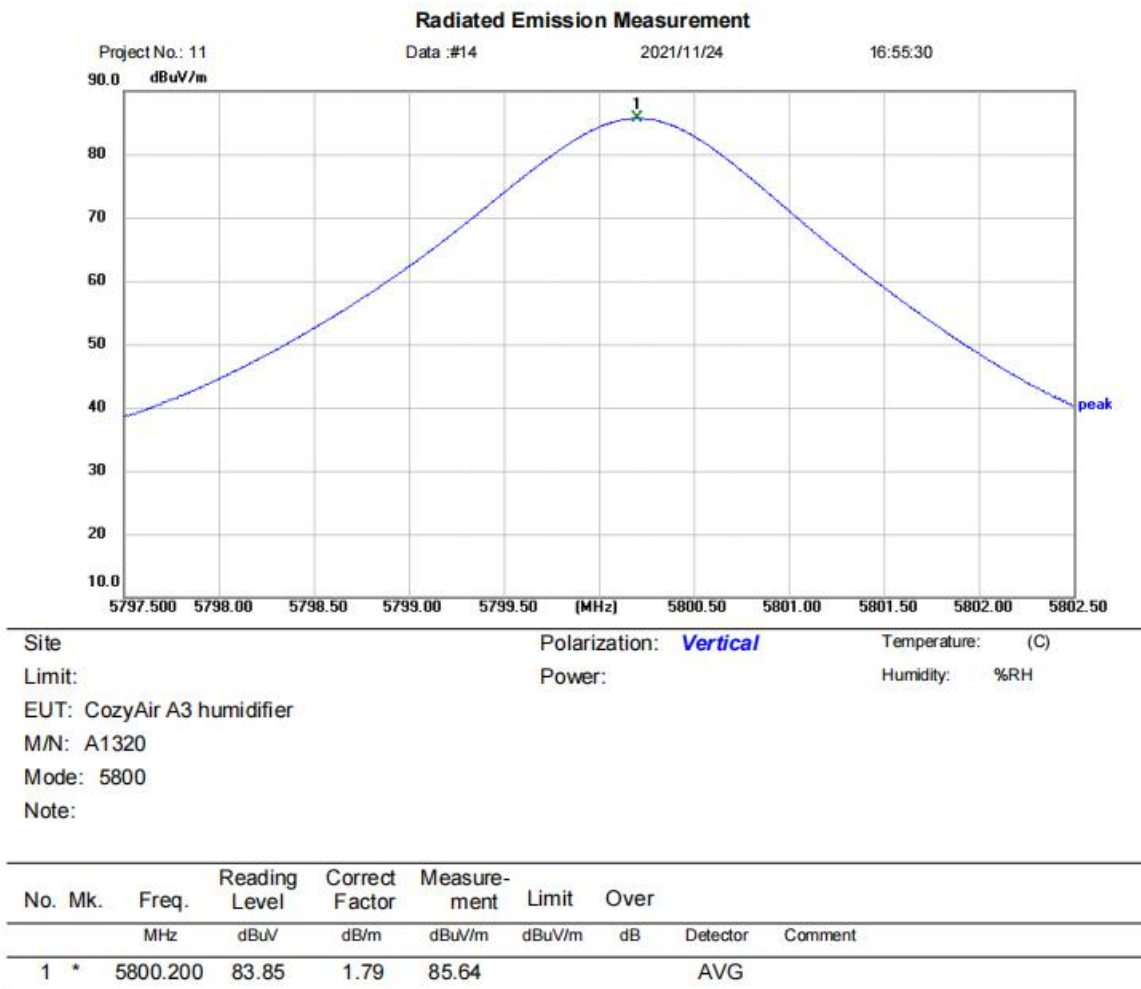


Mid channel vertical peak

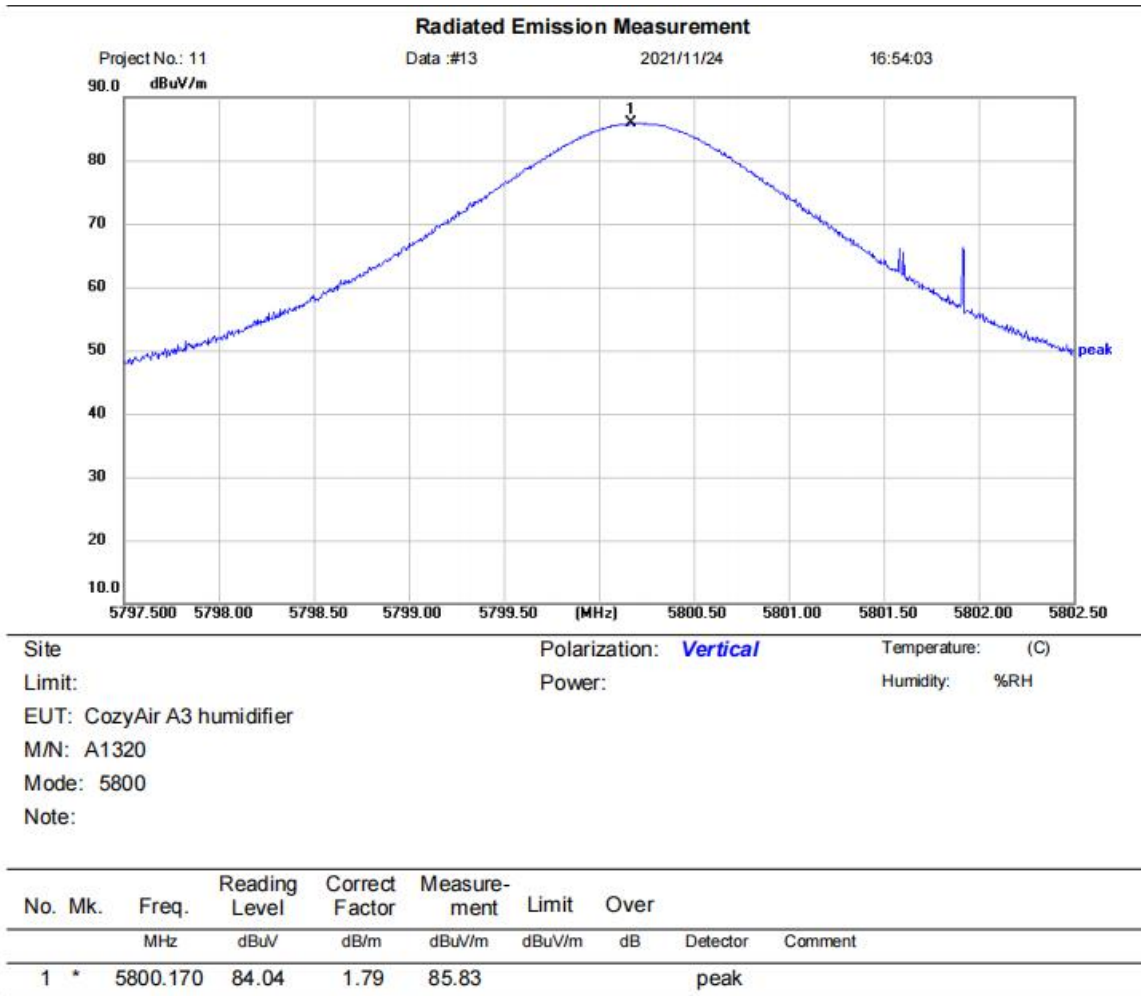


High channel horizontal avg

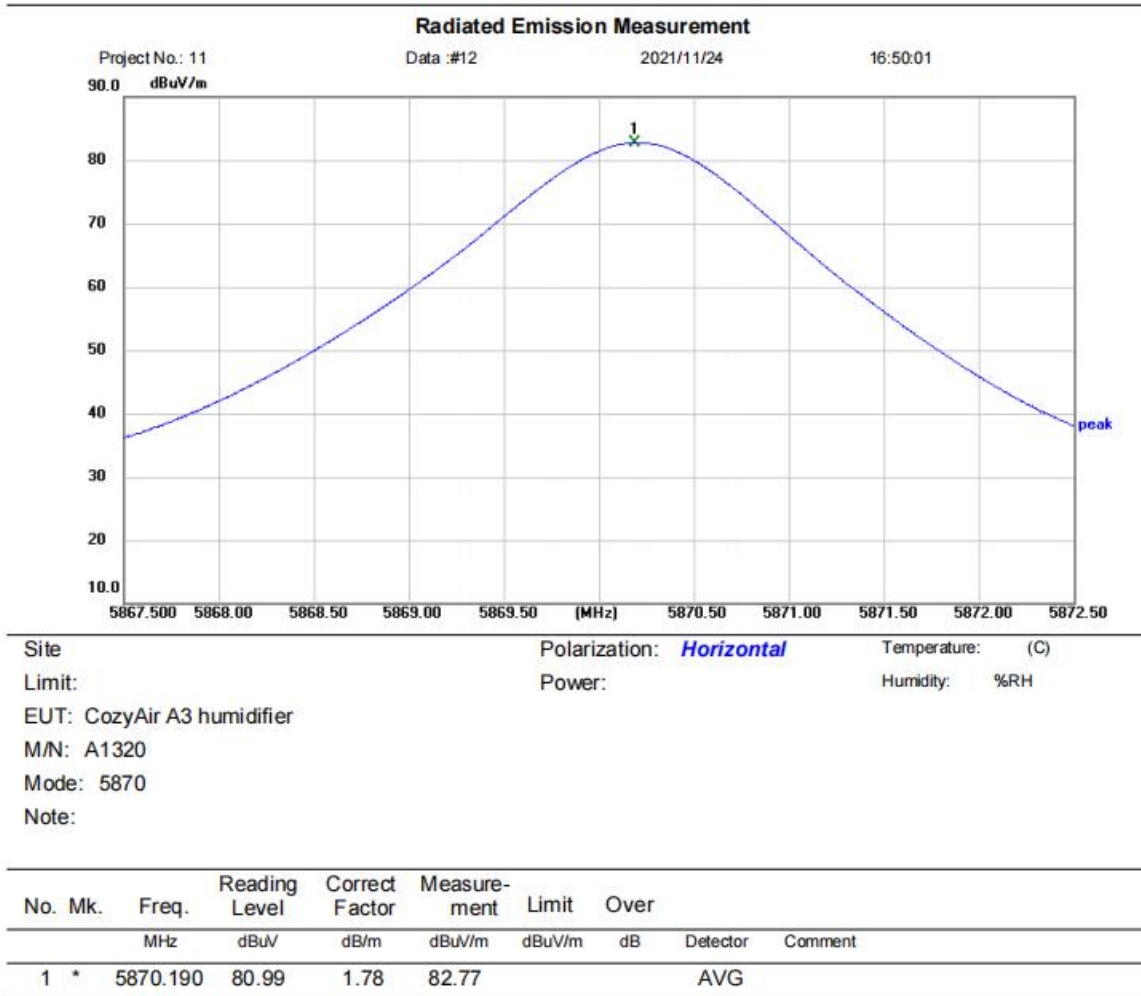


High channel horizontal peak

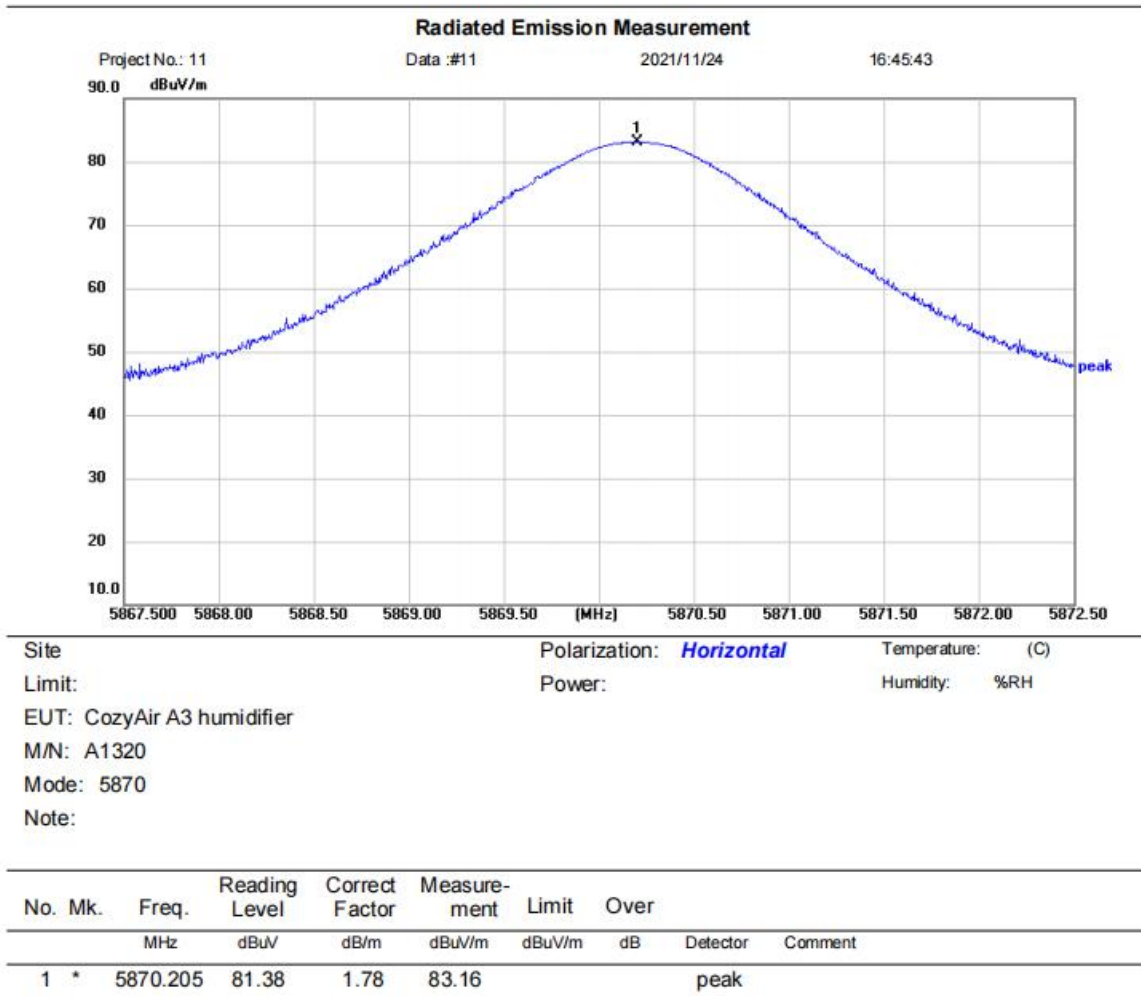

high channel vertical avg

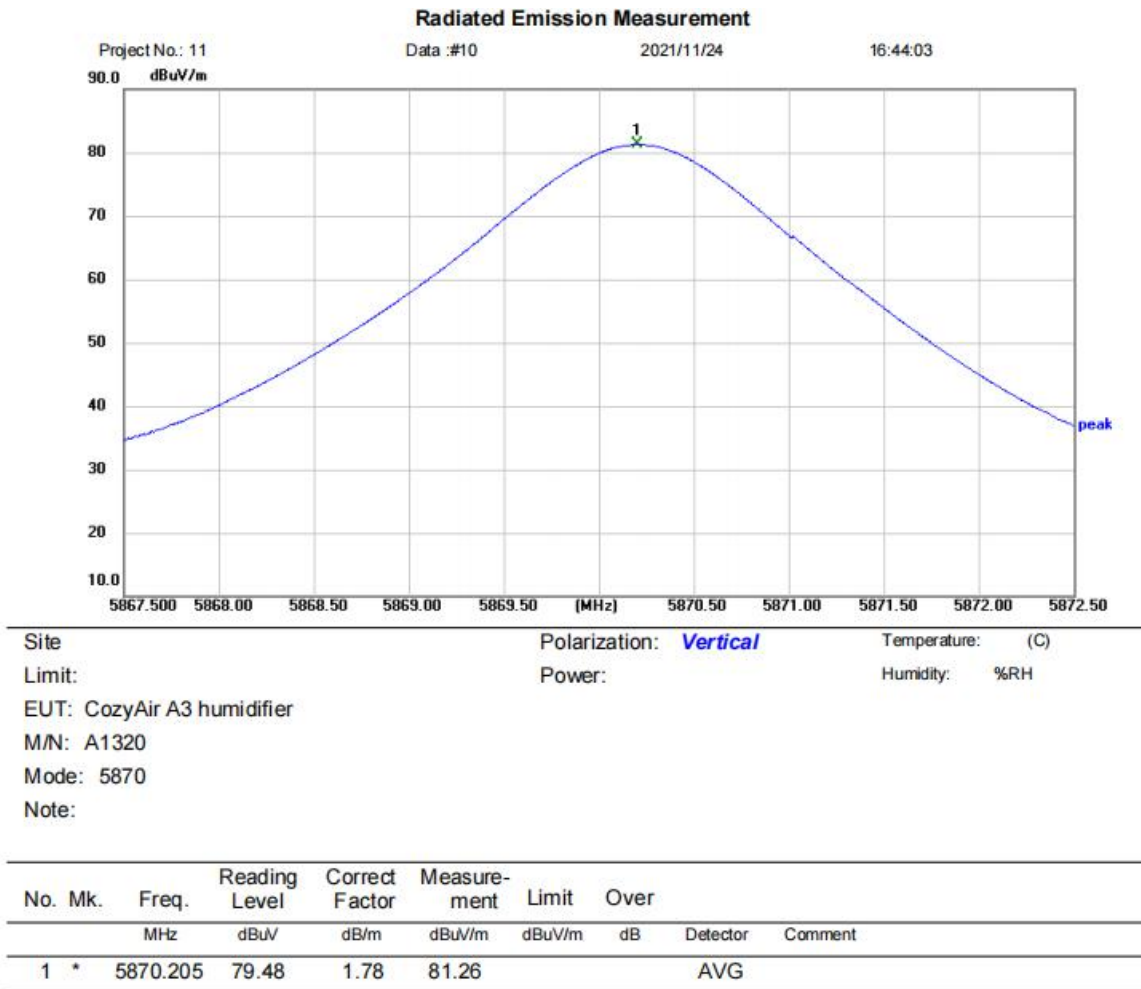

high channel vertical peak

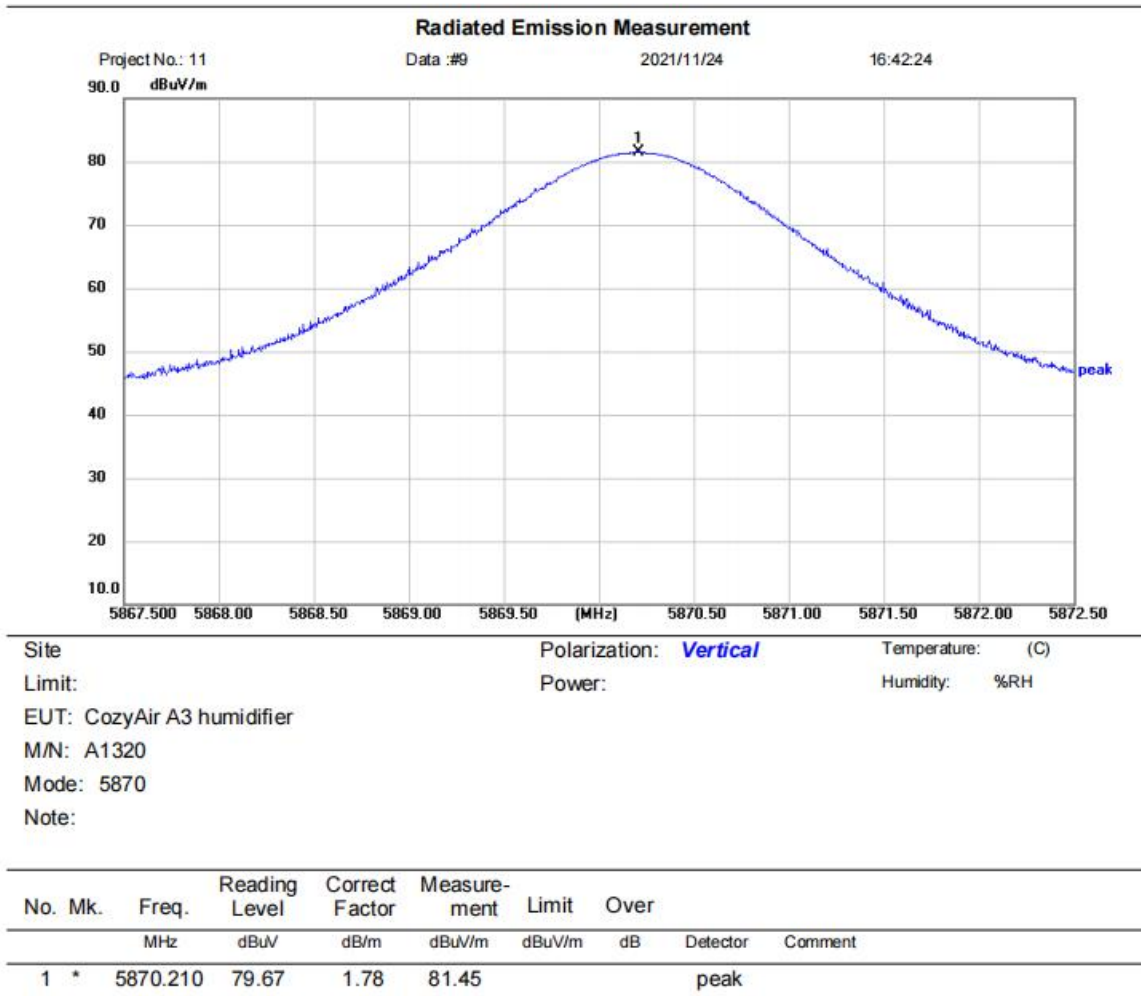


12 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.9
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

12.1 LIMITS

Limit:	N/A
--------	-----


12.2 BLOCK DIAGRAM OF TEST SETUP

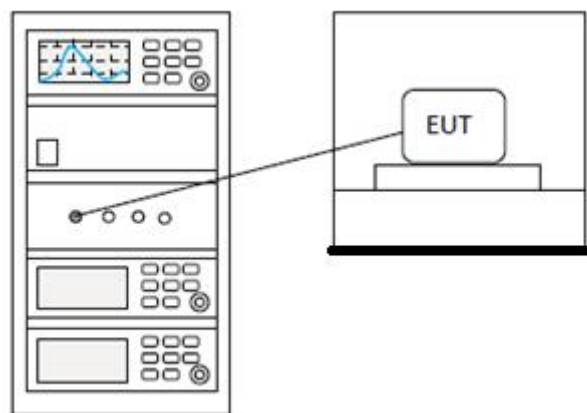


12.3 TEST DATA

Test Frequency MHz	20dB Bandwidth kHz	Result
5730	29.5kHz	Pass
5800	29.0 kHz	Pass
5870	29.5 kHz	Pass

12.4 TEST PLOTS

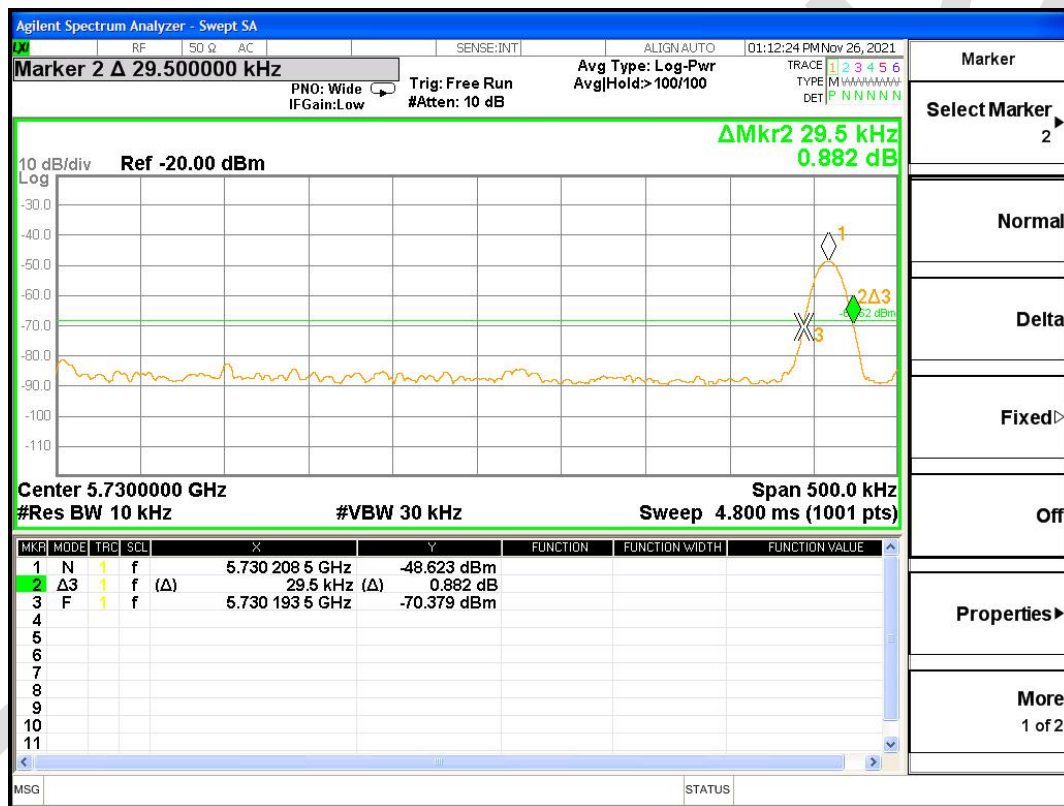

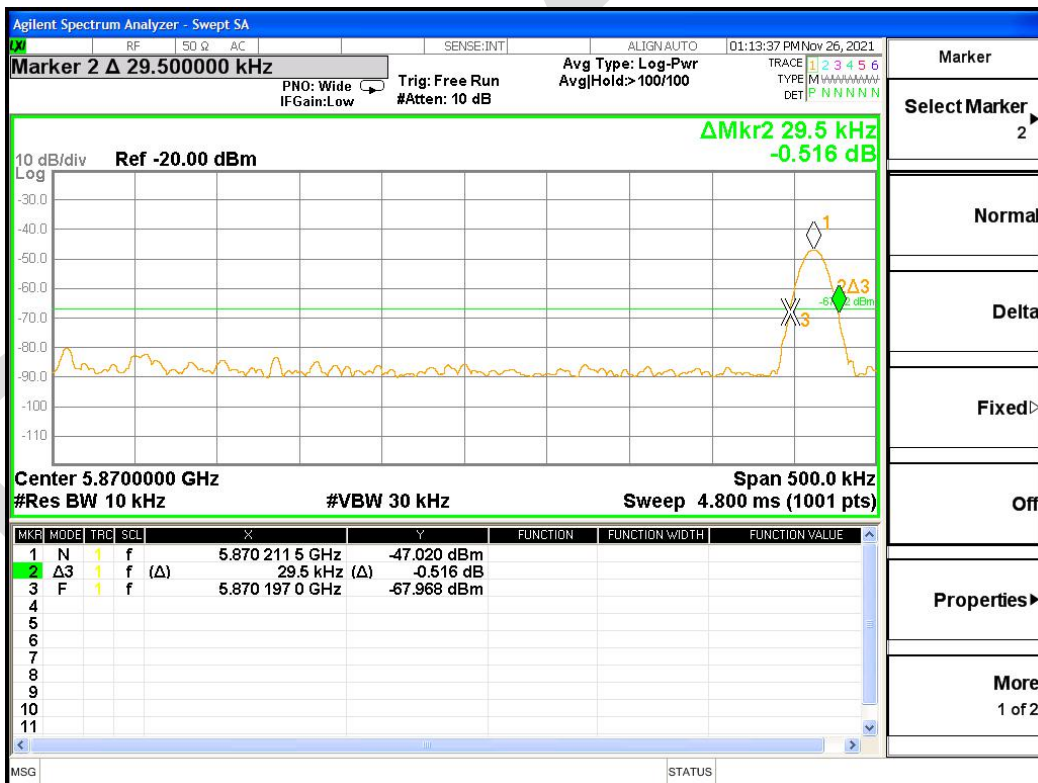

13 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	N/A


13.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

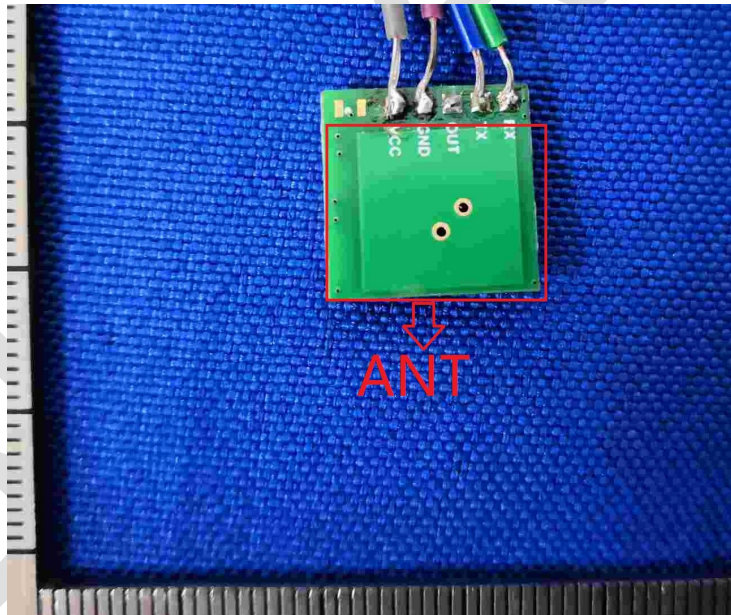

14 AC POWER LINE CONDUCTED EMISSION


Test Standard	47 CFR Part 15 Subpart C Section 15.207
Test Method	ANSI C63.10-2013
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

14.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

14.2 BLOCK DIAGRAM OF TEST SETUP

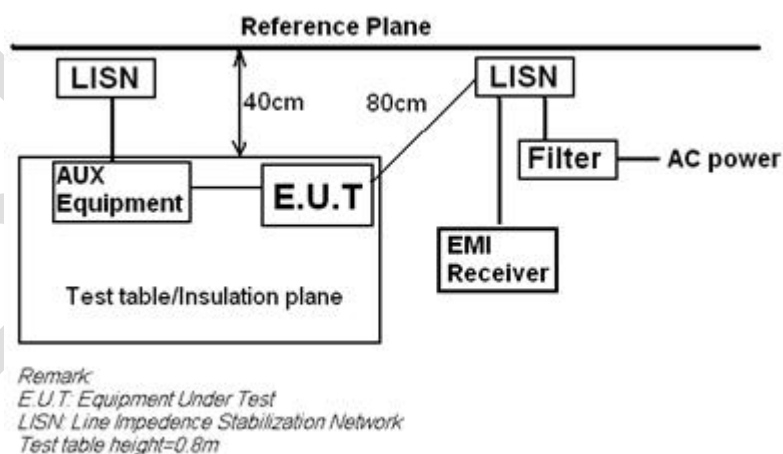


14.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- Remark: $LISN = Read\ Level + Cable\ Loss + LISN\ Factor$


14.4 TEST DATA

[TestMode: TX]; [Line: Line] ;[Power:AC120V/60Hz]

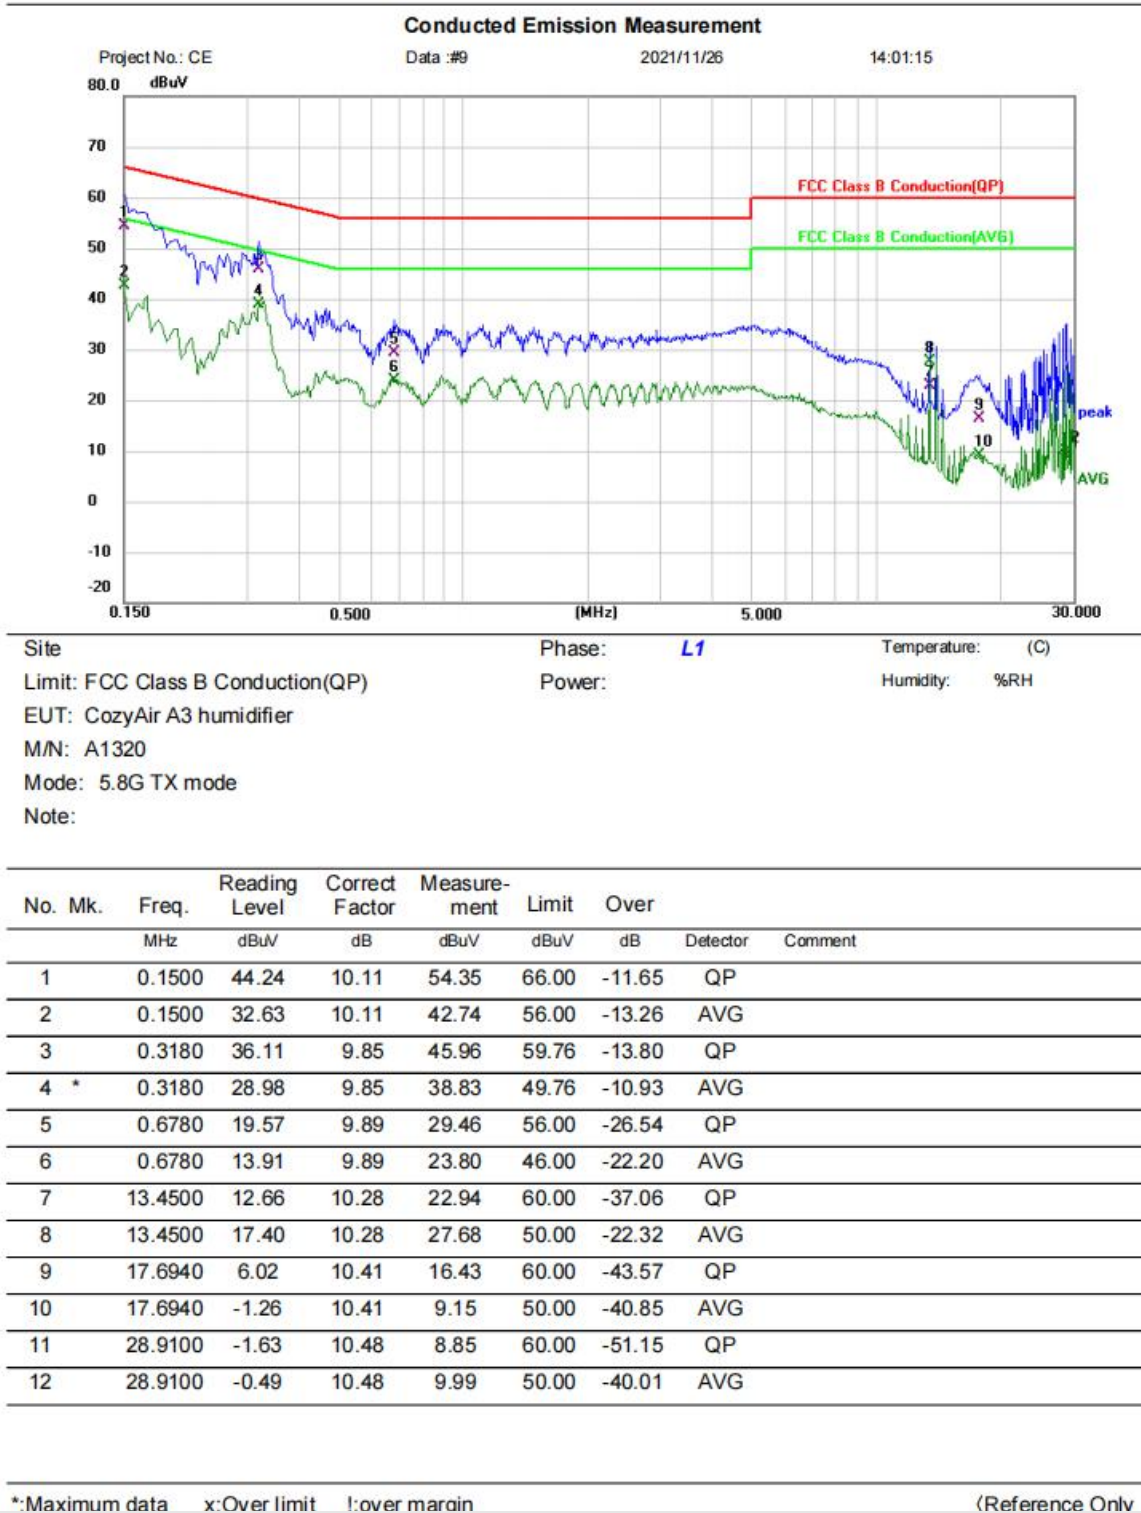

Test Result: Pass

[TestMode: TX]; [Line: Nutral] ;[Power:AC120V/60Hz]

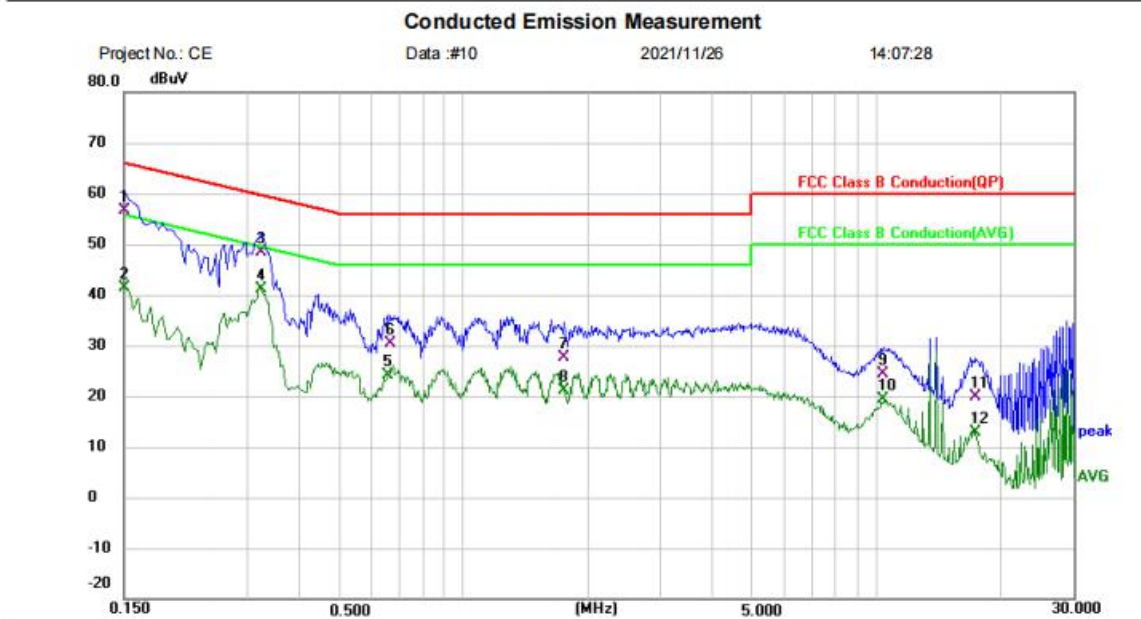

Site: Phase: **N** Temperature: (C)
Limit: FCC Class B Conduction(QP) Power: Humidity: %RH
EUT: CozyAir A3 humidifier
M/N: A1320
Mode: 5.8G TX mode
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	46.66	10.03	56.69	66.00	-9.31	QP	
2		0.1500	31.34	10.03	41.37	56.00	-14.63	AVG	
3		0.3220	38.56	9.77	48.33	59.66	-11.33	QP	
4	*	0.3220	31.36	9.77	41.13	49.66	-8.53	AVG	
5		0.6540	14.23	9.82	24.05	46.00	-21.95	AVG	
6		0.6660	20.63	9.82	30.45	56.00	-25.55	QP	
7		1.7460	17.82	9.85	27.67	56.00	-28.33	QP	
8		1.7460	11.20	9.85	21.05	46.00	-24.95	AVG	
9		10.4379	14.28	10.18	24.46	60.00	-35.54	QP	
10		10.4379	9.12	10.18	19.30	50.00	-30.70	AVG	
11		17.3140	9.51	10.36	19.87	60.00	-40.13	QP	
12		17.3140	2.44	10.36	12.80	50.00	-37.20	AVG	


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Radiated Emissions

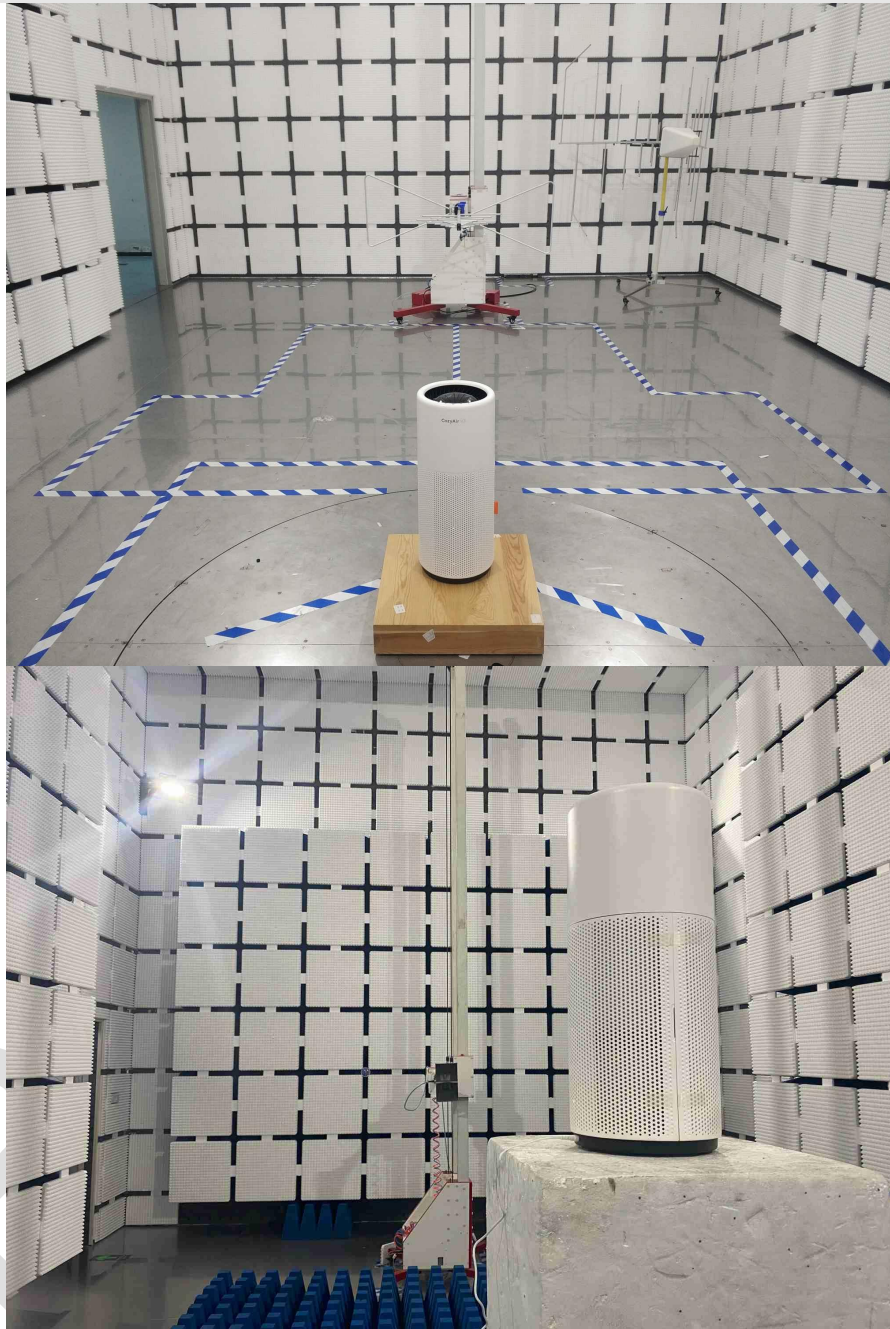

Restricted Band Around Fundamental Frequency



Conducted Emissions at AC Power Line (150kHz-30MHz)



APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202109-A2401

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.