FCC TEST REPORT

FCC ID: 2AXYU-7216RC

Product	:	433M Remote control
Model Name	:	7216RC
Brand	:	N/A
Report No.	:	PTC25121614503E-FC01

Prepared for

MING YUNG HUNG ENTERPRISE(CAMBODIA) CO.,LTD

Phum Kantouk Choeng, Sangkat Kantouk, Khan Kambol, Phnom Penh, Cambodia

Prepared by

Precise Testing & Certification Co., Ltd

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

1. TEST RESULT CERTIFICATION

Applicant's name	:	MING YUNG HUNG ENTERPRISE(CAMBODIA) CO.,LTD
Address	:	Phum Kantouk Choeng, Sangkat Kantouk, Khan Kambol, Phnom Penh, Cambodia
Manufacture's name	:	MING YUNG HUNG ENTERPRISE(CAMBODIA) CO.,LTD
Address	:	Phum Kantouk Choeng, Sangkat Kantouk, Khan Kambol, Phnom Penh, Cambodia
Product	:	433M Remote control
Model	:	7216RC
Standards	:	FCC CFR47 Part 15 Section 15.231
Test procedure	:	ANSI C63.10-2020
Test Date	:	Jan. 07, 2026 to Jan. 11, 2026
Date of Issue	:	Jan. 11, 2026
Test Result	:	Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

Jack zhou / Engineer

Technical Manager:

Simon Pu / Manager

Contents

2 TEST SUMMARY **4**

3 GENERAL INFORMATION **5**

3.1 GENERAL DESCRIPTION OF E.U.T. 5

3.2 TEST MODE 5

3.3 TEST SITE 5

3.4 DESCRIPTION OF SUPPORT UNITS 6

4 EQUIPMENT DURING TEST **7**

4.1 EQUIPMENTS LIST 7

4.2 MEASUREMENT UNCERTAINTY 7

5 CONDUCTED EMISSION **8**

5.1 E.U.T. OPERATION 8

5.2 EUT SETUP 8

5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 9

5.4 MEASUREMENT PROCEDURE 9

5.5 CONDUCTED EMISSION LIMIT 9

5.6 MEASUREMENT DESCRIPTION 9

5.7 CONDUCTED EMISSION TEST RESULT 9

6 PULSED OPERATION **10**

6.1 TEST SETUP 10

7 RADIATED SPURIOUS EMISSIONS **14**

7.1 EUT OPERATION 15

7.2 TEST SETUP 16

7.3 SPECTRUM ANALYZER SETUP 17

7.4 TEST PROCEDURE 18

7.5 SUMMARY OF TEST RESULTS 19

8 20DB BANDWIDTH MEASUREMENT **23**

8.1 TEST PROCEDURE 23

8.2 TEST SETUP 23

8.3 TEST RESULT 24

9 ANTENNA REQUIREMENT **25**

10 TEST SETUP **26**

11 EUT PHOTOS **27**

2 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207	N/A
Transmission Cease Time	15.231(a)	PASS
Radiated Emission	15.209 15.205(a)	PASS
Pulsed operation	15.35(c)	PASS
Outside of Band Emission	15.231(b) 15.205 15.209	PASS
20dB Bandwidth	15:215(c)	PASS
Antenna Requirement	15.203	PASS
Remark: N/A: Not Applicable		

3 General Information

3.1 General Description of E.U.T.

Product Name : 433M Remote control

Model Name : 7216RC

Operation Frequency: : 433.93MHz

Antenna installation: : PCB Antenna

Antenna Gain: : 1.2 dBi

Type of Modulation : ASK

Power supply : DC 3V(1.5V*2)

Hardware Version : N/A

Software Version : N/A

3.2 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Modulation	Test mode	Low channel	Middle channel	High channel
ASK	continuously Transmitting	433.93MHz	\	\

3.3 Test Site

Precise Testing & Certification Co., Ltd

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A

FCC Designation Number: CN1219

3.4 Description of Support Units

Equipment	Model No.	Series No.	Parameters
N/A	N/A	N/A	N/A

4 Equipment During Test

4.1 Equipments List

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibration Interval
1	EMI Test Receiver	Rohde & Schwarz	ESCI7	101671	Aug. 14,2025	1 Year
2	EMC Analyzer (9k~26.5GHz)	Agilent	E4407B	MY45109572	Aug. 14,2025	1 Year
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3355	Sep. 10,2025	1 Year
4	Amplifier	SCHWARZBECK	BBV 9475	9745-0013	Aug. 14,2025	1 Year
5	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1246	Aug. 14,2025	1 Year
6	Coaxial Cable(below 1GHz)	LARGE	CALB1	-	Aug. 14,2025	1 Year
7	Coaxial Cable(above 1GHz)	LARGE	CALB2	-	Aug. 14,2025	1 Year
8	Loop Antenna	Schwarzbeck	FMZB 1519	012	Aug. 14,2025	1 Year

4.2 Measurement Uncertainty

Parameter	**Uncertainty**
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10^{-6}
Bandwidth	± 1.5 x 10^{-6}
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9kHz~30MHz)	±3.15dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

5 Conducted Emission

Test Requirement:	:	FCC CFR 47 Part 15 Section 15.207
Test Method	:	ANSI C63.10-2020
Test Result	:	PASS
Frequency Range	:	150kHz to 30MHz
Class/Severity	:	Class B

5.1 E.U.T. Operation

Operating Environment :

Temperature	:	23.9 °C
Humidity	:	51.4 % RH
Atmospheric Pressure	:	101.21kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10-2020.

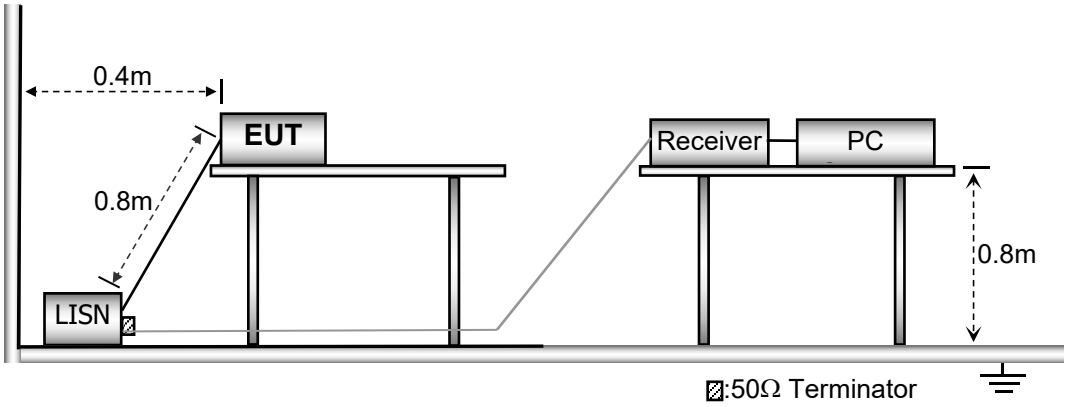

5.3 Test SET-UP (Block Diagram of Configuration)

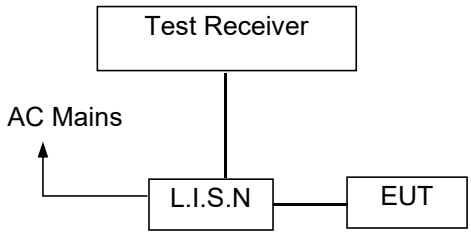

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:
1. The lower limit shall apply at the transition frequencies
2.The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result

N/A.

Note: Only powered by Non-rechargeable batteries.

6 Pulsed Operation

The duty cycle was determined by the following equation:

To calculate the actual field intensity, the duty cycle correction factor in decibel is needed for later use and can be obtained from following conversion

6.1 Test Setup



Duty Cycle(%)=Total On interval in a complete pulse train/ Length of a complete pulse train * %

Duty Cycle Correction Factor (dB)=20 * Log_{10}(Duty Cycle(%))

Total transmission time(ms)	1.23*11+0.57*16=22.65
Length of a complete transmission period(ms)	51.40
Duty Cycle(%)	44.07
Duty Cycle Correction Factor(dB)	-7.12

Refer to the duty cycle plot (as below), This device meets the FCC requirement.

Length of a complete pulse train:

Remark: FCC part15.35(c) required that a complete pulse train is more than 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

Tp

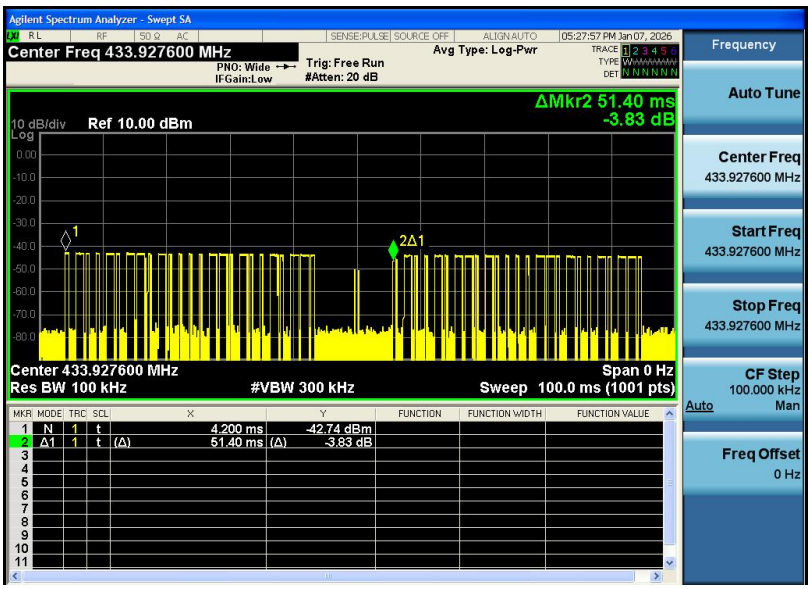
Agilent Spectrum Analyzer - Swept SA
Center Freq 433.927600 MHz
PNO: Wide
IFGain:Low
Trig: Free Run
#Atten: 20 dB
Avg Type: Log-Pwr
05:27:57 PM Jan 07, 2026
ΔMkr2 51.40 ms
-3.83 dB
10 dB/div
Ref 10.00 dBm
Log
Center 433.927600 MHz
Span 0 Hz
Res BW 100 kHz
#VBW 300 kHz
Sweep 100.0 ms (1001 pts)
MKR MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE
1 N 1 t 4.200 ms -42.74 dBm
2 Δ1 1 t (Δ) 51.40 ms (Δ) -3.83 dB
Frequency
Auto Tune
Center Freq
433.927600 MHz
Start Freq
433.927600 MHz
Stop Freq
433.927600 MHz
CF Step
100.000 kHz
Auto
Man
Freq Offset
0 Hz

Pulse 1

Pulse 2

FCC Part15.231 (a) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(2)A transmitter activated automatically shall cease transmission within 5 seconds after activation.

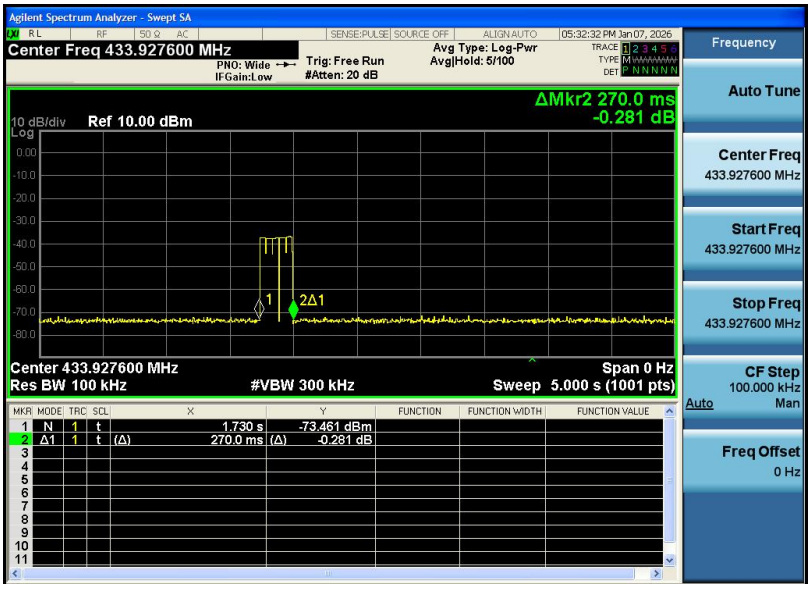

7 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.231 & 15.209 &15.205

Test Method: : ANSI C63.10-2020

Test Result: : PASS

Measurement Distance: : 3m

Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in § 15.209, whichever limit permits a higher field strength.
In addition to the provisions of § 15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	1,250 to 3,750	125 to 375
174-260	3,750	375
260-470	3,750 to 12,500	375 to 1250
Above 470	12,500	1,250

Note: Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, μV/m at 3 meters = 56.81818(F) - 6136.3636; for the band 260-470 MHz, μV/m at 3 meters = 41.6667(F) - 7083.3333. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

7.1 EUT Operation

Operating Environment :

Temperature:	:	23.5 °C
Humidity:	:	51.1 % RH
Atmospheric Pressure:	:	101.2kPa
EUT Operation :	:	Refer to section 3.2

7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site

The test setup for emission measurement below 30MHz

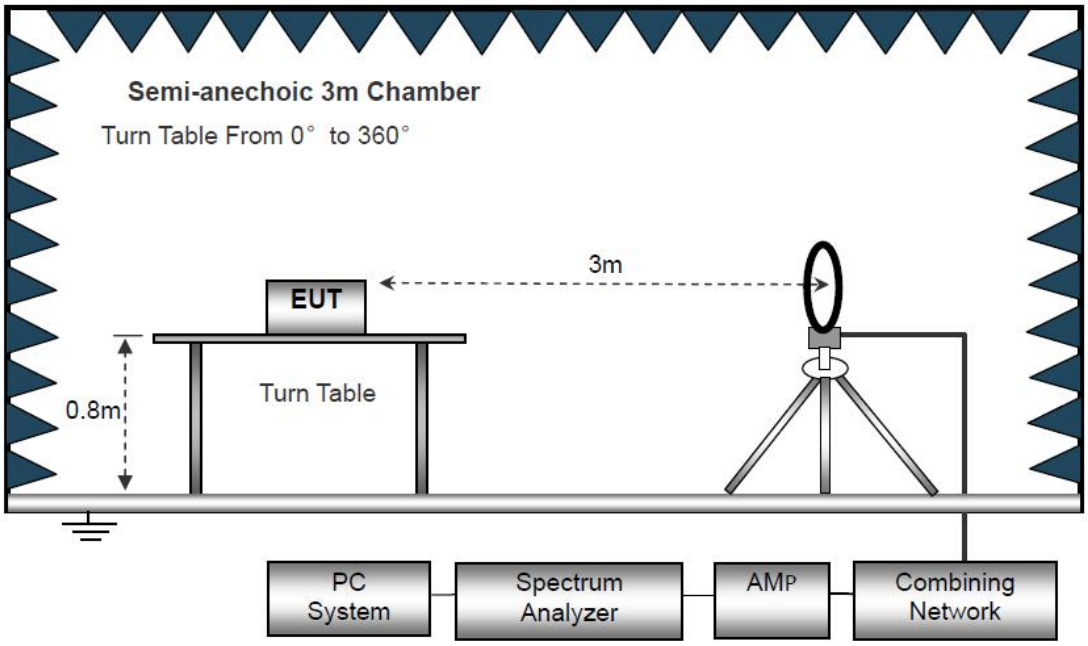

The test setup for emission measurement from 30 MHz to 1 GHz.

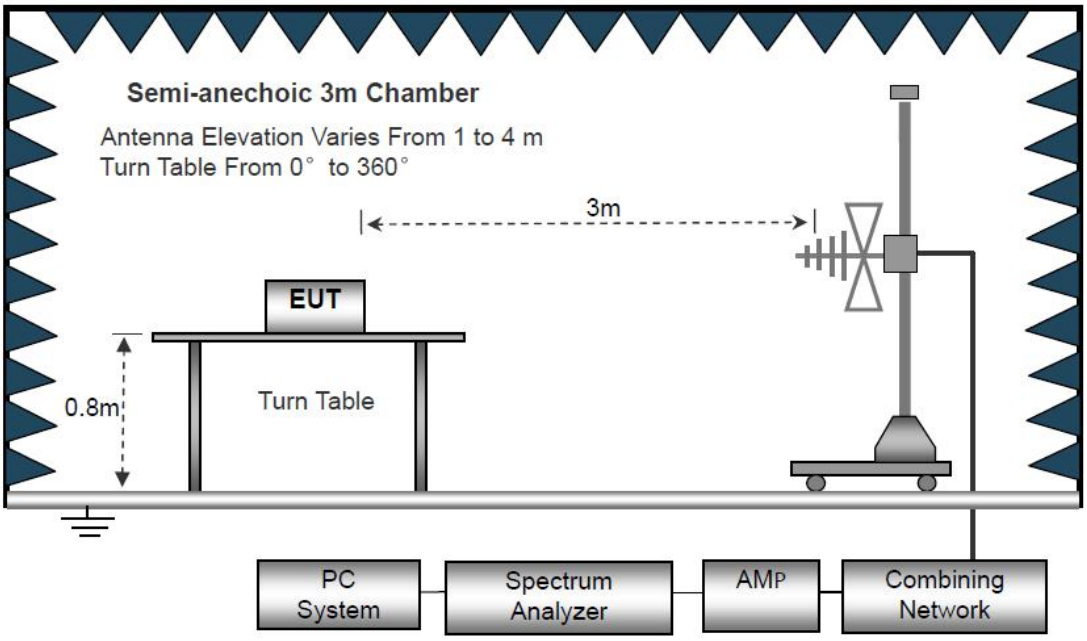

The test setup for emission measurement above 1 GHz

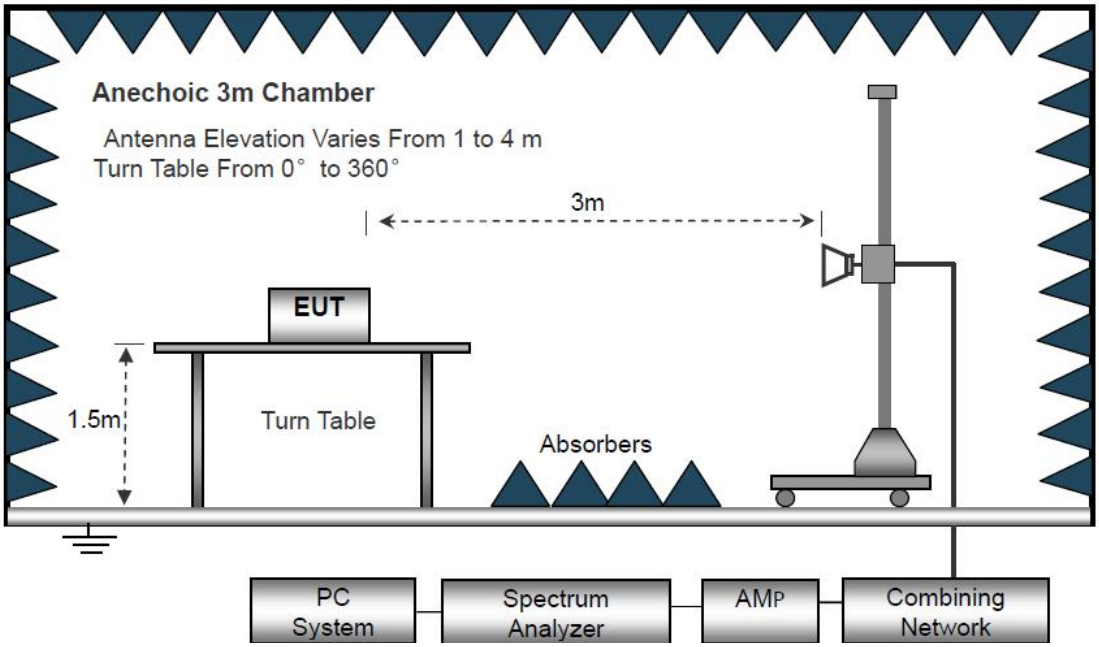

7.3 Spectrum Analyzer Setup

Below 30MHz

IF Bandwidth		10kHz
Resolution Bandwidth		10kHz
Video Bandwidth		10kHz

30MHz ~ 1GHz

Detector	:	PK
Resolution Bandwidth	:	100kHz
Video Bandwidth	:	300kHz
Detector	:	QP
Resolution Bandwidth	:	120kHz
Video Bandwidth	:	300kHz

Above 1GHz

Detector	:	PK
Resolution Bandwidth	:	1MHz
Video Bandwidth	:	3MHz
Detector	:	AV
Resolution Bandwidth	:	1MHz
Video Bandwidth	:	10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m or 1.5m above ground plane.

2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.

5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

6. Repeat above procedures until the measurements for all frequencies are complete.

7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room

7.5 Summary of Test Results

Test Frequency: Below 30MHz

The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test Frequency: 30MHz ~ 5GHz

All applicable test modes have been tested with TX mode

Test Result of Fundamental Emission:

Frequency (MHz)	Reading (dBuV)	Factor (dB)	Peak Value (dBμV/m)	PDCF	Average value (dBuV/m)	Average Limit (dBμV/m)	Margin Limit (dB)	Polarization
434.01	73.28	-3.49	69.79	-7.12	62.67	80.8	18.13	H
434.01	63.67	-3.49	60.18	-7.12	53.06	80.8	27.74	V

Note: PDCF is the abbreviation of duty cycle factor, DCF= 20 log(Duty cycle).

Test Result of Spurious Emissions:

Blow 1GHz:

Antenna Polarization: Horizontal

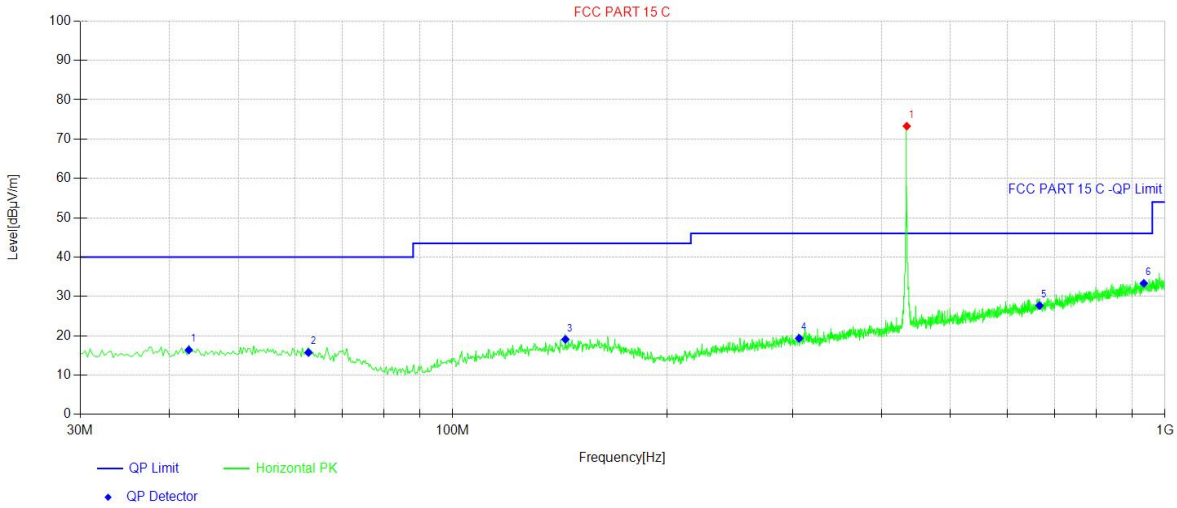

Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	42.61	26.36	-9.97	16.39	40.00	23.61	Horizontal	PASS
2	62.74	26.92	-11.17	15.75	40.00	24.25	Horizontal	PASS
3	143.98	27.66	-8.57	19.09	43.50	24.41	Horizontal	PASS
4	306.45	26.48	-7.13	19.35	46.00	26.65	Horizontal	PASS
5	666.56	26.49	1.20	27.69	46.00	18.31	Horizontal	PASS
6	934.04	27.02	6.31	33.33	46.00	12.67	Horizontal	PASS
NO.	Freq. [MHz]	PK Reading [dBμV/m]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	Polarity	Verdict
1*	434.01	73.28	-3.49	69.79	-	-	Horizontal	-

Remark: 1.Emission Level=Reading+(Cable Loss+ANT Factor-AMP Factor);
2. * Represents the fundamental frequency.

Antenna Polarization: Vertical

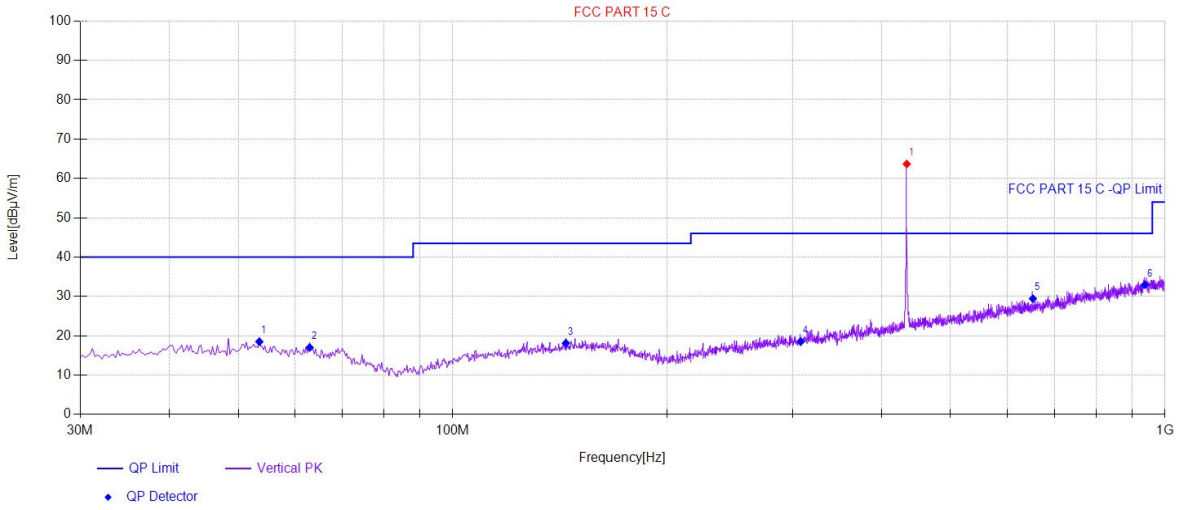

Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	53.52	28.69	-10.19	18.50	40.00	21.50	Vertical	PASS
2	62.98	28.22	-11.21	17.01	40.00	22.99	Vertical	PASS
3	144.22	26.67	-8.55	18.12	43.50	25.38	Vertical	PASS
4	308.15	25.62	-7.06	18.56	46.00	27.44	Vertical	PASS
5	652.50	28.45	1.00	29.45	46.00	16.55	Vertical	PASS
6	937.44	26.65	6.35	33.00	46.00	13.00	Vertical	PASS
NO.	Freq. [MHz]	PK Reading [dBμV/m]	Factor [dB]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	Polarity	Verdict
1*	434.01	63.67	-3.49	60.18	-	-	Horizontal	-

Remark: 1.Emission Level=Reading+(Cable Loss+ANT Factor-AMP Factor);
2. * Represents the fundamental frequency.

Above 1GHz:

NO.	Freq. [MHz]	PK Reading [dBμV]	Factor [dB]	PDCF	PK Level [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	Result	Polarity	Detector
1	1302.30	51.63	-11.6	/	40.03	74	33.97	PASS	H	PK
2	1736.40	55.36	-7.98	/	47.38	74	26.62	PASS	H	PK
3	2170.50	52.67	-6.99	/	45.68	74	28.32	PASS	H	PK
4	2604.60	55.49	-4.31	/	51.18	74	22.82	PASS	H	PK
5	3038.70	50.68	-3.5	/	47.18	74	26.82	PASS	H	PK
6	3472.80	51.60	-0.38	/	51.22	74	22.78	PASS	H	PK
7	1302.30	57.69	-11.6	/	46.09	74	27.91	PASS	V	PK
8	1736.40	55.30	-7.98	/	47.32	74	26.68	PASS	V	PK
9	2170.50	55.44	-6.99	/	48.45	74	25.55	PASS	V	PK
10	2604.60	51.94	-4.07	/	47.87	74	26.13	PASS	V	PK
11	3038.70	49.90	-1.91	/	47.99	74	26.01	PASS	V	PK
12	3472.80	48.85	1.25	/	50.1	74	23.9	PASS	V	PK

NO.	Freq. [MHz]	PK Reading [dBμV]	Factor [dB]	PDCF	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Result	Polarity	Detector
1	1302.30	51.63	-11.6	-7.12	32.91	54	21.09	PASS	H	AV
2	1736.40	55.36	-7.98	-7.12	40.26	54	13.74	PASS	H	AV
3	2170.50	52.67	-6.99	-7.12	38.56	54	15.44	PASS	H	AV
4	2604.60	55.49	-4.31	-7.12	44.06	54	9.94	PASS	H	AV
5	3038.70	50.68	-3.5	-7.12	40.06	54	13.94	PASS	H	AV
6	3472.80	51.6	-0.38	-7.12	44.10	54	9.9	PASS	H	AV
7	1302.30	57.69	-11.6	-7.12	38.97	54	15.03	PASS	V	AV
8	1736.40	55.3	-7.98	-7.12	40.20	54	13.8	PASS	V	AV
9	2170.50	55.44	-6.99	-7.12	41.33	54	12.67	PASS	V	AV
10	2604.60	51.94	-4.07	-7.12	40.75	54	13.25	PASS	V	AV
11	3038.70	49.9	-1.91	-7.12	40.87	54	13.13	PASS	V	AV
12	3472.80	48.85	1.25	-7.12	42.98	54	11.02	PASS	V	AV

Remark:

1.The field strength is calculated by adding the Antenna Factor, Cable Factor and Preamplifier.

The formula is as follows is as follows:

Final Test Level =Receiver Reading +Correct Factor

8 20dB Bandwidth Measurement

Test Requirement	:	FCC Part15.231(c)
Test Method	:	FCC Part15.231(c)
Test Mode	:	Refer to section 3.2
Limit	:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer: RBW = 1% to 5% of the OBW, VBW = three times the RBW.

8.2 Test Setup



8.3 Test Result

Test Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Result
433.93	9.671	1084.80	pass

Test plots

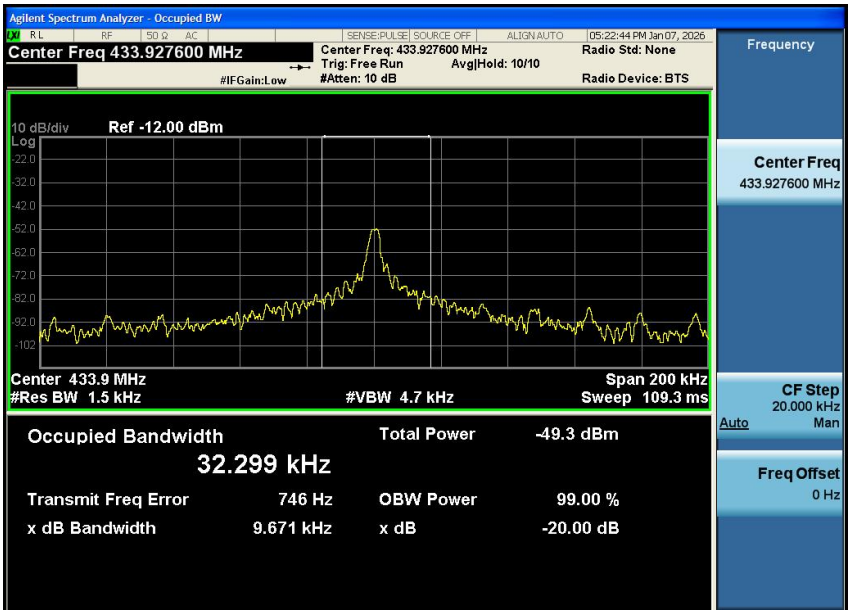

9 Antenna Requirement

According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has an PCB Antenna which meet the requirement of this section.

10 Test Setup

Radiated Spurious Emissions
From 30MHz-1000MHz

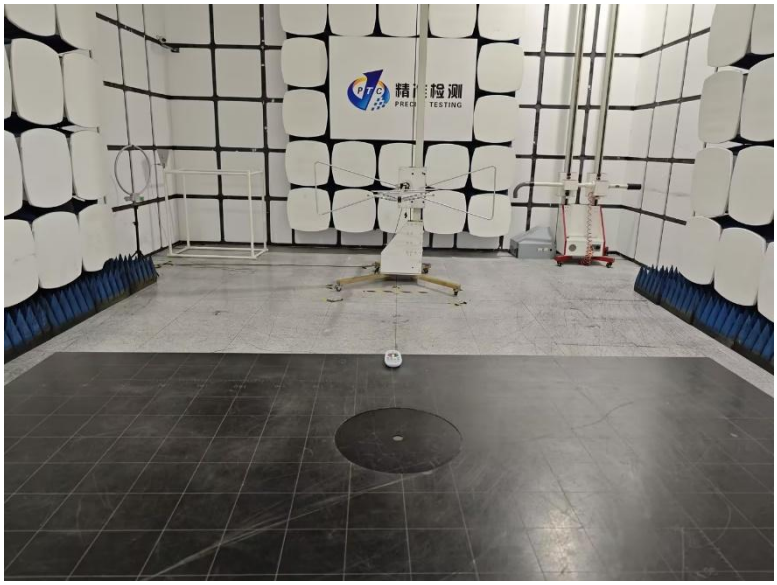

Above 1GHz

11 EUT Photos

Strobe
Fade
Twinkle
Breath
Chaser
Random
RGB flash
K/B Voice
RF Remoter

RF Remoter

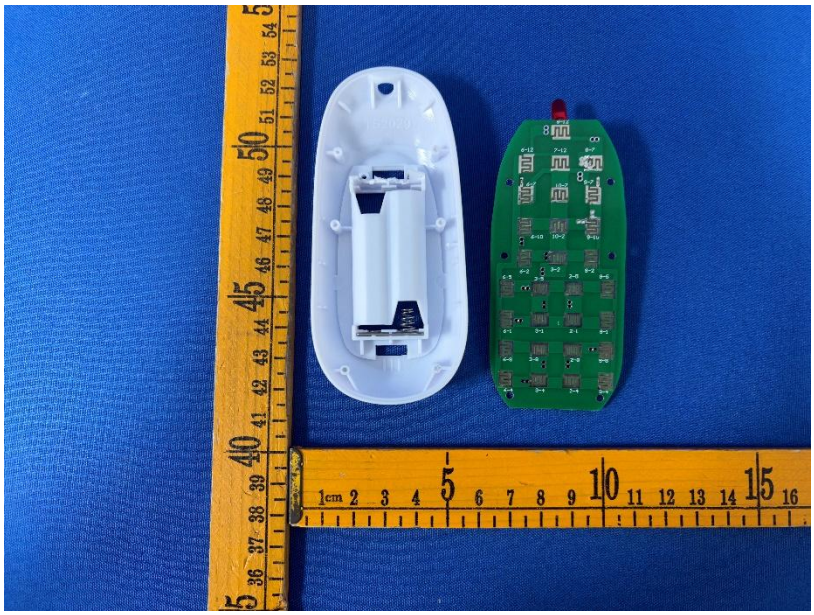

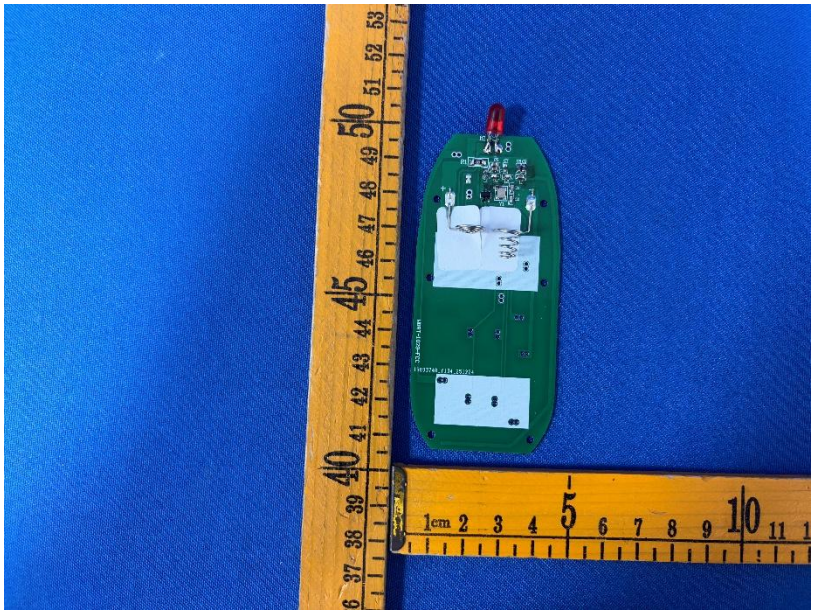

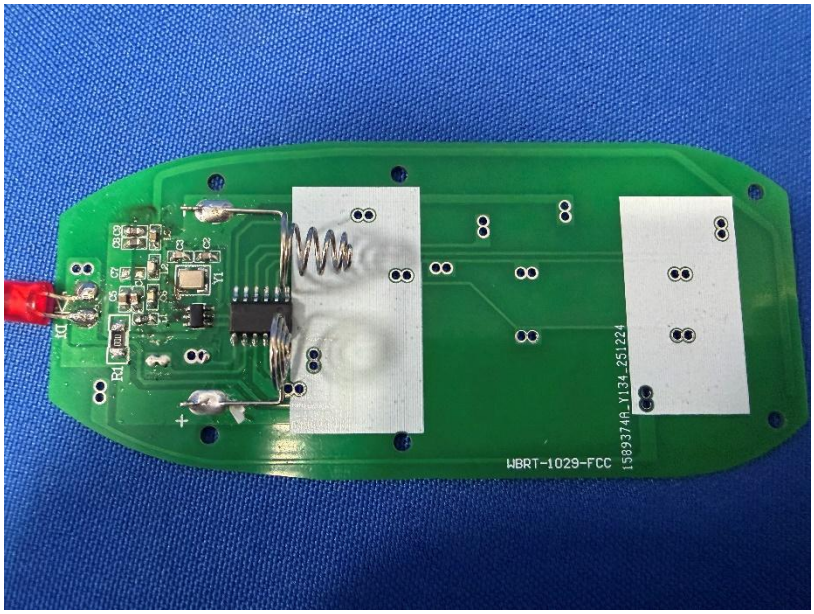
WBRT-1029-FCC
1589374A_X134_251224

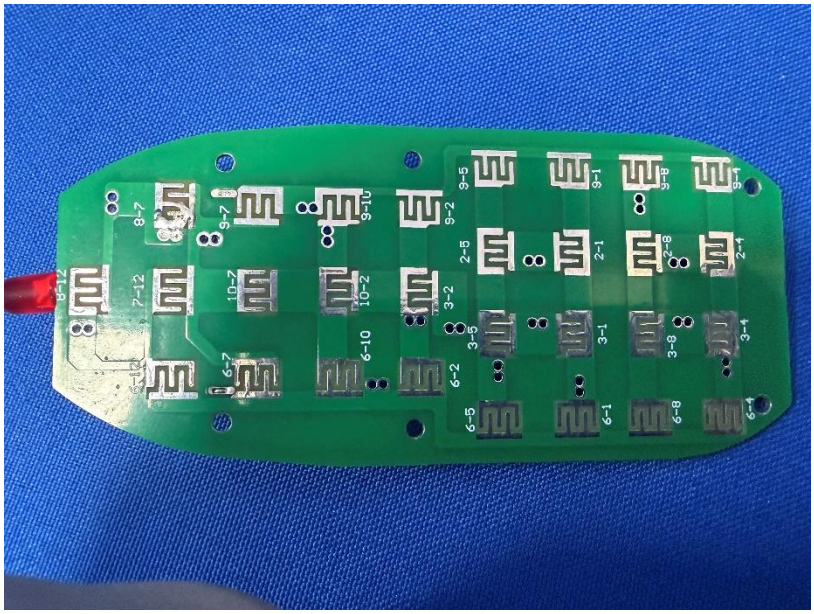

********THE END REPORT********