FCC Test Report

Client Name	:	dormakaba China Ltd.
Address	:	No.101,Tongsheng Road, Suzhou Industrial Park Suzhou, Jiangsu China 215126
Product Name	:	Safe Checkpoint Tower / SafeTower
Date	:	Mar. 08, 2021

Shenzhen Anbotek Compliance Laboratory Limited

Contents

1. General Information....4
1.1. Client Information....4
1.2. Description of Device (EUT)....4
1.3. Auxiliary Equipment Used During Test....5
1.4. Description of Test Modes....5
1.5. List of channels....5
1.6. Description Of Test Setup....6
1.7. Test Equipment List....7
1.8. Measurement Uncertainty....8
1.9. Description of Test Facility....8
2. Summary of Test Results....9
3. Conducted Emission Test....10
3.1. Test Standard and Limit....10
3.2. Test Setup....10
3.3. Test Procedure....10
3.4. Test Data....10
4. Radiation Spurious Emission and Band Edge....15
4.1. Test Standard and Limit....15
4.2. Test Setup....16
4.3. Test Procedure....16
4.4. Test Data....17
5. 20DB Occupy Bandwidth Test....23
5.1. Test Standard and Limit....23
5.2. Test Setup....23
5.3. Test Procedure....23
5.4. Test Data....23
6. Dwell Time Test....25
6.1. Test Standard and Limit....25
6.2. Test Setup....25
6.3. Test Procedure....25
6.4. Test Data....25
7. Antenna Requirement....27
7.1. Test Standard and Requirement....27
7.2. Antenna Connected Construction....27
APPENDIX I -- PHOTOGRAPH....28

TEST REPORT

Applicant	:	dormakaba China Ltd.
Manufacturer	:	dormakaba China Ltd.
Product Name	:	Safe Checkpoint Tower / SafeTower
Model No.	:	Safe Checkpoint Tower / SafeTower
Trade Mark	:	dormakaba
Rating(s)	:	Input: 3A/115VAC; 2A/230VAC selected by switch

Test Standard(s)	:	**FCC Part15 Subpart C, Section 15.231**
Test Method(s)	:	**ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt	Nov. 02, 2020
Date of Test	Nov. 02, 2020~Mar. 08, 2021
Prepared By	Yilia Zhong (Engineer / Yilia Zhong)
Reviewer	Bibo Zhang (Supervisor / Bibo Zhang)
Approved & Authorized Signer	Kingkong Jin (Manager / Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	dormakaba China Ltd.
Address	:	No.101,Tongsheng Road, Suzhou Industrial Park Suzhou, Jiangsu China 215126
Manufacturer	:	dormakaba China Ltd.
Address	:	No.101,Tongsheng Road, Suzhou Industrial Park Suzhou, Jiangsu China 215126
Factory	:	dormakaba China Ltd.
Address	:	No.101,Tongsheng Road, Suzhou Industrial Park Suzhou, Jiangsu China 215126

1.2. Description of Device (EUT)

Product Name	:	Safe Checkpoint Tower / SafeTower	
Model No.	:	Safe Checkpoint Tower / SafeTower	
Trade Mark	:	dormakaba	
Test Power Supply	:	AC 120V, 60Hz for adapter/ AC 240V, 60Hz for adapter for adapter	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	WiFi 2.4G: 802.11b/ g 2412-2462MHz SRD: 433.92MHz
		Number of Channel:	WiFi 2.4G: 11 Channels for 802.11b/ g SRD: 1 Channels
		Modulation Type:	WiFi 2.4G: 802.11b CCK; 802.11g OFDM SRD: ASK
		Antenna Type:	WiFi 2.4G: FPC Antenna SRD: Monopole antenna
		Antenna Gain(Peak):	WiFi 2.4G: 2 dBi SRD: 2 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2)This report is for 433.92MHz module.			

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel:(86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com
Hotline 400-003-0500
www.anbotek.com

1.3. Auxiliary Equipment Used During Test

N/A		

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX Mode

Note: During the test, the EUT was keeping continuous transmission.

1.5. List of channels

Channel	Freq. (MHz)	Note (Modulation Type)
01	433.92	ASK

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel:(86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com
Hotline 400-003-0500
www.anbotek.com

1.6. Description Of Test Setup

CE

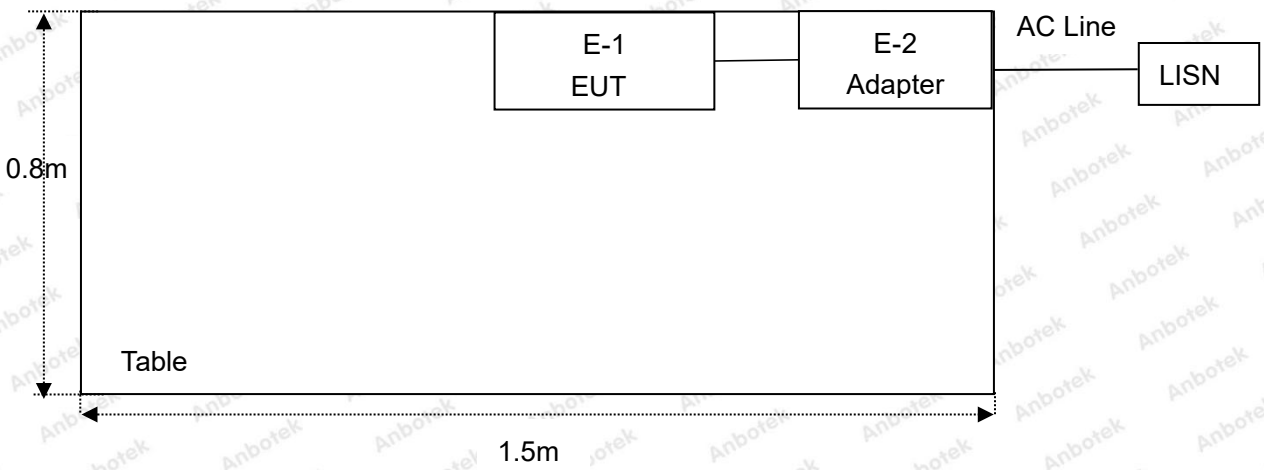

RE

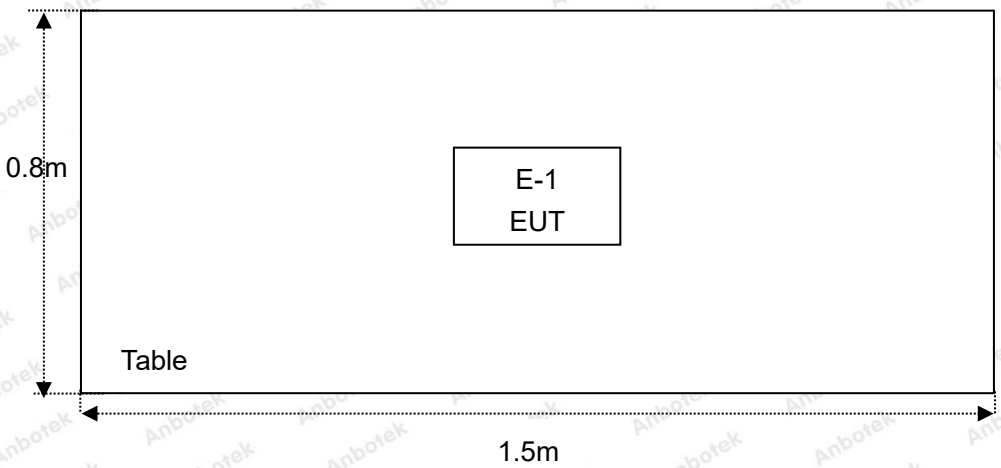

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400-KF	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 26, 2020	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registed and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.
1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209/15.231(b)	Spurious Emission	PASS
15.231(c)	20dB Occupied Bandwidth	PASS
15.231(a)	Dwell time	PASS
Remark: “N/A” is an abbreviation for Not Applicable.		

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel:(86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com
Hotline 400-003-0500
www.anbotek.com

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

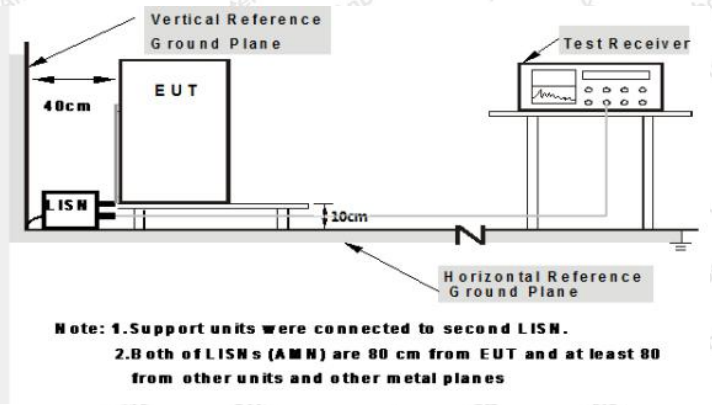

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages.

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.: 22.6℃ Hum.: 53%

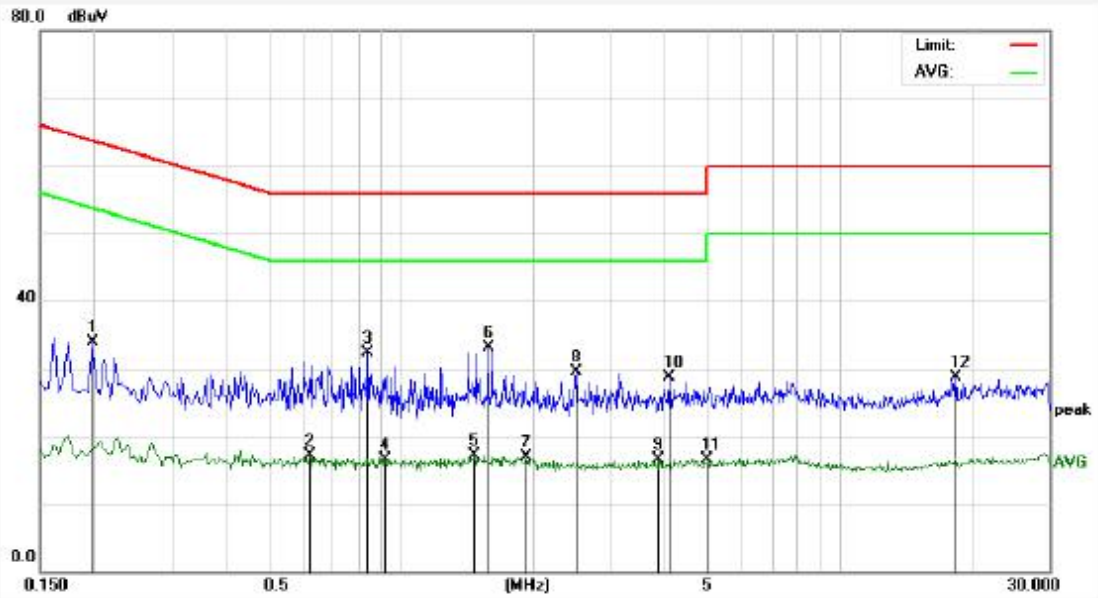

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1980	14.06	19.90	33.96	63.69	-29.73	QP	
2	0.6180	-3.00	20.02	17.02	46.00	-28.98	AVG	
3	0.8420	12.20	20.08	32.28	56.00	-23.72	QP	
4	0.9220	-3.53	20.10	16.57	46.00	-29.43	AVG	
5	1.4700	-3.08	20.13	17.05	46.00	-28.95	AVG	
6	1.5780	12.99	20.13	33.12	56.00	-22.88	QP	
7	1.9380	-3.14	20.14	17.00	46.00	-29.00	AVG	
8	2.5020	9.40	20.15	29.55	56.00	-26.45	QP	
9	3.8780	-3.62	20.18	16.56	46.00	-29.44	AVG	
10	4.0780	8.56	20.18	28.74	56.00	-27.26	QP	
11	4.9860	-3.77	20.21	16.44	46.00	-29.56	AVG	
12	18.3580	8.31	20.31	28.62	60.00	-31.38	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.: 22.6℃ Hum.: 53%

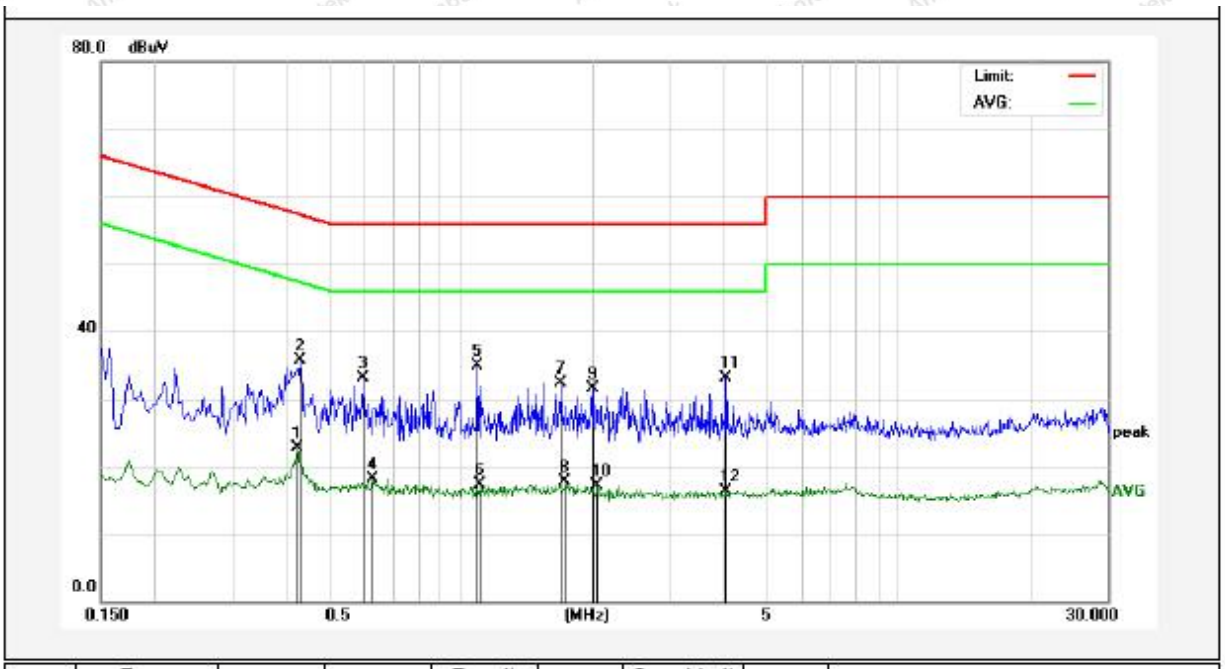

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4220	2.78	19.94	22.72	47.41	-24.69	AVG	
2	0.4300	15.79	19.95	35.74	57.25	-21.51	QP	
3	0.5980	13.07	20.01	33.08	56.00	-22.92	QP	
4	0.6300	-1.95	20.02	18.07	46.00	-27.93	AVG	
5	1.0900	14.73	20.12	34.85	56.00	-21.15	QP	
6	1.1060	-2.78	20.12	17.34	46.00	-28.66	AVG	
7	1.6940	12.15	20.13	32.28	56.00	-23.72	QP	
8	1.7260	-2.46	20.13	17.67	46.00	-28.33	AVG	
9	1.9940	11.30	20.14	31.44	56.00	-24.56	QP	
10	2.0500	-3.00	20.14	17.14	46.00	-28.86	AVG	
11	4.0380	12.87	20.18	33.05	56.00	-22.95	QP	
12	4.0380	-3.82	20.18	16.36	46.00	-29.64	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 240V, 60Hz for adapter
Comment: Live Line
Tem.: 22.6℃ Hum.: 53%

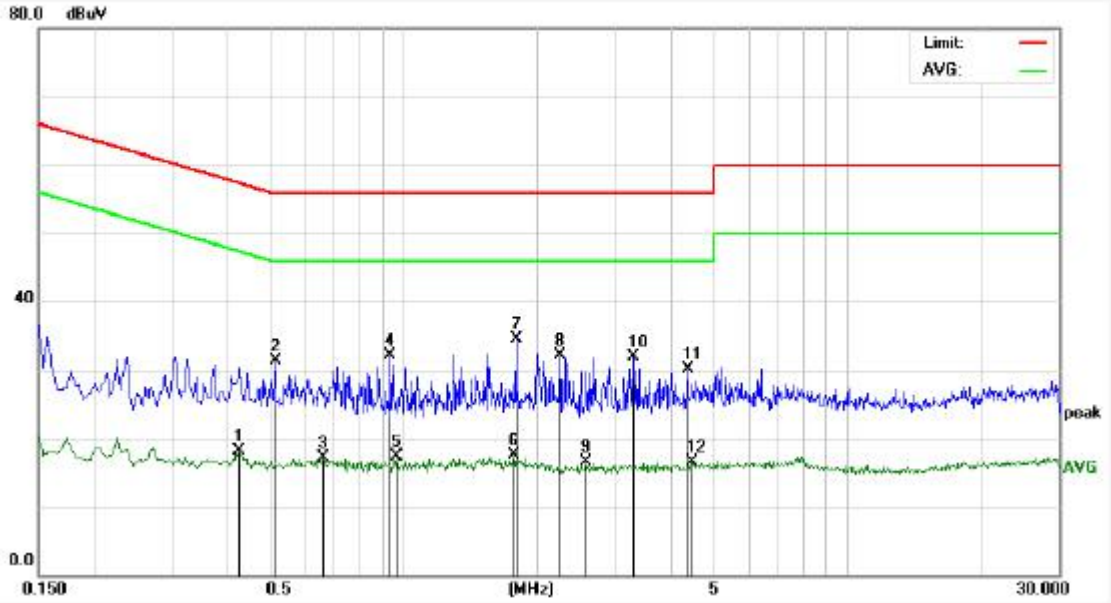

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4260	-1.76	19.95	18.19	47.33	-29.14	AVG	
2	0.5140	11.35	19.98	31.33	56.00	-24.67	QP	
3	0.6580	-2.95	20.03	17.08	46.00	-28.92	AVG	
4	0.9340	11.92	20.10	32.02	56.00	-23.98	QP	
5	0.9660	-2.85	20.11	17.26	46.00	-28.74	AVG	
6	1.7780	-2.54	20.14	17.60	46.00	-28.40	AVG	
7	1.7940	14.36	20.14	34.50	56.00	-21.50	QP	
8	2.2540	12.06	20.14	32.20	56.00	-23.80	QP	
9	2.5700	-3.72	20.15	16.43	46.00	-29.57	AVG	
10	3.3020	11.82	20.17	31.99	56.00	-24.01	QP	
11	4.3780	9.83	20.19	30.02	56.00	-25.98	QP	
12	4.4620	-3.65	20.19	16.54	46.00	-29.46	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 240V, 60Hz for adapter
Comment: Neutral Line
Tem.: 22.6℃ Hum.: 53%

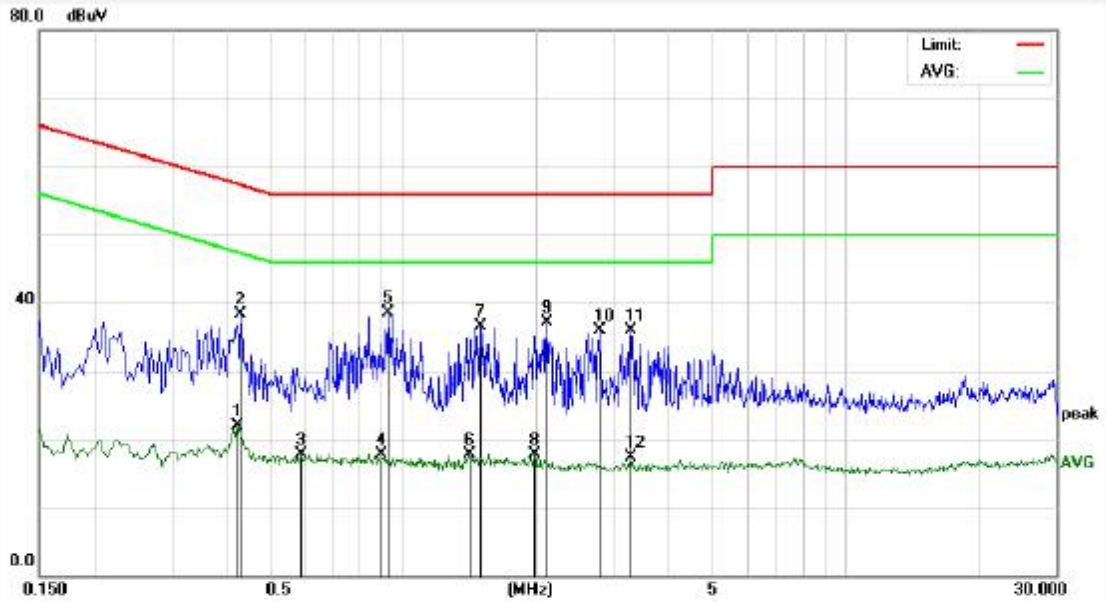

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4220	2.06	19.94	22.00	47.41	-25.41	AVG	
2	0.4300	18.26	19.95	38.21	57.25	-19.04	QP	
3	0.5899	-2.24	20.01	17.77	46.00	-28.23	AVG	
4	0.8980	-2.46	20.09	17.63	46.00	-28.37	AVG	
5	0.9260	18.32	20.10	38.42	56.00	-17.58	QP	
6	1.4100	-2.49	20.13	17.64	46.00	-28.36	AVG	
7	1.4980	16.29	20.13	36.42	56.00	-19.58	QP	
8	1.9820	-2.50	20.14	17.64	46.00	-28.36	AVG	
9	2.1180	16.88	20.14	37.02	56.00	-18.98	QP	
10	2.7900	15.83	20.16	35.99	56.00	-20.01	QP	
11	3.2780	15.72	20.17	35.89	56.00	-20.11	QP	
12	3.2780	-2.92	20.17	17.25	46.00	-28.75	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209, 15.205 and 15.231(b)				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

the formulas for calculating the maximum permitted fundamental field strengths are as follows:
for the band 260-470 MHz, μV/m at 3 meters = 41.6667(F) - 7083.3333.
The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level

Emission Level (dBuV/m)=20log Emission Level(uV/m)

The field strength of emission limits have been calculated in below table:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)@3m
433.92	80.82 (AVG)
433.92	100.82 (Peak)

4.2. Test Setup

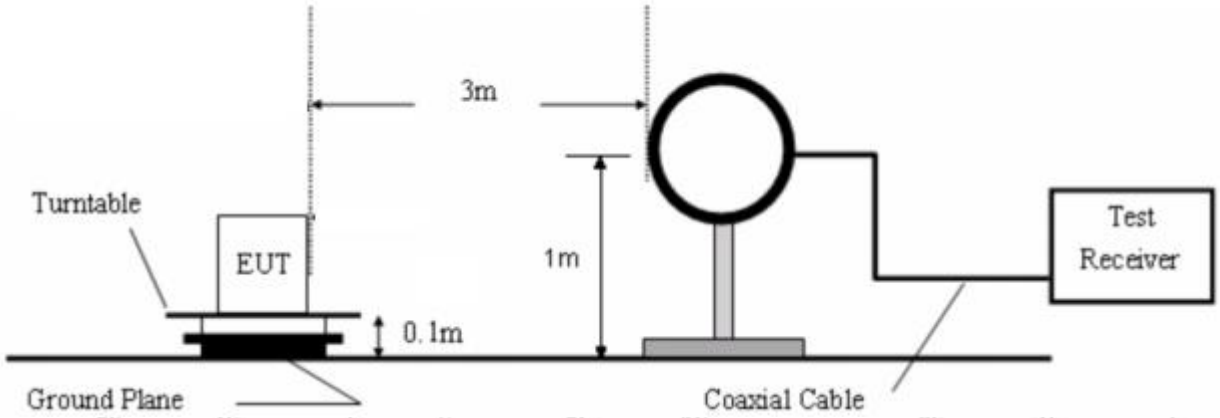

Figure 1. Below 30MHz

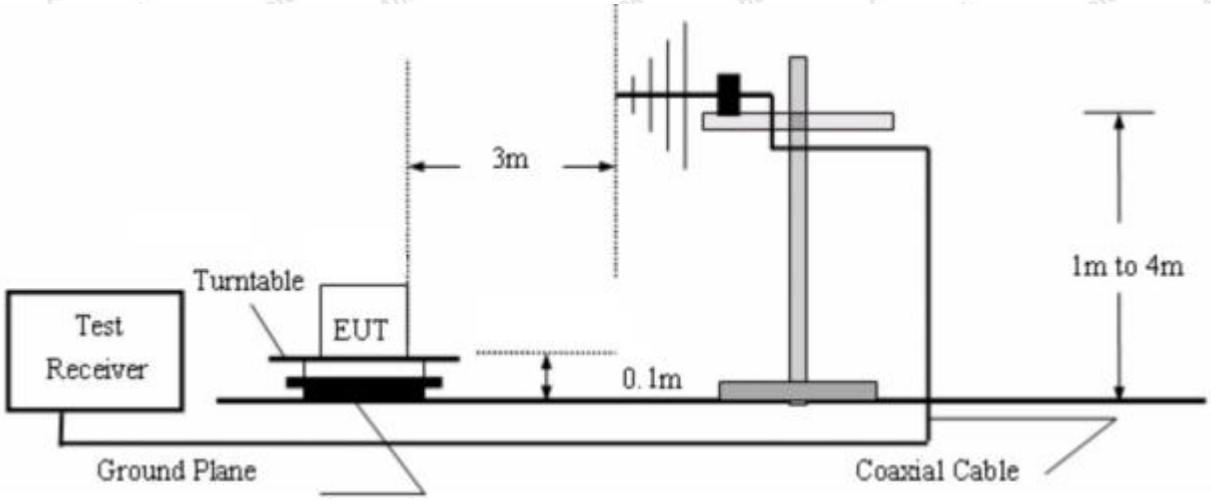

Figure 2. 30MHz to 1GHz

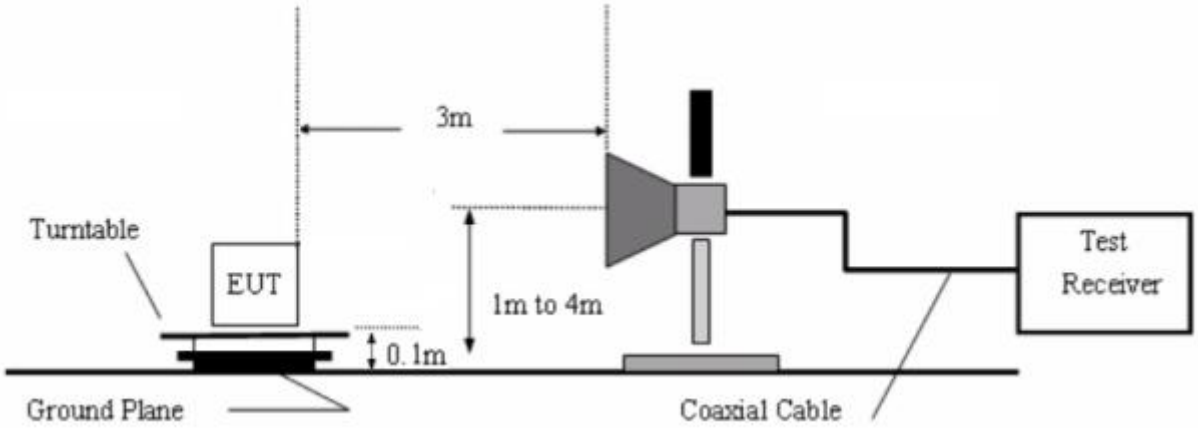

Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.1m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 0.1m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:
RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:
RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:
RBW = 100kHz, VBW =300kHz,Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz,Set the spectrum analyzer as:
RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.
RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz and above 18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (Fundamental 433.92MHz)

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Duty cycle Factor	Results	Limits	Det.
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	Mode
433.92	H	86.33	1.52	12.64	31.45	-	69.04	100.82	PK
433.92	H	86.33	1.52	12.64	31.45	-8.07	60.97	80.82	AV
433.92	V	89.93	1.52	12.64	31.45	-	72.64	100.82	PK
433.92	V	89.93	1.52	12.64	31.45	-8.07	64.57	80.82	AV

Remark:

1. Result = Reading + Cable Loss +Ant Factor –Amplifier + Duty cycle Factor

2. Pulse Desensitization Correction Factor

Pulse Width (PW)= 0.440ms

2/PW=2/0.440=4.55kHz

RBW(1000kHz)＞ 2/PW (4.55KHz)

Therefore PDCF is not needed.

3. Duty Cycle Factor

Calculate Formula:

AV=PEAK +Duty Cycle Factor

Duty Cycle Factor=20log(Duty Cycle)

Duty Cycle= on time/ period

Test Data:

T on time=1.290ms*12+0.440ms*13=21.2 ms

T period=53.70ms

Duty Cycle=39.48%

Duty Cycle Factor =20log(Duty Cycle)=-8.07

T on time slot-1

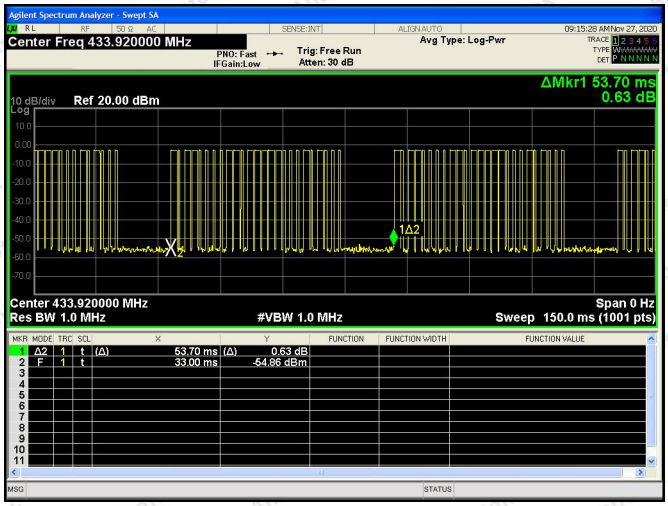

T on time slot-2

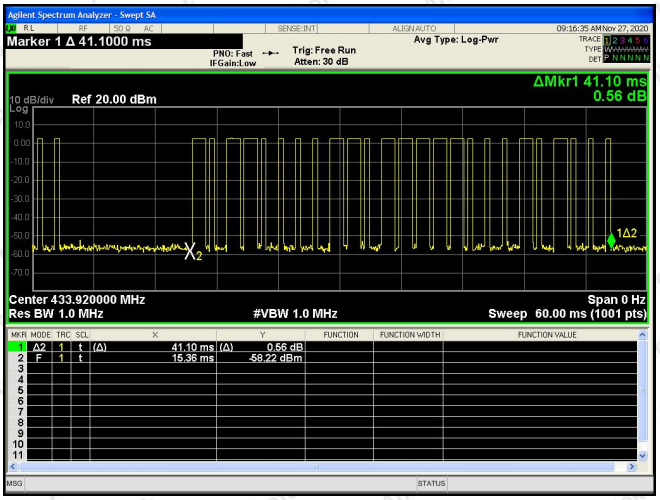

T period

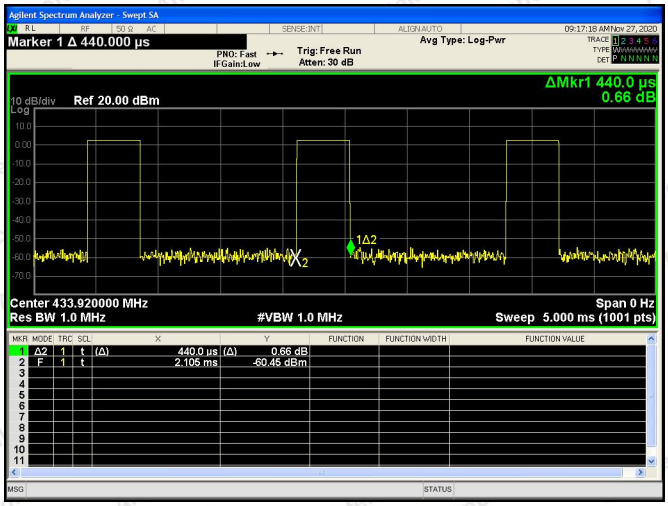

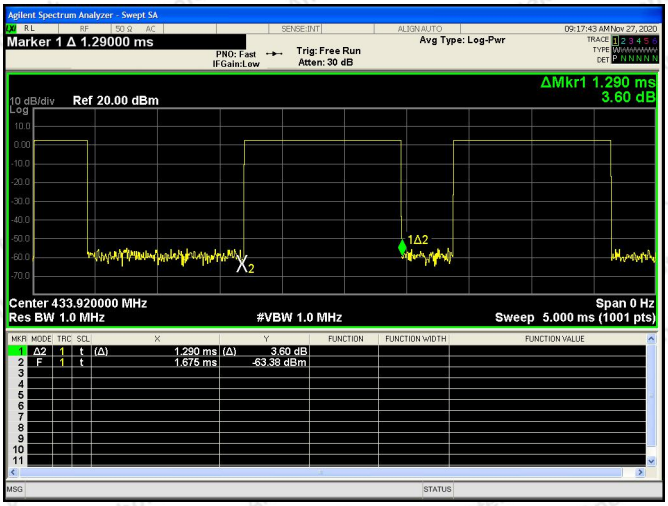

Test Results (Harmonics Emissions+Radiated Emissions Above 1G)

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Duty cycle Factor	Results	Limits	Det
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	Mode
867.84	H	53.22	1.92	12.71	31.72	-	36.13	80.82	PK
867.84	H	53.22	1.92	12.71	31.72	-8.07	28.06	60.82	AV
867.84	V	47.79	1.92	12.71	31.72	-	30.70	80.82	PK
867.84	V	47.79	1.92	12.71	31.72	-8.07	22.63	60.82	AV
1301.76	H	52.88	2.38	21.43	32.45	-	44.24	74	PK
1301.76	H	52.88	2.38	21.43	32.45	-8.07	36.17	54	AV
1301.76	V	55.76	2.38	18.56	32.45	-	44.25	74	PK
1301.76	V	55.76	2.38	18.56	32.45	-8.07	36.18	54	AV

Remark :

1. Result = Reading + Cable Loss +Ant Factor –Amplifier + Duty cycle Factor

2. Pulse Desensitization Correction Factor

   Pulse Width (PW)= 0.440ms

   2/PW=2/0.445=4.55kHz

   RBW(1000kHz)＞ 2/PW (4.55KHz)

   Therefore PDCF is not needed.

3. Duty Cycle Factor=-8.07

4.Only the worst data was recorded in this report.

5.The test results of 9kHz-30MHz and above 1260MHz~18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel:(86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com
Hotline 400-003-0500
www.anbotek.com

Test Results (30~1000MHz)

Test Mode: TX Mode
Power Source: AC 120V, 60Hz for adapter
Polarization: Horizontal
Temp.(℃)/Hum.(%RH): 24.1℃/53%RH
Note: Fundamental

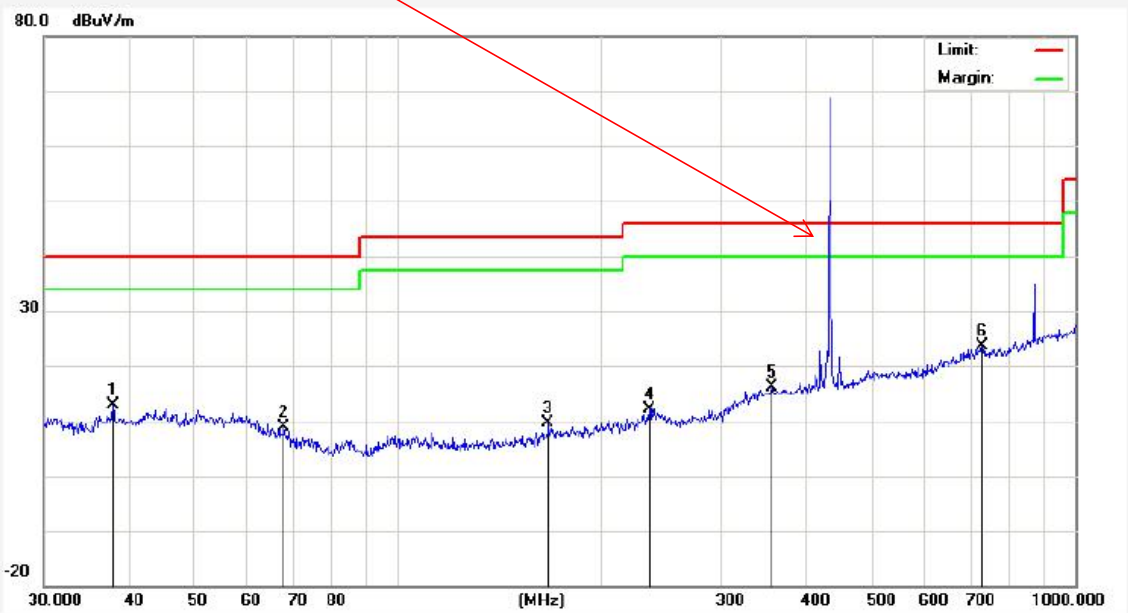

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.9450	30.01	-17.12	12.89	40.00	-27.11	QP	300	0	
2	67.9128	29.36	-20.60	8.76	40.00	-31.24	QP	300	360	
3	166.6512	28.33	-18.61	9.72	43.50	-33.78	QP	300	0	
4	234.9909	27.36	-15.21	12.15	46.00	-33.85	QP	300	360	
5	356.6757	30.03	-13.87	16.16	46.00	-29.84	QP	300	0	
6	729.3582	32.23	-8.51	23.72	46.00	-22.28	QP	300	360	

Test Results (30~1000MHz)

Test Mode:	TX Mode
Power Source:	AC 120V, 60Hz for adapter
Polarization:	Vertical
Temp.(℃)/Hum.(%RH):	24.1℃/53%RH
Note:	Fundamental

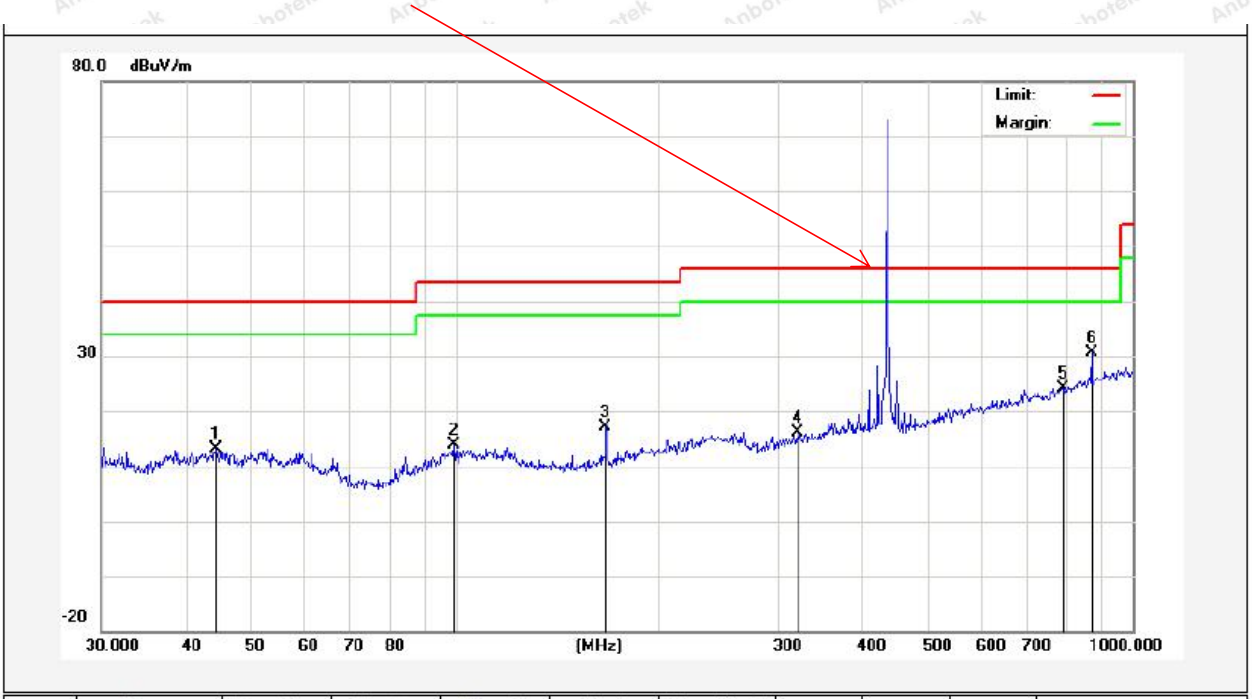

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	44.2751	30.60	-17.54	13.06	40.00	-26.94	QP	300	0	
2	99.5279	36.82	-22.93	13.89	43.50	-29.61	QP	300	360	
3	166.6512	39.11	-21.95	17.16	43.50	-26.34	QP	300	0	
4	319.9370	32.33	-16.21	16.12	46.00	-29.88	QP	300	360	
5	790.6186	32.05	-7.85	24.20	46.00	-21.80	QP	300	0	
6	869.1300	37.16	-6.46	30.70	46.00	-15.30	QP	300	360	

5. 20DB Occupy Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.231 (c)
Test Limit	According to FCC Part 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. For devices operating above 900MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier. So the emission bandwidth limits have been calculated in below table:

Fundamental Frequency	Limit of 20dB Bandwidth
433.92 MHz	433920x0.0025=1084.80 kHz

5.2. Test Setup



5.3. Test Procedure

1. Place the EUT on the table and set it in the continuously transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
   RBW = 10kHz, VBW≥3*RBW =30kHz,
   Span= 500KHz
   Detector= Peak
   Trace mode= Max hold.
   Sweep- auto couple.
4. Mark the peak frequency and –20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

5.4. Test Data

Test Item	:	20dB Bandwidth	Test Mode	:	Continuously transmitting
Test Voltage	:	AC 120V, 60Hz for adapter	Temperature	:	23.6℃
Test Result	:	PASS	Humidity	:	54%RH

Freq. (MHz)	Modulation Type	Bandwidth (kHz)	Limit (kHz)	Results
433.92	ASK	153.2	<1084.80	PASS

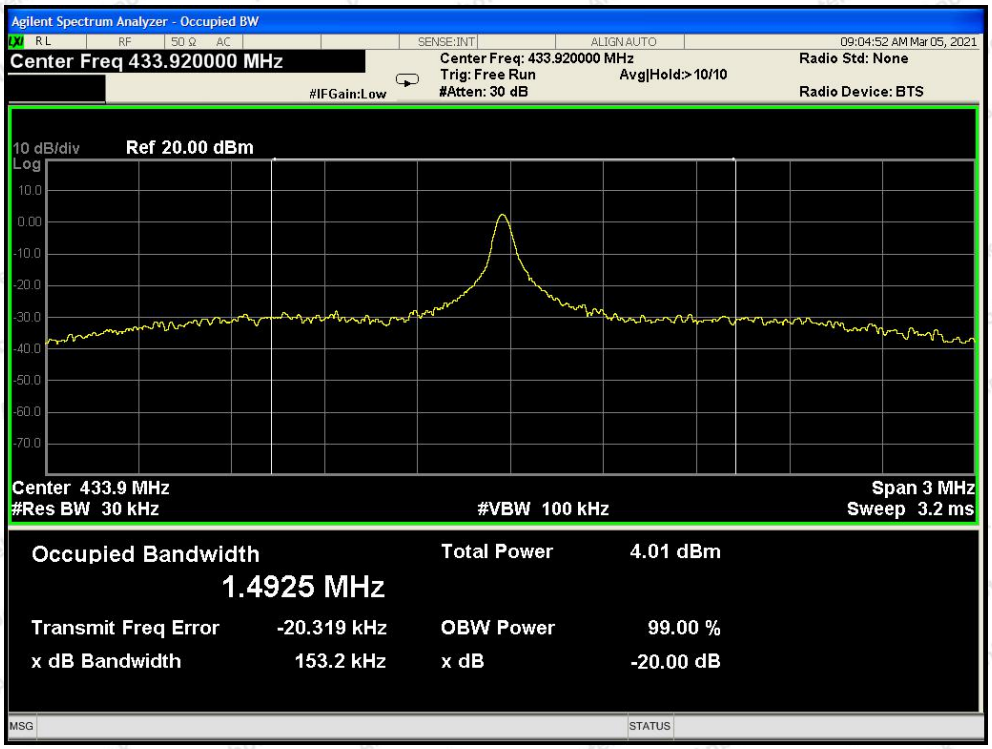

433.92MHz

6. Dwell Time Test

6.1. Test Standard and Limit

Test Standard	FCC Part 15.231(a)(1)
Test Limit	According to FCC Part 15.231(a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in continuously transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as
   RBW=1000kHz, VBW= 1000 kHz, Span= 0Hz, Sweep Time= 20 Seconds.
3. Record the Delta mark time.

6.4. Test Data

Test Item	:	Dwell Time	Test Mode	:	Continuously transmitting
Test Voltage	:	AC 120V, 60Hz for adapter	Temperature	:	23.6℃
Test Result	:	PASS	Humidity	:	54%RH

Test Mode	Transmitting time(s)	Limit(s)	Result
ASK mode	0.240	≤5	PASS

Please refer the following plot.

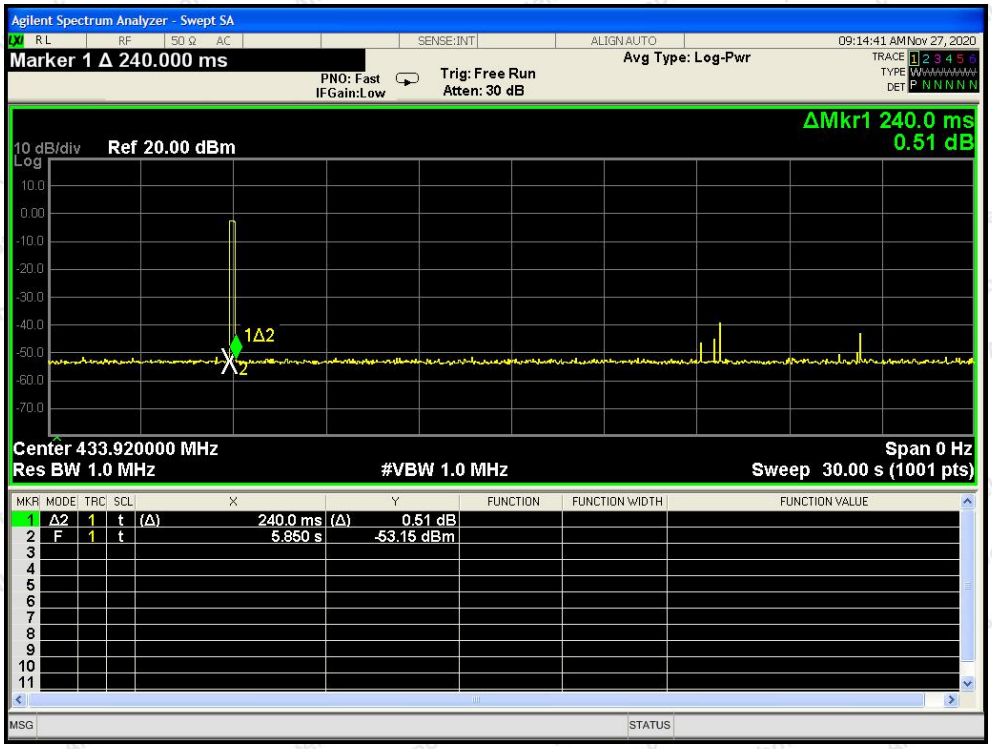
Agilent Spectrum Analyzer - Swept SA
Marker 1 Δ 240.000 ms
Avg Type: Log-Pwr
09:14:41 AM Nov 27, 2020
PNO: Fast
IFGain:Low
Trig: Free Run
Atten: 30 dB
ΔMkr1 240.0 ms
0.51 dB
10 dB/div
Ref 20.00 dBm
Log
1Δ2
Center 433.920000 MHz
Span 0 Hz
Res BW 1.0 MHz
#VBW 1.0 MHz
Sweep 30.00 s (1001 pts)
1 Δ2 1 t (Δ) 240.0 ms (Δ) 0.51 dB
2 F 1 t 5.850 s -53.15 dBm

Dwell Time

7. Antenna Requirement

7.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. Antenna requirement must meet at least one of the following: 1) Antenna must be permanently attached to device. 2) The antenna must use a unique type of connector to attach to the device. 3) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.

7.2. Antenna Connected Construction

The antenna is a Monopole antenna which permanently attached, and the best case gain of the antenna is 2 dBi. It complies with the standard requirement.

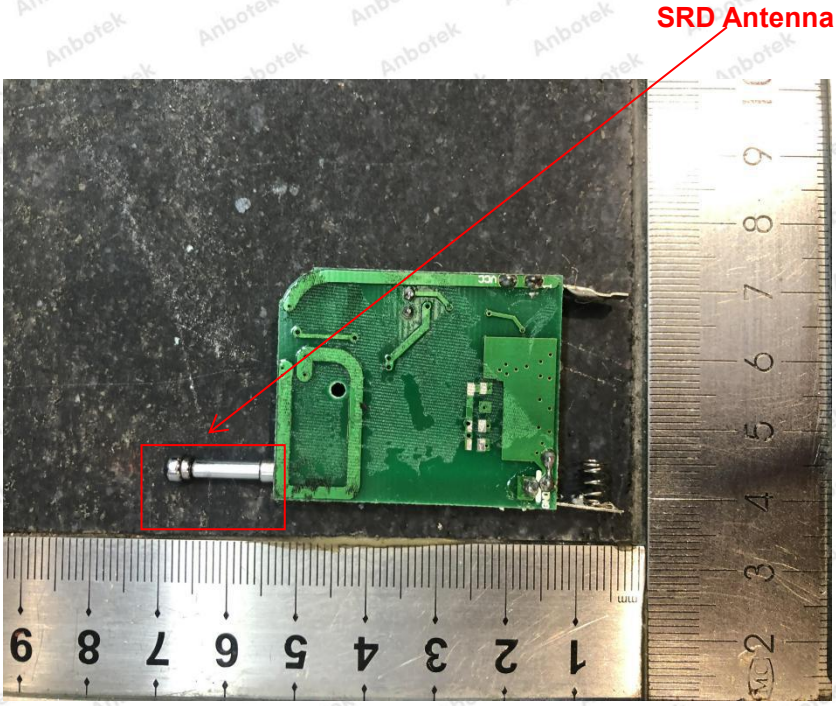

APPENDIX I -- PHOTOGRAPH

Reference to the test report 18220WC00160601.

---------- End of Report ----------