FCC TEST REPORT

FCC ID: 2AZ2V-ZEN77V2

Product Name	:	DIMMER SWITCH 800
Model Name	:	ZEN77, ZW315ZS
Brand Name	:	ZOOZ
Report No.	:	PTC25030401903E-FC01

Prepared for

Lorenz High Definition LLC

230 Rt 206 STE 401, Flanders, NJ 07836, United States

Prepared by

Precise Testing & Certification Co., Ltd.

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

1 TEST RESULT CERTIFICATION

Applicant's name	:	Lorenz High Definition LLC
Address	:	230 Rt 206 STE 401, Flanders, NJ 07836, United States
Manufacture's name	:	Ultra Tech Industries Company Limited
Address	:	NON SAO INDUSTRIAL CLUSTER, TAN DINH COMMUNE, Bac Ninh Province，VIETNAM
Product name	:	DIMMER SWITCH 800
Model name	:	ZEN77,ZW315ZS
Standards	:	FCC Part15 Subpart C, Paragraph 15.249
Test procedure	:	ANSI C63.10-2020
Test Date	:	Dec. 28, 2025 to Jan. 12, 2026
Date of Issue	:	Jan. 12, 2026
Test Result	:	Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

Jack zhou / Engineer

Technical Manager:

Simon Pu / Manager

Contents

Page

1 TEST RESULT CERTIFICATION **2**

2 TEST SUMMARY **4**

3 TEST FACILITY **5**

4 GENERAL INFORMATION **6**

4.1 GENERAL DESCRIPTION OF E.U.T. 6

4.2 TEST MODE 7

4.3 LIST OF CHANNELS 8

5 EQUIPMENT DURING TEST **9**

5.1 EQUIPMENTS LIST 9

5.2 MEASUREMENT UNCERTAINTY 11

5.3 DESCRIPTION OF SUPPORT UNITS 12

6 TEST STANDARD AND LIMIT 13

6.1. TEST SETUP 14

6.2. TEST PROCEDURE 14

6.3. TEST DATA 14

7 . RADIATED EMISSION AND BAND EDGE **17**

7.1. TEST STANDARD AND LIMIT 17

7.2. TEST SETUP 18

7.3. TEST PROCEDURE 19

7.4. TEST DATA 20

8. 20DB BANDWIDTH TEST **27**

8.1. TEST STANDARD AND LIMIT 27

8.2. TEST SETUP 27

8.3. TEST PROCEDURE 27

8.4. TEST DATA 27

9. ANTENNA REQUIREMENT **30**

9.1. TEST STANDARD AND REQUIREMENT 30

9.2. ANTENNA CONNECTED CONSTRUCTION 30

10 APPENDIX I -- PHOTOGRAPH **31**

2 Test Summary

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.249	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
Remark: “N/A” is an abbreviation for Not Applicable.		

3 TEST FACILITY

Precise Testing & Certification Co., Ltd.

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A

4 General Information

4.1 General Description of E.U.T.

Product Name	:	DIMMER SWITCH 800
Model Name	:	ZEN77
Additional model	:	ZW315ZS
Operating frequency	:	908.40MHz,908.42 MHz,916.00MHz
Numbers of Channels	:	3 Channels
Antenna Type	:	PCB antenna
Antenna Gain	:	-11.59 dBi
Type of Modulation	:	2FSK for 908.40MHz 2FSK for 908.42MHz 2GFSK for 916.00MHz
Power supply	:	Input:120V 60Hz Output: 125V 60Hz 300W
Hardware Version	:	N/A
Software Version	:	N/A
Test sample No.	:	PTC25030401903E-1/6, PTC25030401903E-2/6, PTC25030401903E-3/6, PTC25030401903E-5/6

4.2 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Channel	Frequency (MHz)	Modulation
Mode 1	CH0	908.40	2FSK
Mode 2	CH1	908.42	2FSK
Mode 3	CH2	916.00	2GFSK

For Conducted Emission	
Final Test Mode	Description
Mode 1	CH0
Mode 2	CH1
Mode 3	CH2

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH0
Mode 2	CH1
Mode 3	CH2

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

4.3 List of Channels

Channel	Frequency (MHz)	Modulation
CH0	908.40	2FSK
CH1	908.42	2FSK
CH2	916.00	2GFSK

5 Equipment During Test

5.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-30GHz	Aug. 14, 2025	1 Year
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 14, 2025	1 Year
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 14, 2025	1 Year
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 14, 2025	1 Year
Test S/W	Tonscend	JS1120-3	/	/	/	/

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Date	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 14, 2025	1 Year
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Aug. 14, 2025	1 Year
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Sep.10, 2025	1 Year
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 14, 2025	1 Year
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Aug. 14, 2025	1 Year
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Aug. 14, 2025	1 Year
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 14, 2025	1 Year
Power Amplifier	ZHINAN	ZN3380C	15002	1GHz-26.5GHz	Aug. 14, 2025	1 Year

Horn Antenna	SCHWARZBECK	BBHA 9170	9170-1066	15GHz-40GHz	Jul. 24, 2025	1 Year
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Jul. 25, 2025	1 Year
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 14, 2025	1 Year
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 14, 2025	1 Year
Test S/W	Tonscend	TS+	/	/	/	/

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Date	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 14, 2025	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 14, 2025	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 14, 2025	1 Year
Limiter	R&S	ESH3-Z2	0357.8810.54-102808-NB	0Hz-30MHz	Aug. 14, 2025	1 Year
RF Switch	DIAMOND ANTENNA	CX-210	/	9kHz-6GHz	Mar. 24,2025	1 Year
Test S/W	Tonscend	JS32-CE	/	/	/	/

5.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10^{-6}
Bandwidth	± 1.5 x 10^{-6}
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Radiated Emission(9KHz~30MHz)	±3.15dB

5.3 Description of Support Units

Equipment	Model No.	Series No.
Incandescent lamp	A70	N/A

6 Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

6.1. Test Setup

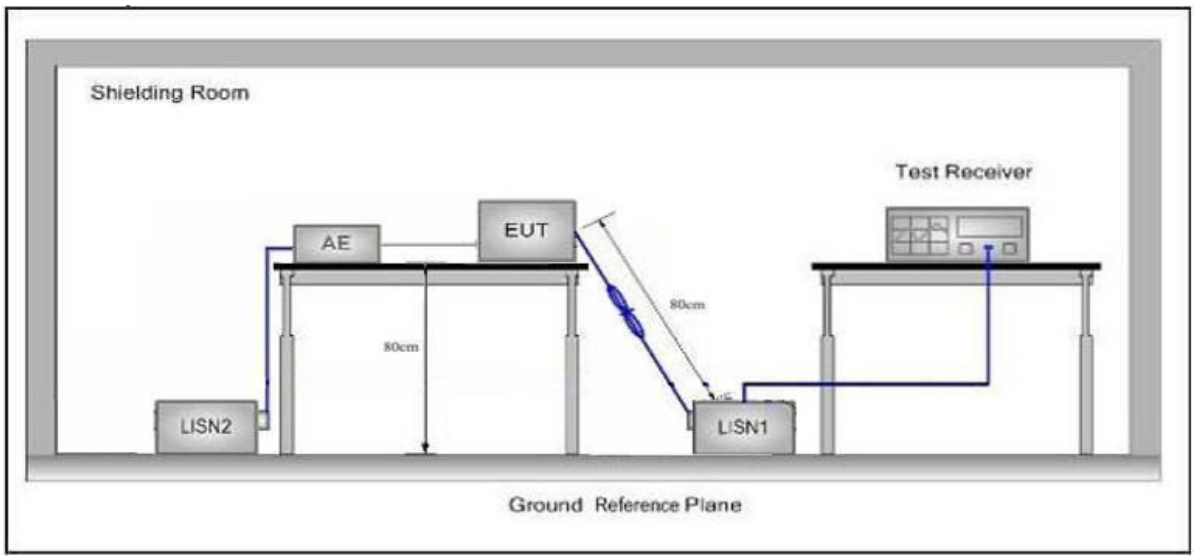

6.2. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2020 on Conducted Emission Measurement.

The bandwidth of test iSurpass Smart Gateway (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

6.3. Test Data

Test Mode:	CH1
Power Source:	AC 120V/60Hz
Polarization:	LINE
Temp.(℃)/Hum.(%RH):	24.5℃/52%RH

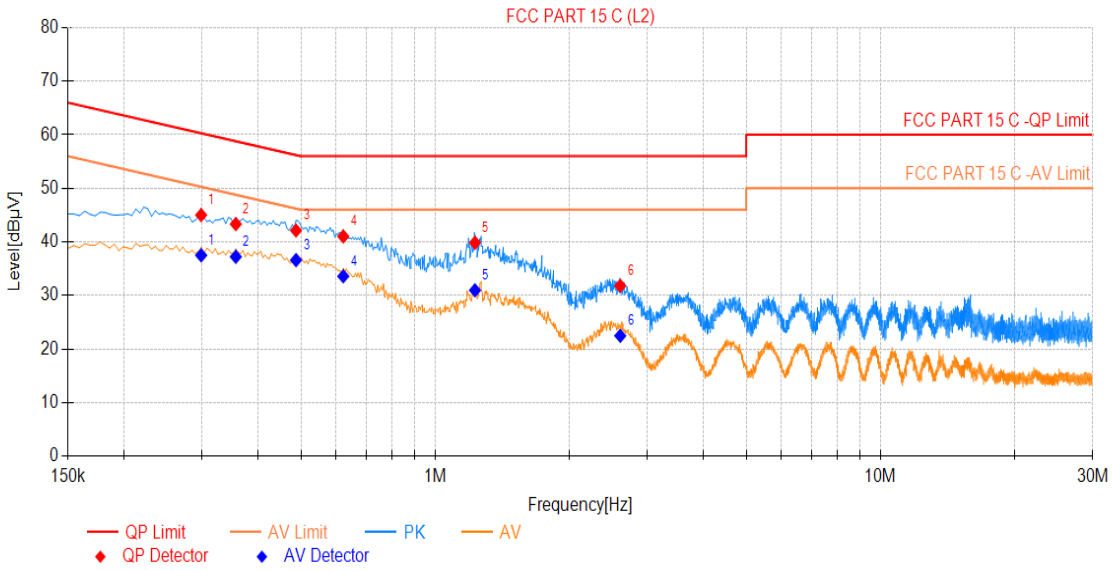

Final Data List

NO.	Freq. [MHz]	QP Reading	Factor [dB]	QP Value	QP Limit	QP Margin	AV Reading	AV Value	AV Limit	AV Margin	Verdict
1	0.299	35.07	9.94	45.01	60.28	15.27	27.55	37.49	50.28	12.79	PASS
2	0.357	33.36	9.96	43.32	58.80	15.48	27.26	37.22	48.80	11.58	PASS
3	0.488	32.18	9.95	42.13	56.21	14.08	26.65	36.60	46.21	9.61	PASS
4	0.623	31.05	9.97	41.02	56.00	14.98	23.61	33.58	46.00	12.42	PASS
5	1.230	29.84	10.00	39.84	56.00	16.16	20.96	30.96	46.00	15.04	PASS
6	2.607	21.81	9.99	31.80	56.00	24.20	12.47	22.46	46.00	23.54	PASS

Test Mode: CH1

Power Source: AC 120V/60Hz

Polarization: NEUTRAL

Temp.(℃)/Hum.(%RH): 24.5℃/52%RH

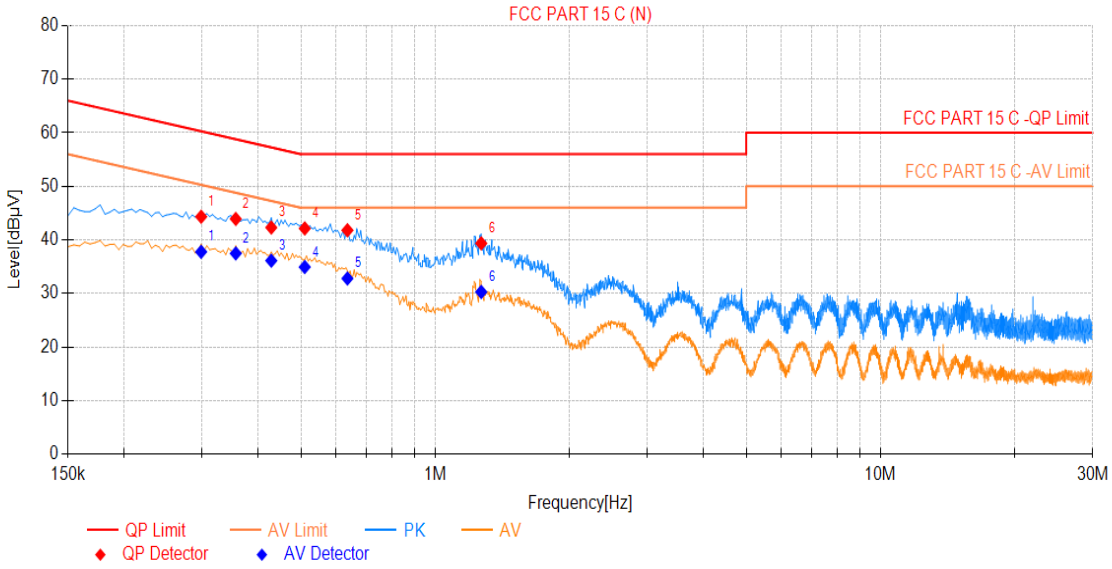

Final Data List											
NO.	Freq. [MHz]	QP Reading	Factor [dB]	QP Value	QP Limit	QP Margin	AV Reading	AV Value	AV Limit	AV Margin	Verdict
1	0.299	34.40	9.92	44.32	60.28	15.96	27.85	37.77	50.28	12.51	PASS
2	0.357	33.97	9.94	43.91	58.80	14.89	27.53	37.47	48.80	11.33	PASS
3	0.429	32.36	9.95	42.31	57.27	14.96	26.17	36.12	47.27	11.15	PASS
4	0.510	32.18	9.96	42.14	56.00	13.86	24.97	34.93	46.00	11.07	PASS
5	0.636	31.85	9.95	41.80	56.00	14.20	22.84	32.79	46.00	13.21	PASS
6	1.271	29.40	9.96	39.36	56.00	16.64	20.32	30.28	46.00	15.72	PASS

Note:1. All test mode have been tested. Only the worst case have been recorded in the report.

2.QP Margin[dB]= QP Limit[dBµV]- QP Value[dBµV], AV Margin[dB]= AV Limit[dBµV]- AV Value[dBµV].

7 . Radiated Emission and Band Edge

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Frequency (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter	Limit (dBuV/m)	Remark	Measurement distance (m)
	902~928	50	-	94.0	Quasi-peak	3
		-	-	-	-	-

Remark:

(1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.2. Test Setup

Figure 1. Below 30MHz

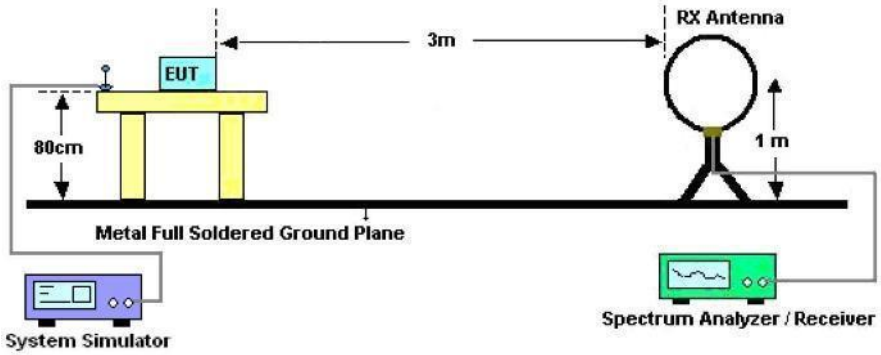

Figure 2. 30MHz to 1GHz

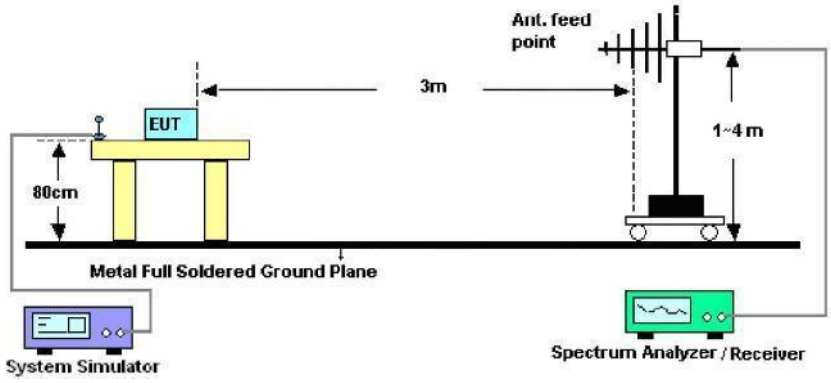

Figure 3. Above 1 GHz

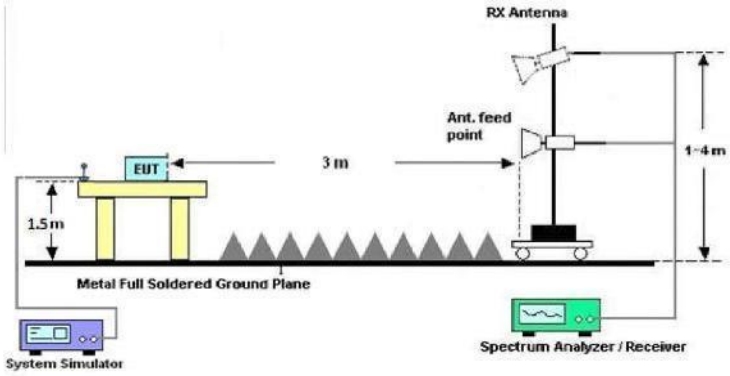

7.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

7.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all the modes, and found the CH 01 channel which is the worst case, only the worst case is recorded in the report

Test Results (30~1000MHz)

Test Mode:	CH1
Power Source:	AC 120V/60Hz
Polarization:	Vertical
Temp.(℃)/Hum.(%RH):	24.5℃/52%RH

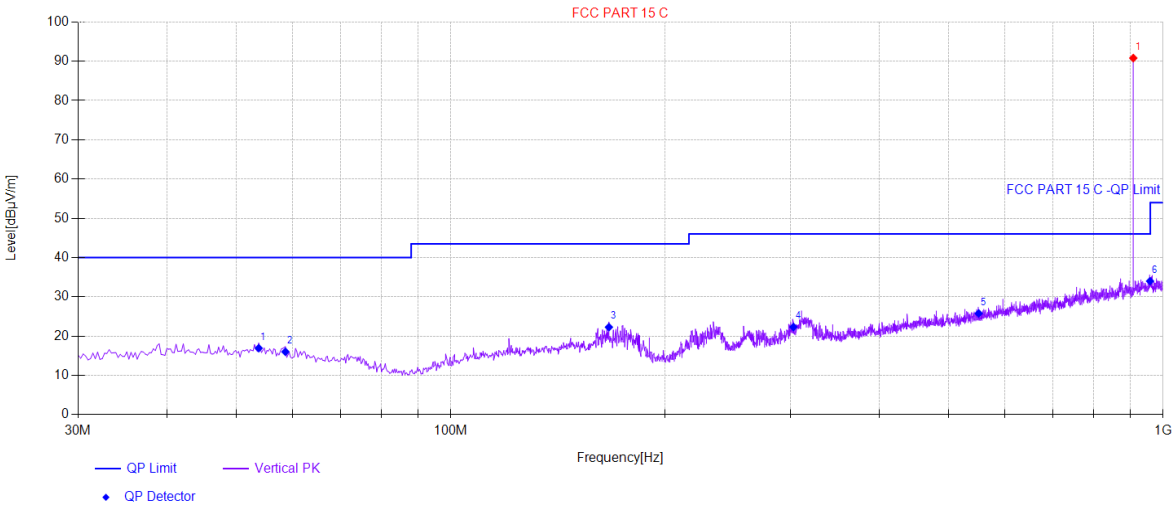

Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	53.77	27.14	-10.21	16.93	40.00	23.07	Vertical	PASS
2	58.62	26.67	-10.65	16.02	40.00	23.98	Vertical	PASS
3	166.77	30.85	-8.57	22.28	43.50	21.22	Vertical	PASS
4	302.81	29.56	-7.24	22.32	46.00	23.68	Vertical	PASS
5	551.13	27.05	-1.25	25.80	46.00	20.20	Vertical	PASS
6	959.02	27.44	6.57	34.01	46.00	11.99	Vertical	PASS

Test Results (30~1000MHz)

Test Mode:	CH1
Power Source:	AC 120V/60Hz
Polarization:	Horizontal
Temp.(℃)/Hum.(%RH):	24.5℃/52%RH

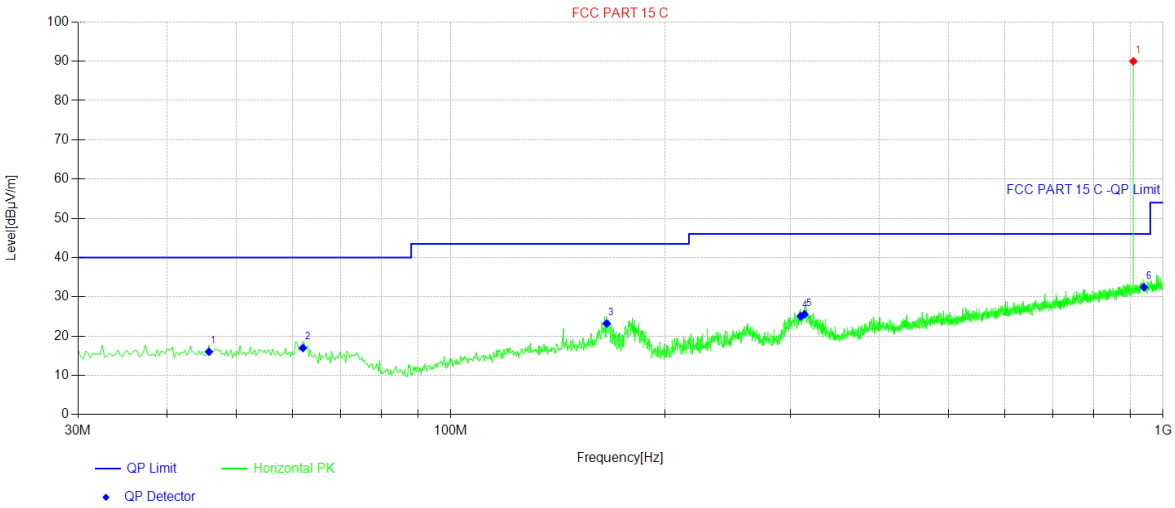

Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	51.83	26.24	-9.96	16.28	40.00	23.72	Horizontal	PASS
2	61.77	28.51	-11.01	17.50	40.00	22.50	Horizontal	PASS
3	167.26	30.7	-8.61	22.09	43.50	21.41	Horizontal	PASS
4	310.33	31.05	-6.97	24.08	46.00	21.92	Horizontal	PASS
5	549.92	26.71	-1.28	25.43	46.00	20.57	Horizontal	PASS
6	916.82	27.86	5.78	33.64	46.00	12.36	Horizontal	PASS

Note: 1. All test mode have been tested. Only the worst case have been recorded in the report.

2. QP Margin[dB]= QP Limit[dBμV/m]- QP Value[dBμV/m], QP Value[dBμV/m]= QP Reading[dBμV]+ Factor[dB/m].

Test Frequency 1GHz-10GHz

CH0:

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Level	Limits	Margin	Det.
(MHz)	Pol.	(dBuV)	(dB)	(dB/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1816.80	H	46.09	6.58	34.04	34.09	52.62	74	21.38	PK
1816.80	H	31.75	6.58	34.04	34.09	38.28	54	15.72	AV
2725.20	H	39.51	7.73	37.11	34.79	49.56	74	24.44	PK
2725.20	H	35.13	7.73	37.11	34.79	45.18	54	8.82	AV
1816.80	V	42.46	6.58	35.28	34.09	50.23	74	23.77	PK
1816.80	V	25.16	6.58	35.28	34.09	32.93	54	21.07	AV
2725.20	V	39.06	7.73	39.31	34.79	51.31	74	22.69	PK
2725.20	V	23.91	7.73	39.31	34.79	36.16	54	17.84	AV

Fundamental

Frequency	Antenna	Reading	Factor	Results	Limits	Det.
(MHz)	Pol.	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	Mode
908.40	H	87.16	3.01	90.17	94	QP
908.40	V	86.33	3.01	89.34	94	QP

Note: 1. The testing has been conformed to 10*908.40MHz=9084MHz.

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor
Margin=Limit-Emission Level

CH1:

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Level	Limits	Margin	Det.
(MHz)	Pol.	(dBuV)	(dB)	(dB/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1816.84	H	47.20	6.58	34.04	34.09	53.73	74	20.27	PK
1816.84	H	30.07	6.58	34.04	34.09	36.60	54	17.40	AV
2725.26	H	39.93	7.73	37.11	34.79	49.98	74	24.02	PK
2725.26	H	32.47	7.73	37.11	34.79	42.52	54	11.48	AV
1816.84	V	42.01	6.58	35.28	34.09	49.78	74	24.22	PK
1816.84	V	25.36	6.58	35.28	34.09	33.13	54	20.87	AV
2725.26	V	38.44	7.73	39.31	34.79	50.69	74	23.31	PK
2725.26	V	23.46	7.73	39.31	34.79	35.71	54	18.29	AV

Fundamental

Frequency	Antenna	Reading	Factor	Results	Limits	Det.
(MHz)	Pol.	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	Mode
908.42	H	86.24	3.01	89.25	94	QP
908.42	V	86.55	3.01	89.56	94	QP

Note: 1. The testing has been conformed to 10*908.42MHz=9084.2MHz.

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor
Margin=Limit-Emission Level

CH2:

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Level	Limits	Margin	Det.
(MHz)	Pol.	(dBuV)	(dB)	(dB/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1832.00	H	46.52	6.58	34.04	34.09	53.05	74	20.95	PK
1832.00	H	29.76	6.58	34.04	34.09	36.29	54	17.71	AV
2748.00	H	39.87	7.73	37.11	34.79	49.92	74	24.08	PK
2748.00	H	33.13	7.73	37.11	34.79	43.18	54	10.82	AV
1832.00	V	40.83	6.58	35.28	34.09	48.60	74	25.4	PK
1832.00	V	24.29	6.58	35.28	34.09	32.06	54	21.94	AV
2748.00	V	38.69	7.73	39.31	34.79	50.94	74	23.06	PK
2748.00	V	24.73	7.73	39.31	34.79	36.98	54	17.02	AV

Fundamental

Frequency	Antenna	Reading	Factor	Results	Limits	Det.
(MHz)	Pol.	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	Mode
916.00	H	86.68	3.01	89.69	94	QP
916.00	V	86.99	3.01	90	94	QP

Note: 1. The testing has been conformed to 10*916.00MHz=9160MHz.

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor
Margin=Limit-Emission Level

Radiated Restricted Band:

Test Mode: Channel 908.4MHz							
Frequency (MHz)	Read Level (dBuV)	Corr. Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity H/V	Detector
902	24.73	-2.97	21.76	46	24.24	H	Peak
928	23.49	-2.51	20.98	46	25.02	H	Peak
902	23.81	-2.97	20.84	46	25.16	V	Peak
928	24.78	-2.51	22.27	46	23.73	V	Peak

Test Mode: Channel 916MHz							
Frequency (MHz)	Read Level (dBuV)	Corr. Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity H/V	Detector
902	24.63	-2.97	21.66	46	24.34	H	Peak
928	23.47	-2.51	20.96	46	25.04	H	Peak
902	23.71	-2.97	20.74	46	25.26	V	Peak
928	24.63	-2.51	22.12	46	23.88	V	Peak

8. 20dB Bandwidth Test

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.215

8.2. Test Setup



8.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.

2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

3. Set the spectrum analyzer as:

RBW = 30kHz, VBW≥3*RBW =100kHz,

Detector= Average

Trace mode= Max hold.

Sweep- auto couple.

4. Mark the peak frequency and –20dB (upper and lower) frequency.

5. Repeat until all the rest channels are investigated.

8.4. Test Data

Test Item	:	20dB Bandwidth	Test Mode	:	Mode 1/2/3
Test Voltage	:	AC 120V/60Hz	Temperature	:	22.4℃
Test Result	:	PASS	Humidity	:	55%RH

Channel	Frequency (MHz)	20dB Bandwidth(kHz)	Modulation	Result
CH0	908.40	84.23	2FSK	PASS
CH1	908.42	66.14	2FSK	PASS
CH2	916.00	109.4	2GFSK	PASS

Test Graphs:

CH0	CH1
	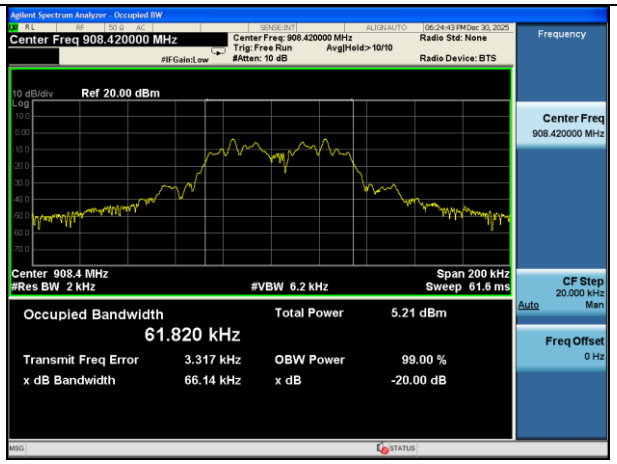
CH2	

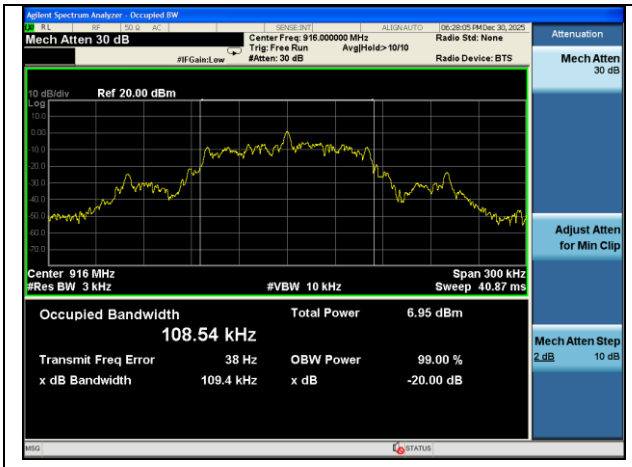
Agilent Spectrum Analyzer - Occupied BW
Mech Atten 30 dB
Center Freq: 916.000000 MHz
Trig: Free Run
#Atten: 30 dB
Avg|Hold:>10/10
Radio Std: None
Radio Device: BTS
06:28:05 PM Dec 30, 2025
Attenuation
Mech Atten
30 dB
10 dB/div
Ref 20.00 dBm
Adjust Atten
for Min Clip
Center 916 MHz
#Res BW 3 kHz
#VBW 10 kHz
Span 300 kHz
Sweep 40.87 ms
Occupied Bandwidth
108.54 kHz
Total Power 6.95 dBm
Transmit Freq Error 38 Hz
OBW Power 99.00 %
x dB Bandwidth 109.4 kHz
x dB -20.00 dB
Mech Atten Step
2 dB
10 dB

9. Antenna Requirement

9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2. Antenna Connected Construction

The antenna is a PCB antenna which permanently attached, and the best case gain of the antenna is -11.59 dBi. It complies with the standard requirement.

10 APPENDIX I -- PHOTOGRAPH

Test photo

CONDUCTED EMISSION TEST

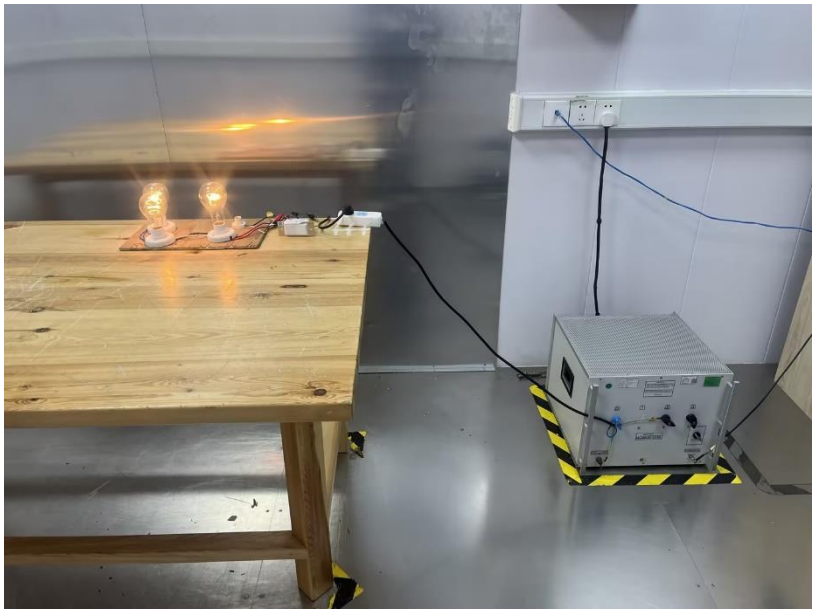

RADIATED EMISSION TEST

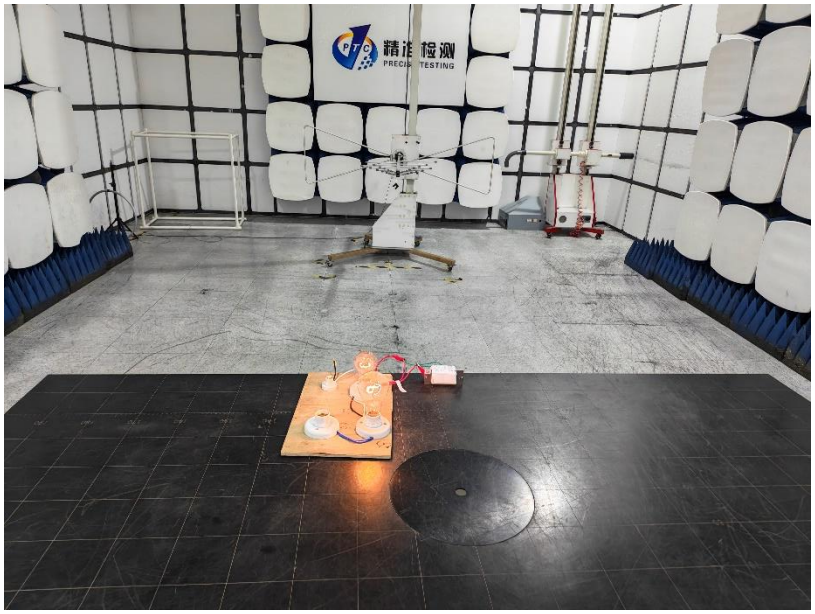

精准检测
PRECISE TESTING

EUT PHOTO

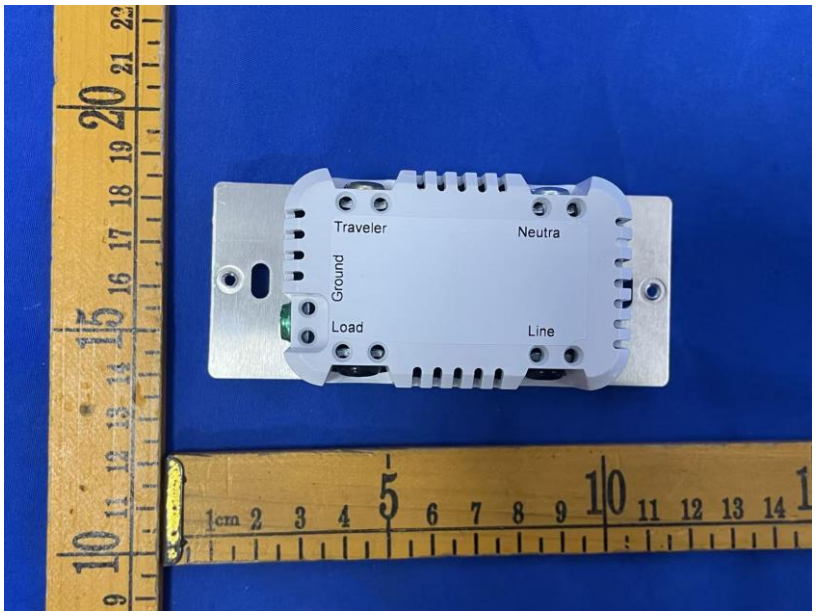

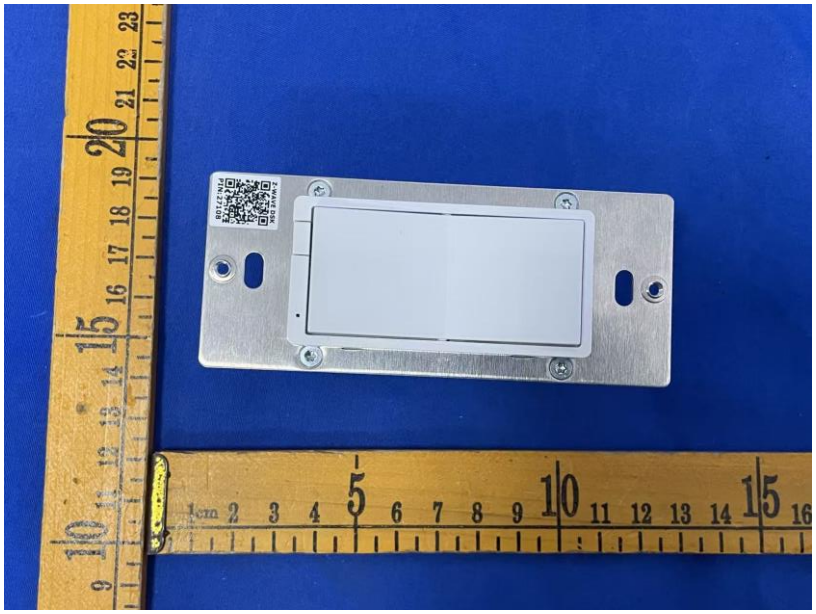

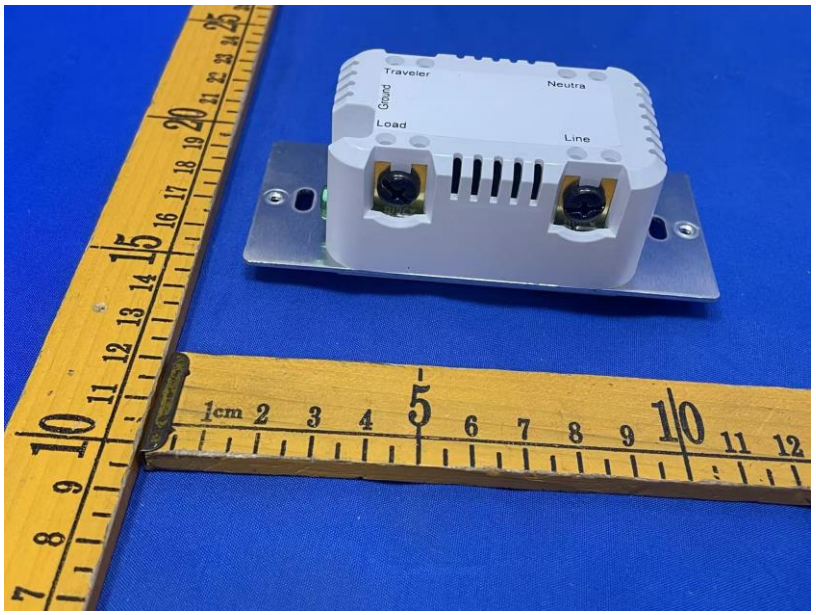
Traveler
Neutra
Ground
Load
Line

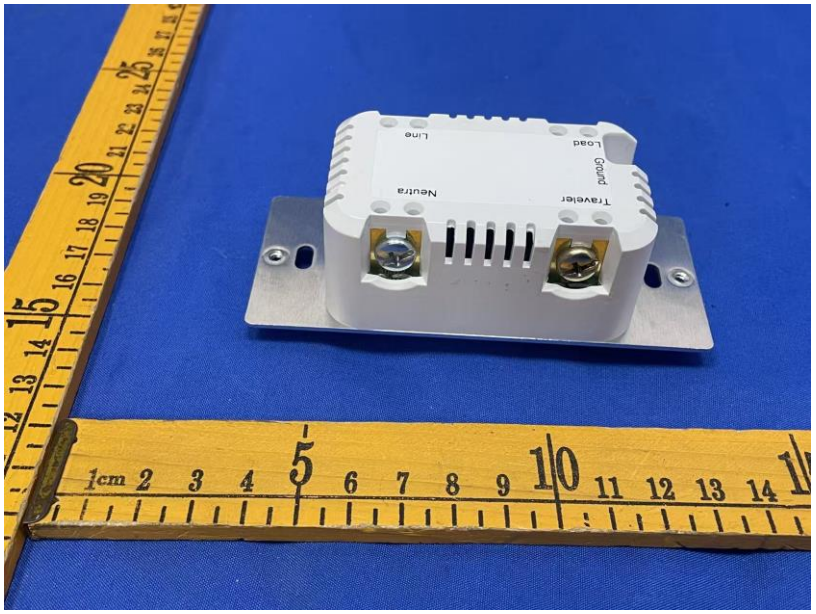
Line
Load
Ground
Neutral
Traveler

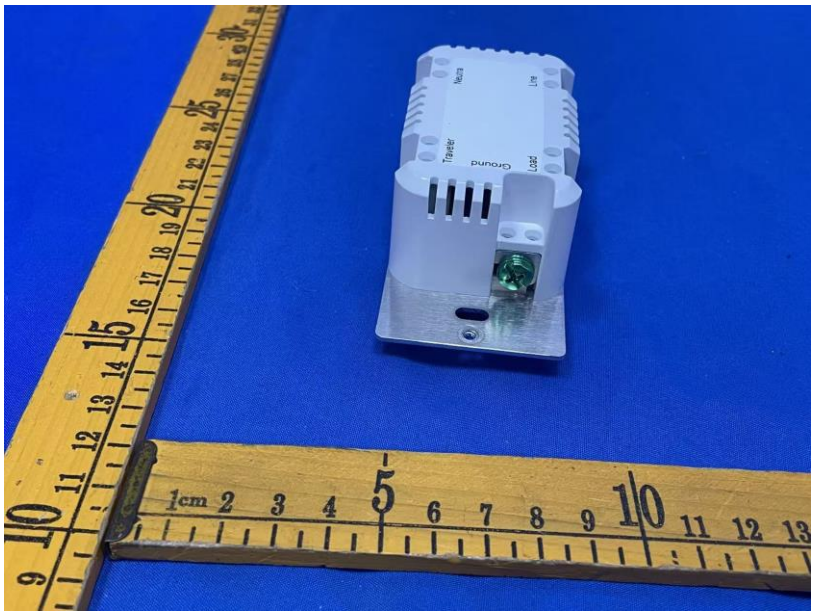
Neutral
Line
Traveler
Ground
Load

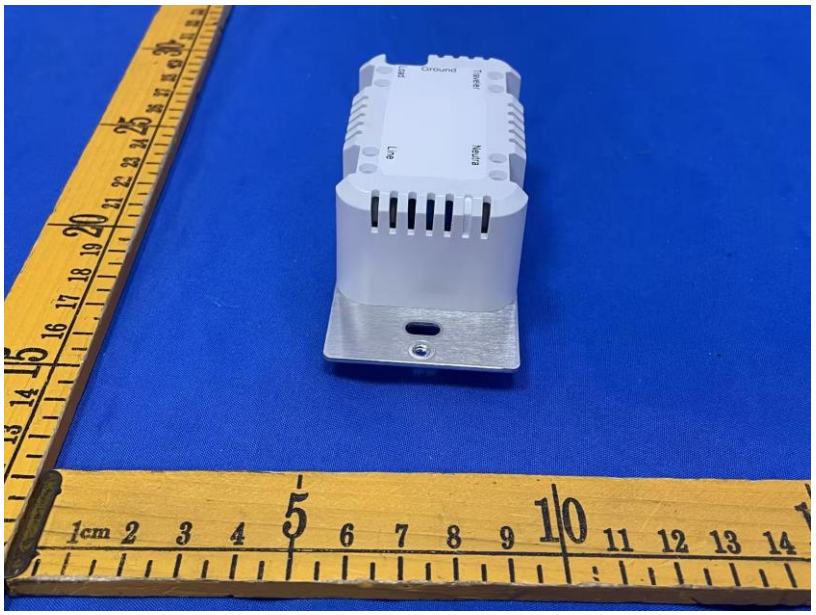
Ground
Neutral
Line

Neutral
Line
Black
Load
Black

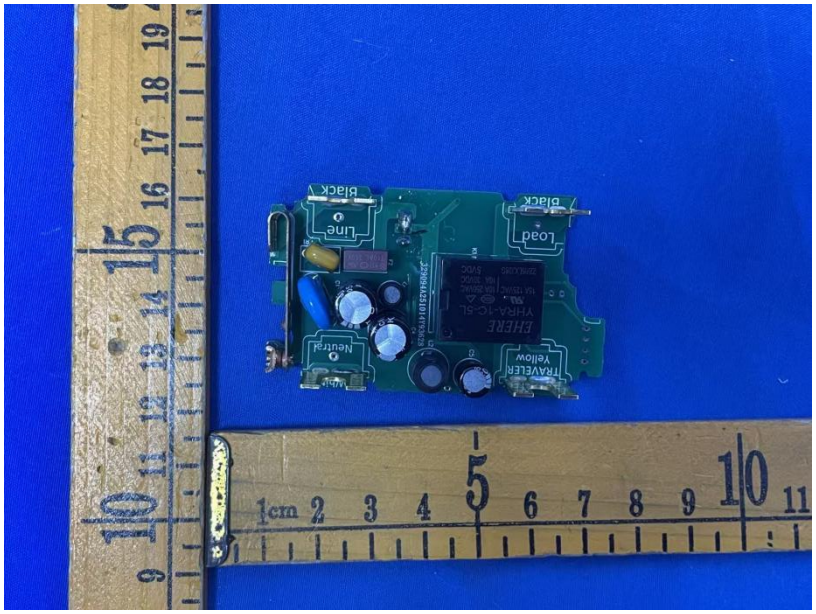
Black
Line
Black
Load
Neutral
Yellow
TRAVELER

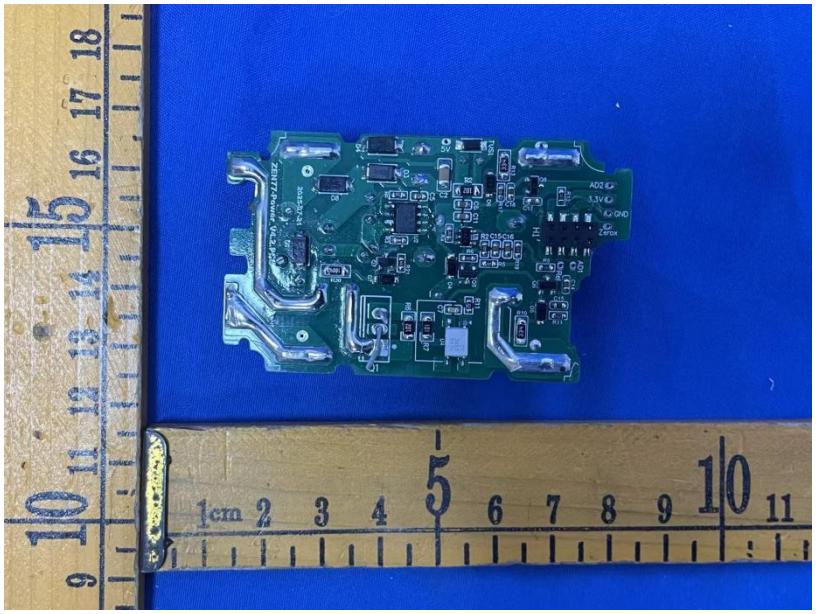

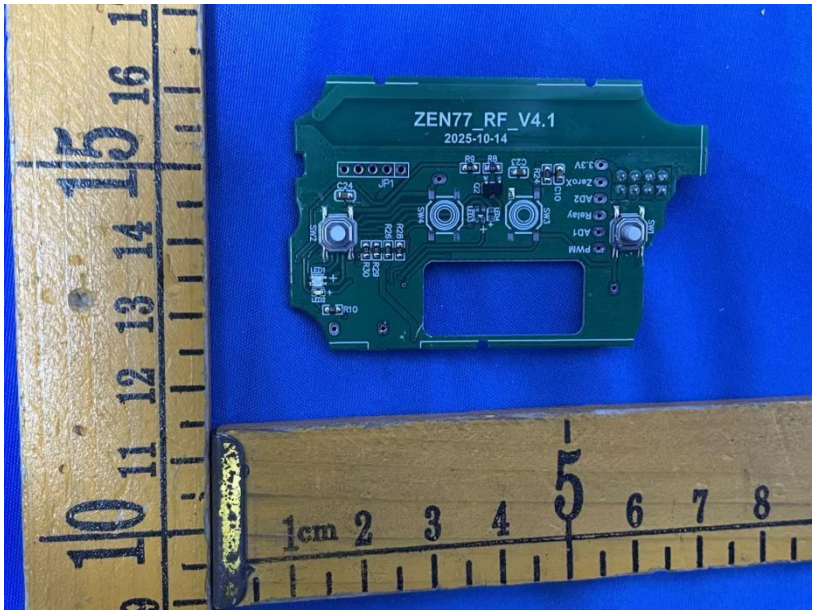
ZEN77_RF_V4.1
2025-10-14

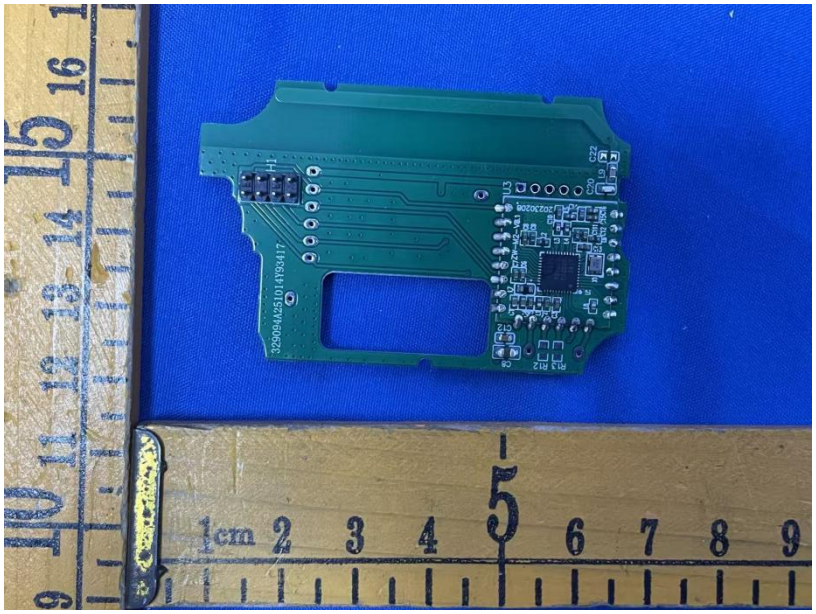

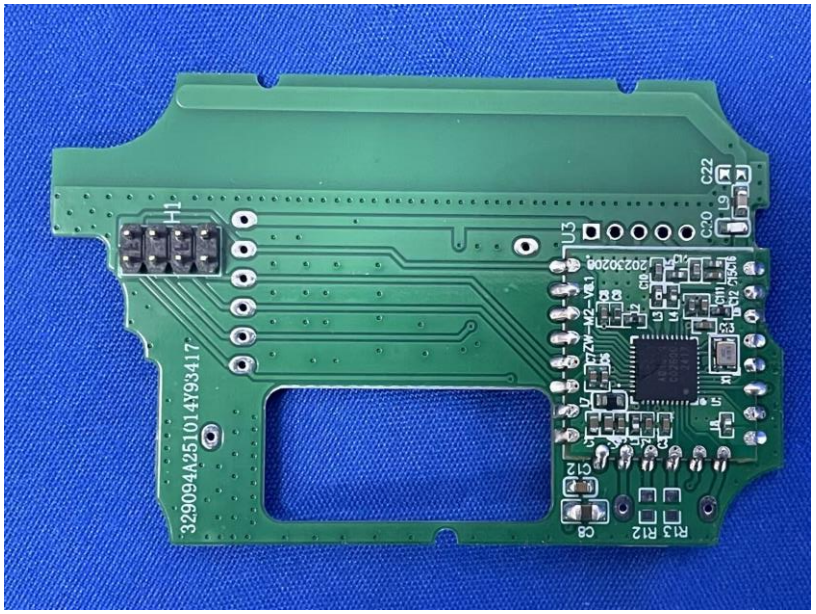

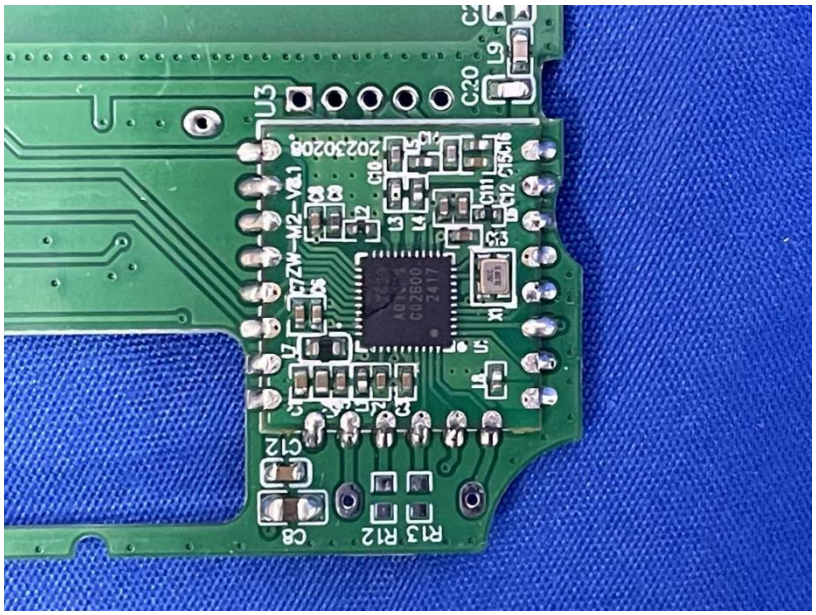
U3
C20
L9
C8
C12
R13
R12
U5
X1
L7
D5
L3
L4
C10
C11
L2
L1
L5
L6
L8
L12
L13
L14
L15
L16
L17
L18
L19
L20
L21
L22
L23
L24
L25
L26
L27
L28
L29
L30
L31
L32
L33
L34
L35
L36
L37
L38
L39
L40
L41
L42
L43
L44
L45
L46
L47
L48
L49
L50
L51