Timco Test Report # TR_1353-21_FCC_15.247_2
Revision: 2
Issue Date: May 7, 2021
Final Test Date: April 19, 2021

ACCREDITED
CERTIFICATE #0955.01

TIMCO
ENGINEERING, Inc.
An IIA Company

Test Report - FCC PART 15.247
Prepared For: Aurora Wireless Network Inc.

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager
Date of Signature
(YYYY-MM-DD): 2021-04-19

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.

Table of Contents

1. CUSTOMER INFORMATION 3
1.1 TEST RESULT SUMMARY 3
2. LOCATION OF TESTING 5
2.1 TEST LABORATORY 5
2.2 TESTING WAS PERFORMED, REVIEWED BY 5
3. TEST SAMPLE(S) (EUT/DUT) 6
3.1 DESCRIPTION OF THE EUT 6
3.2 CONFIGURATION OF EUT 7
3.3 TEST SETUP OF EUT 7
4. TEST METHODS & APPLICABLE REGULATORY LIMITS 8
4.1 TEST METHODS/STANDARDS/GUIDANCE: 8
4.2 APPLIED LIMITS AND REGULATORY LIMITS: 8
5. MEASUREMENT UNCERTAINTY 8
6. ENVIRONMENTAL CONDITIONS 8
6.1 TEMPERATURE & HUMIDITY 8
7. LIST OF TEST EQUIPMENT AND TEST FACILITY 9
7.1 LIST OF TEST EQUIPMENT 9
8. TEST RESULTS 10
8.1 HOPPING CHARACTERISTICS 11
8.1.1 Carrier Frequency Separation Plot 12
8.1.2 Number of Hopping Frequencies Plot 13
8.1.3 Time of Occupancy Plot 14
8.1.4 Hops in 10 s Plot 15
8.1.5 Hopping Channel Occupancy Time 11
8.2 OCCUPIED BANDWIDTH 16
8.2.1 20 dB Bandwidth, 903 MHz 17
8.2.2 20 dB Bandwidth, 915 MHz 18
8.2.3 20 dB Bandwidth, 927 MHz 19
8.3 DTS CONDUCTED OUTPUT POWER 20
8.3.1 Conducted Output Power, 903 MHz 21
8.3.2 Conducted Output Power, 915 MHz 22
8.3.3 Conducted Output Power, 927 MHz 23
8.4 EMISSIONS IN NONRESTRICTED FREQUENCY BANDS (OUT OF BAND) 24
8.4.1 903 MHz 25
8.4.2 915 MHz 26
8.4.3 927 MHz 27
8.5 RADIATED EMISSIONS 28
8.5.1 903 MHz 34
8.5.1 915 MHz 35
8.5.1 927 MHz 36
8.6 BAND-EDGE MEASUREMENTS 28
8.6.1 Lower Band Edge Plot, Stopped 29
8.6.2 Upper Band Edge Plot, Stopped 30
8.6.3 Lower Band Edge Plot, Hopping 31
8.6.4 Upper Band Edge Plot, Hopping 32
9. ANNEX-A - PHOTOGRAPHS OF THE EUT 37
10. ANNEX-B – TEST SETUP PHOTOGRAPHS 37
11. HISTORY OF TEST REPORT CHANGES 37

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

1. Customer Information

Applicant:	Aurora Wireless Network Inc.
Address:	Unit 106, 4715-13th Street NE Calgary AB TZE 6M3, Canada
Contact:	Mr. Dave Goulbourne, RF Design Engineer
Telephone:	403-7777-9988 x228
Email address:	davegoulbourne@aurorawirelessnetworks.com

1.1 Test Result Summary

The following test procedure and guidance were used for measuring Digital Transmission System (DTS); FCC KDB 558074 D01 DTS Measurement Guidance and ANSI C63.10-2013. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

The Following is for Test item FCC ID: 2AZEH-AMU900

Applicable Clauses from Part 2 or KDB		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
KDB 558074 D01	Duty Cycle	Reported
KDB 558074 D01	99 % Bandwidth	Reported
KDB 558074 D01	Band-edge measurements	Pass

Applicable Clauses from Part 15.247		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
15.247 (a) (1) – (1) (iii)	FHSS hopping requirements (1, i,ii,iii)	Pass
15.247 (a) (1)	FHSS 20dB Bandwidth	Pass
15.247 (a) (2)	DTS 6dB Bandwidth	n/a
15.247 (b) (1) – (4)	Conducted output power	Pass
15.247 (c) (1) – (2)	Operation with directional antenna gains > 6 dBi	n/a
15.247 (d), 15.215 (b)	Conducted Emissions in Non-restricted bands	Pass
15.247 (d), 15.215 (b)	Conducted Emissions at the Band-edge	Pass
15.247 (e)	Power Spectral Density (PSD)	n/a
15.247 (f)	Hybrid system hopping requirements	n/a
15.247 (f)	Hybrid system Power Spectral Density	n/a
15.247 (g)	FHSS System requirements	Pass
15.247 (h)	FHSS spectrum sensing	n/a

Applicable Clauses from Part 2 and Part 15 Subpart C		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
15.203	Antenna requirements	Pass
15.205	Restricted bands of operation	Pass
15.207	AC Power Conducted Emissions	n/a
15.209	Radiated Emissions in Restricted bands	Pass
15.211	Tunnel Radio Systems	n/a
15.212 (a)	Single Modular Transmitter	n/a
15.212 (b)	Limited Modular Transmitter	n/a
15.213	Cable Locating Equipment	n/a

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

2. Location of Testing

2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA").
Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780
FCC Designation # US1070
FCC site registration is under A2LA certificate # 0955.01
ISED Canada test site registration # 2056A
EU Notified Body # 1177
For all designations see A2LA scope # 0955.01

2.2 Testing was performed, reviewed by

Dates of Testing: April 19, 2021

Signature: _____

Name & Title: Terri Allen, Technical Assistant
Date of Signature
(YYYY-MM-DD): 2021-05-07

Signature: _____

Sr. EMC Engineer
EMC-003838-NE

Name & Title: Tim Royer, EMC Engineer
Date of Signature
(YYYY-MM-DD): 2021-05-07

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

3. Test Sample(s) (EUT/DUT)

The test sample was received: March 24, 2021

3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	2AZEH-AMU900
Brief Description	900 MHz ISM Band Spread Spectrum Transceiver
Type of Modular	n/a
Model(s) #	AMU900
Trade name	n/a
Firmware version	1.0
Software version	n/a
Serial Number	n/a

Technical Characteristics	
Technology	DSS/FHSS
Frequency Range	902 – 928 MHz
RF O/P Power (Max.)	29.88 dBm
Modulation	GFSK
Bandwidth & Emission Class	89.3 kHz, F1D
Number of Channels	63
Antenna Type	Integrated
Antenna Gain (for each ant.)	7 dBi
Antenna Connector	N/A
Voltage Rating (AC or Batt.)	Battery 4.2 V

Antenna Characteristics			
Frequency Range	Mode / BW	Ant Gain 1	Ant Gain 2
902-928	n/a	7 dBi	n/a

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

3.2 Configuration of EUT

Test Modes						
Band	Mode (#)	Mode (Type)	Test Frequencies	BW (nominal)	Modulation	Number of Antennas
902-928	1	GFSK	903 MHz, 915 MHz, 927 MHz	269.23 kHz	GFSK (F1D)	1

Operating conditions during Testing:

No modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT).

Peripherals used during Testing:

No peripherals used.

3.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

4. Test methods & Applicable Regulatory Limits

4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Digital Transmission System (DTS) are provided in the FCC KDB 558074 D01 DTS Measurement Guidance and in Clause 11 of ANSI C63.10-2013.

1) ANSI C63.10-2013
2) FCC KDB 558074 D01

4.2 Applied Limits and Regulatory Limits:

3) FCC CFR 47 Part 15.247

5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
Note: The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

6. Environmental Conditions

6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barametric pressure	30.05 inHg
Note: Specific environmental conditions that are applicable to a specific test are available in the test result section.	

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer's model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

7.1 List of Test Equipment

Device	Manufacturer	Model	SN #	Current Cal	Cal Due
Active Loop	ETS-Lindgren	6502	00062529	10/20/20	10/20/2023
Biconical 1057	Eaton	94455-1	1057	10/16/20	10/16/2023
Log-Periodic 1243	Eaton	96005	1243	4/20/18	4/19/2021
Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	2/25/20	2/24/2023
Double-Ridged Horn/ETS Horn 2	ETS-Lindgren	3117	00041534	10/14/20	10/14/2023
Double-Ridged Horn 18-40 GHz	EMCO	3116	9011-2145	10/19/20	10/19/2023
CHAMBER	Panashield	3M	N/A	3/12/19	3/11/2022
Pre-amp	RF-LAMBDA	RLNA00M45GA	NA	2/27/19	2/26/2022
EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	8/28/18	8/27/2021
LISN (Primary)	Electro-Metrics	ANS-25/2	225363	9/16/20	9/16/2023

Software	Author	Version	Validation Or
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCommander	Rohde & Schwarz	1.6.4	2014

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of ac power-line conducted emissions and conducted power output will be reported in units of dBµV. Unless noted otherwise in the referenced standard, the measurements of radiated emissions will be reported in units of decibels, referenced to one microvolt per meter (dBµV/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dBµV if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.1 Hopping Characteristics

Limits from FCC 15.247(a)(1)(i) or 15.247 (f) as applicable, and test procedure from ANSI C63.10-2013 section 11.10

Test Setup


Test Results	
Carrier Frequency Separation	369.6 kHz
Number of Hopping Frequencies	63
Time of Occupancy	93.75 ms
Dwell Time in 10 s	281.25 ms

8.1.1 Hopping Channel Occupancy Time

Number of hops	Dwell Time (ms)	Total Occupancy Time (ms)	Limit (sec)	Pass / Fail
3	93.75	281.25	≤ 0.4	Pass

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

Hopping Characteristics, Spectrum Plots

8.1.2 Carrier Frequency Separation Plot

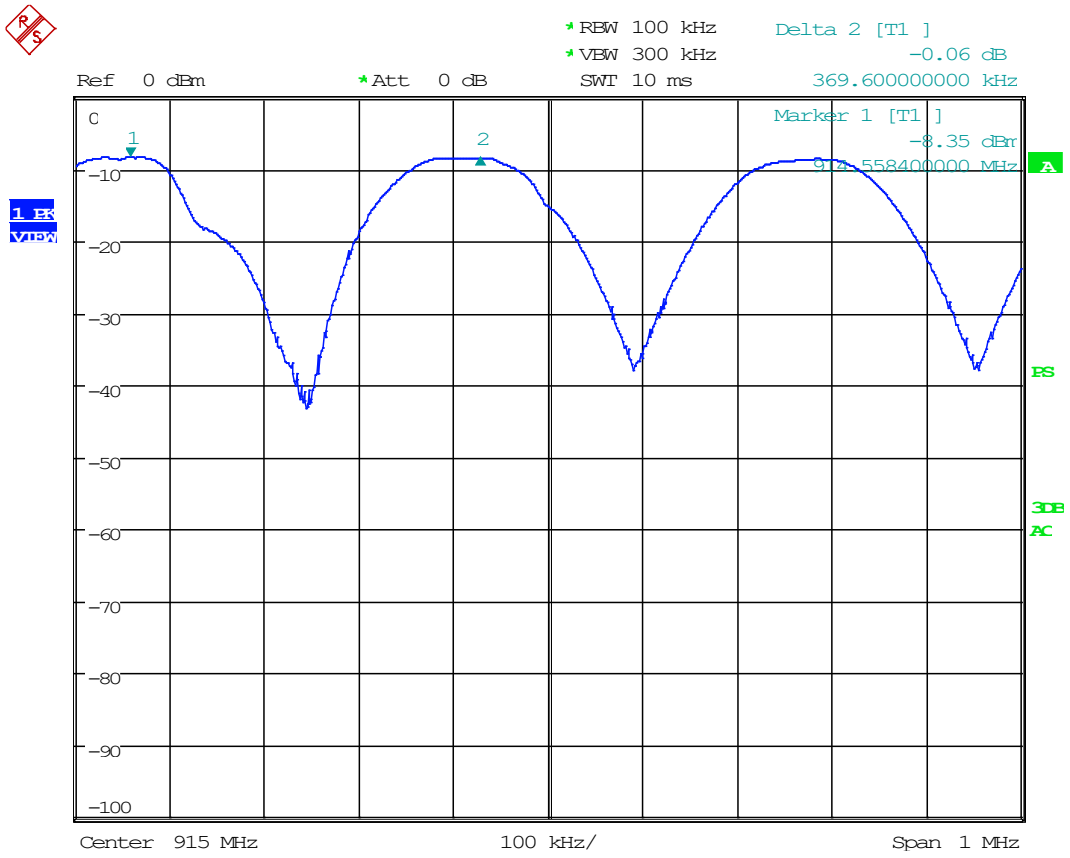

Date: 12.APR.2021 09:53:59

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.1.3 Number of Hopping Frequencies Plot

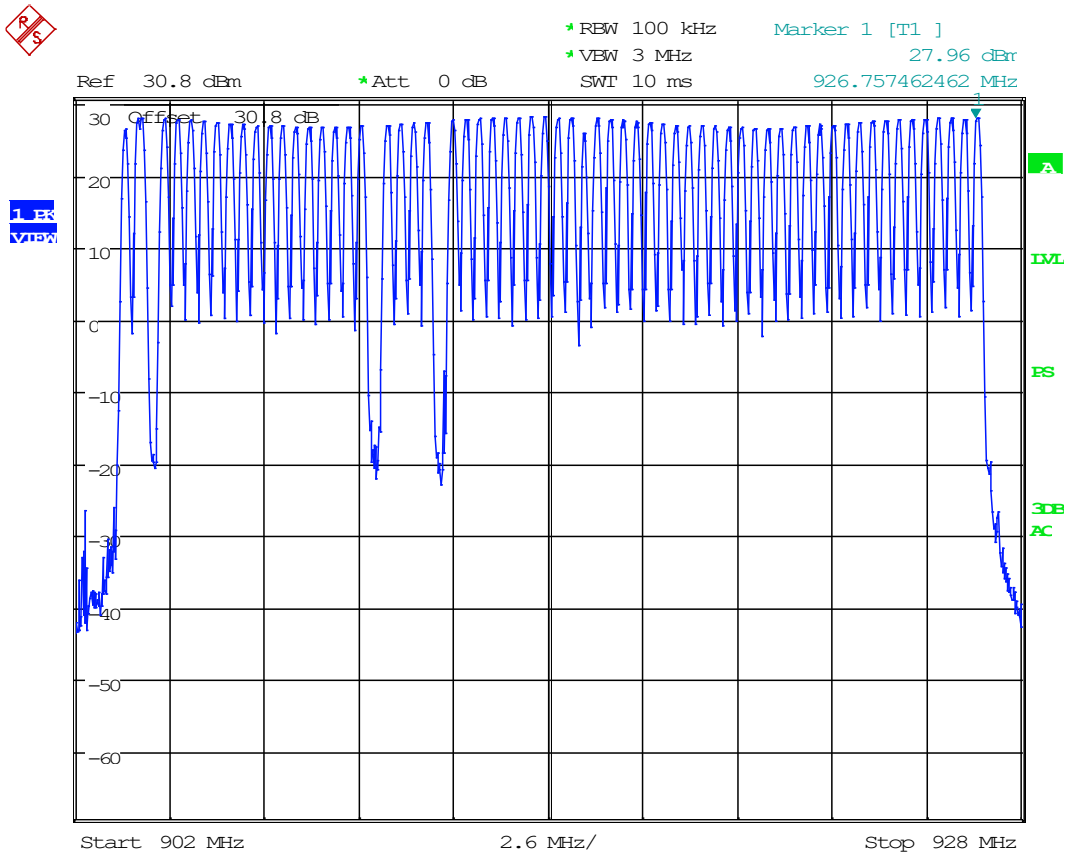

Date: 9.APR.2021 18:00:04

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.1.4 Time of Occupancy Plot

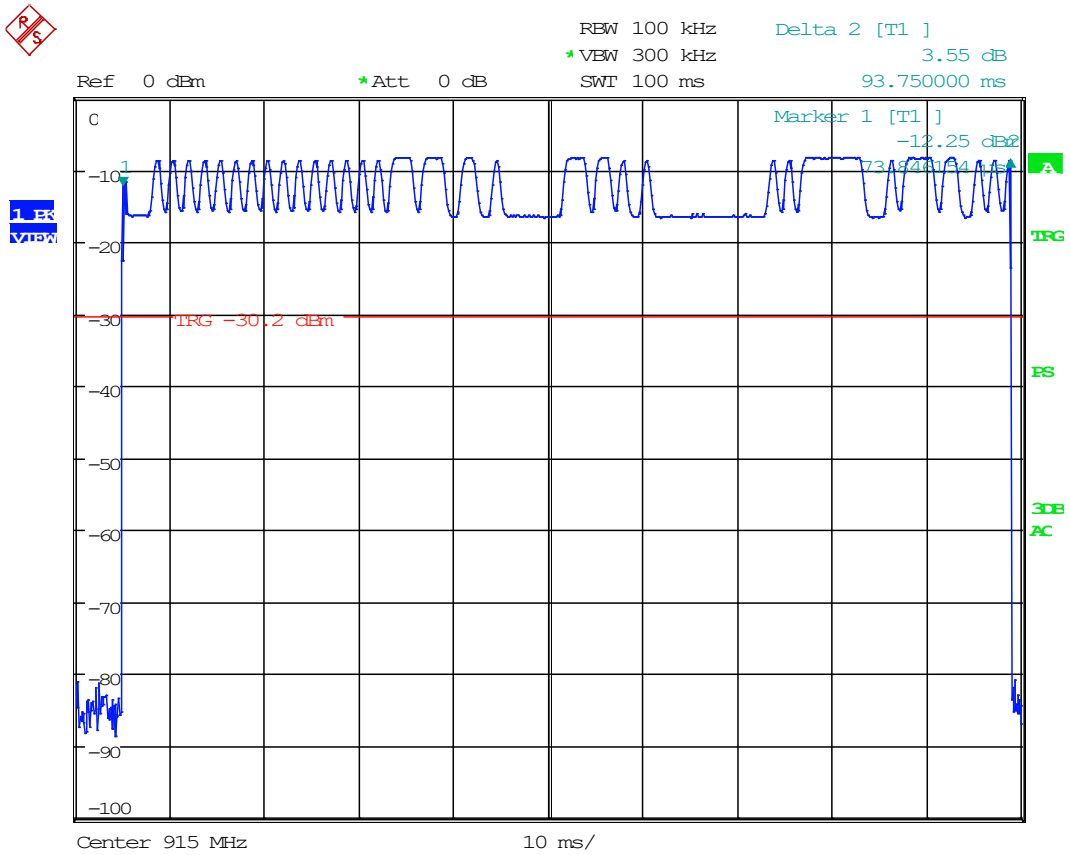

Date: 12.APR.2021 09:59:27

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.1.5 Hops in 10 s Plot

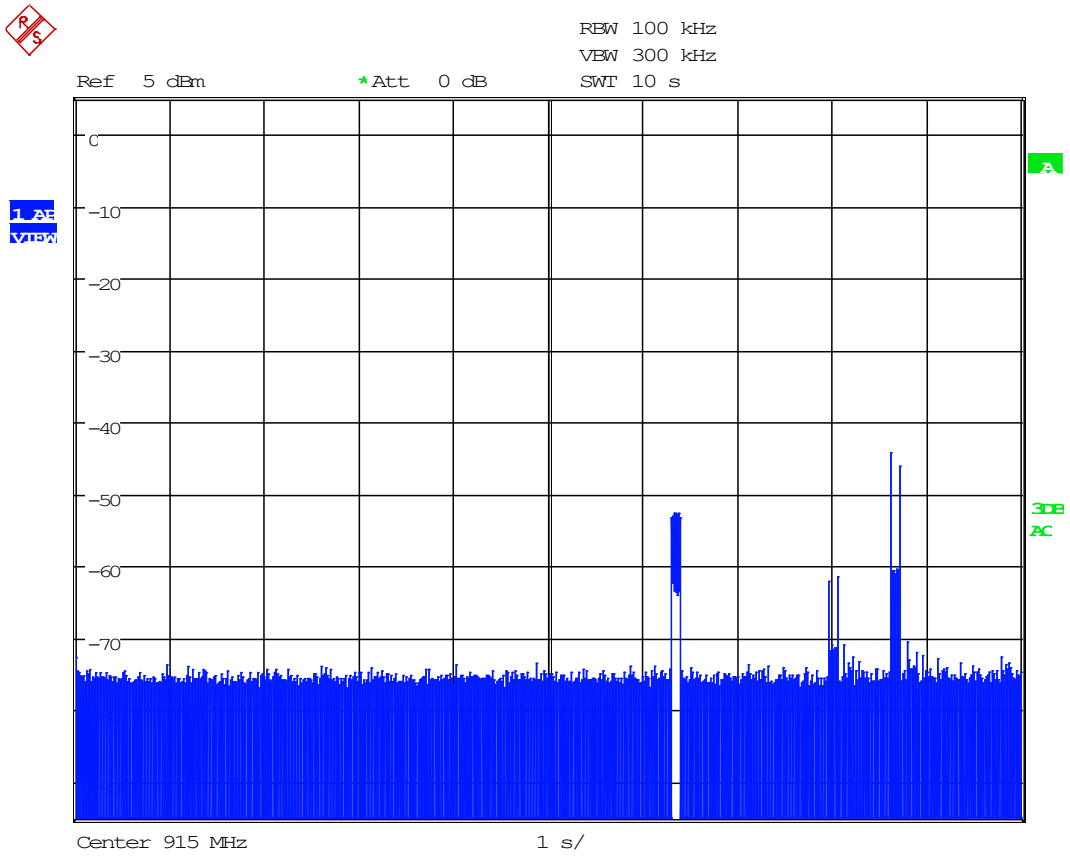

Date: 12.APR.2021 16:52:14

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.2 Occupied Bandwidth

Limits from FCC Part 15.247 (a)(1) – (2) as applicable, and test procedure from ANSI C63.10-2013 section 7.8 or 11.8 as applicable.

Test Setup


Test Results, Mode 1	
Tuned Frequency (MHz)	Bandwidth (kHz)
903	88.7
915	88.4
926	89.3

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

Occupied Bandwidth, Spectrum Plots

8.2.1 20 dB Bandwidth, 903 MHz

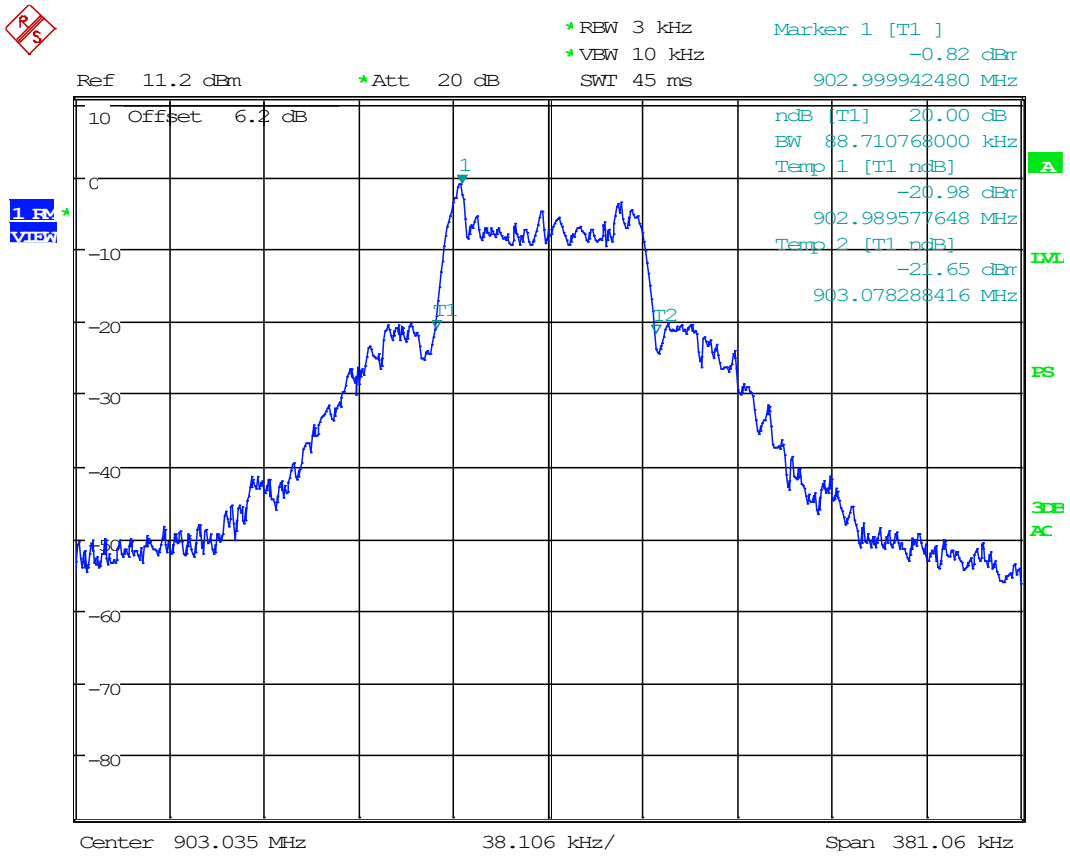

Date: 9.APR.2021 16:40:39

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.2.2 20 dB Bandwidth, 915 MHz

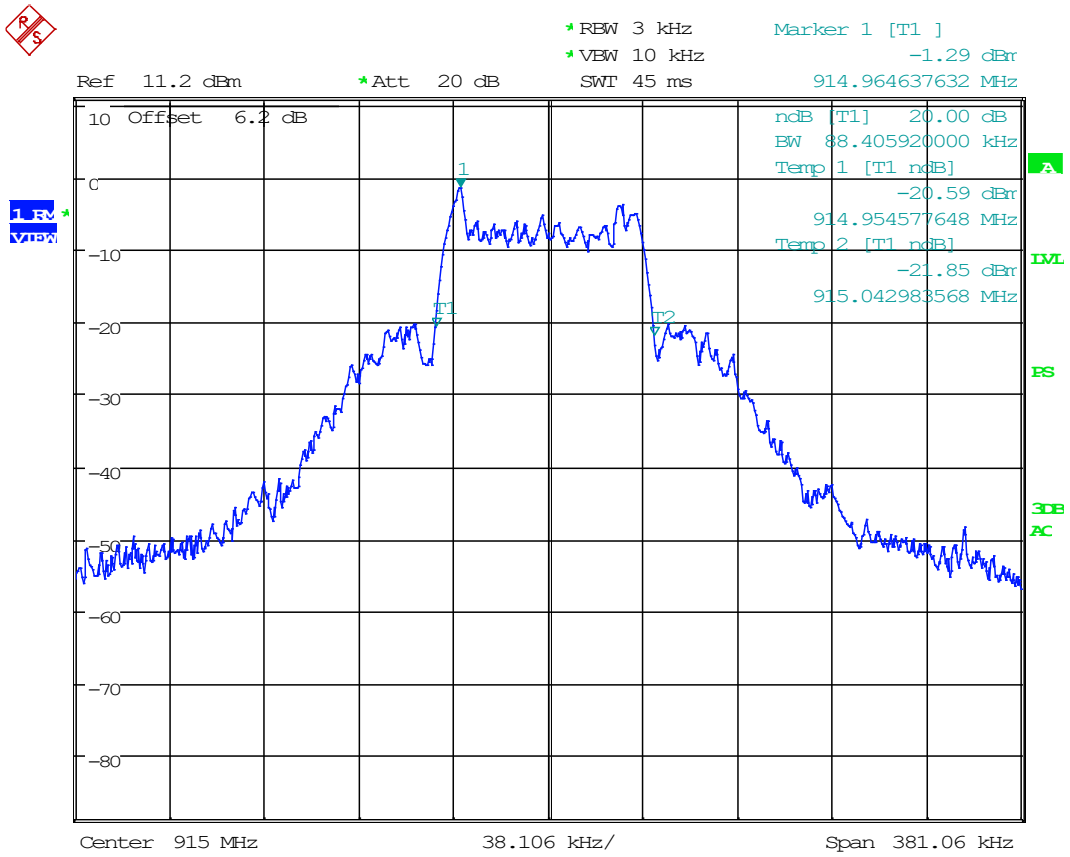

Date: 9.APR.2021 16:39:41

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.2.3 20 dB Bandwidth, 926 MHz

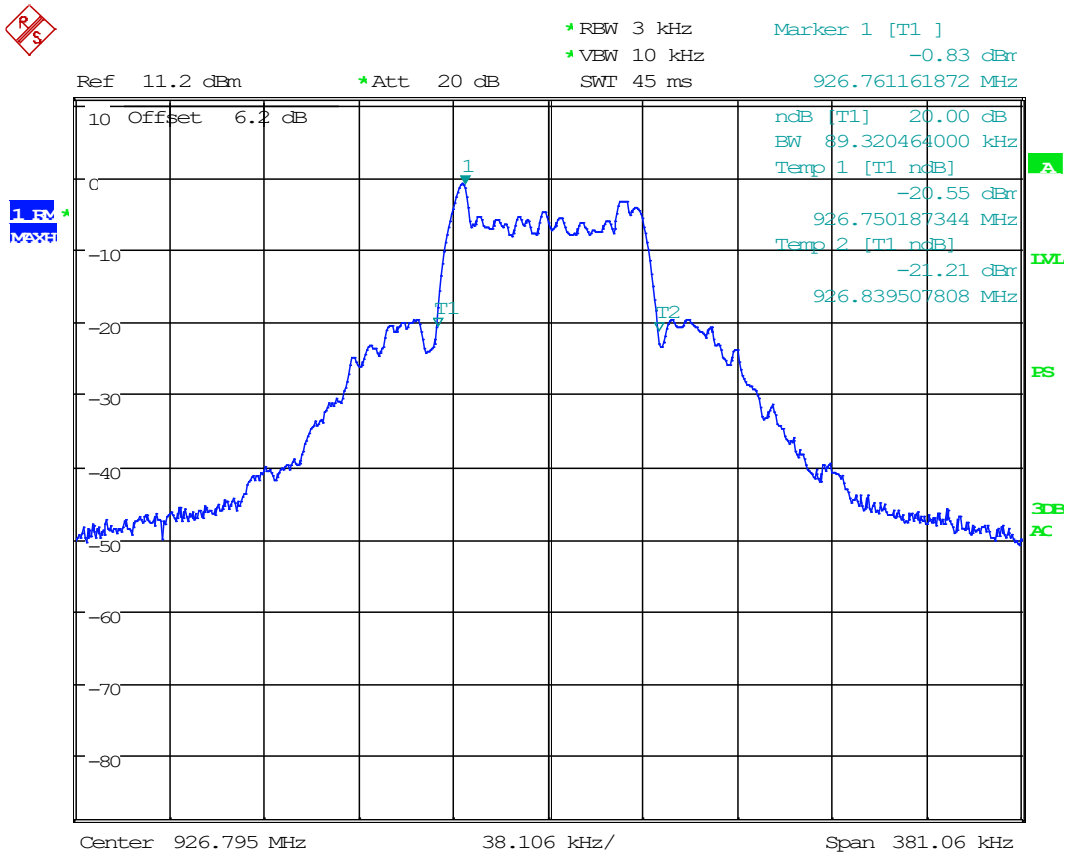

Date: 9.APR.2021 16:52:49

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.3 Conducted Output Power

Limits from FCC Part 15.247 (b) (1) – (4) as applicable, and test procedure from ANSI C63.10-2013 section 7.8 or 11.9 as applicable.

Test Setup


Test Results, Mode 1	
Tuned Frequency (MHz)	Power Output (dBm)
903	29.88
915	29.97
926	29.59

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

Conducted Output Power, Spectrum Plots

8.3.1 Conducted Output Power, 903 MHz

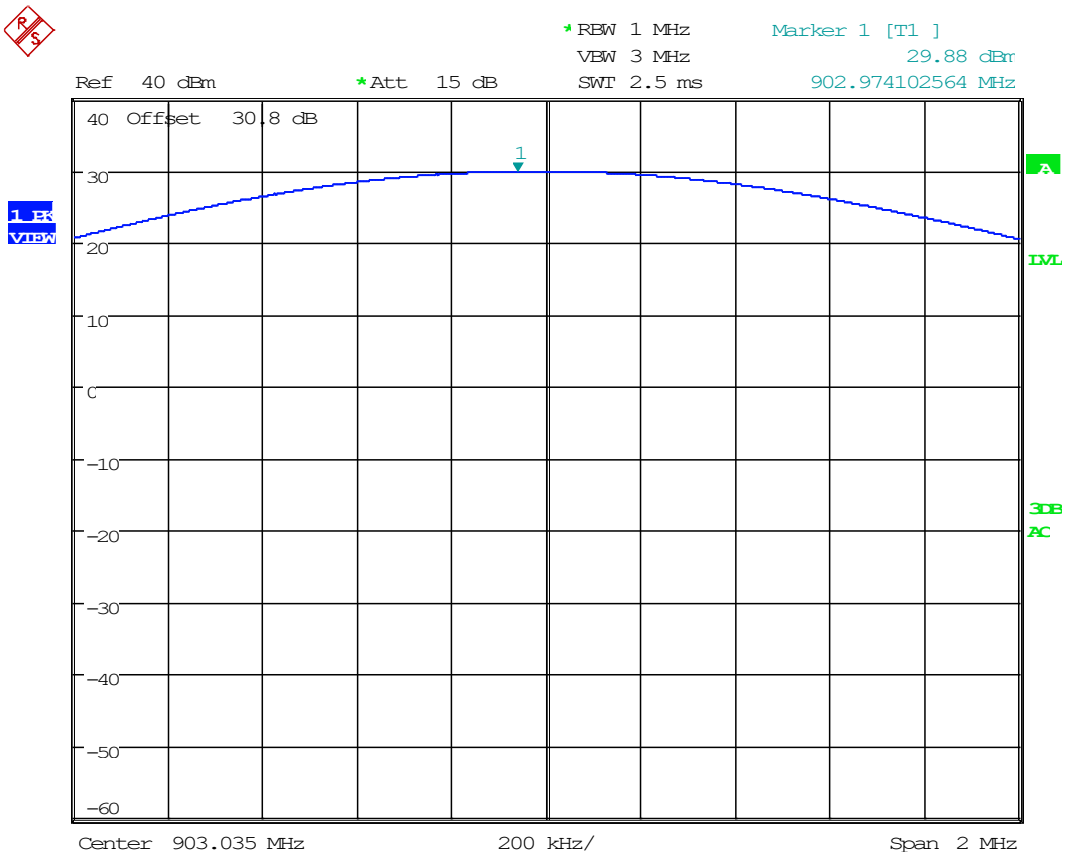

Date: 30.APR.2021 10:50:45

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.3.2 Conducted Output Power, 915 MHz

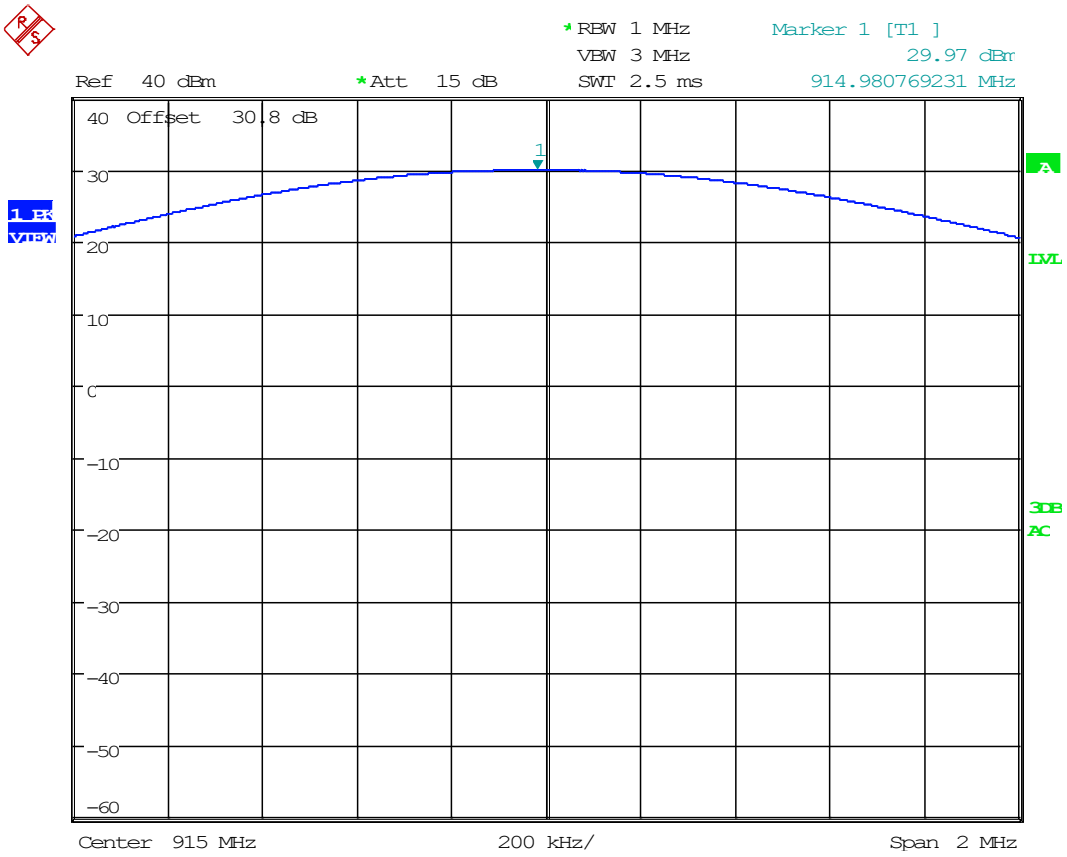

Date: 30.APR.2021 10:50:04

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.3.3 Conducted Output Power, 926 MHz

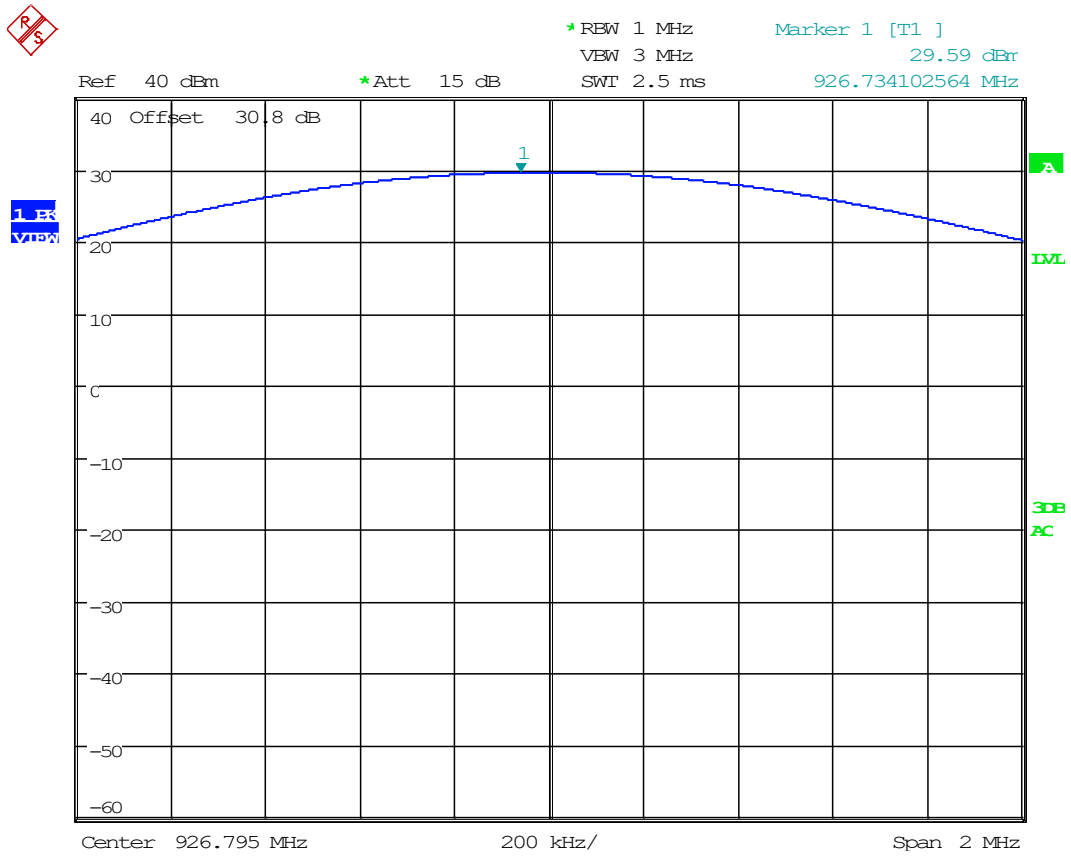

Date: 30.APR.2021 10:51:17

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.4 Emissions in Nonrestricted Frequency Bands (Out of Band)

Limits from FCC Part 15.247 (d) and 15.215 (b) and test procedure from ANSI C63.10-2013 section 7.8 or 11.11 as applicable.

Conducted Test Setup


This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

Conducted Emissions in Non-Restricted Bands, Spectrum Plots

8.4.1 903 MHz

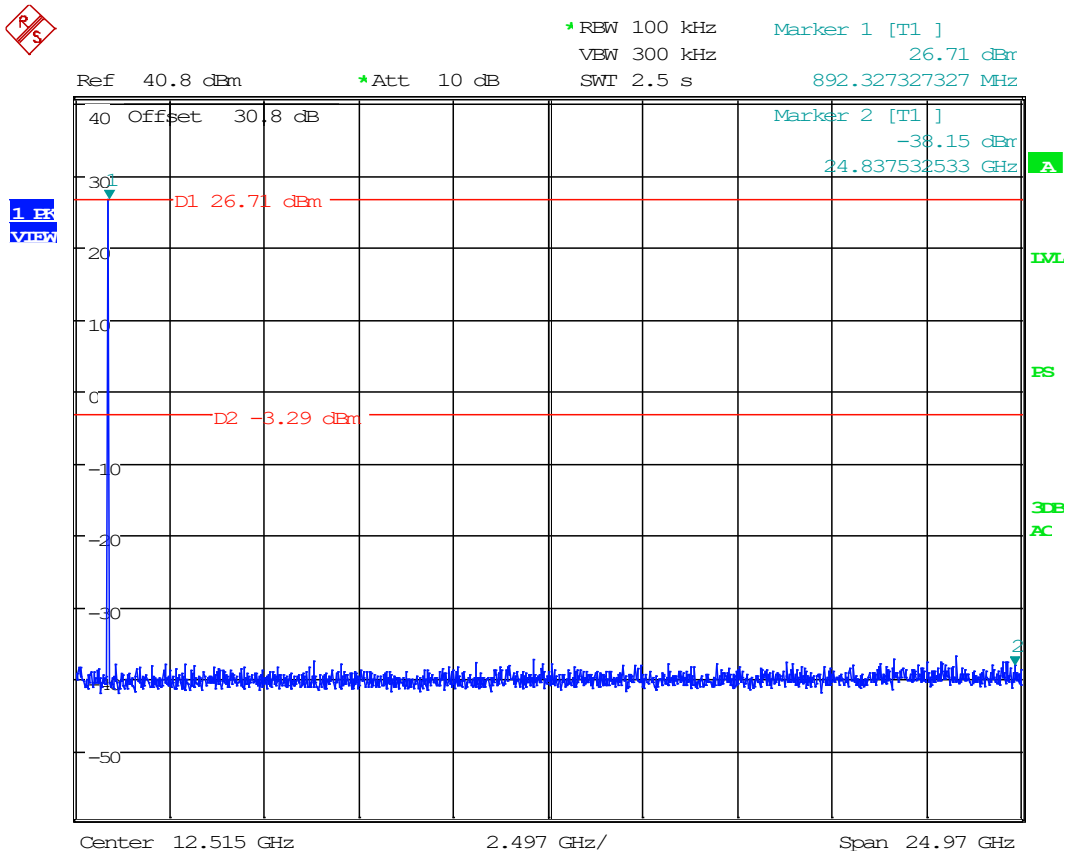

Date: 9.APR.2021 17:00:02

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.4.2 915 MHz

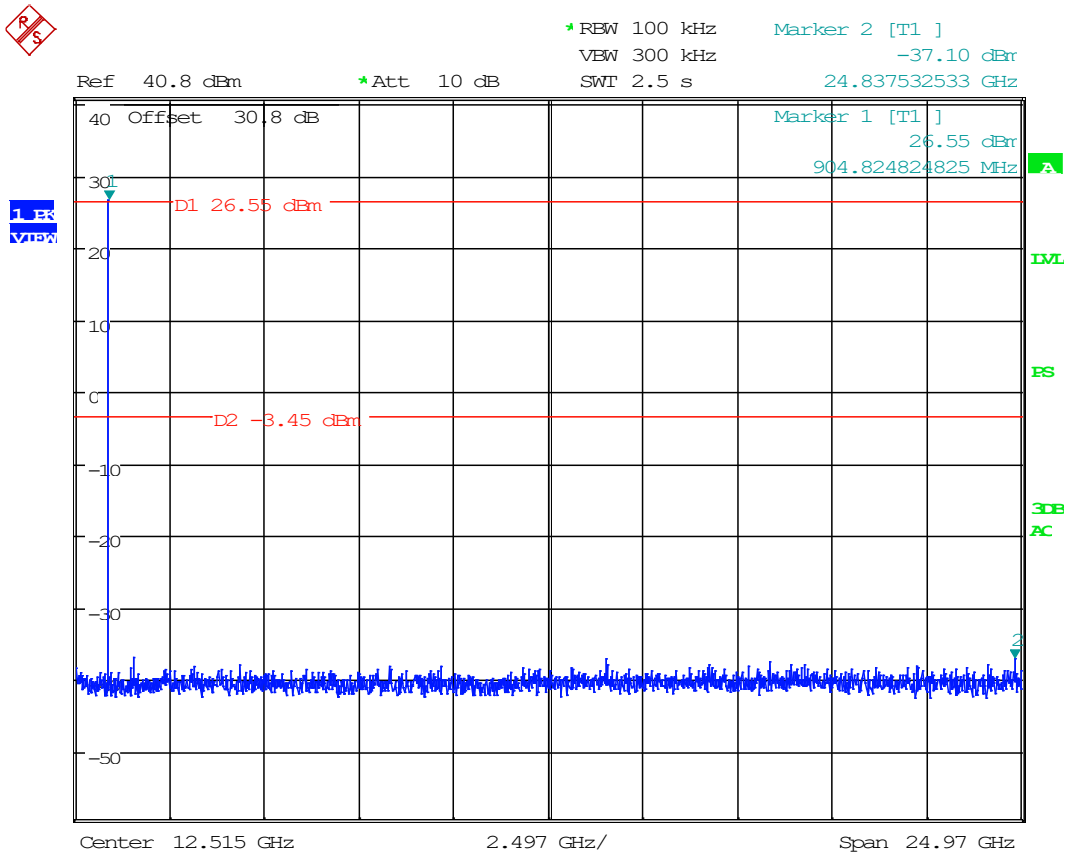

Date: 9.APR.2021 16:58:12

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.4.3 926 MHz

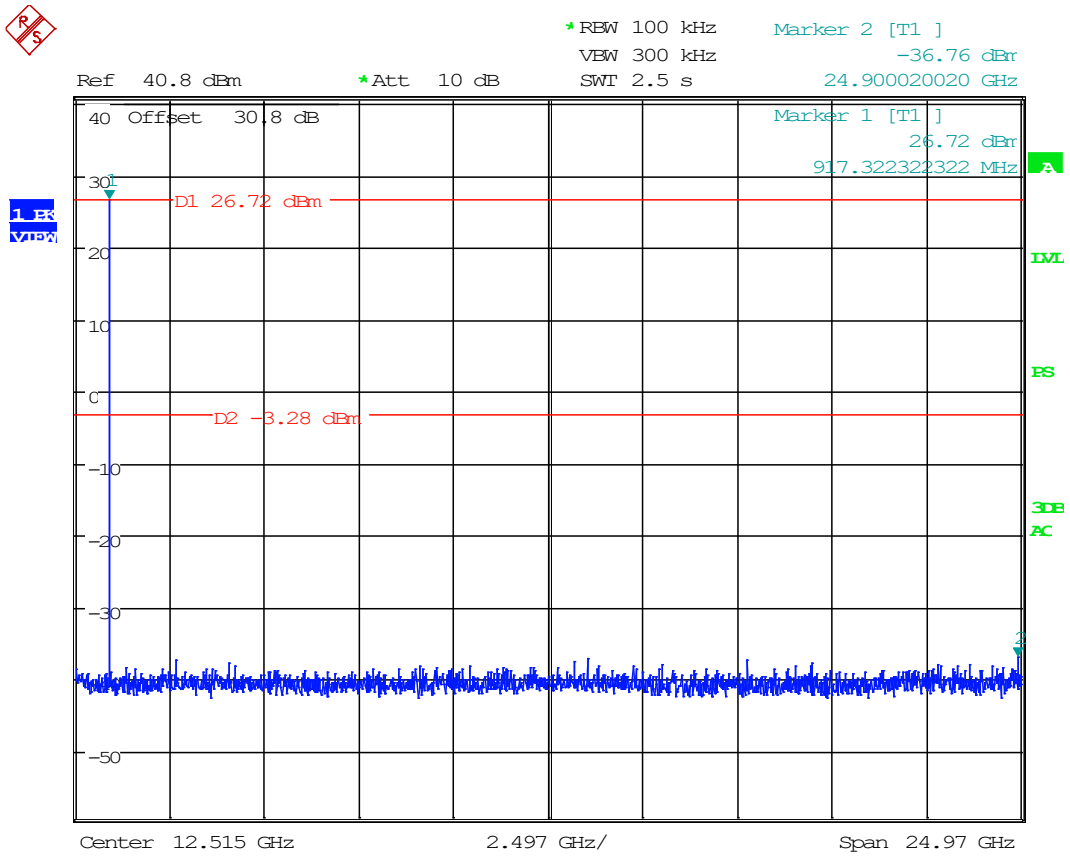

Date: 9.APR.2021 16:54:47

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.5 Band-edge measurements

Requirement from FCC KDB 558074 D01 and test procedure from ANSI C63.10-2013 section 7.8 or 11.13 as applicable.

Conducted Test Setup



Radiated Test Setup, 30 – 1000 MHz

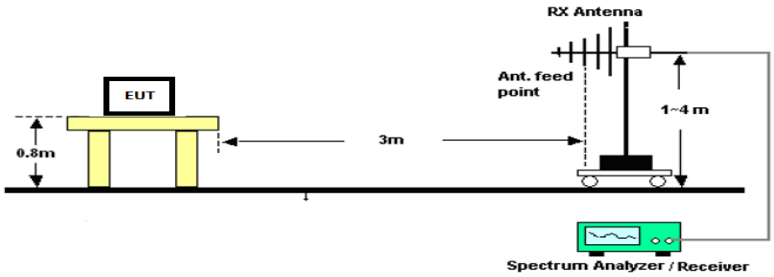

Radiated Test Setup, Above 1000 MHz

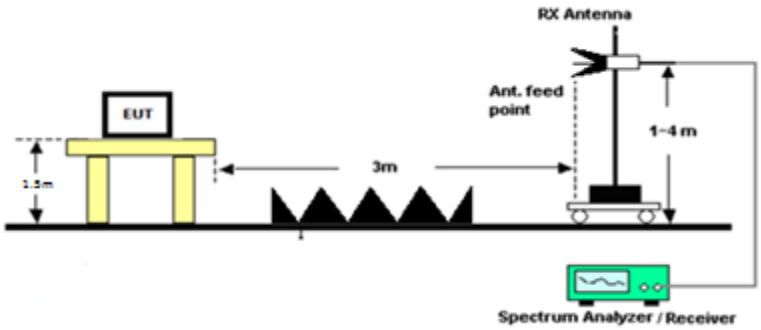

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

Band-edge Spectrum Plots

8.5.1 Lower Band Edge Plot, Stopped

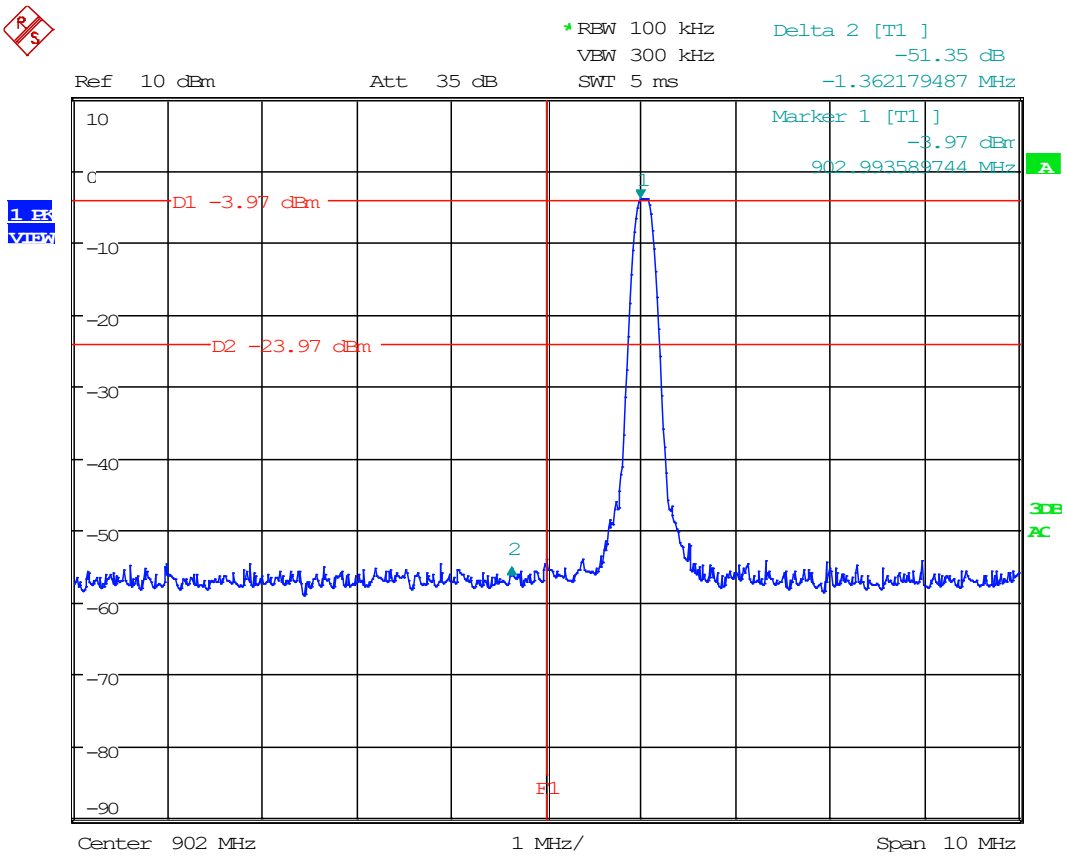

Date: 19.APR.2021 13:56:55

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.5.2 Upper Band Edge Plot, Stopped

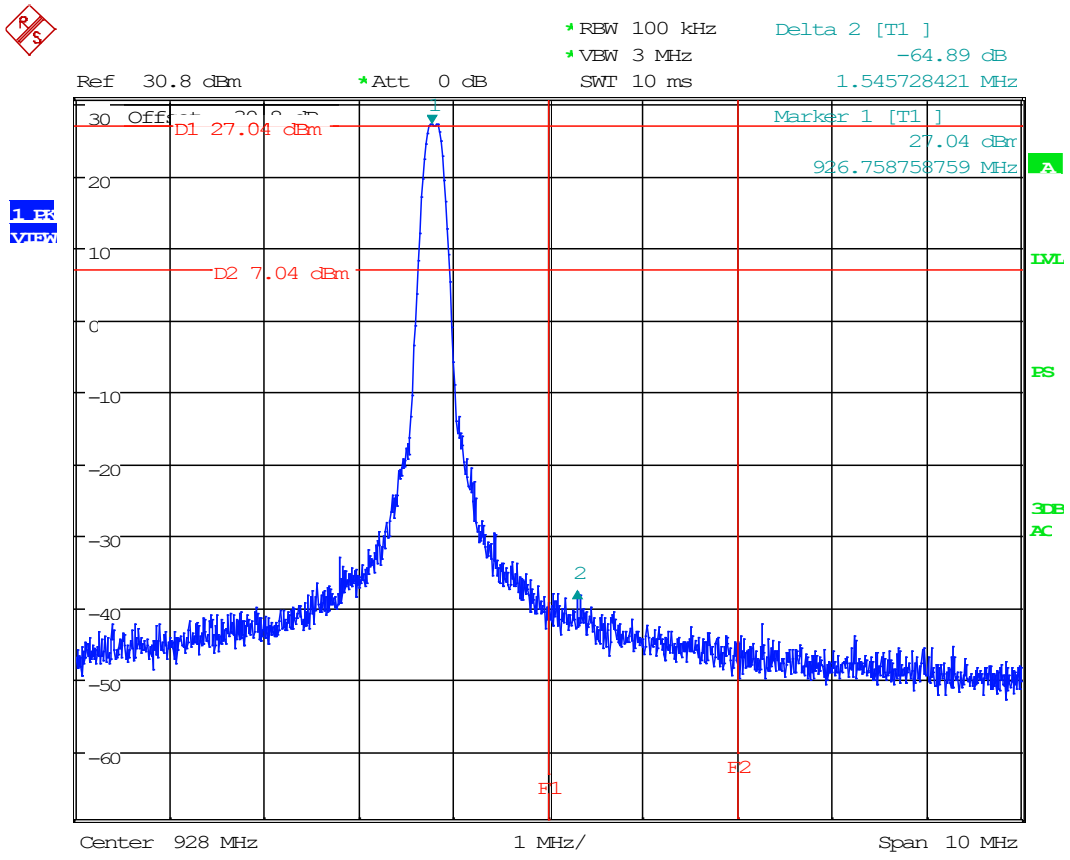

Date: 12.APR.2021 09:49:55

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.5.3 Lower Band Edge Plot, Hopping

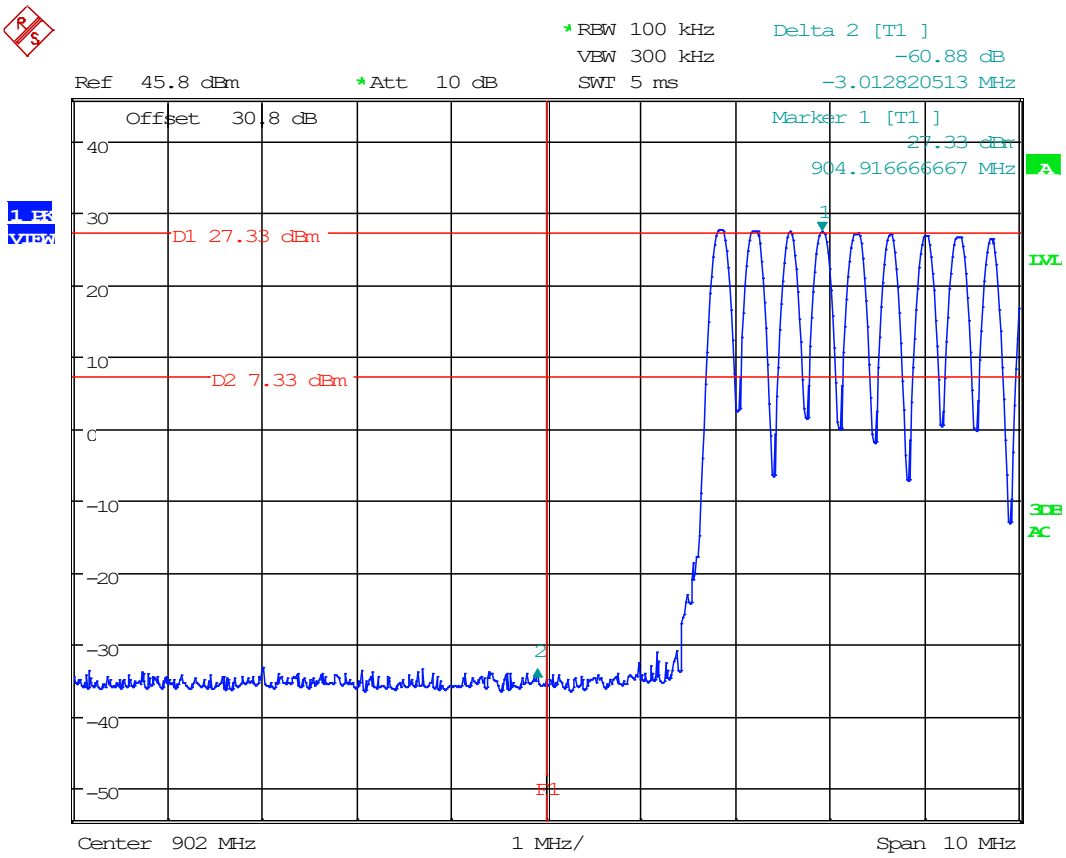

Date: 19.APR.2021 14:03:52

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.5.4 Upper Band Edge Plot, Hopping

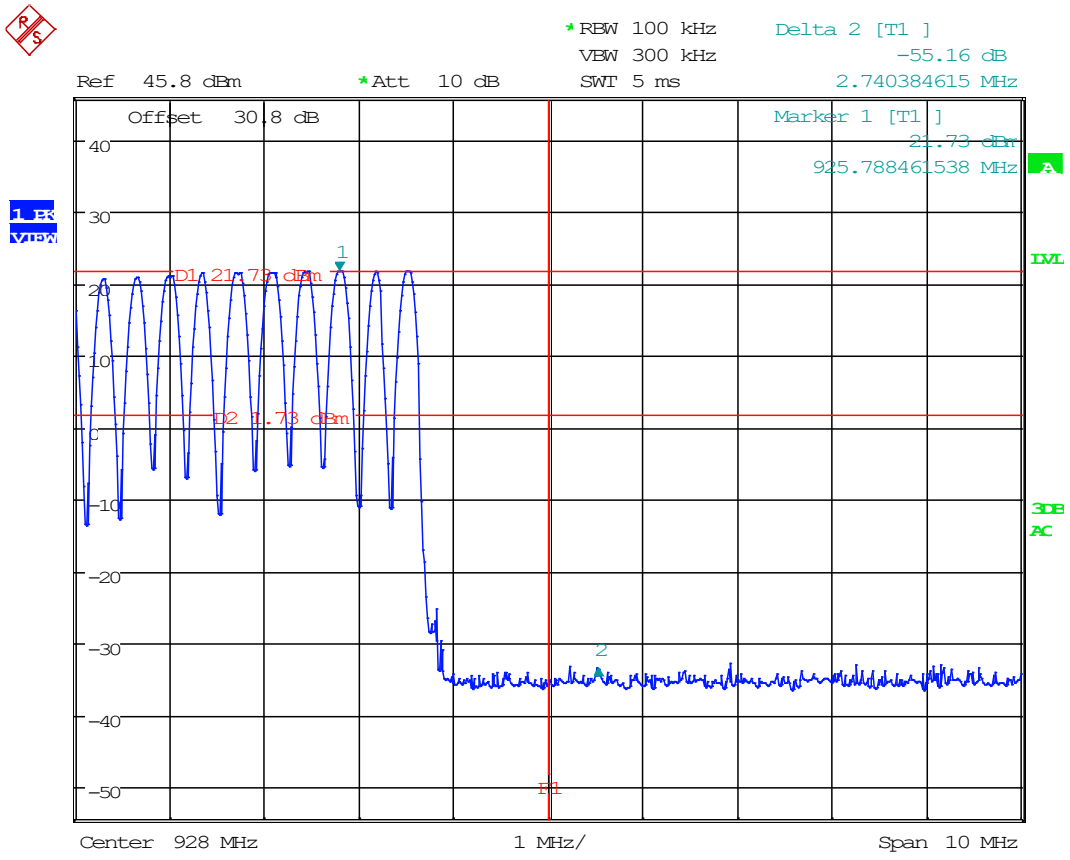

Date: 19.APR.2021 14:05:26

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.6 Radiated Emissions

Restricted Bands from FCC Part 15.205; Limits from FCC Part 15.209

Radiated Test Setup, 30 – 1000 MHz
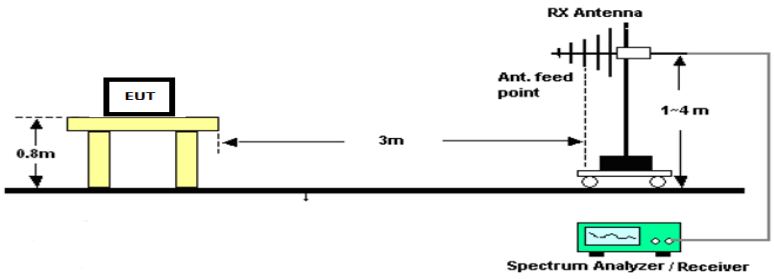

Radiated Test Setup, Above 1000 MHz
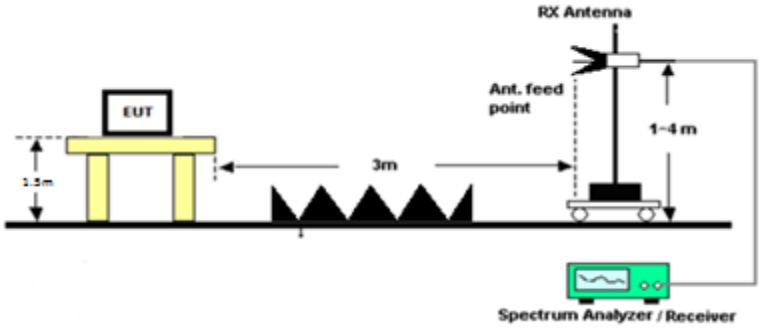

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

Radiated Emissions in Restricted Bands, Tabular Data

8.6.1 903 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	Limit	Margin (dB)
903.00	1806.00		PK	11.50	H	4.90	23.11	30.36	3.00	23.66	76.21	52.56
903.00	1806.00		PK	11.67	V	4.90	23.11	30.36	3.00	23.83	76.21	52.39
903.00	2709.00	X	PK	-4.48	H	6.00	23.11	32.48	3.00	10.90	73.98	63.08
903.00	2709.00	X	PK	-3.73	V	6.00	23.11	32.48	3.00	11.65	73.98	62.33
903.00	2709.00	X	AVG	-15.70	H	6.00	23.11	32.48	3.00	-0.32	53.98	54.30
903.00	2709.00	X	AVG	-25.30	V	6.00	23.11	32.48	3.00	-9.92	53.98	63.90
903.00	3612.00	X	PK	-7.27	H	6.64	23.11	33.13	3.00	9.39	73.98	64.59
903.00	3612.00	X	PK	-8.33	V	6.64	23.11	33.13	3.00	8.33	73.98	65.65
903.00	3612.00	X	AVG	-29.00	H	6.64	23.11	33.13	3.00	-12.34	53.98	66.32
903.00	3612.00	X	AVG	-29.00	V	6.64	23.11	33.13	3.00	-12.34	53.98	66.32
903.00	4515.00	X	PK	-5.05	H	7.37	23.11	33.92	3.00	13.13	73.98	60.84
903.00	4515.00	X	PK	-8.05	V	7.37	23.11	33.92	3.00	10.13	73.98	63.84
903.00	4515.00	X	AVG	-26.60	H	7.37	23.11	33.92	3.00	-8.42	53.98	62.39
903.00	4515.00	X	AVG	-26.60	V	7.37	23.11	33.92	3.00	-8.42	53.98	62.39
903.00	5418.00	X	PK	-4.31	H	8.15	23.11	34.40	3.00	15.13	73.98	58.85
903.00	5418.00	X	PK	-2.04	V	8.15	23.11	34.40	3.00	17.40	73.98	56.58
903.00	5418.00	X	AVG	-26.40	H	8.15	23.11	34.40	3.00	-6.96	53.98	60.94
903.00	5418.00	X	AVG	-26.40	V	8.15	23.11	34.40	3.00	-6.96	53.98	60.94
903.00	6321.00		PK	-4.11	H	8.64	23.11	35.39	3.00	16.81	76.21	59.40
903.00	6321.00		PK	-3.38	V	8.64	23.11	35.39	3.00	17.54	76.21	58.67
903.00	7224.00		PK	-1.93	H	9.52	23.11	36.36	3.00	20.85	76.21	55.36
903.00	7224.00		PK	-3.16	V	9.52	23.11	36.36	3.00	19.62	76.21	56.59
903.00	8127.00	X	PK	-7.72	H	9.96	23.11	35.80	3.00	14.93	73.98	59.05
903.00	8127.00	X	PK	-4.71	V	9.96	23.11	35.80	3.00	17.94	73.98	56.04
903.00	8127.00	X	AVG	-28.00	H	9.96	23.11	35.80	3.00	-5.35	53.98	59.33
903.00	8127.00	X	AVG	-27.90	V	9.96	23.11	35.80	3.00	-5.25	53.98	59.23
903.00	9030.00	X	PK	-5.32	H	10.70	23.11	36.13	3.00	18.41	73.98	55.57
903.00	9030.00	X	PK	-6.57	V	10.70	23.11	36.13	3.00	17.16	73.98	56.82
903.00	9030.00	X	AVG	-28.40	H	10.70	23.11	36.13	3.00	-4.67	53.98	58.65
903.00	9030.00	X	AVG	-28.40	V	10.70	23.11	36.13	3.00	-4.67	53.98	58.65

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.6.1 915 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	Limit	Margin (dB)
915.00	1830.00		PK	13.92	H	4.94	23.11	30.65	3.00	26.40	76.21	49.81
915.00	1830.00		PK	14.65	V	4.94	23.11	30.65	3.00	27.13	76.21	49.08
915.00	2745.00	X	PK	0.18	H	6.08	23.11	32.40	3.00	15.55	73.98	58.43
915.00	2745.00	X	PK	-2.73	V	6.08	23.11	32.40	3.00	12.64	73.98	61.34
915.00	2745.00	X	AVG	-15.10	H	6.08	23.11	32.40	3.00	0.27	53.98	53.71
915.00	2745.00	X	AVG	-22.00	V	6.08	23.11	32.40	3.00	-6.63	53.98	60.61
915.00	3660.00	X	PK	-5.16	H	6.62	23.11	33.20	3.00	11.55	73.98	62.43
915.00	3660.00	X	PK	-4.83	V	6.62	23.11	33.20	3.00	11.88	73.98	62.10
915.00	3660.00	X	AVG	-27.00	H	6.62	23.11	33.20	3.00	-10.29	53.98	64.27
915.00	3660.00	X	AVG	-27.20	V	6.62	23.11	33.20	3.00	-10.49	53.98	64.47
915.00	4575.00	X	PK	-5.41	H	7.53	23.11	34.03	3.00	13.04	73.98	60.94
915.00	4575.00	X	PK	-5.47	V	7.53	23.11	34.03	3.00	12.98	73.98	61.00
915.00	4575.00	X	AVG	-26.80	H	7.53	23.11	34.03	3.00	-8.35	53.98	62.33
915.00	4575.00	X	AVG	-26.90	V	7.53	23.11	34.03	3.00	-8.45	53.98	62.43
915.00	5490.00		PK	-3.98	H	8.07	23.11	34.47	3.00	15.46	76.21	60.75
915.00	5490.00		PK	-3.98	V	8.07	23.11	34.47	3.00	15.46	76.21	60.75
915.00	6405.00		PK	-3.63	H	8.95	23.11	35.46	3.00	17.68	76.21	58.54
915.00	6405.00		PK	-5.18	V	8.95	23.11	35.46	3.00	16.13	76.21	60.09
915.00	7320.00	X	PK	-6.15	H	9.61	23.11	36.24	3.00	16.59	73.98	57.39
915.00	7320.00	X	PK	-6.01	V	9.61	23.11	36.24	3.00	16.73	73.98	57.25
915.00	7320.00	X	AVG	-26.80	H	9.61	23.11	36.24	3.00	-4.06	53.98	58.04
915.00	7320.00	X	AVG	-27.00	V	9.61	23.11	36.24	3.00	-4.26	53.98	58.24
915.00	8235.00	X	PK	-3.85	H	10.00	23.11	35.80	3.00	18.84	73.98	55.14
915.00	8235.00	X	PK	-5.38	V	10.00	23.11	35.80	3.00	17.31	73.98	56.67
915.00	8235.00	X	AVG	-25.70	H	10.00	23.11	35.80	3.00	-3.01	53.98	56.99
915.00	8235.00	X	AVG	-25.90	V	10.00	23.11	35.80	3.00	-3.21	53.98	57.19
915.00	9150.00	X	PK	-6.66	H	10.81	23.11	36.18	3.00	17.23	73.98	56.75
915.00	9150.00	X	PK	-6.24	V	10.81	23.11	36.18	3.00	17.65	73.98	56.33
915.00	9150.00	X	AVG	-28.00	H	10.81	23.11	36.18	3.00	-4.11	53.98	58.09
915.00	9150.00	X	AVG	-28.10	V	10.81	23.11	36.18	3.00	-4.21	53.98	58.19

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

8.6.1 926 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	Limit	Margin (dB)
926.00	1852.00		PK	17.04	H	4.98	23.11	30.89	3.00	29.80	76.21	46.41
926.00	1852.00		PK	15.48	V	4.98	23.11	30.89	3.00	28.24	76.21	47.97
926.00	2778.00	X	PK	-4.19	H	6.15	23.11	32.45	3.00	11.30	73.98	62.68
926.00	2778.00	X	PK	-4.73	V	6.15	23.11	32.45	3.00	10.76	73.98	63.22
926.00	2778.00	X	AVG	-28.50	H	6.15	23.11	32.45	3.00	-13.01	53.98	66.99
926.00	2778.00	X	AVG	-22.50	V	6.15	23.11	32.45	3.00	-7.01	53.98	60.99
926.00	3704.00	X	PK	-9.22	H	6.58	23.11	33.19	3.00	7.44	73.98	66.54
926.00	3704.00	X	PK	-8.36	V	6.58	23.11	33.19	3.00	8.30	73.98	65.68
926.00	3704.00	X	AVG	-30.20	H	6.58	23.11	33.19	3.00	-13.54	53.98	67.52
926.00	3704.00	X	AVG	-30.10	V	6.58	23.11	33.19	3.00	-13.44	53.98	67.42
926.00	4630.00	X	PK	-6.22	H	7.54	23.11	33.97	3.00	12.18	73.98	61.80
926.00	4630.00	X	PK	-6.08	V	7.54	23.11	33.97	3.00	12.32	73.98	61.66
926.00	4630.00	X	AVG	-28.60	H	7.54	23.11	33.97	3.00	-10.20	53.98	64.18
926.00	4630.00	X	AVG	-28.50	V	7.54	23.11	33.97	3.00	-10.10	53.98	64.08
926.00	5556.00		PK	-7.08	H	8.06	23.11	34.41	3.00	12.28	76.21	63.93
926.00	5556.00		PK	-6.92	V	8.06	23.11	34.41	3.00	12.44	76.21	63.77
926.00	6482.00		PK	-3.16	H	9.05	23.11	35.53	3.00	18.31	76.21	57.90
926.00	6482.00		PK	-4.03	V	9.05	23.11	35.53	3.00	17.44	76.21	58.77
926.00	7408.00	X	PK	-3.26	H	9.50	23.11	36.05	3.00	19.18	73.98	54.80
926.00	7408.00	X	PK	-5.00	V	9.50	23.11	36.05	3.00	17.44	73.98	56.54
926.00	7408.00	X	AVG	-24.40	H	9.50	23.11	36.05	3.00	-1.96	53.98	55.94
926.00	7408.00	X	AVG	-24.40	V	9.50	23.11	36.05	3.00	-1.96	53.98	55.94
926.00	8334.00	X	PK	-5.11	H	10.14	23.11	35.89	3.00	17.80	73.98	56.18
926.00	8334.00	X	PK	-4.57	V	10.14	23.11	35.89	3.00	18.34	73.98	55.64
926.00	8334.00	X	AVG	-26.40	H	10.14	23.11	35.89	3.00	-3.49	53.98	57.47
926.00	8334.00	X	AVG	-26.50	V	10.14	23.11	35.89	3.00	-3.59	53.98	57.57
926.00	9260.00		PK	-5.34	H	10.86	23.11	36.32	3.00	18.73	76.21	57.48
926.00	9260.00		PK	-5.91	V	10.86	23.11	36.32	3.00	18.16	76.21	58.05

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

9. ANNEX-A - Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in separate supplementary documents labelled EXTERNAL PHOTOS and INTERNAL PHOTOS.

10. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate supplementary ANNEX-B document.

11. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_1353-21_FCC_15.247_	1	Initial release	April 19, 2021
	2	Updated Page5 & 6	May 7, 2021

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).

END OF TEST REPORT

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA).