FCC Radio Test Report

FCC ID: 2AZL6-LB60004G

Report No.	:	BTL-FCCP-2-2103T093
Equipment	:	LBeacon
Model Name	:	LB60004G
Brand Name	:	BiDaE Technology, Incorporated
Applicant	:	BiDaE Technology, Incorporated
Address	:	1F., NO. 5, LN. 96, SEC. 1, DA-AN RD., DA-AN DIST., TAIPEI CITY 106, TAIWAN (R.O.C.)
Radio Function	:	Bluetooth Low Energy (4.0)
FCC Rule Part(s)	:	FCC Part15, Subpart C (15.247)
Measurement Procedure(s)	:	ANSI C63.10-2013
Date of Receipt	:	2021/4/7
Date of Test	:	2021/4/7 ~ 2021/6/24
Issued Date	:	2021/7/12

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : Peter Chen, Engineer

Approved by : Scott Hsu , Manager

BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

REVISON HISTORY		5
1	SUMMARY OF TEST RESULTS	6
1.1	TEST FACILITY	7
1.2	MEASUREMENT UNCERTAINTY	7
1.3	TEST ENVIRONMENT CONDITIONS	7
1.4	TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	8
1.5	DUTY CYCLE	8
2	GENERAL INFORMATION	9
2.1	DESCRIPTION OF EUT	9
2.2	TEST MODES	10
2.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4	SUPPORT UNITS	12
3	AC POWER LINE CONDUCTED EMISSIONS TEST	13
3.1	LIMIT	13
3.2	TEST PROCEDURE	13
3.3	DEVIATION FROM TEST STANDARD	13
3.4	TEST SETUP	14
3.5	TEST RESULT	14
4	RADIATED EMISSIONS TEST	15
4.1	LIMIT	15
4.2	TEST PROCEDURE	16
4.3	DEVIATION FROM TEST STANDARD	16
4.4	TEST SETUP	17
4.5	EUT OPERATING CONDITIONS	18
4.6	TEST RESULT – BELOW 30 MHZ	18
4.7	TEST RESULT – 30 MHZ TO 1 GHZ	18
4.8	TEST RESULT – ABOVE 1 GHZ	18
5	BANDWIDTH TEST	19
5.1	APPLIED PROCEDURES / LIMIT	19
5.2	TEST PROCEDURE	19
5.3	DEVIATION FROM STANDARD	19
5.4	TEST SETUP	19
5.5	EUT OPERATION CONDITIONS	19
5.6	TEST RESULTS	19
6	OUTPUT POWER TEST	20
6.1	APPLIED PROCEDURES / LIMIT	20
6.2	TEST PROCEDURE	20
6.3	DEVIATION FROM STANDARD	20
6.4	TEST SETUP	20
6.5	EUT OPERATION CONDITIONS	20
6.6	TEST RESULTS	20
7	POWER SPECTRAL DENSITY TEST	21
7.1	APPLIED PROCEDURES / LIMIT	21
7.2	TEST PROCEDURE	21
7.3	DEVIATION FROM STANDARD	21
7.4	TEST SETUP	21
7.5	EUT OPERATION CONDITIONS	21

7.6	TEST RESULTS	21
8	ANTENNA CONDUCTED SPURIOUS EMISSION	22
8.1	APPLIED PROCEDURES / LIMIT	22
8.2	TEST PROCEDURE	22
8.3	DEVIATION FROM STANDARD	22
8.4	TEST SETUP	22
8.5	EUT OPERATION CONDITIONS	22
8.6	TEST RESULTS	22
9	LIST OF MEASURING EQUIPMENTS	23
10	EUT TEST PHOTO	25
11	EUT PHOTOS	25

APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	26
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	31
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	34
APPENDIX D	BANDWIDTH	43
APPENDIX E	OUTPUT POWER	45
APPENDIX F	POWER SPECTRAL DENSITY TEST	47
APPENDIX G	ANTENNA CONDUCTED SPURIOUS EMISSION	49

REVISON HISTORY

Report No.	Version	Description	Issued Date
BTL-FCCP-2-2103T093	R00	Original Report.	2021/7/12

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

FCC Part 15, Subpart C (15.247)				
Standard(s) Section	**Description**	**Test Result**	**Judgement**	**Remark**
15.207	AC Power Line Conducted Emissions	APPENDIX A	Pass	------
15.205 15.209 15.247(d)	Radiated Emissions	APPENDIX B APPENDIX C	Pass	------
15.247(a)(2)	Bandwidth	APPENDIX D	Pass	------
15.247(b)(3)	Output Power	APPENDIX E	Pass	------
15.247(e)	Power Spectral Density	APPENDIX F	Pass	------
15.247(d)	Antenna conducted Spurious Emission	APPENDIX G	Pass	------
15.203	Antenna Requirement	------	Pass	------

NOTE:
(1) ”N/A” denotes test is not applicable in this Test Report.
(2) The report format version is TP.1.1.1.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
The test sites and facilities are covered under FCC RN: 674415 and DN: TW0659.

☒ C05 ☐ CB08 ☐ CB11 ☒ CB15 ☐ CB16
☒ SR05

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement **y** ± **U**, where expanded uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k = 2**, providing a level of confidence of approximately **95 %**. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C05	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test :

Test Site	Measurement Frequency Range	U,(dB)
CB15	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

C. Conducted test :

Test Item	U,(dB)
Occupied Bandwidth	0.5334
Output power	0.3669
Power Spectral Density	0.6591
Conducted Spurious emissions	0.5416
Conducted Band edges	0.5348

NOTE:
Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	22 °C, 70 %	AC 120V	Paul Shen
Radiated emissions below 1 GHz	23 °C, 51 %	AC 120V	Jay Kao
Radiated emissions above 1 GHz	23 °C, 51 %	AC 120V	Jay Kao
Bandwidth	23.5 °C, 51 %	AC 120V	Nero Hsieh
Output Power	23.5 °C, 51 %	AC 120V	Nero Hsieh
Power Spectral Density	23.5 °C, 51 %	AC 120V	Nero Hsieh
Antenna conducted Spurious Emission	23.5 °C, 51 %	AC 120V	Nero Hsieh

1.4 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

Test Software	Blue Test3			
Modulation Mode	2402 MHz	2440 MHz	2480 MHz	Data Rate
BLE 4.0	DEF	DEF	DEF	1 Mbps

1.5 DUTY CYCLE

If duty cycle is ≥ 98 %, duty factor is not required.
If duty cycle is < 98 %, duty factor shall be considered.

Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)
BLE 4.0 (1 Mbps)	0.390	1	0.390	0.630	61.90%	2.08

BLE 4.0 (1 Mbps)

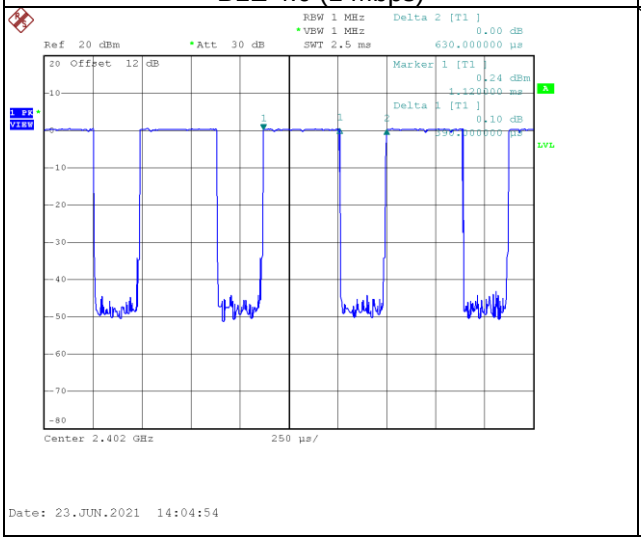

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	LBeacon
Model Name	LB60004G
Brand Name	BiDaE Technology, Incorporated
Model Difference	N/A
Power Source	DC Voltage supplied from AC/DC adapter.
Power Rating	Input: 100-240V~ 50/60Hz 0.5A Output: 5.0V⎓ 2.5A
Products Covered	1 * Power Adapter: CHANNEL WELL TECHNOLOGY/2AEAO13BA3B
Operation Band	2400 MHz ~ 2483.5 MHz
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Technology	GFSK
Transfer Rate	1 Mbps
Output Power Max.	-0.05 dBm (0.0010 W)
Test Model	LB60004G
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:
(1) For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
(2) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

(3) Table for Filed Antenna:

Antenna	Manufacture	Model name	Type	Connector	Frequency (MHz)	Gain (dBi)
-	ALFA	Pi-WiFi-ANT-BT	PIFA	I-PEX	2400	5.94
					2450	6.31
					2500	6.16

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal/Idle	-	-
Transmitter Radiated Emissions (below 1GHz)	1 Mbps	39	-
Transmitter Radiated Emissions (above 1GHz)	1 Mbps	00/39	Bandedge
	1 Mbps	00/19/39	Harmonic
Bandwidth	1 Mbps	00/19/39	-
Output Power	1 Mbps	00/19/39	-
Power Spectral Density	1 Mbps	00/19/39	-
Antenna conducted Spurious Emission	1 Mbps	00/19/39	-

NOTE:
(1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
(2) All X, Y and Z axes are evaluated, but only the worst case (Z axis) is recorded.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC power line conducted emissions

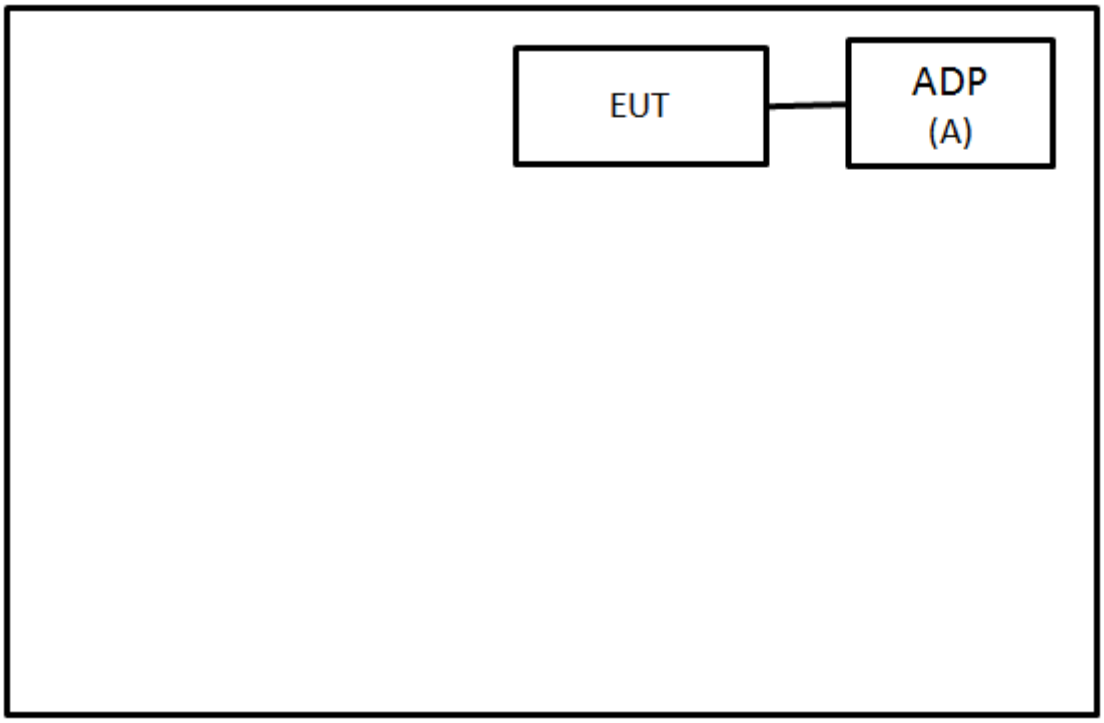

Radiated Emissions

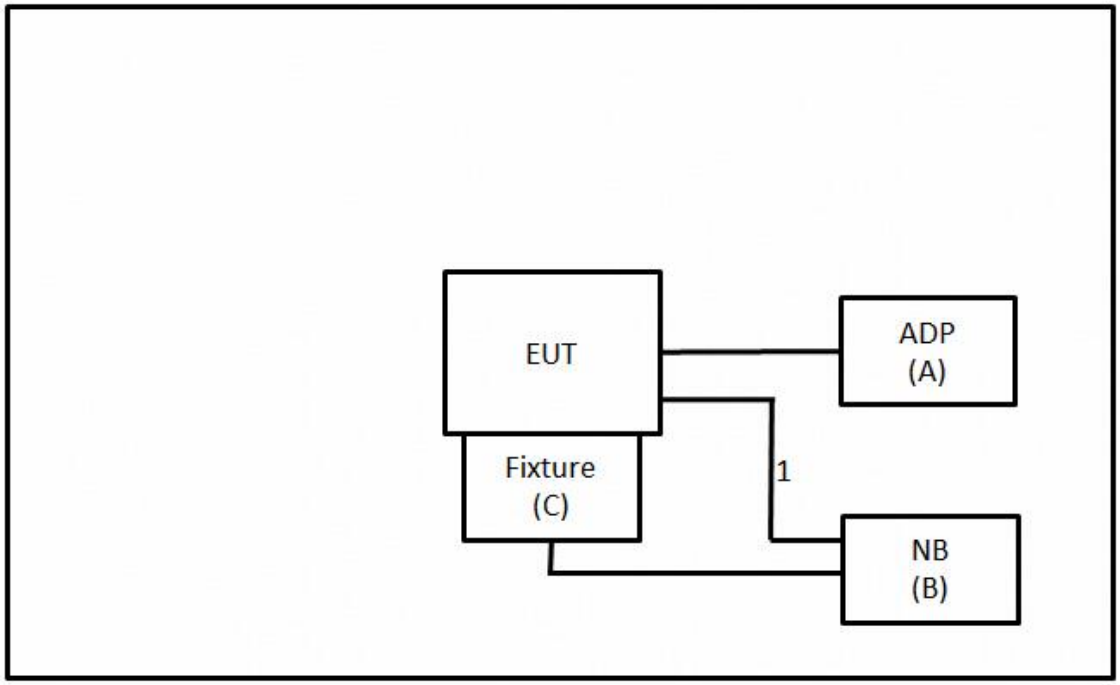

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Adapter	CHANNEL WELL TECHNOLOGY	2AEA013BA3B	N/A	Supplied by test requester
B	NB	acer	MS2351	N/A	Furnished by test lab.
C	Fixture	CSR	USB-SPI	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	1.5m	USB Cable	Furnished by test lab.

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:
(1) The tighter limit applies at the band edges.
(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
(3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
Margin Level = Measurement Value – Limit Value
Calculation example:

Reading Level		Correct Factor		Measurement Value
38.22	+	3.45	=	41.67

Measurement Value		Limit Value		Margin Level
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
All other support equipment were powered from an additional LISN(s).
The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
The end of the cable will be terminated, using the correct terminating impedance.
The overall length shall not exceed 1 m.
d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
e. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

NOTE:
(1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
BW=9 kHz (6 dB Bandwidth)
(2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

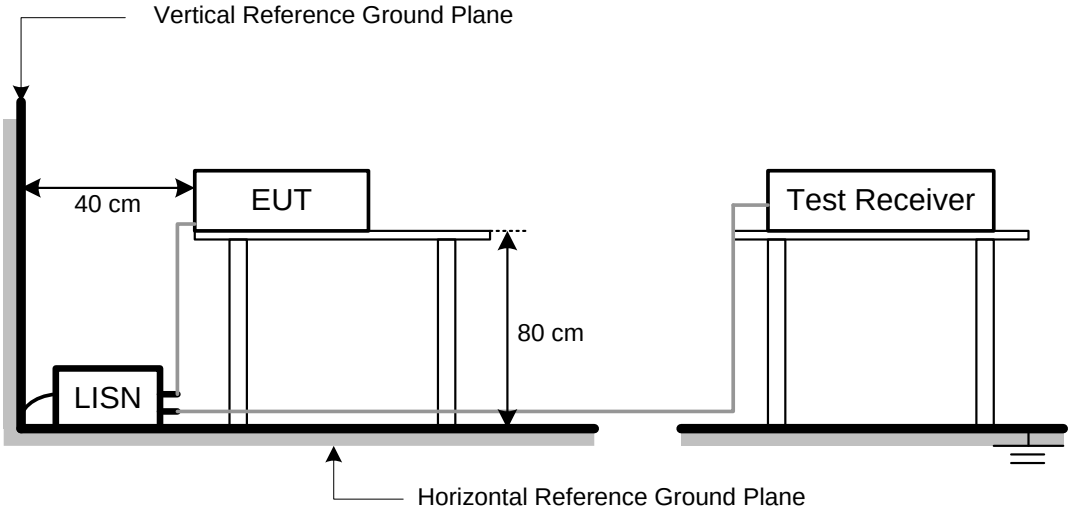

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSIONS MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Radiated Emissions (dBuV/m)		Measurement Distance (meters)
	Peak	Average	
Above 1000	74	54	3

NOTE:
(1) The limit for radiated test was performed according to FCC Part 15, Subpart C.
(2) The tighter limit applies at the band edges.
(3) Emission level (dBuV/m)=20log Emission level (uV/m).
(4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value
Calculation example:

Reading Level		Correct Factor		Measurement Value
41.91	+	-8.36	=	33.55

Measurement Value		Limit Value		Margin Level
33.55	-	43.50	=	-9.95

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2 TEST PROCEDURE

a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn‘t perform. (below 1GHz)
h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn‘t perform. (above 1GHz)
i. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

30 MHz to 1 GHz

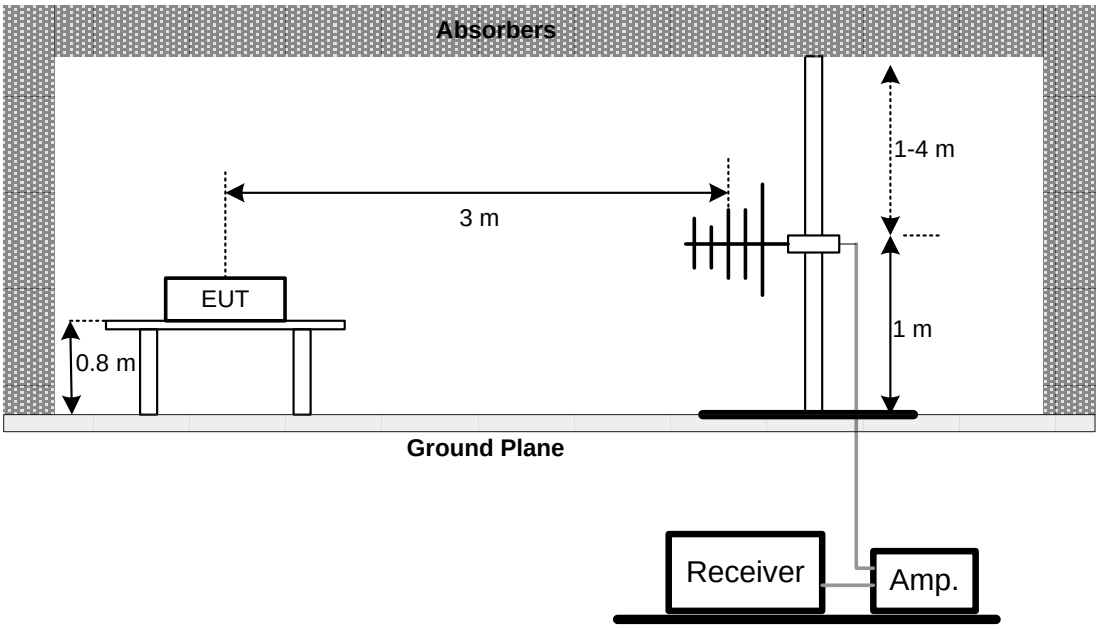

Above 1 GHz

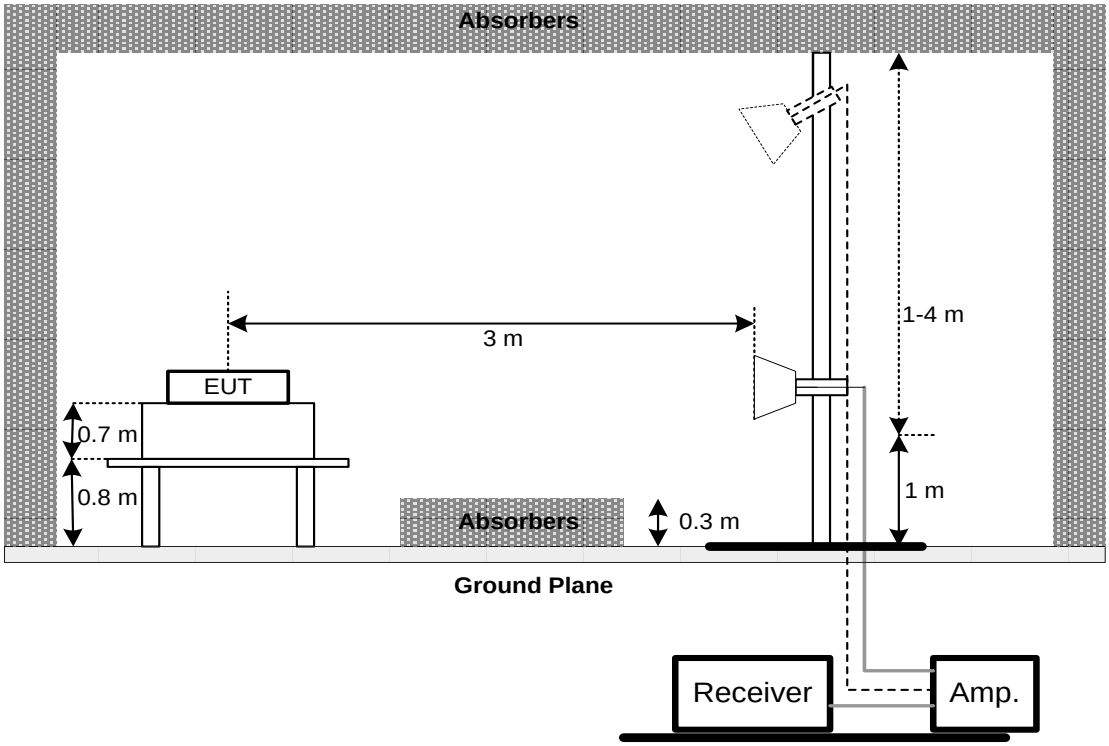

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT – BELOW 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.7 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.8 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

(1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

5.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

Please refer to the APPENDIX D.

6 OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.2 TEST PROCEDURE

a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
b. The maximum peak conducted output power was performed in accordance with FCC KDB 558074 D01 15.247 Meas Guidance.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

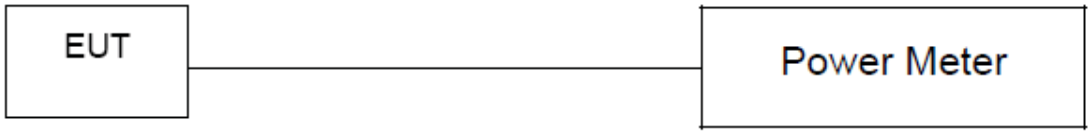

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7 POWER SPECTRAL DENSITY TEST

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

7.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8 ANTENNA CONDUCTED SPURIOUS EMISSION

8.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

8.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	TWO-LINE V-NETWORK	R&S	ENV216	101339	2021/3/10	2022/3/9
2	Test Cable	EMCI	EMCRG58-BM-BM-9000	210501	2021/5/3	2022/5/2
3	EMI Test Receiver	R&S	ESR 7	101433	2020/12/11	2021/12/10
4	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC02325B	980217	2021/4/8	2022/4/7
2	Preamplifier	EMCI	EMC012645B	980267	2021/4/8	2022/4/7
3	Preamplifier	EMCI	EMC001340	980555	2021/4/8	2022/4/7
4	Test Cable	EMCI	EMC-SM-SM-1000	180809	2021/4/8	2022/4/7
5	Test Cable	EMCI	EMC104-SM-SM-3000	151205	2021/4/8	2022/4/7
6	Test Cable	EMCI	EMC-SM-SM-7000	180408	2021/4/8	2022/4/7
7	MXE EMI Receiver	Agilent	N9038A	MY554200087	2021/5/27	2022/5/26
8	Signal Analyzer	Agilent	N9010A	MY56480554	2020/8/25	2021/8/24
9	Loop Ant	Electro-Metrics	EMCI-LPA600	274	2021/6/1	2022/5/31
10	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	2021/6/2	2022/6/1
11	Horn Ant	Schwarzbeck	BBHA 9170	BBHA 9170340	2020/7/9	2021/7/8
12	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	VULB 9168-352	2020/7/24	2021/7/23
13	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0625	2020/7/24	2021/7/23
14	Measurement Software	EZ	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

Bandwidth						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2021/4/16	2022/4/15

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Power Meter	Anritsu	ML2495A	1128008	2021/5/26	2022/5/25
2	Power Sensor	Anritsu	MA2411B	1126001	2021/5/26	2022/5/25

Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2021/4/16	2022/4/15

Antenna conducted Spurious Emission						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2021/4/16	2022/4/15

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

10 EUT TEST PHOTO

Please refer to document Appendix No.: TP-2103T093-FCCP-1 (APPENDIX-TEST PHOTOS).

11 EUT PHOTOS

Please refer to document Appendix No.: EP-2103T093-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2021/5/7
Test Frequency	-	Phase	Line

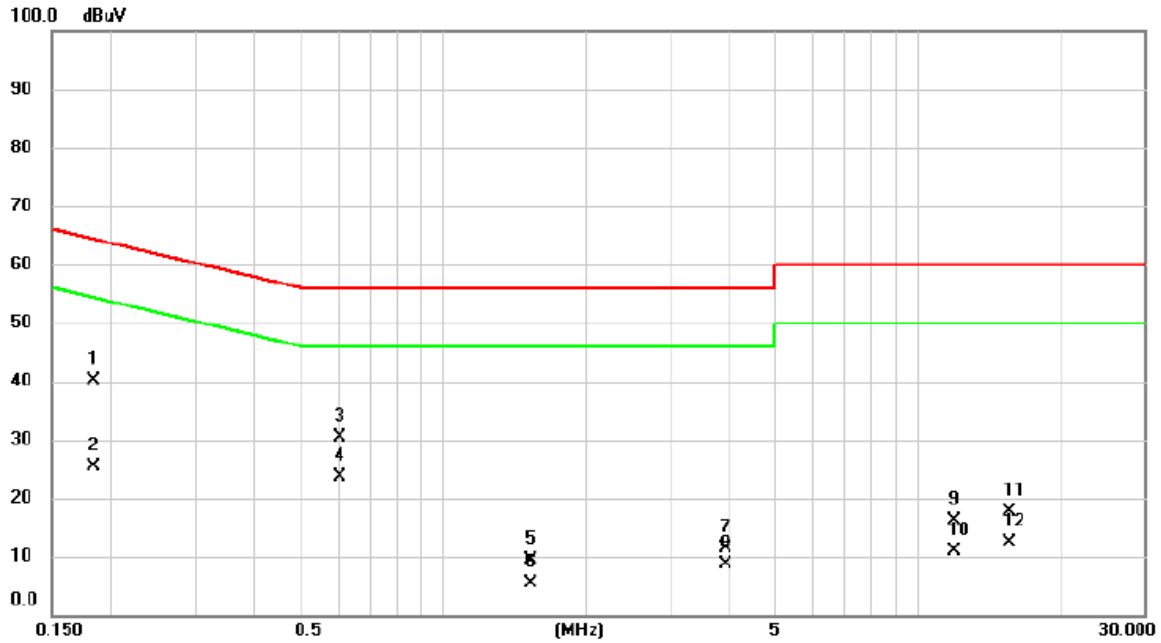

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1838	30.40	9.69	40.09	64.31	-24.22	QP	
2		0.1838	15.63	9.69	25.32	54.31	-28.99	AVG	
3		0.6066	20.78	9.70	30.48	56.00	-25.52	QP	
4	*	0.6066	13.87	9.70	23.57	46.00	-22.43	AVG	
5		1.5293	-0.46	9.74	9.28	56.00	-46.72	QP	
6		1.5293	-4.37	9.74	5.37	46.00	-40.63	AVG	
7		3.9413	1.55	9.80	11.35	56.00	-44.65	QP	
8		3.9413	-1.28	9.80	8.52	46.00	-37.48	AVG	
9		11.9108	6.33	9.91	16.24	60.00	-43.76	QP	
10		11.9108	1.08	9.91	10.99	50.00	-39.01	AVG	
11		15.6570	7.82	9.90	17.72	60.00	-42.28	QP	
12		15.6570	2.41	9.90	12.31	50.00	-37.69	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2021/5/7
Test Frequency	-	Phase	Neutral

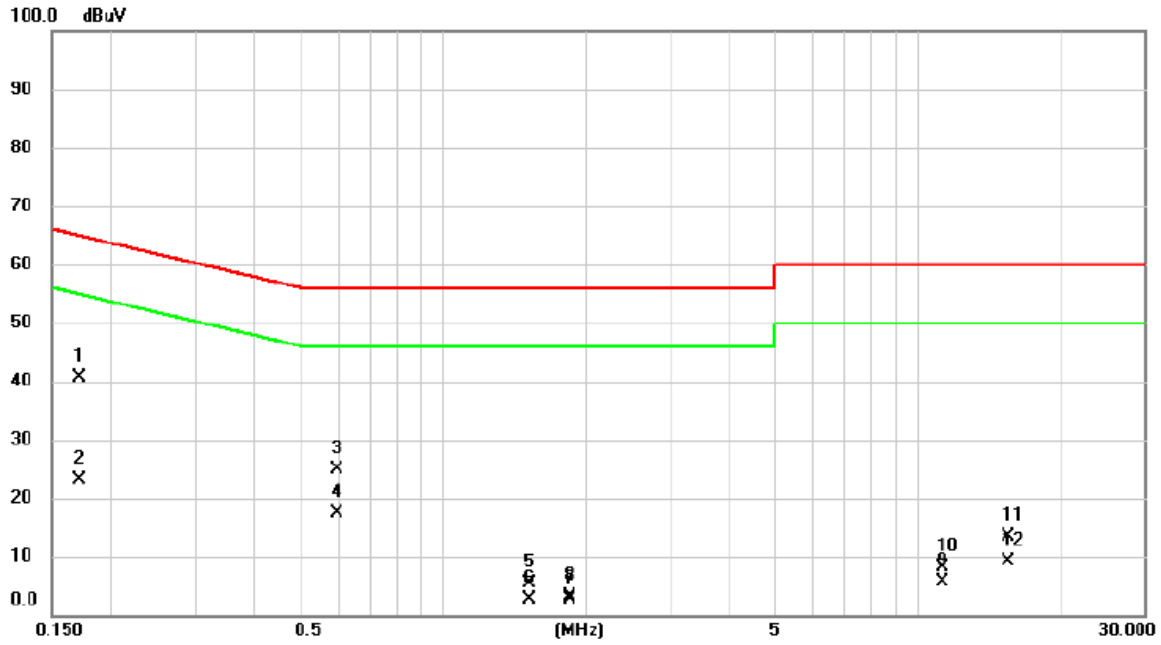

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1712	31.02	9.70	40.72	64.90	-24.18	QP	
2		0.1712	13.45	9.70	23.15	54.90	-31.75	AVG	
3		0.5955	15.26	9.71	24.97	56.00	-31.03	QP	
4		0.5955	7.65	9.71	17.36	46.00	-28.64	AVG	
5		1.5180	-4.46	9.75	5.29	56.00	-50.71	QP	
6		1.5180	-7.23	9.75	2.52	46.00	-43.48	AVG	
7		1.8443	-7.03	9.76	2.73	56.00	-53.27	QP	
8		1.8443	-6.74	9.76	3.02	46.00	-42.98	AVG	
9		11.3145	-4.34	9.96	5.62	60.00	-54.38	QP	
10		11.3145	-1.88	9.96	8.08	50.00	-41.92	AVG	
11		15.5490	3.45	9.99	13.44	60.00	-46.56	QP	
12		15.5490	-0.92	9.99	9.07	50.00	-40.93	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2021/5/7
Test Frequency	-	Phase	Line

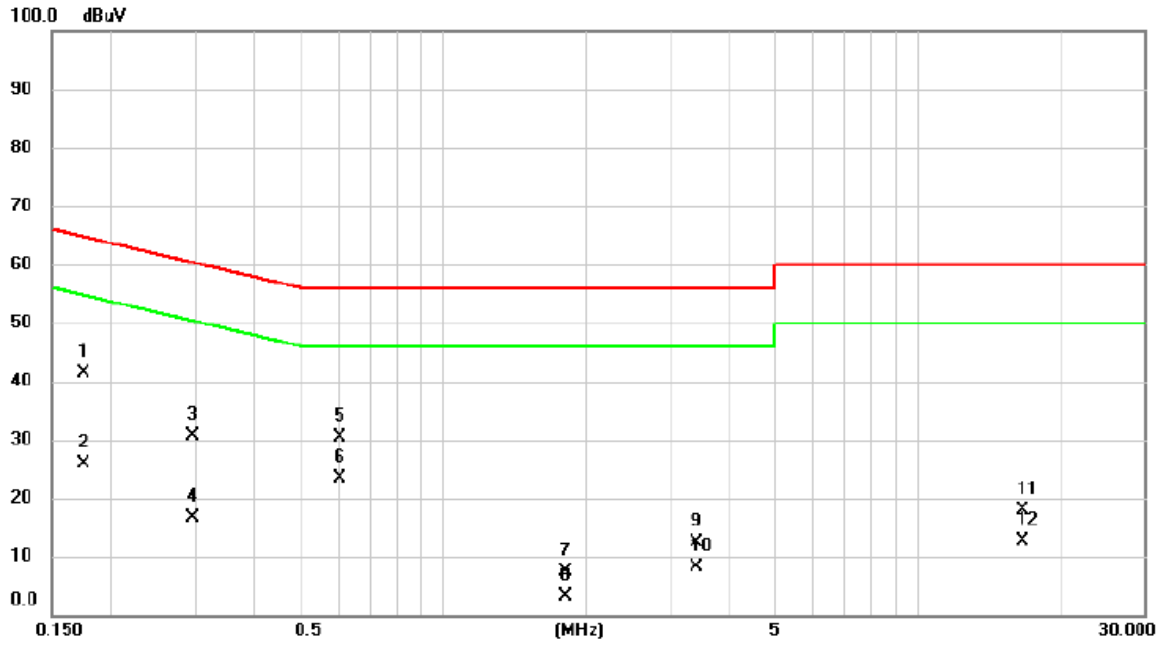

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1750	31.78	9.70	41.48	64.72	-23.24	QP	
2		0.1750	16.26	9.70	25.96	54.72	-28.76	AVG	
3		0.2962	20.97	9.71	30.68	60.35	-29.67	QP	
4		0.2962	6.91	9.71	16.62	50.35	-33.73	AVG	
5		0.6045	20.64	9.70	30.34	56.00	-25.66	QP	
6	*	0.6045	13.69	9.70	23.39	46.00	-22.61	AVG	
7		1.8038	-2.46	9.75	7.29	56.00	-48.71	QP	
8		1.8038	-6.69	9.75	3.06	46.00	-42.94	AVG	
9		3.4215	2.68	9.79	12.47	56.00	-43.53	QP	
10		3.4215	-1.74	9.79	8.05	46.00	-37.95	AVG	
11		16.6650	8.08	9.90	17.98	60.00	-42.02	QP	
12		16.6650	2.71	9.90	12.61	50.00	-37.39	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Tested Date	2021/5/7
Test Frequency	-	Phase	Neutral

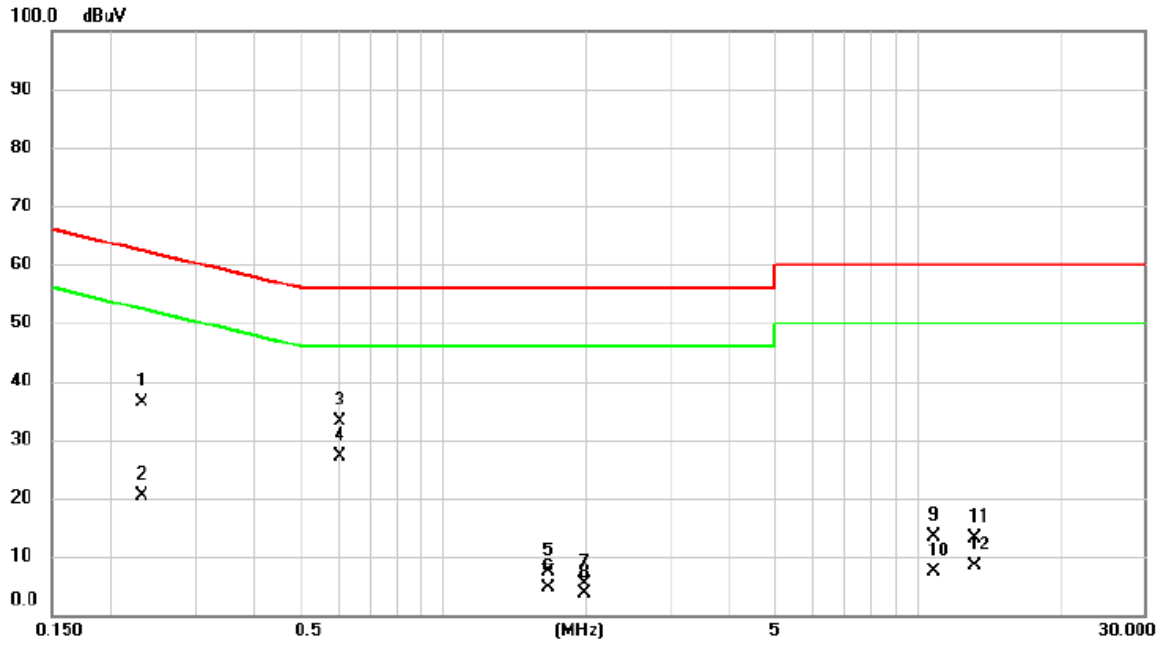

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2310	26.58	9.70	36.28	62.41	-26.13	QP	
2		0.2310	10.66	9.70	20.36	52.41	-32.05	AVG	
3		0.6066	23.50	9.71	33.21	56.00	-22.79	QP	
4	*	0.6066	17.36	9.71	27.07	46.00	-18.93	AVG	
5		1.6575	-2.34	9.76	7.42	56.00	-48.58	QP	
6		1.6575	-5.06	9.76	4.70	46.00	-41.30	AVG	
7		1.9905	-4.32	9.77	5.45	56.00	-50.55	QP	
8		1.9905	-6.09	9.77	3.68	46.00	-42.32	AVG	
9		10.8330	3.49	9.96	13.45	60.00	-46.55	QP	
10		10.8330	-2.68	9.96	7.28	50.00	-42.72	AVG	
11		13.1325	3.15	9.98	13.13	60.00	-46.87	QP	
12		13.1325	-1.52	9.98	8.46	50.00	-41.54	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	BLE4.0(1 Mbps)	Test Date	2021/6/23
Test Frequency	2480MHz	Polarization	Vertical
Temp	23°C	Hum.	51%

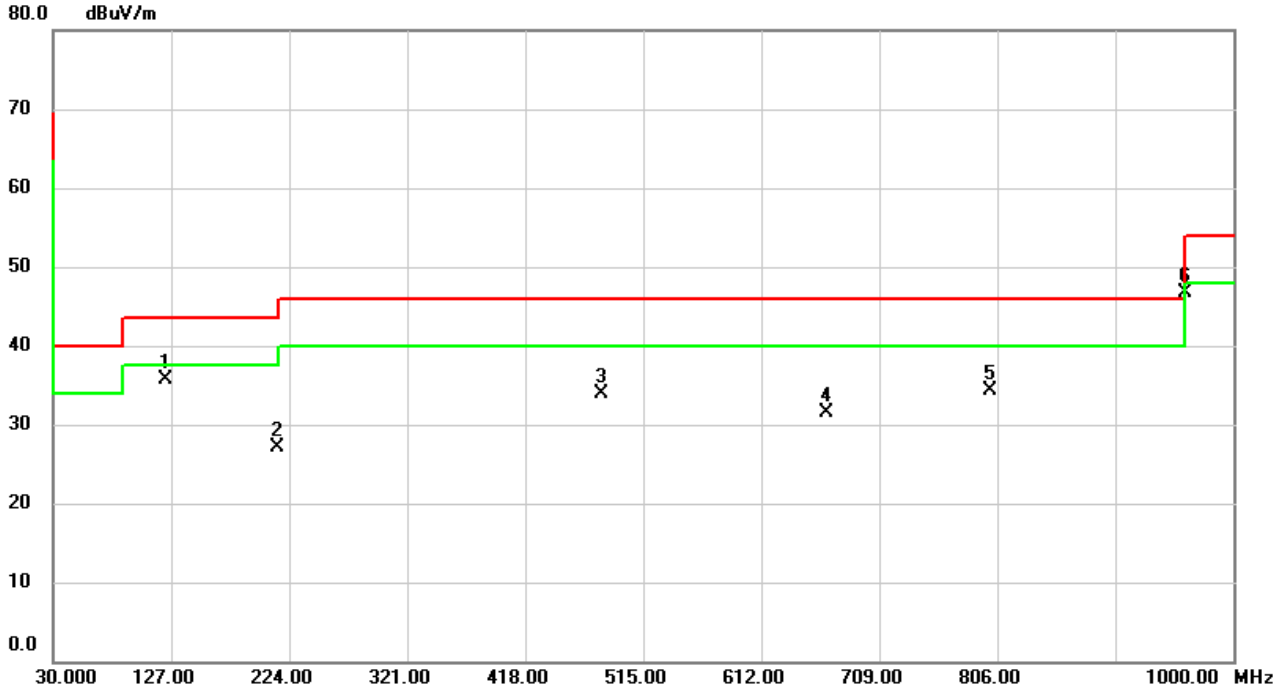

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		121.9883	45.88	-10.26	35.62	43.50	-7.88	peak	
2		214.3323	37.93	-10.82	27.11	43.50	-16.39	peak	
3		480.1123	37.11	-3.17	33.94	46.00	-12.06	peak	
4		665.7057	31.21	0.28	31.49	46.00	-14.51	peak	
5		800.0507	31.79	2.47	34.26	46.00	-11.74	peak	
6	*	960.0683	41.70	5.10	46.80	54.00	-7.20	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE4.0(1 Mbps)	Test Date	2021/6/23
Test Frequency	2480MHz	Polarization	Horizontal
Temp	23°C	Hum.	51%

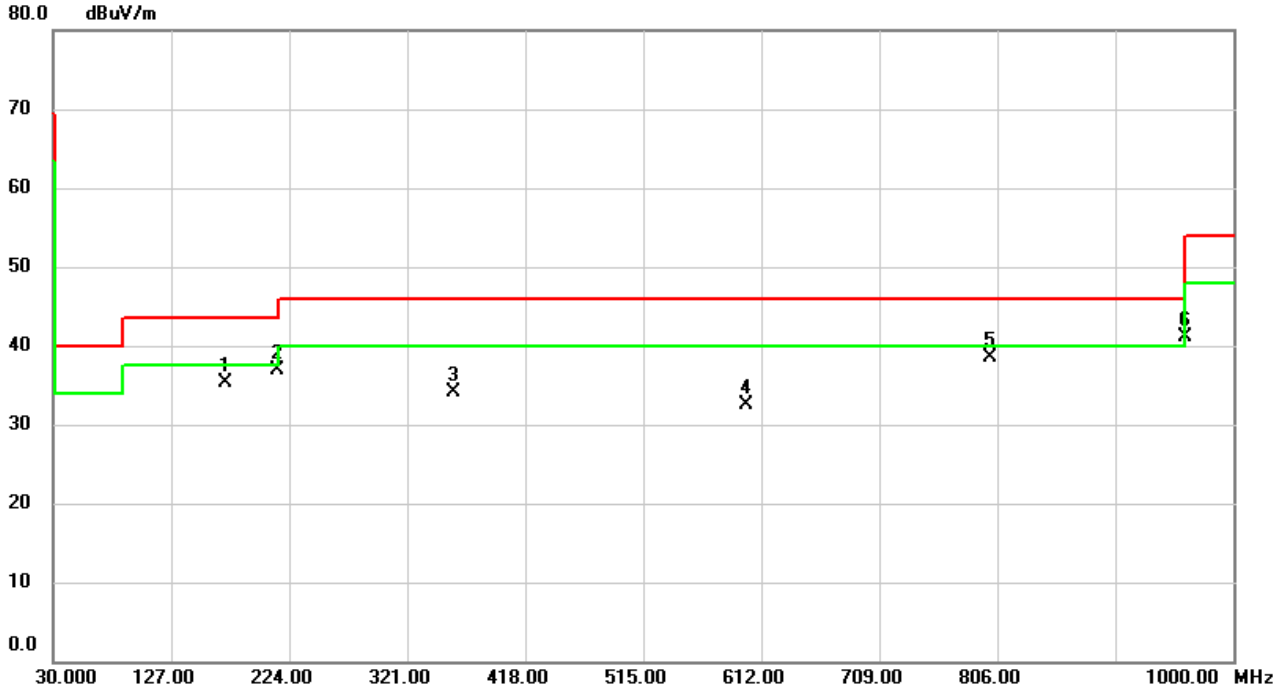

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		171.7170	44.14	-8.83	35.31	43.50	-8.19	peak	
2	*	214.3647	47.72	-10.82	36.90	43.50	-6.60	peak	
3		359.5090	39.99	-5.94	34.05	46.00	-11.95	peak	
4		600.0367	33.11	-0.57	32.54	46.00	-13.46	peak	
5		799.9860	36.04	2.47	38.51	46.00	-7.49	peak	
6		960.0683	36.07	5.10	41.17	54.00	-12.83	peak	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	BLE4.0(1 Mbps)	Test Date	2021/6/24
Test Frequency	2402MHz	Polarization	Vertical
Temp	23°C	Hum.	51%

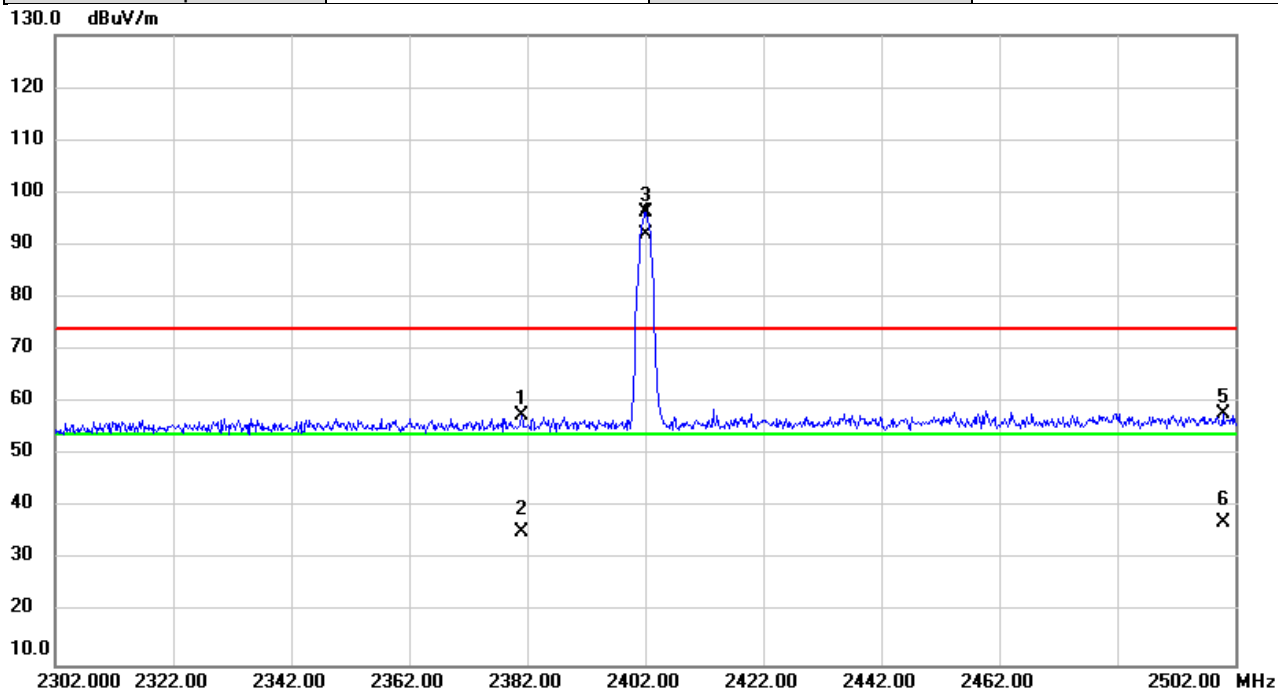

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2381.127	26.39	31.18	57.57	74.00	-16.43	peak	
2		2381.127	4.03	31.18	35.21	54.00	-18.79	AVG	
3	X	2402.000	64.94	31.26	96.20	74.00	22.20	peak	NoLimit
4	*	2402.000	60.85	31.26	92.11	54.00	38.11	AVG	NoLimit
5		2499.907	26.30	31.57	57.87	74.00	-16.13	peak	
6		2499.907	5.65	31.57	37.22	54.00	-16.78	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE4.0(1 Mbps)	Test Date	2021/6/24
Test Frequency	2480MHz	Polarization	Vertical
Temp	23°C	Hum.	51%

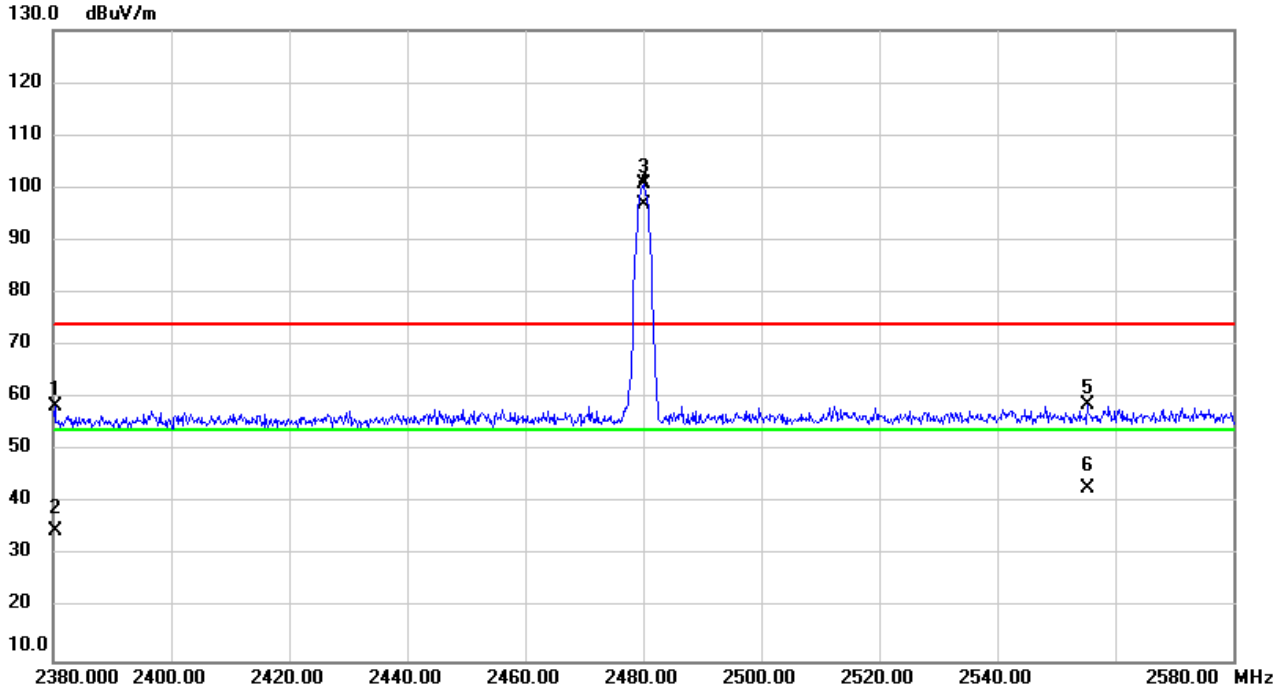

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2380.353	27.27	31.18	58.45	74.00	-15.55	peak	
2		2380.353	3.58	31.18	34.76	54.00	-19.24	AVG	
3	X	2480.000	69.23	31.51	100.74	74.00	26.74	peak	NoLimit
4	*	2480.000	65.28	31.51	96.79	54.00	42.79	AVG	NoLimit
5		2555.307	27.09	31.73	58.82	74.00	-15.18	peak	
6		2555.307	11.02	31.73	42.75	54.00	-11.25	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE4.0(1 Mbps)	Test Date	2021/6/24
Test Frequency	2402MHz	Polarization	Vertical
Temp	23°C	Hum.	51%

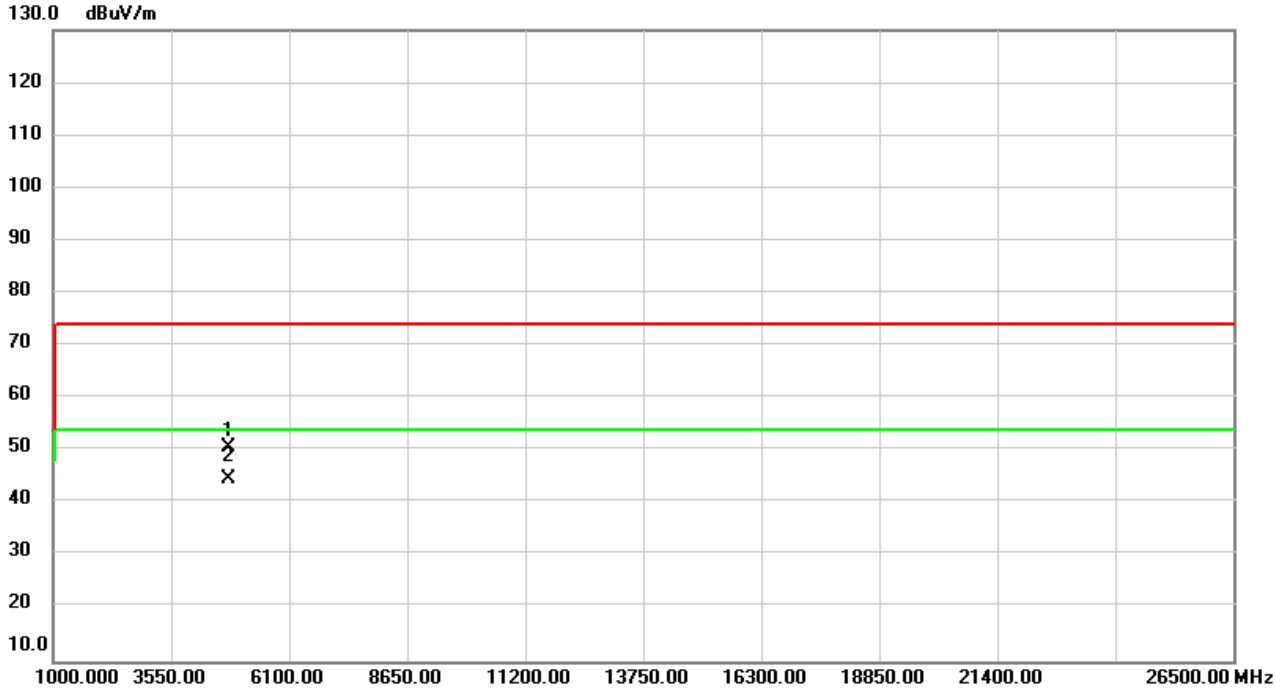

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	60.44	-9.84	50.60	74.00	-23.40	peak	
2	*	4804.000	54.63	-9.84	44.79	54.00	-9.21	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE4.0(1 Mbps)	Test Date	2021/6/24
Test Frequency	2402MHz	Polarization	Horizontal
Temp	23°C	Hum.	51%

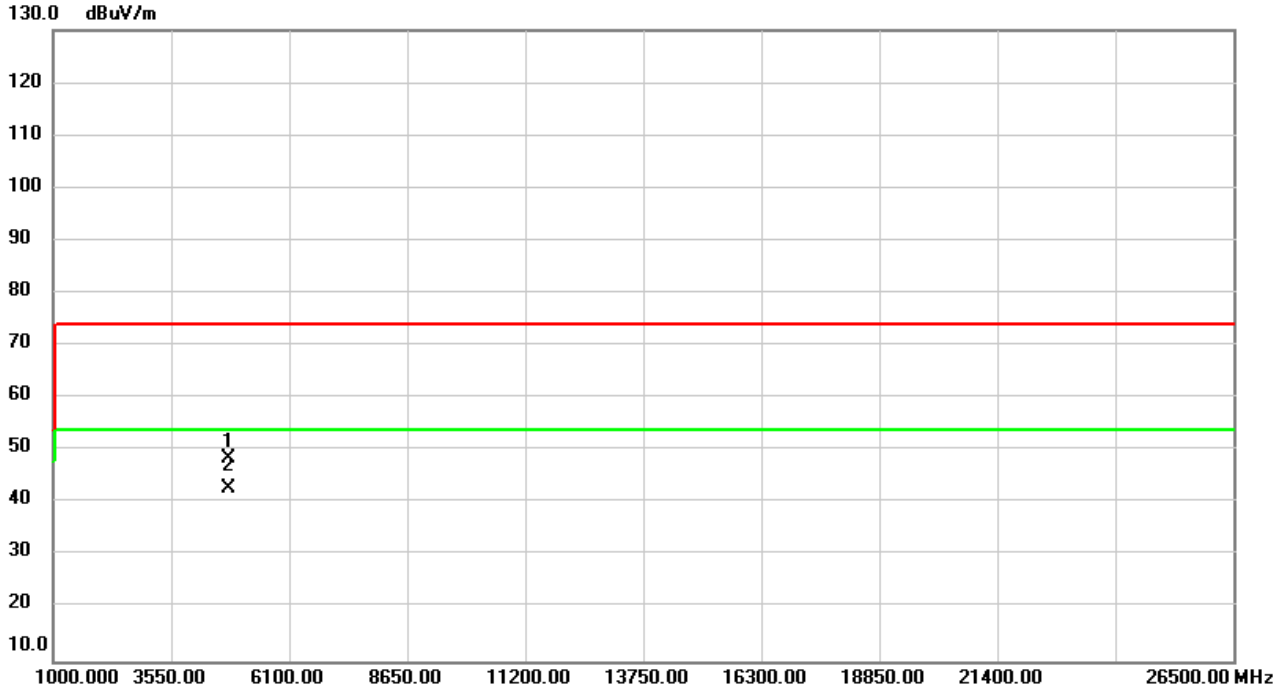

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	58.42	-9.84	48.58	74.00	-25.42	peak	
2	*	4804.000	52.59	-9.84	42.75	54.00	-11.25	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE4.0(1 Mbps)	Test Date	2021/6/24
Test Frequency	2440MHz	Polarization	Vertical
Temp	23°C	Hum.	51%

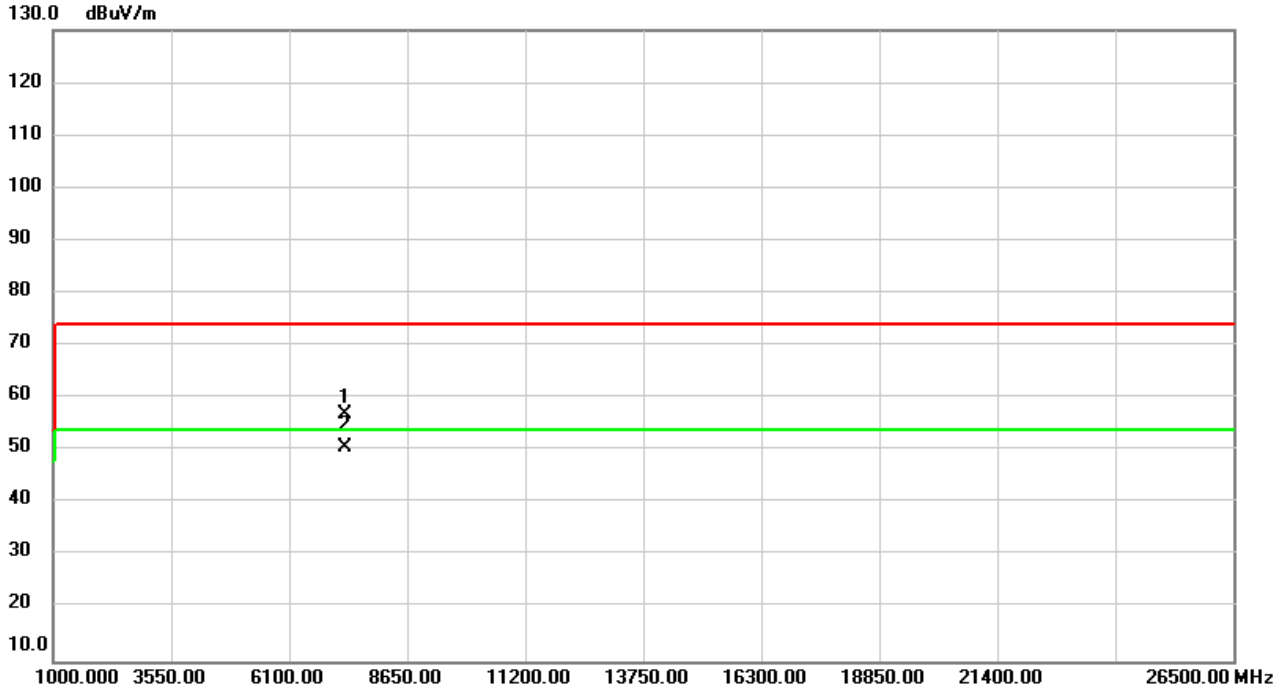

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7320.000	59.58	-2.76	56.82	74.00	-17.18	peak	
2	*	7320.000	53.48	-2.76	50.72	54.00	-3.28	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE4.0(1 Mbps)	Test Date	2021/6/24
Test Frequency	2440MHz	Polarization	Horizontal
Temp	23°C	Hum.	51%

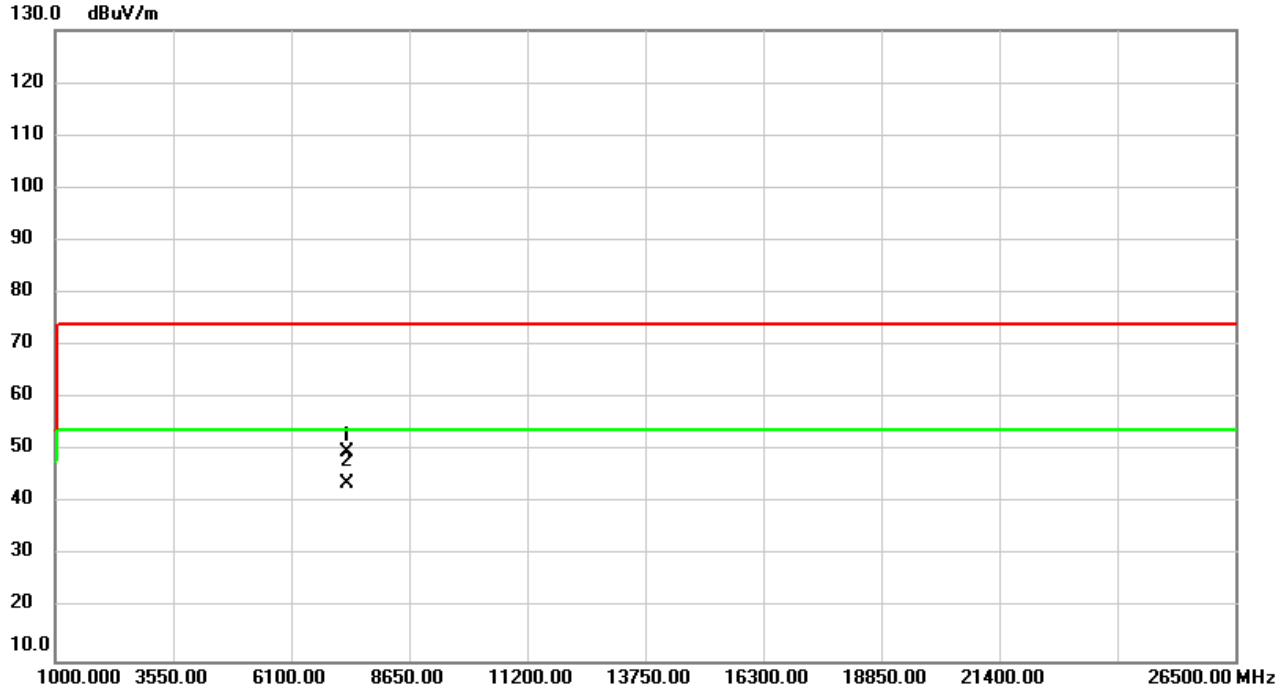

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7320.000	52.47	-2.76	49.71	74.00	-24.29	peak	
2	*	7320.000	46.65	-2.76	43.89	54.00	-10.11	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE4.0(1 Mbps)	Test Date	2021/6/24
Test Frequency	2480MHz	Polarization	Vertical
Temp	23°C	Hum.	51%

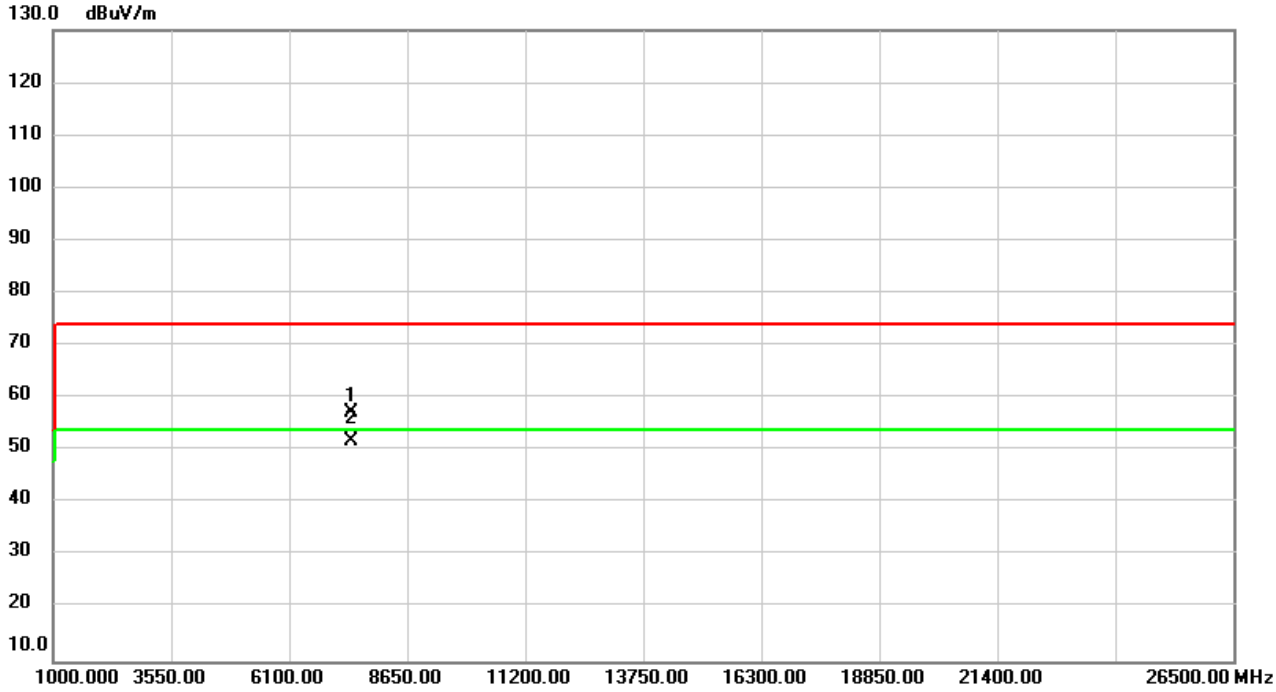

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7440.000	59.35	-2.19	57.16	74.00	-16.84	peak	
2	*	7440.000	54.13	-2.19	51.94	54.00	-2.06	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	BLE4.0(1 Mbps)	Test Date	2021/6/24
Test Frequency	2480MHz	Polarization	Horizontal
Temp	23°C	Hum.	51%

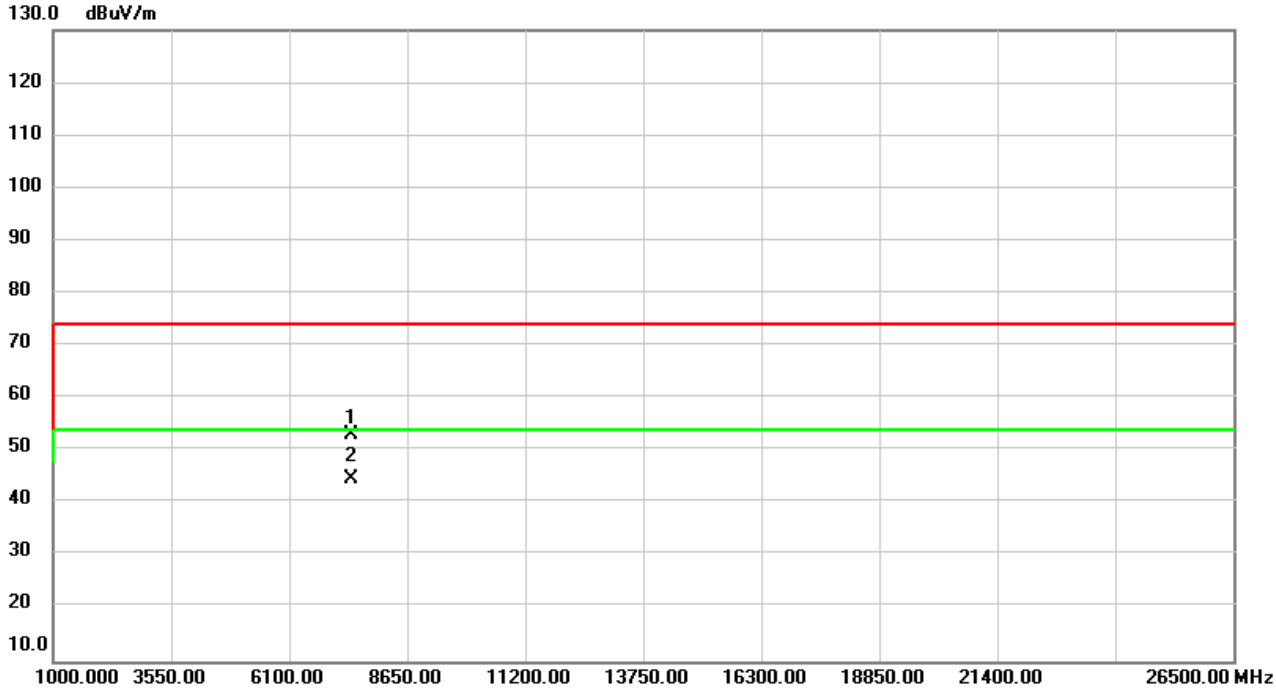

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		7440.000	55.18	-2.19	52.99	74.00	-21.01	peak	
2	*	7440.000	46.81	-2.19	44.62	54.00	-9.38	AVG	

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D BANDWIDTH

Test Mode:	1Mbps

Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2402	0.70	1.08	500	Pass
2440	0.70	1.08	500	Pass
2480	0.70	1.08	500	Pass

6dB Bandwidth

2402 MHz	2440 MHz	2480 MHz
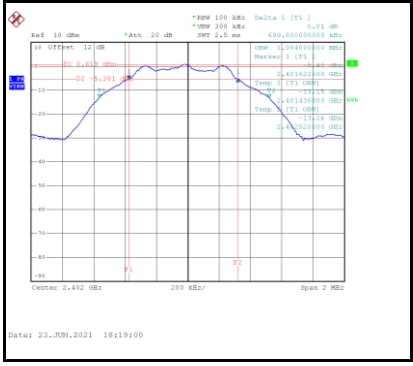	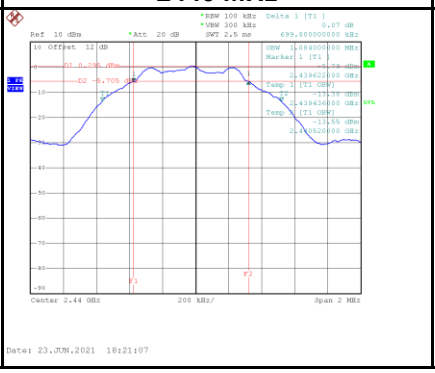	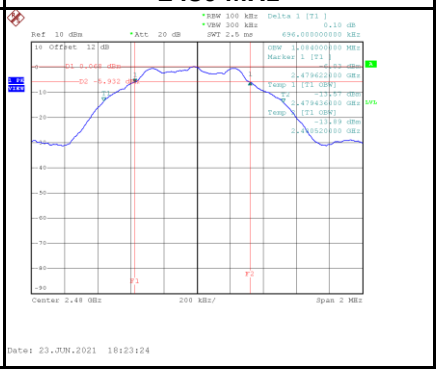

APPENDIX E OUTPUT POWER

Test Mode :	1Mbps	Tested Date	2021/6/23

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	-2.31	0.0006	29.69	0.9311	Pass
2440	-0.05	0.0010	29.69	0.9311	Pass
2480	-0.42	0.0009	29.69	0.9311	Pass

APPENDIX F POWER SPECTRAL DENSITY TEST

Test Mode :	1Mbps

Frequency (MHz)	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Test Result
2402	-14.57	7.69	Pass
2440	-14.92	7.69	Pass
2480	-15.10	7.69	Pass

2402 MHz	2440 MHz	2480 MHz
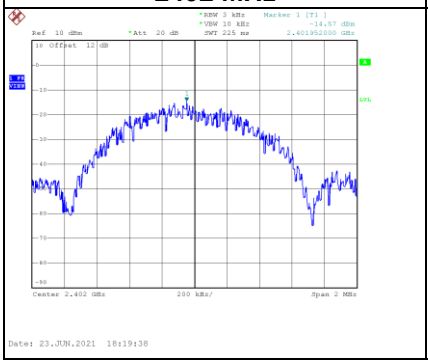	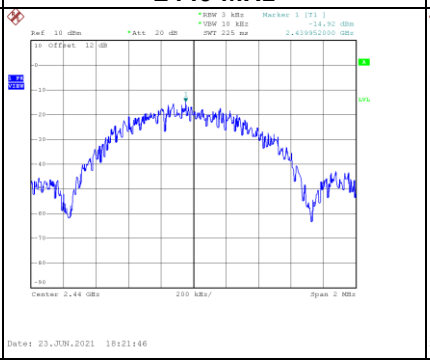	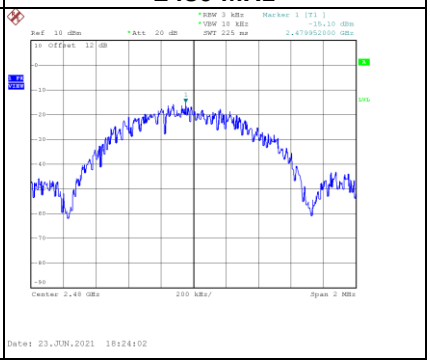

APPENDIX G ANTENNA CONDUCTED SPURIOUS EMISSION

Test Mode :	1Mbps

Low Bandedge-2402 MHz	High Bandedge-2480 MHz
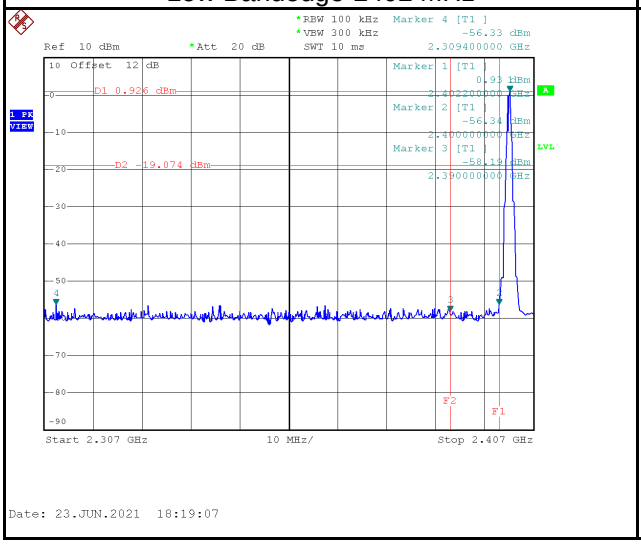	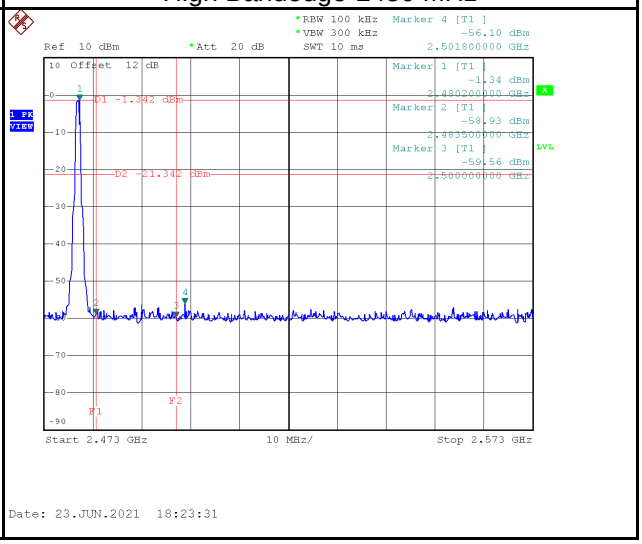

2402 MHz – 10th Harmonics

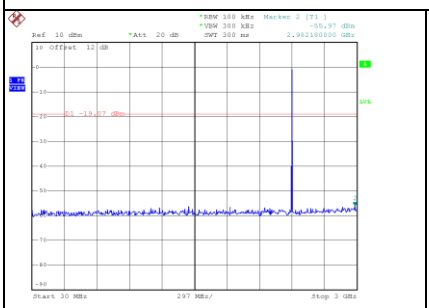

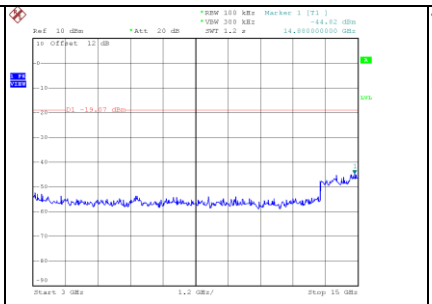

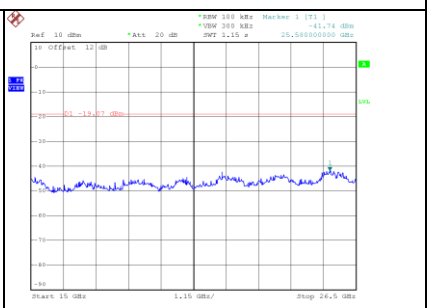

2440 MHz – 10th Harmonics

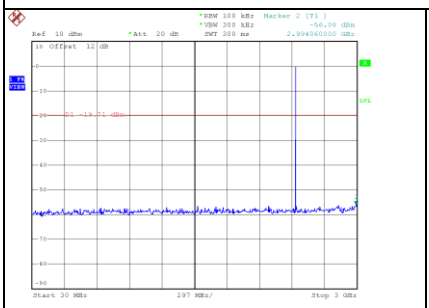

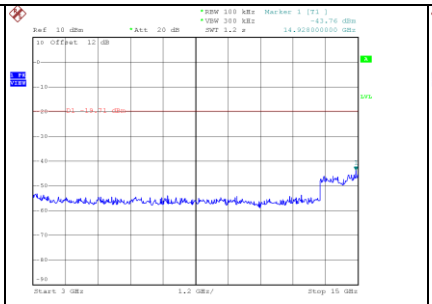

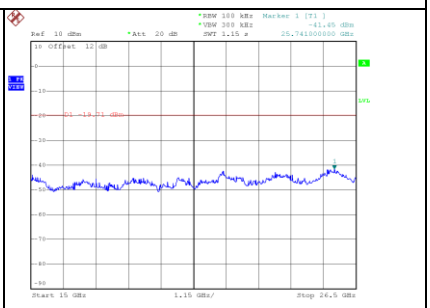

2480 MHz – 10th Harmonics

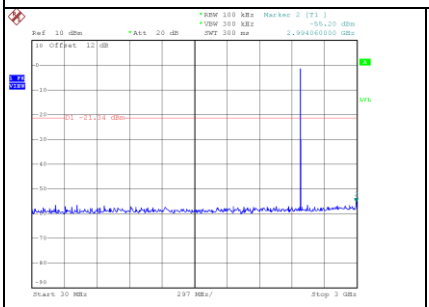

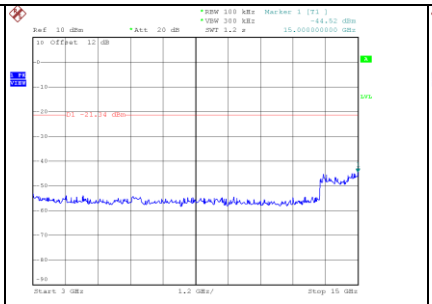

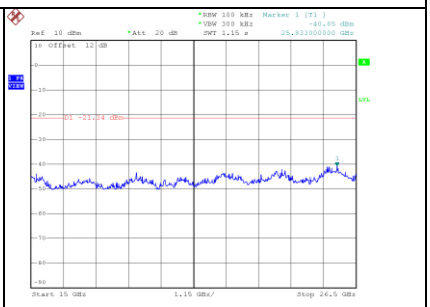

End of Test Report