



Appendix C

RF Test Data for 5.8GWIFI (Conducted Measurement)

Product Name: ISOD Cutting Machine

Test Model: X6

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Mening Su
Supervised by:	Ling Zhu



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



C.1 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	15.655	≥ 0.5	Pass
NVNT	a	5785	Ant1	14.414	≥ 0.5	Pass
NVNT	a	5825	Ant1	12.559	≥ 0.5	Pass
NVNT	n20	5745	Ant1	12.965	≥ 0.5	Pass
NVNT	n20	5785	Ant1	15.11	≥ 0.5	Pass
NVNT	n20	5825	Ant1	15.121	≥ 0.5	Pass
NVNT	n40	5755	Ant1	33.739	≥ 0.5	Pass
NVNT	n40	5795	Ant1	35.098	≥ 0.5	Pass






Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant1

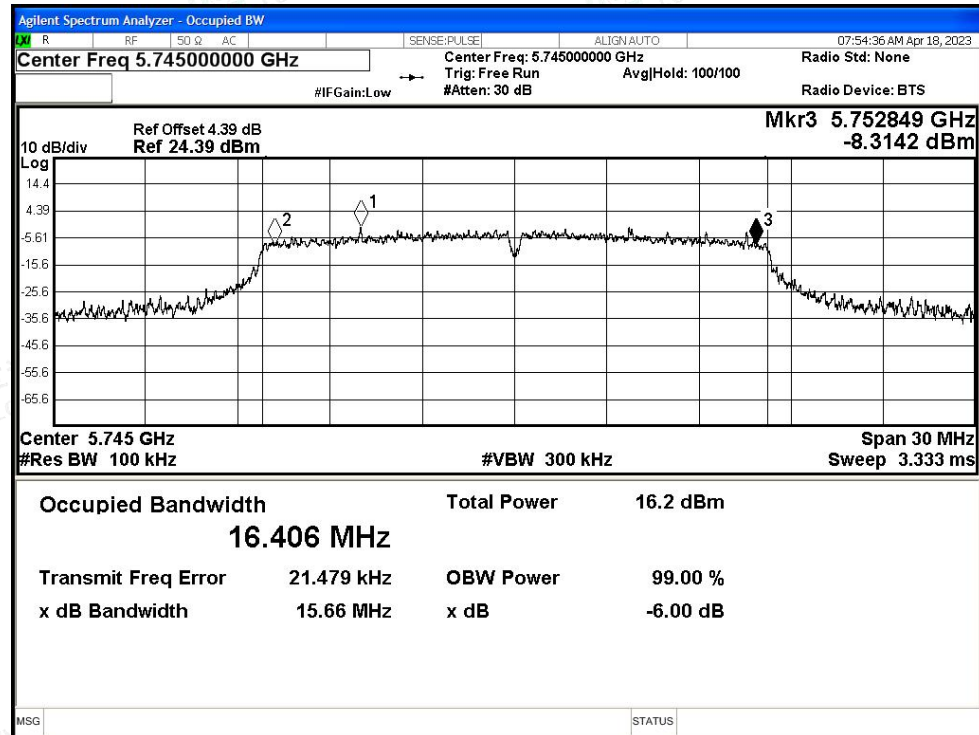


-6dB Bandwidth NVNT a 5785MHz Ant1

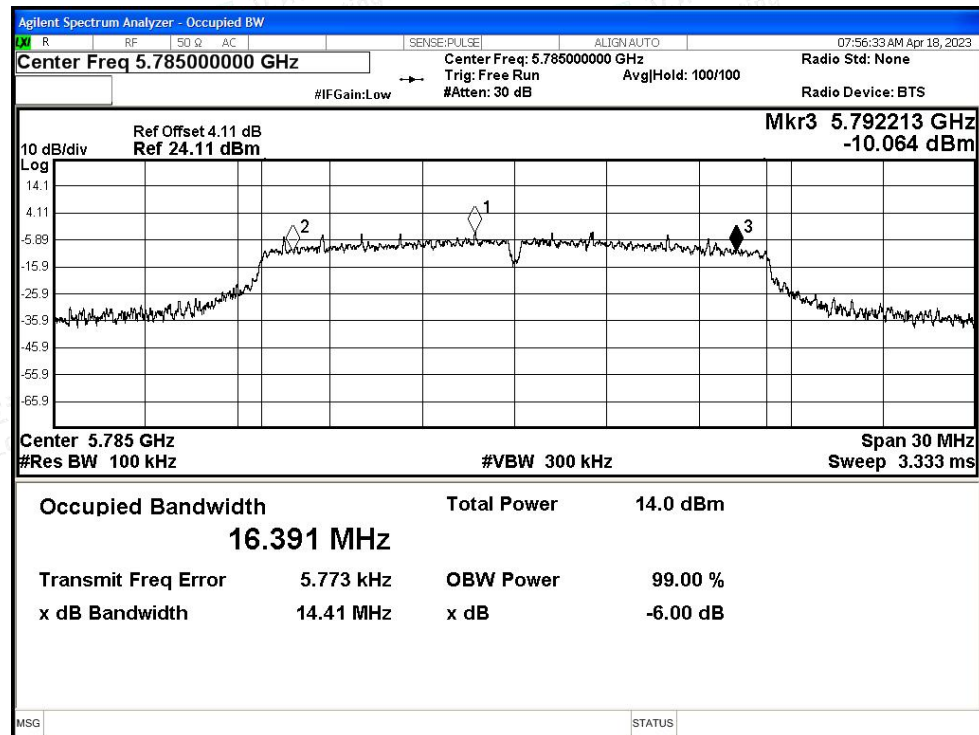




-6dB Bandwidth NVNT a 5825MHz Ant1

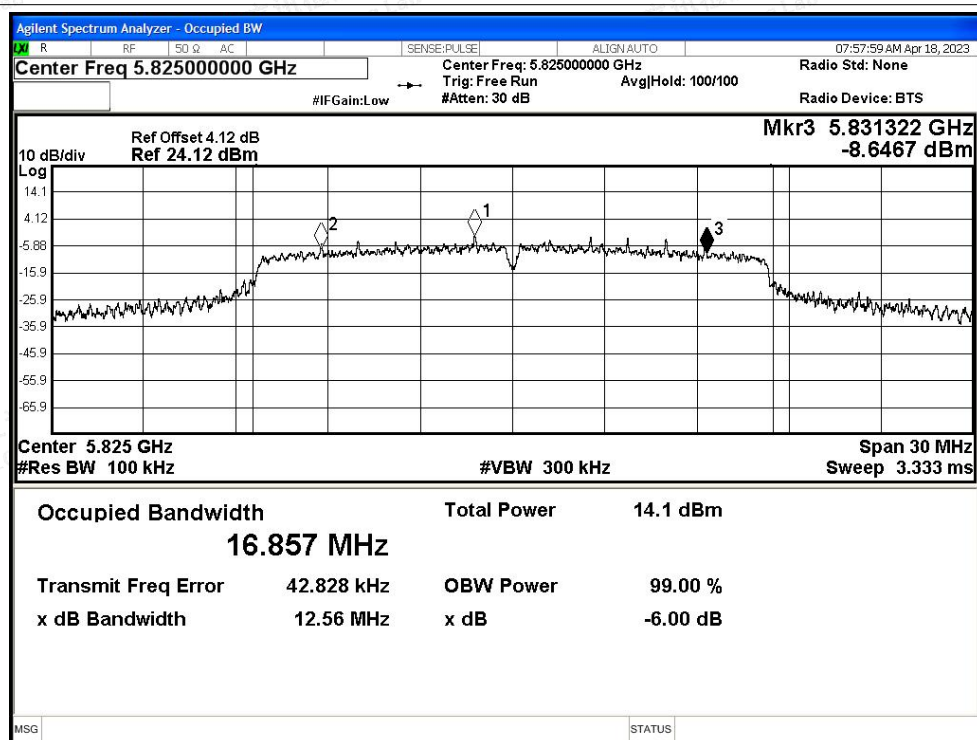


-6dB Bandwidth NVNT n20 5745MHz Ant1

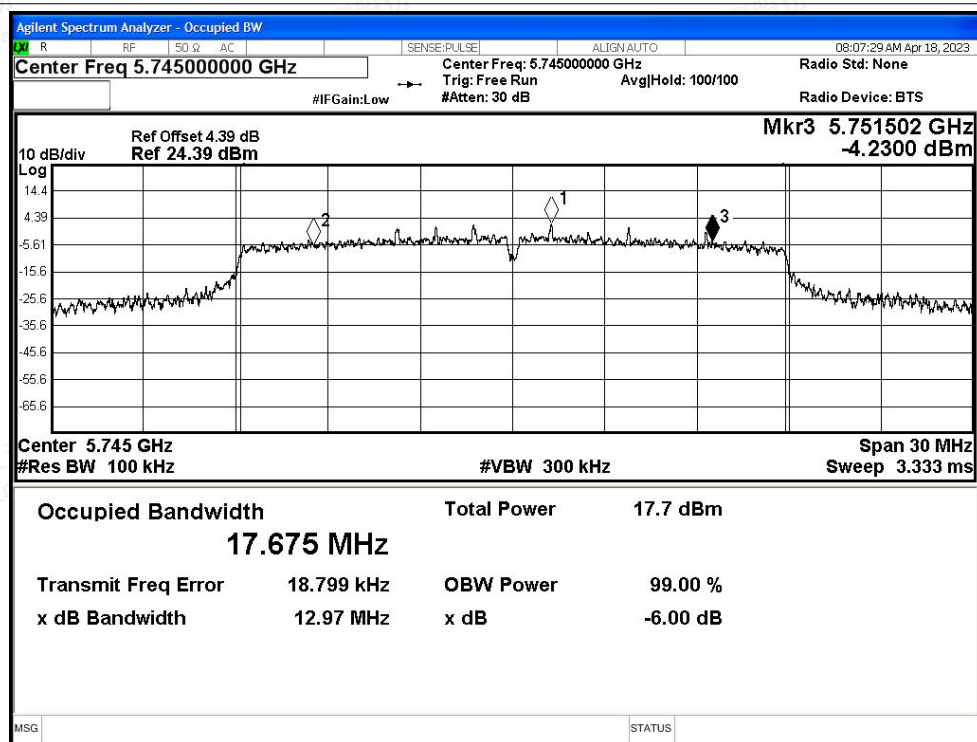




-6dB Bandwidth NVNT n20 5785MHz Ant1

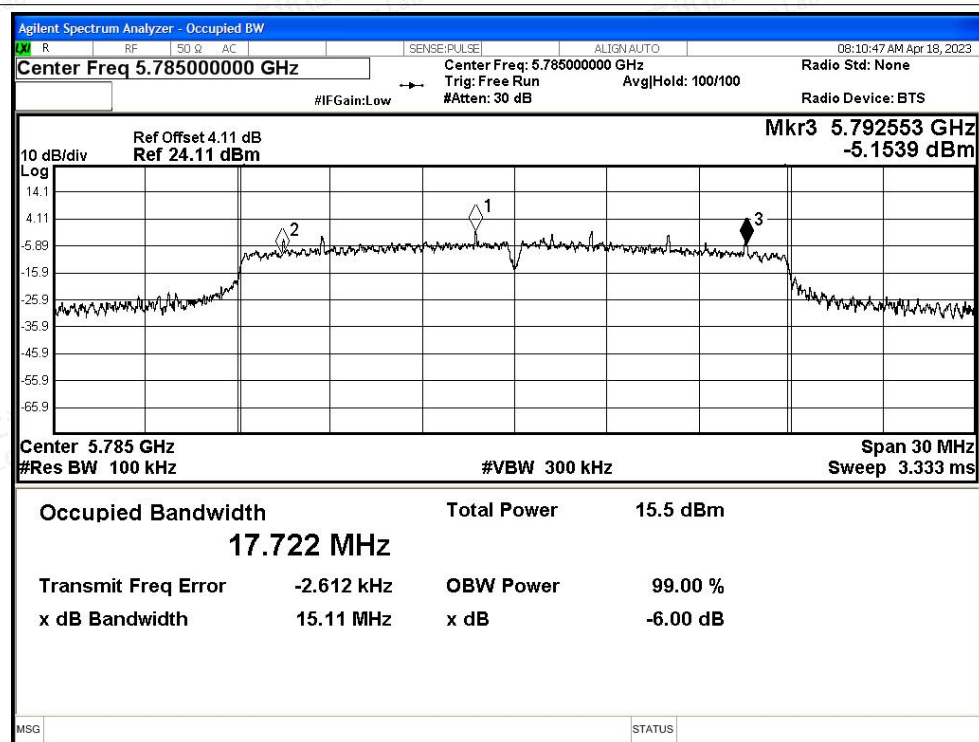


-6dB Bandwidth NVNT n20 5825MHz Ant1

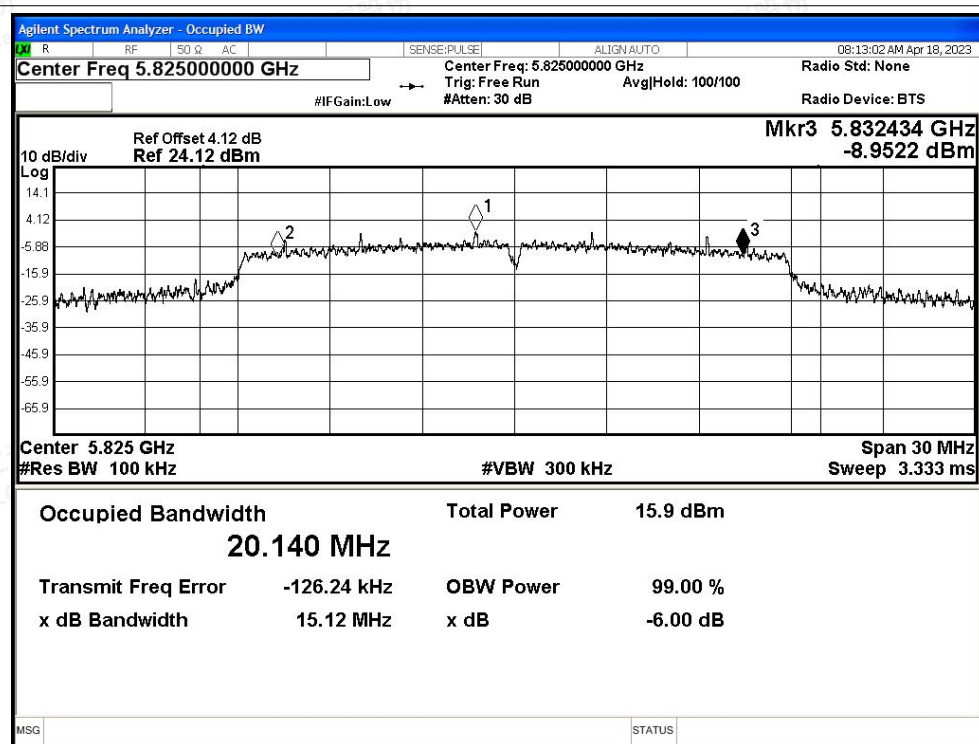




-6dB Bandwidth NVNT n40 5755MHz Ant1

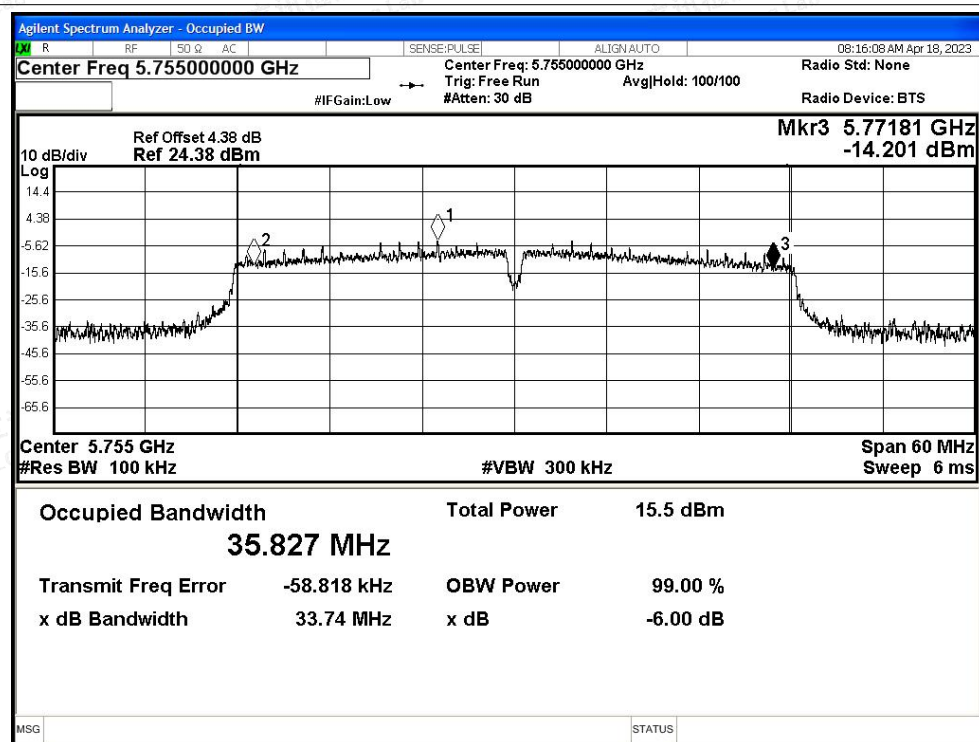

-6dB Bandwidth NVNT n40 5795MHz Ant1

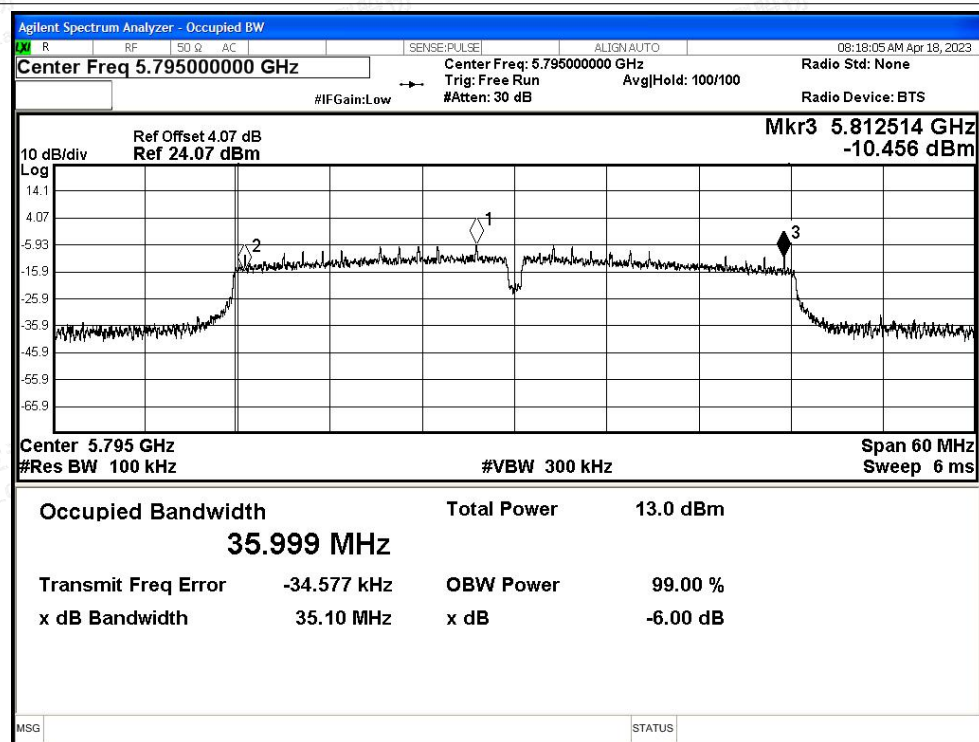



C.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	10.43	0.13	10.56	30	Pass
NVNT	a	5785	Ant1	10.27	0.13	10.40	30	Pass
NVNT	a	5825	Ant1	9.76	0.13	9.89	30	Pass
NVNT	n20	5745	Ant1	11.7	0.15	11.85	30	Pass
NVNT	n20	5785	Ant1	9.39	0.15	9.54	30	Pass
NVNT	n20	5825	Ant1	10.41	0.15	10.56	30	Pass
NVNT	n40	5755	Ant1	9.07	0.28	9.35	30	Pass
NVNT	n40	5795	Ant1	8.99	0.29	9.28	30	Pass





C.3 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-2.27	0.13	-2.14	30	Pass
NVNT	a	5785	Ant1	-4.37	0.13	-4.24	30	Pass
NVNT	a	5825	Ant1	-4.26	0.13	-4.13	30	Pass
NVNT	n20	5745	Ant1	-0.88	0.15	-0.73	30	Pass
NVNT	n20	5785	Ant1	-3.36	0.15	-3.21	30	Pass
NVNT	n20	5825	Ant1	-3.22	0.15	-3.07	30	Pass
NVNT	n40	5755	Ant1	-6.37	0.28	-6.09	30	Pass
NVNT	n40	5795	Ant1	-6.47	0.29	-6.18	30	Pass






Test Graphs

PSD NVNT a 5745MHz Ant1

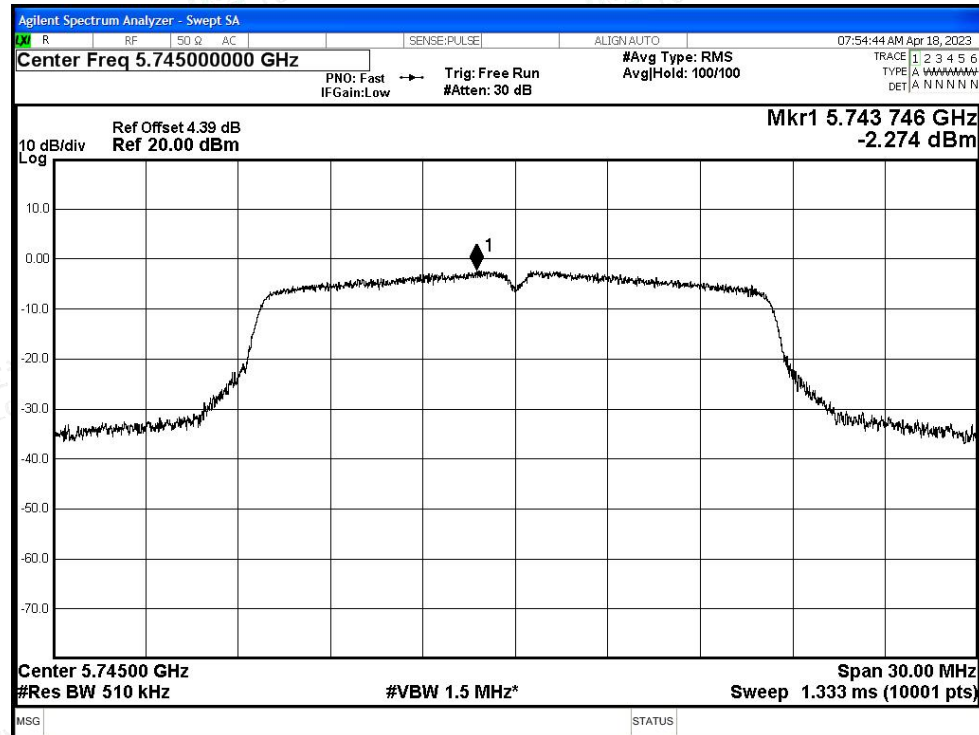


PSD NVNT a 5785MHz Ant1

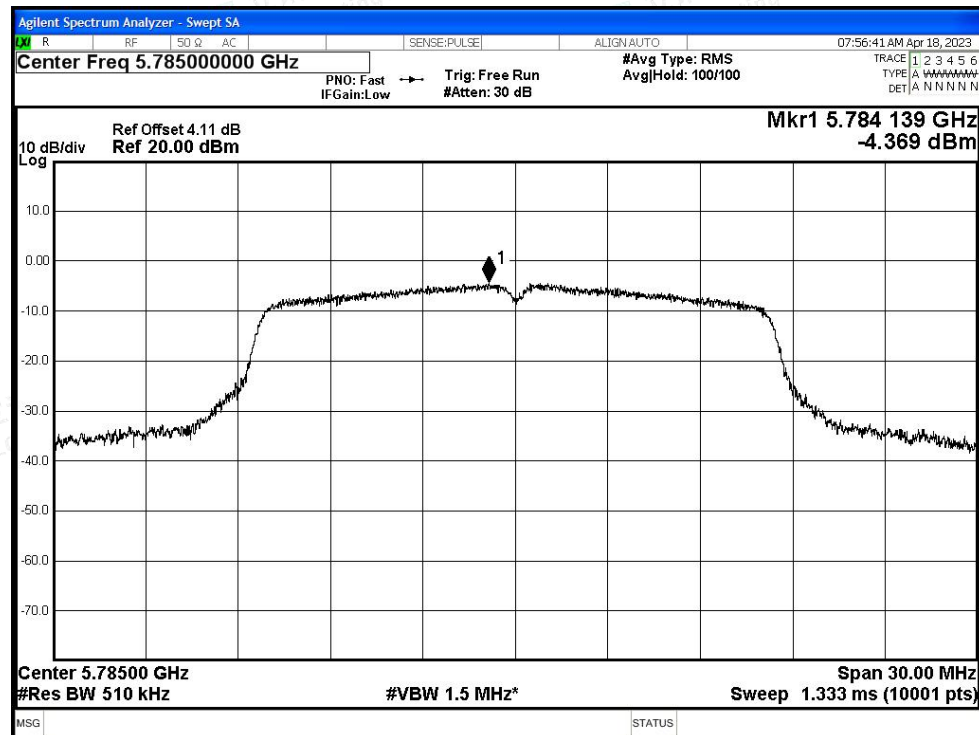








PSD NVNT a 5825MHz Ant1

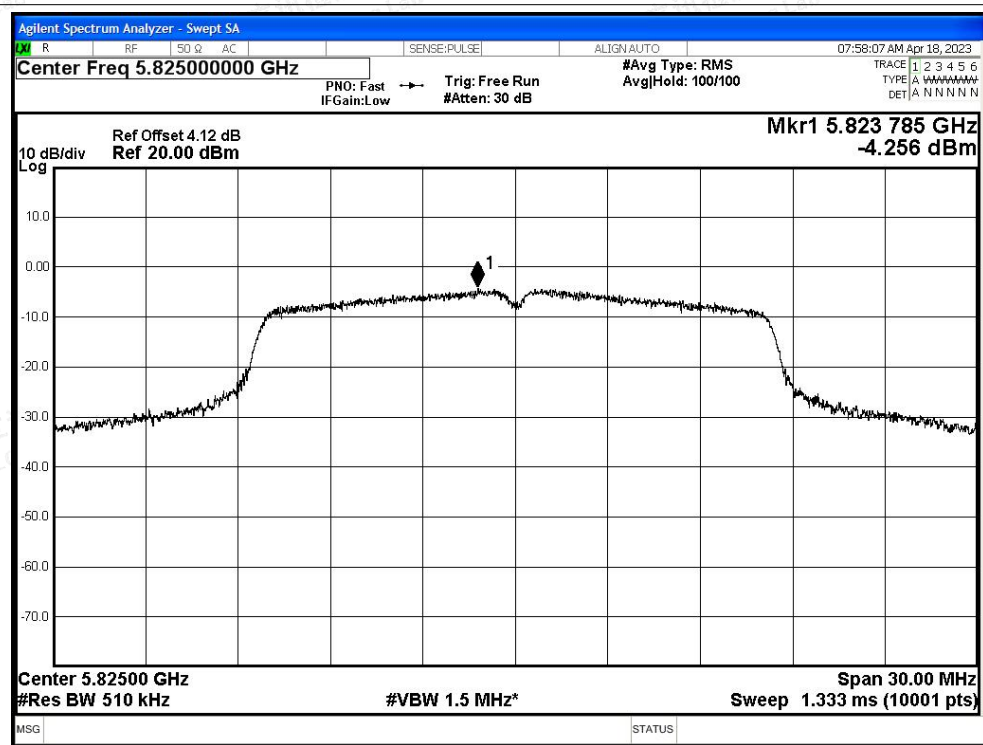

PSD NVNT n20 5745MHz Ant1

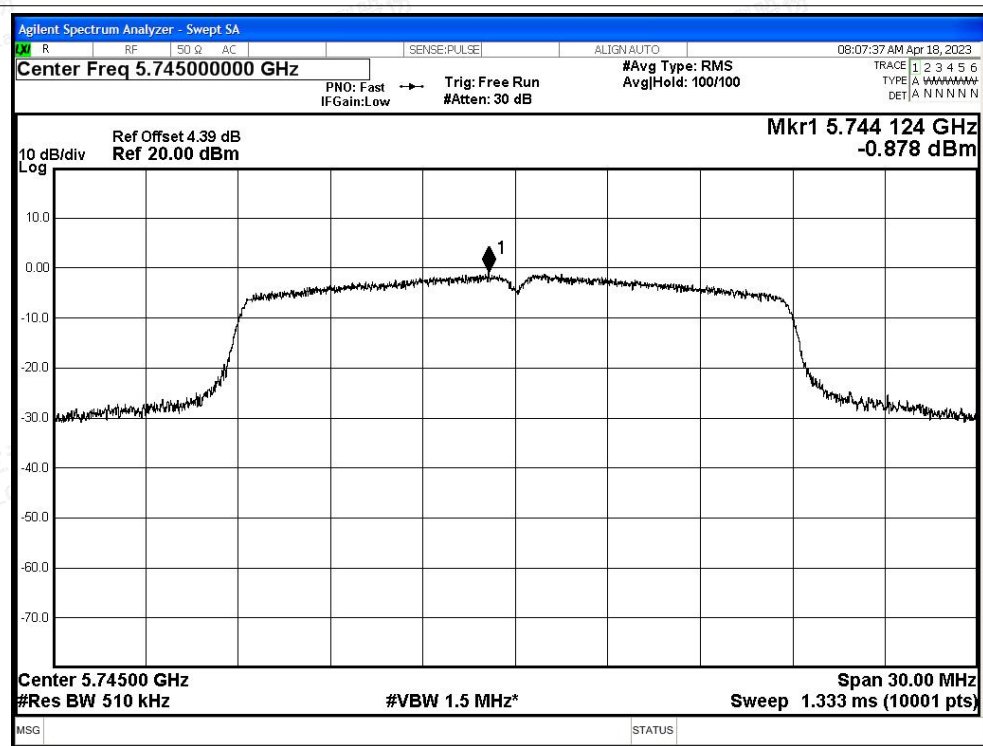

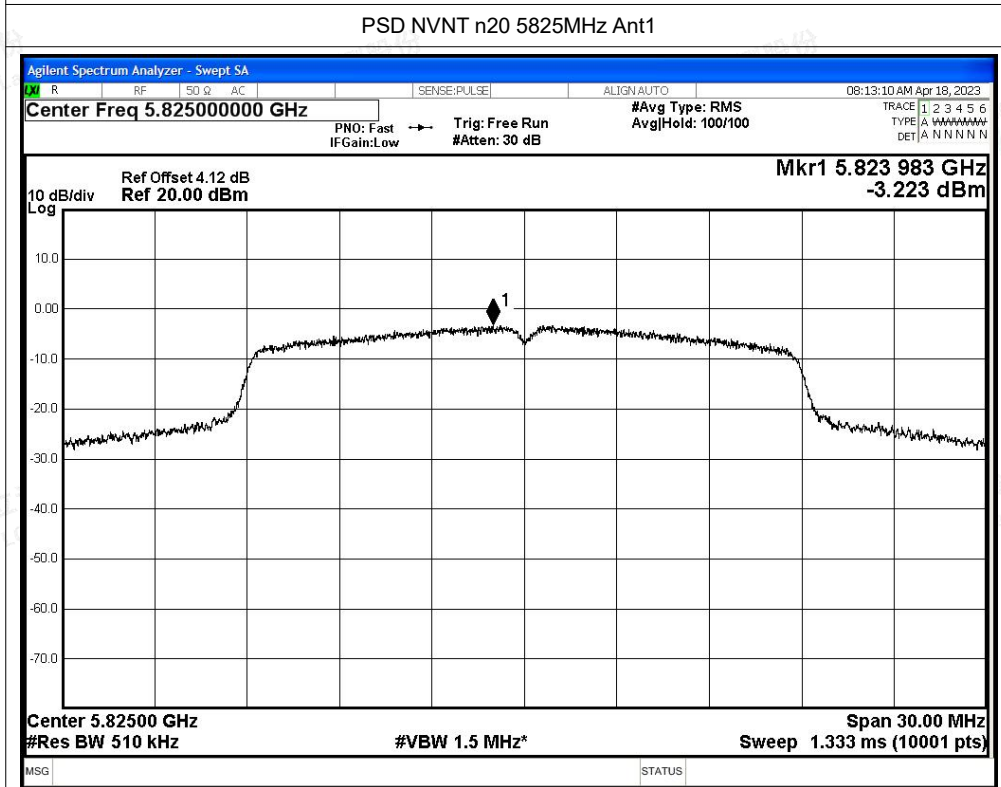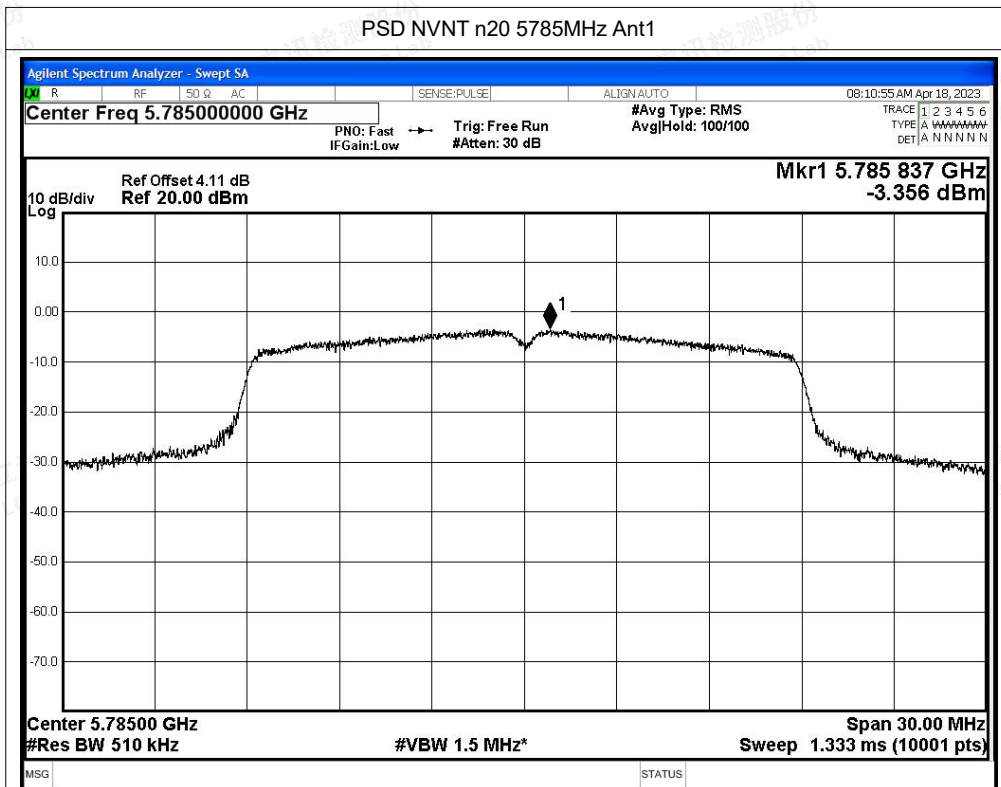

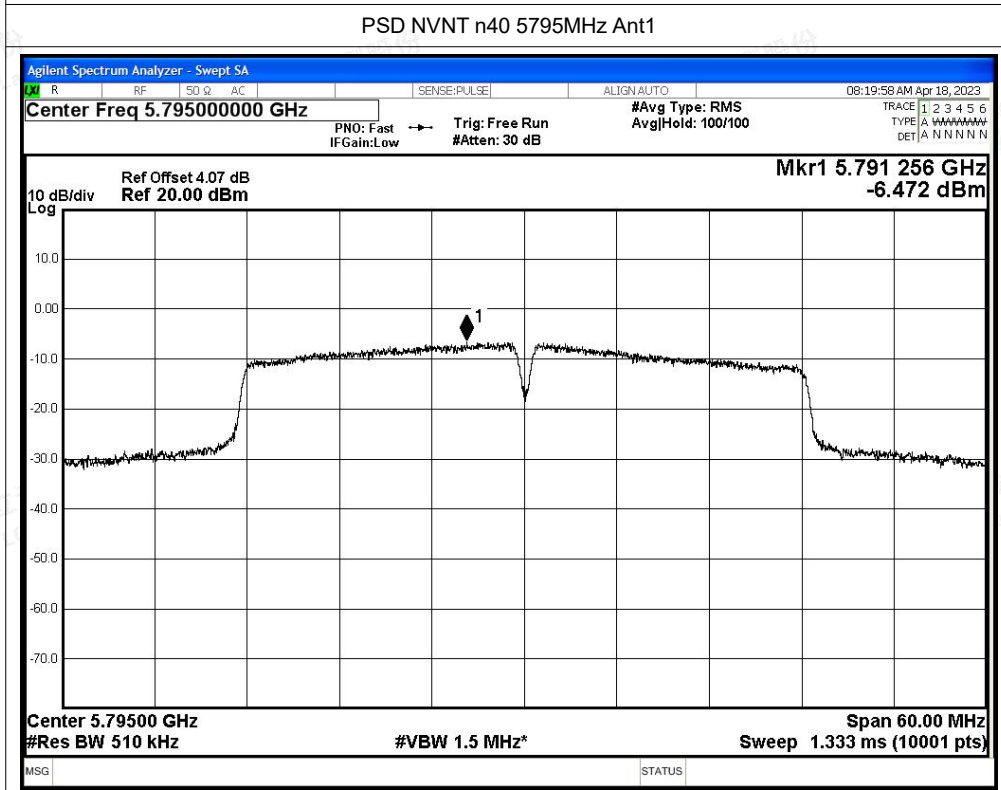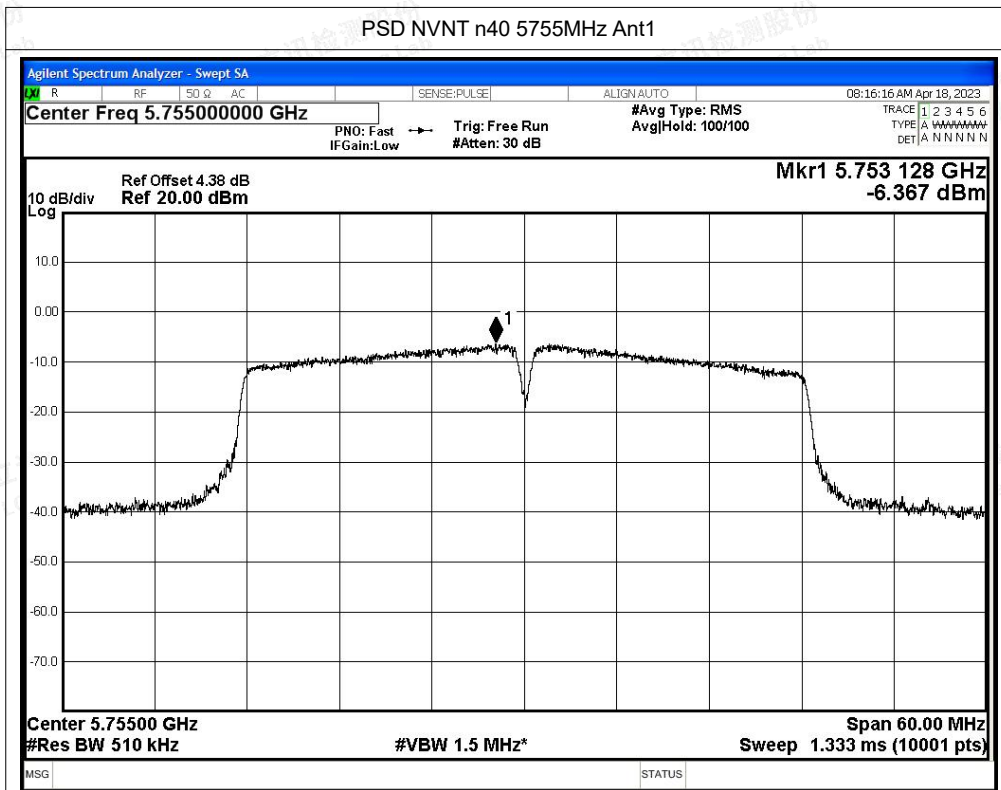



C.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	EIRP Power (dBm)	Detector	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	5650	-48.03	2.97	-45.06	Peak	-27	Pass
NVNT	a	5745	Ant1	5650	-54.58	2.97	-51.61	Average	-27	Pass
NVNT	a	5745	Ant1	5700	-40.07	2.97	-37.1	Peak	10	Pass
NVNT	a	5745	Ant1	5700	-49.76	2.97	-46.79	Average	10	Pass
NVNT	a	5745	Ant1	5720	-28.02	2.97	-25.05	Peak	15.6	Pass
NVNT	a	5745	Ant1	5720	-39.44	2.97	-36.47	Average	15.6	Pass
NVNT	a	5745	Ant1	5725	-28.01	2.97	-25.04	Peak	27	Pass
NVNT	a	5745	Ant1	5725	-35.05	2.97	-32.08	Average	27	Pass
NVNT	a	5825	Ant1	5850	-30.4	2.97	-27.43	Peak	27	Pass
NVNT	a	5825	Ant1	5850	-40.74	2.97	-37.77	Average	27	Pass
NVNT	a	5825	Ant1	5855	-34.61	2.97	-31.64	Peak	15.6	Pass
NVNT	a	5825	Ant1	5855	-44.85	2.97	-41.88	Average	15.6	Pass
NVNT	a	5825	Ant1	5875	-45.35	2.97	-42.38	Peak	10	Pass
NVNT	a	5825	Ant1	5875	-53.29	2.97	-50.32	Average	10	Pass
NVNT	a	5825	Ant1	5925	-48.9	2.97	-45.93	Peak	-27	Pass
NVNT	a	5825	Ant1	5925	-55.1	2.97	-52.13	Average	-27	Pass
NVNT	n20	5745	Ant1	5650	-47.06	2.97	-44.09	Peak	-27	Pass
NVNT	n20	5745	Ant1	5650	-54.34	2.97	-51.37	Average	-27	Pass
NVNT	n20	5745	Ant1	5700	-39.23	2.97	-36.26	Peak	10	Pass
NVNT	n20	5745	Ant1	5700	-47	2.97	-44.03	Average	10	Pass
NVNT	n20	5745	Ant1	5720	-28.53	2.97	-25.56	Peak	15.6	Pass
NVNT	n20	5745	Ant1	5720	-36.42	2.97	-33.45	Average	15.6	Pass
NVNT	n20	5745	Ant1	5725	-20.32	2.97	-17.35	Peak	27	Pass
NVNT	n20	5745	Ant1	5725	-30.67	2.97	-27.7	Average	27	Pass
NVNT	n20	5825	Ant1	5850	-26.03	2.97	-23.06	Peak	27	Pass
NVNT	n20	5825	Ant1	5850	-34.15	2.97	-31.18	Average	27	Pass
NVNT	n20	5825	Ant1	5855	-28.74	2.97	-25.77	Peak	15.6	Pass
NVNT	n20	5825	Ant1	5855	-38.31	2.97	-35.34	Average	15.6	Pass
NVNT	n20	5825	Ant1	5875	-42.92	2.97	-39.95	Peak	10	Pass
NVNT	n20	5825	Ant1	5875	-50	2.97	-47.03	Average	10	Pass
NVNT	n20	5825	Ant1	5925	-47.67	2.97	-44.7	Peak	-27	Pass
NVNT	n20	5825	Ant1	5925	-54.85	2.97	-51.88	Average	-27	Pass
NVNT	n40	5755	Ant1	5650	-43.4	2.97	-40.43	Peak	-27	Pass
NVNT	n40	5755	Ant1	5650	-53.18	2.97	-50.21	Average	-27	Pass
NVNT	n40	5755	Ant1	5700	-36.74	2.97	-33.77	Peak	10	Pass
NVNT	n40	5755	Ant1	5700	-44.02	2.97	-41.05	Average	10	Pass
NVNT	n40	5755	Ant1	5720	-28.49	2.97	-25.52	Peak	15.6	Pass






NVNT	n40	5755	Ant1	5720	-36.85	2.97	-33.88	Average	15.6	Pass
NVNT	n40	5755	Ant1	5725	-23.49	2.97	-20.52	Peak	27	Pass
NVNT	n40	5755	Ant1	5725	-35.28	2.97	-32.31	Average	27	Pass
NVNT	n40	5795	Ant1	5850	-42.46	2.97	-39.49	Peak	27	Pass
NVNT	n40	5795	Ant1	5850	-49.79	2.97	-46.82	Average	27	Pass
NVNT	n40	5795	Ant1	5855	-39.62	2.97	-36.65	Peak	15.6	Pass
NVNT	n40	5795	Ant1	5855	-50.61	2.97	-47.64	Average	15.6	Pass
NVNT	n40	5795	Ant1	5875	-46.98	2.97	-44.01	Peak	10	Pass
NVNT	n40	5795	Ant1	5875	-53.69	2.97	-50.72	Average	10	Pass
NVNT	n40	5795	Ant1	5925	-47.09	2.97	-44.12	Peak	-27	Pass
NVNT	n40	5795	Ant1	5925	-54.94	2.97	-51.97	Average	-27	Pass






Test Graphs

Restrict Band NVNT a 5745MHz Ant1 Peak

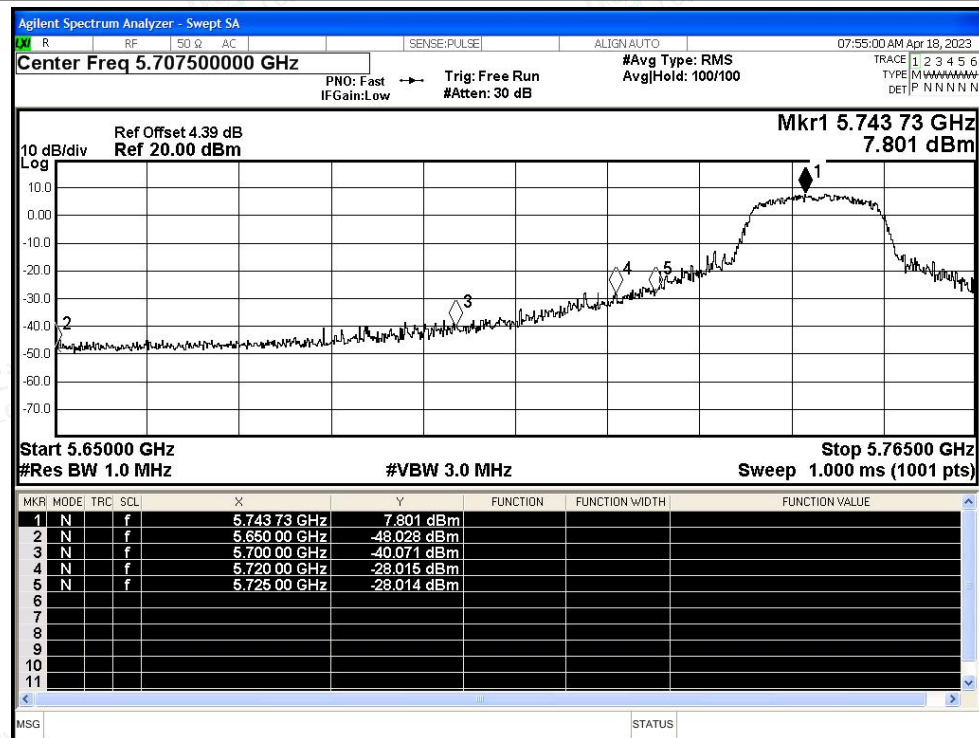


Restrict Band NVNT a 5745MHz Ant1 Average

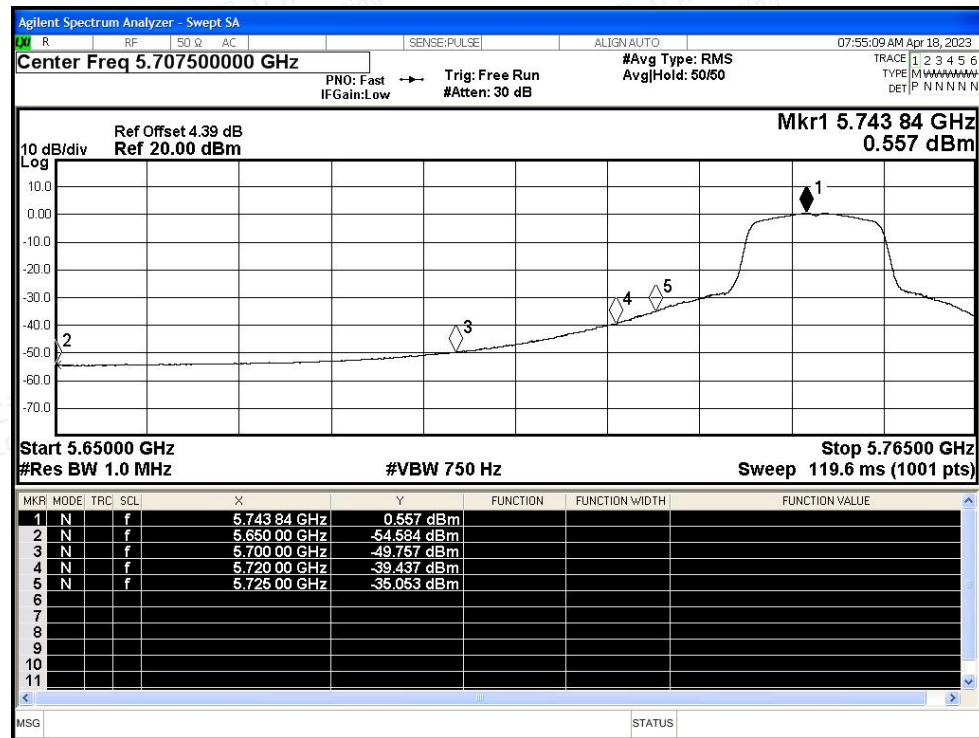




Restrict Band NVNT a 5825MHz Ant1 Peak

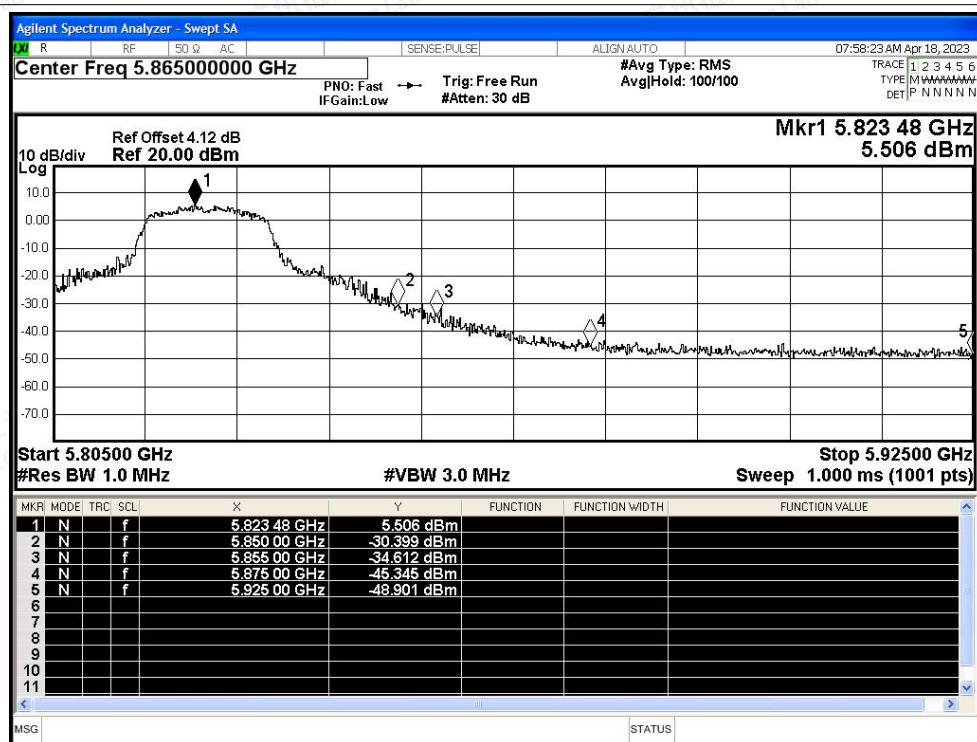

Restrict Band NVNT a 5825MHz Ant1 Average

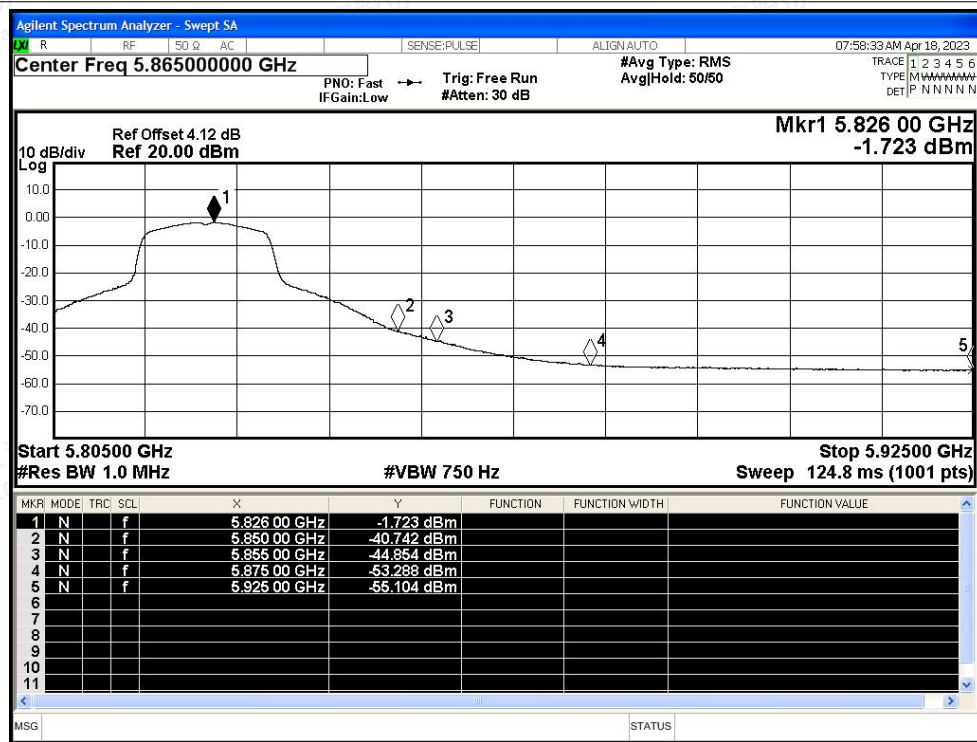




Restrict Band NVNT n20 5745MHz Ant1 Peak




Restrict Band NVNT n20 5745MHz Ant1 Average

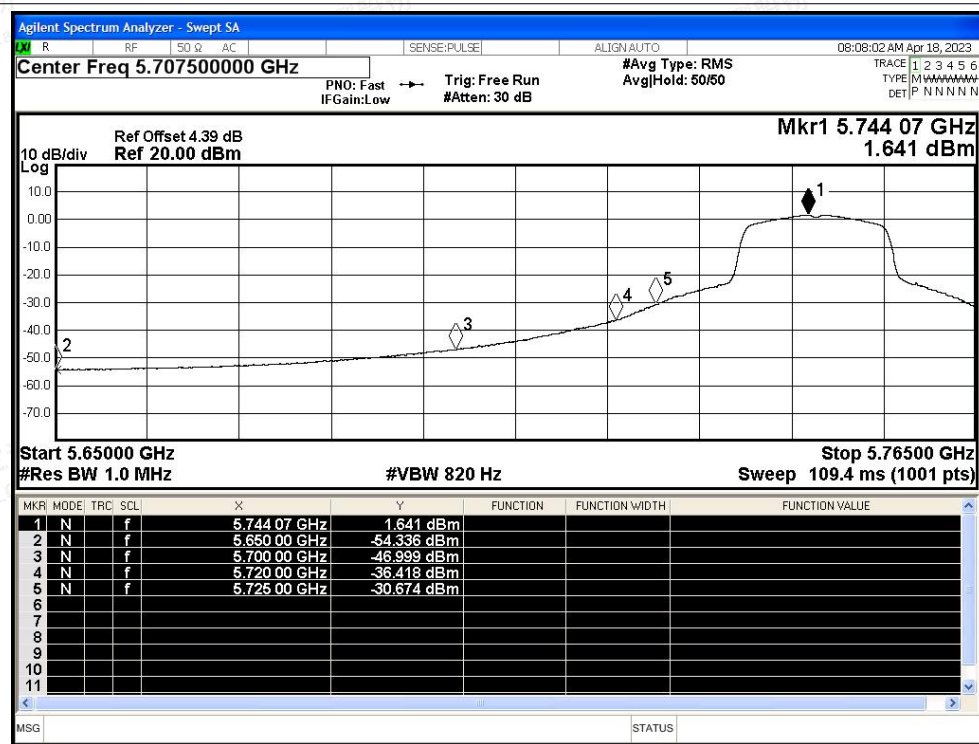




Restrict Band NVNT n20 5825MHz Ant1 Peak

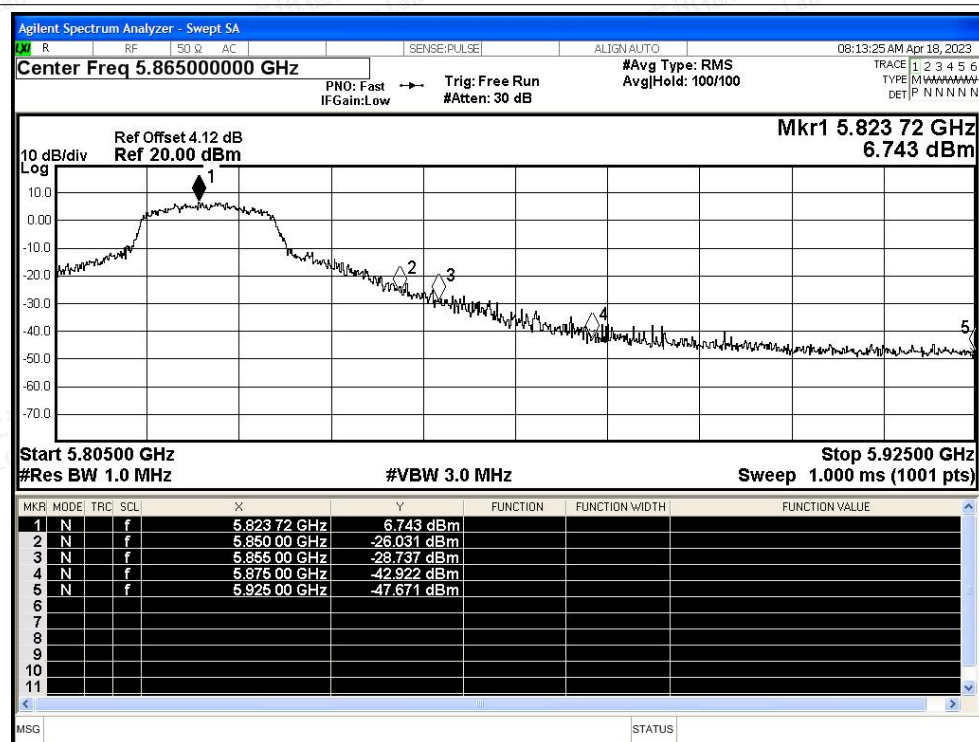

Restrict Band NVNT n20 5825MHz Ant1 Average

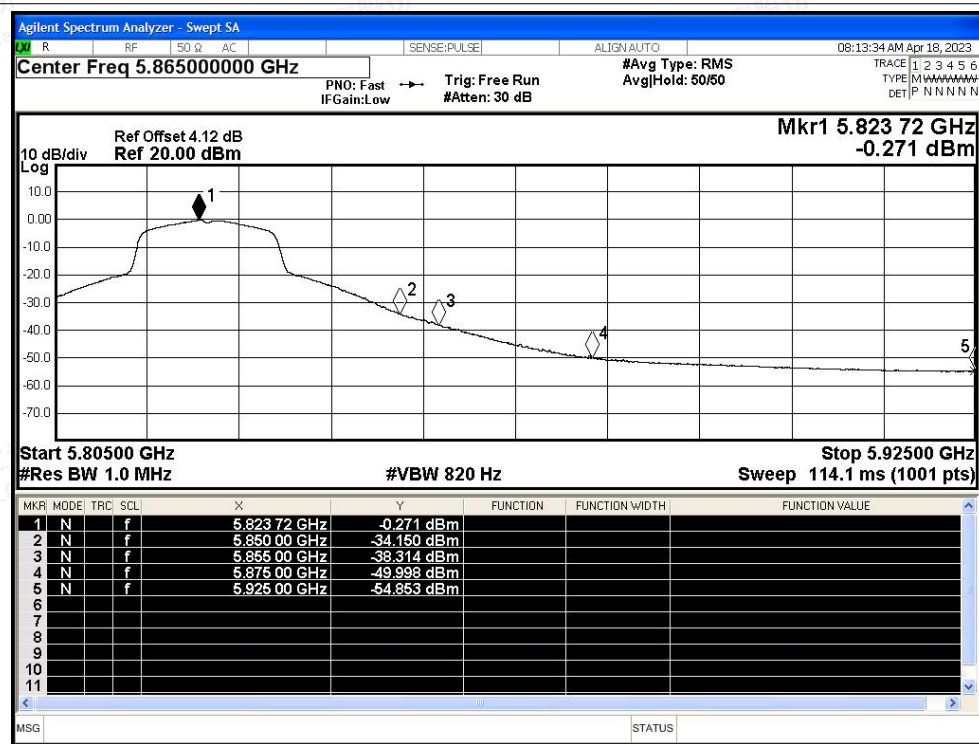

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT n40 5755MHz Ant1 Peak

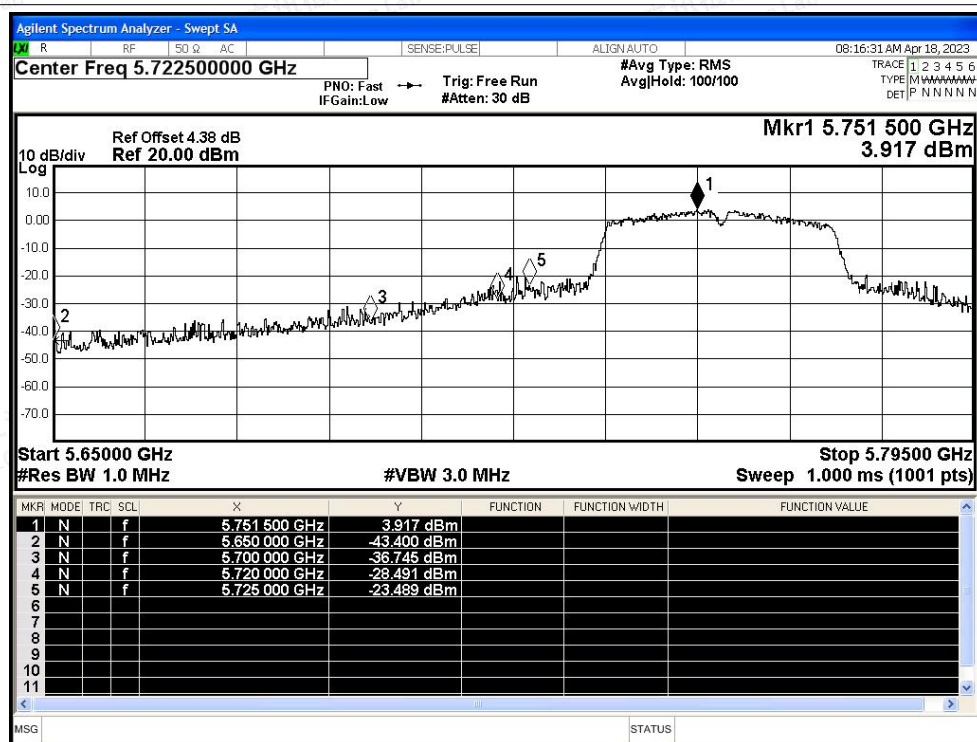


Restrict Band NVNT n40 5755MHz Ant1 Average

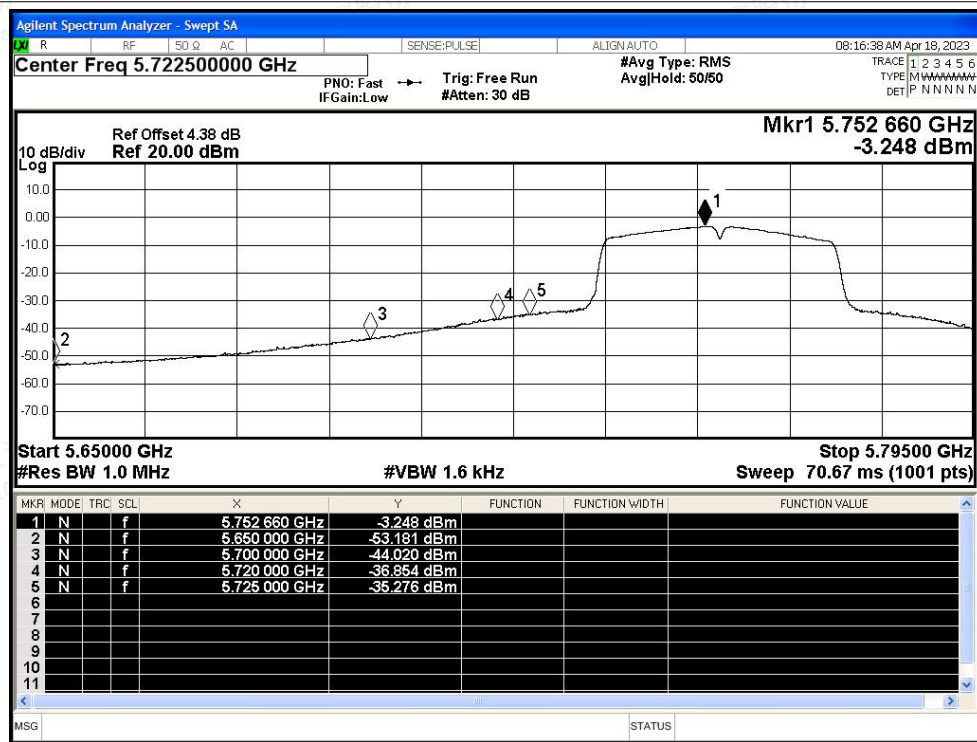




Restrict Band NVNT n40 5795MHz Ant1 Peak

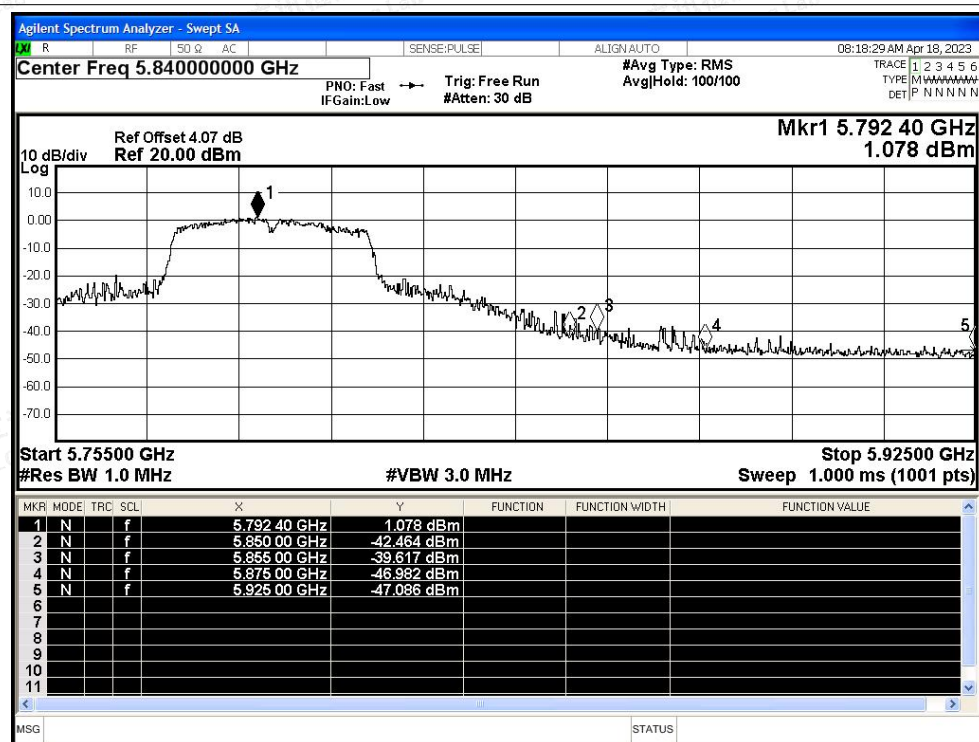

Restrict Band NVNT n40 5795MHz Ant1 Average

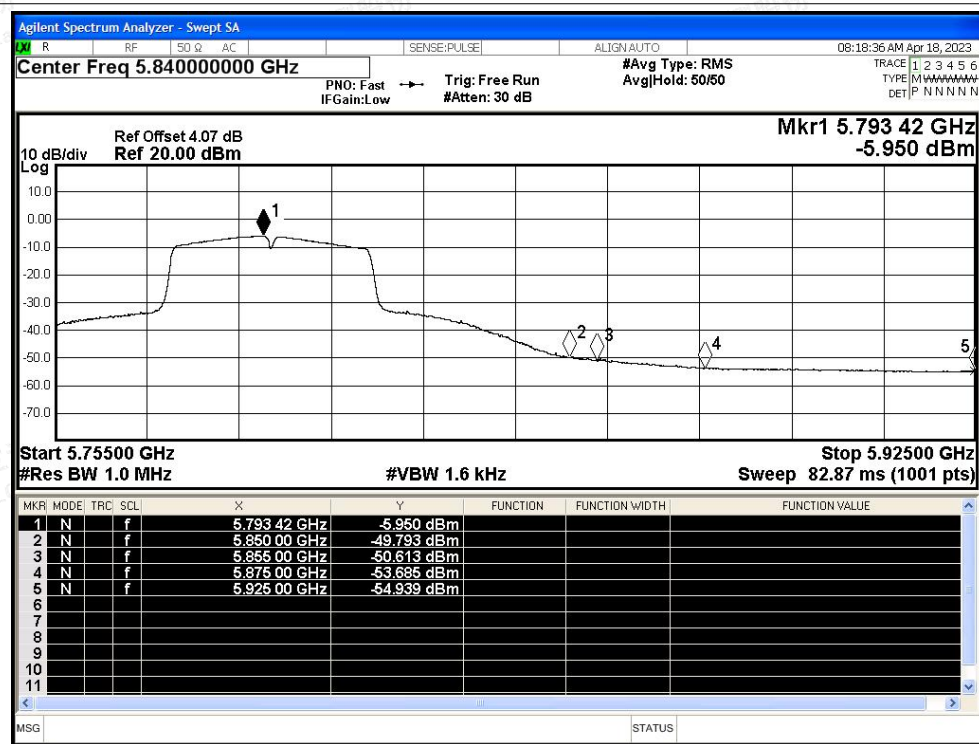

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



C.5 Frequency Stability

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	n40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
NVNT	n40	5795	Ant1	5794.96	-40000	-6.9	25	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Freq. Stability NVNT n40 5755MHz Ant1

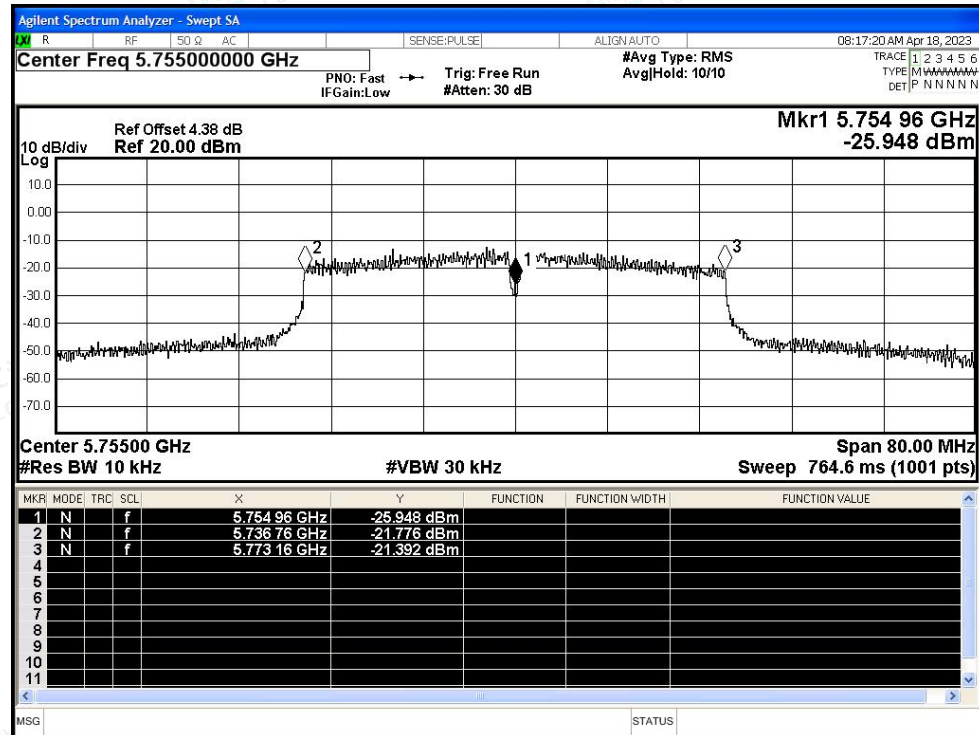

Freq. Stability NVNT n40 5795MHz Ant1

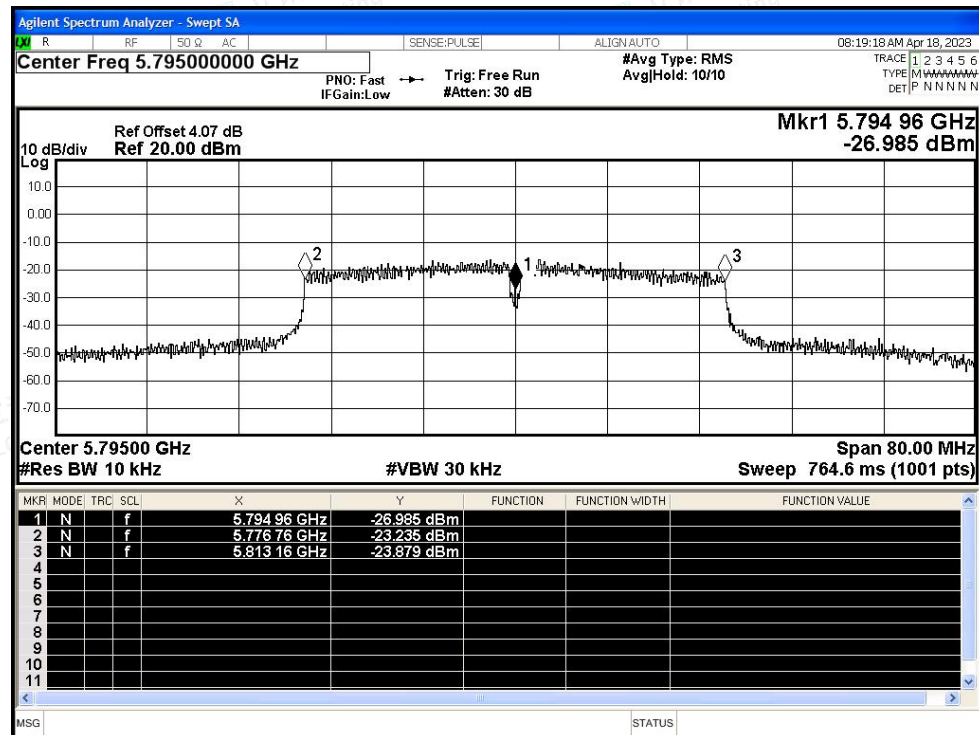



C.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	Ant1	96.94	0.13	0.72
NVNT	a	5785	Ant1	96.94	0.13	0.72
NVNT	a	5825	Ant1	96.94	0.13	0.72
NVNT	n20	5745	Ant1	96.7	0.15	0.78
NVNT	n20	5785	Ant1	96.62	0.15	0.78
NVNT	n20	5825	Ant1	96.7	0.15	0.78
NVNT	n40	5755	Ant1	93.68	0.28	1.57
NVNT	n40	5795	Ant1	93.53	0.29	1.57




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Duty Cycle NVNT a 5745MHz Ant1

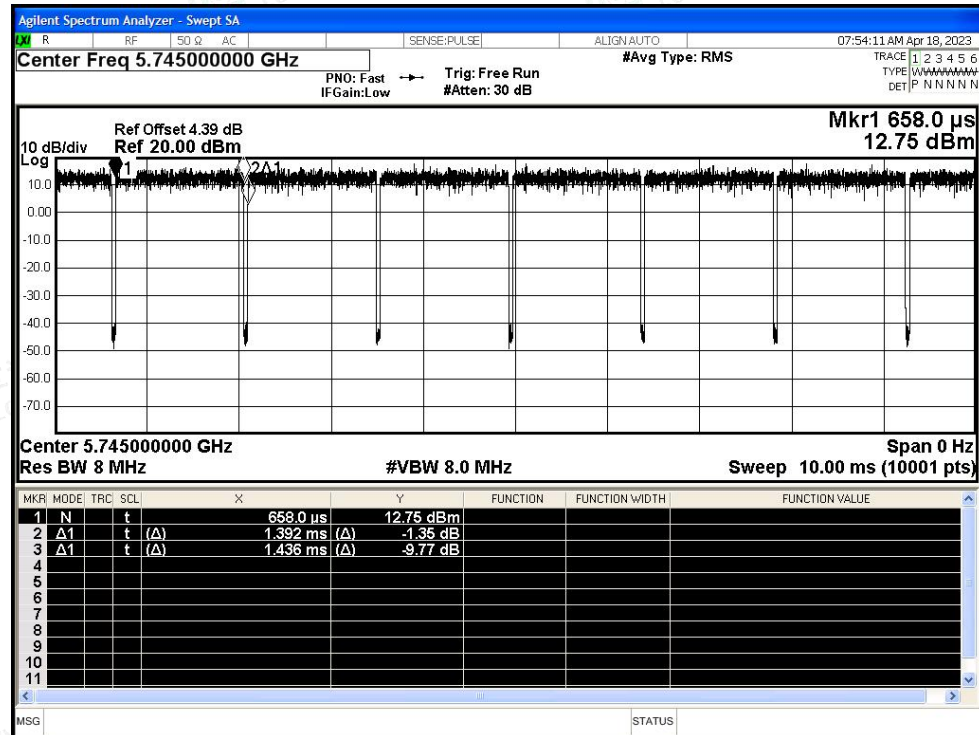

Duty Cycle NVNT a 5785MHz Ant1

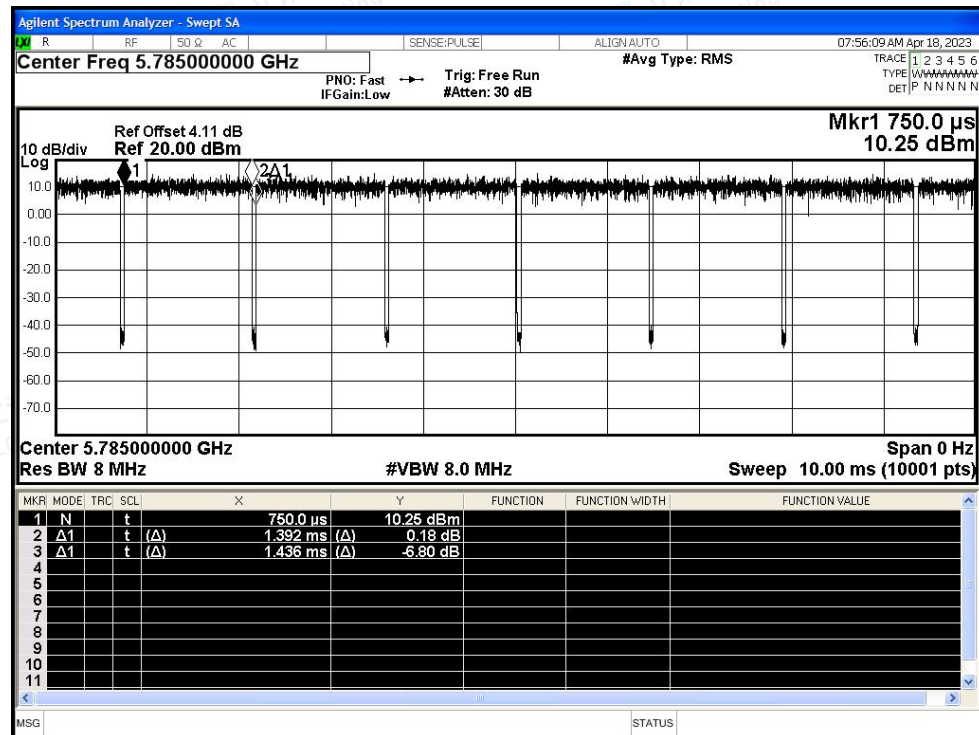

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT a 5825MHz Ant1

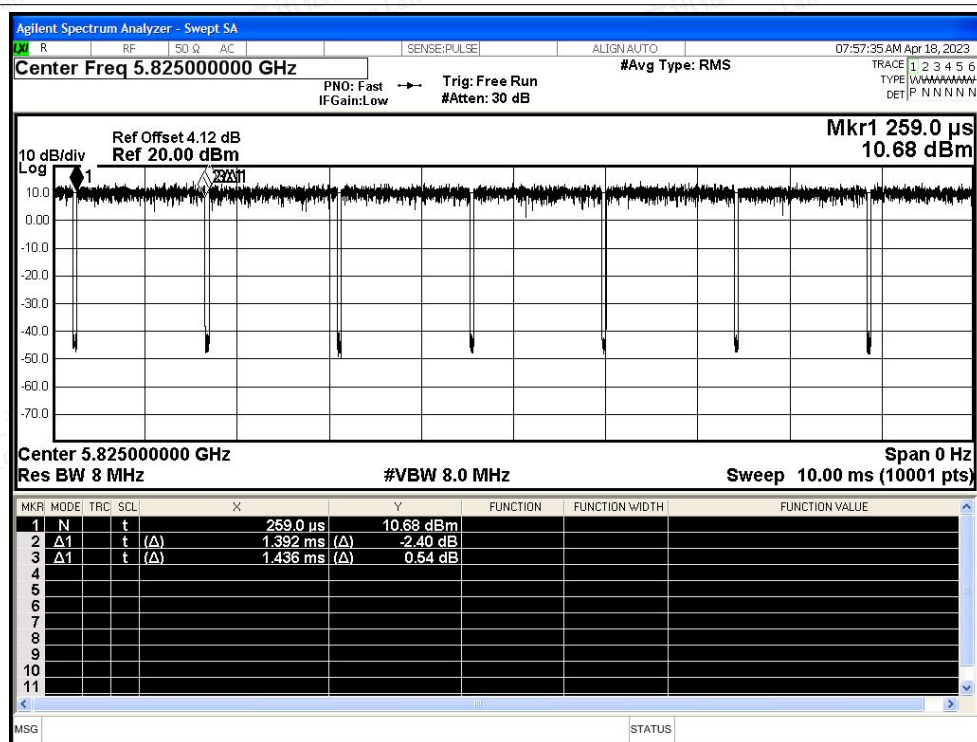


Duty Cycle NVNT n20 5745MHz Ant1

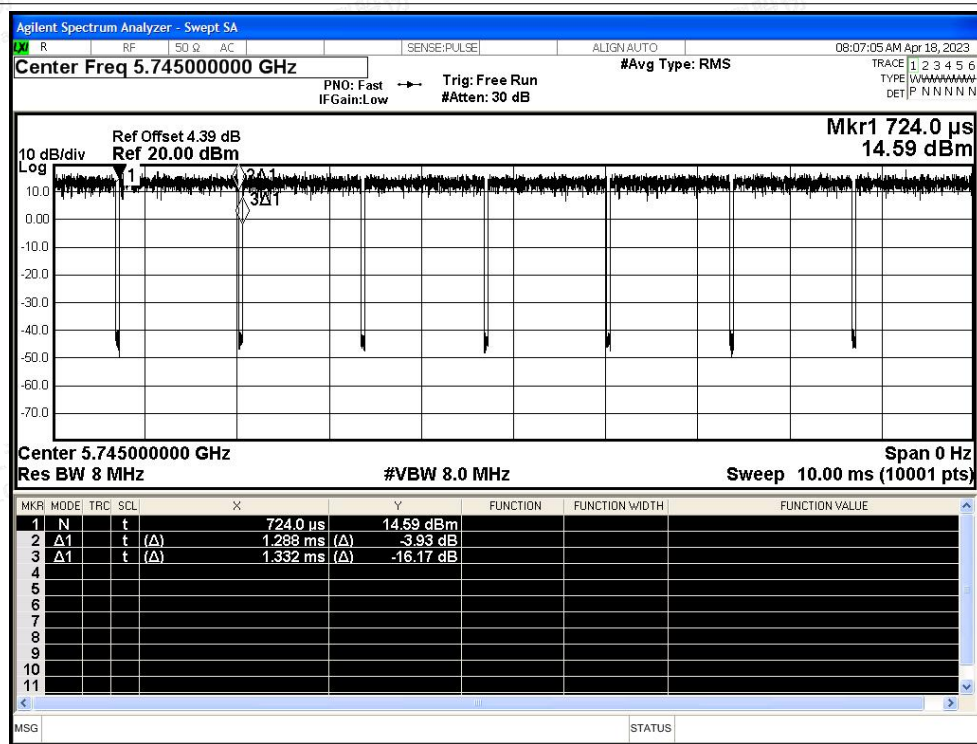




Duty Cycle NVNT n20 5785MHz Ant1

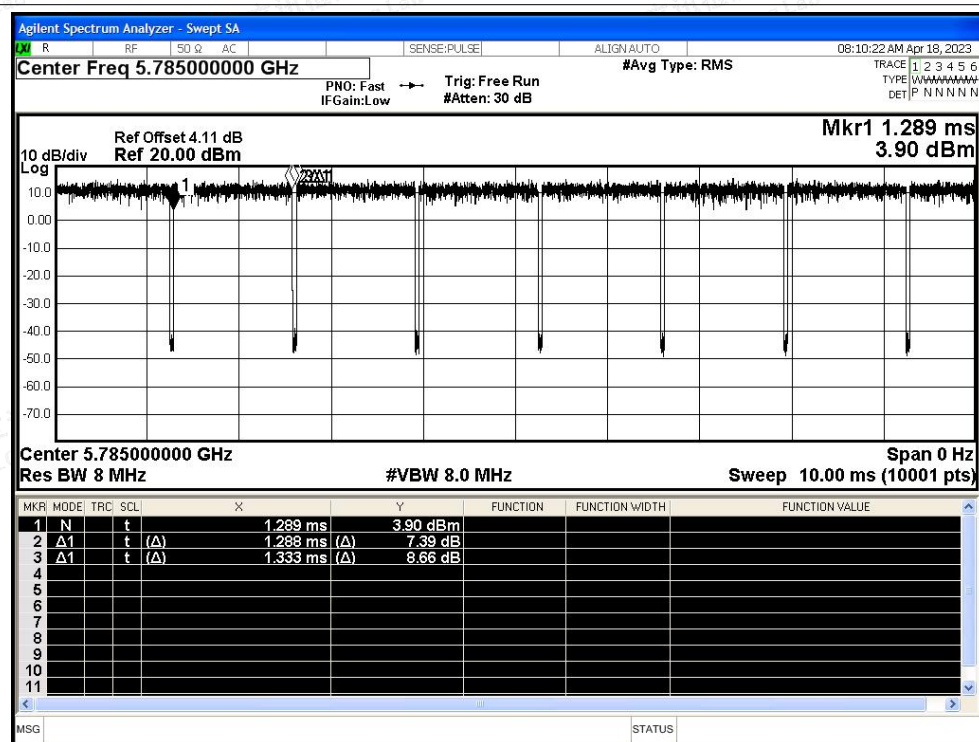


Duty Cycle NVNT n20 5825MHz Ant1

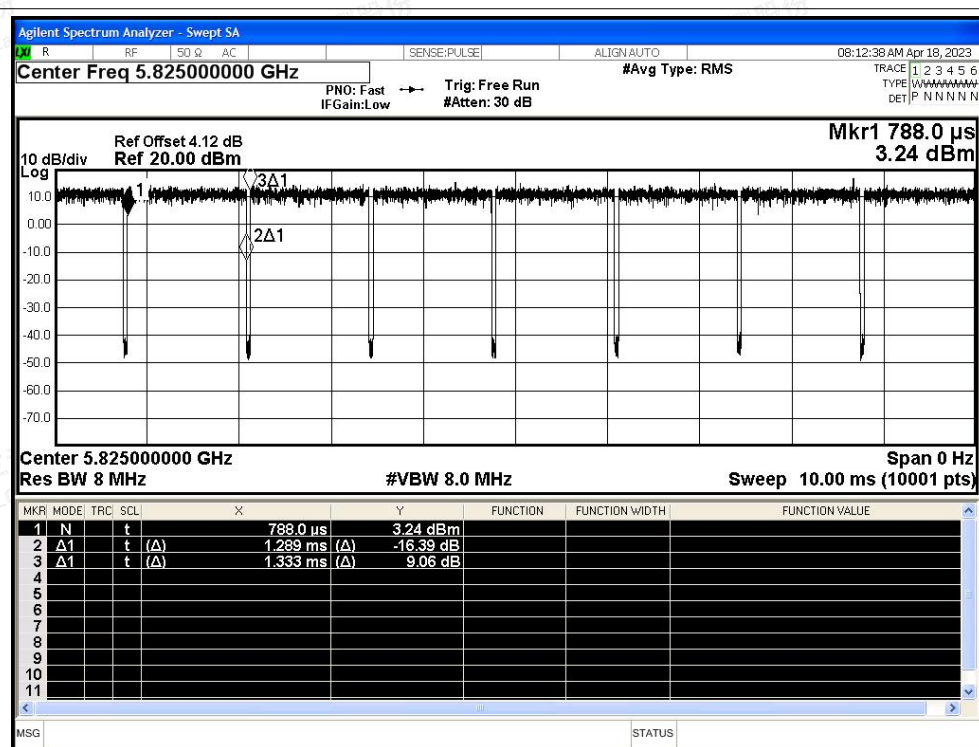



Duty Cycle NVNT n40 5755MHz Ant1

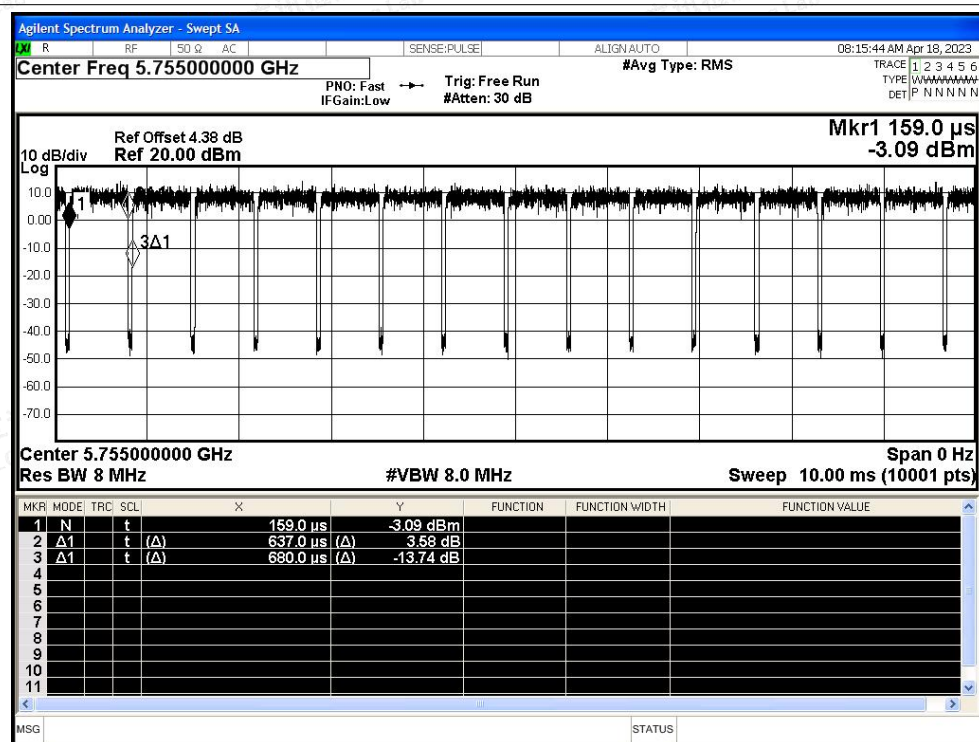

Duty Cycle NVNT n40 5795MHz Ant1

