




Theta=90 freq=5350MHz

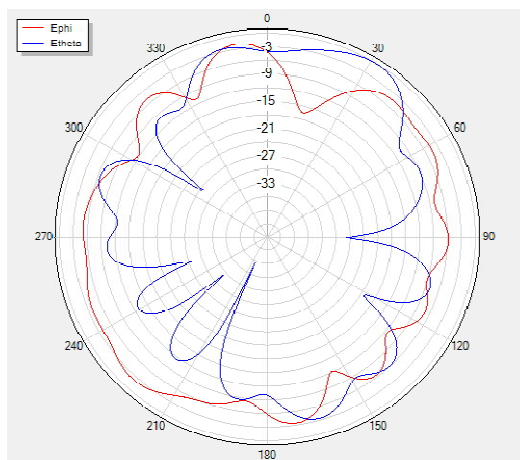


Phi=90 freq=5350MHz

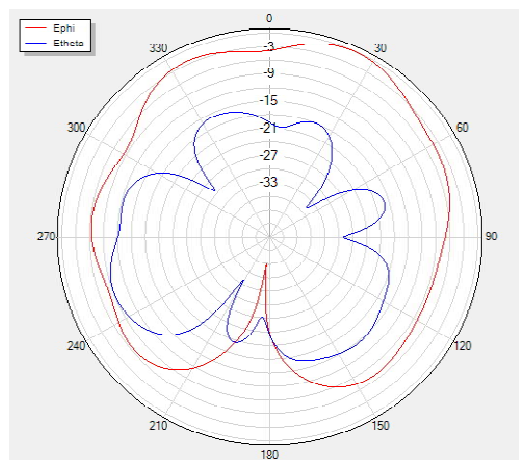


Theta=90 freq=5500MHz

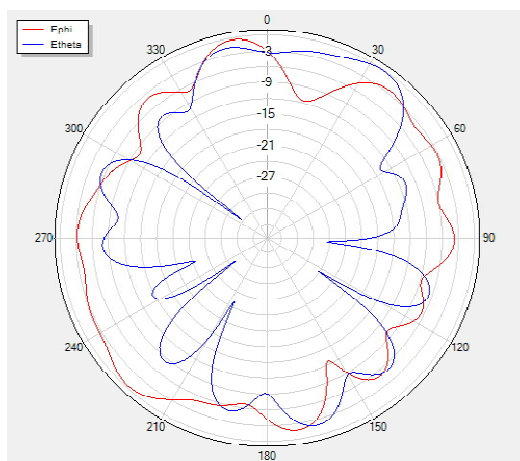


Phi=90 freq=5500MHz

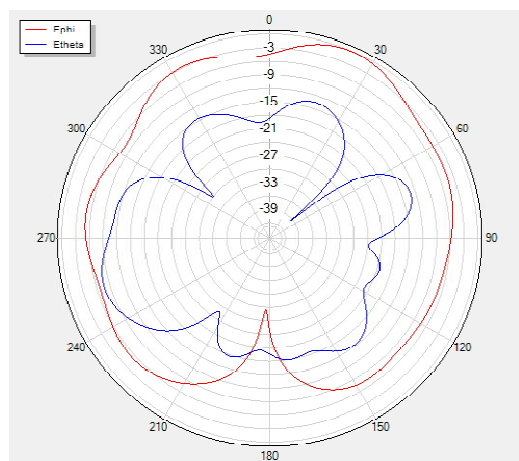

Theta=90 freq=5720MHz

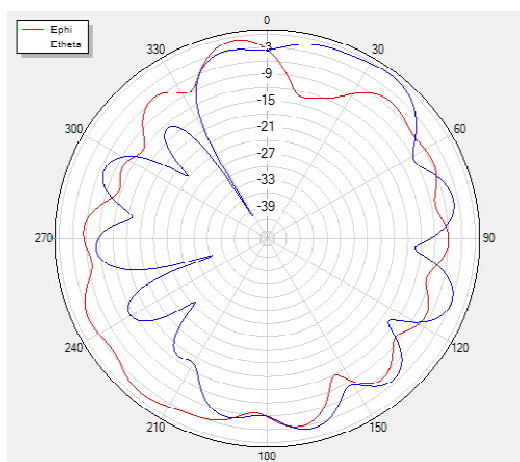

Phi=90 freq=5720MHz

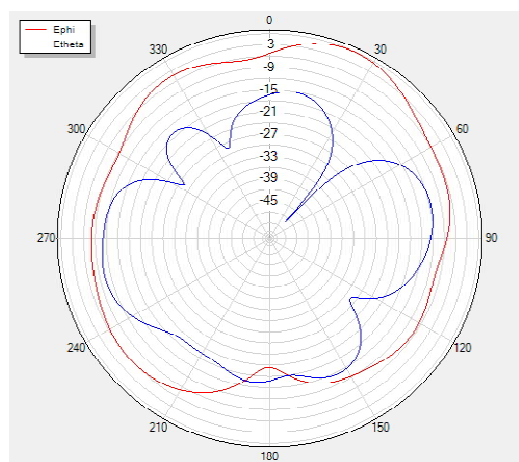

Shenzhen all things connected Communication Co.,Ltd.


All things connected Communications Xiangyang Limited

Add: Room 1101,Building 4,Fangdacheng,No2,longxhu 4 th Road,


Add: Hubei Xiangyang Gucheng County northwest renewable resources trading center Taoyuan Street, Nanshan District, Shenzhen City

phone: 136 6268 4409 URL: www.wwxltx.cn


Theta=90 freq=5800MHz

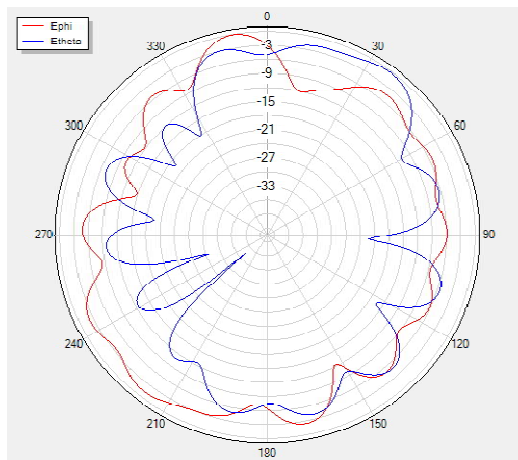


Phi=90 freq=5800MHz

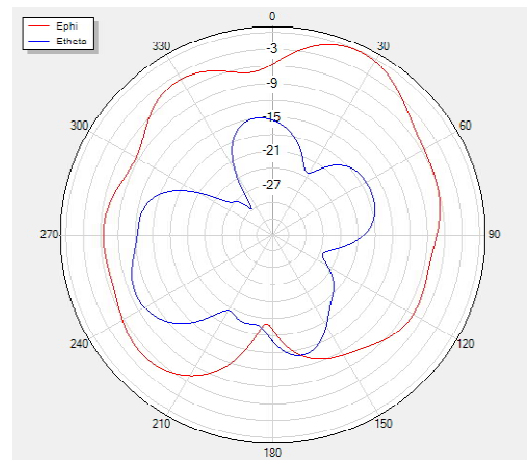

Theta=90 freq=5850MHz

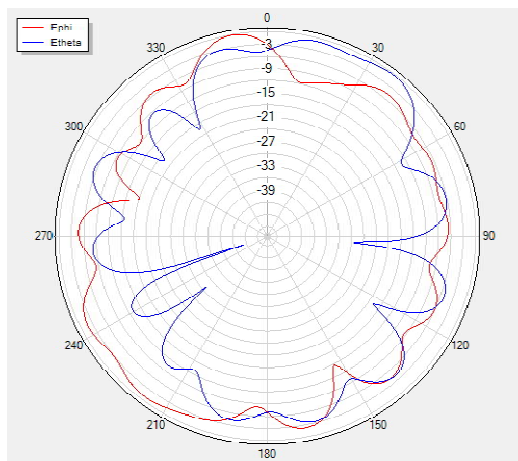

Phi=90 freq=5850MHz

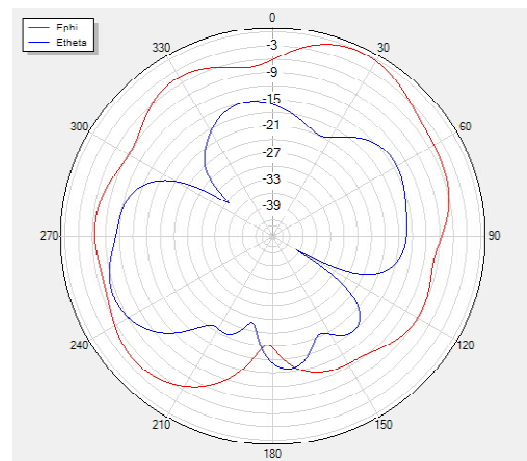

4 . Product characteristics

- Selection of high-quality FPC and radio frequency cable, self-attenuation;
- Stable performance, long service life;
- Standing wave in frequency band is good.

Shenzhen all things connected Communication Co.,Ltd.

All things connected Communications Xiangyang Limited


Add: Room 1101,Building 4,Fangdacheng,No2,longxhu 4 th Road,

Add: Hubei Xiangyang Gucheng County northwest renewable resources trading center Taoyuan Street, Nanshan District, Shenzhen City

phone: 136 6268 4409 URL: www.wwxltx.cn

5、Drawing

由 Autodesk 教育版产品制作

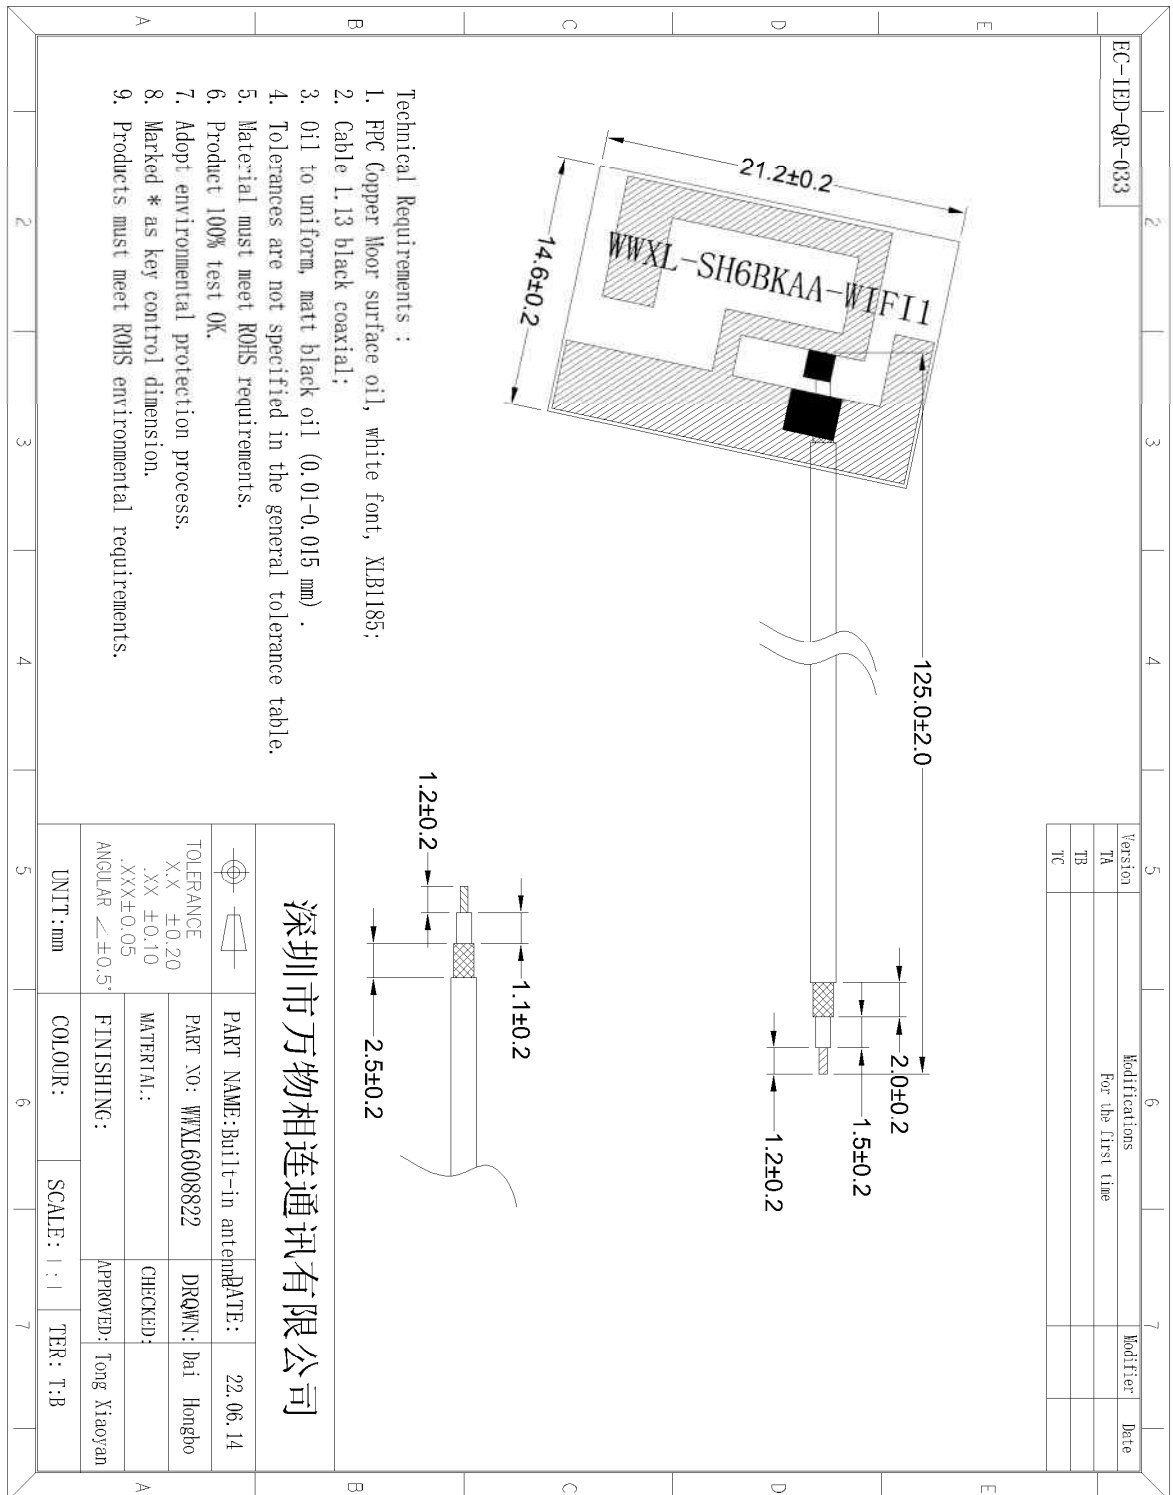

由 Autodesk 教育版产品制作

Shenzhen all things connected Communication Co.,Ltd.

All things connected Communications Xiangyang Limited

Add: Room 1101,Building 4,Fangdacheng,No2,longxhu 4 th Road,

Add: Hubei Xiangyang Gucheng County northwest renewable resources trading center Taoyuan Street, Nanshan District, Shenzhen City

phone: 136 6268 4409 URL: www.wwxltx.cn

6、Reliability testing

1 Environmental experiment

High and low temperature and humidity test report						
test project	High temperature, low temperature and constant humidity test					
name	Built-in antenna (WWXL6008822)		date		2023. 07. 24	
device	Constant temperature and humidity test box network analyzer		Quantity		5PCS	
Inspectin standards	1. There are no defects such as peeling off, cracks, wrinkles, etc. on the metal surface; non-metal parts must not have defects such as discoloration, cracking, deformation, degumming. 2. The electrical test meets the design requirements; the voltage standing wave ratio test is satisfactory.					
Test name	Pilot projects	request	experiment method	Actual test data	result	
					samp le	Assessmen t result
High temperature test	Temperature (°C) Test sample temperature stabilization time (H) Test duration (h) Recovery time (h)	+85±3 1 2 1	9 according to GB2423. 1-89 Method	+87 1.2 2.3 1	1	qualified
					2	qualified
					3	qualified
					4	qualified
					5	qualified
Low temperature test	Temperature (°C) Test sample temperature stabilization time (h) Test duration (h) Recovery time (h)	-45±3 1 2 1	8th in accordance with GB2423. 1-89 Method	-46 1.2 2.4 1.1	1	qualified
					2	qualified
					3	qualified
					4	qualified
					5	qualified
Constant Damp Heat Test	Tempera ture (°C)Relati ve humidity (%)	+40±2 90-95 21 1	According to GB2423. 3-93 Section 5 Method	+42 92 22 1.1	1	qualified
					2	qualified
					3	qualified
					4	qualified

Shenzhen all things connected Communication Co.,Ltd.

All things connected Communications Xiangyang Limited


Add: Room 1101,Building 4,Fangdacheng,No2,longxhu 4 th Road,

Add: Hubei Xiangyang Gucheng County northwest renewable resources trading center Taoyuan Street, Nanshan District, Shenzhen City


phone: 136 6268 4409 URL: www.wwxltx.cn

	Test duration (h) Recovery time (h)				5	qualified
--	---	--	--	--	---	-----------

7. Packing instructions



100PCS/Pouch

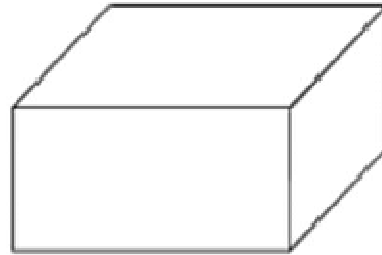

30Pouch/1Caron

Shenzhen all things connected Communication Co.,Ltd.
All things connected Communications Xiangyang Limited
Add: Room 1101,Building 4,Fangdacheng,No2,longxhu 4 th Road,
Add: Hubei Xiangyang Gucheng County northwest renewable resources trading center Taoyuan Street, Nanshan District, Shenzhen City

phone: 136 6268 4409 URL: www.wwx1tx.cn