

Download official APP
by searching "RoamWiFi"



Web Site: <http://www.roamwifi.hk>
Customer Service: 86-10-5884 7436 (7x24h)
Email: service@roamwifi.com

ROAMWIFI TECHNOLOGY(HK) LIMITED

预约行程或联系客服
请关注




小漫官方微信

小漫官网: <http://www.roamwifi.com>
客服热线: 400-667-8439 (7x24小时)
服务邮箱: service@roamwifi.com

Roam  Fi

5G Pro MANUAL

APPEARANCE

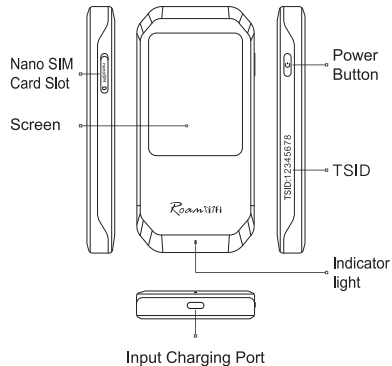

FUNCTION DESCRIPTION

Power Button

Long press the power button for 3 seconds to power on/off.

* Reset Device: Long press Power Button for 15 seconds to reset&restart when RoamWiFi device can't be turned off properly.

Nano SIM Card Slot

Insert SIM / USIM card here.

Screen

Display of device information, network connection status, etc.

TSID

Device number.

Indicator light


Display device charging status through different colors.

Input Charging Port

Charge device through data cable.

SCREEN

The interactive screen will be displayed after the network successfully connected



- 1 Signal strength
- 2 Number of connections
- 3 Battery icon(↗ means it is in charging)
- 4 Data information
- 5 Hotspot name(SSID) and password
- 6 Country in using
- 7 More information

NETWORK STANDARDS

Cellular Standard:

5G NR/FDD-LTE/TDD-LTE/WCDMA

WiFi standard:

Maximum rate WiFi6-2400Mbps

Supports 802.11a/b/g/n/ac/ax(2.4G/5GHz)

Supports 16 simultaneous connections

Battery:

Battery Capacity: 5000mAh lithium battery

Charging Voltage: DC 9V 2A

Full Charging: Approximately 2-hour charging time

Battery Life: Standby for 35 hours.

In using for 18 hours. Please charge the device first if it is not used for a long time.

SIM-FREE MODE

How to Connect to RoamWiFi:

① Reserve Internet Service

To ensure internet access, please reserve internet service on RoamWiFi APP(download from App Store by searching "RoamWiFi") of Destination Countries before departure.

② Connect Network

After power on, RoamWiFi takes 2-3 minutes to connect and access to the preferred local network. Connecting details will be displayed on the screen.


③ Surf Internet

With device on, short press the power button, WiFi hotspot name(SSID) and password will be displayed on the screen, enter the password to connect your smartphone or laptop to RoamWiFi device and start surfing the internet.

SIM CARD MODE


RoamWiFi provides a second using mode by enabling SIM Card, setting as follows:

- ① Click "More information" on the screen, then click "Settings" to enter "SIM Slot Switch" and make sure it is turned on.
- ② After shutdown, insert the SIM card according to the instructions in the picture below.



- * Method of removing SIM card: gently press the SIM card in the slot, then remove it after it pops up automatically.

设备外观

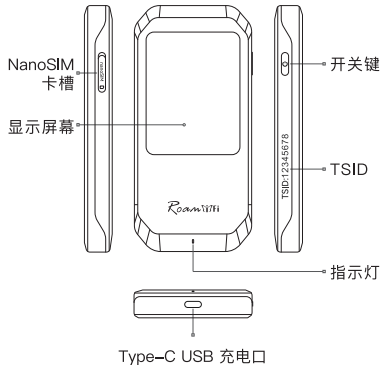

功能说明

开关键

长按3秒启动或关闭设备。

* 复位孔：长按开关键15秒,仅在设备无法正常关机的情况下使用。

Nano SIM卡槽

可插入SIM/USIM卡。

显示屏幕

显示设备信息，及网络连接状态。

TSID

设备编号。

指示灯


通过不同颜色显示设备充电状态。

Type-C USB充电口

通过数据线为设备充电。

显示屏幕

成功上网后显示交互屏幕：



- ① 信号强度和网络类型
- ② 当前连接终端数量
- ③ 电量显示(↗表示设备充电模式)
- ④ 流量信息
- ⑤ WiFi名称和密码
- ⑥ 设备目前所处国家
- ⑦ 更多信息

网络标准

蜂窝标准：

5G NR/FDD-LTE/TDD-LTE/WCDMA

WiFi标准：

最高速率WiFi6-2400Mbps

支持802.11a/b/g/n/ac/ax (2.4G/5GHz)

最多支持16个设备同时连接

电池：

电池容量：5000mAh聚合物锂高压电池

充电电压：DC 9V 2A

充电时长：2小时左右充满

使用时间：待机可达35小时

常规使用续航约18小时，如长时间未使用请在使用前充电。

无SIM卡模式


如何连接小漫WiFi：

- ① 预约行程
出境前须按照行程预约上网，才可在行程国家或地区使用。
通过“小漫WiFi”微信公众号完成预约。
- ② 连接网络
开机之后，小漫WiFi需要2-3分钟自动搜索当地最优网络并接入。可以通过显示屏幕查看网络详情。
- ③ 绑定设备
开机状态下短按开关键，在屏幕上展示小漫WiFi的热点名称和密码。
用手机或pad等，通过WiFi方式连接小漫设备即可上网。

自备SIM卡模式

支持自备SIM卡上网的第二种使用模式：

- ① 点击屏幕“更多信息”，然后点击“设置”，进入“SIM卡槽开关”，确保为开启状态。
- ② 关机后，按照下图指示插入SIM卡。



* 取出SIM卡的方法：轻按卡槽内的SIM卡，SIM卡自动弹出后再取出。

注意事項

在使用设备时，请阅读如下注意事项：

- 轻拿轻放，并将产品放在清洁无尘的地方。
- 请勿将其放在潮湿、有水或有其它液体的地方。
- 请勿将本产品放在温度极高或极低的地方。
- 请勿将本产品放在明火或点燃的烟草制品附近。
- 请勿跌落、抛掷、弯曲或私拆产品。
- 请勿把本产品放置或安装在汽车安全气囊上方。
- 海拔地区：≤2000米，由最终选用的电源适配器决定其适用的海拔地区。
- 环境温度：-10℃~60℃的情况下产品能正常使用。


环保申明

以下声明均符合中华人民共和国《电子信息产品污染控制管理办法》的相关规定。声明中所列内容适用于本电子信息产品：

有毒有害物质或元素						
部件名称	铅Pb	汞Hg	镉Cd	六价铬Cr6+	多溴联苯PBB	多溴二苯醚PBDE
无线数据终端	○	○	○	○	○	○
配件	○	○	○	○	○	○
O：表示该有毒有害物质在该部件所有均质材料中的含量均在SJ/T 11363-2006标准规定的限量要求以下。 X：表示该有毒有害物质至少在该部件的某一均质材料中的含量超出SJ/T 11363-2006标准规定的限量要求。						

• 本产品电磁辐射比吸收率（SAR）最大值为0.9W/kg,符合国家标准GB21288-2007的要求。

外觀

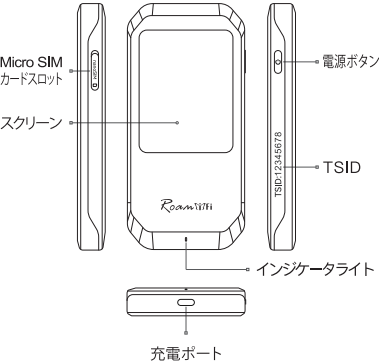

機能説明

電源ボタン
電源をオン/オフにするには3秒長押ししてください。
* リセット: が適切にシャットダウンできない場合は、電源ボタンを15秒を長押しして、デバイスをリセットしてください。

Micro SIM カードスロット
ISIM / USIM カードはここ挿入してください。

スクリーン
デバイス情報やネットワークの接続状態などを表示します。

TSID
デバイス番号。

インジケータライト
異なる色でデバイスの充電状態を表示します。

充電ポート
データケーブルを使って、デバイス充電できます。

スクリーン

ネットワークが正常に接続した後、インタラクティブな画面が表示されます。



- ① 通信キャリアのシグナル強弱
- ② 現在RoamWiFiに接続している端末の数
- ③ 電池残量表示 ◀ デバイスは充電モード中を示す
- ④ 当日使用した通信データ
- ⑤ ホットスポット名(SSID)とパスワード
- ⑥ 現在の国/地域
- ⑦ 詳細情報

ネットワーク規格

セルラー規格:

5G NR/FDD-LTE/TDD-LTE/WCDMA

WiFi規格:

最大速度WiFi6-2400Mbps

802.11 a/b/g/n/ac/ax (2.4 G/5 GHz) に対応

最大16台のデバイスを同時に接続できます

バッテリー:

バッテリー容量: 5000mAhポリマーリチウム高圧電池

充電電圧: DC 9V 2A

充電時間: 2時間ほどでいっぱいになります

使用時間: 最大35時間のスタンバイ

通常の使用で約18時間持続します,長時間使用しない場合は、使用してください使用前に充電する。

SIMフリーモード


RoamWiFiに接続する方法:

- ① インターネットサービス
インターネットアクセスを確保するため、出発前に目的国のRoamWiFi APP (App Store から「RoamWiFi」を検索してダウンロード) でインターネットサービスを予約してください。
- ② ネットワーク接続
電源入れた後、RoamWiFiはローカルネットワークにアクセスできるまで2-3分かかります。ネット接続の詳細は、デバイスのスクリーンに表示されます。
- ③ デバイスと連結
電源を入れた状態でスイッチを短く押すと、画面に小さなWiFiのホットスポット名とパスワードが表示されます。
スマートフォンやiPadにRoamWiFiのパスワードを入力して、WiFiネットワークに接続できます。

プリペイドSIMモード

RoamWiFi第2パターンの使用モード:次のように設定して、SIMカードを有効にし、ネットに繋がります。

- ① 画面の「詳細情報」をタップし、「設定」をタップして「SIMスロットスイッチ」に入り、オン状態になっていることを確認します。
- ② シャットダウン後、下図の指示に従ってSIMカードを挿入します。



* 下記の図に示すように、RoamWiFiデ1 イスの電源オフ状態にしてから、SIMカードを挿入します。

FCC warning

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.v
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly apvproved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- ❶ This device may not cause harmful interference.
- ❷ This device must accept any interference received, including interference that may cause undesired operation.

ISED warning:

(EN) This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- ❶ This device may not cause interference.
- ❷ This device must accept any interference, including inte rference that may cause undesired operation of the device.

(FH) L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- ❶ L'appareil ne doit pas produire de brouillage
- ❷ L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionne-ment.

CAN ICES-3 (B)/NMB-3(B)

5150-5350MHz band is restricted to indoor use only.

La bande de 5150-5350MHz est réservée à l'usage intérieur.

(EN) The portable device is designed to meet the requirements for exposure to radio waves established by the Federal Communications Commission (USA)/Innovation, Science and Economic Development (ISED). These requirements set a SAR limit of 1.6 W/kg averaged over one gram of tissue. The highest SAR value reported under this standard during product certification for use when properly worn on the body. RF exposure guidelines for use with an accessory that contains no metal, position the device a minimum of 10mm from the body.

(FH) L'appareil portable a été conçu dans le strict respect des exigences en matière d'exposition aux fréquences radioélectriques établies par la Commission fédérale des communications (FCC, États-Unis) / Innovation, Sciences et Développement économique (ISED). Ces exigences fixent une limite de SAR de 1.6 W/kg en moyenne sur un gramme de tissu. La valeur de SAR la plus élevée qui a été reportée en vertu de cette norme lors de la certification d'utilisation du produit lorsque l'utilisateur le porte convenablement sur la corps. Directives d'exposition aux RF pour une utilisation avec un accessoire ne contenant pas de métal et positionnant l'appareil à une distance minimale de 10mm du corps. l'usage intérieur.