


Note: The EUT position is too small to reflect the information of the Label, so the Label will be reflected in the User Manual & Outer Packaging as shown in the position diagram below.

(Reflected on page 12 of the user manual, and the label will also be reflected on the outer packaging)

EUT:

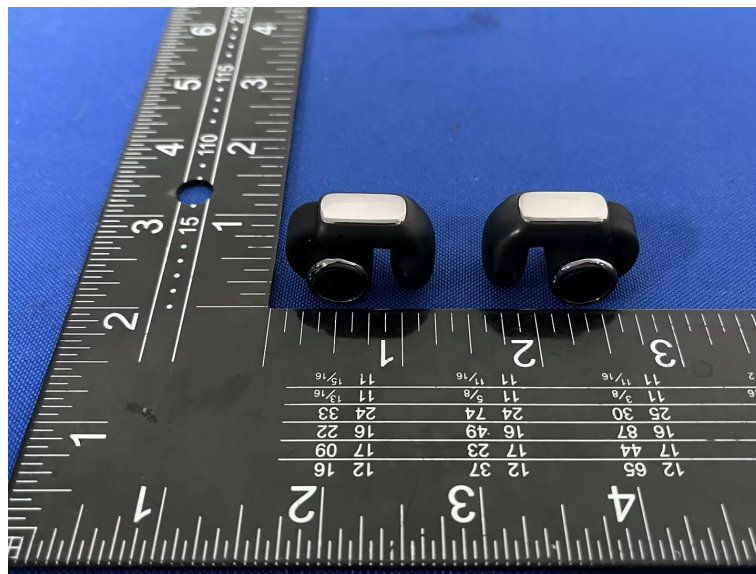

user manual:

Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help. The device has been evaluated to meet general RF exposure requirement.



2A25L-LC008

Packaging:

LC-dolida®

Model :	LC008
Support code :	a2dp 1.3.2 / avctp 1.4 / avdtp 1.3 / avrcp 1.6.2 / hfp 1.8
Waterproof :	IP45
Transmission :	10M
Rated power :	10mW
Frequency response :	20Hz~20kHz
Speaker sensitivity :	103dB±3dB
Impedance :	32Ω ±15%
Battery capacity :	Earphones 3.7V / 45mAh Charging case 3.7V / 600mAh
Working time :	Earphones 6H / Charging case 25H
Charging type :	Type-C
Size :	66.5×28.2×49.5mm

2A25L-LC008



WORKS WITH ALL BLUETOOTH DEVICES

