



RF MEASUREMENT REPORT

FCC ID: 2BD5N-PRX30SE
Applicant: Shenzhen Aiper Intelligent Co.,Ltd
Product: Cordless Robotic Pool Cleaner
Model No.: PRX30SE
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
Result: Complies
Received Date: 2025-12-01
Test Date: 2025-12-08 ~ 2026-01-04

Reviewed By:

Denise Zhou

Denise Zhou

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report. Testing was performed in accordance with the applicable measurement procedures. The test results reported herein apply only to the specific item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1002128-U203	V01	Initial Report	2026-01-28	Invalid
R25S1002128-U203	V02	Replaced the setup photo in Section 6.6.4.	2026-02-06	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	7
2. Test Configuration	8
2.1. Test Mode	8
2.2. Test System Connection Diagram	8
2.3. Test Software	8
2.4. Applied Standards	9
2.5. Test Environment Condition	9
3. Antenna Requirements	10
4. Measuring Instrument	11
5. Decision Rules and Measurement Uncertainty	12
5.1. Decision Rules	12
5.2. Measurement Uncertainty	12
6. Test Result	13
6.1. Summary	13
6.2. 6 dB Bandwidth Measurement	14
6.2.1. Test Limit	14
6.2.2. Test Procedure	14
6.2.3. Test Setting	14
6.2.4. Test Setup	14
6.2.5. Test Result	14
6.3. Output Power Measurement	15
6.3.1. Test Limit	15
6.3.2. Test Procedure	15
6.3.3. Test Setting	15
6.3.4. Test Setup	15
6.3.5. Test Result	15
6.4. Power Spectral Density Measurement	16
6.4.1. Test Limit	16
6.4.2. Test Procedure	16

6.4.3.	Test Setting	16
6.4.4.	Test Setup	16
6.4.5.	Test Result	17
6.5.	Conducted Band Edge and Out-of-Band Emissions Measurement	18
6.5.1.	Test Limit	18
6.5.2.	Test Procedure	18
6.5.3.	Test Setting	18
6.5.4.	Test Setup	18
6.5.5.	Test Result	19
6.6.	Radiated Spurious Emissions Measurement	20
6.6.1.	Test Limit	20
6.6.2.	Test Procedure	20
6.6.3.	Test Setting	20
6.6.4.	Test Setup	22
6.6.5.	Test Result	23
6.7.	Radiated Restricted Band Edge Measurement	24
6.7.1.	Test Limit	24
6.7.2.	Test Procedure	25
6.7.3.	Test Setting	25
6.7.4.	Test Setup	26
6.7.5.	Test Result	26
6.8.	AC Conducted Emissions Measurement	27
6.8.1.	Test Limit	27
6.8.2.	Test Setup	27
6.8.3.	Test Result	27
Appendix A - Test Result		28
A.1	Duty Cycle Test Result	28
A.2	6 dB Bandwidth Test Result	29
A.3	Output Power Test Result	32
A.4	Power Spectral Density Test Result	33
A.5	Conducted Band Edge and Out-of-Band Emissions Test Result	36
A.6	Radiated Spurious Emissions Test Result	43
A.7	Radiated Restricted Band Edge Test Result	49
A.8	AC Conducted Emissions Test Result	109
Appendix B - Test Setup Photograph		112
Appendix C - EUT Photograph		113

1. General Information

1.1. Applicant

Shenzhen Aiper Intelligent Co.,Ltd

Units 3201, 3203A and 3205, 32nd floor, Block C, Phase 2 Galaxy World, Minle community, Minzhi street, Longhua district, Shenzhen, China

1.2. Manufacturer

Shenzhen Aiper Intelligent Co.,Ltd

Units 3201, 3203A and 3205, 32nd floor, Block C, Phase 2 Galaxy World, Minle community, Minzhi street, Longhua district, Shenzhen, China

1.3. Testing Facility

☒	Test Site - MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Location (Suzhou - Wujiang) Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China
	Laboratory Accreditations
	A2LA: 3628.01 FCC: CN1166 CNAS: L10551 ISED: CN0001
☐	Test Site - MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 FCC: CN1284 CNAS: L10551 ISED: CN0105
☐	Test Site - MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	Cordless Robotic Pool Cleaner
Model No.	PRX30SE
EUT Identification No.	20251201Sample#14 (for radiated) 20251201Sample#15 (for conducted)
Wi-Fi Specification	802.11a/b/g/n/ac
Bluetooth Specification	Dual Mode, BR/EDR & BLE
Antenna Information	Refer to clause 1.5
Operating Temp.	5 ~ 40 °C
Power Type	By Rechargeable Li-ion Battery or Charging Dock
Accessory(ies)	
Rechargeable Li-ion Battery	Model No.: C1264D2-04 Nominal Voltage: 21.6 Vdc Rated Capacity: 10.3 Ah Limited Charging Voltage: 25.2 Vdc
Charging Dock	Label: Apier Model No.: CH02
AC/DC Adapter	Model No.: GM95-252300-1FGN Input: 100-240V ~ 50/60 Hz, 2.5 A Output: 25.2 V = 3 A; 75.6 W
Note: The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Frequency Range	2400 ~ 2483.5 MHz	
Channel Number	802.11b/g/n-HT20: 11	
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM	
Data Rate	802.11b: 1/2/5.5/11 Mbps 802.11g: 6/9/12/18/24/36/48/54 Mbps 802.11n: up to 72.5 Mbps	
Antenna Gain	2.88 dBi	
Channel Puncturing Function	☐ Supported	☒ Unsupported
Support RU	☒ Full RU	☐ Partial RU

1.6. Working Frequencies

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by 802.11b (1 Mbps)
Mode 2: Transmit by 802.11g (6 Mbps)
Mode 3: Transmit by 802.11n-HT20 (MCS0)
Note: All modes of operation and data rates were investigated, so all RF test requirements shall be executed at the worst data rate which power is the greatest.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10-2020 was used to reference the appropriate EUT setup for radiated emissions testing and AC conducted emissions testing.

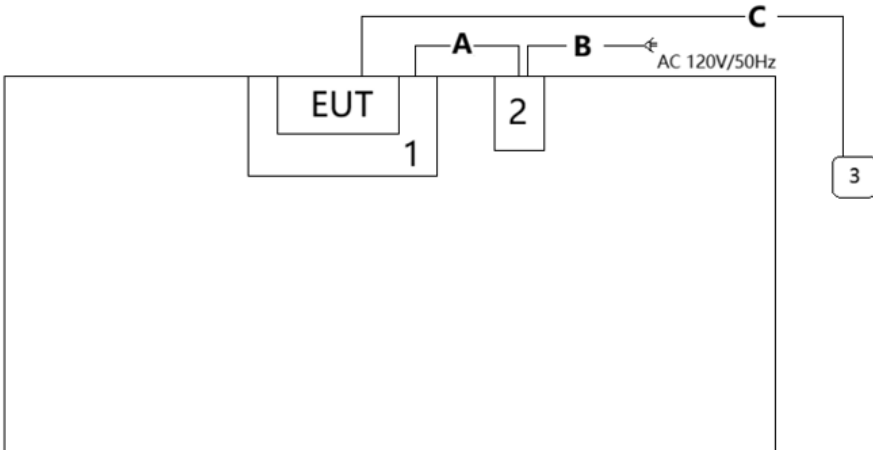Connection Diagram - Radiated Emission testing & AC Conducted Emissions Testing			
			
No.	Cable Type	Cable Description	Length
A	Power Cable	Non shielded	1 m
B	Power Cable	Non shielded	1.4 m
C	USB Cable	Non shielded	> 10 m
No.	Product	Manufacturer	Model No.
1	Charging dock	AIPER	X30
2	Adapter	GVE	GM95
3	Notebook	Lenovo	E430C

2.3. Test Software

The test utility software used during testing was “MobaXterm.exe” and the version was V25.4.

Final power setting please refer to operational description.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01 v05r02
- KDB 662911 D01 v02r01
- ANSI C63.10-2020
- ANSI C63.10-2020/Cor1-2023
- ANSI C63.10a-2024

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2026-10-08	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2026-04-17	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2026-07-19	WZ-AC1
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2026-04-26	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2026-11-06	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11263	1 year	2026-10-08	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2026-04-17	WZ-AC2
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2026-01-04	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2026-04-26	WZ-AC2
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2026-03-22	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2026-11-02	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2026-01-09	WZ-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2026-09-28	WZ-AC2
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2026-04-24	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2026-04-26	WZ-SR5
USB Power Sensor	Keysight	U2021XA	MRTSUE06447	1 year	2026-06-17	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11082	1 year	2026-06-02	WZ-SR5
RF Cable	UCwave	UCE500	MRTSUE07366	1 year	2026-07-20	WZ-SR5
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2026-04-26	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2026-04-24	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2026-08-31	WZ-SR2

Software	Version	Function
e3	230711	RE & CE
Controller_MF 7802	2.03C	RE Antenna & Turntable
Controller_MF 7802	1.02	RE Antenna & Turntable
Agilent Power Panel	V 3.9	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.

(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
9 kHz ~ 150 kHz:	3.59 dB
150 kHz ~ 30 MHz:	3.20 dB
Radiated Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
Coaxial:	9 kHz ~ 30 MHz: 2.56 dB
Coplanar:	9 kHz ~ 30 MHz: 2.55 dB
Horizontal:	30 MHz ~ 200 MHz: 3.48 dB
	200 MHz ~ 1 GHz: 4.17 dB
	1 GHz ~ 40 GHz: 5.01 dB
Vertical:	30 MHz ~ 200 MHz: 4.09 dB
	200 MHz ~ 1 GHz: 5.30 dB
	1 GHz ~ 40 GHz: 4.85 dB
Spurious Emissions, Conducted	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 2.9 dB	
Output Power	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 1.4 dB	
Power Spectrum Density	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 2.9 dB	
Occupied Bandwidth	
Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 2.6%	

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6 dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emissions)	Radiated	Pass
15.207	AC Conducted Emissions 150 kHz - 30 MHz	Line Conducted	Pass

Notes:

1. The analyzer plots shown in this section were captured using a correction table to account for cable and attenuator losses in the system connecting the EUT to the analyzer across relevant frequencies.
2. For radiated emission tests, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 6 dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure

ANSI C63.10-2020 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6 dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1% to 5% of the OBW, but not less than 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

6.2.4. Test Setup

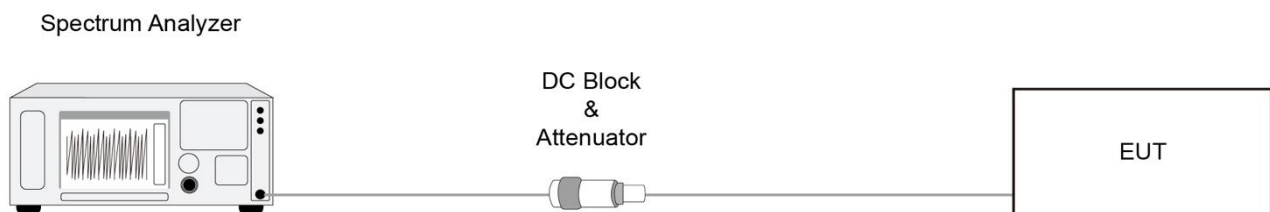

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30 dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure


ANSI C63.10-2020 - Section 11.9.2.3.2

6.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

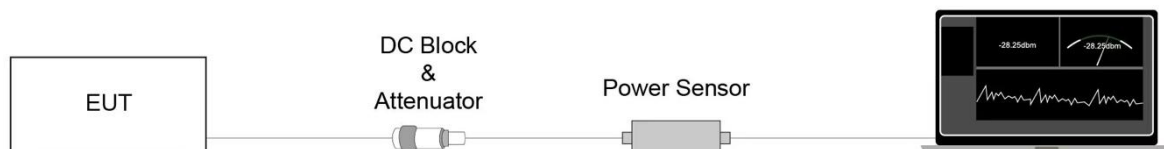

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.

6.4.2. Test Procedure


ANSI C63.10-2020 - Section 11.10.5

6.4.3. Test Setting

1. Measure the duty cycle (x) of the transmitter output signal
2. Set instrument center frequency to DTS channel center frequency
3. Span > 1.5 times the OBW
4. RBW = 10 kHz
5. VBW $\geq 3 \times$ RBW
6. Detector = RMS
7. Ensure that the number of measurement points in the sweep $\geq 2 \times$ Span/RBW
8. Sweep time = Auto couple
9. Don't use sweep triggering; Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces
11. Use the peak marker function to determine the maximum amplitude level
12. If duty cycle < 98%, add $10\log(1/x)$, where x is the duty cycle measured in step 1, to the measured PSD to compute the average PSD during the actual transmission time. If duty cycle $\geq 98\%$, no need to add $10\log(1/x)$.
13. If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

6.4.4. Test Setup

Spectrum Analyzer

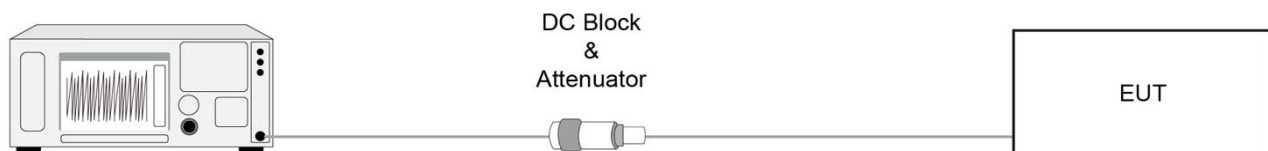

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 30 dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2020 - Section 11.11

6.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Span ≥ 1.5 times the DTS bandwidth
3. RBW = 100 kHz
4. VBW $\geq 3 \times$ RBW
5. Detector = Peak
6. Sweep time = Auto couple
7. Trace mode = Max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep time = Auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

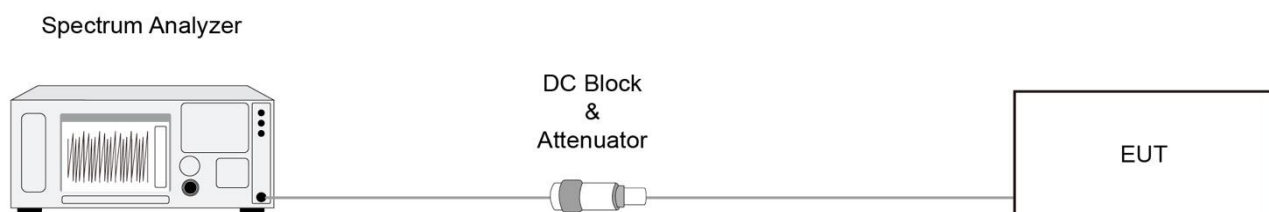

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emissions Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure

ANSI C63.10-2020 - Section 11.11 & 11.12

ANSI C63.10-2020 - Section 6.3 (General Requirements)

ANSI C63.10-2020 - Section 6.4 (Standard test method below 30 MHz)

ANSI C63.10-2020 - Section 6.5 (Standard test method above 30 MHz to 1 GHz)

ANSI C63.10-2020 - Section 6.6 (Standard test method above 1 GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1 GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1 MHz
3. RBW = as specified in Table 1
4. $VBW \geq 3 \times RBW$
5. Detector = CISPR quasi-peak
6. Sweep time = Auto couple
7. Trace was allowed to stabilize

Peak Measurements above 1 GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1 GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz
If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.6.4. Test Setup


Below 30 MHz Test Setup:

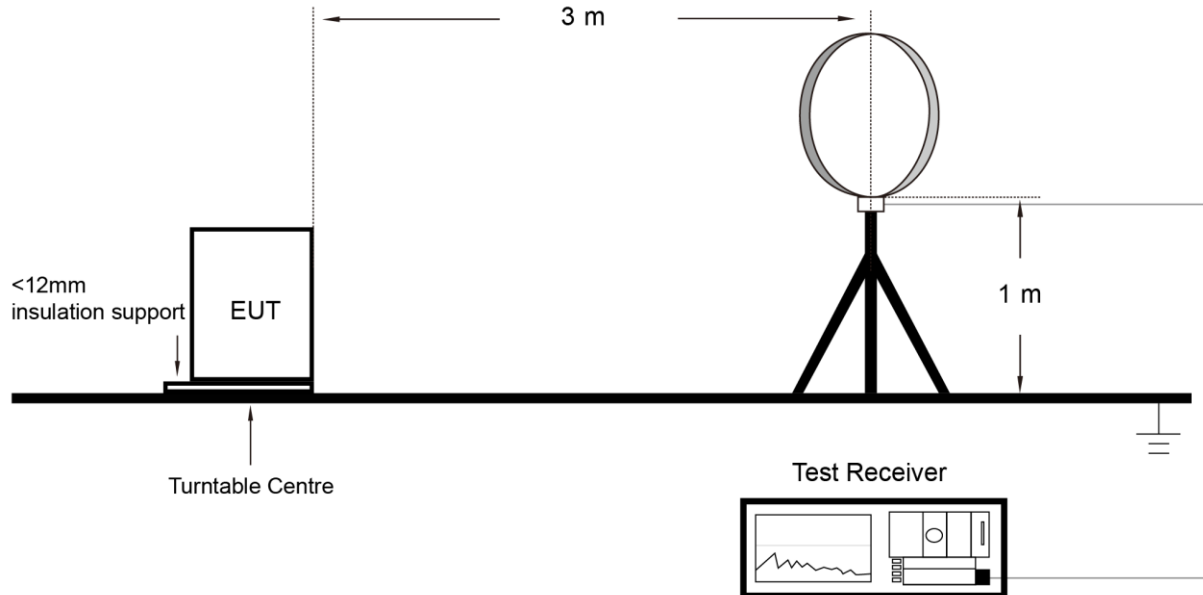

Below 1 GHz Test Setup:

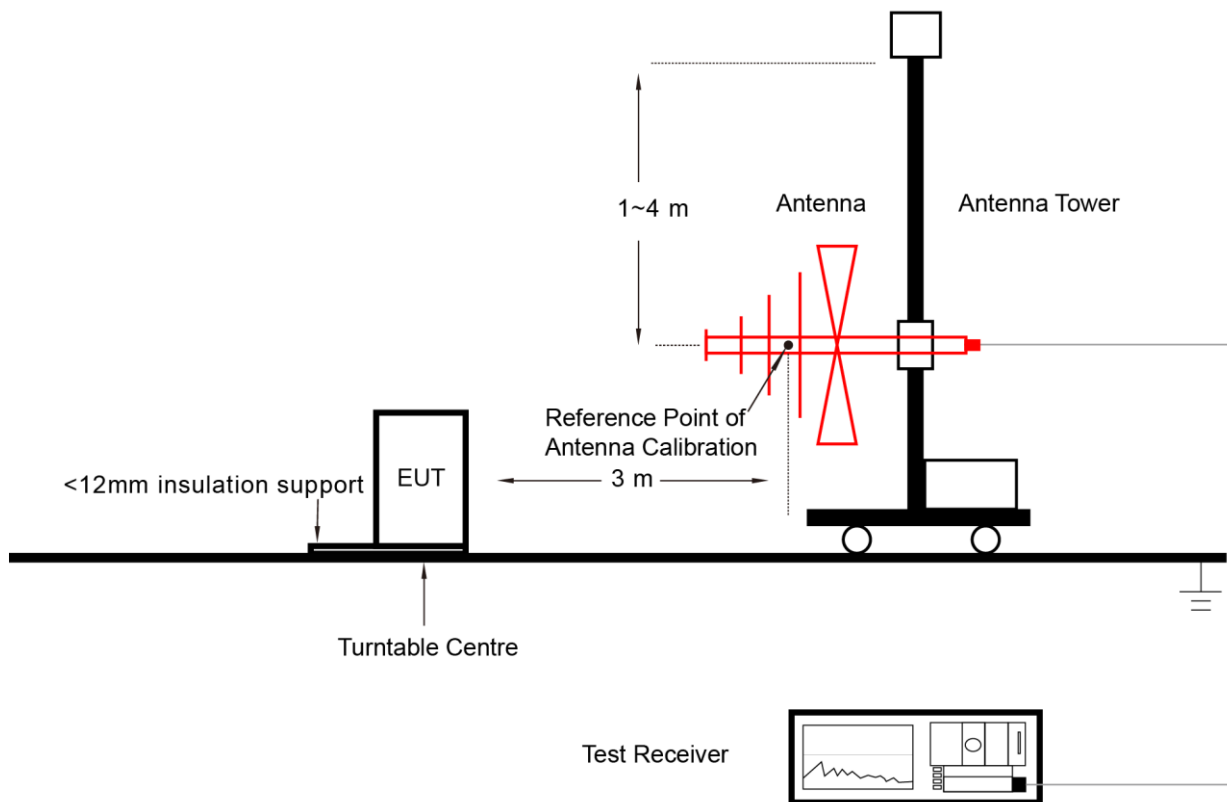

Above 1 GHz Test Setup:

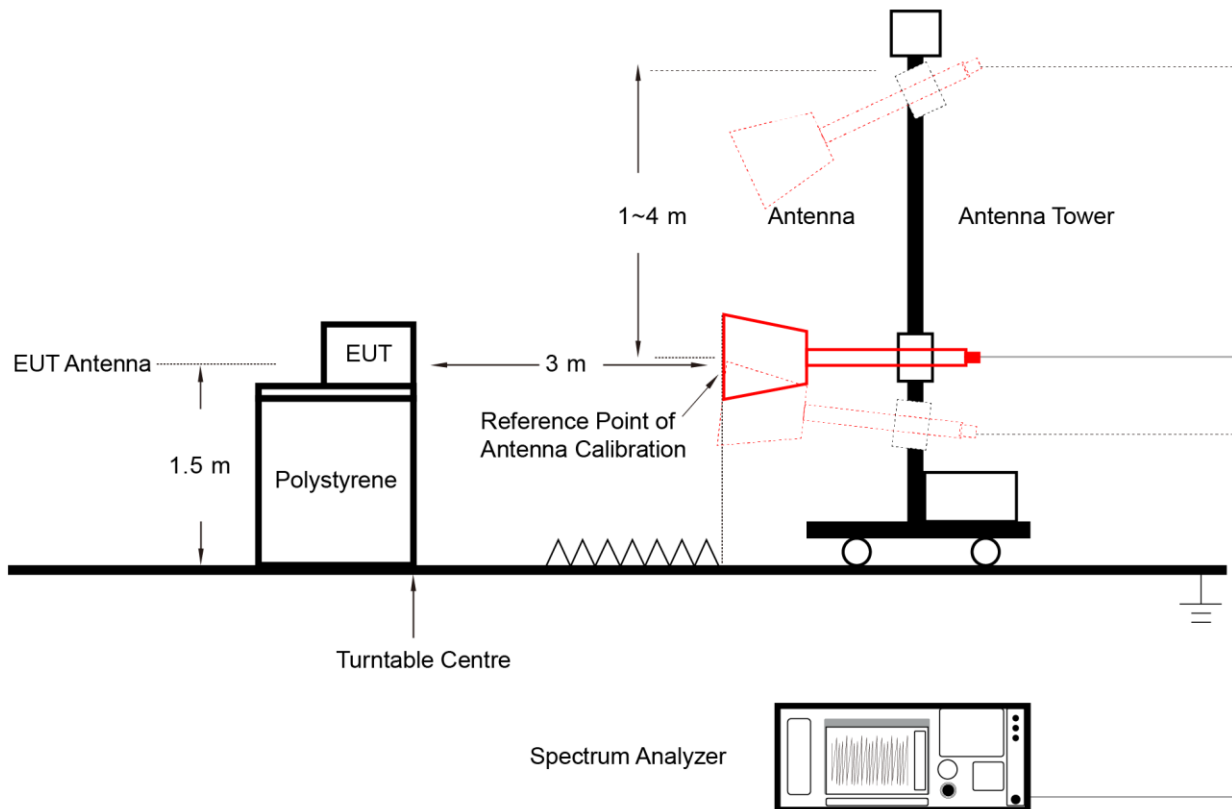

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

ANSI C63.10-2020 - Section 6.3 & 6.6 & 11.12

6.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize


Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.

4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup

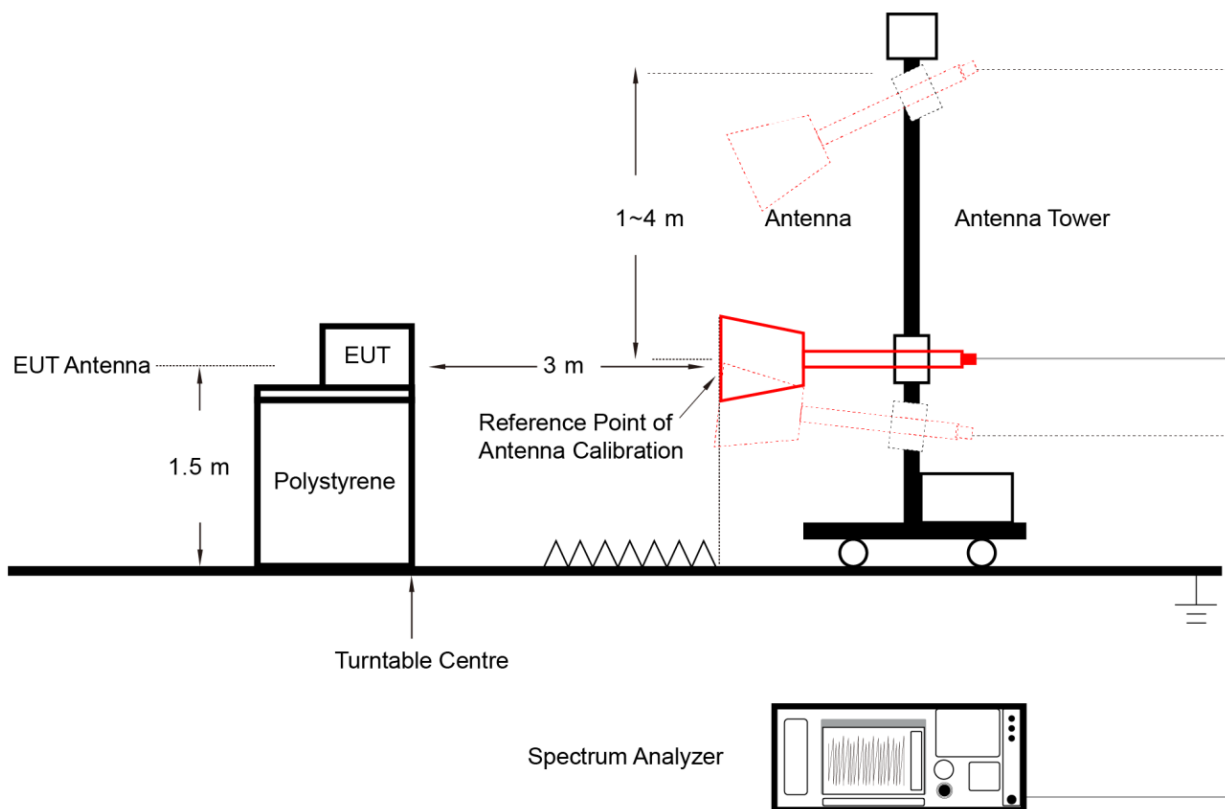

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

6.8.2. Test Setup

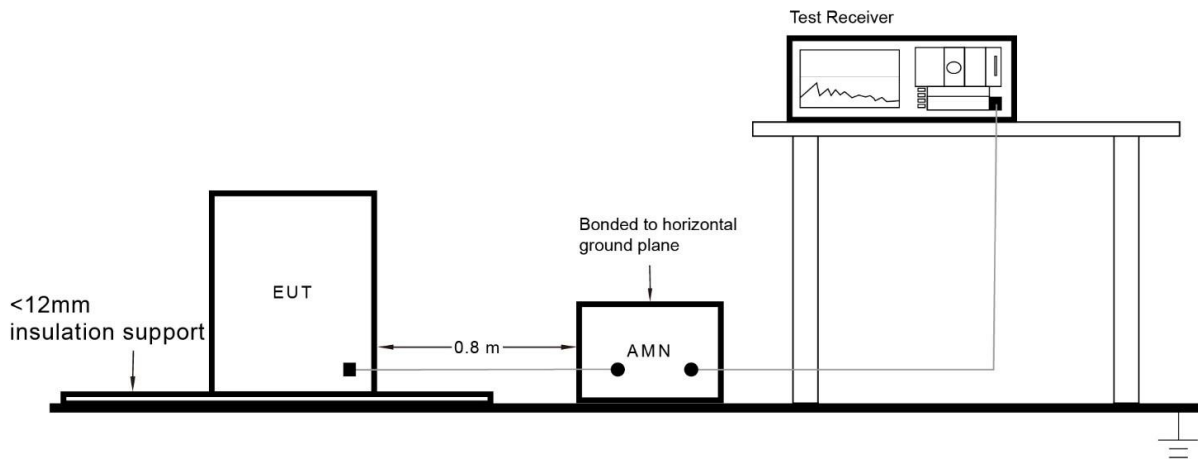

6.8.3. Test Result


Refer to Appendix A.8.

Appendix A - Test Result

A.1 Duty Cycle Test Result

Test Site	WZ-SR5	Test Engineer	Herman Liu
Test Date	2025-12-09		

Test Mode	Duty Cycle
802.11b	98.83%
802.11g	91.90%
802.11n-HT20	91.06%

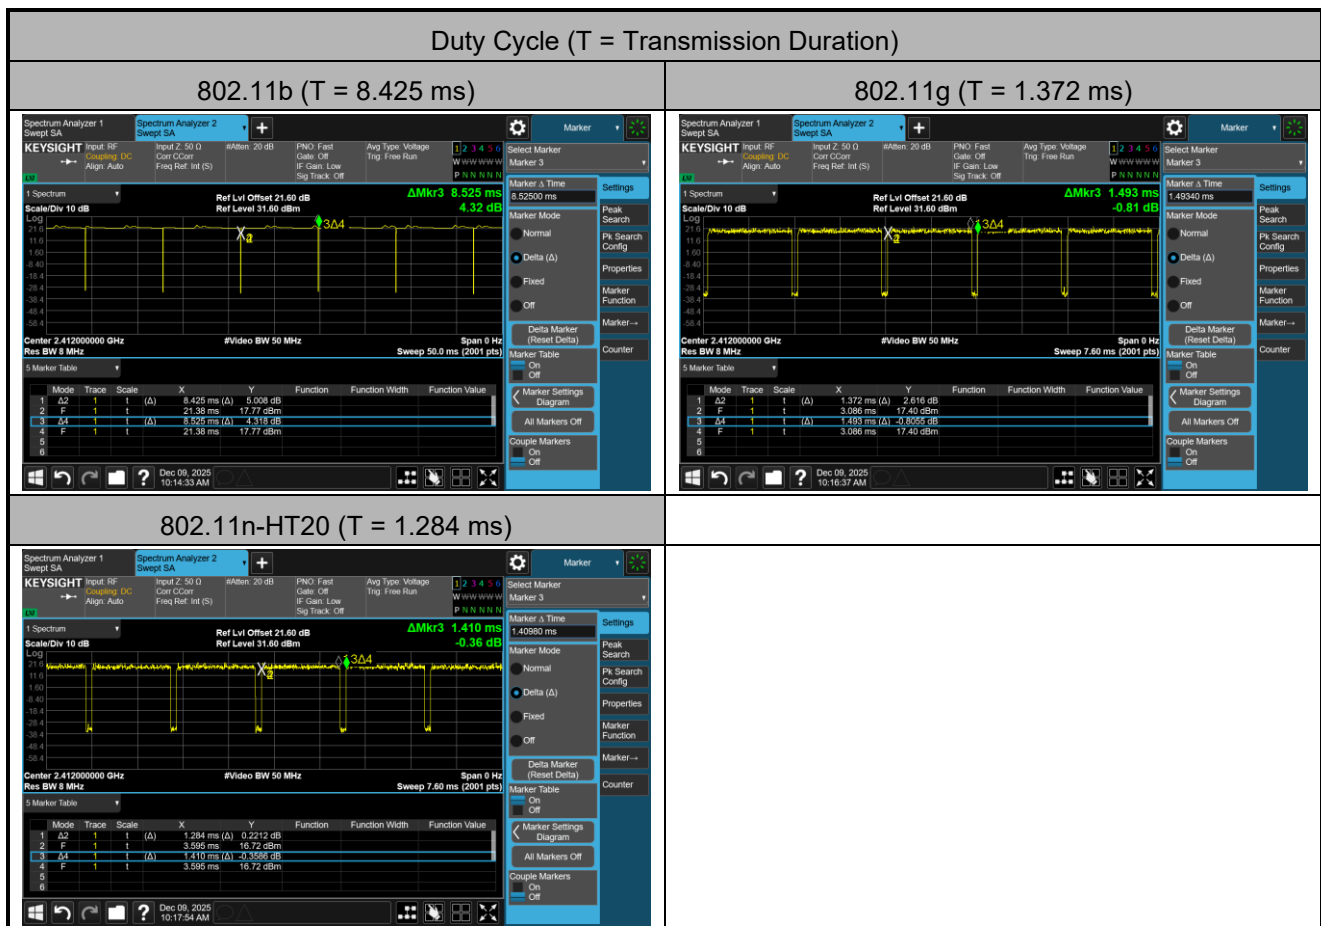


A.2 6 dB Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Herman Liu
Test Date	2025-12-09 ~ 2025-12-31		


Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
11b	1 Mbps	01	2412	8.119	≥ 0.5
11b	1 Mbps	06	2437	8.101	≥ 0.5
11b	1 Mbps	11	2462	8.116	≥ 0.5
11g	6 Mbps	01	2412	15.56	≥ 0.5
11g	6 Mbps	06	2437	15.67	≥ 0.5
11g	6 Mbps	11	2462	15.23	≥ 0.5
11n-HT20	MCS0	01	2412	15.81	≥ 0.5
11n-HT20	MCS0	06	2437	15.87	≥ 0.5
11n-HT20	MCS0	11	2462	15.26	≥ 0.5

802.11b 6 dB Bandwidth


Channel 01 (2412 MHz)

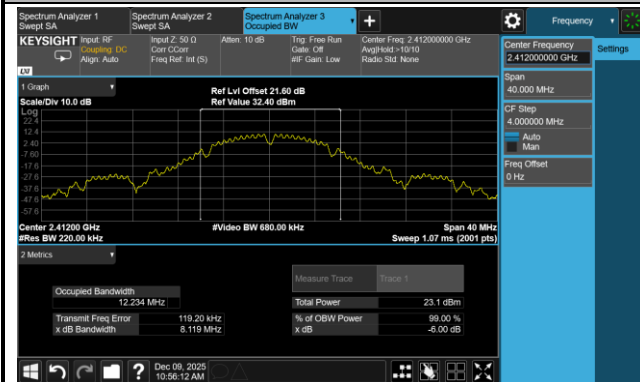

Channel 06 (2437 MHz)

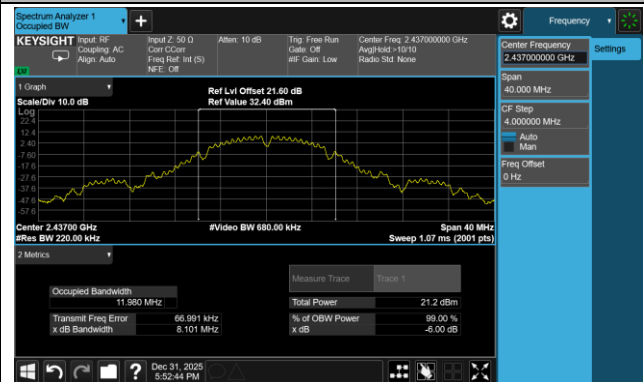


Channel 11 (2462 MHz)

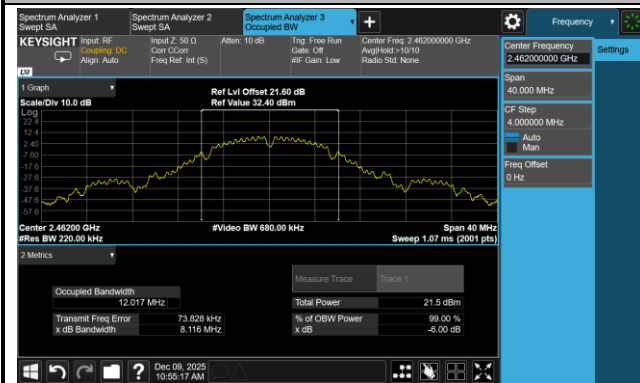


802.11g 6 dB Bandwidth


Channel 01 (2412 MHz)

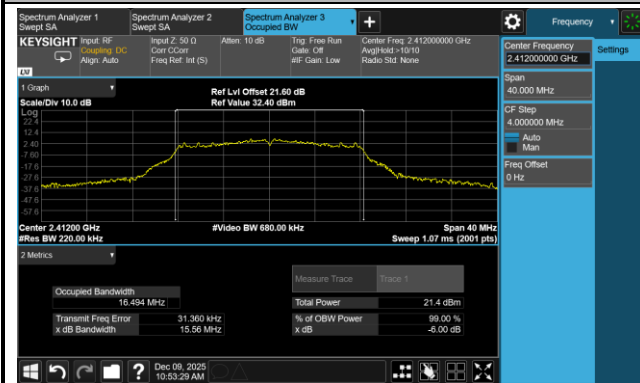

Channel 06 (2437 MHz)

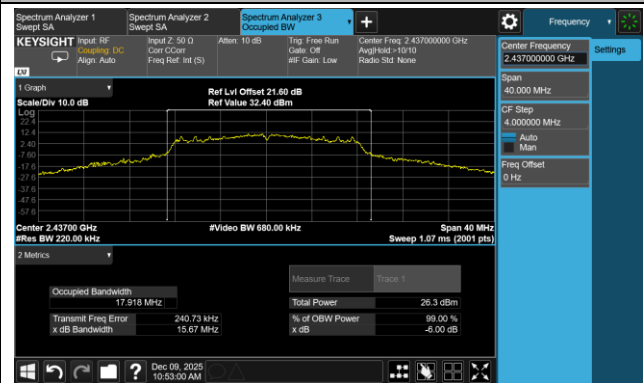


Channel 11 (2462 MHz)

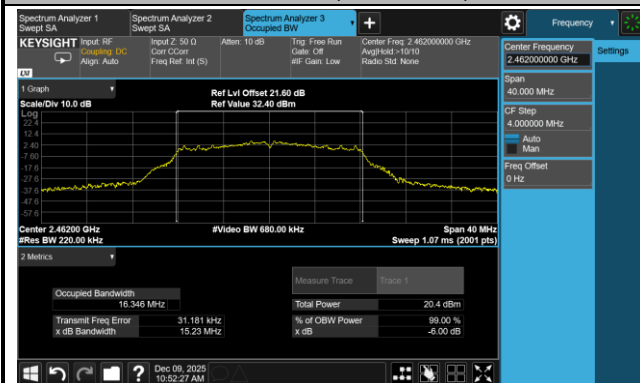


802.11n-HT20 6 dB Bandwidth


Channel 01 (2412 MHz)

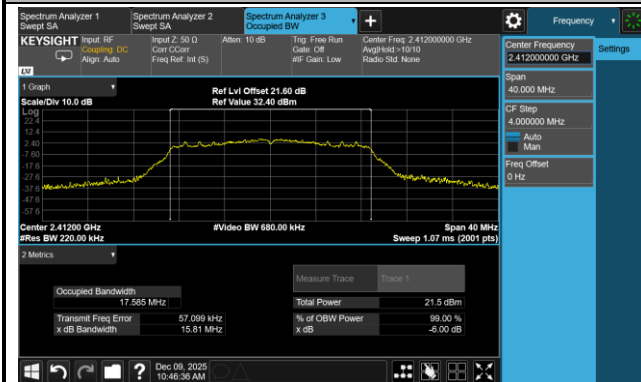

Channel 06 (2437 MHz)

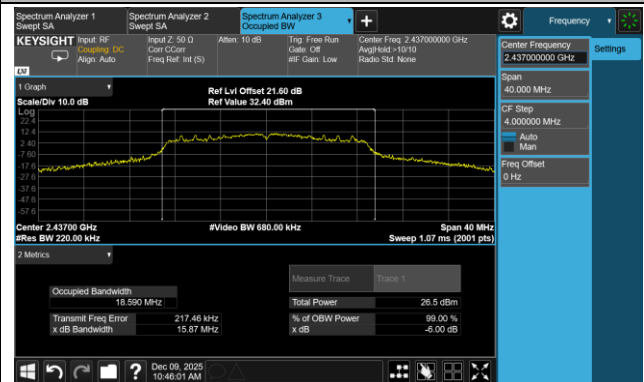

Channel 11 (2462 MHz)

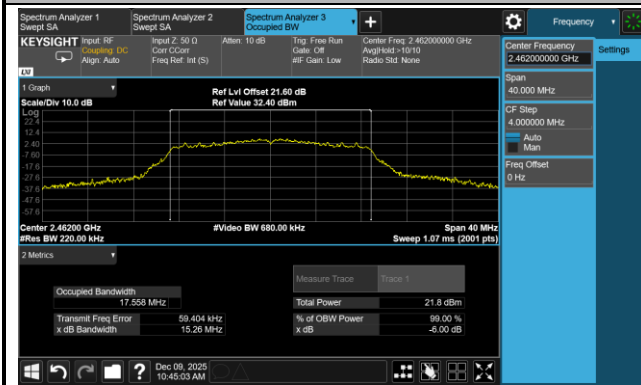

A.3 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Jeff Yang
Test Date	2025-12-09		

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)
11b	1 Mbps	01	2412	18.25	≤ 30.00
11b	1 Mbps	06	2437	17.11	≤ 30.00
11b	1 Mbps	11	2462	16.92	≤ 30.00
11g	6 Mbps	01	2412	15.02	≤ 30.00
11g	6 Mbps	02	2417	15.97	≤ 30.00
11g	6 Mbps	03	2422	16.93	≤ 30.00
11g	6 Mbps	06	2437	19.75	≤ 30.00
11g	6 Mbps	08	2447	17.05	≤ 30.00
11g	6 Mbps	09	2452	16.10	≤ 30.00
11g	6 Mbps	10	2457	16.06	≤ 30.00
11g	6 Mbps	11	2462	14.02	≤ 30.00
11n-HT20	MCS0	01	2412	14.04	≤ 30.00
11n-HT20	MCS0	02	2417	16.72	≤ 30.00
11n-HT20	MCS0	06	2437	19.64	≤ 30.00
11n-HT20	MCS0	10	2457	16.75	≤ 30.00
11n-HT20	MCS0	11	2462	13.98	≤ 30.00

A.4 Power Spectral Density Test Result

Test Site	WZ-SR5	Test Engineer	Herman Liu
Test Date	2025-12-09 ~ 2025-12-31		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/10 kHz)	Duty Cycle (%)	10×log (1/x)	Total PSD (dBm/10 kHz)	Limit (dBm/3 kHz)
11b	1 Mbps	01	2412	-7.623	98.83	0.05	-7.62	≤ 8.00
11b	1 Mbps	06	2437	-9.888	98.83	0.05	-9.89	≤ 8.00
11b	1 Mbps	11	2462	-8.889	98.83	0.05	-8.89	≤ 8.00
11g	6 Mbps	01	2412	-10.229	91.90	0.37	-9.86	≤ 8.00
11g	6 Mbps	06	2437	-5.668	91.90	0.37	-5.30	≤ 8.00
11g	6 Mbps	11	2462	-11.063	91.90	0.37	-10.70	≤ 8.00
11n-HT20	MCS0	01	2412	-12.563	91.06	0.41	-12.16	≤ 8.00
11n-HT20	MCS0	06	2437	-7.724	91.06	0.41	-7.32	≤ 8.00
11n-HT20	MCS0	11	2462	-12.334	91.06	0.41	-11.93	≤ 8.00


Note:

When Duty Cycle < 98%, Total PSD (dBm/MHz) = AVPSD (dBm/MHz) + 10 × log (1/Duty Cycle).

When Duty Cycle ≥ 98%, Total PSD (dBm/MHz) = AVPSD (dBm/MHz).

802.11b - AVGPSP


Channel 01 (2412 MHz)

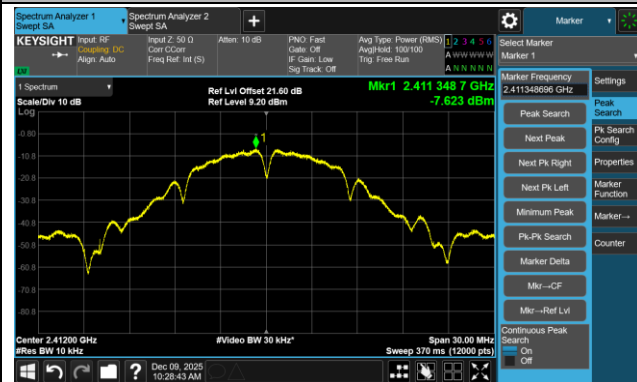

Channel 06 (2437 MHz)




Channel 11 (2462 MHz)

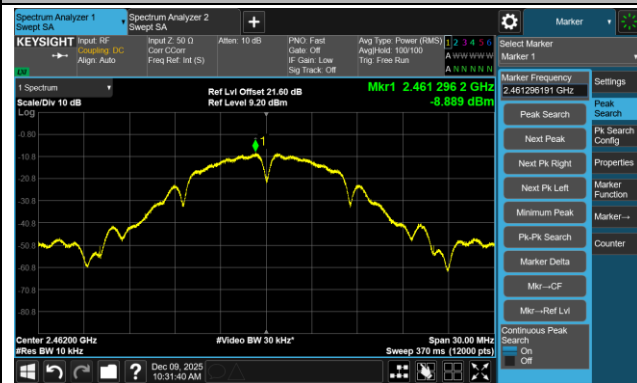


802.11g - AVGPSP


Channel 01 (2412 MHz)

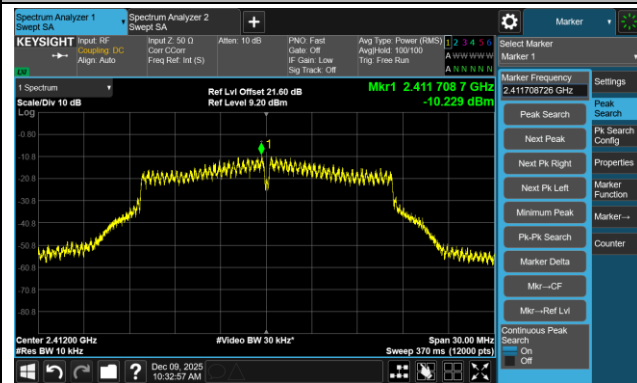

Channel 06 (2437 MHz)

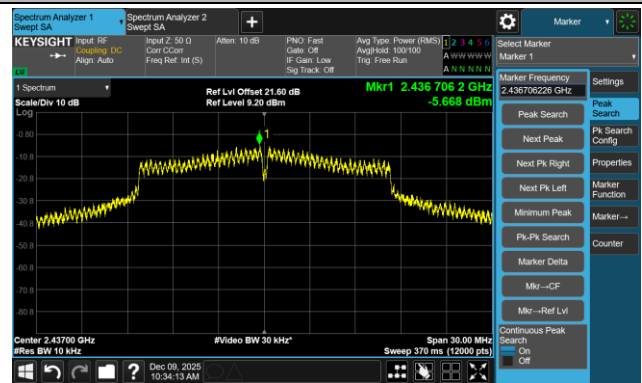


Channel 11 (2462 MHz)

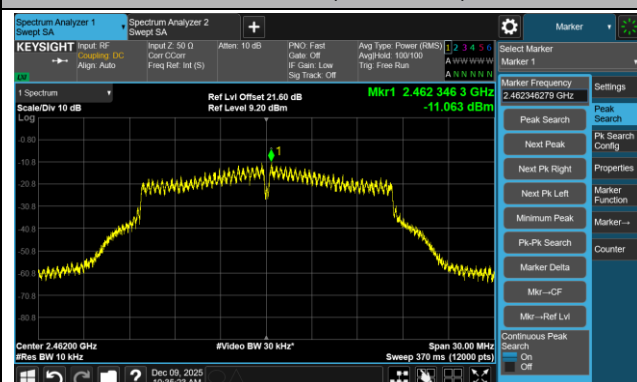


802.11n-HT20 - AVGPSD


Channel 01 (2412 MHz)

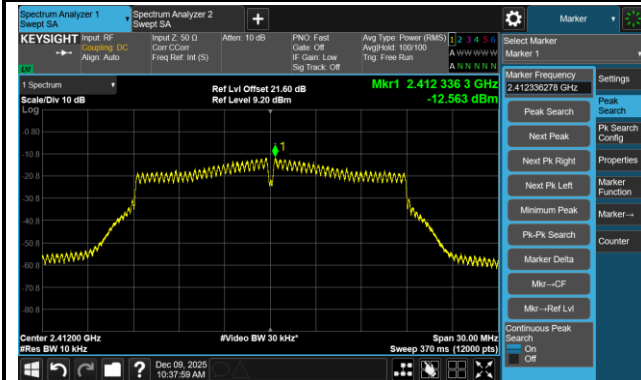

Channel 06 (2437 MHz)

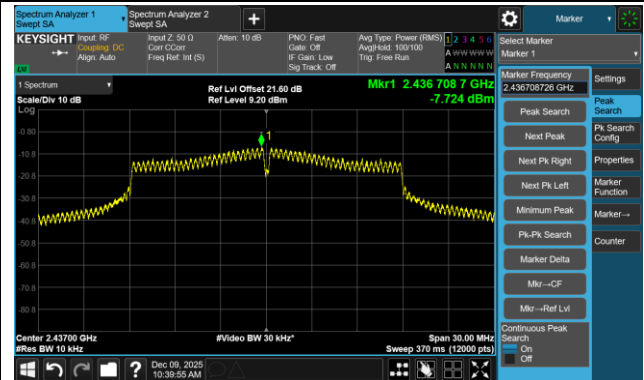

Channel 11 (2462 MHz)

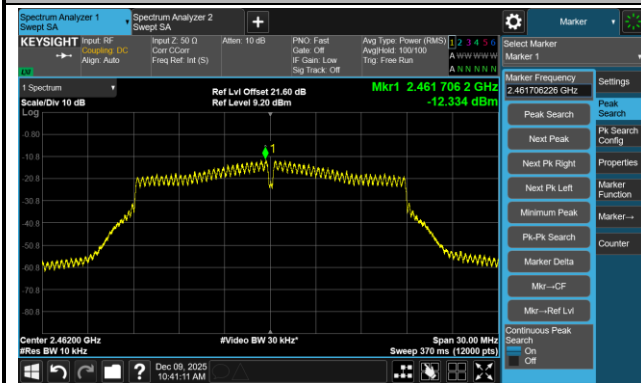

A.5 Conducted Band Edge and Out-of-Band Emissions Test Result


Test Site	WZ-SR5	Test Engineer	Herman Liu
Test Date	2025-12-09 ~ 2025-12-31		

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit
11b	1 Mbps	01	2412	30 dBc
11b	1 Mbps	06	2437	30 dBc
11b	1 Mbps	11	2462	30 dBc
11g	6 Mbps	01	2412	30 dBc
11g	6 Mbps	06	2437	30 dBc
11g	6 Mbps	11	2462	30 dBc
11n-HT20	MCS0	01	2412	30 dBc
11n-HT20	MCS0	06	2437	30 dBc
11n-HT20	MCS0	11	2462	30 dBc


802.11b Out-of-Band Emissions

Channel 01 (2412 MHz)


Reference Level

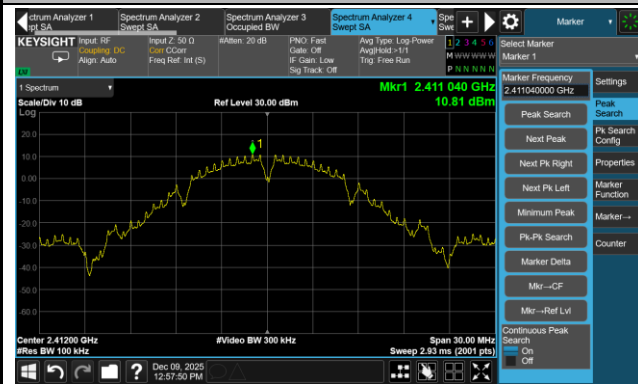

Low Band Edge

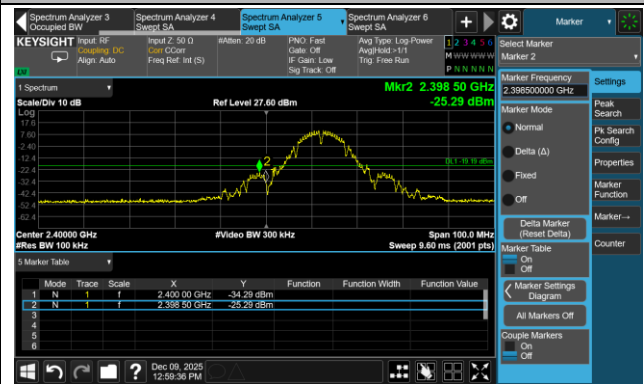


Spurious Emission

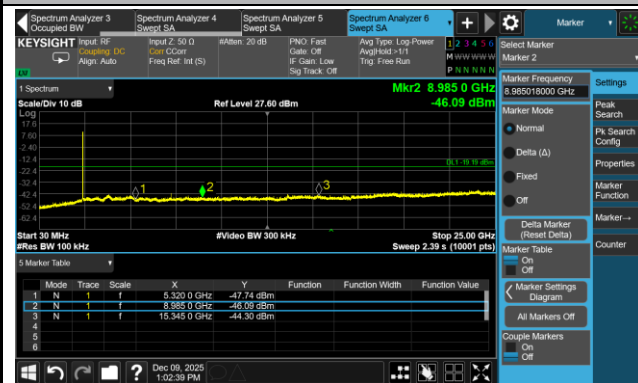


Channel 06 (2437 MHz)

Reference Level

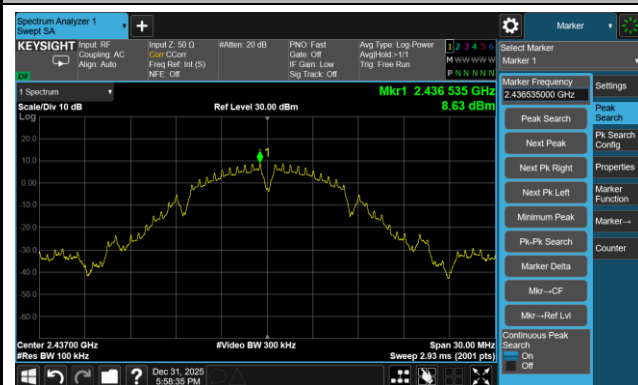


Spurious Emission

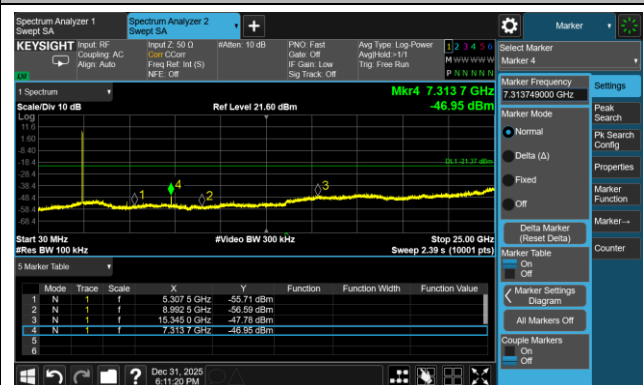


802.11b Out-of-Band Emissions

Channel 11 (2462 MHz)


Reference Level

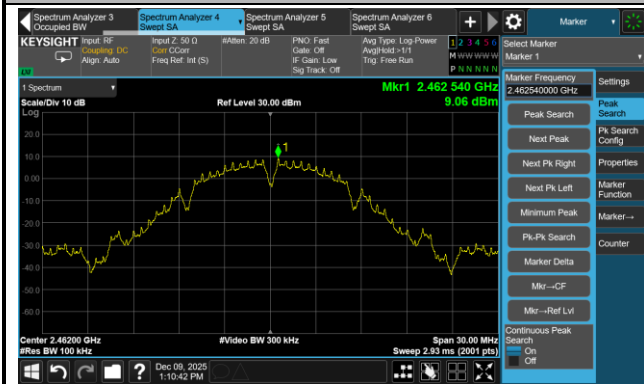

High Band Edge

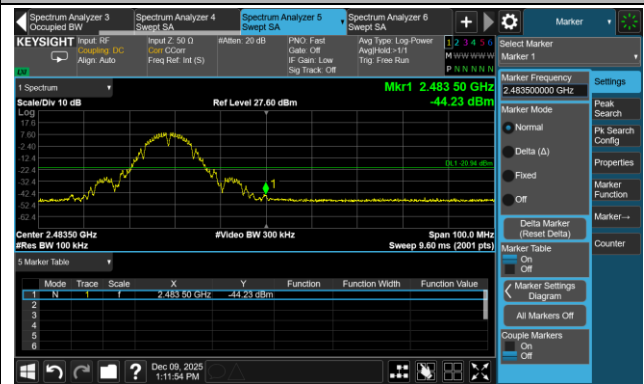


Spurious Emission

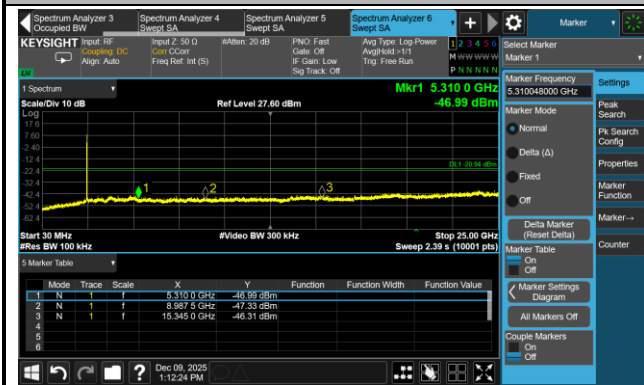


802.11g Out-of-Band Emissions

Channel 01 (2412 MHz)


Reference Level

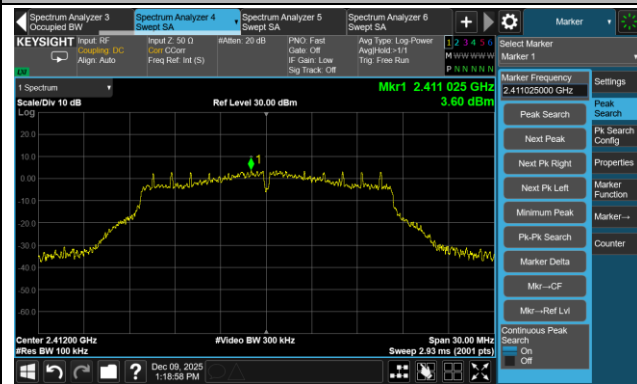

Low Band Edge

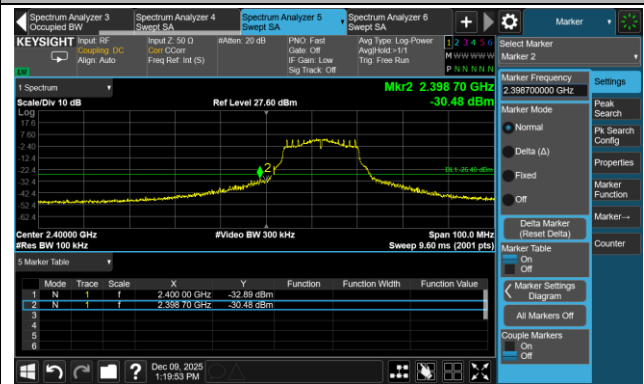


Spurious Emission

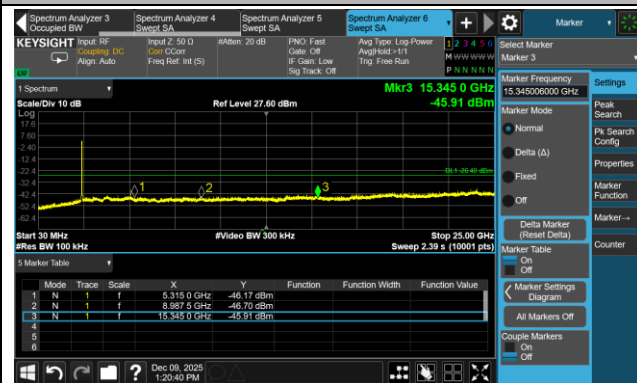


Channel 06 (2437 MHz)

Reference Level

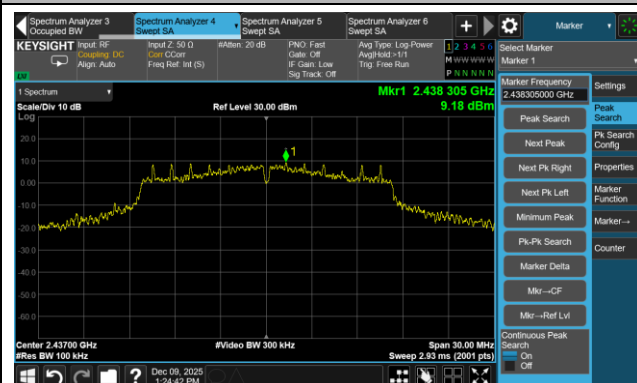


Spurious Emission

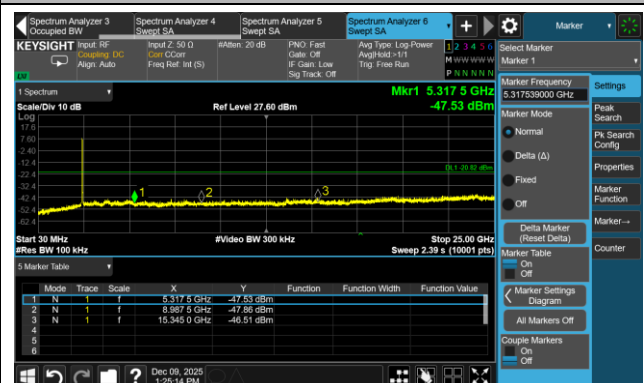


802.11g Out-of-Band Emissions

Channel 11 (2462 MHz)


Reference Level

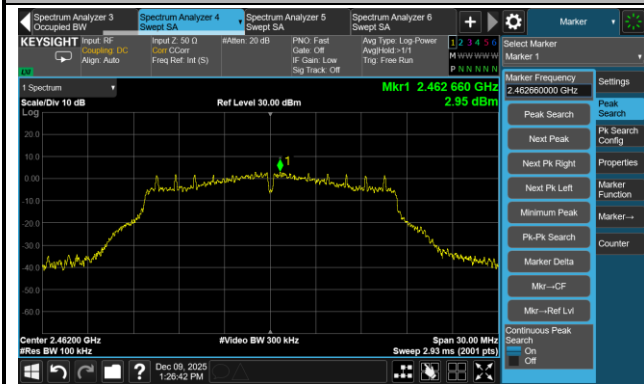

High Band Edge

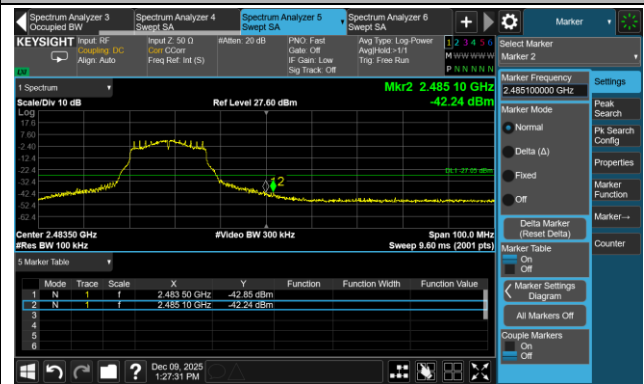


Spurious Emission

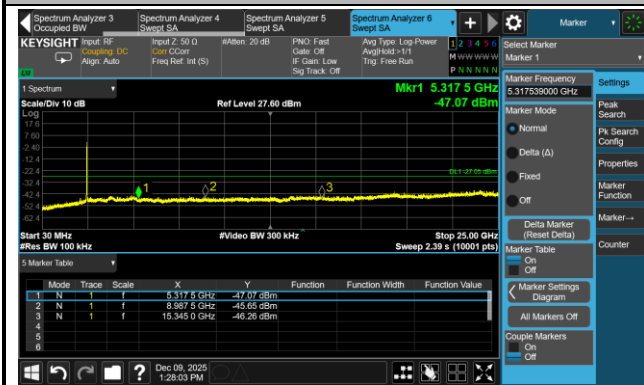


802.11n-HT20 Out-of-Band Emissions

Channel 01 (2412 MHz)


Reference Level

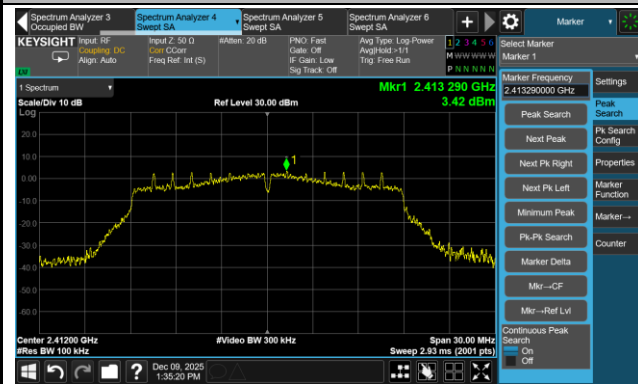

Low Band Edge

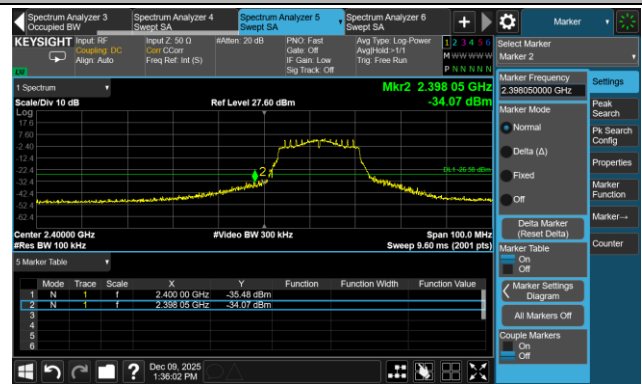

Spurious Emission

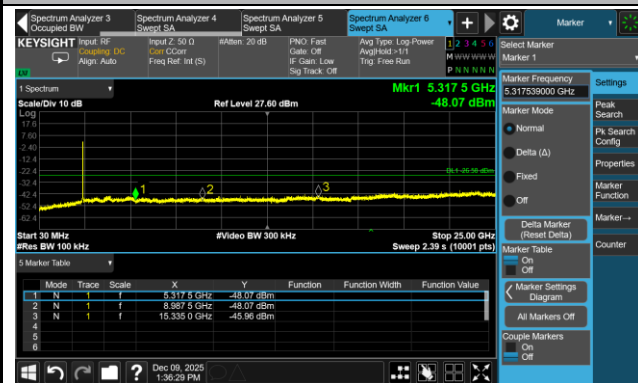

Channel 06 (2437 MHz)

Reference Level




Spurious Emission




802.11n-HT20 Out-of-Band Emissions

Channel 11 (2462 MHz)


Reference Level

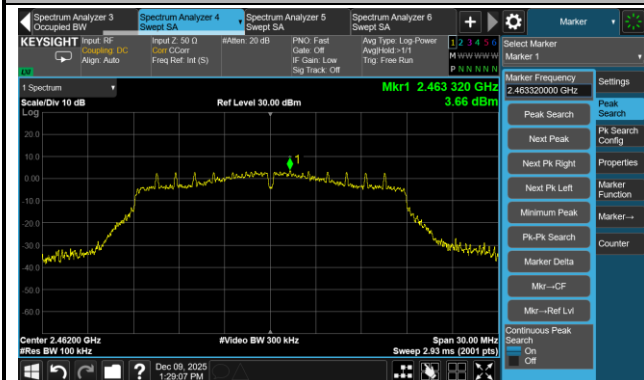

High Band Edge

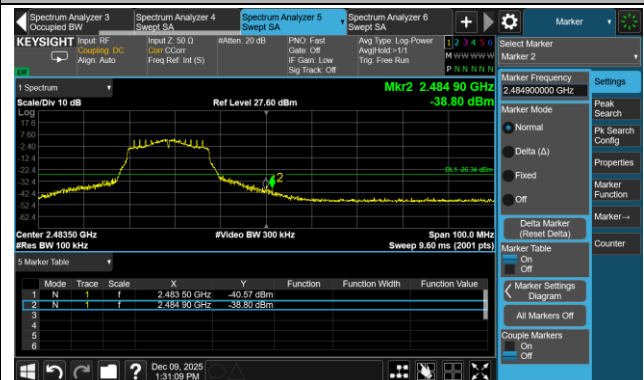

Spurious Emission

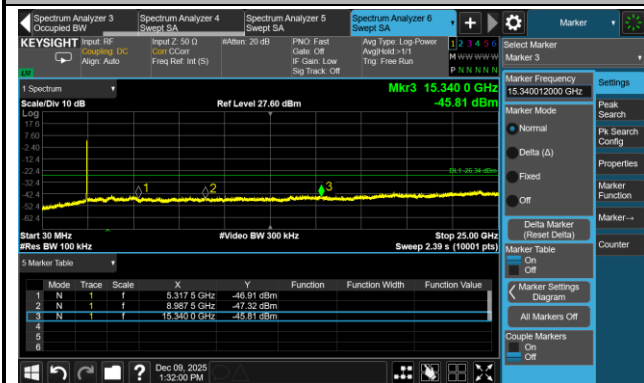

A.6 Radiated Spurious Emissions Test Result

Test Site	WZ-AC1	Test Engineer	Ajin Fan
Test Date	2025-12-22	Test Mode	802.11b
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	9365.70	36.24	13.77	50.00	74.00	-24.00	Peak	Horizontal
	11922.50	25.79	13.28	39.06	54.00	-14.94	Average	Horizontal
	11922.50	38.21	13.28	51.49	74.00	-22.51	Peak	Horizontal
	17993.20	25.74	24.10	49.84	54.00	-4.16	Average	Horizontal
	17993.20	35.55	24.10	59.65	74.00	-14.35	Peak	Horizontal
	9078.40	33.58	12.62	46.20	74.00	-27.80	Peak	Vertical
	11580.80	36.57	13.90	50.47	74.00	-23.53	Peak	Vertical
	17994.90	25.92	24.12	50.04	54.00	-3.96	Average	Vertical
	17994.90	36.13	24.12	60.25	74.00	-13.75	Peak	Vertical
06	7312.10	41.24	9.03	50.28	54.00	-3.72	Average	Horizontal
	7312.10	42.68	9.03	51.71	74.00	-22.29	Peak	Horizontal
	11597.80	36.20	13.78	49.99	74.00	-24.01	Peak	Horizontal
	17977.90	26.12	23.82	49.94	54.00	-4.06	Average	Horizontal
	17977.90	35.30	23.82	59.12	74.00	-14.88	Peak	Horizontal
	7310.40	41.72	9.01	50.72	74.00	-23.28	Peak	Vertical
	11772.90	36.49	13.23	49.72	74.00	-24.28	Peak	Vertical
	17986.40	25.13	24.03	49.16	54.00	-4.84	Average	Vertical
	17986.40	34.75	24.03	58.79	74.00	-15.21	Peak	Vertical
11	7386.90	40.13	9.02	49.15	54.00	-4.85	Average	Horizontal
	7386.90	42.05	9.02	51.07	74.00	-22.93	Peak	Horizontal
	11290.10	36.08	14.26	50.34	74.00	-23.66	Peak	Horizontal
	17988.10	24.23	24.05	48.28	54.00	-5.72	Average	Horizontal
	17988.10	34.71	24.05	58.76	74.00	-15.24	Peak	Horizontal
	7385.20	38.68	9.05	47.73	54.00	-6.27	Average	Vertical
	7385.20	43.12	9.05	52.17	74.00	-21.83	Peak	Vertical
	11109.90	35.16	14.43	49.59	74.00	-24.41	Peak	Vertical
	17989.80	23.98	24.07	48.05	54.00	-5.95	Average	Vertical
	17989.80	34.79	24.07	58.86	74.00	-15.14	Peak	Vertical



Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Ajin Fan
Test Date	2025-12-22	Test Mode	802.11g
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	8191.00	34.24	10.03	44.27	74.00	-29.73	Peak	Horizontal
	11285.00	35.99	14.27	50.26	74.00	-23.74	Peak	Horizontal
	17979.60	23.97	23.88	47.85	54.00	-6.15	Average	Horizontal
	17979.60	34.80	23.88	58.68	74.00	-15.32	Peak	Horizontal
	8228.40	35.48	10.05	45.53	74.00	-28.47	Peak	Vertical
	11359.80	36.19	14.25	50.44	74.00	-23.56	Peak	Vertical
	17988.10	24.12	24.05	48.17	54.00	-5.83	Average	Vertical
	17988.10	34.54	24.05	58.59	74.00	-15.41	Peak	Vertical
06	7307.00	38.85	8.95	47.80	54.00	-6.20	Average	Horizontal
	7307.00	45.86	8.95	54.80	74.00	-19.20	Peak	Horizontal
	11626.70	36.48	13.72	50.20	74.00	-23.80	Peak	Horizontal
	17988.10	24.89	24.05	48.94	54.00	-5.06	Average	Horizontal
	17988.10	35.24	24.05	59.29	74.00	-14.71	Peak	Horizontal
	7305.30	36.57	8.93	45.50	54.00	-8.50	Average	Vertical
	7305.30	43.86	8.93	52.79	74.00	-21.21	Peak	Vertical
	11079.30	36.03	14.50	50.53	74.00	-23.47	Peak	Vertical
	17986.40	25.26	24.03	49.29	54.00	-4.71	Average	Vertical
	17986.40	35.23	24.03	59.27	74.00	-14.73	Peak	Vertical
11	7390.30	41.55	8.96	50.51	74.00	-23.49	Peak	Horizontal
	11349.60	36.20	14.23	50.42	74.00	-23.58	Peak	Horizontal
	17981.30	24.76	23.94	48.70	54.00	-5.30	Average	Horizontal
	17981.30	35.74	23.94	59.68	74.00	-14.32	Peak	Horizontal
	9345.30	35.32	13.55	48.87	74.00	-25.13	Peak	Vertical
	11115.00	35.50	14.43	49.93	74.00	-24.07	Peak	Vertical
	17989.80	23.87	24.07	47.94	54.00	-6.06	Average	Vertical
	17989.80	34.67	24.07	58.74	74.00	-15.26	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Ajin Fan
Test Date	2025-12-22	Test Mode	802.11n-HT20
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	11519.60	36.31	14.05	50.35	74.00	-23.65	Peak	Horizontal
	15727.10	36.70	12.81	49.51	74.00	-24.49	Peak	Horizontal
	17989.80	24.53	24.07	48.60	54.00	-5.40	Average	Horizontal
	17989.80	34.93	24.07	58.99	74.00	-15.01	Peak	Horizontal
	10854.90	34.95	15.01	49.97	74.00	-24.03	Peak	Vertical
	15402.40	35.21	13.61	48.81	74.00	-25.19	Peak	Vertical
	17991.50	24.78	24.08	48.86	54.00	-5.14	Average	Vertical
	17991.50	34.87	24.08	58.96	74.00	-15.04	Peak	Vertical
06	7317.20	38.97	9.11	48.08	54.00	-5.92	Average	Horizontal
	7317.20	44.85	9.11	53.96	74.00	-20.04	Peak	Horizontal
	11281.60	36.07	14.24	50.32	74.00	-23.68	Peak	Horizontal
	17870.80	22.22	22.36	44.58	54.00	-9.42	Average	Horizontal
	17870.80	35.25	22.36	57.61	74.00	-16.39	Peak	Horizontal
	7313.80	36.48	9.06	45.54	54.00	-8.46	Average	Vertical
	7313.80	43.92	9.06	52.97	74.00	-21.03	Peak	Vertical
	11451.60	35.65	14.20	49.85	74.00	-24.15	Peak	Vertical
	17989.80	24.67	24.07	48.74	54.00	-5.26	Average	Vertical
	17989.80	34.44	24.07	58.51	74.00	-15.49	Peak	Vertical
11	7383.50	41.45	9.08	50.53	74.00	-23.47	Peak	Horizontal
	11186.40	36.04	14.29	50.32	74.00	-23.68	Peak	Horizontal
	17996.60	25.24	24.13	49.37	54.00	-4.63	Average	Horizontal
	17996.60	35.20	24.13	59.33	74.00	-14.67	Peak	Horizontal
	7383.50	41.81	9.08	50.89	74.00	-23.11	Peak	Vertical
	11516.20	36.12	14.07	50.19	74.00	-23.81	Peak	Vertical
	17984.70	24.96	24.02	48.98	54.00	-5.02	Average	Vertical
	17984.70	34.83	24.02	58.84	74.00	-15.16	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1 GHz:

Site	WZ-AC2	Test Date	2025-12-24
Temperature	24.6 °C	Humidity	34.6%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2437 MHz		

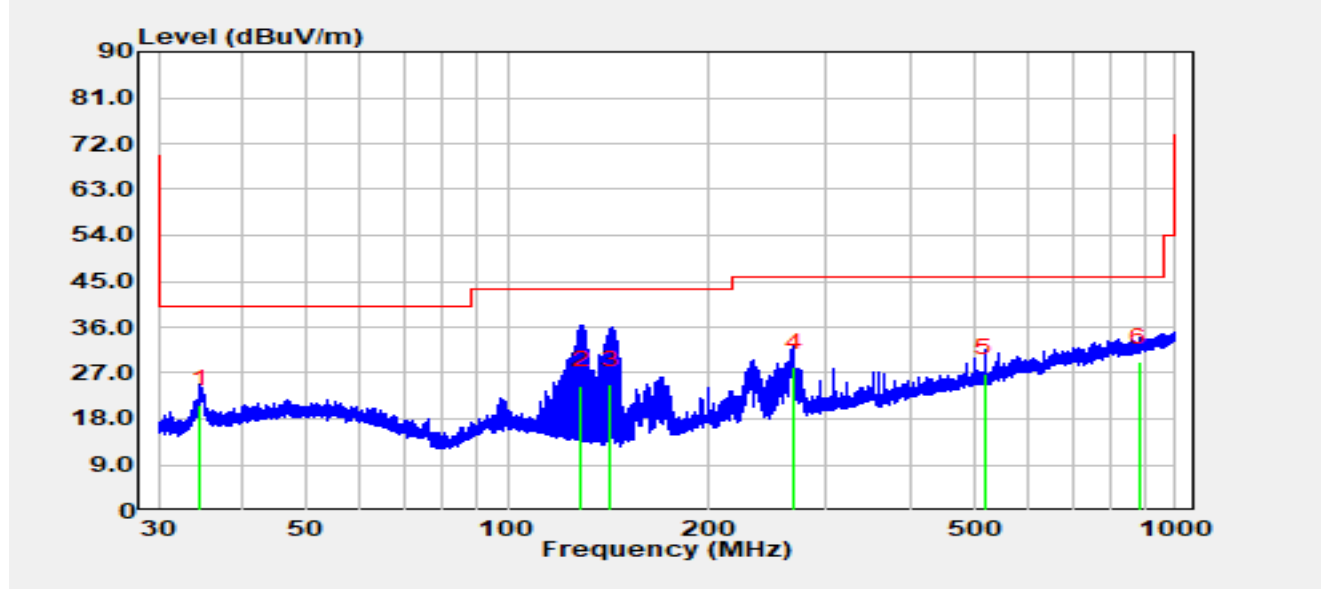


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		34.67	3.28	17.53	20.81	-19.19	40.00	QP
2		128.88	8.64	15.92	24.56	-18.94	43.50	QP
3		142.78	9.40	15.24	24.64	-18.86	43.50	QP
4		268.11	7.69	20.34	28.03	-17.97	46.00	QP
5		517.61	1.26	25.68	26.94	-19.06	46.00	QP
6	*	881.72	-2.31	31.48	29.17	-16.83	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9 kHz to 30 MHz and 18 GHz to 25 GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	WZ-AC2	Test Date	2025-12-24
Temperature	24.6 °C	Humidity	34.6%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Jerry Lu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2437 MHz		

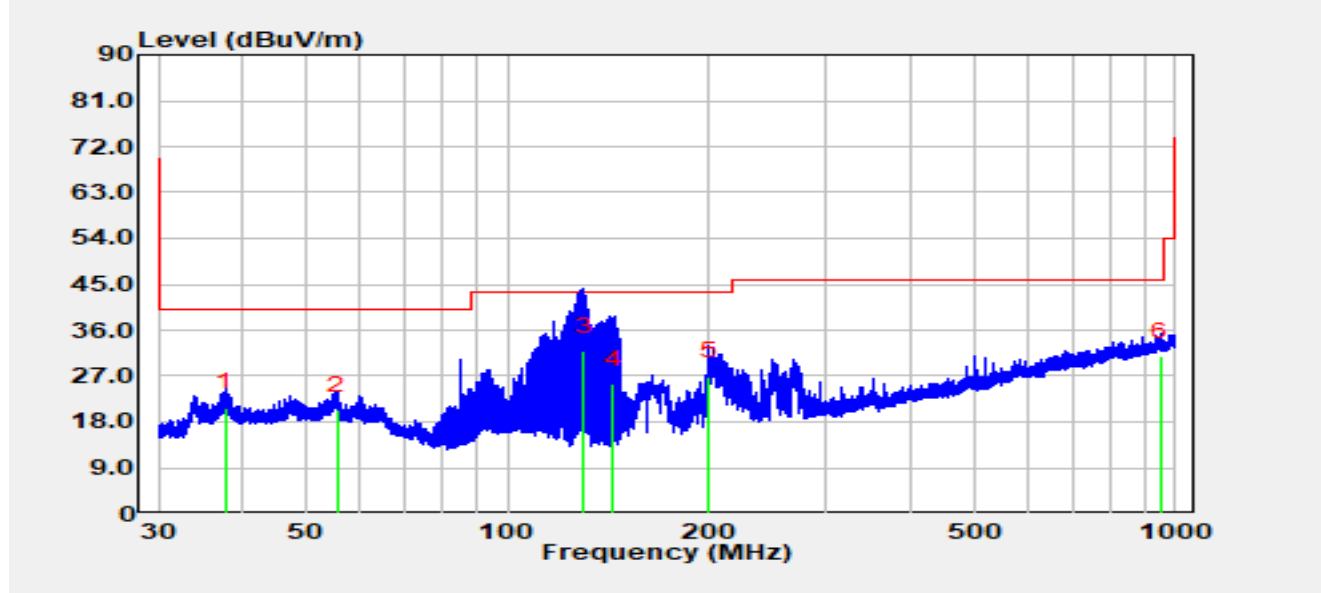


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		37.73	2.25	18.61	20.86	-19.14	40.00	QP
2		55.45	0.14	20.22	20.36	-19.64	40.00	QP
3	*	129.89	16.10	15.67	31.77	-11.73	43.50	QP
4		143.98	10.10	15.25	25.35	-18.15	43.50	QP
5		200.06	7.52	19.35	26.87	-16.63	43.50	QP
6		949.76	-1.22	32.10	30.88	-15.12	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9 kHz to 30 MHz and 18 GHz to 25 GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11b at 2412 MHz		

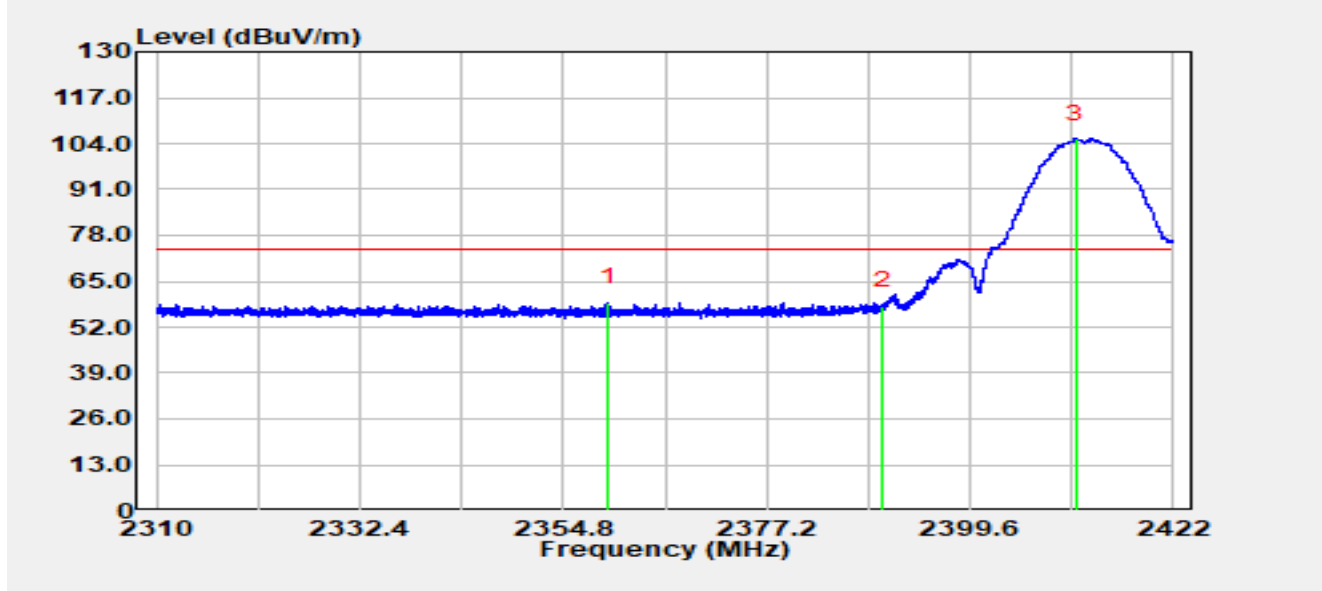


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2359.77	27.11	32.00	59.10	-14.90	74.00	Peak
2		2390.00	25.95	31.95	57.90	-16.10	74.00	Peak
3		2411.28	73.49	31.88	105.37	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11b at 2412 MHz		

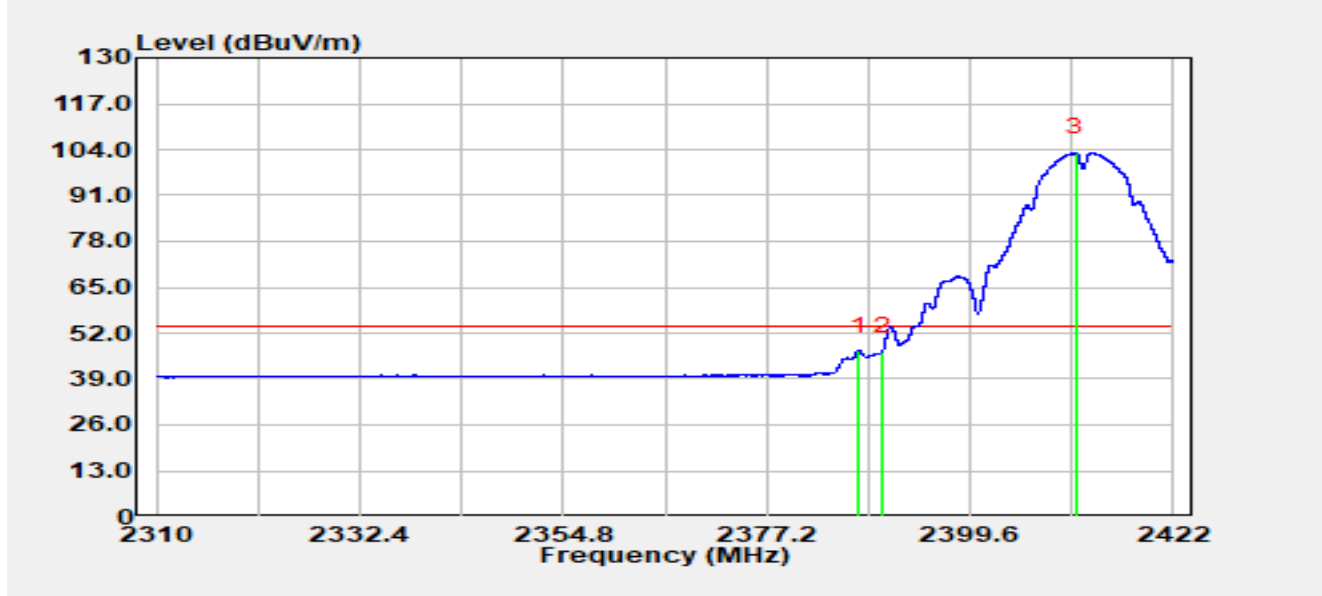


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.41	14.97	31.96	46.93	-7.07	54.00	Average
2		2390.00	14.87	31.95	46.81	-7.19	54.00	Average
3		2411.26	71.25	31.88	103.13	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11b at 2412 MHz		

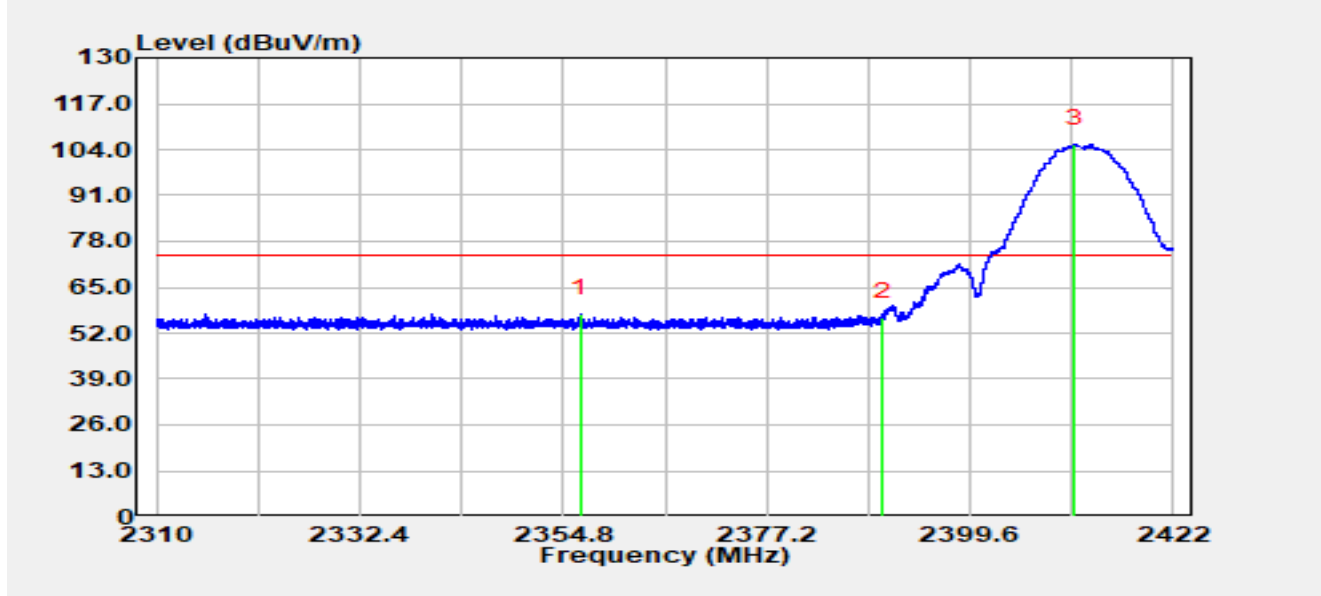


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	2356.67	25.42	32.01	57.43	-16.57	74.00	Peak
2		2390.00	24.49	31.95	56.44	-17.56	74.00	Peak
3		2411.14	73.62	31.88	105.50	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11b at 2412 MHz		

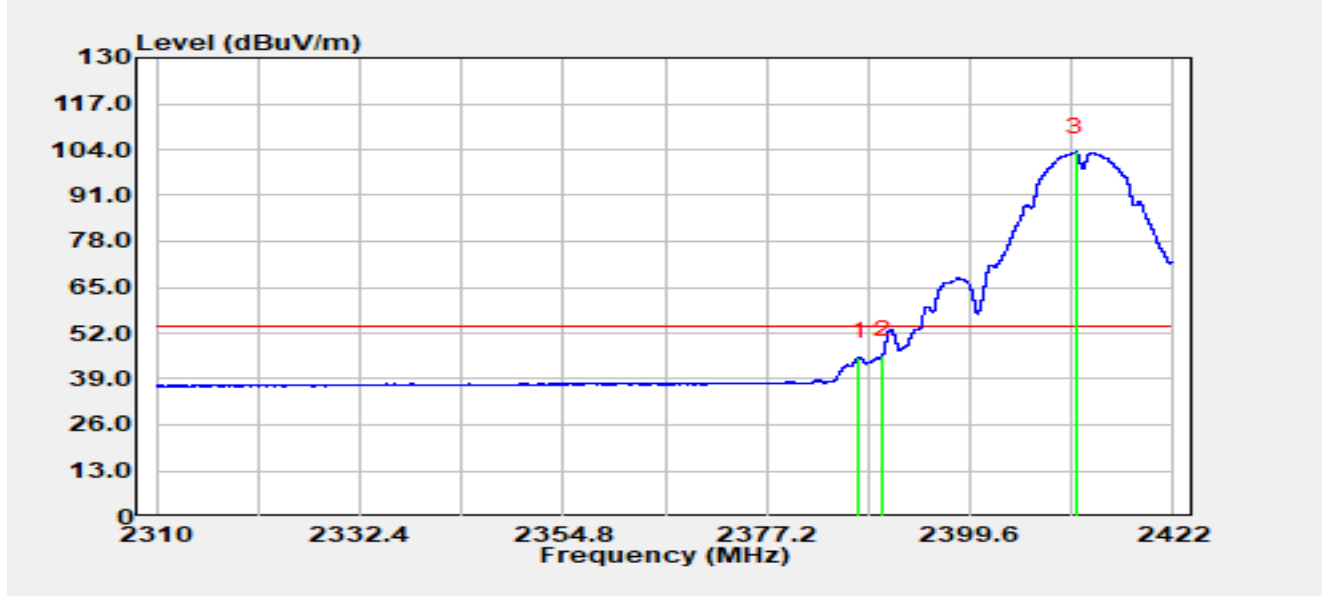


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2387.31	13.28	31.96	45.24	-8.76	54.00	Average
2	*	2390.00	13.79	31.95	45.73	-8.27	54.00	Average
3		2411.25	71.41	31.88	103.29	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11b at 2462 MHz		

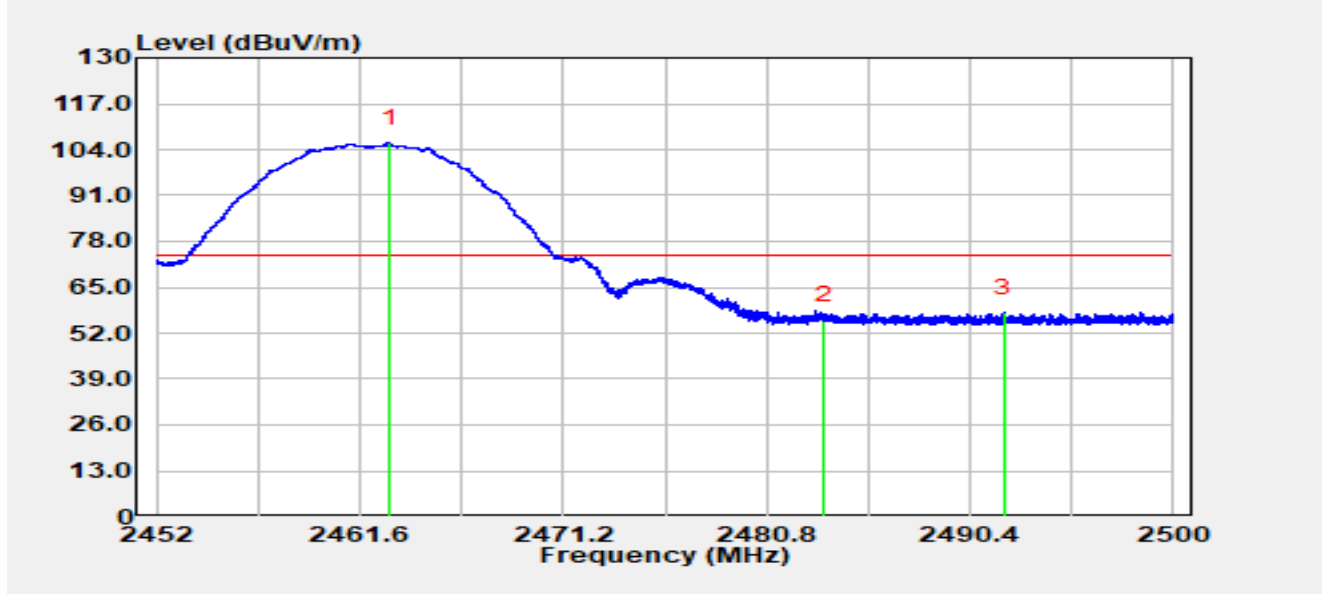


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.00	73.96	31.83	105.78	N/A	N/A	Peak
2		2483.50	23.68	31.81	55.49	-18.51	74.00	Peak
3	*	2491.97	26.02	31.83	57.85	-16.15	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11b at 2462 MHz		

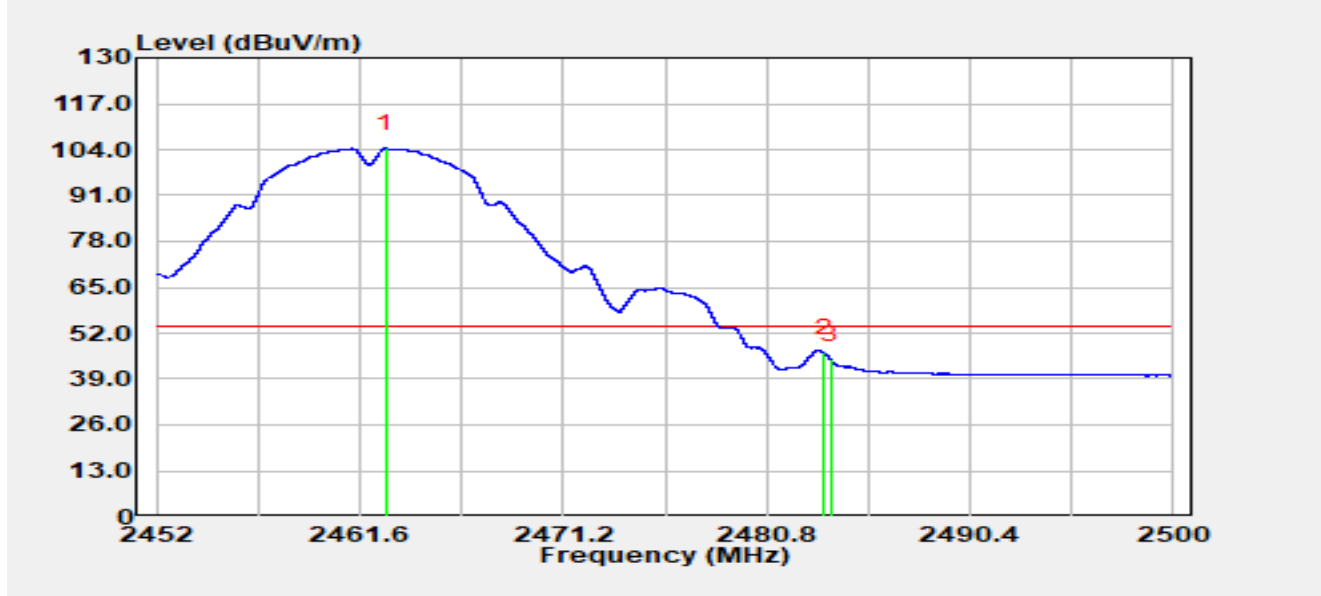


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.81	72.47	31.83	104.30	N/A	N/A	Average
2	*	2483.50	14.55	31.81	46.36	-7.64	54.00	Average
3		2483.81	12.71	31.81	44.52	-9.48	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11b at 2462 MHz		

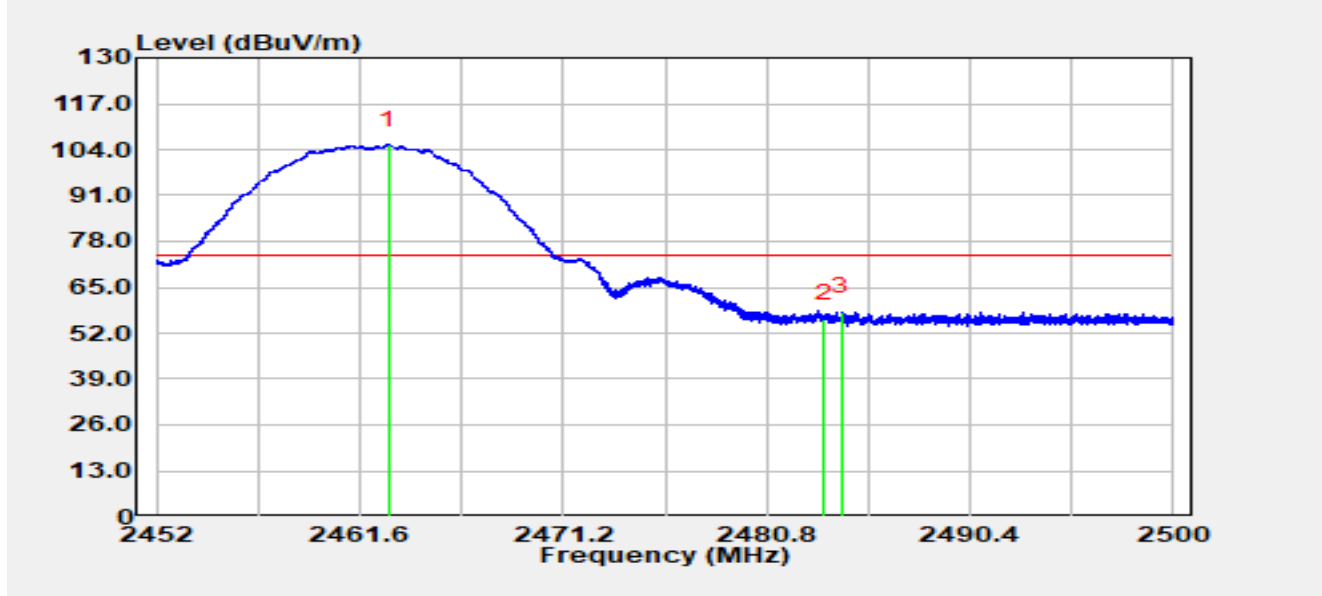


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.95	73.48	31.83	105.30	N/A	N/A	Peak
2		2483.50	24.26	31.81	56.07	-17.93	74.00	Peak
3	*	2484.33	26.18	31.81	57.99	-16.01	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11b at 2462 MHz		

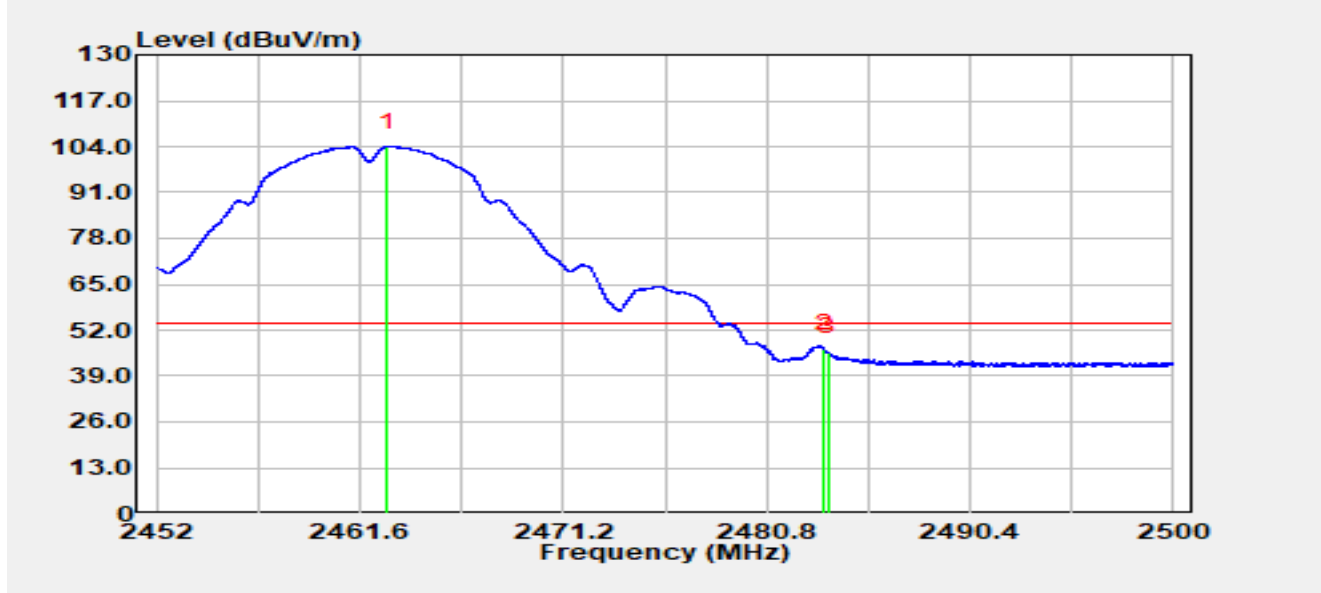


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.90	72.16	31.83	103.99	N/A	N/A	Average
2	*	2483.50	14.84	31.81	46.65	-7.35	54.00	Average
3		2483.70	14.00	31.81	45.81	-8.19	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2412 MHz		

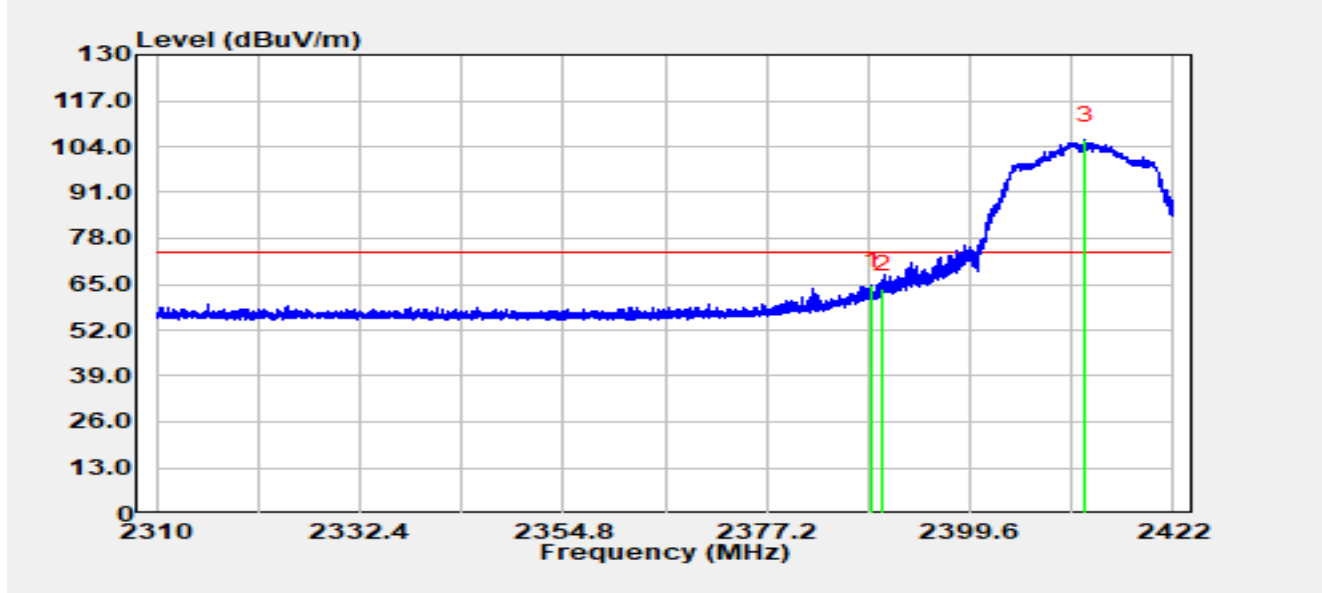


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.80	32.63	31.95	64.58	-9.42	74.00	Peak
2		2390.00	31.61	31.95	63.56	-10.44	74.00	Peak
3		2412.35	74.06	31.87	105.94	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2412 MHz		

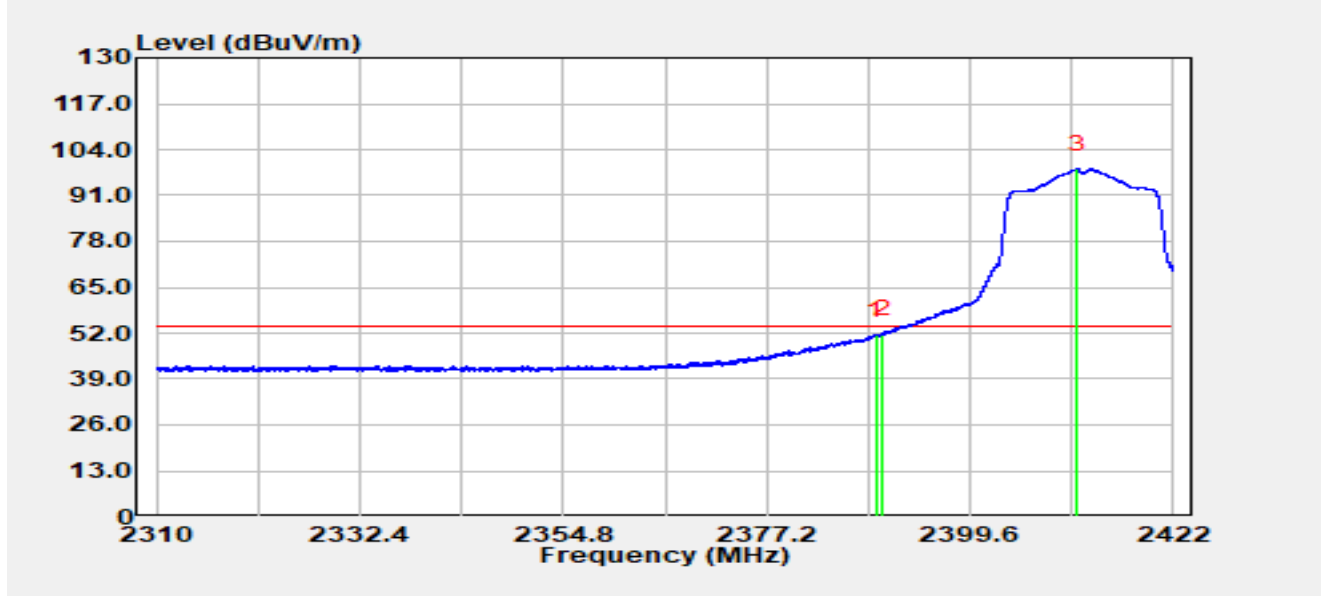


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2389.18	19.54	31.95	51.49	-2.51	54.00	Average
2	*	2390.00	19.61	31.95	51.56	-2.44	54.00	Average
3		2411.36	66.63	31.88	98.51	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2412 MHz		

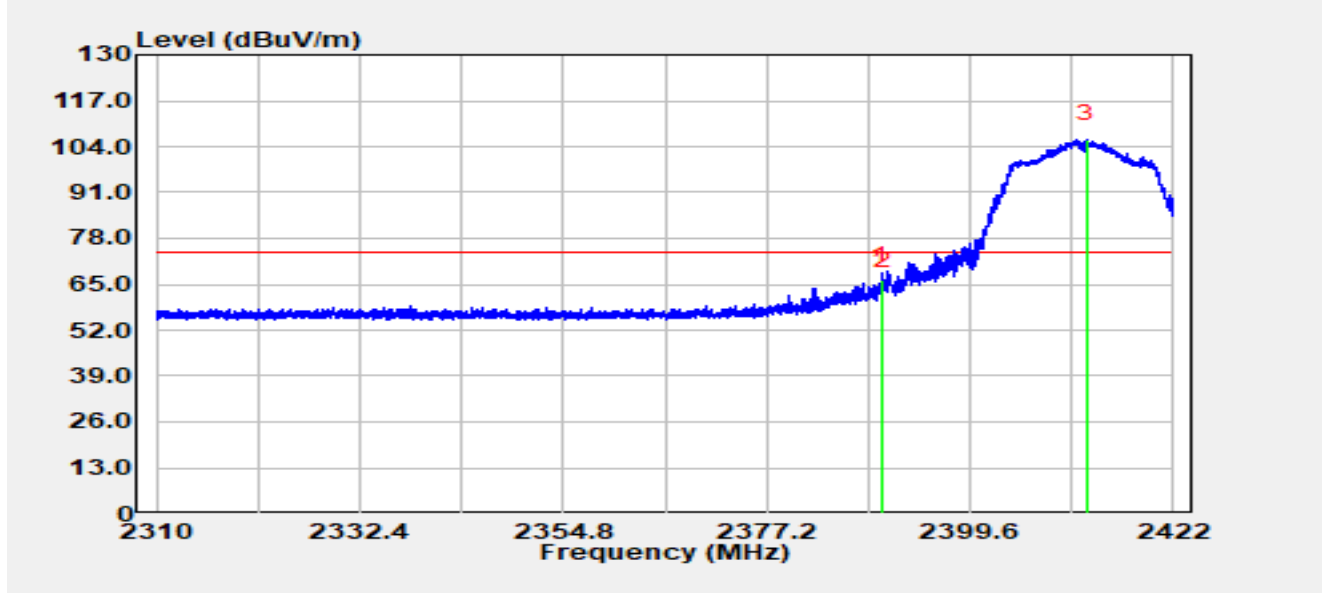


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.77	34.09	31.95	66.04	-7.96	74.00	Peak
2		2390.00	32.76	31.95	64.71	-9.29	74.00	Peak
3		2412.38	74.26	31.87	106.13	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2412 MHz		

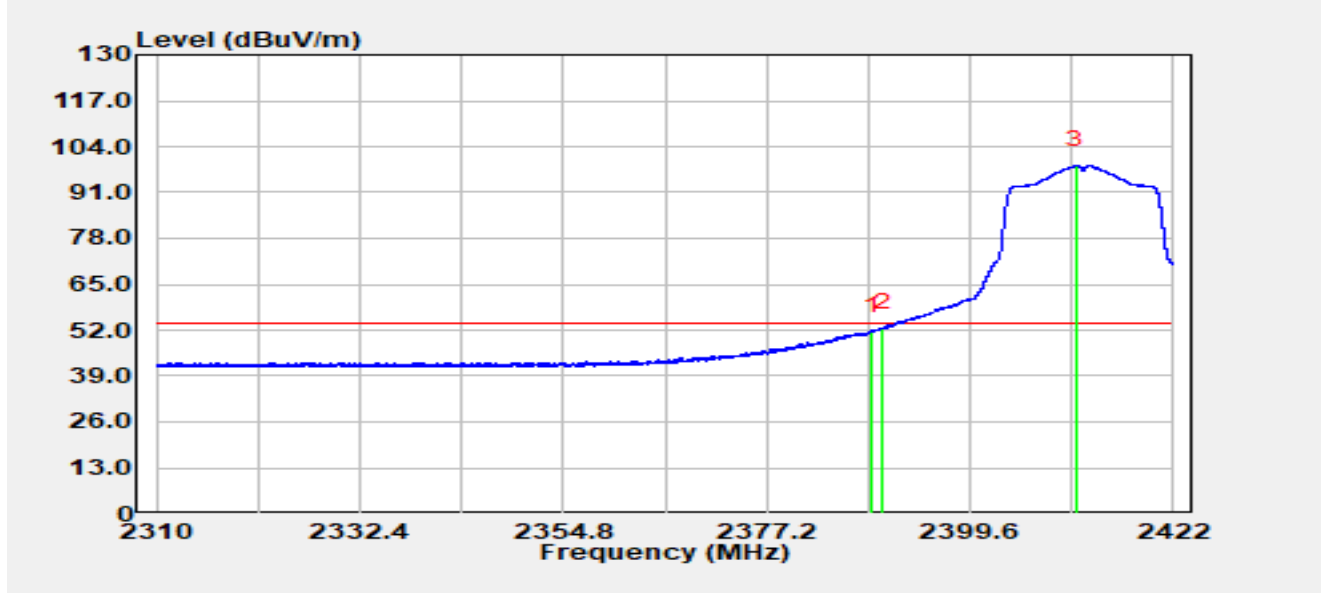


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2388.83	19.75	31.95	51.70	-2.30	54.00	Average
2	*	2390.00	20.58	31.95	52.52	-1.48	54.00	Average
3		2411.29	66.83	31.88	98.70	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2417 MHz		

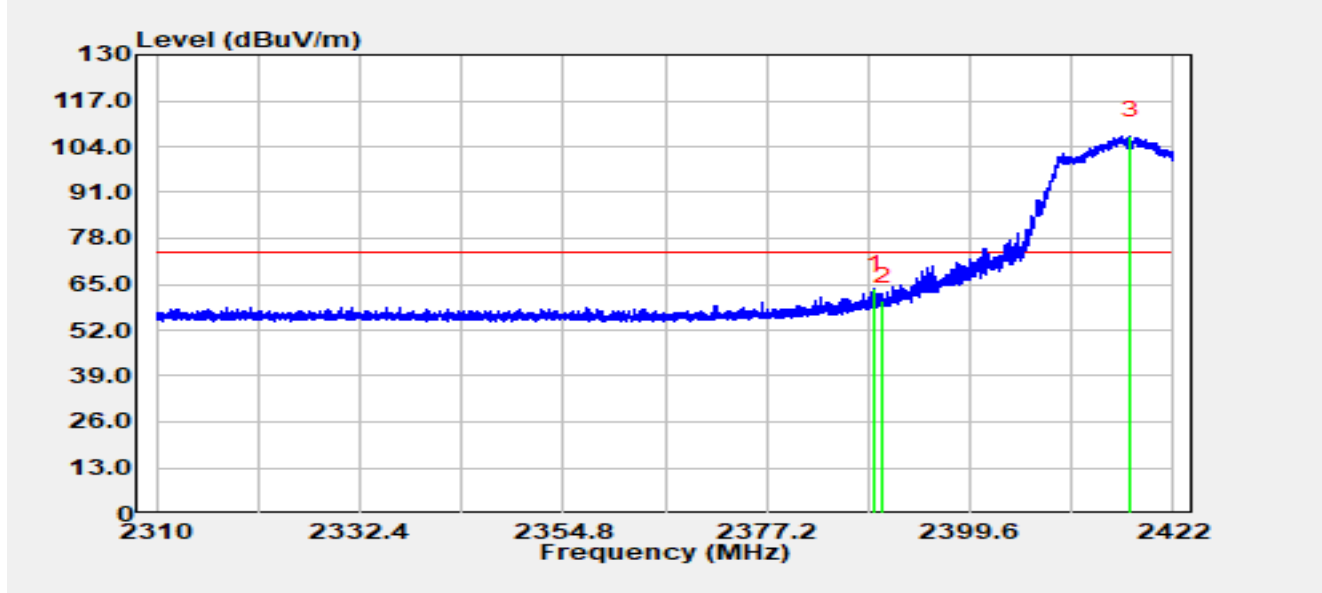


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.16	31.59	31.95	63.54	-10.46	74.00	Peak
2		2390.00	28.28	31.95	60.23	-13.77	74.00	Peak
3		2417.25	75.21	31.86	107.08	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2417 MHz		

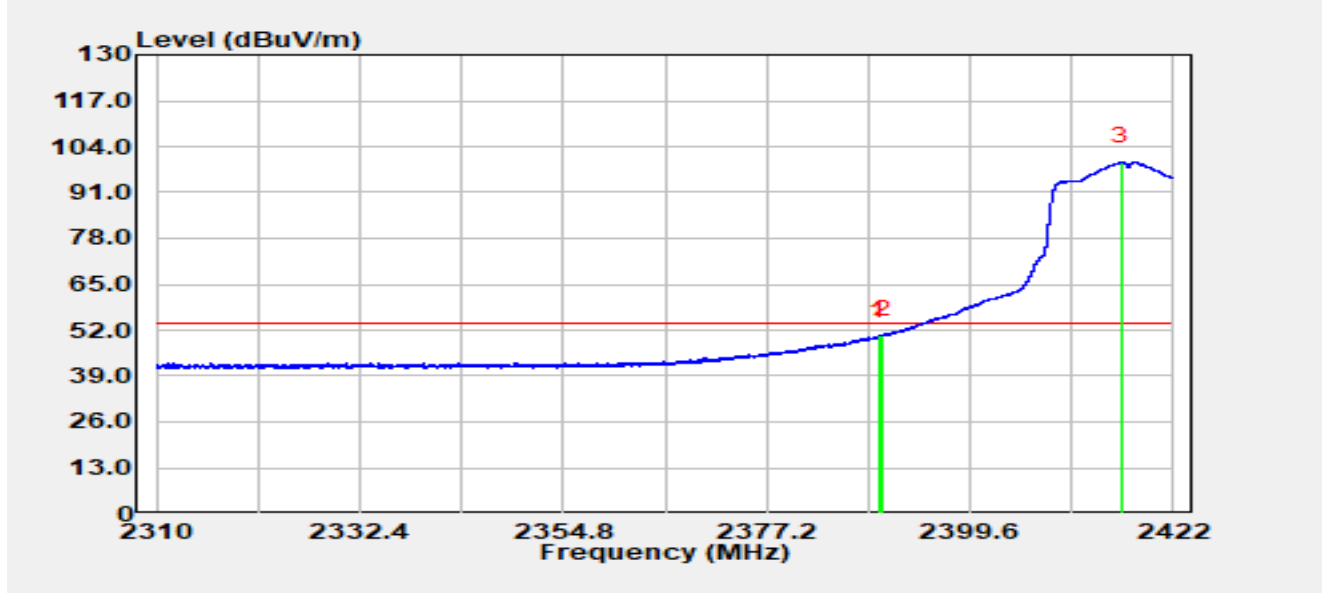


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2389.59	18.38	31.95	50.33	-3.67	54.00	Average
2	*	2390.00	18.69	31.95	50.63	-3.37	54.00	Average
3		2416.30	67.95	31.86	99.81	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2417 MHz		

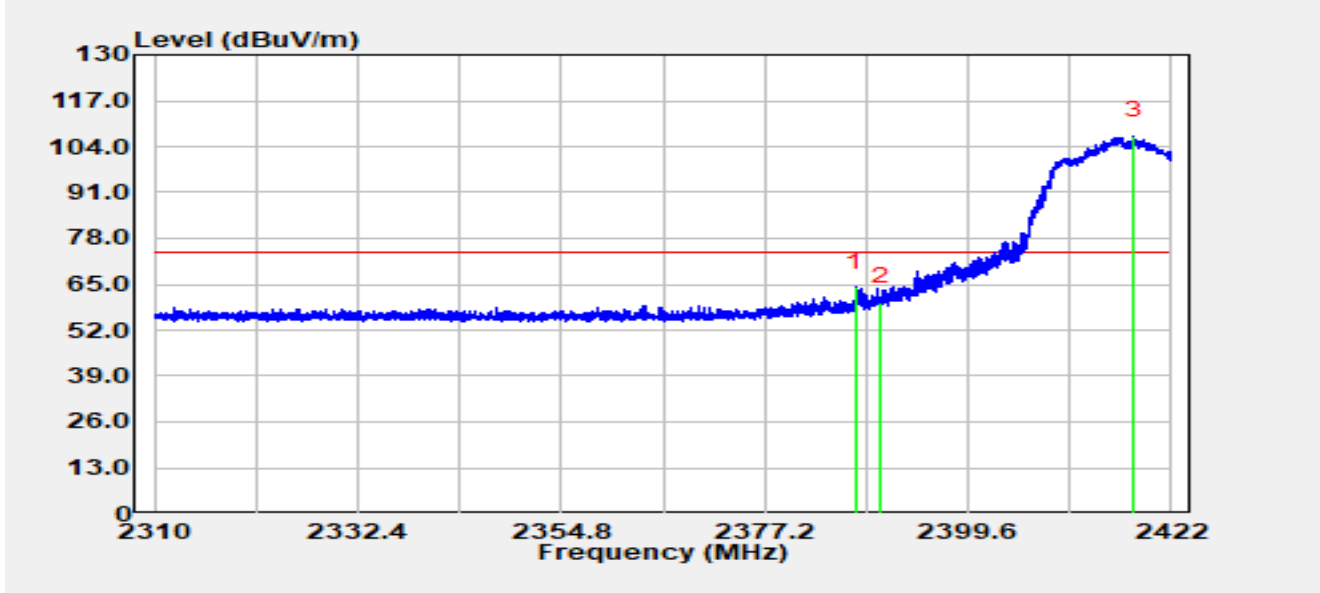


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.24	32.19	31.96	64.15	-9.85	74.00	Peak
2		2390.00	28.10	31.95	60.05	-13.95	74.00	Peak
3		2417.79	75.27	31.86	107.13	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2417 MHz		

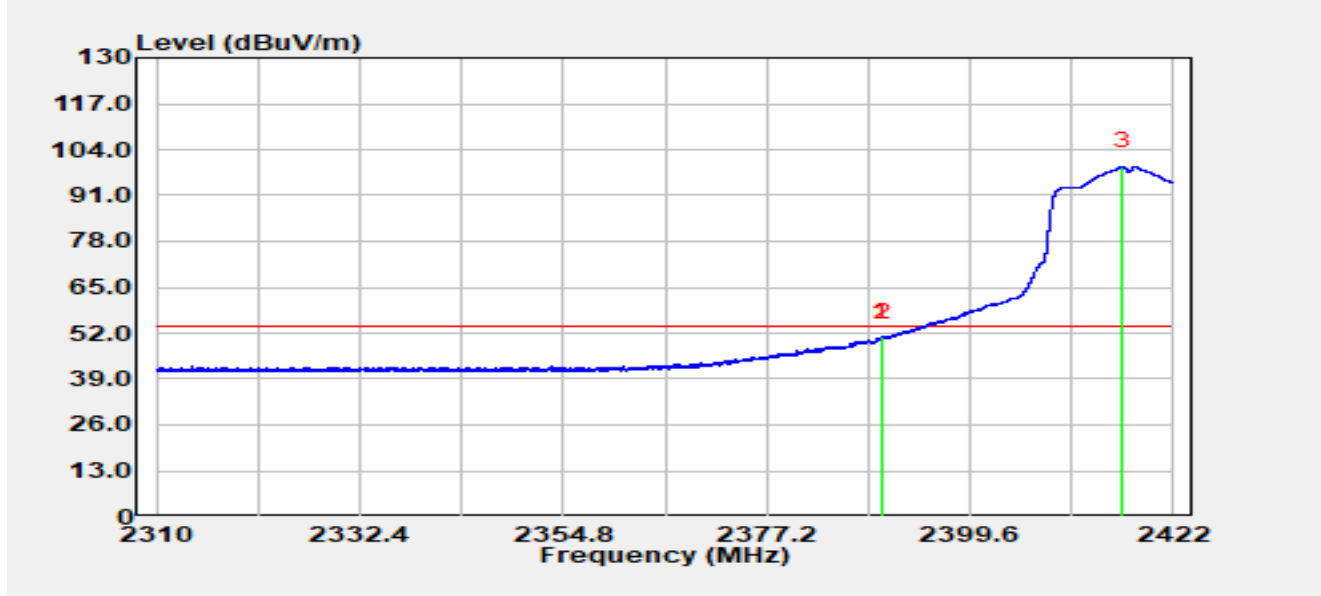


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.90	18.86	31.95	50.81	-3.19	54.00	Average
2		2390.00	18.82	31.95	50.77	-3.23	54.00	Average
3		2416.37	67.34	31.86	99.20	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2422 MHz		

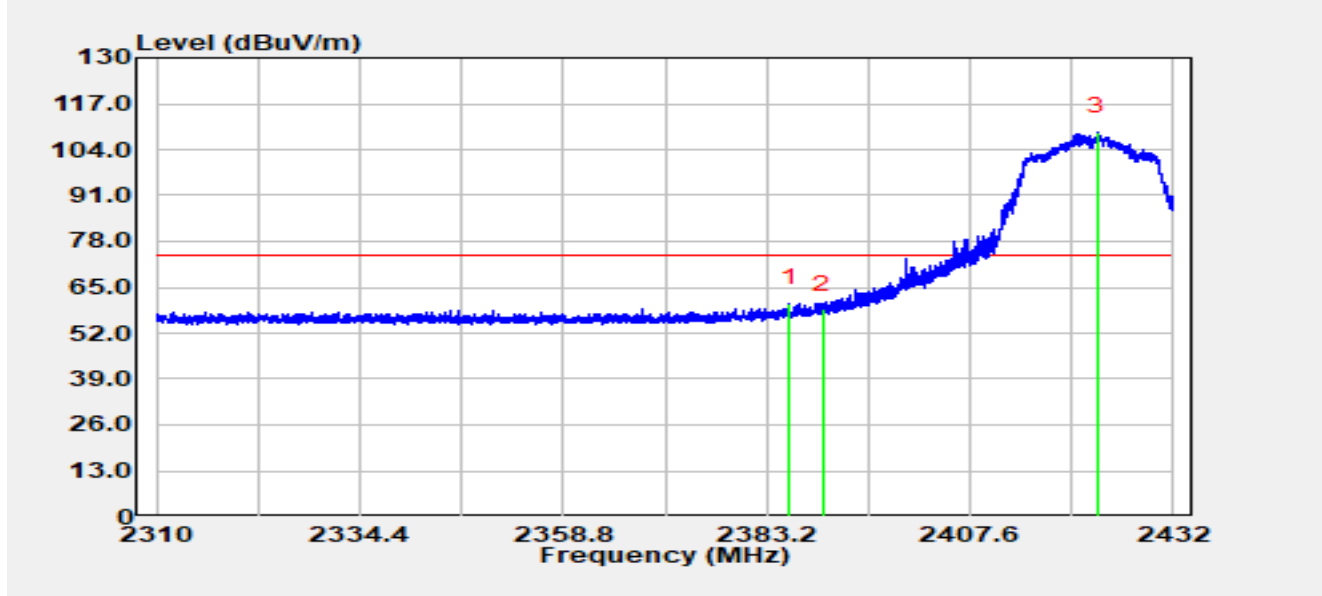


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.93	28.50	31.96	60.46	-13.54	74.00	Peak
2		2390.00	26.89	31.95	58.84	-15.16	74.00	Peak
3		2422.86	77.19	31.86	109.05	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2422 MHz		

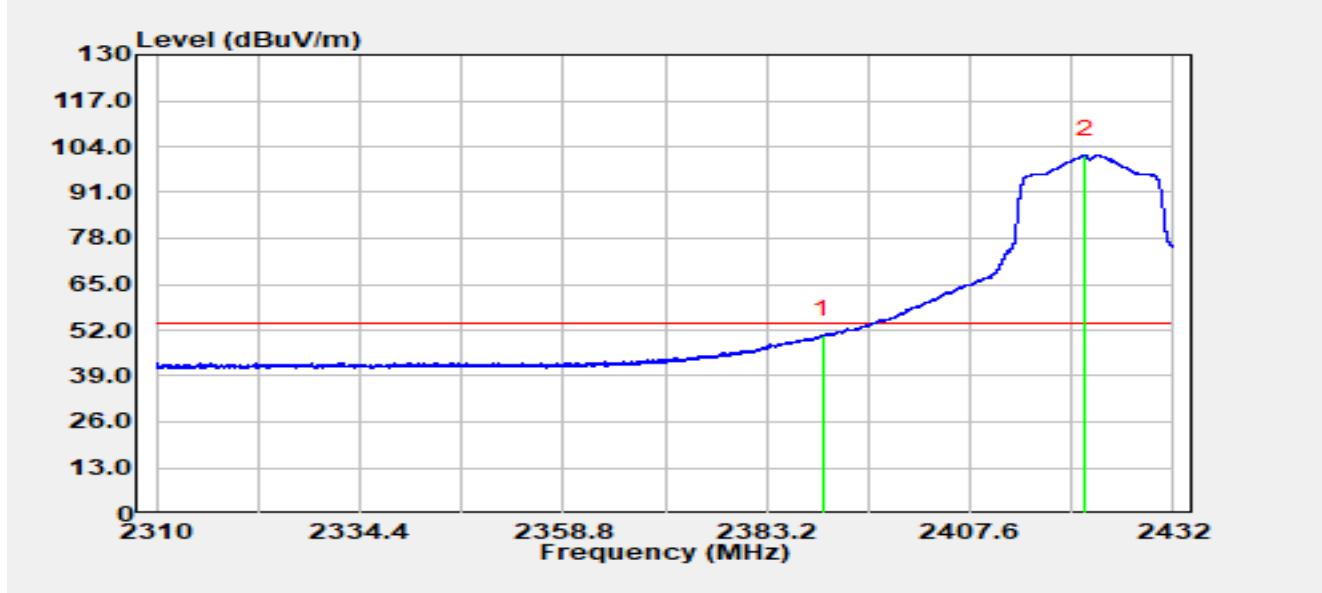


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.00	18.59	31.95	50.54	-3.46	54.00	Average
2		2421.40	69.85	31.86	101.71	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2422 MHz		

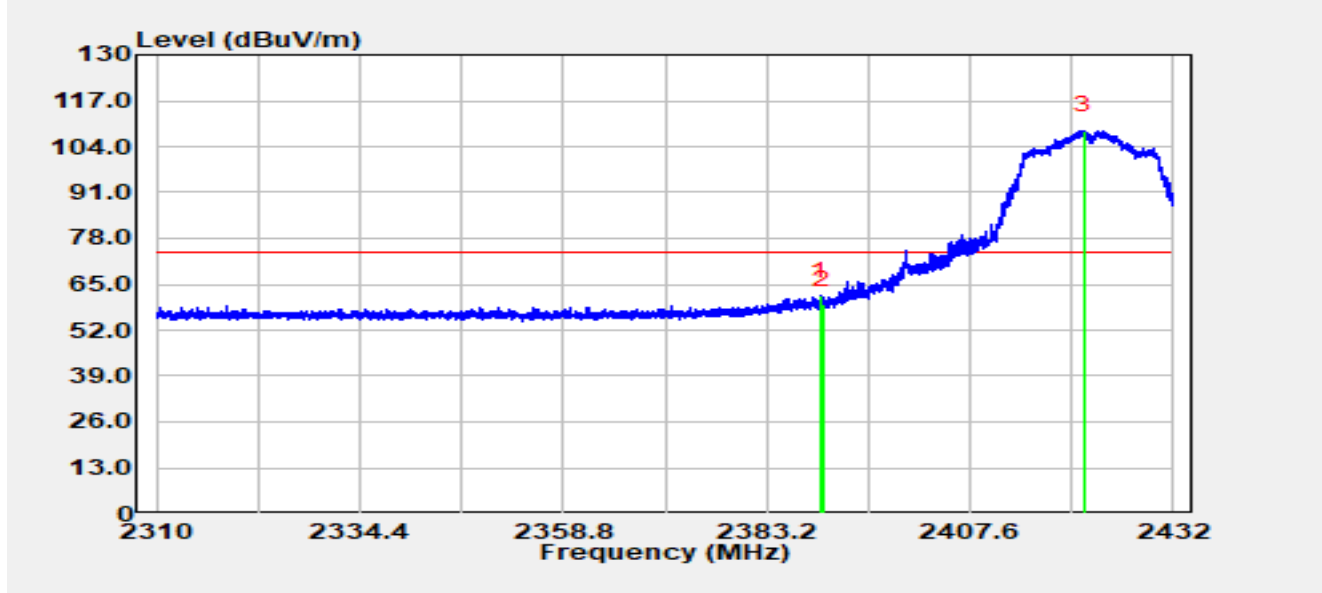


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	2389.67	29.73	31.95	61.67	-12.33	74.00	Peak
2		2390.00	27.35	31.95	59.29	-14.71	74.00	Peak
3		2421.22	76.79	31.86	108.65	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2422 MHz		

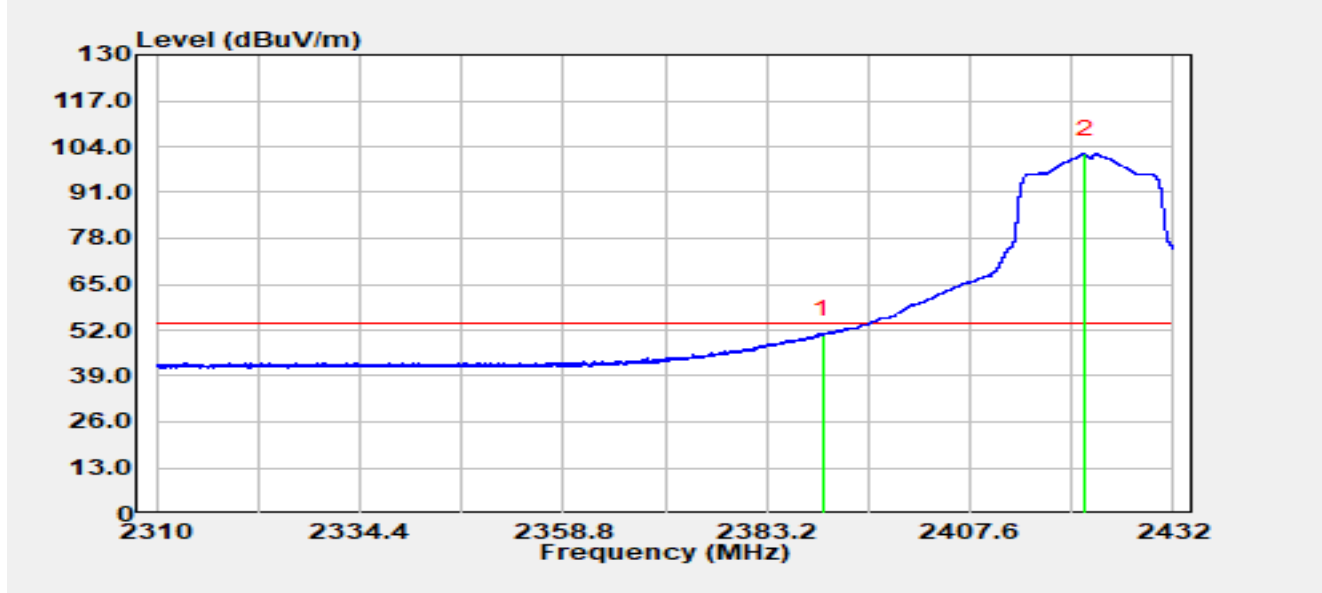


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.00	18.77	31.95	50.71	-3.29	54.00	Average
2		2421.40	70.11	31.86	101.97	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-10
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2437 MHz		

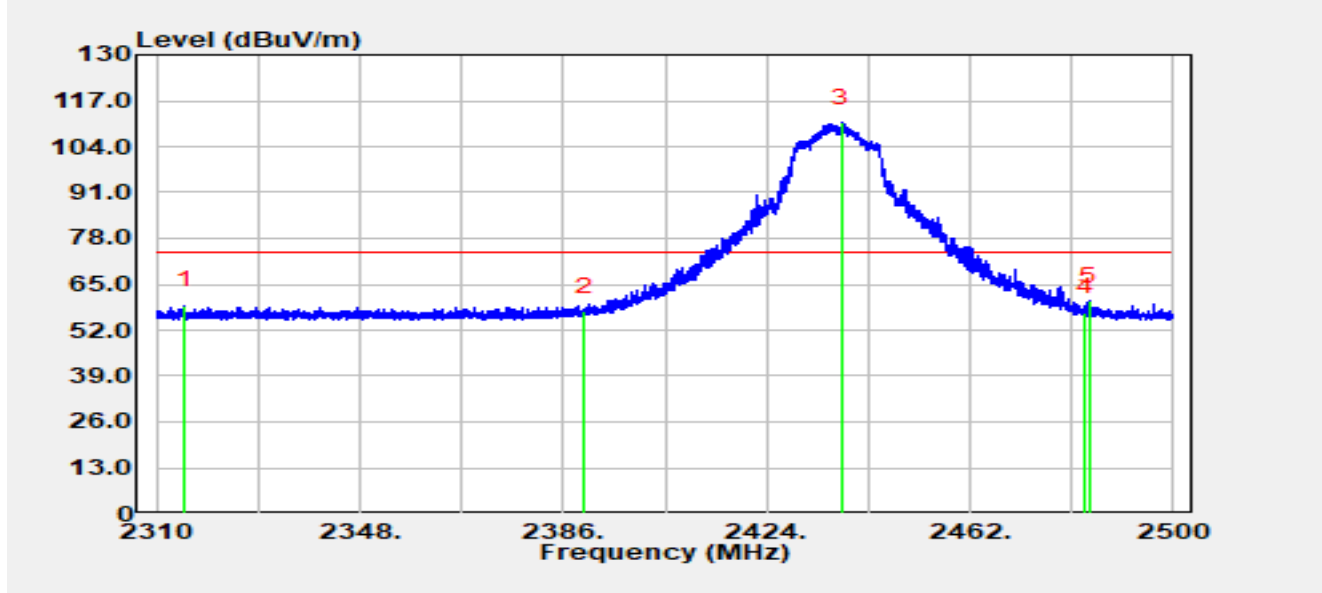


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2315.26	26.75	32.12	58.87	-15.13	74.00	Peak
2		2390.00	25.45	31.95	57.40	-16.60	74.00	Peak
3		2438.10	78.72	31.91	110.63	N/A	N/A	Peak
4		2483.50	25.29	31.81	57.10	-16.90	74.00	Peak
5	*	2484.15	28.38	31.81	60.19	-13.81	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-10
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2437 MHz		

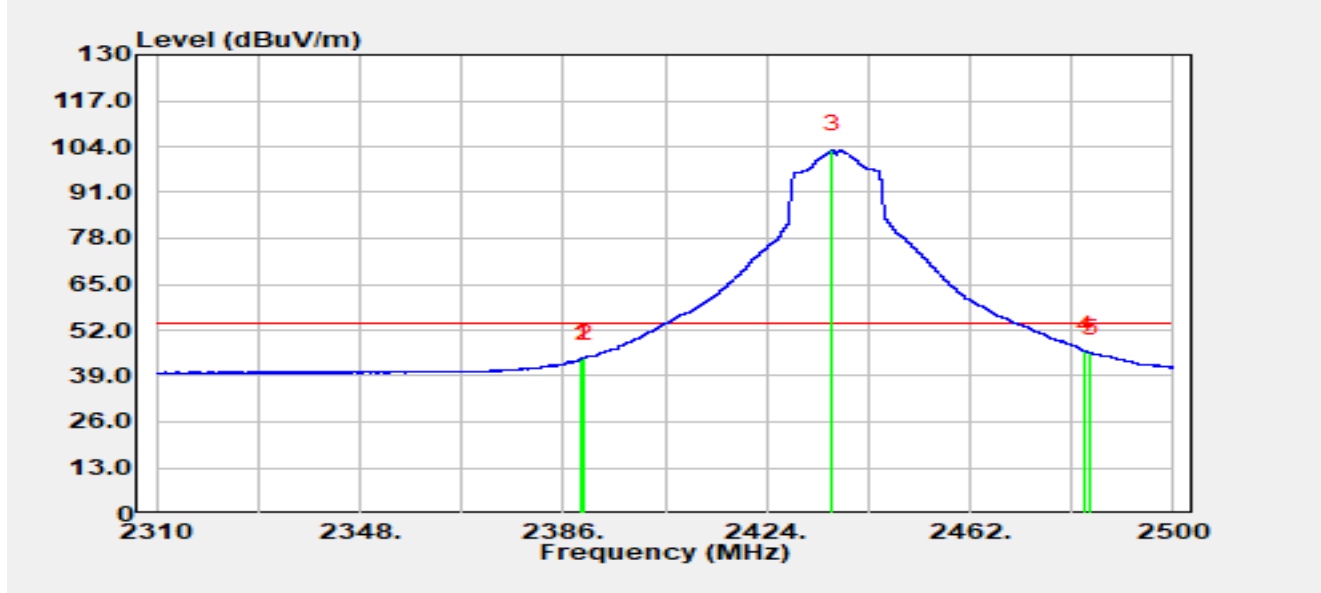


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2389.42	11.94	31.95	43.88	-10.12	54.00	Average
2		2390.00	12.18	31.95	44.12	-9.88	54.00	Average
3		2436.31	71.11	31.91	103.02	N/A	N/A	Average
4	*	2483.50	14.30	31.81	46.12	-7.88	54.00	Average
5		2484.42	13.75	31.81	45.56	-8.44	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-10
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2437 MHz		

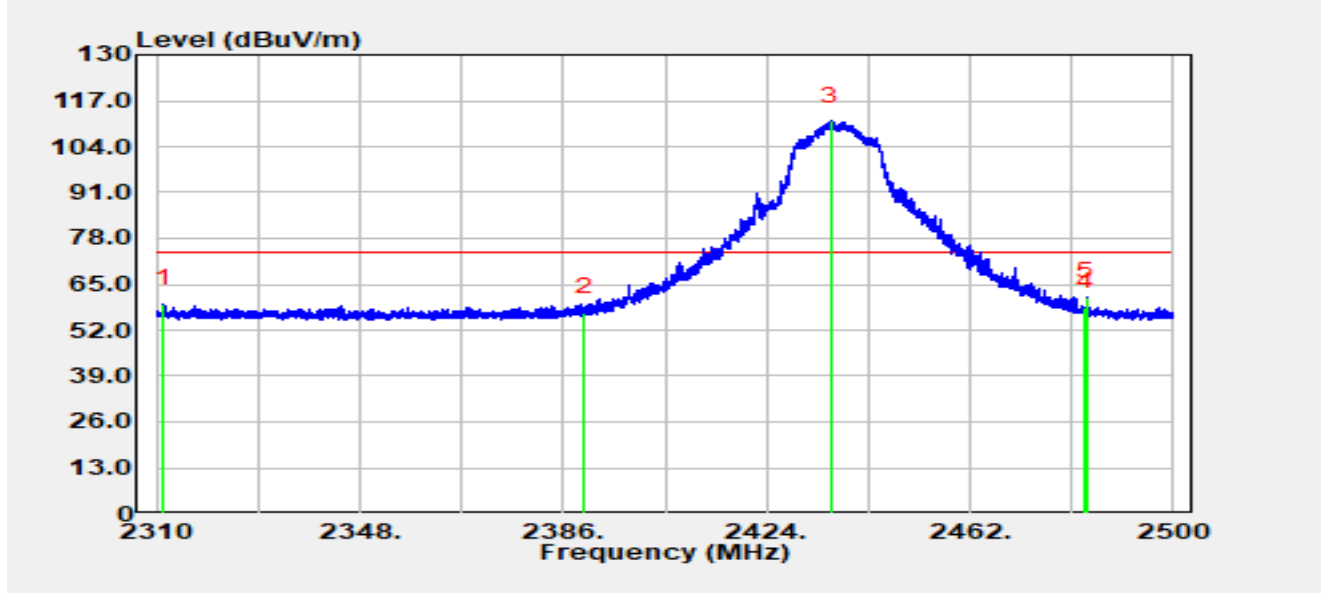


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2311.41	27.41	32.13	59.53	-14.47	74.00	Peak
2		2390.00	25.10	31.95	57.04	-16.96	74.00	Peak
3		2436.03	79.28	31.91	111.18	N/A	N/A	Peak
4		2483.50	26.74	31.81	58.55	-15.45	74.00	Peak
5	*	2483.72	29.56	31.81	61.37	-12.63	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-10
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2437 MHz		

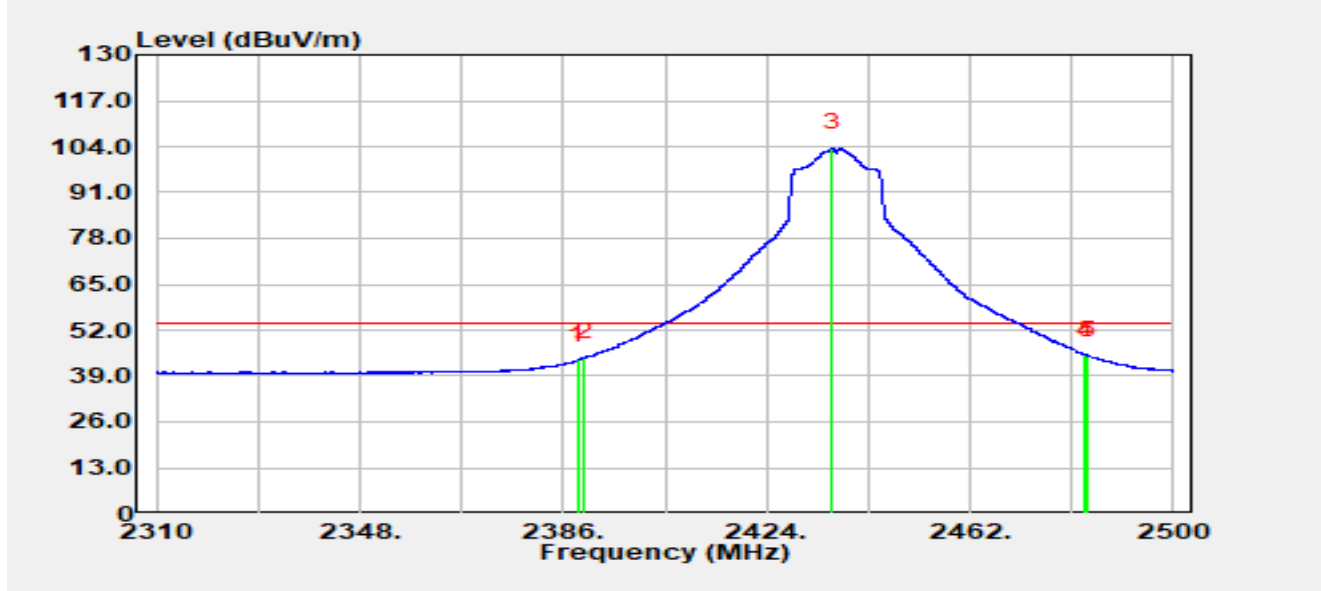


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2388.79	11.54	31.95	43.49	-10.51	54.00	Average
2		2390.00	12.29	31.95	44.23	-9.77	54.00	Average
3		2436.31	71.64	31.91	103.55	N/A	N/A	Average
4	*	2483.50	13.18	31.81	44.99	-9.01	54.00	Average
5		2483.98	12.95	31.81	44.76	-9.24	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2447 MHz		

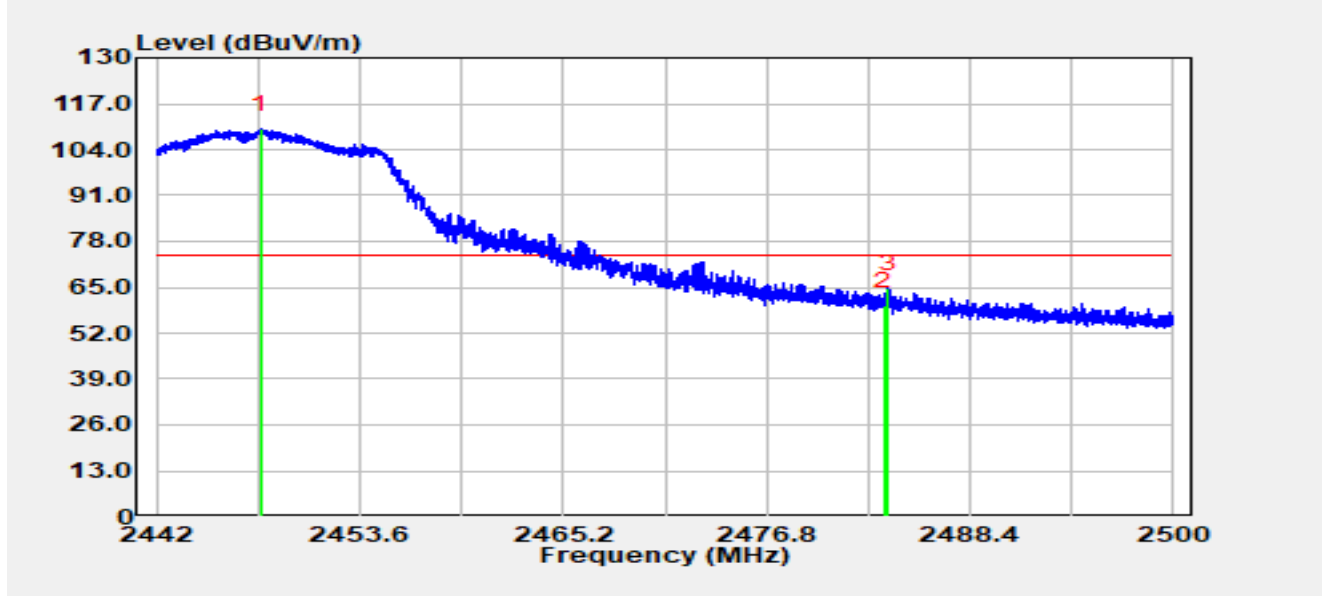


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2447.92	77.95	31.87	109.82	N/A	N/A	Peak
2		2483.50	27.80	31.81	59.61	-14.39	74.00	Peak
3	*	2483.75	32.74	31.81	64.55	-9.45	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2447 MHz		

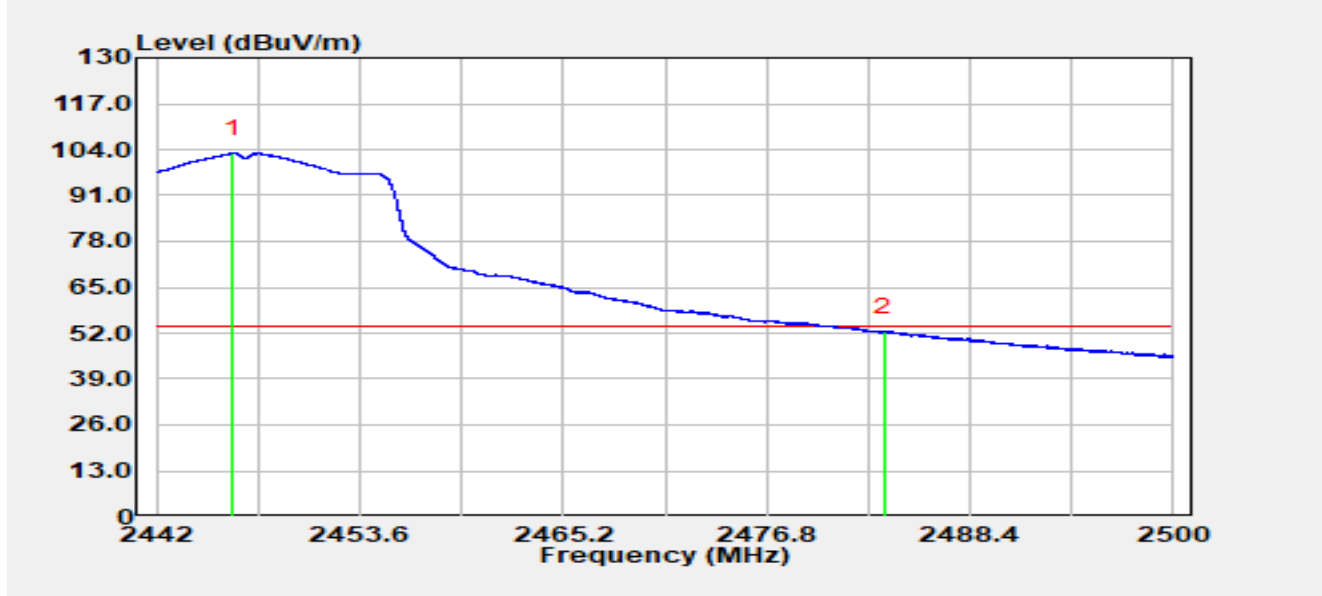


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2446.34	71.10	31.88	102.98	N/A	N/A	Average
2	*	2483.50	20.54	31.81	52.35	-1.65	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2447 MHz		

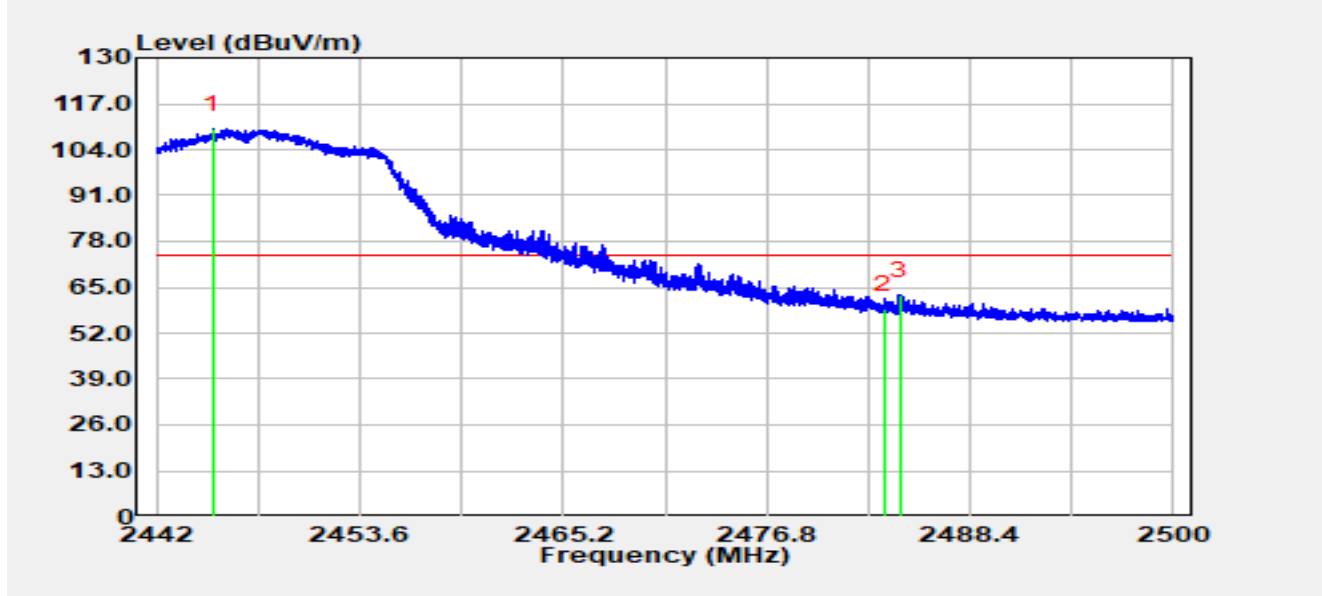


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2445.24	77.93	31.88	109.81	N/A	N/A	Peak
2		2483.50	26.99	31.81	58.80	-15.20	74.00	Peak
3	*	2484.38	30.96	31.81	62.77	-11.23	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2447 MHz		

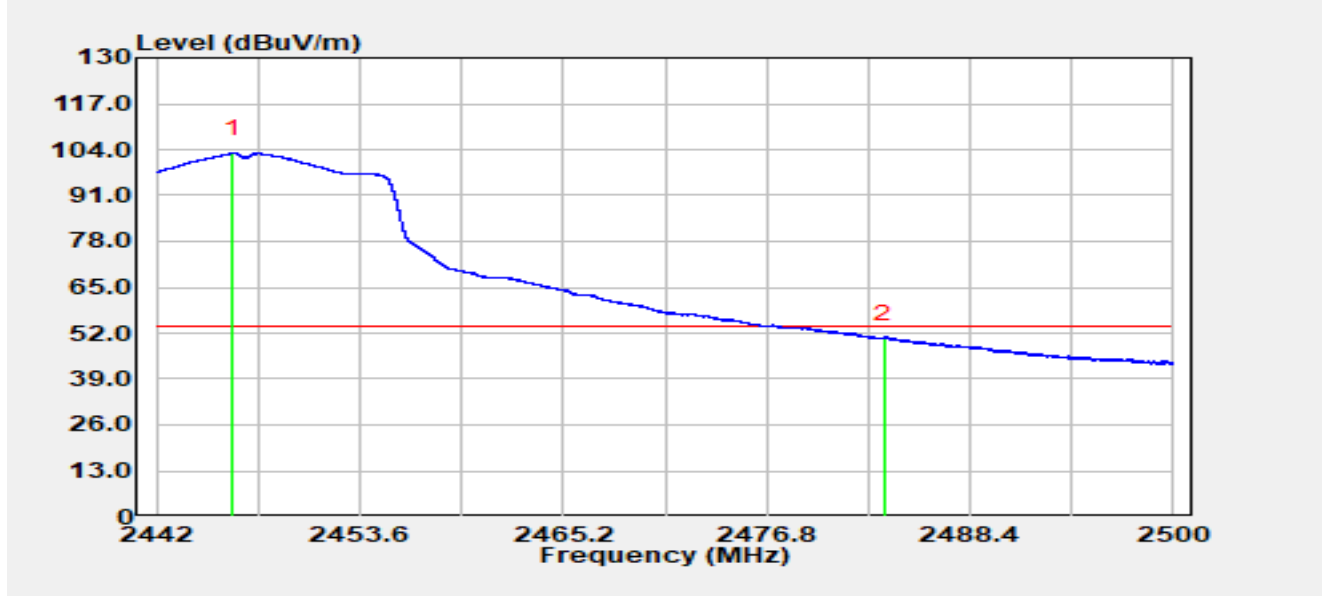


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2446.37	71.12	31.88	103.00	N/A	N/A	Average
2	*	2483.50	18.68	31.81	50.49	-3.51	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2452 MHz		

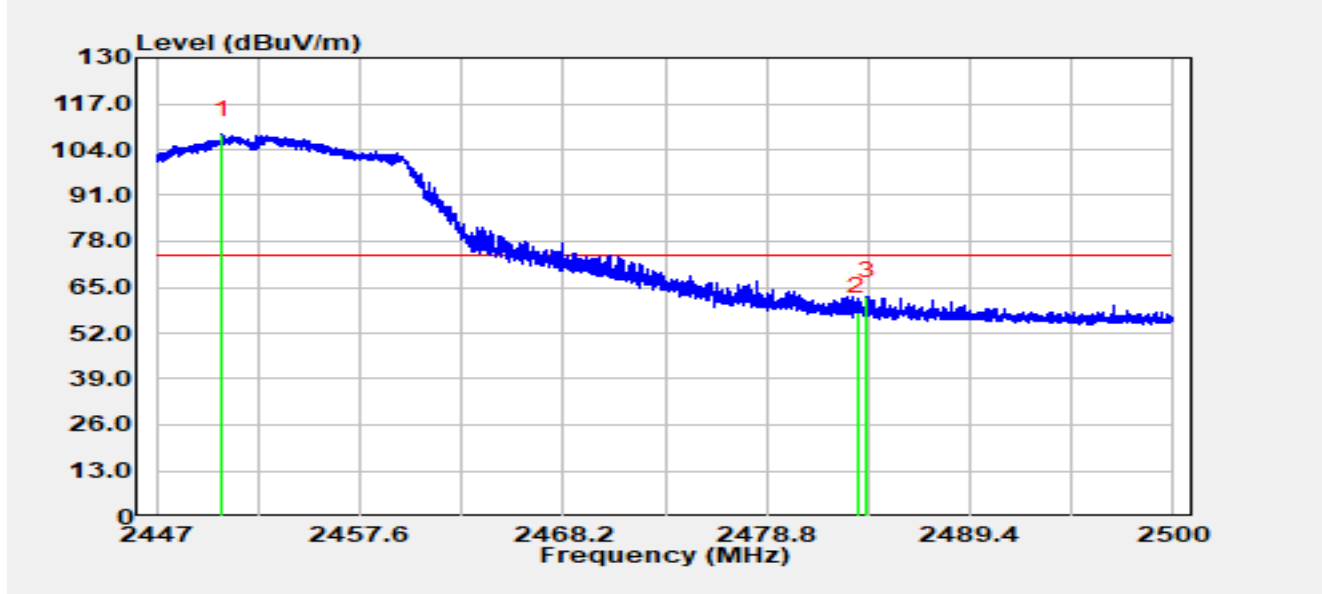


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2450.45	76.33	31.86	108.20	N/A	N/A	Peak
2		2483.50	26.21	31.81	58.02	-15.98	74.00	Peak
3	*	2484.02	30.52	31.81	62.33	-11.67	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2452 MHz		

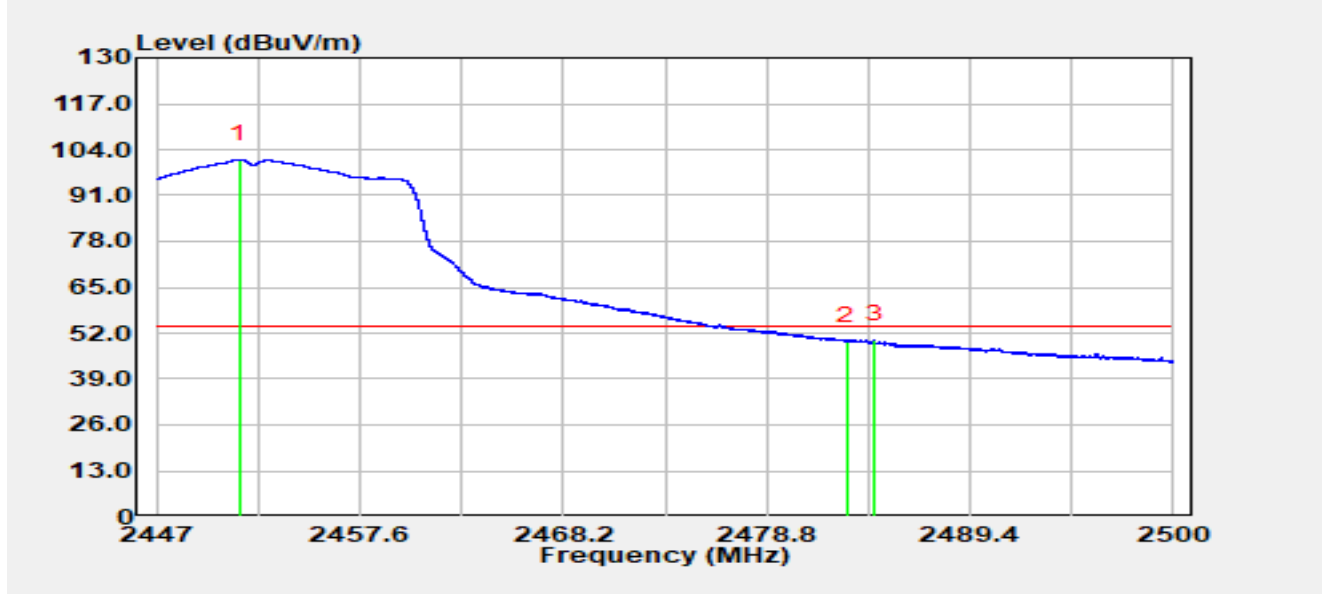


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2451.33	69.29	31.86	101.15	N/A	N/A	Average
2		2483.00	17.95	31.81	49.76	-4.24	54.00	Average
3	*	2484.41	18.26	31.81	50.07	-3.93	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2452 MHz		

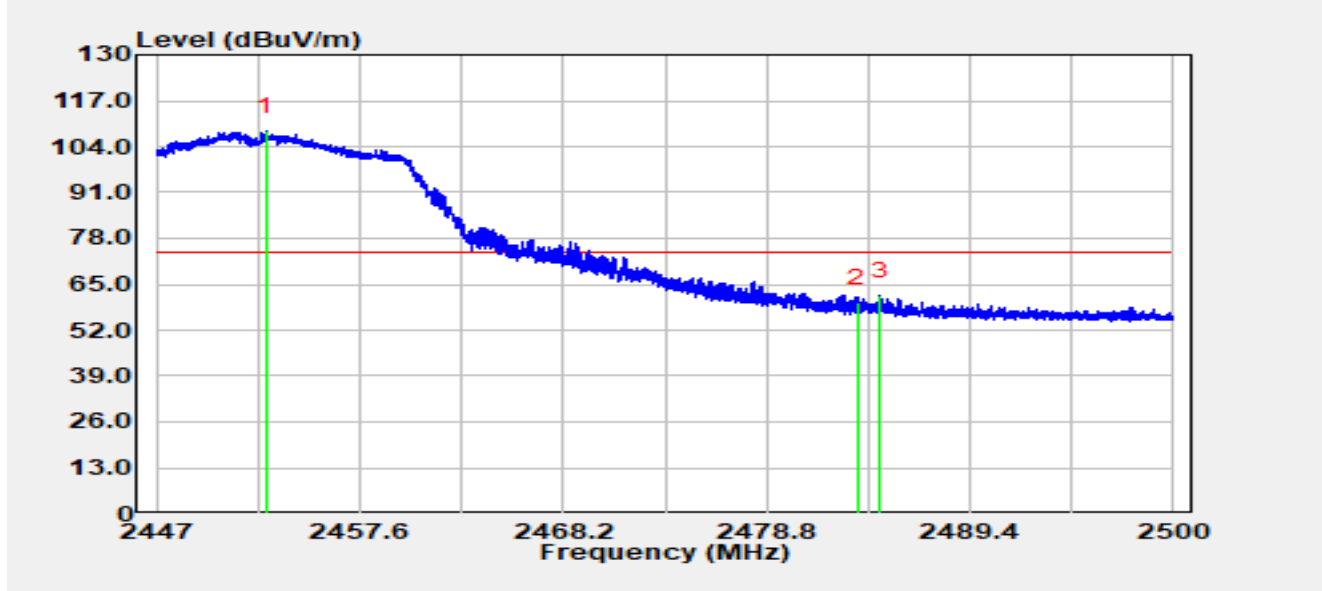


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2452.69	76.40	31.85	108.26	N/A	N/A	Peak
2		2483.50	27.93	31.81	59.74	-14.26	74.00	Peak
3	*	2484.73	29.81	31.81	61.62	-12.38	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2452 MHz		

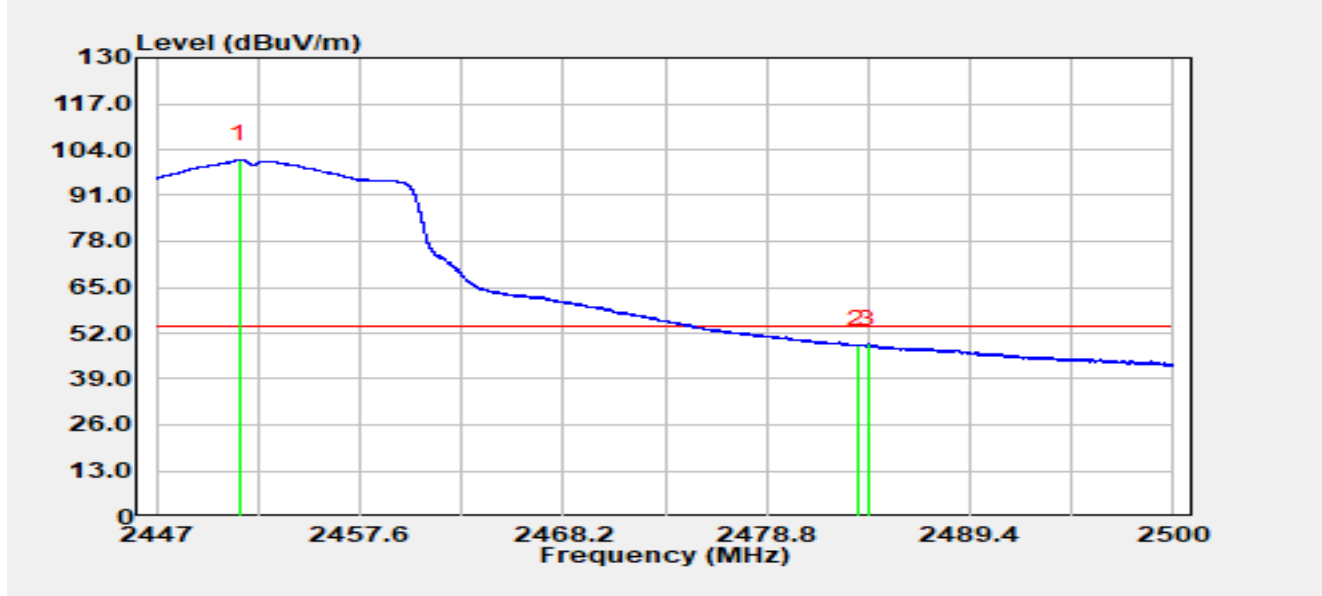


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2451.34	69.21	31.86	101.07	N/A	N/A	Average
2		2483.50	16.83	31.81	48.64	-5.36	54.00	Average
3	*	2484.08	17.09	31.81	48.91	-5.09	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2457 MHz		

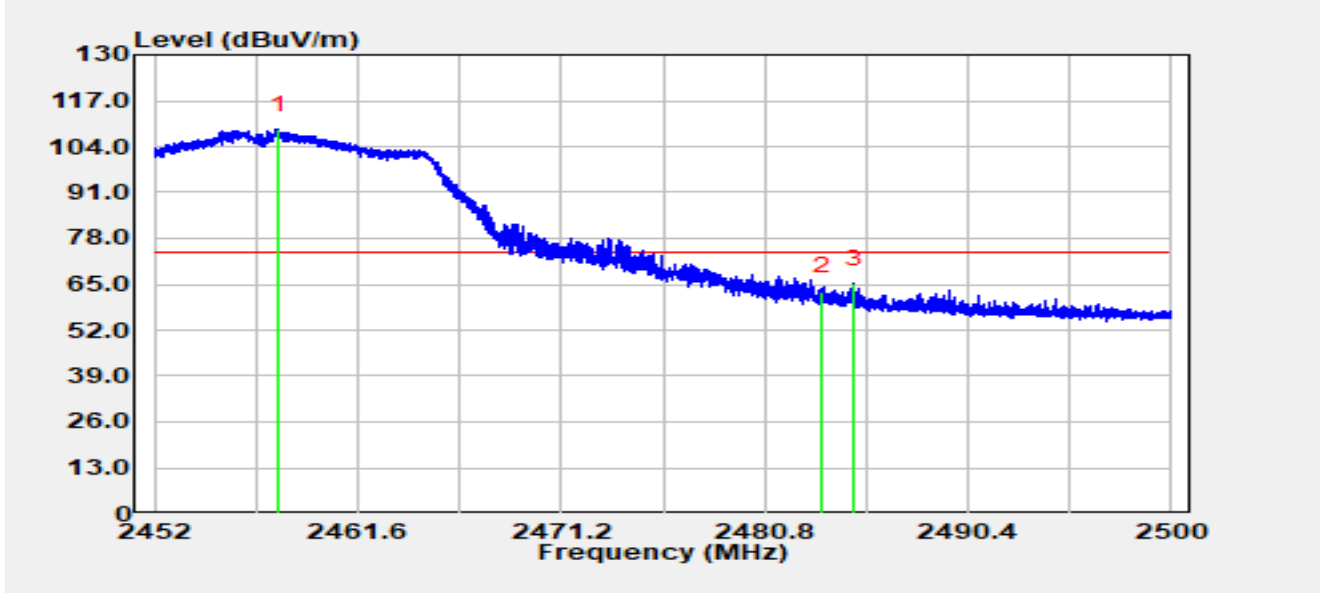


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2457.89	76.96	31.84	108.80	N/A	N/A	Peak
2		2483.50	31.04	31.81	62.85	-11.15	74.00	Peak
3	*	2485.04	33.22	31.81	65.04	-8.96	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2457 MHz		

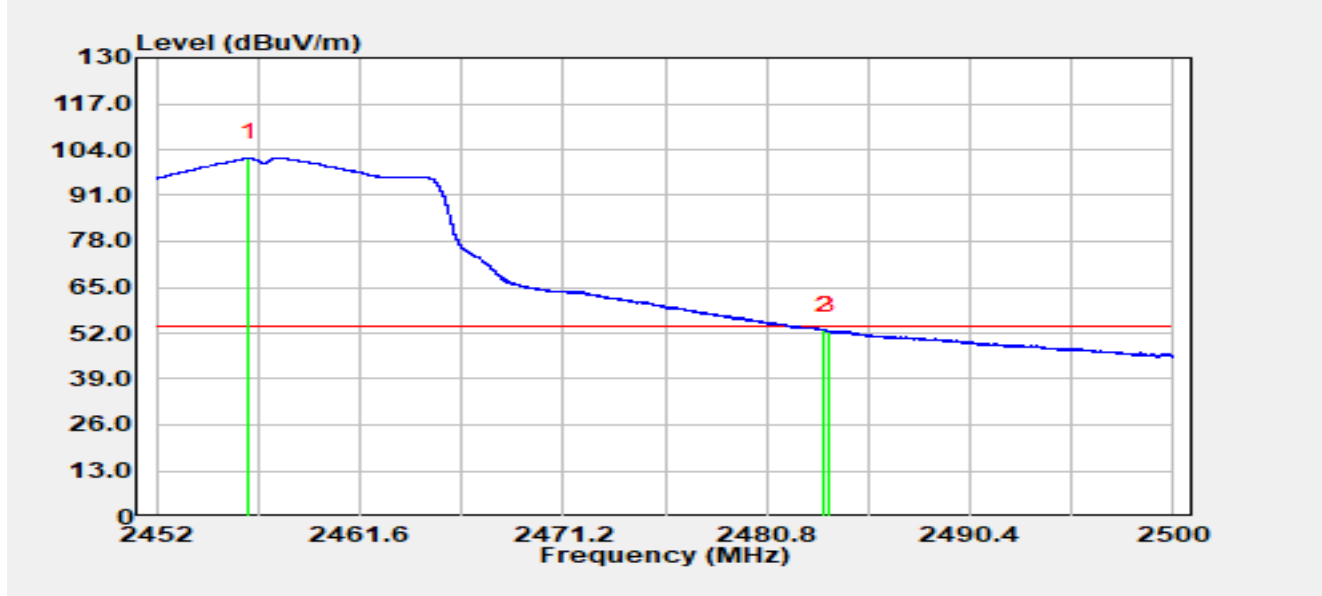


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.33	69.81	31.84	101.65	N/A	N/A	Average
2	*	2483.50	20.96	31.81	52.77	-1.23	54.00	Average
3		2483.70	20.81	31.81	52.62	-1.38	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2457 MHz		

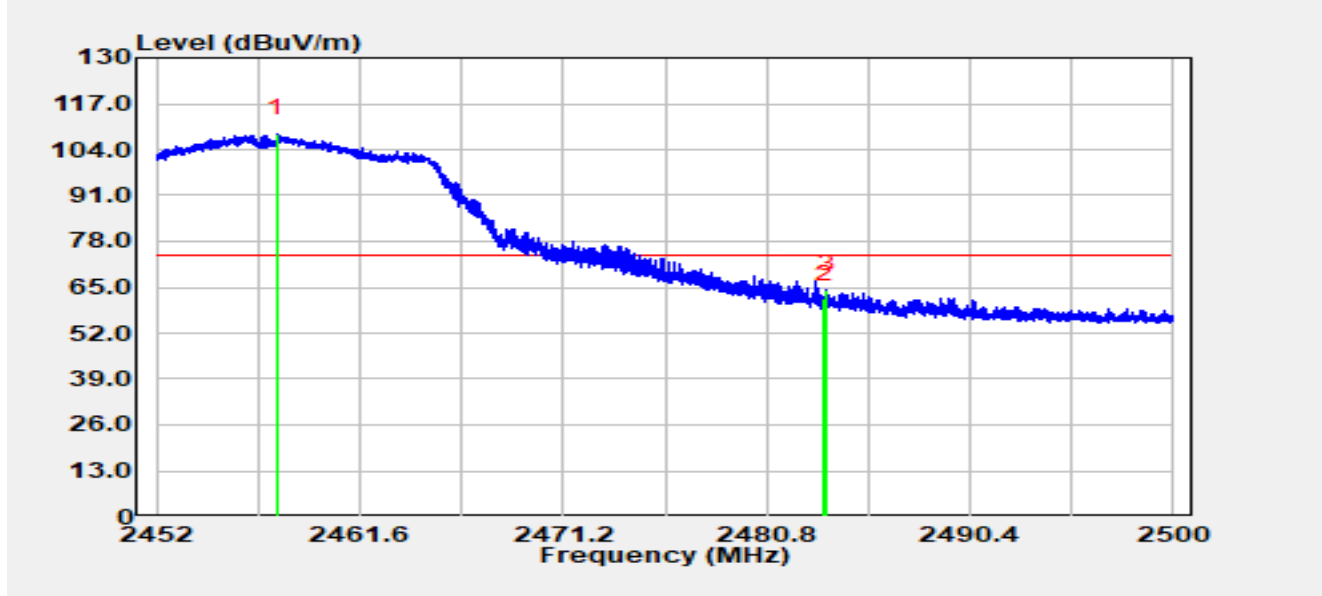


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2457.68	76.65	31.84	108.49	N/A	N/A	Peak
2		2483.50	29.84	31.81	61.65	-12.35	74.00	Peak
3	*	2483.62	32.53	31.81	64.34	-9.66	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-31
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2457 MHz		

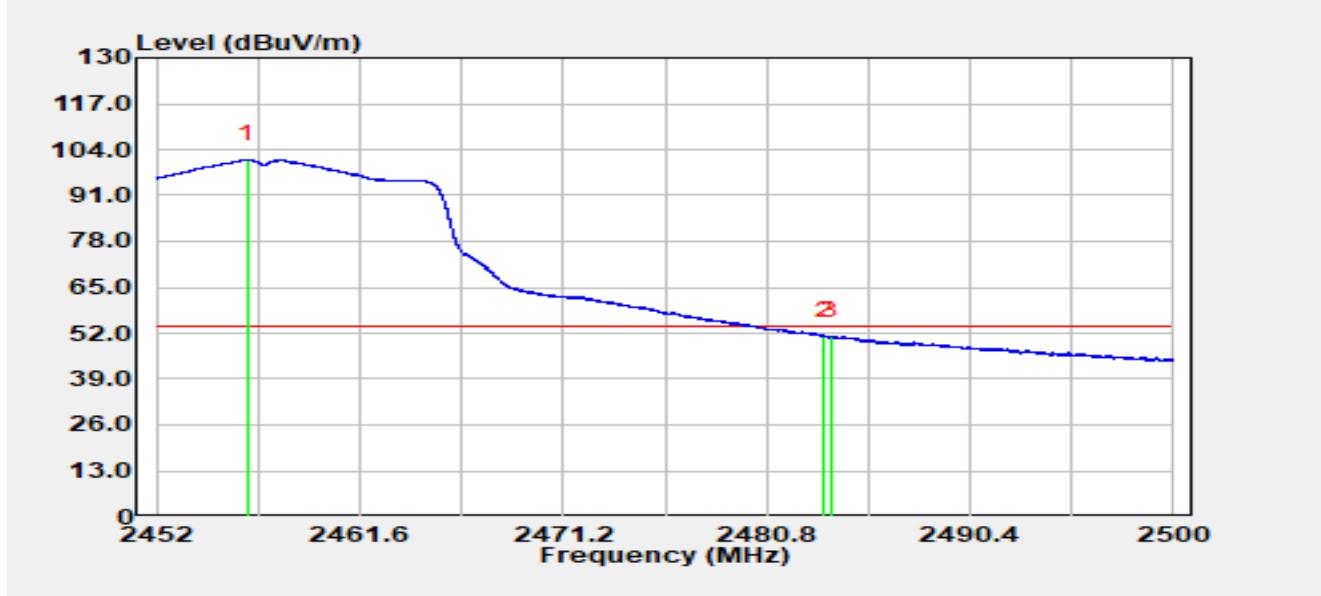


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.27	69.38	31.84	101.22	N/A	N/A	Average
2	*	2483.50	19.26	31.81	51.07	-2.93	54.00	Average
3		2483.83	19.21	31.81	51.02	-2.98	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2462 MHz		

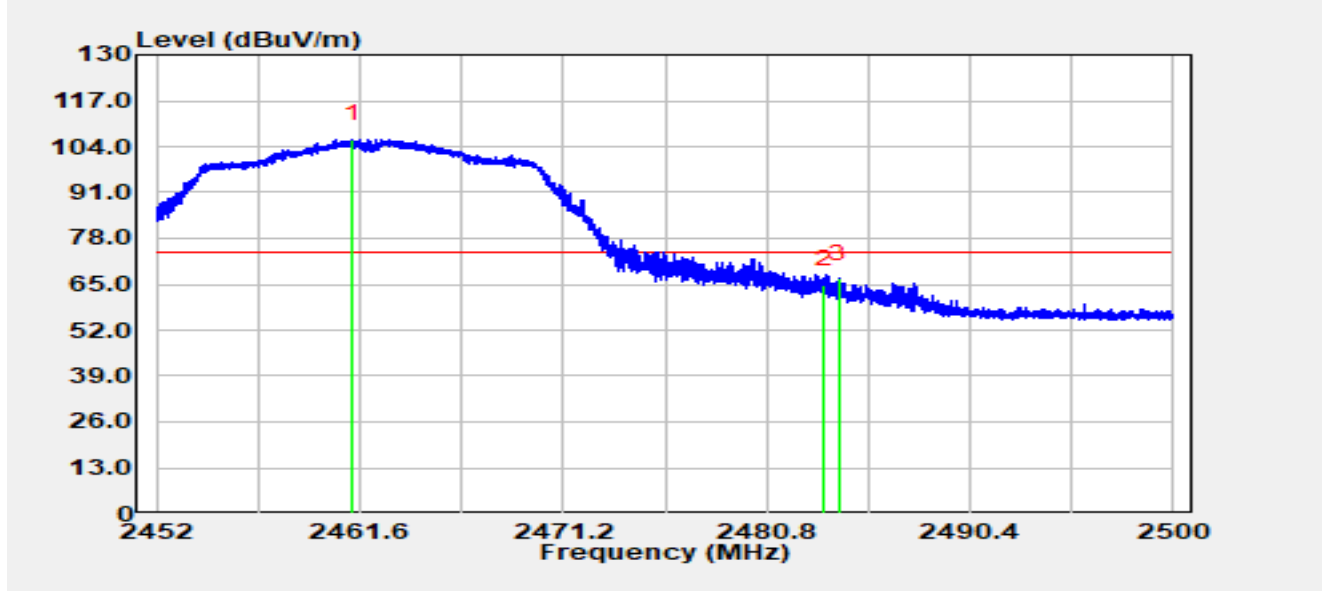


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.26	74.16	31.83	105.99	N/A	N/A	Peak
2		2483.50	33.17	31.81	64.98	-9.02	74.00	Peak
3	*	2484.19	34.69	31.81	66.50	-7.50	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11g at 2462 MHz		

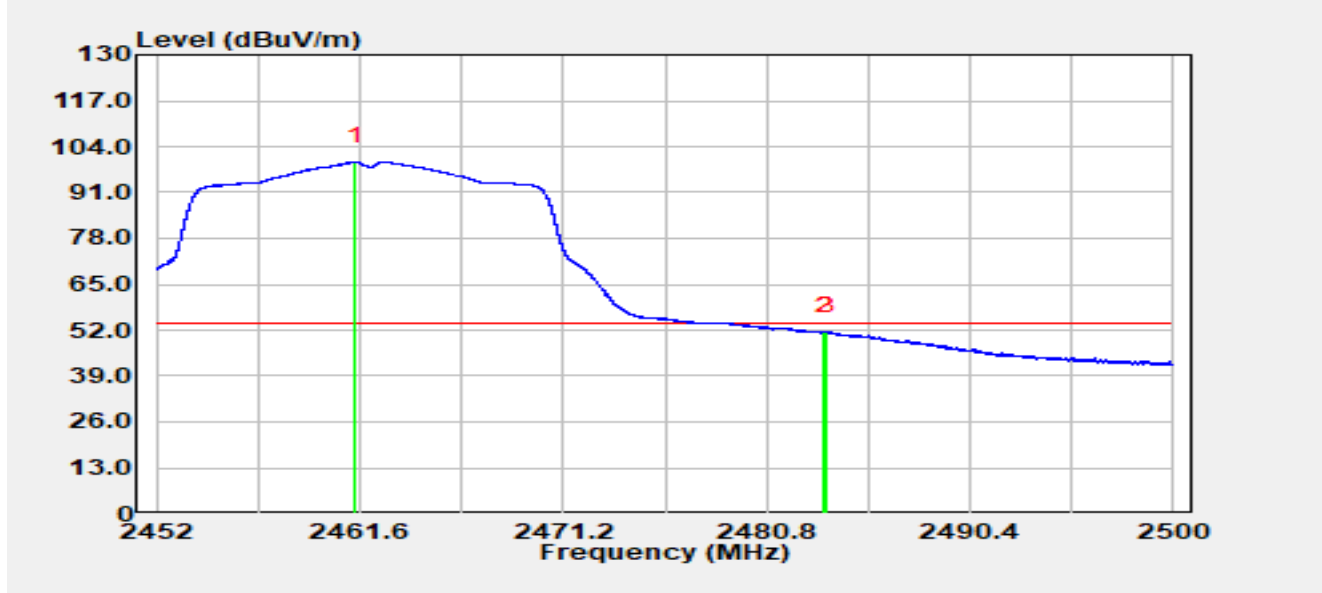


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.36	67.91	31.83	99.74	N/A	N/A	Average
2		2483.50	19.71	31.81	51.52	-2.48	54.00	Average
3	*	2483.65	19.74	31.81	51.56	-2.45	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2462 MHz		

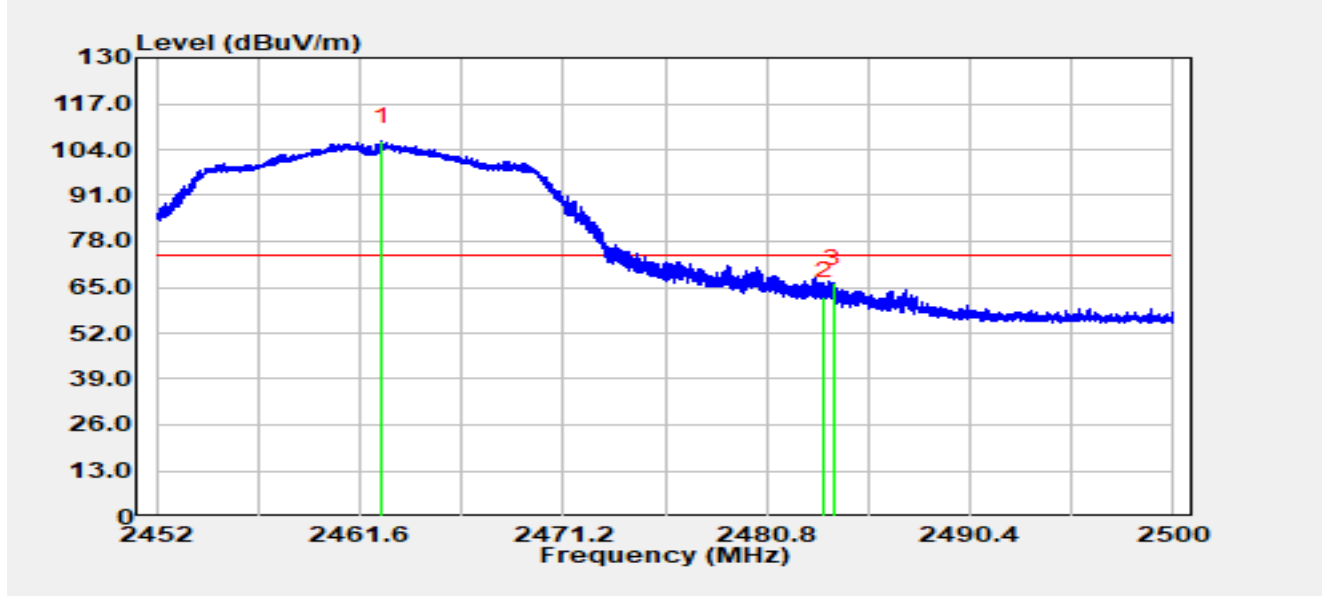


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.63	74.55	31.83	106.37	N/A	N/A	Peak
2		2483.50	30.71	31.81	62.52	-11.48	74.00	Peak
3	*	2483.93	34.37	31.81	66.18	-7.82	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11g at 2462 MHz		

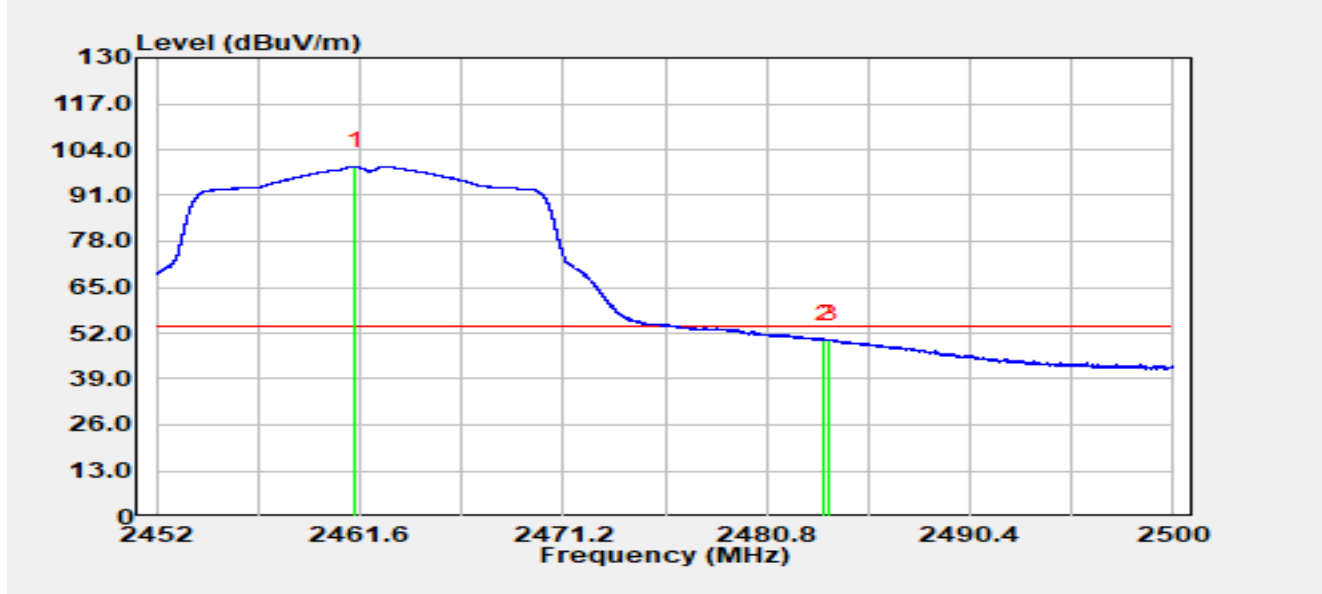


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.37	67.39	31.83	99.22	N/A	N/A	Average
2		2483.50	18.34	31.81	50.15	-3.85	54.00	Average
3	*	2483.79	18.40	31.81	50.21	-3.79	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2412 MHz		

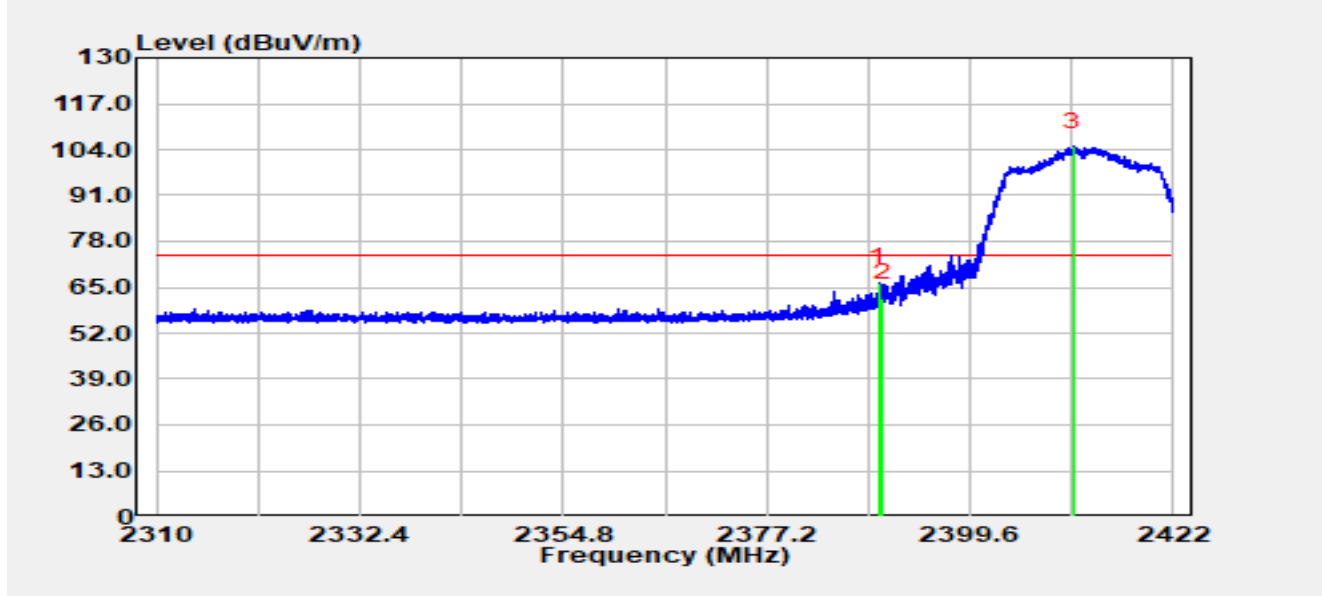


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	2389.51	34.30	31.95	66.25	-7.75	74.00	Peak
2		2390.00	29.93	31.95	61.87	-12.13	74.00	Peak
3		2410.93	73.08	31.88	104.96	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2412 MHz		

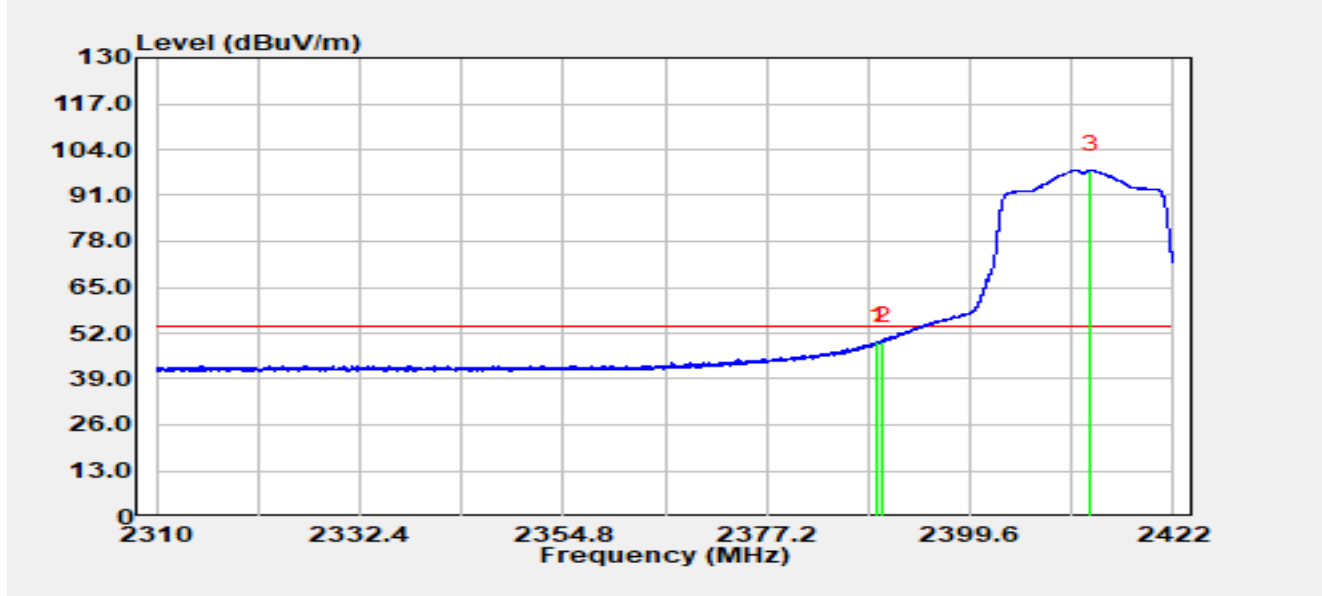


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2389.36	17.60	31.95	49.55	-4.45	54.00	Average
2	*	2390.00	17.67	31.95	49.62	-4.38	54.00	Average
3		2412.83	66.46	31.87	98.34	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2412 MHz		

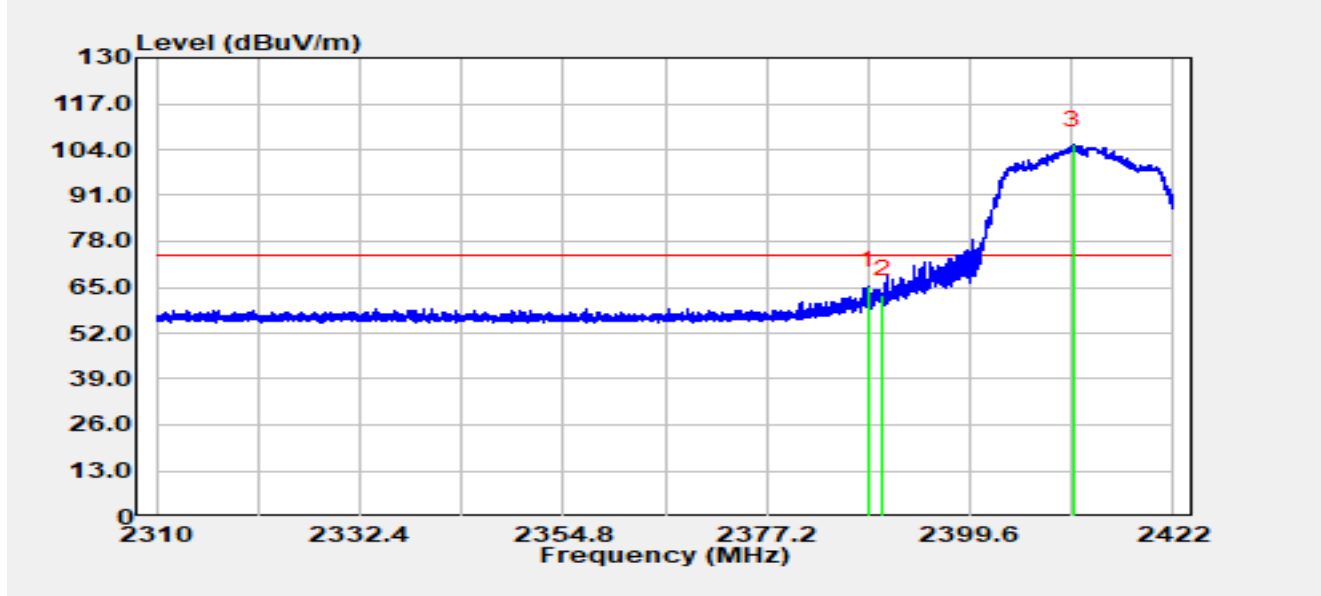


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.30	33.40	31.95	65.35	-8.65	74.00	Peak
2		2390.00	30.86	31.95	62.81	-11.19	74.00	Peak
3		2410.90	73.39	31.88	105.27	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2412 MHz		

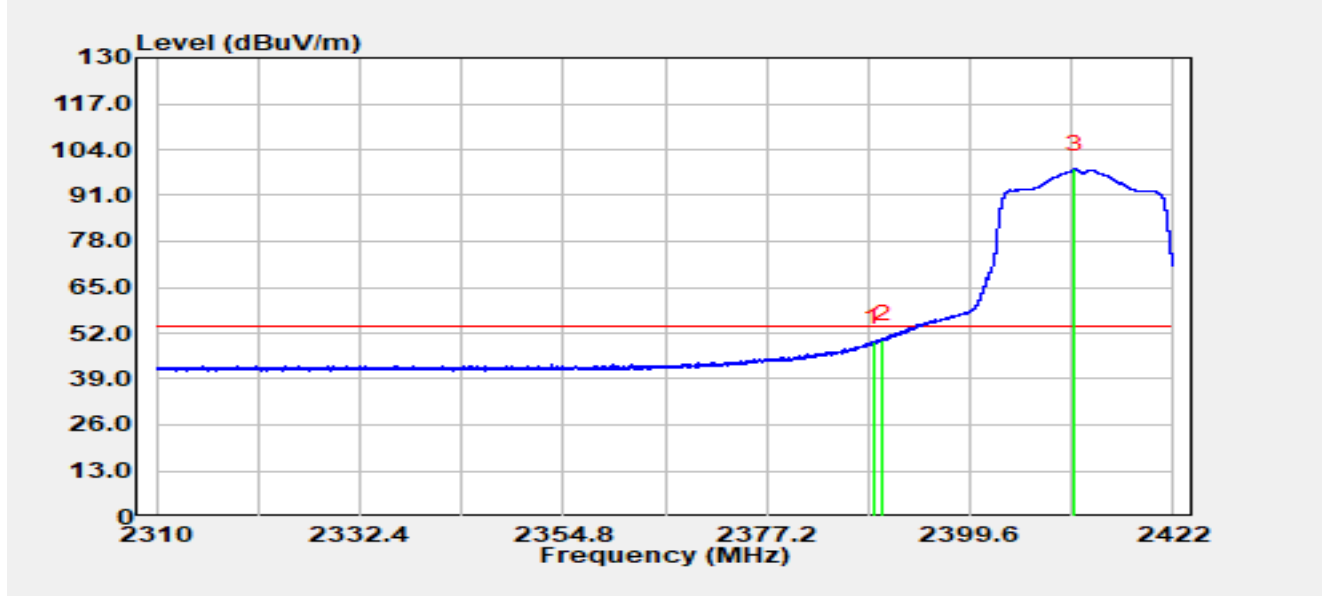


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2389.02	17.55	31.95	49.50	-4.50	54.00	Average
2	*	2390.00	18.10	31.95	50.05	-3.95	54.00	Average
3		2411.14	66.53	31.88	98.40	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2417 MHz		

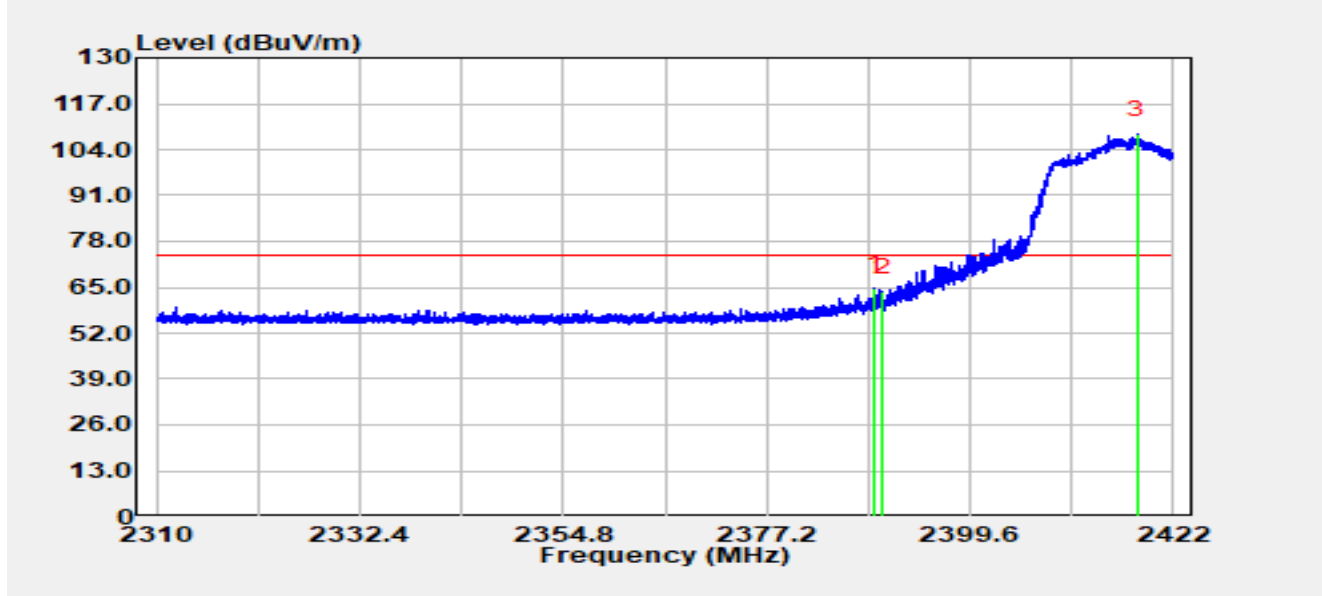


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.09	32.61	31.95	64.56	-9.44	74.00	Peak
2		2390.00	31.64	31.95	63.59	-10.41	74.00	Peak
3		2417.99	76.33	31.86	108.19	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2417 MHz		

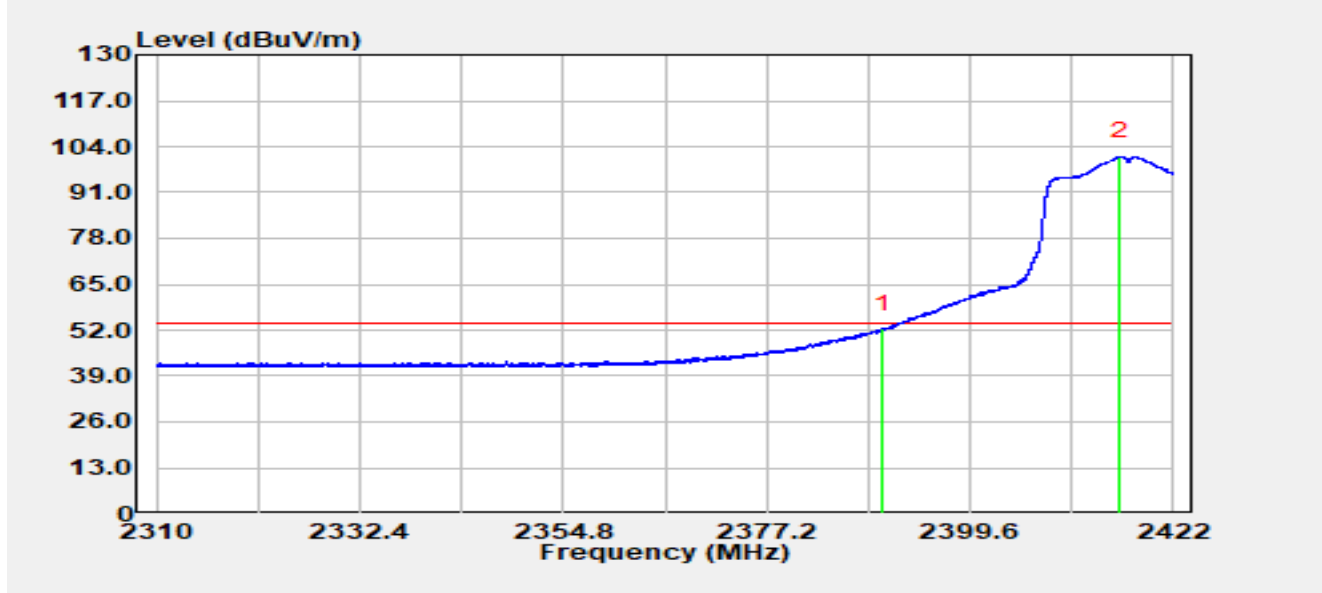


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.00	20.32	31.95	52.26	-1.74	54.00	Average
2		2416.17	69.23	31.86	101.10	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2417MH		

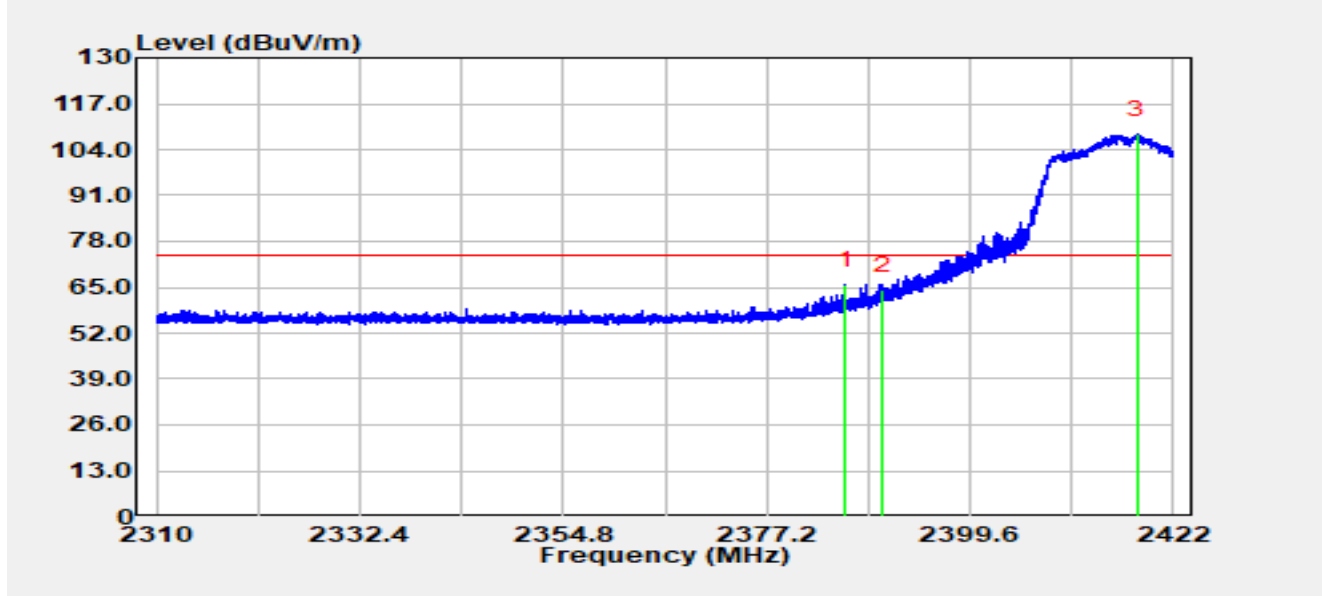


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.90	33.77	31.96	65.73	-8.27	74.00	Peak
2		2390.00	32.26	31.95	64.20	-9.80	74.00	Peak
3		2417.97	76.40	31.86	108.26	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2417 MHz		

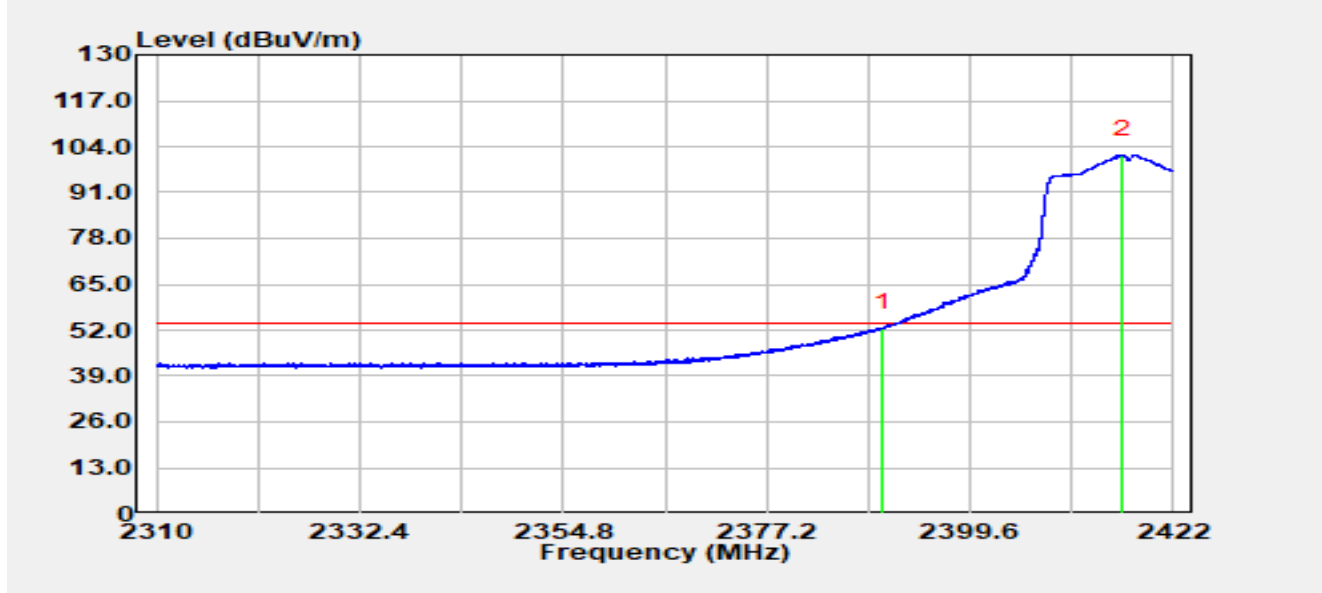


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.00	20.71	31.95	52.65	-1.35	54.00	Average
2		2416.41	69.80	31.86	101.67	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2437 MHz		

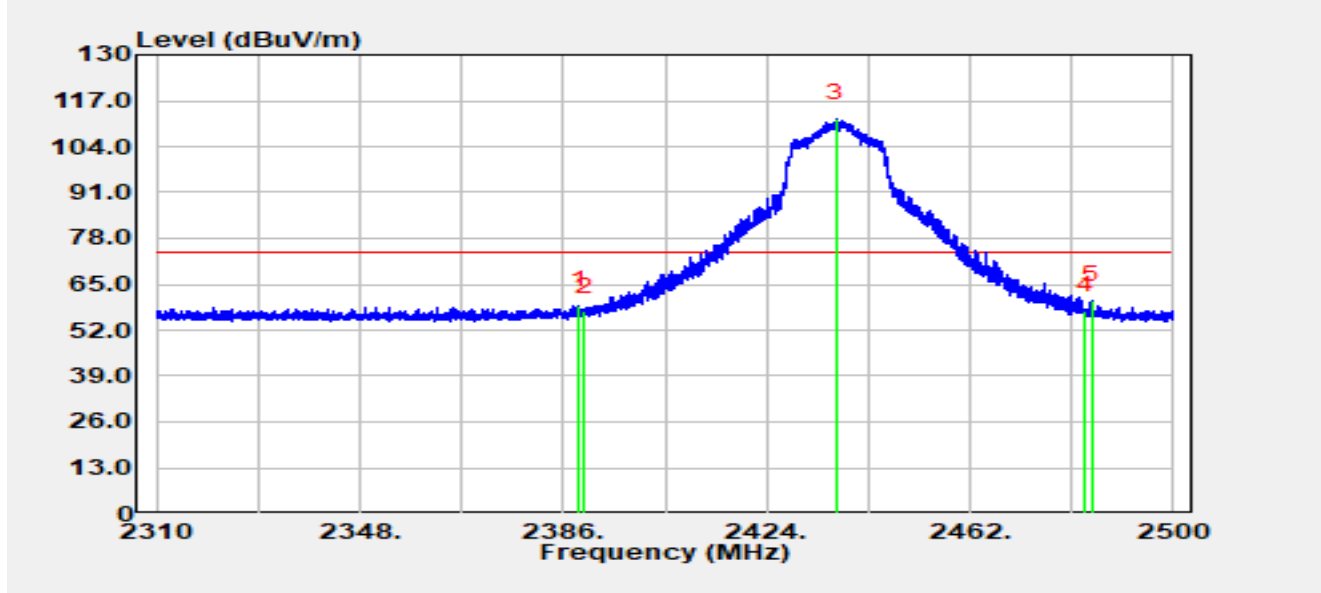


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2388.93	27.05	31.95	59.00	-15.00	74.00	Peak
2		2390.00	25.43	31.95	57.37	-16.63	74.00	Peak
3		2437.07	79.96	31.91	111.87	N/A	N/A	Peak
4		2483.50	25.72	31.81	57.53	-16.47	74.00	Peak
5	*	2484.76	28.63	31.81	60.44	-13.56	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2437 MHz		

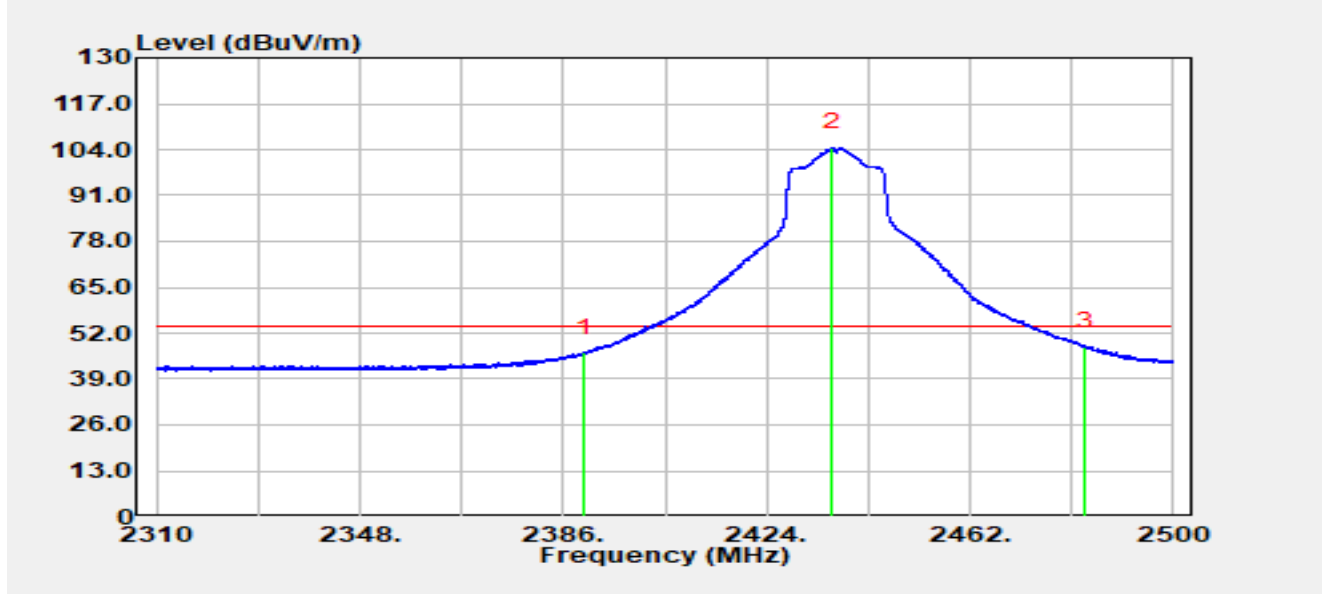


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2390.00	14.42	31.95	46.37	-7.63	54.00	Average
2		2436.29	72.64	31.91	104.55	N/A	N/A	Average
3	*	2483.50	16.47	31.81	48.28	-5.72	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2437 MHz		

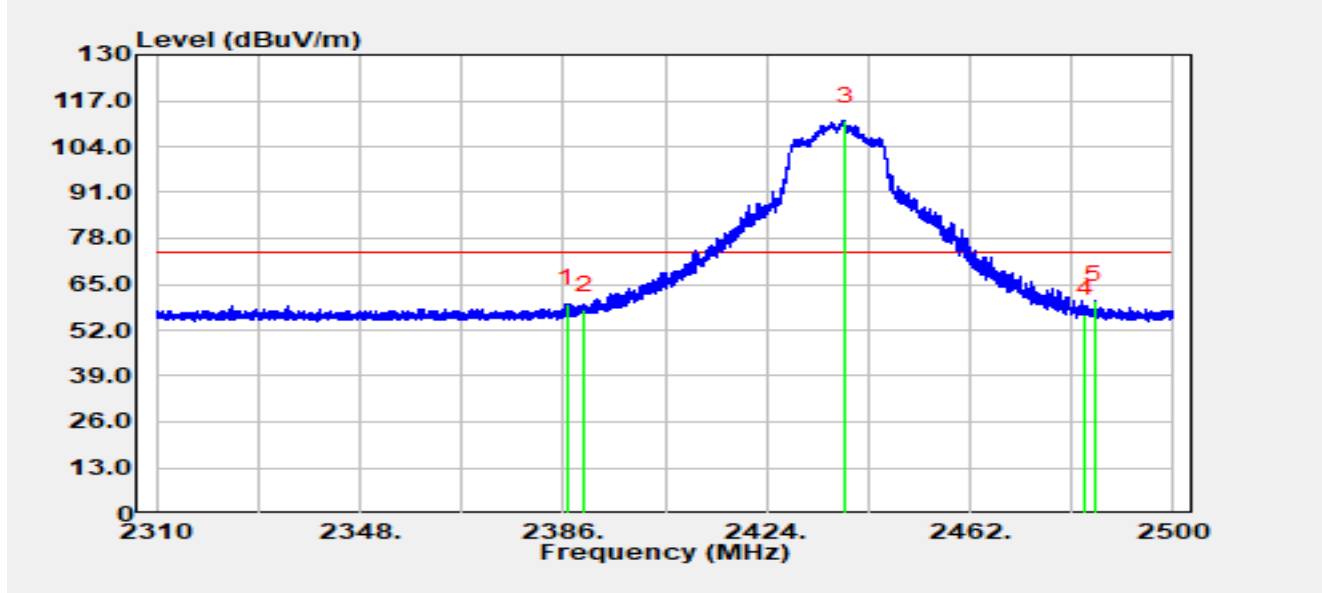


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2386.59	27.44	31.96	59.40	-14.60	74.00	Peak
2		2390.00	25.78	31.95	57.73	-16.27	74.00	Peak
3		2438.65	79.40	31.91	111.31	N/A	N/A	Peak
4		2483.50	24.62	31.81	56.43	-17.57	74.00	Peak
5	*	2485.37	28.66	31.81	60.47	-13.53	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2437 MHz		

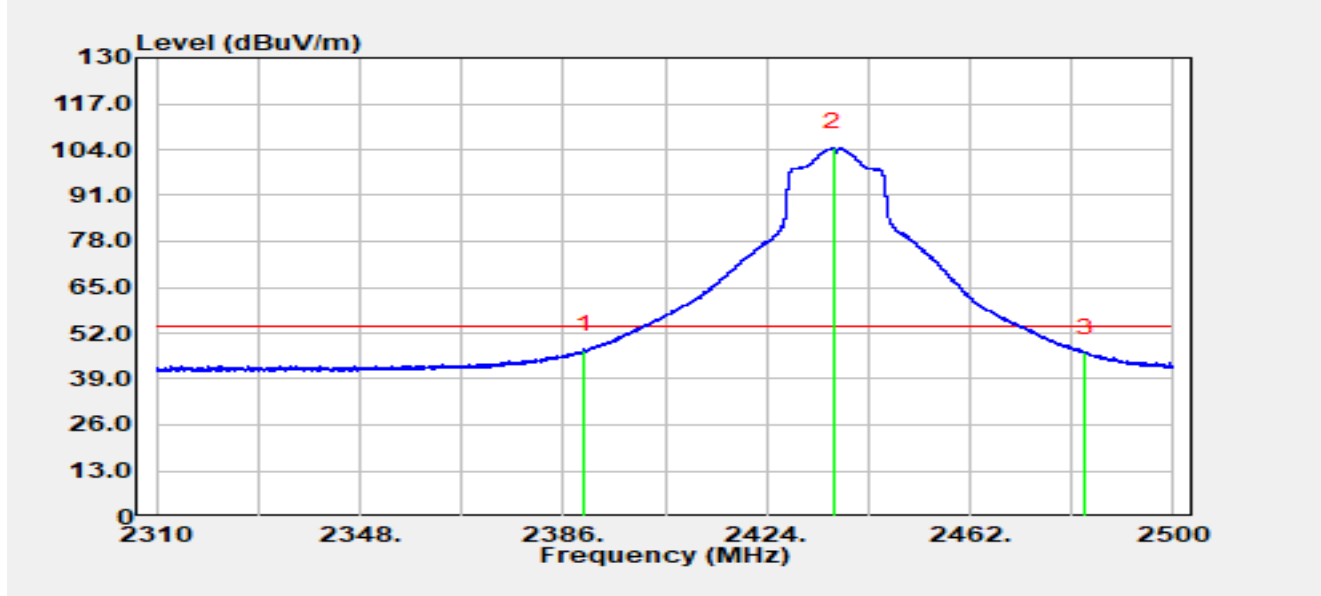


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.00	15.25	31.95	47.19	-6.81	54.00	Average
2		2436.43	72.61	31.91	104.52	N/A	N/A	Average
3		2483.50	14.77	31.81	46.58	-7.42	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2457 MHz		

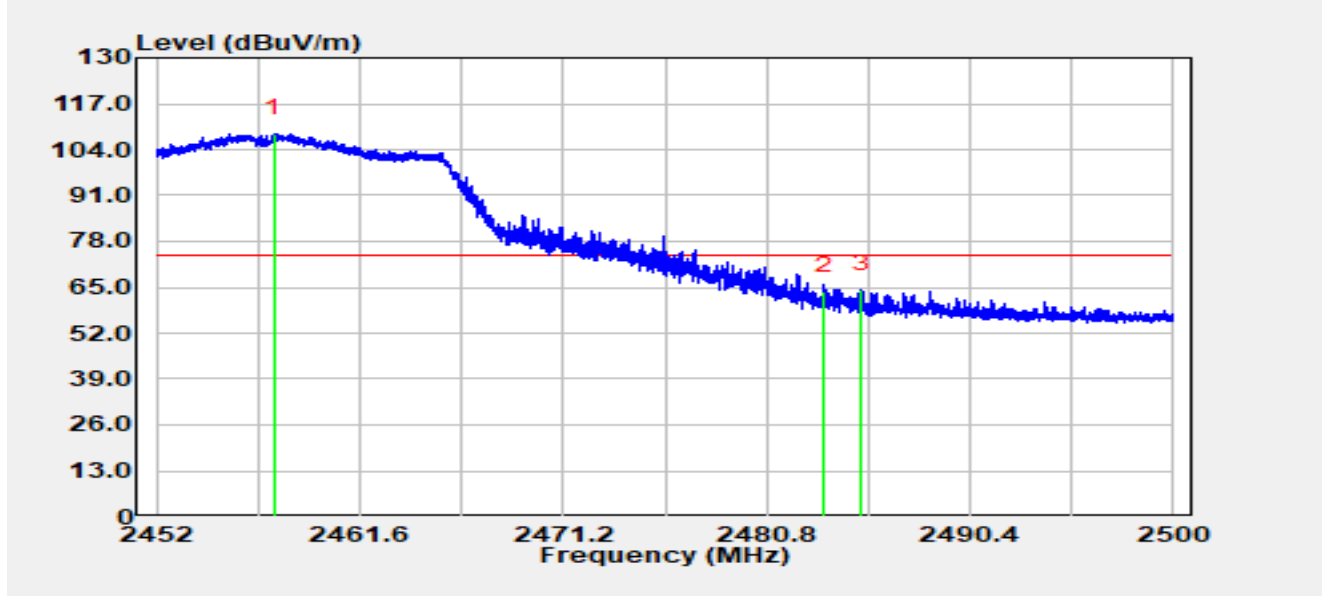


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2457.56	76.73	31.84	108.57	N/A	N/A	Peak
2		2483.50	32.02	31.81	63.83	-10.17	74.00	Peak
3	*	2485.28	32.61	31.81	64.42	-9.58	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2457 MHz		

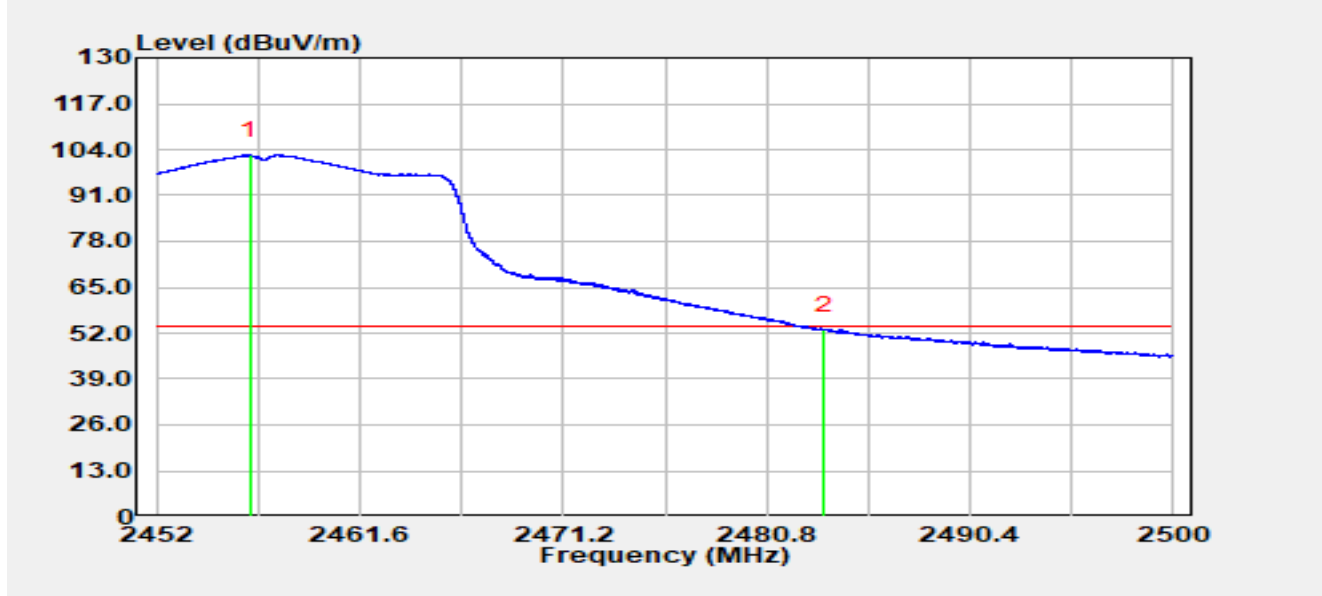


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.40	70.63	31.84	102.47	N/A	N/A	Average
2	*	2483.50	20.99	31.81	52.80	-1.20	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2457 MHz		

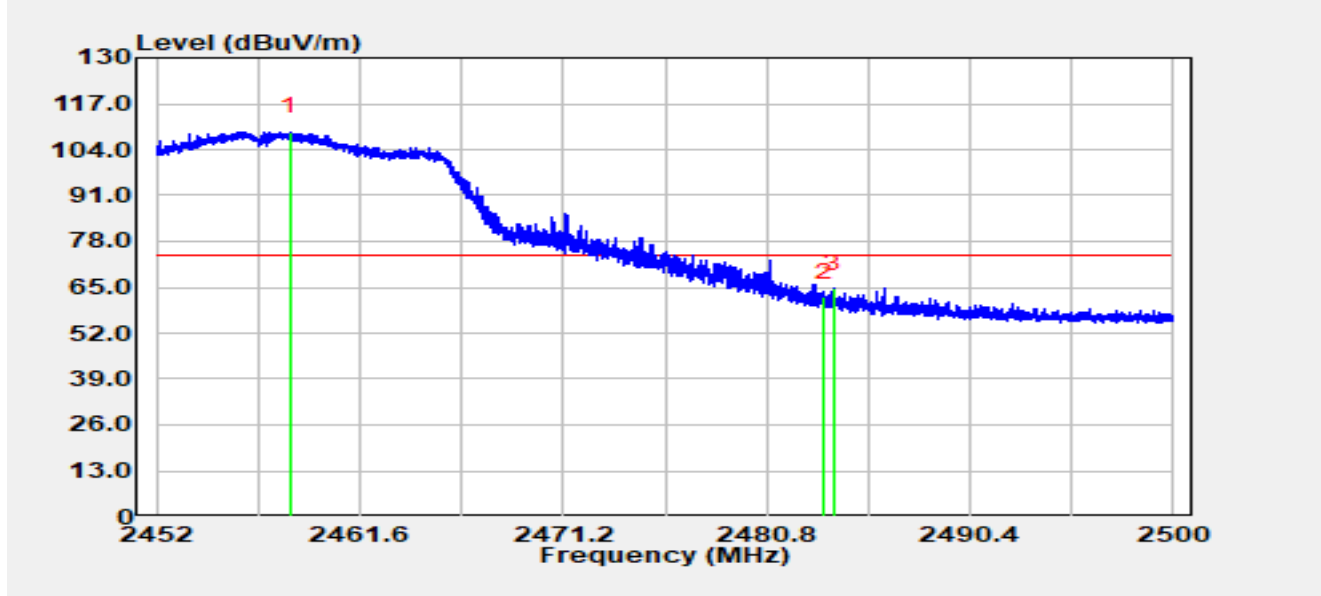


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2458.32	77.28	31.84	109.12	N/A	N/A	Peak
2		2483.50	30.47	31.81	62.28	-11.72	74.00	Peak
3	*	2483.93	32.92	31.81	64.73	-9.27	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-20
Temperature	21.8 °C	Humidity	45.4%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2457 MHz		

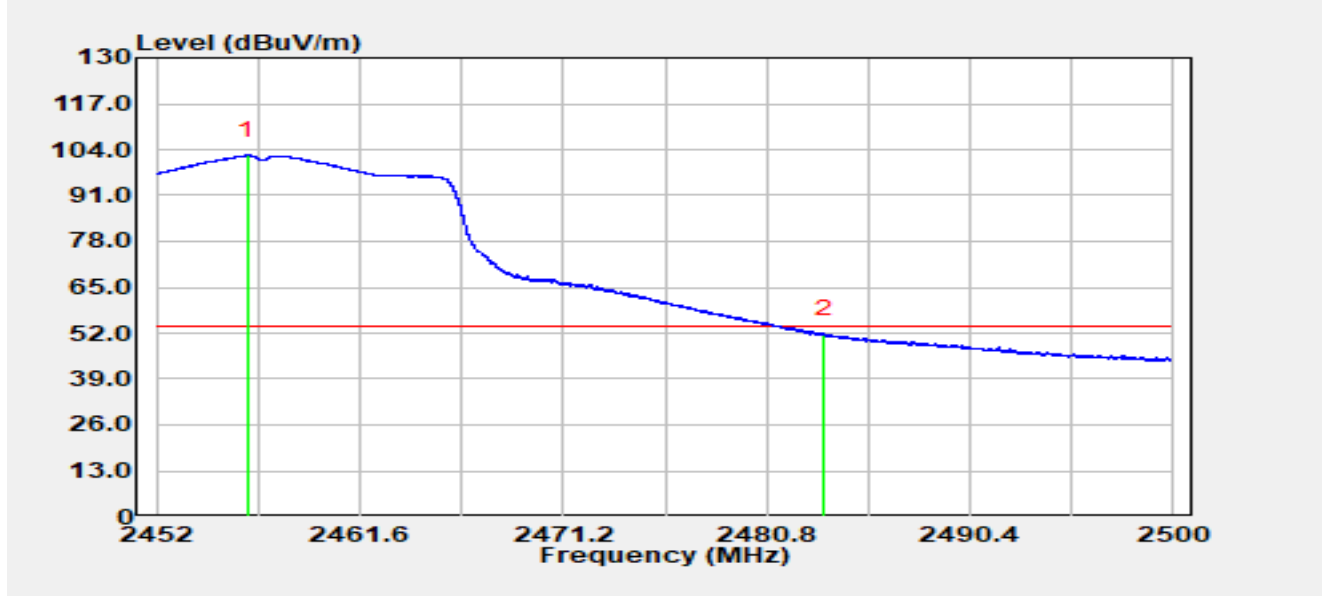


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.29	70.50	31.84	102.34	N/A	N/A	Average
2	*	2483.50	19.82	31.81	51.63	-2.37	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2462 MHz		

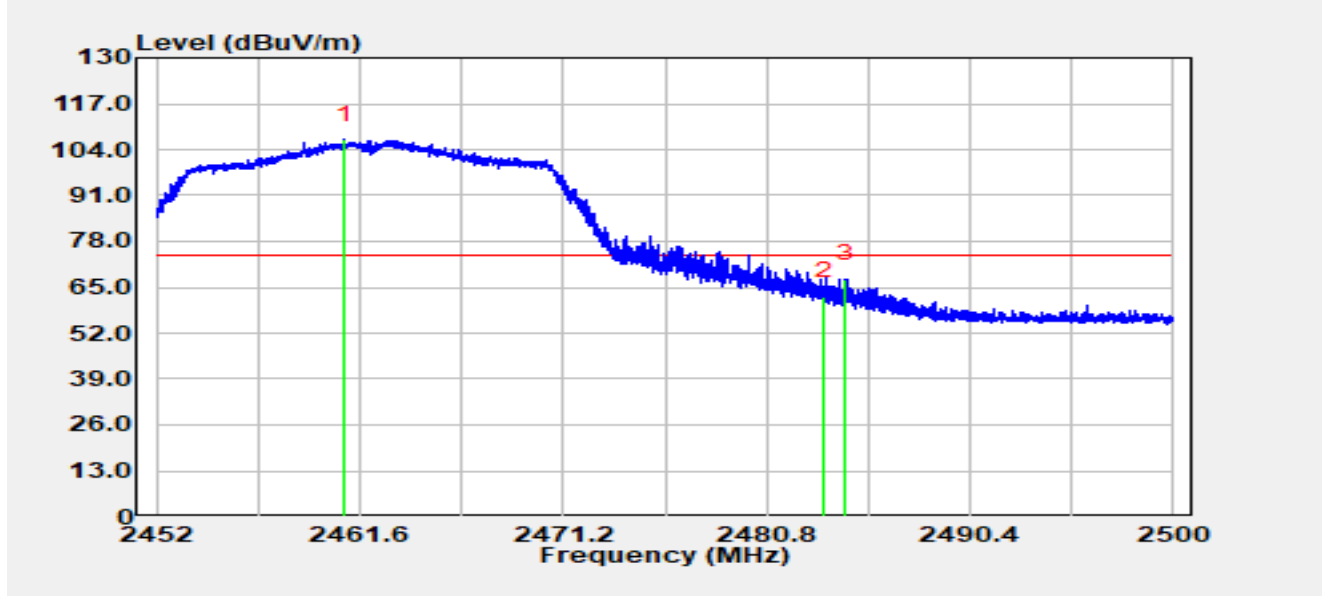


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2460.89	74.93	31.83	106.76	N/A	N/A	Peak
2		2483.50	30.67	31.81	62.48	-11.52	74.00	Peak
3	*	2484.55	35.57	31.81	67.38	-6.62	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11n-HT20 at 2462 MHz		

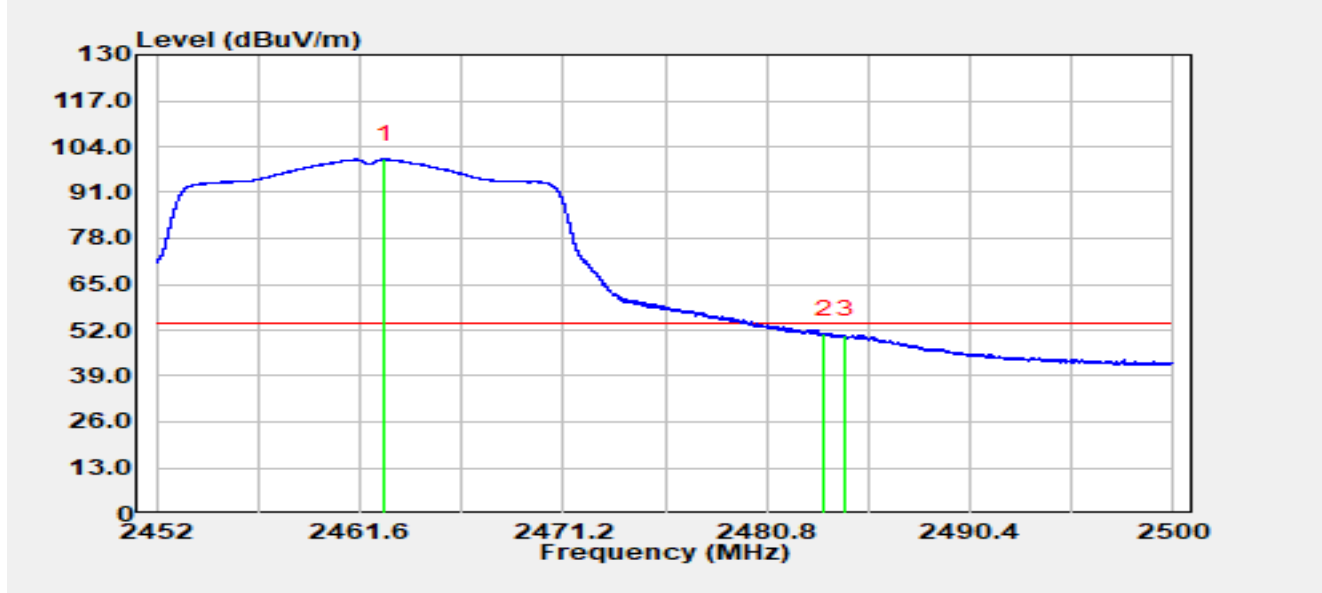


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.75	68.63	31.83	100.46	N/A	N/A	Average
2	*	2483.50	18.98	31.81	50.79	-3.21	54.00	Average
3		2484.52	18.74	31.81	50.56	-3.44	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2462 MHz		

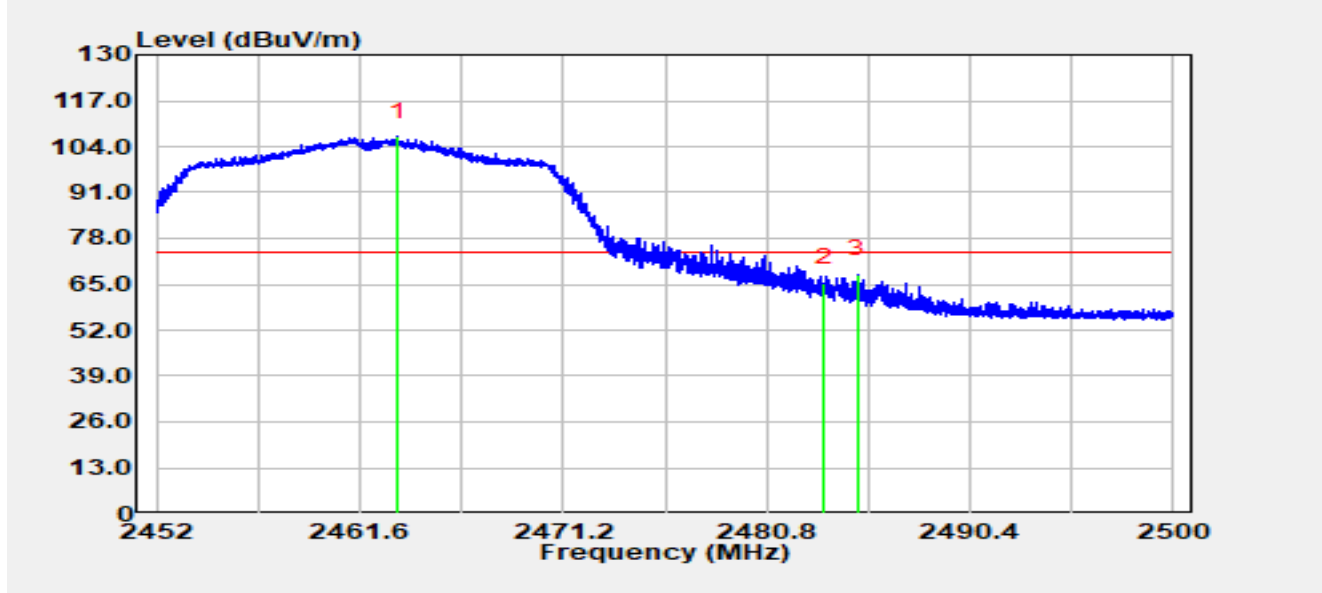


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.41	75.02	31.82	106.84	N/A	N/A	Peak
2		2483.50	33.47	31.81	65.28	-8.72	74.00	Peak
3	*	2485.08	36.06	31.81	67.87	-6.13	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-12-08
Temperature	20.6 °C	Humidity	43.1%
Limit	FCC_2.4G_RE (3 m)	Test Engineer	Ajin Fan
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11n-HT20 at 2462 MHz		

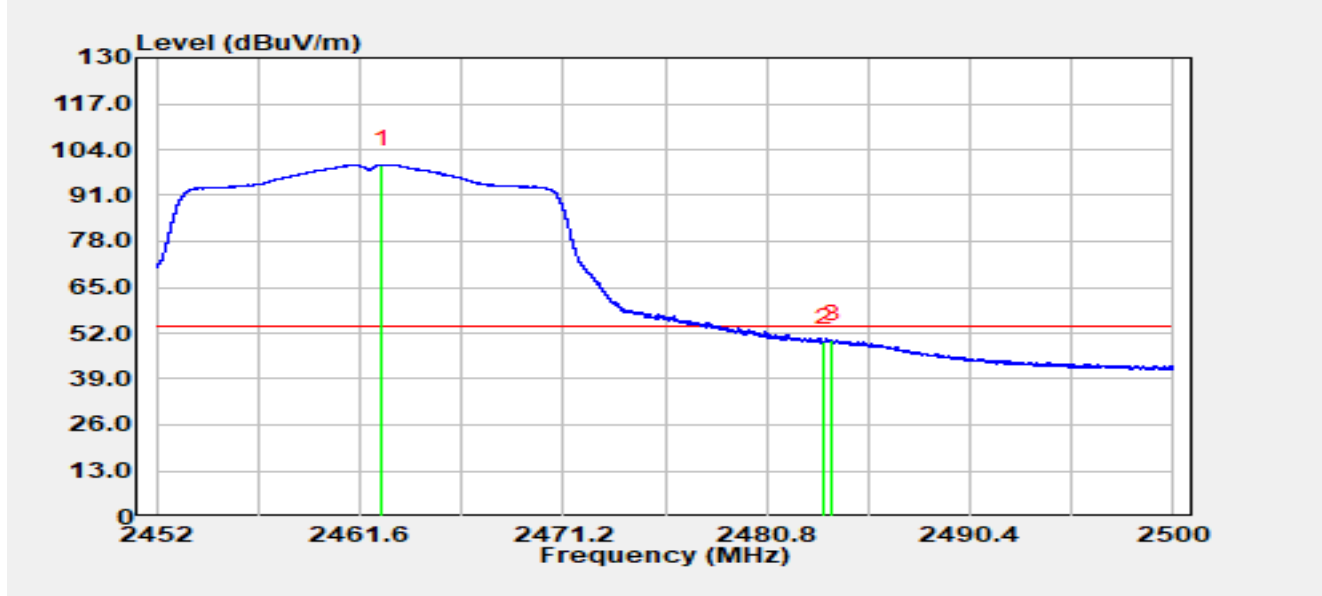


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.62	67.95	31.83	99.77	N/A	N/A	Average
2		2483.50	17.63	31.81	49.44	-4.56	54.00	Average
3	*	2483.89	18.42	31.81	50.23	-3.77	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2026-01-04
Temperature	17.8 °C	Humidity	49.3%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Line
Test Mode	Transmit by 802.11g at 2437 MHz		

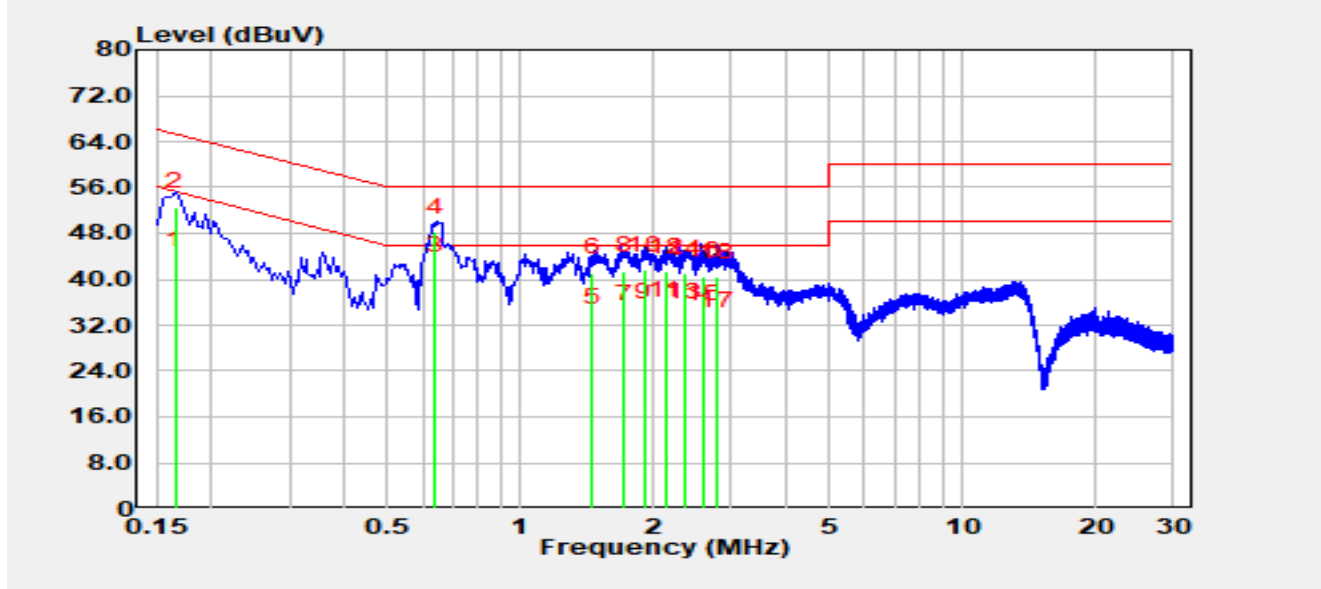


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.17	32.70	9.67	42.37	-12.78	55.16	Average
2		0.17	42.90	9.67	52.57	-12.58	65.16	QP
3	*	0.64	31.60	9.87	41.47	-4.53	46.00	Average
4		0.64	38.30	9.87	48.17	-7.83	56.00	QP
5		1.45	22.50	10.04	32.54	-13.46	46.00	Average
6		1.45	31.10	10.04	41.14	-14.86	56.00	QP
7		1.72	23.10	10.05	33.15	-12.85	46.00	Average
8		1.72	31.40	10.05	41.45	-14.55	56.00	QP
9		1.90	23.20	10.05	33.25	-12.75	46.00	Average
10		1.90	31.50	10.05	41.55	-14.45	56.00	QP
11		2.13	23.70	10.05	33.75	-12.25	46.00	Average
12		2.13	31.20	10.05	41.25	-14.75	56.00	QP
13		2.35	23.20	10.06	33.26	-12.74	46.00	Average
14		2.35	30.90	10.06	40.96	-15.04	56.00	QP
15		2.59	22.90	10.06	32.96	-13.04	46.00	Average
16		2.59	30.50	10.06	40.56	-15.44	56.00	QP
17		2.79	21.90	10.06	31.96	-14.04	46.00	Average

18		2.79	30.30	10.06	40.36	-15.64	56.00	QP
----	--	------	-------	-------	-------	--------	-------	----

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WZ-SR2	Test Date	2026-01-04
Temperature	17.8 °C	Humidity	49.3%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Transmit by 802.11g at 2437 MHz		

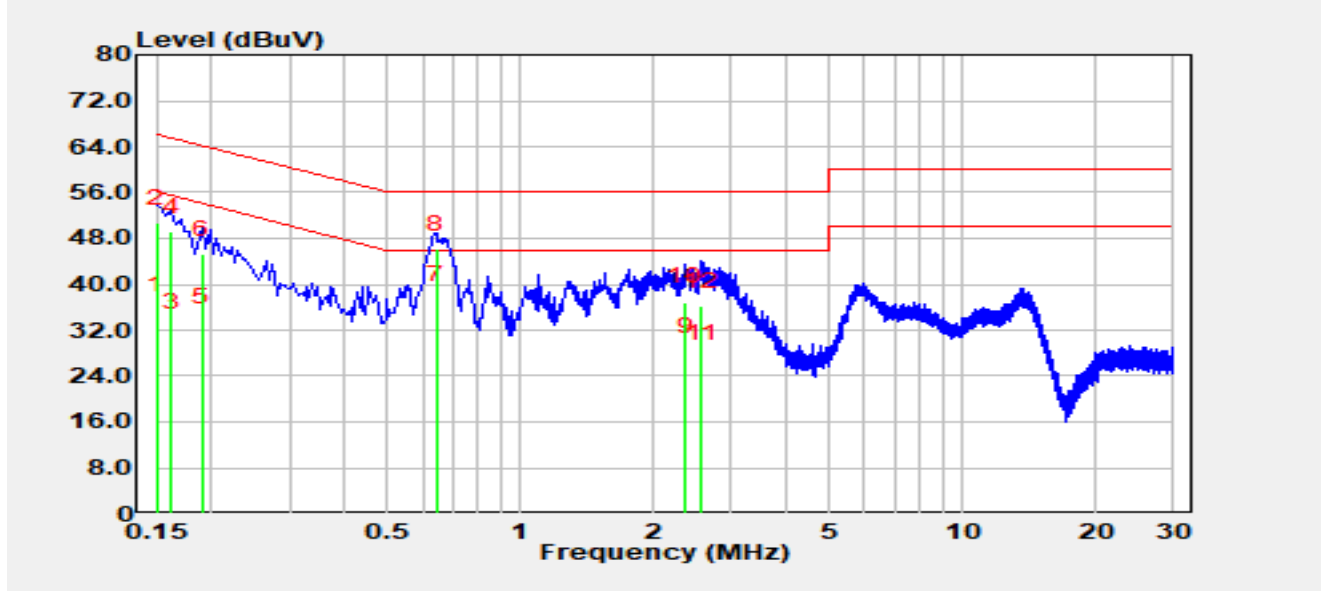

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	25.60	9.79	35.39	-20.61	56.00	Average
2		0.15	40.80	9.79	50.59	-15.41	66.00	QP
3		0.16	22.70	9.79	32.49	-22.87	55.36	Average
4		0.16	39.30	9.79	49.09	-16.27	65.36	QP
5		0.19	23.70	9.80	33.50	-20.54	54.04	Average
6		0.19	35.40	9.80	45.20	-18.84	64.04	QP
7	*	0.64	27.30	9.96	37.26	-8.74	46.00	Average
8		0.64	36.10	9.96	46.06	-9.94	56.00	QP
9		2.36	18.00	10.15	28.15	-17.85	46.00	Average
10		2.36	26.80	10.15	36.95	-19.05	56.00	QP
11		2.56	16.90	10.15	27.05	-18.95	46.00	Average
12		2.56	26.00	10.15	36.15	-19.85	56.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to "R25S1002128-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1002128-UE" file.

_____ The End _____