NVLAP TESTING
LABORATORY CODE 600341-0

BACL Bay Area Compliance Labs Corp.

TEST REPORT

Applicant: **Amaury International Corp**

Address: **7290 NW 70th Street Miami, Florida 33166**

Product Name: **SMART WATCH**

FCC ID: **2BDSQ-NVK-R3490**

Standard(s): **47 CFR Part 15, Subpart C(15.247)**
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02

Report Number: **DG1231214-75385E-RF-00B**

Report Date: **2024/1/6**

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Reviewed By: Gavin Xu
Title: RF Engineer

Approved By: Ivan Cao
Title: EMC Manager

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China
Tel: +86-769-86858888
Fax: +86-769-86858891
www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★.This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

CONTENTS

DOCUMENT REVISION HISTORY ····· 4

1. GENERAL INFORMATION ····· 5

1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST ····· 5

1.2 ACCESSORY INFORMATION ····· 5

1.3 ANTENNA INFORMATION DETAIL▲ ····· 5

1.4 EQUIPMENT MODIFICATIONS ····· 5

2. DESCRIPTION OF TEST CONFIGURATION ····· 6

2.1 OPERATION FREQUENCY DETAIL ····· 6

2.2 EUT OPERATION CONDITION ····· 6

2.3 EUT EXERCISE SOFTWARE ····· 6

2.4 SUPPORT EQUIPMENT LIST AND DETAILS ····· 6

2.5 SUPPORT CABLE LIST AND DETAILS ····· 6

2.6 BLOCK DIAGRAM OF TEST SETUP ····· 7

2.7 TEST FACILITY ····· 8

2.8 MEASUREMENT UNCERTAINTY ····· 8

3. SUMMARY OF TEST RESULTS ····· 9

4. REQUIREMENTS AND TEST PROCEDURES ····· 10

4.1 AC LINE CONDUCTED EMISSIONS ····· 10

4.1.1 Applicable Standard ····· 10
4.1.2 EUT Setup ····· 11
4.1.3 EMI Test Receiver Setup ····· 11
4.1.4 Test Procedure ····· 12
4.1.5 Corrected Result & Margin Calculation ····· 12
4.1.6 Test Result ····· 12

4.2 RADIATION SPURIOUS EMISSIONS ····· 13

3.2.1 Applicable Standard ····· 13
4.2.2 EUT Setup ····· 13
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup ····· 15
4.2.4 Test Procedure ····· 15
4.2.5 Corrected Result & Margin Calculation ····· 15
4.2.6 Test Result ····· 15

4.3 MINIMUM 6 DB BANDWIDTH ····· 16

4.3.1 Applicable Standard ····· 16
4.3.2 EUT Setup ····· 16
4.3.3 Test Procedure ····· 16
4.3.4 Test Result ····· 16

4.4 MAXIMUM CONDUCTED OUTPUT POWER ····· 17

4.4.1 Applicable Standard ····· 17
4.4.2 EUT Setup ····· 17
4.4.3 Test Procedure ····· 17

4.4.4 Test Result 17
4.5 MAXIMUM POWER SPECTRAL DENSITY 18
4.5.1 Applicable Standard 18
4.5.2 EUT Setup 18
4.5.3 Test Procedure 18
4.5.4 Test Result 18
4.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE 19
4.6.1 Applicable Standard 19
4.6.2 EUT Setup 19
4.6.3 Test Procedure 19
4.6.4 Test Result 19
4.7 DUTY CYCLE 20
4.7.1 EUT Setup 20
4.7.2 Test Procedure 20
4.7.3 Judgment 20
4.8 ANTENNA REQUIREMENT 21
4.8.1 Applicable Standard 21
4.8.2 Judgment 21
5. Test DATA AND RESULTS 22
5.1 AC LINE CONDUCTED EMISSIONS 22
5.2 RADIATION SPURIOUS EMISSIONS 25
5.3 6 DB EMISSION BANDWIDTH 39
5.4 MAXIMUM CONDUCTED OUTPUT POWER 41
5.5 MAXIMUM POWER SPECTRAL DENSITY 43
5.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE 45
5.7 DUTY CYCLE 46
6. RF EXPOSURE EVALUATION 47
6.1 APPLICABLE STANDARD 47
6.2 MEASUREMENT RESULT 47
7. EUT PHOTOGRAPHS 48
8. TEST SETUP PHOTOGRAPHS 49

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	DG1231214-75385E-RF-00B	Original Report	2024/1/6

1. GENERAL INFORMATION

1.1 General Description Of Equipment under Test

EUT Name:	SMART WATCH
EUT Model:	NVK-R3490
Operation Frequency:	2402-2480 MHz
Maximum Peak Output Power (Conducted):	-1.55 dBm
Modulation Type:	GFSK
Rated Input Voltage:	DC 3.8V from battery or DC 5V from charger
Serial Number:	2F85-2(For RF Conducted Test) 2F85-1(For For Radiated Spurious Emission/AC Line conducted Emission Test)
EUT Received Date:	2023/12/15
EUT Received Status:	Good

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
Charger	Amaury International Corp	Unknown	Output:5V

1.3 Antenna Information Detail▲

Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Chang feng Electronics science and technology Co., Ltd.	FPC	50	2.4~2.5GHz	0.18 dBi
The Method of §15.203 Compliance: ☒Antenna was permanently attached to the unit. ☐Antenna use a unique type of connector to attach to the EUT. ☐Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.				

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. DESCRIPTION OF TEST CONFIGURATION

2.1 Operation Frequency Detail

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	**2402**	20	2442
1	2404	…	…
…	…	…	…
…	…	…	…
..	…	38	2478
19	**2440**	39	**2480**

2.2 EUT Operation Condition

The system was configured for testing in Engineering Mode, which was provided by the manufacturer. The following summary table is showing all test modes to demonstrate in compliance with the standard:

Test Items	Test Modes
RF Conducted	Mode 1: Transmitting_1Mbps
Radiated Spurious Emission	Mode 1: Transmitting_1Mbps
AC Line Conducted Emission	Test was performed at the channel and mode with maximum output power
Note: Mode 1 were tested with the frequencies in bold in section 2.1.	

2.3 EUT Exercise Software

EUT Exercise Software:	MPKitSetupPackage-v5.3.1.81		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:			
Test Modes	Power Level Setting		
	Lowest	Middle	Highest
BLE	Default	Default	Default

2.4 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Huntkey	Adapter	HKA01105021-XE	0D1805002143

2.5 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC Cable	No	No	0.3	Adapter	EUT

2.6 Block Diagram of Test Setup

AC Power Lines Conducted Emission:

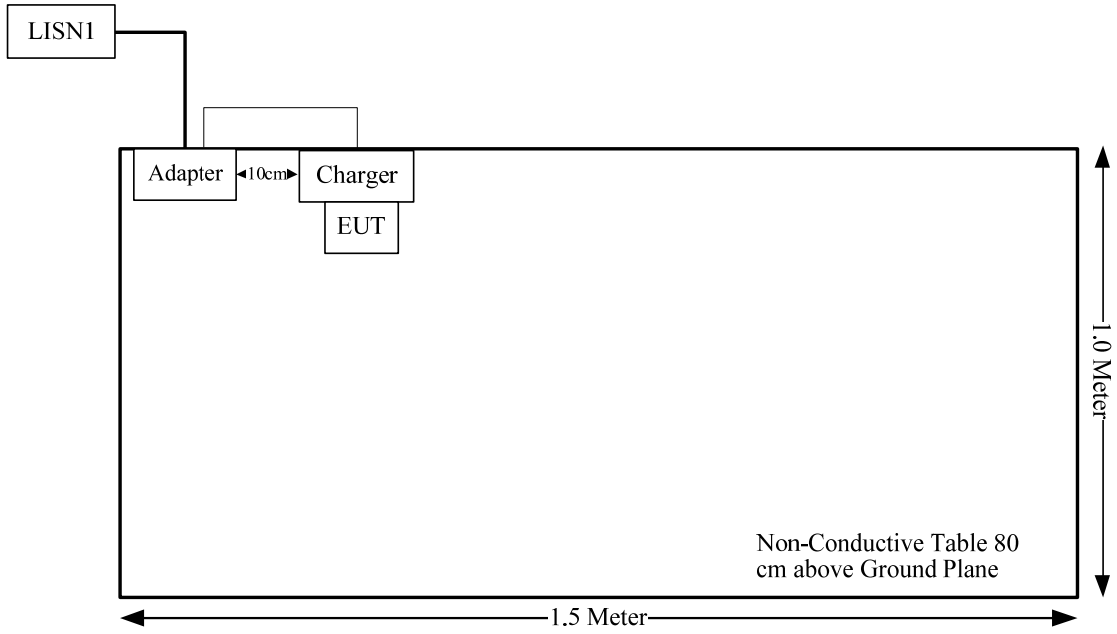

Radiated Spurious Emissions:

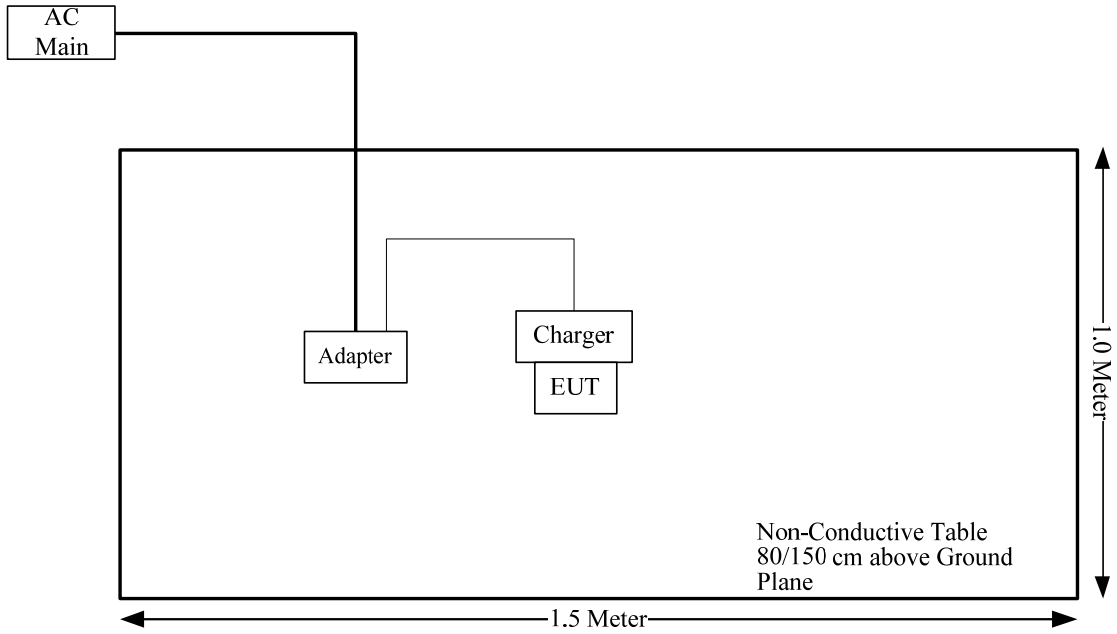

2.7 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

2.8 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz:5.47 dB, 26.5GHz~40GHz:5.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

3. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions	Compliant
§15.247 (a)(2)	Minimum 6 dB Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.203	Antenna Requirement	Compliant
FCC§15.247 (i) & §1.1310	RF Exposure Evaluation	Compliant

4. REQUIREMENTS AND TEST PROCEDURES

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

	Conducted limit (dBµV)	
Frequency of emission (MHz)	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 µV within the frequency band 535-1705 kHz, as measured using a 50 µH/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtainig their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

4.1.2 EUT Setup

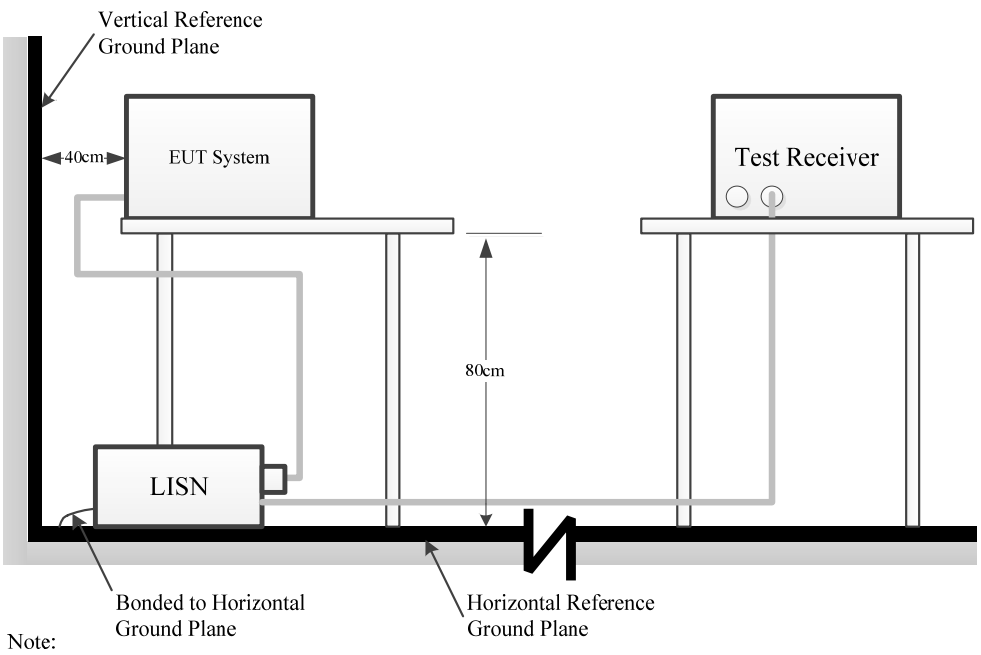

Note:
1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at least 80 cm from other units and oter metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Result & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor
Factor = attenuation caused by cable loss + voltage division factor of AMN

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result

Please refer to section 5.1.

4.2 Radiation Spurious Emissions

3.2.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

4.2.2 EUT Setup

9kHz-30MHz:

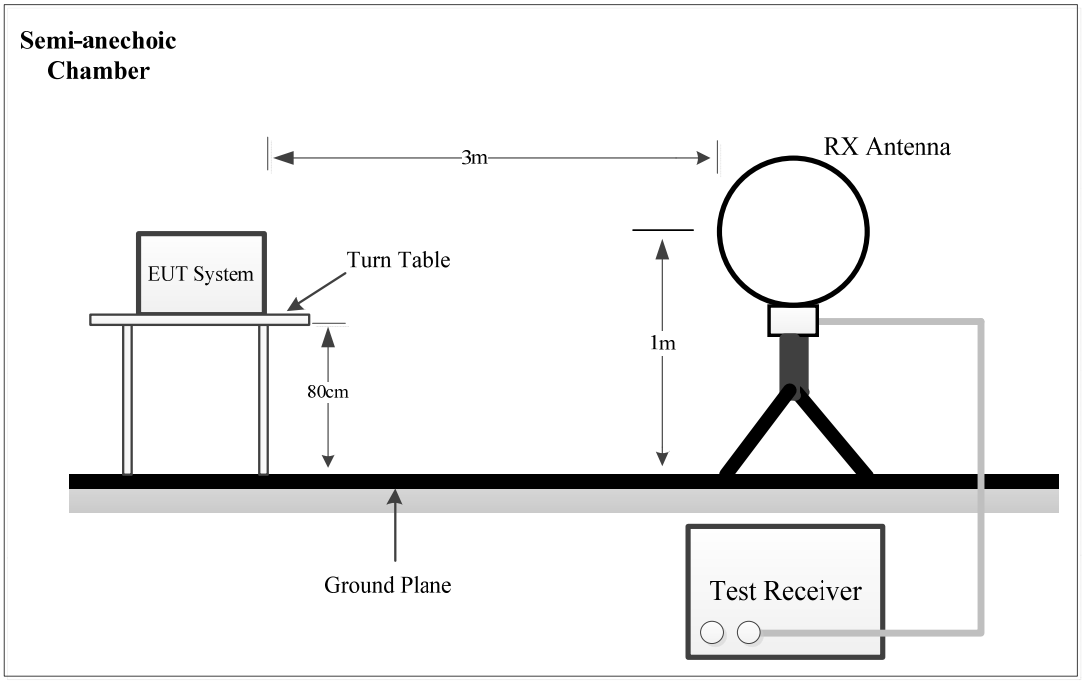

30MHz~1GHz:

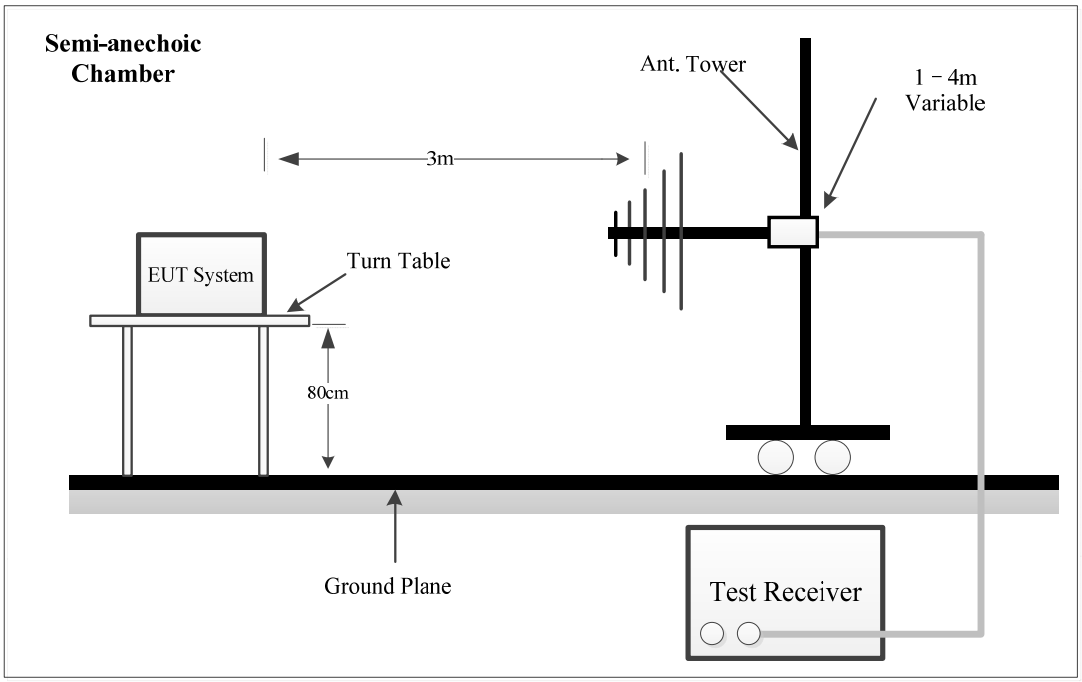

Above 1GHz:

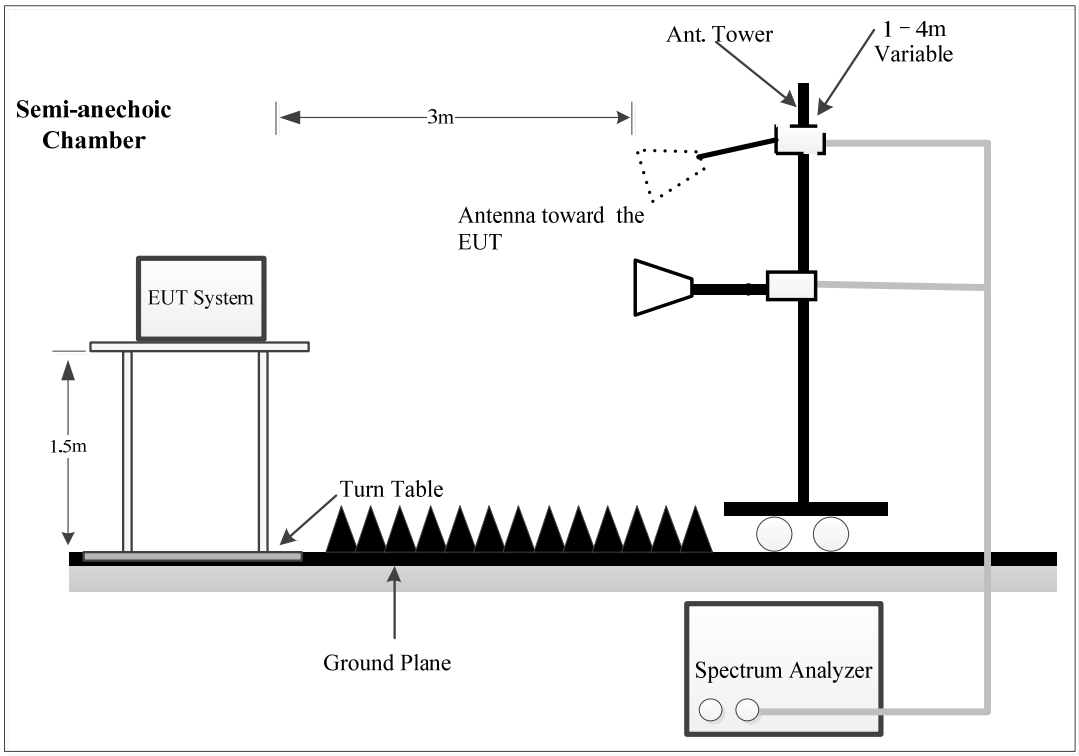

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W
9 kHz – 150 kHz	QP/AV	200 Hz	1 kHz	200 Hz
150 kHz – 30 MHz	QP/AV	9 kHz	30 kHz	9 kHz
30 MHz – 1000 MHz	PK	100 kHz	300 kHz	/
	QP	/	/	120 kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	⩾1/T

Note: T is minimum transmission duration

If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz except 9 – 90 kHz, 110 – 490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

4.2.5 Corrected Result & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor
Factor = Antenna Factor + Cable Loss- Amplifier Gain

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.2.6 Test Result

Please refer to section 5.2.

4.3 Minimum 6 dB Bandwidth

4.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

4.3.2 EUT Setup

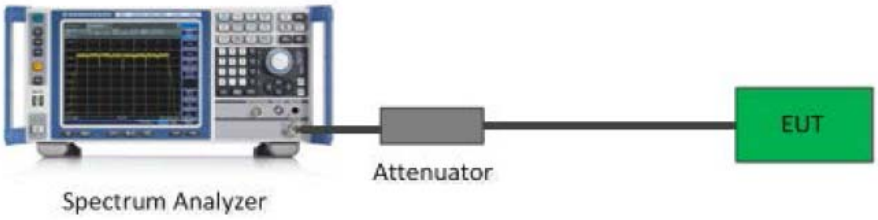

4.3.3 Test Procedure

According to ANSI C63.10-2013 Section 11.8

a) Set RBW = 100 kHz.
b) Set the video bandwidth (VBW) ≥ 3×RBW.
c) Detector = Peak.
d) Trace mode = max hold.
e) Sweep = auto couple.
f) Allow the trace to stabilize.
g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.3.4 Test Result

Please refer to section 5.3.

4.4 Maximum Conducted Output Power

4.4.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

4.4.2 EUT Setup

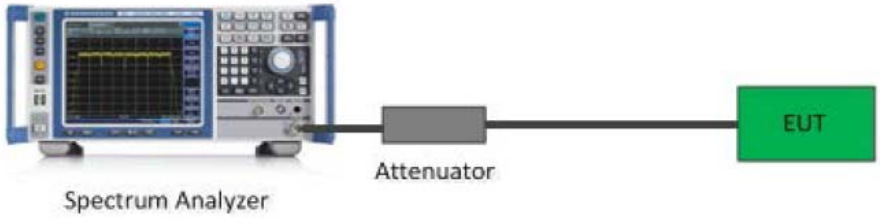

4.4.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.1.1

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:
a) Set the RBW ≥ DTS bandwidth.
b) Set VBW ≥ [3 × RBW].
c) Set span ≥ [3 × RBW].
d) Sweep time = auto couple.
e) Detector = peak.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use peak marker function to determine the peak amplitude level.

4.4.4 Test Result

Please refer to section 5.4.

4.5 Maximum power spectral density

4.5.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

4.5.2 EUT Setup

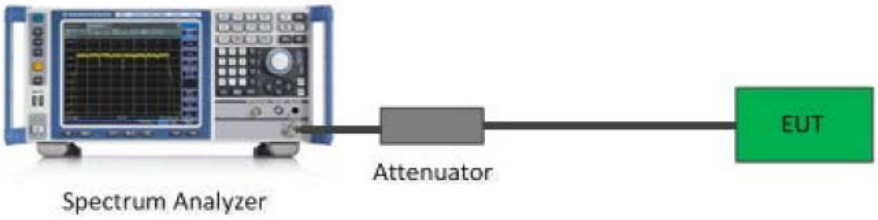

4.5.3 Test Procedure

According to ANSI C63.10-2013 Section 11.10.2

a) Set analyzer center frequency to DTS channel center frequency.
b) Set the span to 1.5 times the DTS bandwidth.
c) Set the RBW to 3 kHz ≤ RBW ≤ 100 kHz.
d) Set the VBW ≥ [3 × RBW].
e) Detector = peak.
f) Sweep time = auto couple.
g) Trace mode = max hold.
h) Allow trace to fully stabilize.
i) Use the peak marker function to determine the maximum amplitude level within the RBW.
j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

4.5.4 Test Result

Please refer to section 5.5.

4.6 100 kHz Bandwidth of Frequency Band Edge

4.6.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

4.6.2 EUT Setup

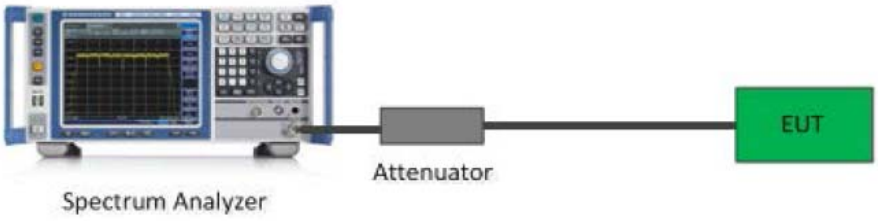

4.6.3 Test Procedure

According to ANSI C63.10-2013 Section 11.11

a) Set the center frequency and span to encompass frequency range to be measured.
b) Set the RBW = 100 kHz.
c) Set the VBW ≥ [3 × RBW].
d) Detector = peak.
e) Sweep time = auto couple.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use the peak marker function to determine the maximum amplitude level.
Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

4.6.4 Test Result

Please refer to section 5.6.

4.7 Duty Cycle

4.7.1 EUT Setup

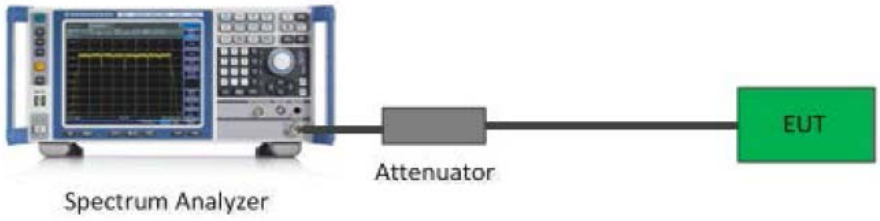

4.7.2 Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
1) Set the center frequency of the instrument to the center frequency of the transmission.
2) Set RBW ≥ OBW if possible; otherwise, set RBW to the largest available value.
3) Set VBW ≥ RBW. Set detector = peak or average.
4) The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if T ≤ 16.7 μs.)

4.7.3 Judgment

Report Only.

4.8 Antenna Requirement

4.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.8.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.3.

5. Test DATA AND RESULTS

5.1 AC Line Conducted Emissions

Serial Number:	2F85-1	Test Date:	2023/12/20
Test Site:	CE	Test Mode:	Transmitting (Test was performed at the channel with maximum output power)
Tester:	Lane Sun	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	18.6	Relative Humidity: (%)	39	ATM Pressure: (kPa)	101.8

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2023/10/18	2024/10/17
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2023/9/5	2024/9/4
R&S	EMI Test Receiver	ESCI	100035	2023/8/18	2024/8/17
R&S	Test Software	EMC32	V9.10.00	N/A	N/A

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Project No:	DG1231214-75385E-RF
Test Engineer:	Lane Sun
Test Date:	2023-12-20
Port:	L
Test Mode:	Transmitting
Power Source:	AC 120V/60Hz
Note:	BLE 1M Low Channel

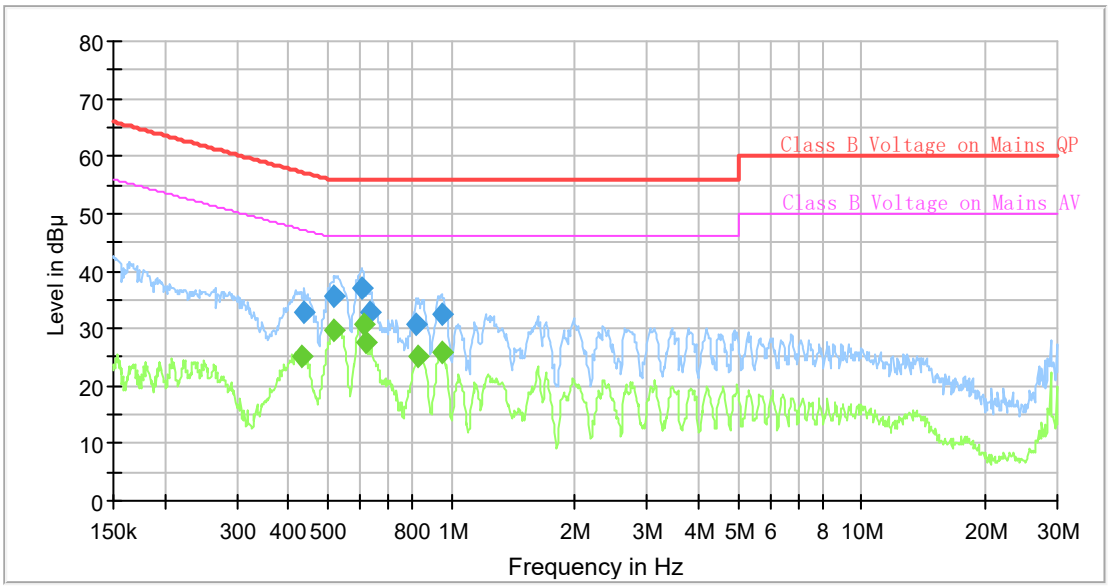

Final_Result

Frequency (MHz)	QuasiPeak (dB µ V)	Average (dB µ V)	Limit (dB µ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.431814	---	25.22	47.22	22.00	9.000	L1	10.8
0.438323	32.76	---	57.09	24.33	9.000	L1	10.8
0.516743	---	29.58	46.00	16.42	9.000	L1	10.8
0.516743	35.65	---	56.00	20.35	9.000	L1	10.8
0.603146	37.16	---	56.00	18.84	9.000	L1	10.8
0.609193	---	30.73	46.00	15.27	9.000	L1	10.8
0.618376	---	27.45	46.00	18.55	9.000	L1	10.8
0.630837	32.73	---	56.00	23.27	9.000	L1	10.8
0.821710	30.76	---	56.00	25.24	9.000	L1	10.9
0.829947	---	25.00	46.00	21.00	9.000	L1	10.9
0.944861	32.50	---	56.00	23.50	9.000	L1	10.9
0.949586	---	26.01	46.00	19.99	9.000	L1	10.9

Project No:	DG1231214-75385E-RF
Test Engineer:	Lane Sun
Test Date:	2023-12-20
Port:	N
Test Mode:	Transmitting
Power Source:	AC 120V/60Hz
Note:	BLE 1M Low Channel

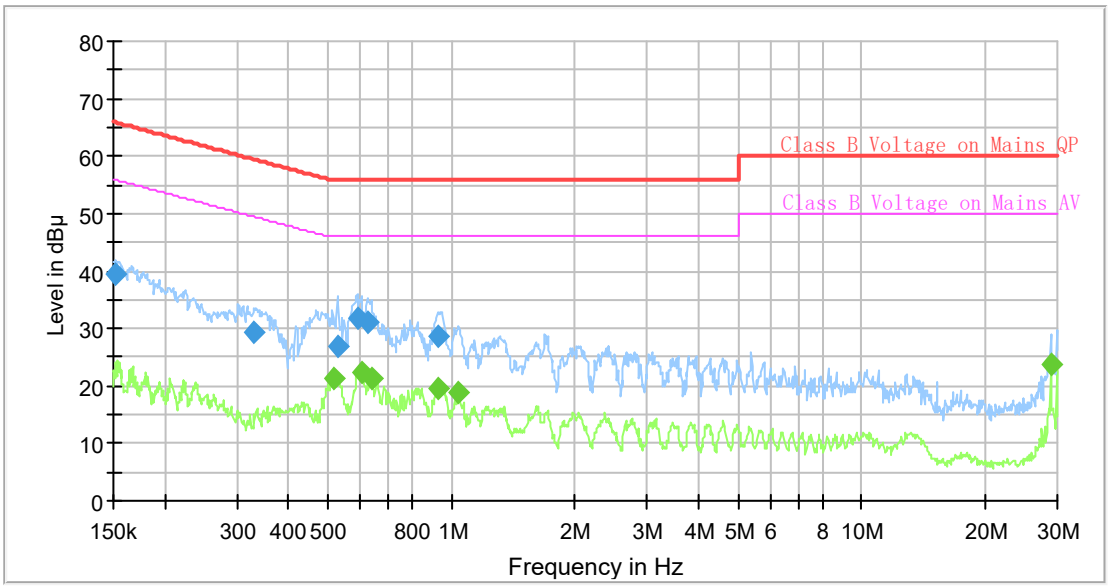

Final_Result

Frequency (MHz)	QuasiPeak (dB µ V)	Average (dB µ V)	Limit (dB µ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.152261	39.58	---	65.88	26.30	9.000	N	10.9
0.329860	29.40	---	59.45	30.05	9.000	N	10.8
0.516743	---	21.20	46.00	24.80	9.000	N	10.7
0.527156	27.07	---	56.00	28.93	9.000	N	10.7
0.591232	31.74	---	56.00	24.26	9.000	N	10.7
0.603146	---	22.44	46.00	23.56	9.000	N	10.7
0.624575	31.03	---	56.00	24.97	9.000	N	10.7
0.637161	---	21.46	46.00	24.54	9.000	N	10.7
0.926198	28.82	---	56.00	27.18	9.000	N	10.8
0.930829	---	19.73	46.00	26.27	9.000	N	10.8
1.043973	---	18.73	46.00	27.27	9.000	N	10.9
28.925869	---	23.67	50.00	26.33	9.000	N	11.0

5.2 Radiation Spurious Emissions

Serial Number:	2F85-1	Test Date:	Below 1GHz: 2023/12/24 Above 1GHz: 2023/12/22~2024/1/5
Test Site:	966-1/966-2	Test Mode:	Transmitting
Tester:	Zoo Zou, Colin Yang	Test Result:	Pass

Environmental Conditions:					
Temperature: (℃)	15.8~20.3	Relative Humidity: (%)	42~45	ATM Pressure: (kPa)	101.5~102.6

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
9kHz~1000MHz					
EMCO	Passive Loop Antenna	6512	9706-1206	2021/3/5	2024/3/5
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2024/9/5
Narda	Attenuator	779-6dB	04269	2023/9/6	2024/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2023/8/1	2024/7/31
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2023/8/1	2024/7/31
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2023/8/1	2024/7/31
Sonoma	Amplifier	310N	185914	2023/8/1	2024/7/31
R&S	EMI Test Receiver	ESCI	100224	2023/8/18	2024/8/17
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2024/9/6
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2023/11/18	2024/11/17
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2023/12/11	2024/12/10
AH	Preamplifier	PAM-0118P	469	2023/8/19	2024/8/18
AH	Preamplifier	PAM-1840VH	191	2023/9/7	2024/9/6
R&S	Spectrum Analyzer	FSV40	101944	2023/10/18	2024/10/17
E-Microwave	Band Rejection Filter	OBSF-2400-2483.5-S	OE01601525	2023/6/16	2024/6/15
Mini Circuits	High Pass Filter	VHF-6010+	31118	2023/6/16	2024/6/15
Audix	Test Software	E3	191218 (V9)	N/A	N/A

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

1) 9kHz~30MHz

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

2) 30MHz-1GHz

Project No:	DG1231214-75385E-RF
Test Engineer:	Zoo Zou
Test Date:	2023-12-24
Polarization:	Horizontal
Test Mode:	Transmitting_Low channel
Power Source:	AC 120V/60Hz

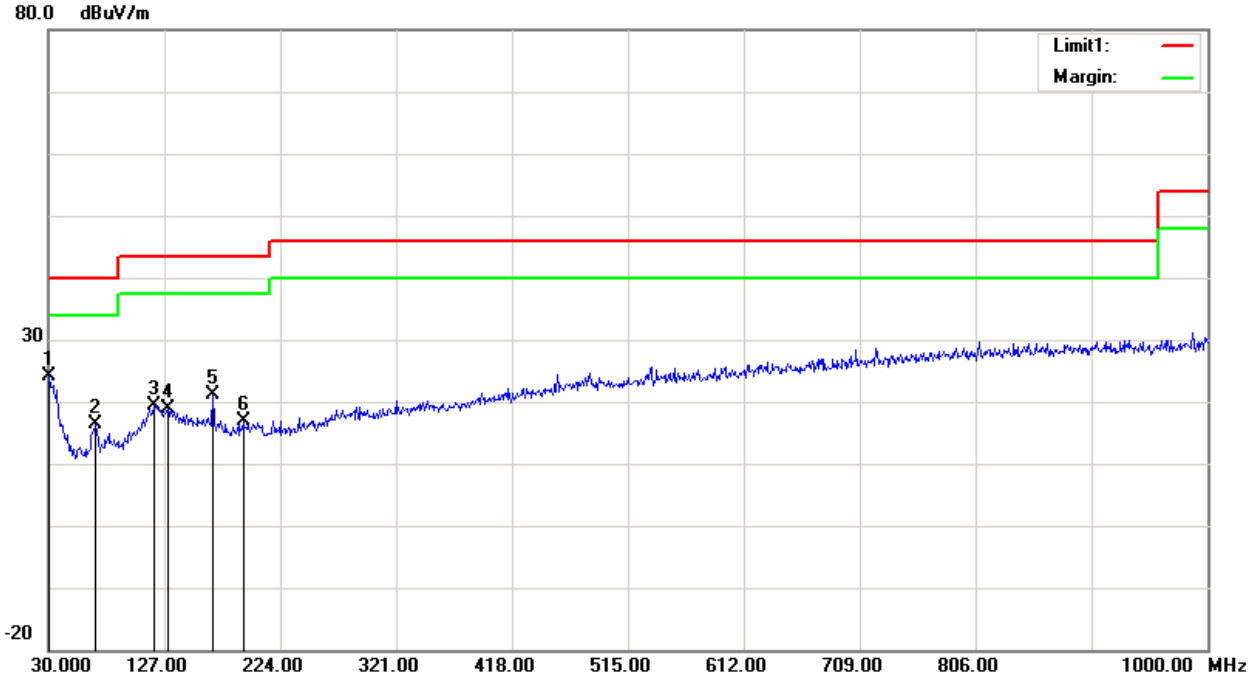

No.	Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	30.9700	28.41	peak	-4.31	24.10	40.00	15.90
2	69.7700	32.65	peak	-16.28	16.37	40.00	23.63
3	118.2700	29.31	peak	-10.03	19.28	43.50	24.22
4	129.9100	28.78	peak	-9.85	18.93	43.50	24.57
5	167.7400	32.49	peak	-11.48	21.01	43.50	22.49
6	192.9600	28.75	peak	-11.99	16.76	43.50	26.74

Project No: DG1231214-75385E-RF
Test Engineer: Zoo Zou
Test Date: 2023-12-24
Polarization: Vertical
Test Mode: Transmitting_Low channel
Power Source: AC 120V/60Hz

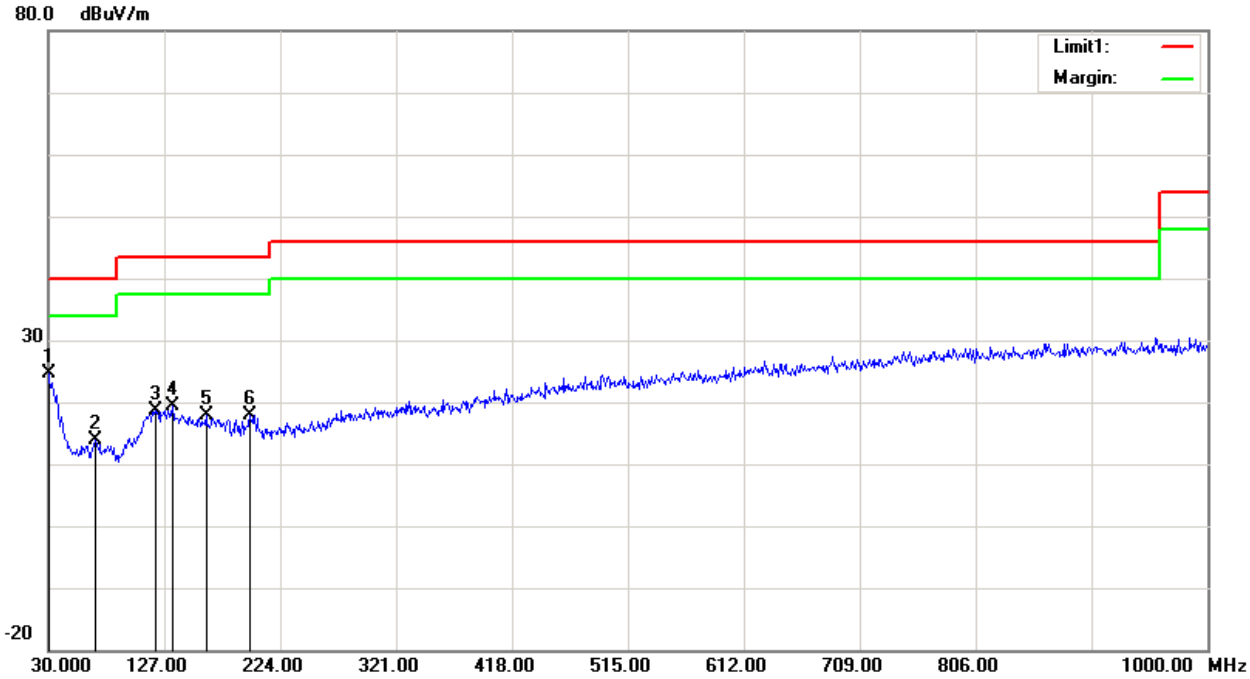

No.	Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	30.0000	28.33	peak	-3.80	24.53	40.00	15.47
2	68.8000	30.10	peak	-16.28	13.82	40.00	26.18
3	119.2400	28.51	peak	-9.98	18.53	43.50	24.97
4	133.7900	29.31	peak	-10.00	19.31	43.50	24.19
5	161.9200	29.14	peak	-11.15	17.99	43.50	25.51
6	198.7800	29.44	peak	-11.54	17.90	43.50	25.60

Project No: DG1231214-75385E-RF
Test Engineer: Zoo Zou
Test Date: 2023-12-24
Polarization: Horizontal
Test Mode: Transmitting_Middle Channel
Power Source: AC 120V/60Hz

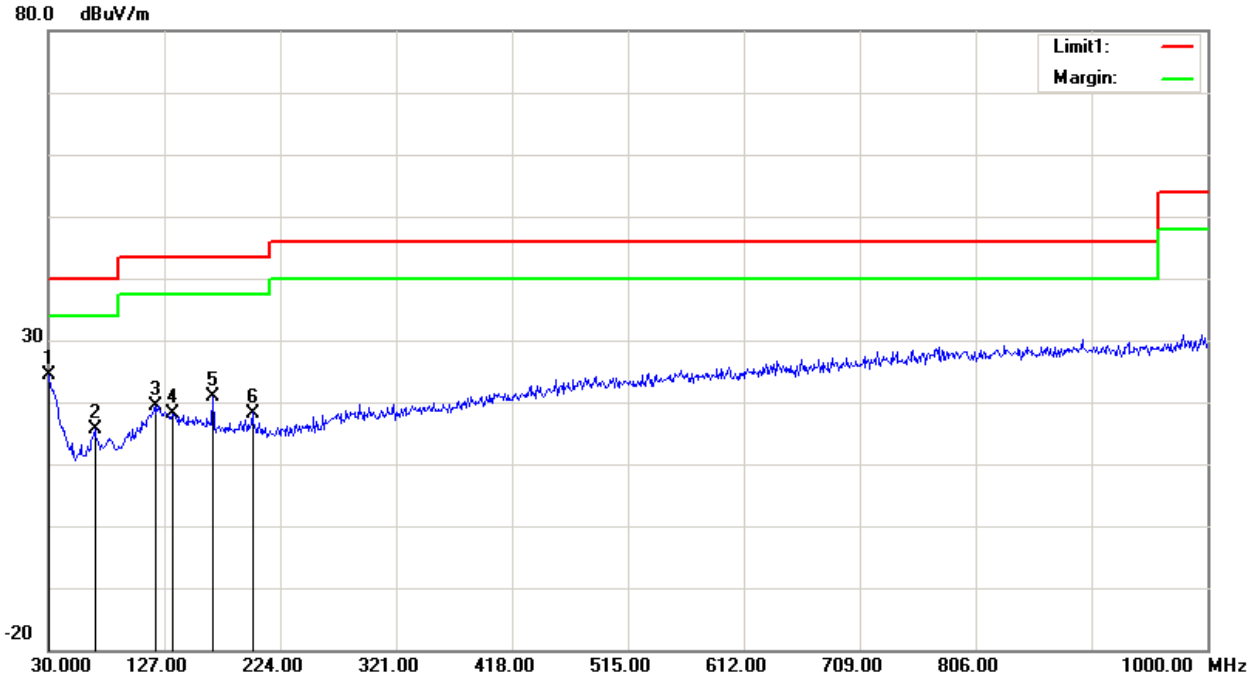

No.	Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	30.0000	28.21	peak	-3.80	24.41	40.00	15.59
2	68.8000	31.80	peak	-16.28	15.52	40.00	24.48
3	119.2400	29.34	peak	-9.98	19.36	43.50	24.14
4	133.7900	28.21	peak	-10.00	18.21	43.50	25.29
5	167.7400	32.25	peak	-11.48	20.77	43.50	22.73
6	200.7200	29.84	peak	-11.59	18.25	43.50	25.25

Project No: DG1231214-75385E-RF
Test Engineer: Zoo Zou
Test Date: 2023-12-24
Polarization: Vertical
Test Mode: Transmitting_Middle Channel
Power Source: AC 120V/60Hz

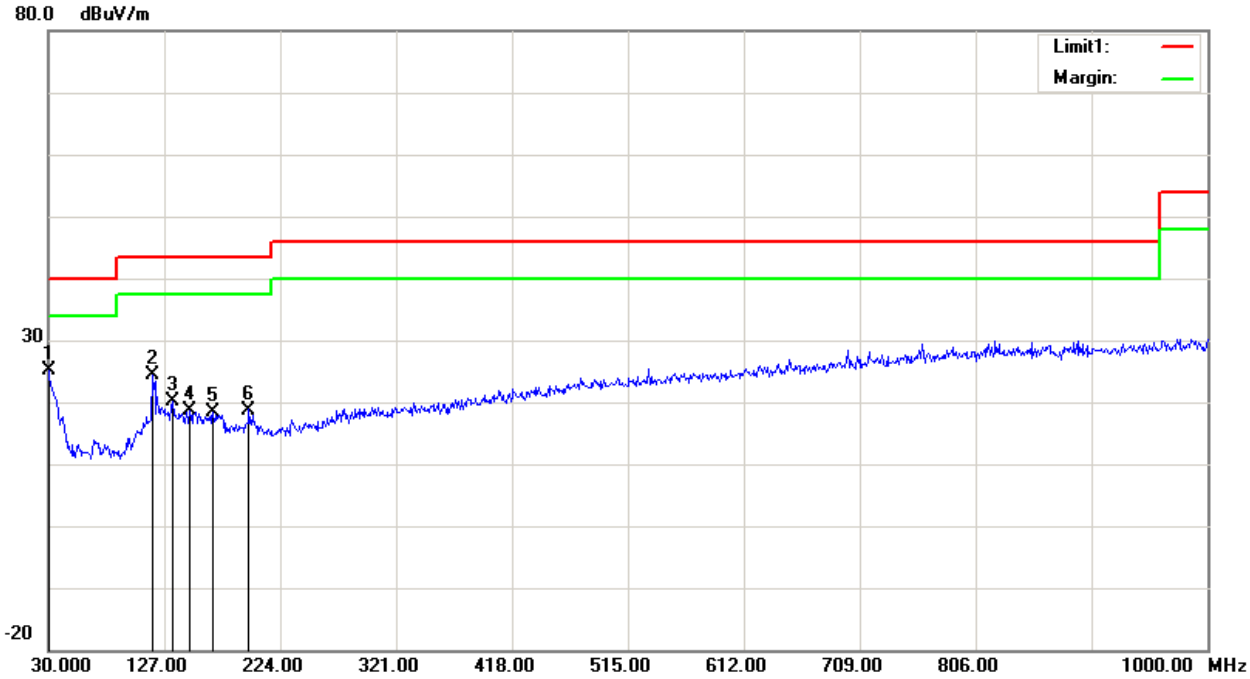

No.	Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	30.0000	29.04	peak	-3.80	25.24	40.00	14.76
2	117.3000	34.64	peak	-10.16	24.48	43.50	19.02
3	133.7900	30.01	peak	-10.00	20.01	43.50	23.49
4	148.3400	29.57	peak	-10.89	18.68	43.50	24.82
5	167.7400	29.95	peak	-11.48	18.47	43.50	25.03
6	197.8100	30.32	peak	-11.57	18.75	43.50	24.75

Project No: DG1231214-75385E-RF
Test Engineer: Zoo Zou
Test Date: 2023-12-24
Polarization: Horizontal
Test Mode: Transmitting_High Channel
Power Source: AC 120V/60Hz

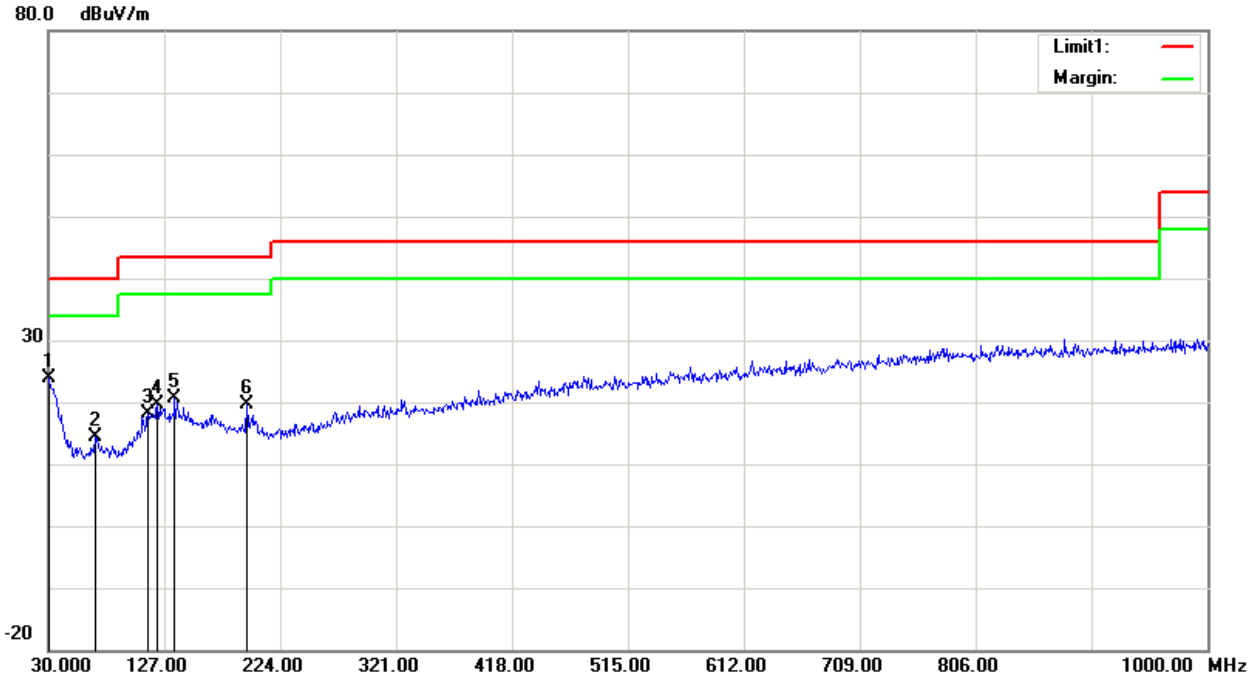

No.	Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	30.0000	27.64	peak	-3.80	23.84	40.00	16.16
2	69.7700	30.68	peak	-16.28	14.40	40.00	25.60
3	113.4200	28.87	peak	-10.77	18.10	43.50	25.40
4	121.1800	29.49	peak	-9.84	19.65	43.50	23.85
5	135.7300	30.77	peak	-10.10	20.67	43.50	22.83
6	195.8700	31.50	peak	-11.78	19.72	43.50	23.78

Project No: DG1231214-75385E-RF
Test Engineer: Zoo Zou
Test Date: 2023-12-24
Polarization: Vertical
Test Mode: Transmitting_High Channel
Power Source: AC 120V/60Hz

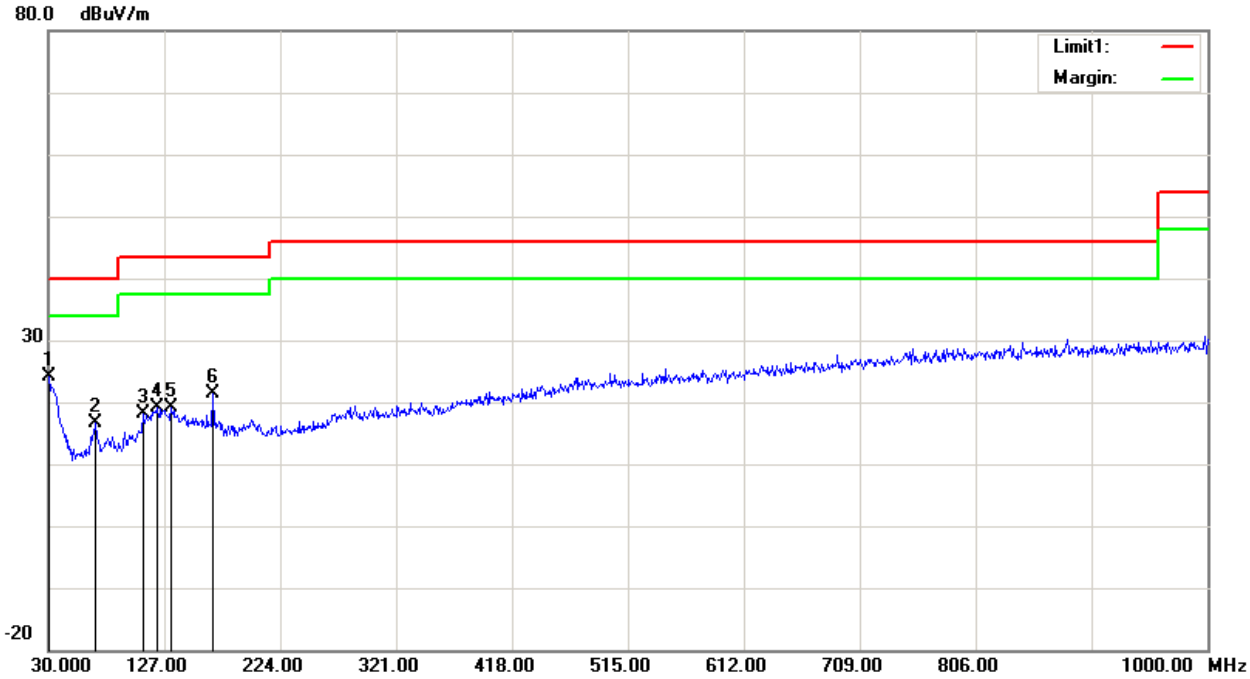

No.	Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	30.9700	28.51	peak	-4.31	24.20	40.00	15.80
2	69.7700	32.82	peak	-16.28	16.54	40.00	23.46
3	109.5400	29.53	peak	-11.47	18.06	43.50	25.44
4	121.1800	28.93	peak	-9.84	19.09	43.50	24.41
5	132.8200	28.92	peak	-9.91	19.01	43.50	24.49
6	167.7400	32.88	peak	-11.48	21.40	43.50	22.10

3) 1-18GHz:

Low Channel, Horizontal	Low Channel, Vertical
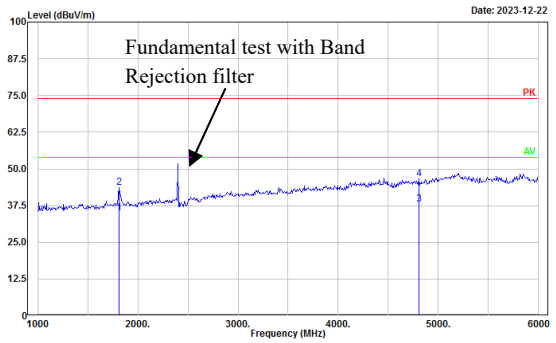	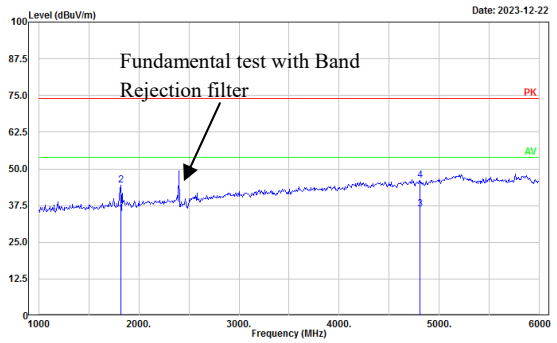
Project No.: DG1231214-75385E-RF Polarization: Horizontal Test Mode: BLE_low channel 2402MHz Note: Serial No.: 2F85-1 Tester: Colin Yang	Project No.: DG1231214-75385E-RF Polarization: Vertical Test Mode: BLE_low channel 2402MHz Note: Serial No.: 2F85-1 Tester: Colin Yang
No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Detector 1 1811.594 44.53 -9.68 34.85 54.00 19.15 Average 2 1811.594 53.33 -9.68 43.65 74.00 30.35 Peak 3 4804.000 40.99 -3.08 37.91 54.00 16.09 Average 4 4804.000 49.75 -3.08 46.67 74.00 27.33 Peak	No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Detector 1 1818.841 44.46 -9.66 34.80 54.00 19.20 Average 2 1818.841 54.04 -9.66 44.38 74.00 29.62 Peak 3 4804.000 39.32 -3.08 36.24 54.00 17.76 Average 4 4804.000 49.02 -3.08 45.94 74.00 28.06 Peak
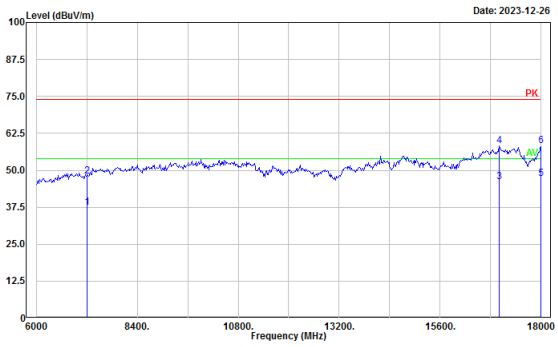	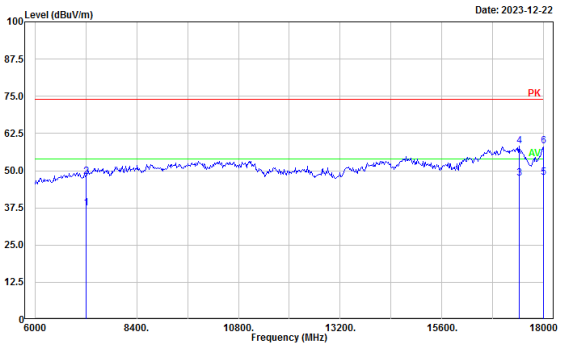
Project No.: DG1231214-75385E-RF Polarization: Horizontal Test Mode: BLE_low channel 2402MHz Note: Serial No.: 2F85-1 Tester: Colin Yang	Project No.: DG1231214-75385E-RF Polarization: Vertical Test Mode: BLE_low channel 2402MHz Note: Serial No.: 2F85-1 Tester: Colin Yang
No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Detector 1 7206.000 35.72 1.62 37.34 54.00 16.66 Average 2 7206.000 46.35 1.62 47.97 74.00 26.03 Peak 3 17008.700 33.99 11.97 45.96 54.00 8.04 Average 4 17008.700 46.17 11.97 58.14 74.00 15.86 Peak 5 18000.000 29.11 18.15 47.26 54.00 6.74 Average 6 18000.000 40.05 18.15 58.20 74.00 15.80 Peak	No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Detector 1 7206.000 35.77 1.62 37.39 54.00 16.61 Average 2 7206.000 46.28 1.62 47.90 74.00 26.10 Peak 3 17426.090 32.03 15.28 47.31 54.00 6.69 Average 4 17426.090 42.90 15.28 58.18 74.00 15.82 Peak 5 18000.000 29.45 18.15 47.60 54.00 6.40 Average 6 18000.000 40.11 18.15 58.26 74.00 15.74 Peak

Low Channel, Bandedge, Horizontal	Low Channel, Bandedge, Vertical
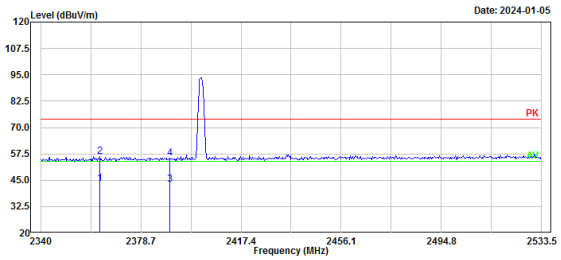 Project No.: DG1231214-75385E-RF Serial No.: 2F85-1 Polarization: Horizontal Tester: Colin Yang Test Mode: BLE_low channel 2402MHz Note: No. Frequency (MHz) Reading (dBuV) Factor (dB/m) Result (dBuV/m) Limit (dBuV/m) Margin (dB) Detector 1 2363.00 14.78 28.45 43.23 54.00 10.77 Average 2 2363.00 27.86 28.45 56.31 74.00 17.69 Peak 3 2390.00 14.57 28.57 43.14 54.00 10.86 Average 4 2390.00 27.03 28.57 55.60 74.00 18.40 Peak	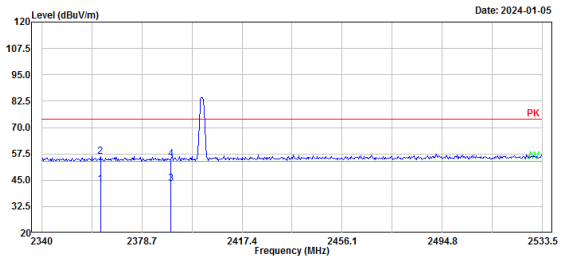 Project No.: DG1231214-75385E-RF Serial No.: 2F85-1 Polarization: Vertical Tester: Colin Yang Test Mode: BLE_low channel 2402MHz Note: No. Frequency (MHz) Reading (dBuV) Factor (dB/m) Result (dBuV/m) Limit (dBuV/m) Margin (dB) Detector 1 2362.72 14.59 28.45 43.04 54.00 10.96 Average 2 2362.72 27.85 28.45 56.30 74.00 17.70 Peak 3 2390.00 14.75 28.57 43.32 54.00 10.68 Average 4 2390.00 26.62 28.57 55.19 74.00 18.81 Peak

Middle Channel, Horizontal

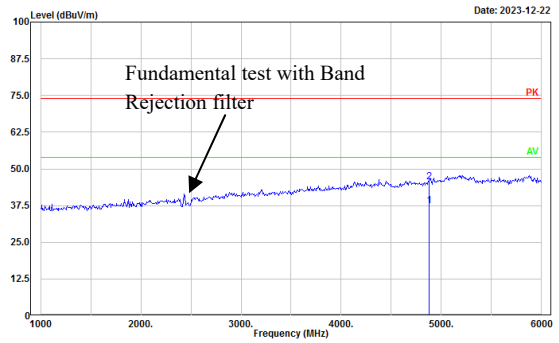

Project No.: DG1231214-75385E-RF
Polarization: Horizontal
Test Mode: BLE_middle channel 2440MHz
Note:
Serial No.: 2F85-1
Tester: Colin Yang

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4880.000	40.09	-2.73	37.36	54.00	16.64	Average
2	4880.000	48.13	-2.73	45.40	74.00	28.60	Peak

Middle Channel, Vertical

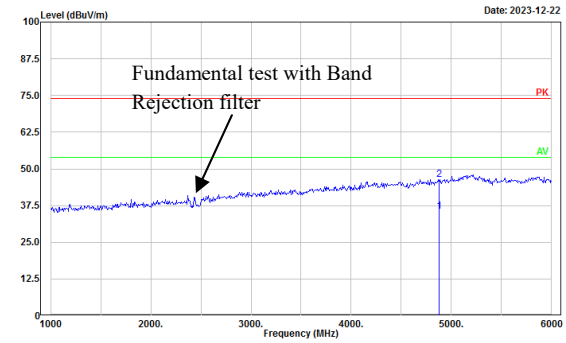

Project No.: DG1231214-75385E-RF
Polarization: Vertical
Test Mode: BLE_middle channel 2440MHz
Note:
Serial No.: 2F85-1
Tester: Colin Yang

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4880.000	38.17	-2.73	35.44	54.00	18.56	Average
2	4880.000	49.08	-2.73	46.35	74.00	27.65	Peak

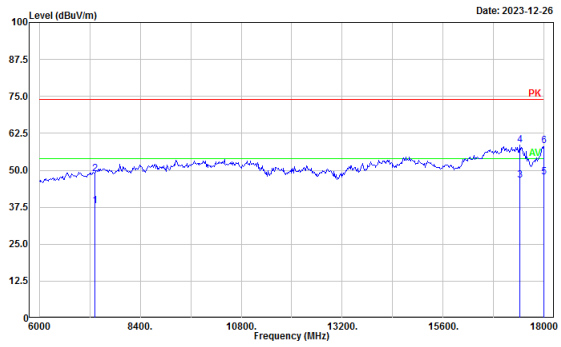

Project No.: DG1231214-75385E-RF
Polarization: Horizontal
Test Mode: BLE_middle channel 2440MHz
Note:
Serial No.: 2F85-1
Tester: Colin Yang

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7320.000	35.83	2.10	37.93	54.00	16.07	Average
2	7320.000	46.61	2.10	48.71	74.00	25.29	Peak
3	17426.090	31.28	15.28	46.56	54.00	7.44	Average
4	17426.090	43.23	15.28	58.51	74.00	15.49	Peak
5	18000.000	29.54	18.15	47.69	54.00	6.31	Average
6	18000.000	40.21	18.15	58.36	74.00	15.64	Peak

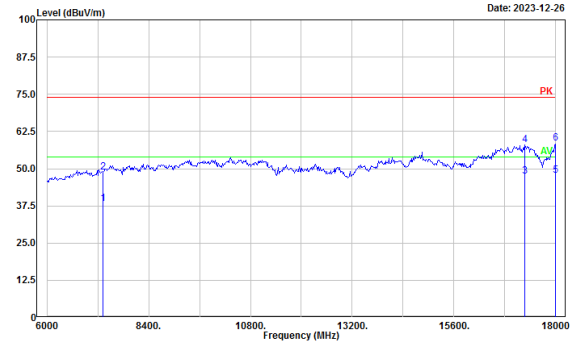

Project No.: DG1231214-75385E-RF
Polarization: Vertical
Test Mode: BLE_middle channel 2440MHz
Note:
Serial No.: 2F85-1
Tester: Colin Yang

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7320.000	36.05	2.10	38.15	54.00	15.85	Average
2	7320.000	46.70	2.10	48.80	74.00	25.20	Peak
3	17269.560	33.36	14.01	47.37	54.00	6.63	Average
4	17269.560	43.87	14.01	57.88	74.00	16.12	Peak
5	18000.000	29.58	18.15	47.73	54.00	6.27	Average
6	18000.000	40.41	18.15	58.56	74.00	15.44	Peak

High Channel, Horizontal

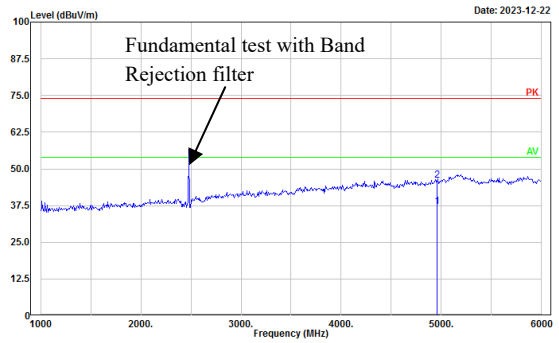

Project No.: DG1231214-75385E-RF
Polarization: Horizontal
Test Mode: BLE_high channel 2480MHz
Note:
Serial No.: 2F85-1
Tester: Colin Yang

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4960.000	39.46	-2.35	37.11	54.00	16.89	Average
2	4960.000	48.50	-2.35	46.15	74.00	27.85	Peak

High Channel, Vertical

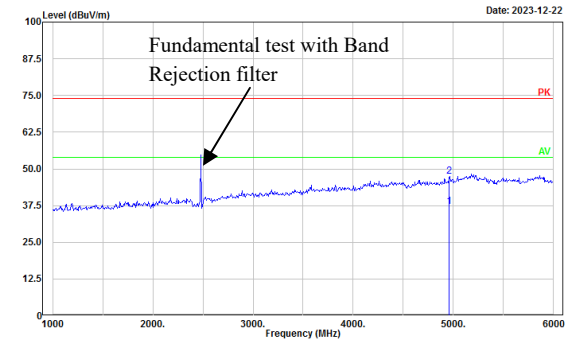

Project No.: DG1231214-75385E-RF
Polarization: Vertical
Test Mode: BLE_high channel 2480MHz
Note:
Serial No.: 2F85-1
Tester: Colin Yang

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4960.000	39.56	-2.35	37.21	54.00	16.79	Average
2	4960.000	49.75	-2.35	47.40	74.00	26.60	Peak

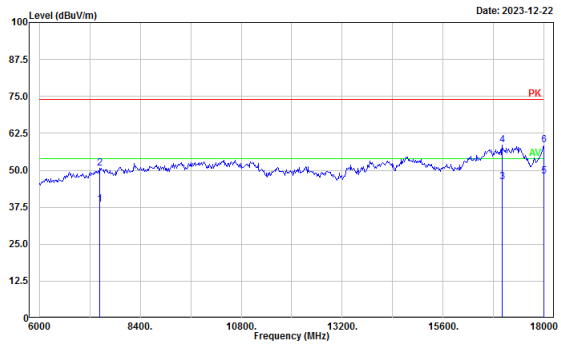

Project No.: DG1231214-75385E-RF
Polarization: Horizontal
Test Mode: BLE_high channel 2480MHz
Note:
Serial No.: 2F85-1
Tester: Colin Yang

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7440.000	35.99	2.47	38.46	54.00	15.54	Average
2	7440.000	48.12	2.47	50.59	74.00	23.41	Peak
3	17008.700	34.12	11.97	46.09	54.00	7.91	Average
4	17008.700	46.65	11.97	58.62	74.00	15.38	Peak
5	18000.000	29.71	18.15	47.86	54.00	6.14	Average
6	18000.000	40.35	18.15	58.50	74.00	15.50	Peak

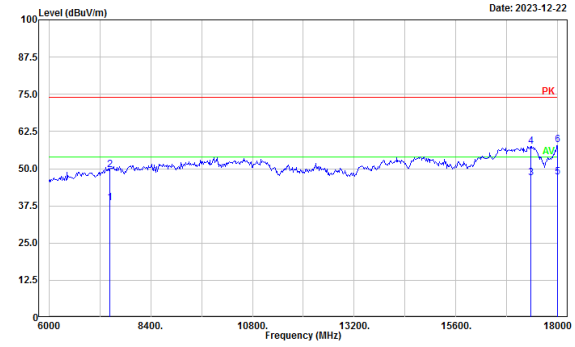

Project No.: DG1231214-75385E-RF
Polarization: Vertical
Test Mode: BLE_high channel 2480MHz
Note:
Serial No.: 2F85-1
Tester: Colin Yang

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7440.000	35.88	2.47	38.35	54.00	15.65	Average
2	7440.000	47.18	2.47	49.65	74.00	24.35	Peak
3	17356.520	32.15	14.72	46.87	54.00	7.13	Average
4	17356.520	42.79	14.72	57.51	74.00	16.49	Peak
5	18000.000	28.87	18.15	47.02	54.00	6.98	Average
6	18000.000	39.85	18.15	58.00	74.00	16.00	Peak

High Channel, Bandedge, Horizontal	High Channel, Bandedge, Vertical
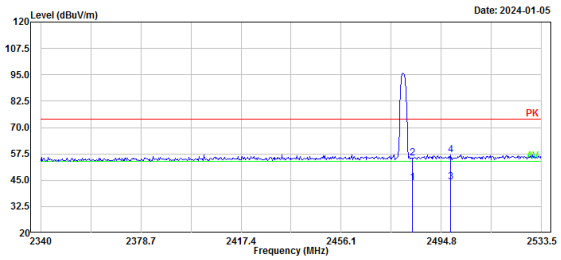 Project No.: DG1231214-75385E-RF Serial No.: 2F85-1 Polarization: Horizontal Tester: Colin Yang Test Mode: BLE_high channel 2480MHz Note: No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Detector 1 2483.50 14.65 28.95 43.60 54.00 10.40 Average 2 2483.50 26.36 28.95 55.31 74.00 18.69 Peak 3 2498.45 14.99 29.01 44.00 54.00 10.00 Average 4 2498.45 27.91 29.01 56.92 74.00 17.08 Peak	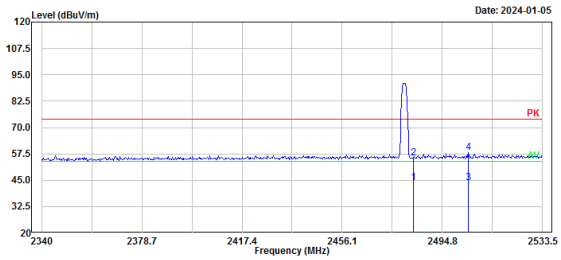 Project No.: DG1231214-75385E-RF Serial No.: 2F85-1 Polarization: Vertical Tester: Colin Yang Test Mode: BLE_high channel 2480MHz Note: No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Detector 1 2483.50 14.75 28.95 43.70 54.00 10.30 Average 2 2483.50 26.63 28.95 55.58 74.00 18.42 Peak 3 2504.90 14.89 29.04 43.93 54.00 10.07 Average 4 2504.90 28.95 29.04 57.99 74.00 16.01 Peak

18-25GHz:

No Emission was detected in the range 18-25GHz, test was performed on the mode and channel which with the maximum power.

Horizontal	Vertical
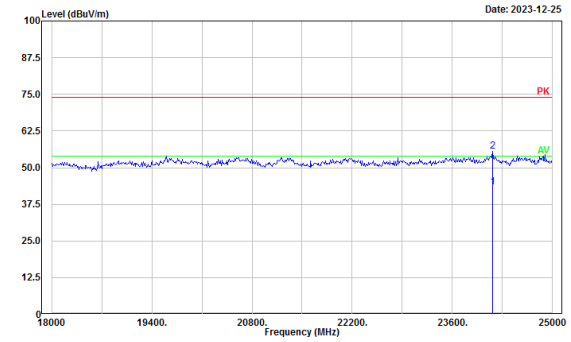 Project No.: DG1231214-75385E-RF Polarization: Horizontal Test Mode: BLE_low channel 2402MHz Note: Serial No.: 2F85-1 Tester: Colin Yang No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Detector 1 24157.970 32.90 10.36 43.26 54.00 10.74 Average 2 24157.970 45.07 10.36 55.43 74.00 18.57 Peak	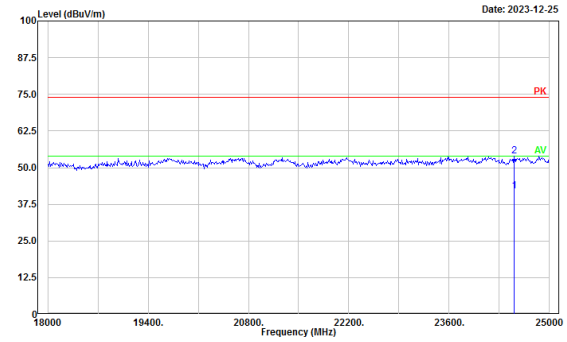 Project No.: DG1231214-75385E-RF Polarization: Vertical Test Mode: BLE_low channel 2402MHz Note: Serial No.: 2F85-1 Tester: Colin Yang No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Detector 1 24502.900 31.35 10.77 42.12 54.00 11.88 Average 2 24502.900 43.16 10.77 53.93 74.00 20.07 Peak

5.3 6 dB Emission Bandwidth

Serial No.:	2F85-2	**Test Date:**	2023/12/27
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Jojo Zhou	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C)	23.4	**Relative Humidity: (%)**	42	**ATM Pressure: (kPa)**	101.9

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2023-10-18	2024-10-17
E-Microwave	Blocking Control	EMDCB-00036	OE01201047	2023-05-06	2024-05-05
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	2023-09-01	2024-08-31

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Channel	Value (MHz)	Limit (MHz)	Result
Low	0.663	0.5	Pass
Mid	0.663	0.5	Pass
High	0.675	0.5	Pass

Low

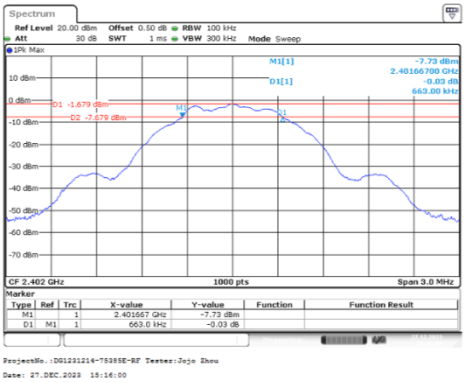
Spectrum
Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz
Att 30 dB SWT 1 ms VBW 300 kHz Mode Sweep
1Pk Max
M1[1] -7.73 dBm 2.40166700 GHz
D1[1] -0.03 dB 663.00 kHz
D1 -1.679 dBm
D2 -7.679 dBm
CF 2.402 GHz 1000 pts Span 3.0 MHz
Marker
Type Ref Trc X-value Y-value Function Function Result
M1 1 2.401667 GHz -7.73 dBm
D1 M1 1 663.0 kHz -0.03 dB
ProjectNo.:DG1231214-75385E-RF Tester:Jojo Zhou
Date: 27.DEC.2023 15:16:00

Mid

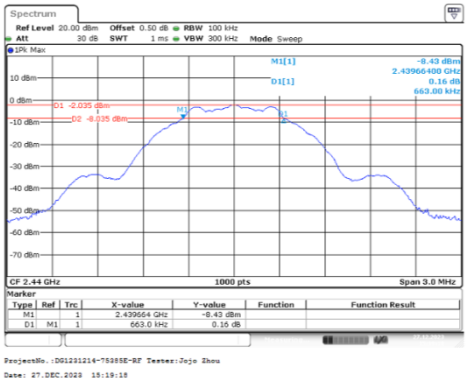
Spectrum
Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz
Att 30 dB SWT 1 ms VBW 300 kHz Mode Sweep
1Pk Max
M1[1] -8.43 dBm 2.43966400 GHz
D1[1] 0.16 dB 663.00 kHz
D1 -2.035 dBm
D2 -8.035 dBm
CF 2.44 GHz 1000 pts Span 3.0 MHz
Marker
Type Ref Trc X-value Y-value Function Function Result
M1 1 2.439664 GHz -8.43 dBm
D1 M1 1 663.0 kHz 0.16 dB
ProjectNo.:DG1231214-75385E-RF Tester:Jojo Zhou
Date: 27.DEC.2023 15:19:18

High

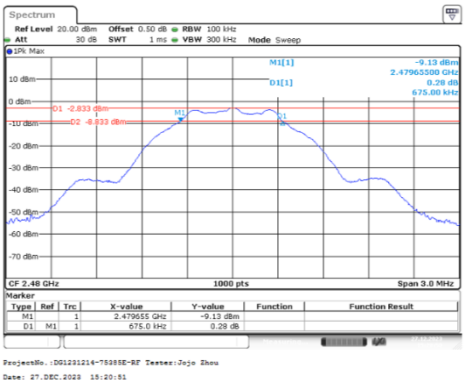
Spectrum
Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz
Att 30 dB SWT 1 ms VBW 300 kHz Mode Sweep
1Pk Max
M1[1] -9.13 dBm 2.47965500 GHz
D1[1] 0.28 dB 675.00 kHz
D1 -2.833 dBm
D2 -8.833 dBm
CF 2.48 GHz 1000 pts Span 3.0 MHz
Marker
Type Ref Trc X-value Y-value Function Function Result
M1 1 2.479655 GHz -9.13 dBm
D1 M1 1 675.0 kHz 0.28 dB
ProjectNo.:DG1231214-75385E-RF Tester:Jojo Zhou
Date: 27.DEC.2023 15:20:51

5.4 Maximum Conducted Output Power

Serial No.:	2F85-2	**Test Date:**	2023-12-27
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Jojo Zhou	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C)	23.4	**Relative Humidity: (%)**	42	**ATM Pressure: (kPa)**	101.9

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2023-10-18	2024-10-17
E-Microwave	Blocking Control	EMDCB-00036	OE01201047	2023-05-06	2024-05-05
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	2023-09-01	2024-08-31

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Channel	Value (dBm)	Limit (dBm)	Result
Low	-1.55	30.00	Pass
Mid	-1.94	30.00	Pass
High	-2.72	30.00	Pass

Low

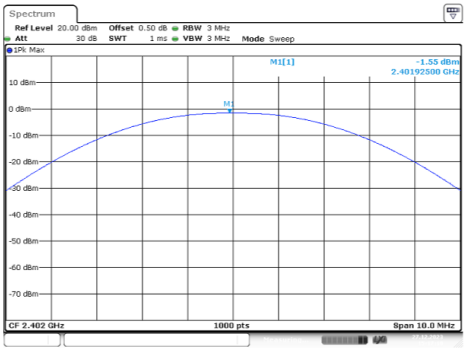

ProjectNo.:DG1231214-75385E-RF Tester:Jojo Zhou
Date: 27.DEC.2023 15:17:10

Mid

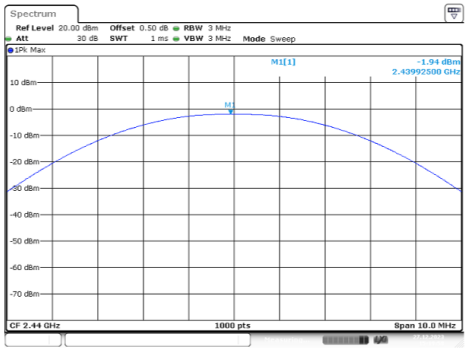

ProjectNo.:DG1231214-75385E-RF Tester:Jojo Zhou
Date: 27.DEC.2023 15:19:55

High

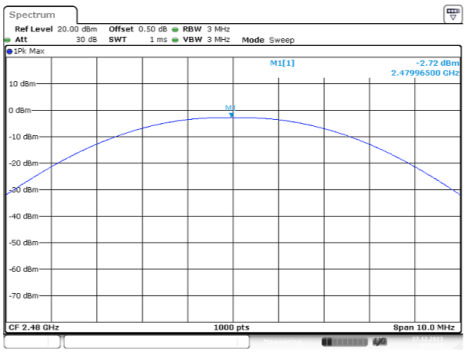

ProjectNo.:DG1231214-75385E-RF Tester:Jojo Zhou
Date: 27.DEC.2023 15:21:32

5.5 Maximum power spectral density

Serial No.:	2F85-2	**Test Date:**	2023-12-27
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Jojo Zhou	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C)	23.4	**Relative Humidity: (%)**	42	**ATM Pressure: (kPa)**	101.9

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2023-10-18	2024-10-17
E-Microwave	Blocking Control	EMDCB-00036	OE01201047	2023-05-06	2024-05-05
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	2023-09-01	2024-08-31

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Channel	Value (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low	-16.98	8.00	Pass
Mid	-17.81	8.00	Pass
High	-18.64	8.00	Pass

Low

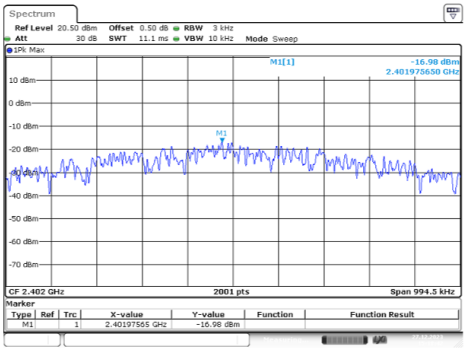

ProjectNo.:DG1231214-75385E-RF Tester:Jojo Zhou
Date: 27.DEC.2023 15:18:42

Mid

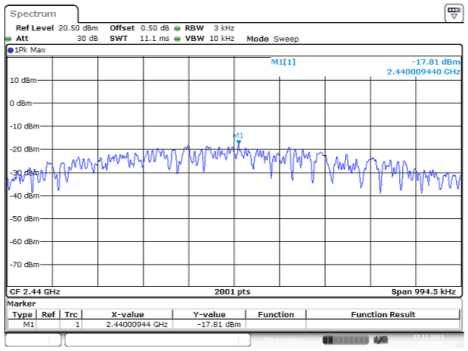

ProjectNo.:DG1231214-75385E-RF Tester:Jojo Zhou
Date: 27.DEC.2023 15:57:16

High

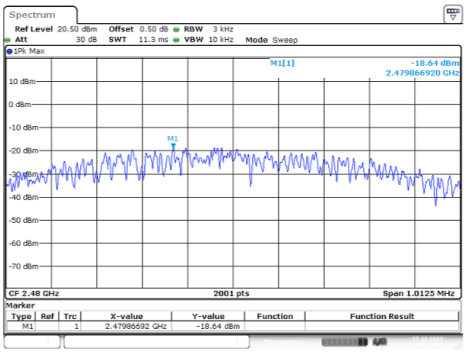

ProjectNo.:DG1231214-75385E-RF Tester:Jojo Zhou
Date: 27.DEC.2023 15:22:57

5.6 100 kHz Bandwidth of Frequency Band Edge

Serial No.:	2F85-2	**Test Date:**	2023-12-27
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Jojo Zhou	**Test Result:**	Pass

Environmental Conditions:

Temperature: (℃)	23.4	**Relative Humidity: (%)**	42	**ATM Pressure: (kPa)**	101.9

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2023-10-18	2024-10-17
E-Microwave	Blocking Control	EMDCB-00036	OE01201047	2023-05-06	2024-05-05
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	2023-09-01	2024-08-31

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Please refer to the below plots:

Low

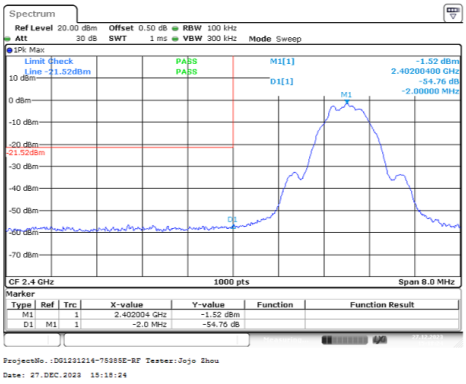

High

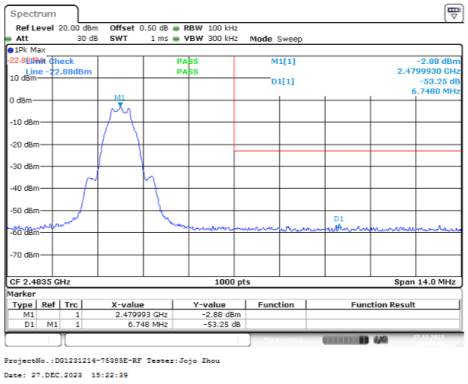

5.7 Duty Cycle

Serial No.:	2F85-2	**Test Date:**	2023-12-27
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Jojo Zhou	**Test Result:**	Pass

Environmental Conditions:

Temperature: (℃)	23.4	**Relative Humidity: (%)**	42	**ATM Pressure: (kPa)**	101.9

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101947	2023-10-18	2024-10-17
E-Microwave	Blocking Control	EMDCB-00036	OE01201047	2023-05-06	2024-05-05
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	2023-09-01	2024-08-31

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Channel	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	1/T (Hz)	VBW Setting (kHz)
Mid	0.396	0.625	63.400	2525	3

Duty Cycle = Ton/(Ton+Toff)*100%

Mid

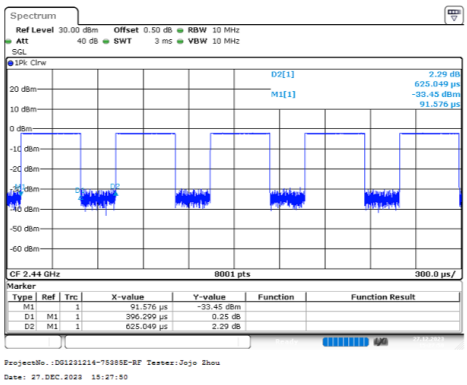

6. RF EXPOSURE EVALUATION

6.1 Applicable Standard

According to§15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:
[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] · [√f(GHz)] ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

6.2 Measurement Result

The max conducted power including tune-up tolerance is -1.0 dBm (0.79 mW).
[(max. power of channel, mW)/(min. test separation distance, mm)][√f(GHz)]
=0.79/5*(√2.480) = 0.3< 3.0

Result: Compliant. The stand-alone SAR evaluation is not necessary.

7. EUT PHOTOGRAPHS

Please refer to the attachment DG1231214-75385E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and DG1231214-75385E-RF-INP EUT INTERNAL PHOTOGRAPHS

8. TEST SETUP PHOTOGRAPHS

Please refer to the attachment DG1231214-75385E-RF-00B-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT ====