中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)

ACCREDITED
TESTING LABORATORY
CERTIFICATE # 6356.01

TEST REPORT

Applicant: **Ingenico Inc.**

Address: 3025 Windward Plaza, Suite 600 Alpharetta, GA 30005 United States

FCC ID: **2BEXT-MOB9500**

Product Name: **Mobile Payment Terminal**

Standard(s): **47 CFR Part 15, Subpart C(15.247)**
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: **CR230849077-00A**

Date Of Issue: **2023/12/15**

Reviewed By: **Julie Tan** Julie Tan
Title: RF Engineer

Approved By: **Sun Zhong** Sun Zhong
Title: Manager

Test Laboratory: **China Certification ICT Co., Ltd (Dongguan)**
No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol "▲". Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk "★".

CONTENTS

DOCUMENT REVISION HISTORY 5
1. GENERAL INFORMATION 6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 6
1.2 DESCRIPTION OF TEST CONFIGURATION 7
1.2.1 EUT Operation Condition: 7
1.2.2 Support Equipment List and Details 7
1.2.3 Support Cable List and Details 7
1.2.4 Block Diagram of Test Setup 7
1.3 MEASUREMENT UNCERTAINTY 9
2. SUMMARY OF TEST RESULTS 10
3. REQUIREMENTS AND TEST PROCEDURES 11
3.1 AC LINE CONDUCTED EMISSIONS 11
3.1.1 Applicable Standard 11
3.1.2 EUT Setup 12
3.1.3 EMI Test Receiver Setup 12
3.1.4 Test Procedure 13
3.1.5 Corrected Amplitude & Margin Calculation 13
3.2 RADIATION SPURIOUS EMISSIONS 14
3.2.1 Applicable Standard 14
3.2.2 EUT Setup 14
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup 15
3.2.4 Test Procedure 16
3.2.5 Corrected Amplitude & Margin Calculation 16
3.3 MINIMUM 6 DB BANDWIDTH 17
3.3.1 Applicable Standard 17
3.3.2 EUT Setup 17
3.3.3 Test Procedure 17
3.4 MAXIMUM CONDUCTED OUTPUT POWER 18
3.4.1 Applicable Standard 18
3.4.2 EUT Setup 18
3.4.3 Test Procedure 18
3.5 MAXIMUM POWER SPECTRAL DENSITY 19
3.5.1 Applicable Standard 19
3.5.2 EUT Setup 19
3.5.3 Test Procedure 19
3.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE 20
3.6.1 Applicable Standard 20
3.6.2 EUT Setup 20
3.6.3 Test Procedure 20
3.7 DUTY CYCLE 21
3.7.1 EUT Setup 21
3.7.2 Test Procedure 21

3.8 ANTENNA REQUIREMENT **21**
3.8.1 Applicable Standard 21
3.8.2 Judgment 21
4. Test DATA AND RESULTS **22**
4.1 AC LINE CONDUCTED EMISSIONS **22**
4.2 RADIATION SPURIOUS EMISSIONS **25**
4.3 6 DB EMISSION BANDWIDTH **40**
4.4 MAXIMUM CONDUCTED OUTPUT POWER **42**
4.5 MAXIMUM POWER SPECTRAL DENSITY **44**
4.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE **46**
4.7 DUTY CYCLE **48**
5. RF EXPOSURE EVALUATION **49**
5.1 APPLICABLE STANDARD **49**
5.2 MEASUREMENT RESULT **49**
6. EUT PHOTOGRAPHS **50**
7. TEST SETUP PHOTOGRAPHS **51**

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230849077-00A	Original Report	2023/12/15

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Mobile Payment Terminal
EUT Model:	Moby/9500
Operation Frequency:	2402-2480 MHz
Maximum Peak Output Power (Conducted):	1.25 dBm
Modulation Type:	GFSK
Rated Input Voltage:	DC3.85V from Battery or DC 5V form USB Charger/USB port
Serial Number:	2ABX-1 (For RF Conducted and AC line conducted emission test) 2ABX-2 (For Radiated spurious emission test)
EUT Received Date:	2023/8/24
EUT Received Status:	Good

Operation Frequency Detail:
For BLE 1Mbps:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	…	…
…	…	…	…
…	…	…	…
..	…	38	2478
19	2440	39	2480

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2402
Middle	2440
Highest	2480

Antenna Information Detail▲:

Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Shenzhen Kinwong Electronic Co.,Ltd.	PCB	50	2.4~2.5GHz	-7.59dBi

The Method of §15.203 Compliance:
☒Antenna was permanently attached to the unit.
☐Antenna use a unique type of connector to attach to the EUT.
☐Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

For BLE:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer. Per NFC report test, test with USB-C for AC line conducted emission and test with Charger Cable for Radiated Spurious Emissions were the worst.
Equipment Modifications:	No
EUT Exercise Software:	Factory Tool V2.36

The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:

Test Modes	Power Level Setting		
	Lowest Channel	Middle Channel	Highest Channel
BLE	Default	Default	Default

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
KLEC	Adapter	SW-0983	B310283

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Charger Cable	No	No	1	Adapter	EUT

1.2.4 Block Diagram of Test Setup

AC line conducted emission:

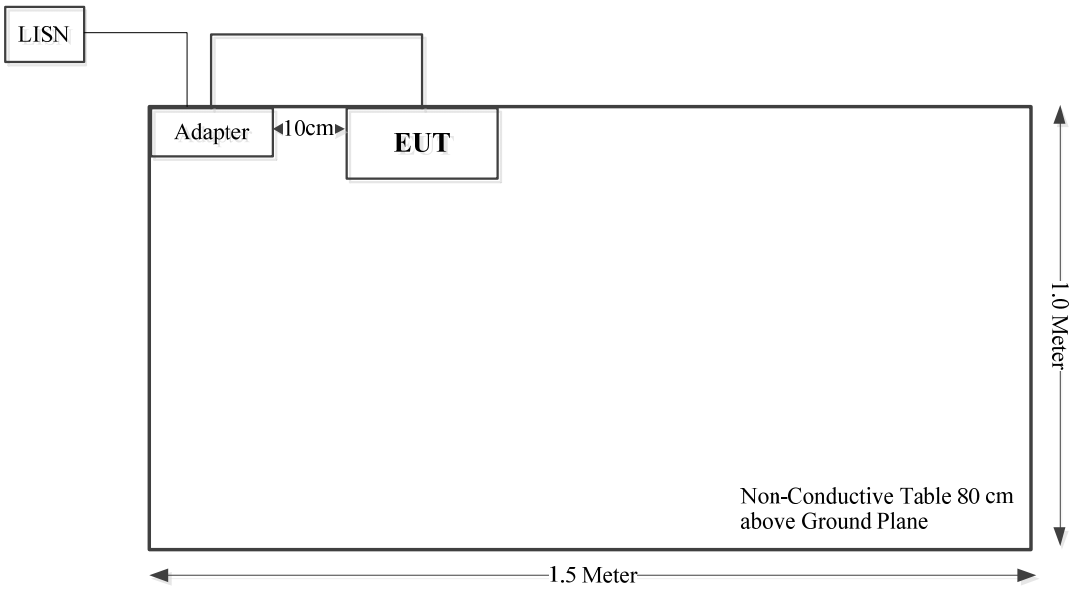

Radiated spurious emission:

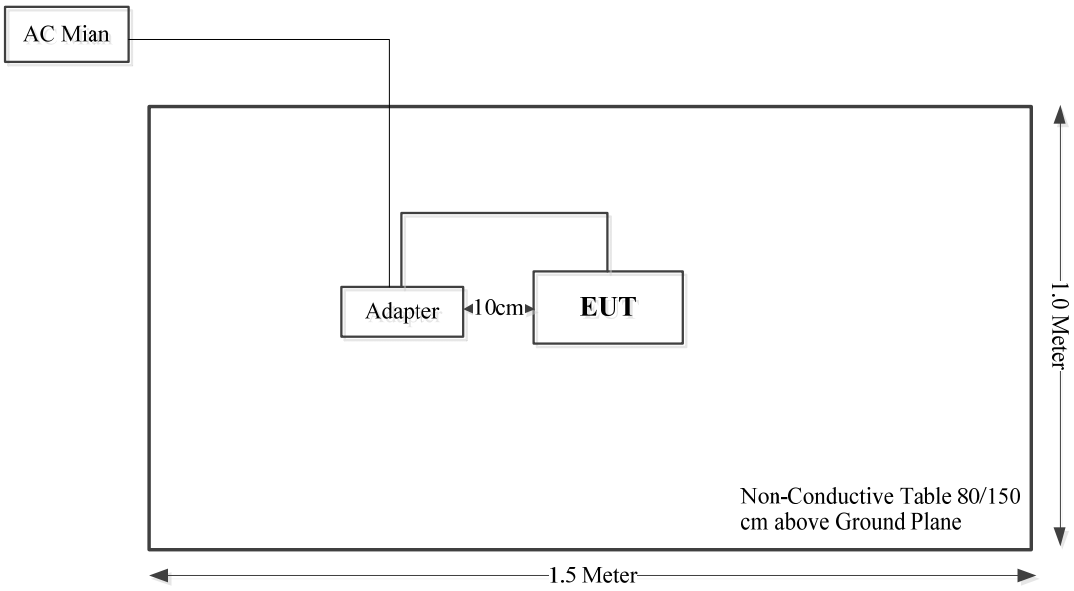

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 4.12dB, 30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions	Compliant
§15.247 (a)(2)	Minimum 6 dB Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.203	Antenna Requirement	Compliant
FCC§15.247 (i) & §1.1310	RF Exposure Evaluation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

	Conducted limit (dBµV)	
Frequency of emission (MHz)	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 µV within the frequency band 535-1705 kHz, as measured using a 50 µH/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtainig their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup

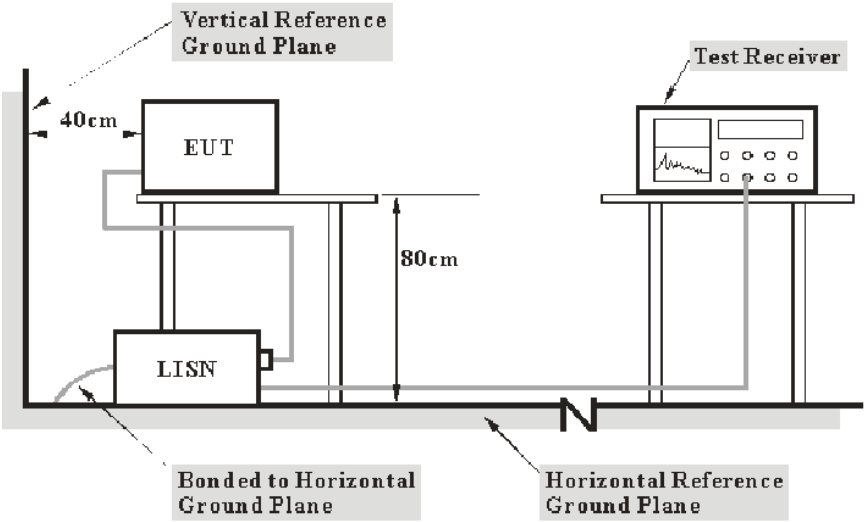

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor
Factor = attenuation caused by cable loss + voltage division factor of AMN

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

3.2.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.2.2 EUT Setup

9kHz~30MHz:

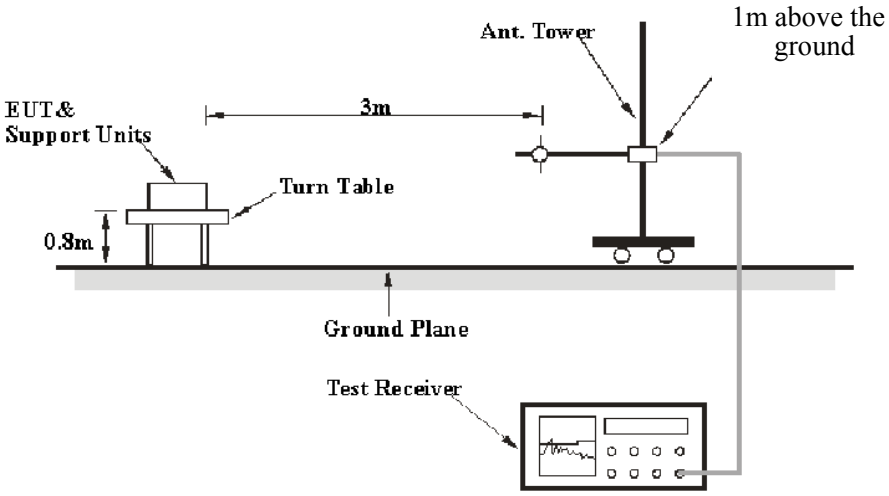

30MHz~1GHz:

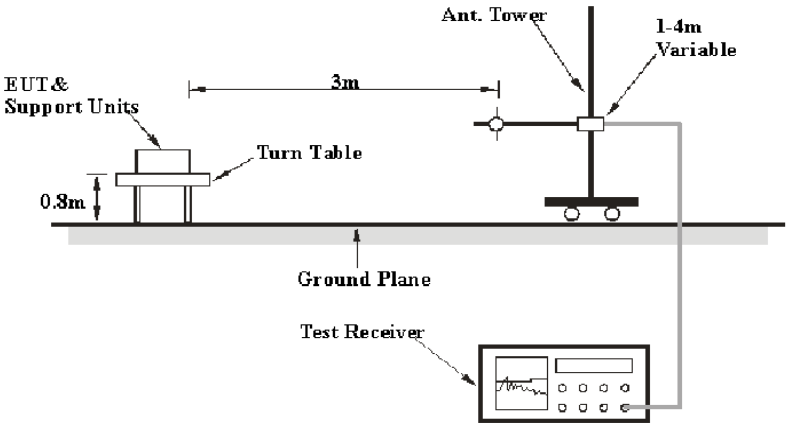

Above 1GHz:

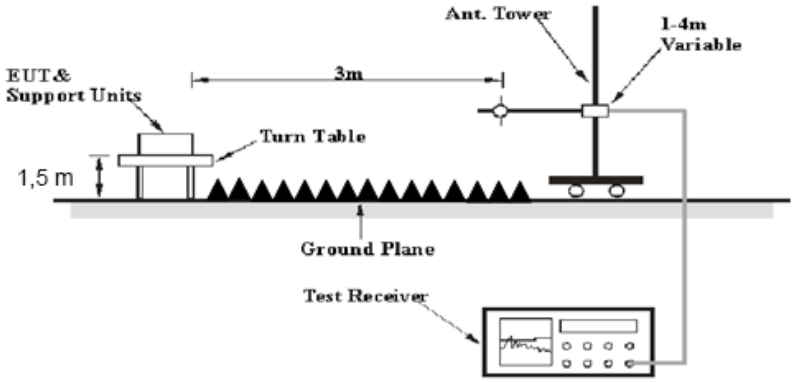

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/T

Note: T is minimum transmission duration

If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz except 9 – 90 kHz, 110 – 490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor
Factor = Antenna Factor + Cable Loss- Amplifier Gain

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 Minimum 6 dB Bandwidth

3.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

3.3.2 EUT Setup

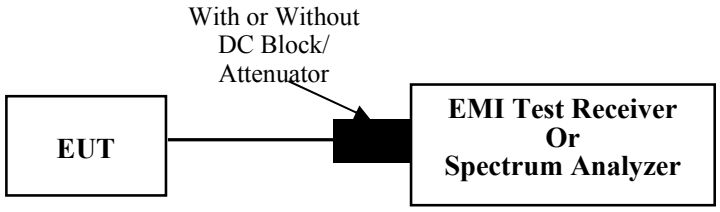

3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 11.8

a) Set RBW = 100 kHz.
b) Set the video bandwidth (VBW) ≥ 3×RBW.
c) Detector = Peak.
d) Trace mode = max hold.
e) Sweep = auto couple.
f) Allow the trace to stabilize.
g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.4 Maximum Conducted Output Power

3.4.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

3.4.2 EUT Setup

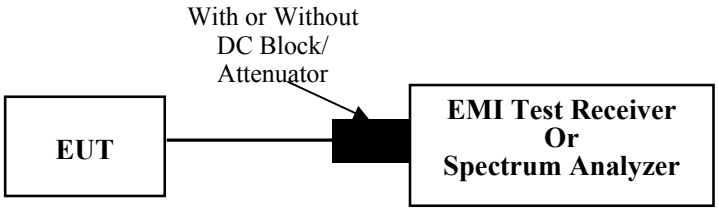

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.1.1

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:
a) Set the RBW ≥ DTS bandwidth.
b) Set VBW ≥ [3 × RBW].
c) Set span ≥ [3 × RBW].
d) Sweep time = auto couple.
e) Detector = peak.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use peak marker function to determine the peak amplitude level.

3.5 Maximum power spectral density

3.5.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.5.2 EUT Setup

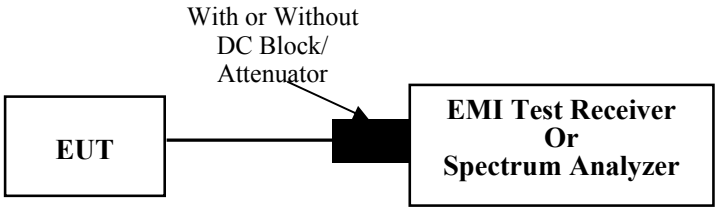

3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 11.10.2

a) Set analyzer center frequency to DTS channel center frequency.
b) Set the span to 1.5 times the DTS bandwidth.
c) Set the RBW to 3 kHz ≤ RBW ≤ 100 kHz.
d) Set the VBW ≥ [3 × RBW].
e) Detector = peak.
f) Sweep time = auto couple.
g) Trace mode = max hold.
h) Allow trace to fully stabilize.
i) Use the peak marker function to determine the maximum amplitude level within the RBW.
j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

3.6 100 kHz Bandwidth of Frequency Band Edge

3.6.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.6.2 EUT Setup

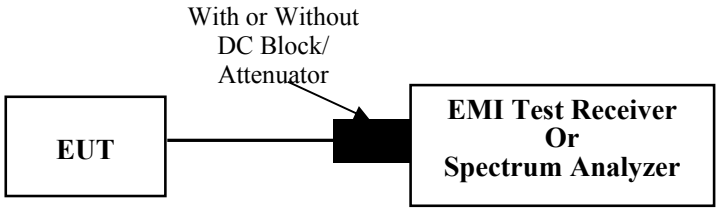

3.6.3 Test Procedure

According to ANSI C63.10-2013 Section 11.11

a) Set the center frequency and span to encompass frequency range to be measured.
b) Set the RBW = 100 kHz.
c) Set the VBW ≥ [3 × RBW].
d) Detector = peak.
e) Sweep time = auto couple.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use the peak marker function to determine the maximum amplitude level.
Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

3.7 Duty Cycle

3.7.1 EUT Setup

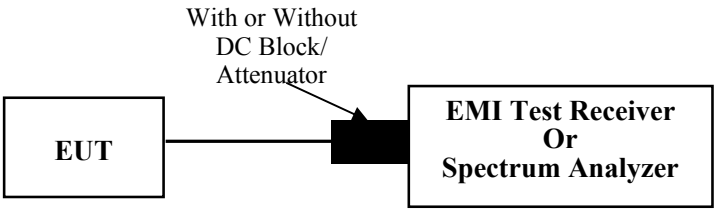

3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
1) Set the center frequency of the instrument to the center frequency of the transmission.
2) Set RBW ≥ OBW if possible; otherwise, set RBW to the largest available value.
3) Set VBW ≥ RBW. Set detector = peak or average.
4) The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if T ≤ 16.7 μs.)

3.8 Antenna Requirement

3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.8.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2ABX-1	Test Date:	2023/09/08
Test Site:	CE	Test Mode:	Transmitting Maximum output power (Low channel) was tested
Tester:	Vic Du	Test Result:	Pass

Environmental Conditions:

Temperature: (℃)	25.1	Relative Humidity: (%)	55	ATM Pressure: (kPa)	100.1

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/03/31	2024/03/30
R&S	EMI Test Receiver	ESR3	102726	2023/03/31	2024/03/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/08/06	2024/08/05
Audix	Test Software	E3	190306 (V9)	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Project No.: CR230849077-RF
Tester: Vic Du
Port: Line
Note:

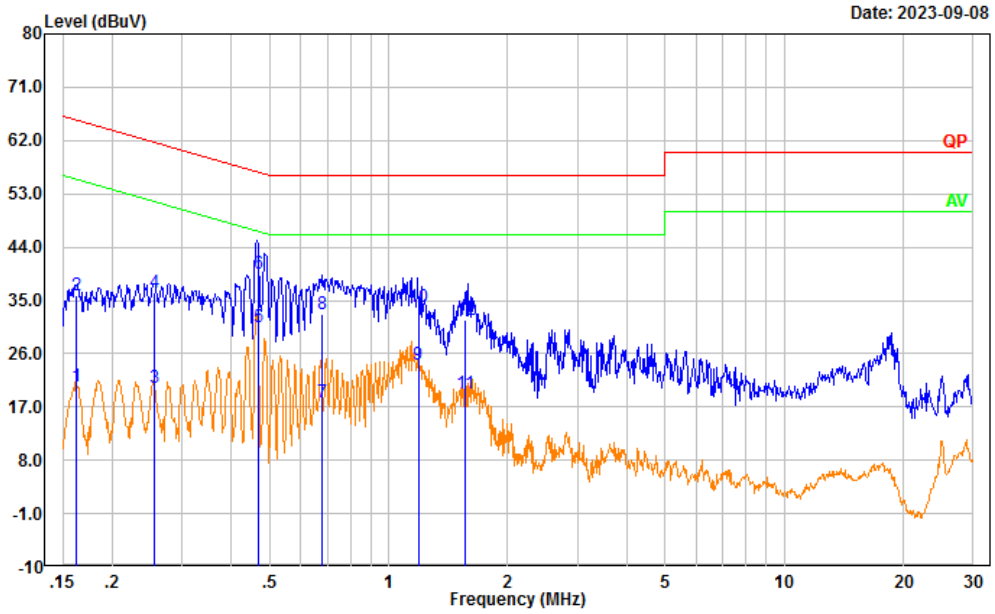

No.	Frequency (MHz)	Reading (dBµV)	Factor (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)	Detector
1	0.162	10.83	9.61	20.44	55.36	34.92	Average
2	0.162	26.20	9.61	35.81	65.36	29.55	QP
3	0.255	10.65	9.61	20.26	51.58	31.32	Average
4	0.255	26.65	9.61	36.26	61.58	25.32	QP
5	0.467	20.78	9.61	30.39	46.57	16.18	Average
6	0.467	30.02	9.61	39.63	56.57	16.94	QP
7	0.680	8.12	9.62	17.74	46.00	28.26	Average
8	0.680	22.97	9.62	32.59	56.00	23.41	QP
9	1.188	14.53	9.62	24.15	46.00	21.85	Average
10	1.188	24.21	9.62	33.83	56.00	22.17	QP
11	1.560	9.74	9.63	19.37	46.00	26.63	Average
12	1.560	22.01	9.63	31.64	56.00	24.36	QP

Project No.: CR230849077-RF
Tester: Vic Du
Port: neutral
Note:

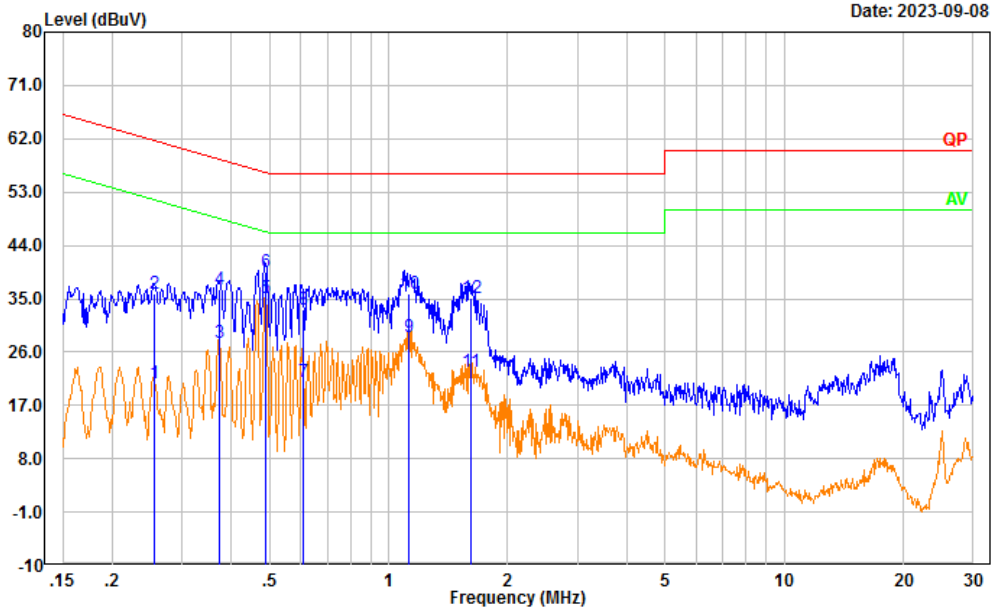

No.	Frequency (MHz)	Reading (dBµV)	Factor (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)	Detector
1	0.256	11.18	9.61	20.79	51.55	30.76	Average
2	0.256	26.18	9.61	35.79	61.55	25.76	QP
3	0.373	17.92	9.61	27.53	48.44	20.91	Average
4	0.373	26.99	9.61	36.60	58.44	21.84	QP
5	0.487	25.48	9.61	35.09	46.21	11.12	Average
6	0.487	30.00	9.61	39.61	56.21	16.60	QP
7	0.610	11.35	9.62	20.97	46.00	25.03	Average
8	0.610	23.53	9.62	33.15	56.00	22.85	QP
9	1.120	18.88	9.62	28.50	46.00	17.50	Average
10	1.120	26.19	9.62	35.81	56.00	20.19	QP
11	1.614	13.00	9.63	22.63	46.00	23.37	Average
12	1.614	25.43	9.63	35.06	56.00	20.94	QP

4.2 Radiation Spurious Emissions

Serial Number:	2ABX-2	Test Date:	Below 1GHz: 2023/12/05 Above 1GHz: 2023/8/31
Test Site:	966-1/966-2	Test Mode:	Transmitting
Tester:	Vic Du, Mack Huang	Test Result:	Pass

Environmental Conditions:					
Temperature: (℃)	25.4~26.1	Relative Humidity: (%)	47~51	ATM Pressure: (kPa)	100.2~101.4

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Below 1GHz					
Sunol Sciences	Antenna	JB6	A082520-6	2023/09/18	2026/09/17
BACL	Loop Antenna	1313-1P	3092721	2023/10/20	2026/10/19
R&S	EMI Test Receiver	ESR3	102724	2023/03/31	2024/03/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/07/16	2024/07/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/07/16	2024/07/15
Sonoma	Amplifier	310N	186165	2023/07/16	2024/07/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2023/03/31	2024/03/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/08/06	2024/08/05
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/08/06	2024/08/05
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/09	2023/11/08
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNACK	Horn Antenna	PE9852/2F-20	112002	2021/02/05	2024/02/04
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2022/09/16	2023/09/15
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/08/6	2024/08/05
E-Microwave	Band Rejection Filter	2400-2483.5MHz	OE01902424	2023/08/06	2024/08/05
Mini Circuits	High Pass Filter	VHF-6010+	31119	2023/08/06	2024/08/05

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to plots.

1) 9kHz~30MHz

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

2) 30MHz-1GHz

Low Channel:

Project No.: CR230849077-RF
Tester: Vic Du
Polarization: horizontal
Note: Transmitting & Powered by Charging Cable BLE

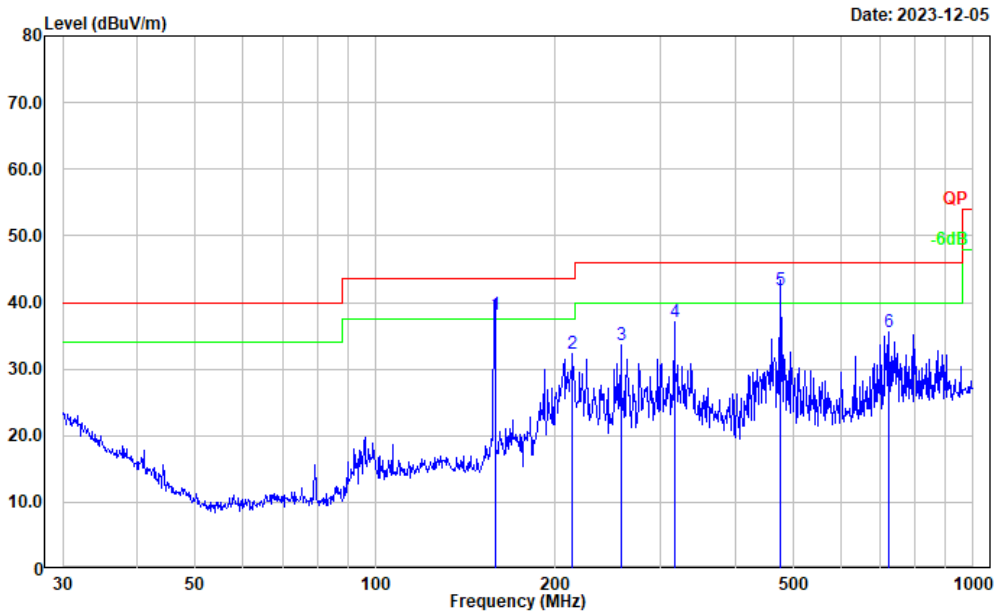

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	158.668	50.17	-11.95	38.22	43.50	5.28	QP
2	213.763	44.82	-12.61	32.21	43.50	11.29	Peak
3	257.422	46.28	-12.72	33.56	46.00	12.44	Peak
4	316.589	47.70	-10.58	37.12	46.00	8.88	Peak
5	475.499	48.09	-6.28	41.81	46.00	4.19	QP
6	724.261	38.86	-3.20	35.66	46.00	10.34	Peak

Project No.: CR230849077-RF
Tester: Vic Du
Polarization: vertical
Note: Transmitting & Powered by Charging Cable BLE

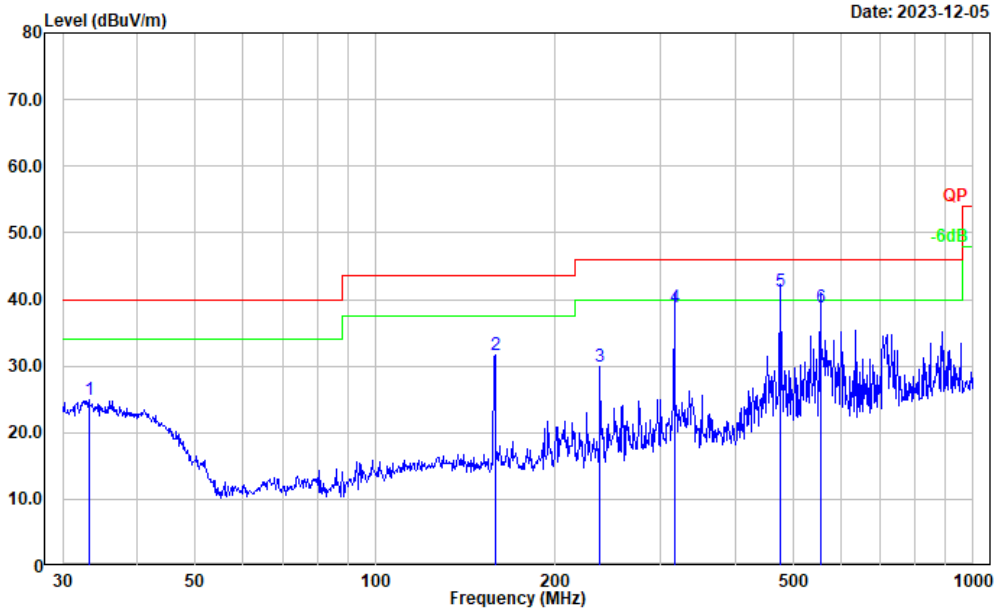

No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
1	33.211	31.16	-6.24	24.92	40.00	15.08	Peak
2	158.668	43.55	-11.95	31.60	43.50	11.90	Peak
3	237.476	43.02	-13.13	29.89	46.00	16.11	Peak
4	316.589	49.46	-10.58	38.88	46.00	7.12	QP
5	475.499	47.51	-6.28	41.23	46.00	4.77	QP
6	554.825	44.55	-5.67	38.88	46.00	7.12	QP

Middle Channel:

Project No.: CR230849077-RF
Tester: Vic Du
Polarization: horizontal
Note: Transmitting & Powered by Charging Cable BLE

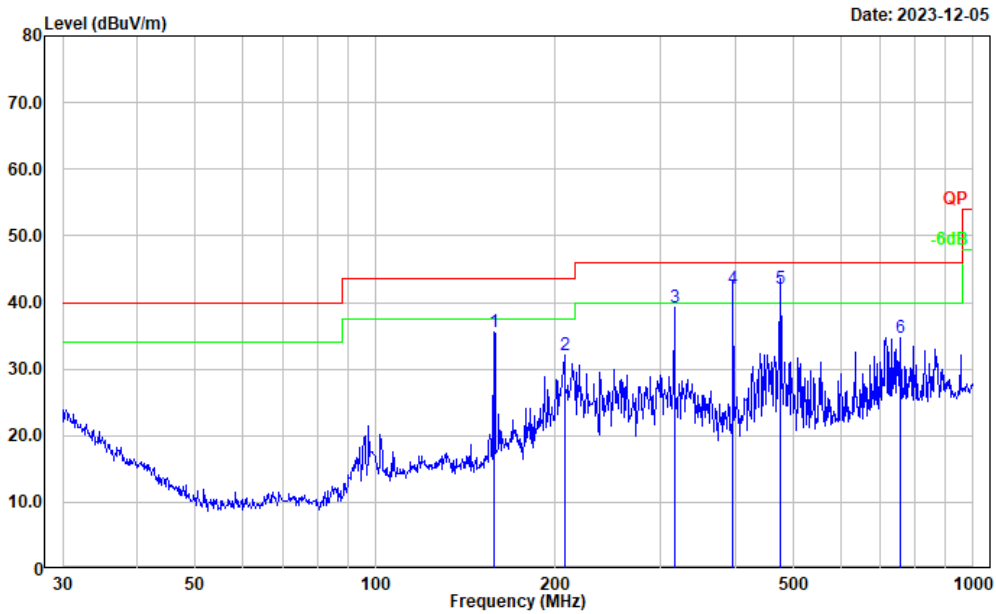

No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
1	158.112	47.41	-11.96	35.45	43.50	8.05	Peak
2	207.123	44.42	-12.41	32.01	43.50	11.49	Peak
3	316.589	49.78	-10.58	39.20	46.00	6.80	Peak
4	396.242	50.91	-8.81	42.10	46.00	3.90	QP
5	475.499	48.33	-6.28	42.05	46.00	3.95	QP
6	755.387	37.87	-3.08	34.79	46.00	11.21	Peak

Project No.: CR230849077-RF
Tester: Vic Du
Polarization: vertical
Note: Transmitting & Powered by Charging Cable BLE

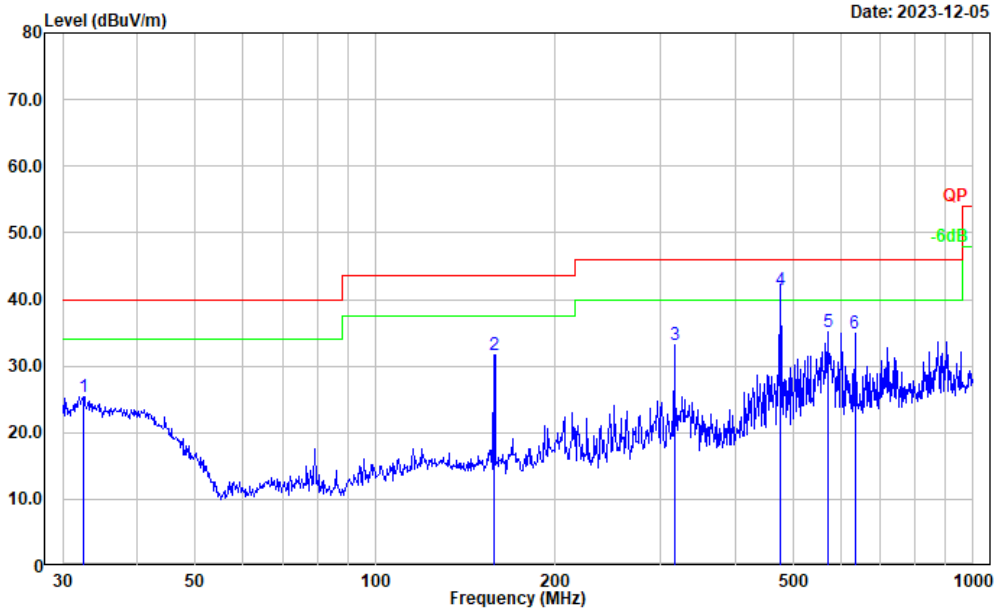

No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
1	32.520	31.13	-5.71	25.42	40.00	14.58	Peak
2	158.112	43.69	-11.96	31.73	43.50	11.77	Peak
3	316.589	43.70	-10.58	33.12	46.00	12.88	Peak
4	475.499	47.63	-6.28	41.35	46.00	4.65	QP
5	570.610	40.81	-5.62	35.19	46.00	10.81	Peak
6	633.907	39.56	-4.64	34.92	46.00	11.08	Peak

High Channel:

Project No.: CR230849077-RF
Tester: Vic Du
Polarization: horizontal
Note: Transmitting & Powered by Charging Cable BLE

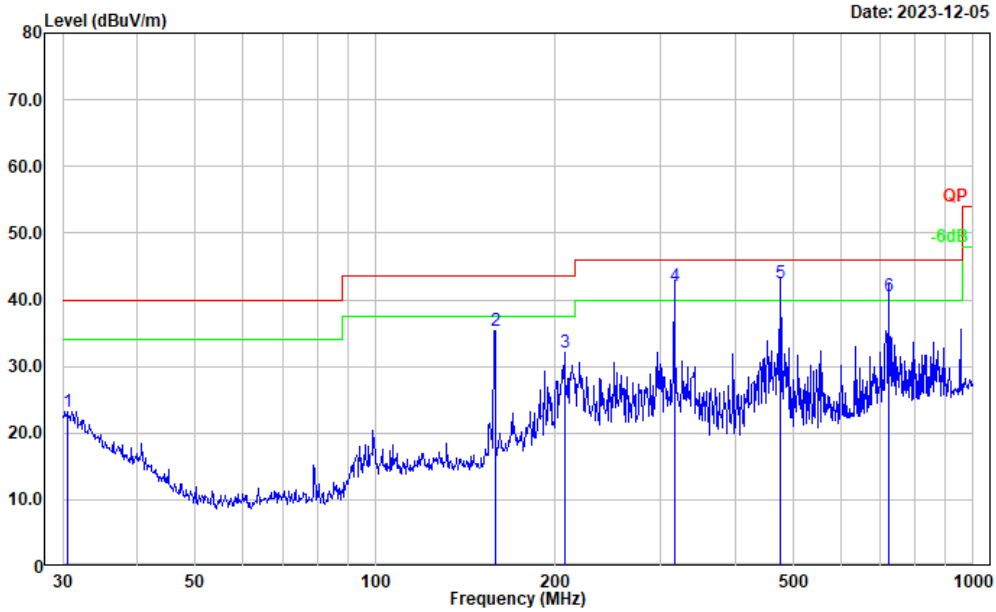

No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
1	30.531	27.47	-4.20	23.27	40.00	16.73	Peak
2	158.668	47.31	-11.95	35.36	43.50	8.14	Peak
3	207.123	44.60	-12.41	32.19	43.50	11.31	Peak
4	316.589	52.61	-10.58	42.03	46.00	3.97	QP
5	475.499	48.68	-6.28	42.40	46.00	3.60	QP
6	721.726	43.87	-3.32	40.55	46.00	5.45	QP

Project No.: CR230849077-RF
Tester: Vic Du
Polarization: vertical
Note: Transmitting & Powered by Charging Cable BLE

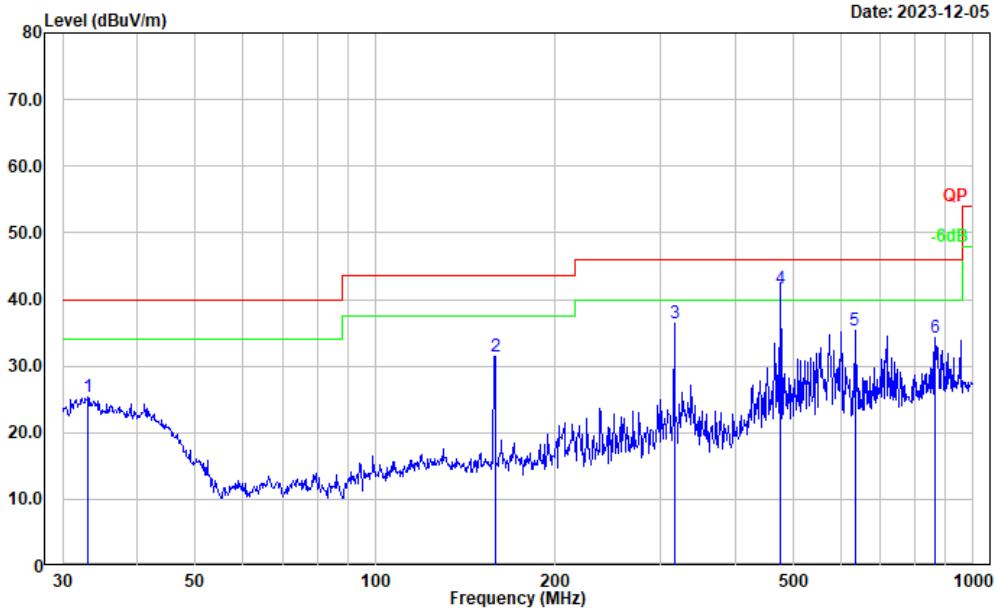

No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
1	33.095	31.46	-6.16	25.30	40.00	14.70	Peak
2	158.668	43.38	-11.95	31.43	43.50	12.07	Peak
3	316.589	47.01	-10.58	36.43	46.00	9.57	Peak
4	475.499	47.85	-6.28	41.57	46.00	4.43	QP
5	633.907	40.07	-4.64	35.43	46.00	10.57	Peak
6	863.056	35.46	-1.25	34.21	46.00	11.79	Peak

3) 1-25GHz:
BLE 1Mbps:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2402 MHz							
2402.000	60.69	PK	H	31.51	92.20	N/A	N/A
2402.000	57.12	AV	H	31.51	88.63	N/A	N/A
2402.000	62.50	PK	V	31.51	94.01	N/A	N/A
2402.000	59.08	AV	V	31.51	90.59	N/A	N/A
2390.000	26.40	PK	V	31.46	57.86	74.00	16.14
2390.000	13.73	AV	V	31.46	45.19	54.00	8.81
4804.000	38.41	PK	V	10.91	49.32	74.00	24.68
4804.000	28.20	AV	V	10.91	39.11	54.00	14.89
7206.000	34.10	PK	V	14.22	48.32	74.00	25.68
7206.000	22.05	AV	V	14.22	36.27	54.00	17.73
Middle Channel: 2440 MHz							
2440.000	60.02	PK	H	31.60	91.62	N/A	N/A
2440.000	57.36	AV	H	31.60	88.96	N/A	N/A
2440.000	62.48	PK	V	31.60	94.08	N/A	N/A
2440.000	59.44	AV	V	31.60	91.04	N/A	N/A
4880.000	40.33	PK	V	11.07	51.40	74.00	22.60
4880.000	30.17	AV	V	11.07	41.24	54.00	**12.76**
7320.000	38.86	PK	V	14.80	53.66	74.00	20.34
7320.000	26.43	AV	V	14.80	41.23	54.00	12.77
High Channel: 2480 MHz							
2480.000	61.46	PK	H	31.64	93.10	N/A	N/A
2480.000	58.28	AV	H	31.64	89.92	N/A	N/A
2480.000	63.10	PK	V	31.64	94.74	N/A	N/A
2480.000	60.82	AV	V	31.64	92.46	N/A	N/A
2483.500	26.81	PK	V	31.64	58.45	74.00	15.55
2483.500	14.13	AV	V	31.64	45.77	54.00	8.23
4960.000	39.99	PK	V	11.23	51.22	74.00	22.78
4960.000	29.40	AV	V	11.23	40.63	54.00	13.37
7440.000	37.01	PK	V	15.26	52.27	74.00	21.73
7440.000	25.02	AV	V	15.26	40.28	54.00	13.72

Worst Test plots (Middle channel)

Horizontal	
1-6GHz	

Project No.: CR230849077-RF
Tester: Mack Huang
Polarization: horizontal
Note: BLE

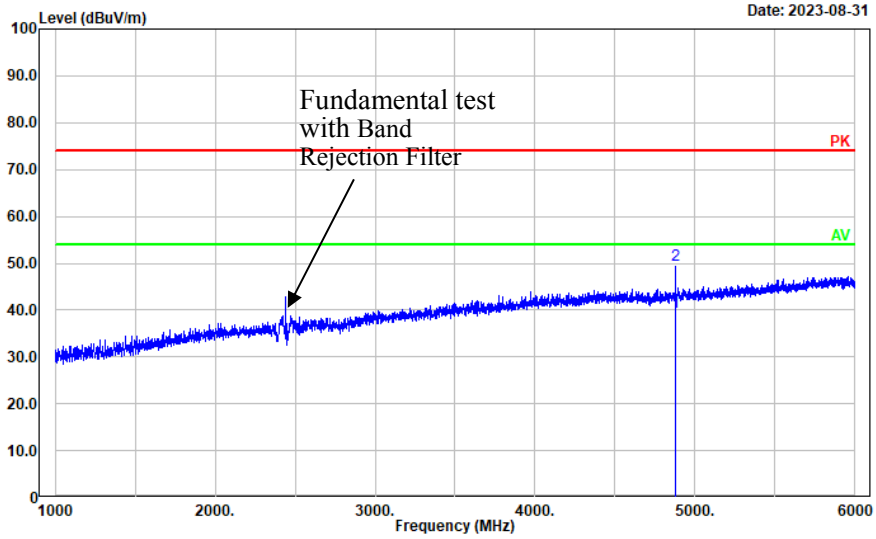

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4880.000	28.55	11.07	39.62	54.00	14.38	Average
2	4880.000	38.64	11.07	49.71	74.00	24.29	Peak

Horizontal

6-18GHz

Project No.: CR230849077-RF
Tester: Mack Huang
Polarization: horizontal
Note: BLE

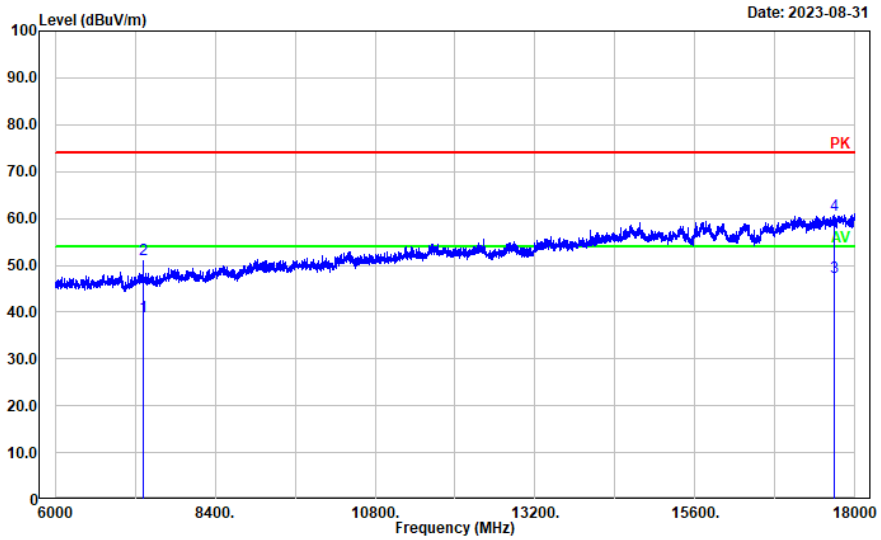

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7320.000	24.25	14.80	39.05	54.00	14.95	Average
2	7320.000	36.54	14.80	51.34	74.00	22.66	Peak
3	17690.340	17.29	30.26	47.55	54.00	6.45	Average
4	17690.340	30.38	30.26	60.64	74.00	13.36	Peak

Horizontal

18-25GHz

Project No.: CR230849077-RF
Tester: Mack Huang
Polarization: Horizontal
Note: BLE

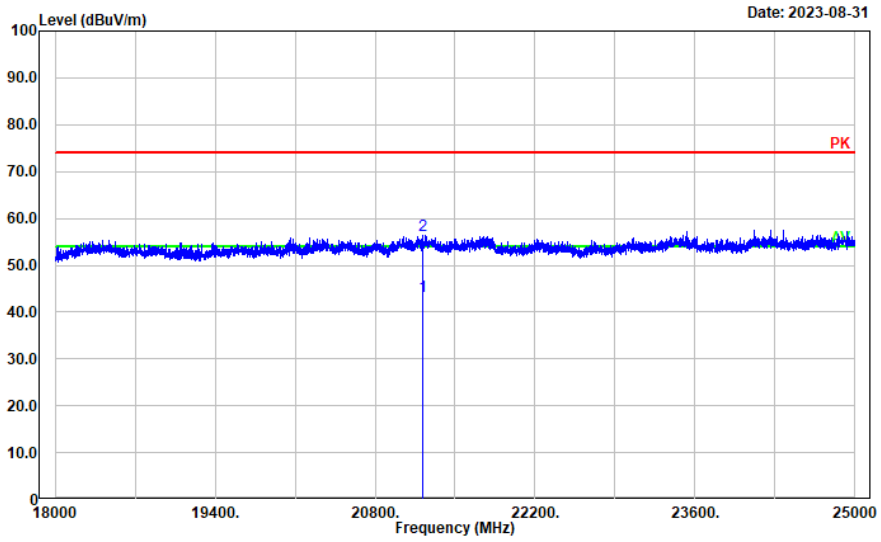

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	21219.240	38.52	4.83	43.35	54.00	10.65	Average
2	21219.240	51.66	4.83	56.49	74.00	17.51	Peak

Vertical

1-6GHz

Project No.: CR230849077-RF
Tester: Mack Huang
Polarization: vertical
Note: BLE

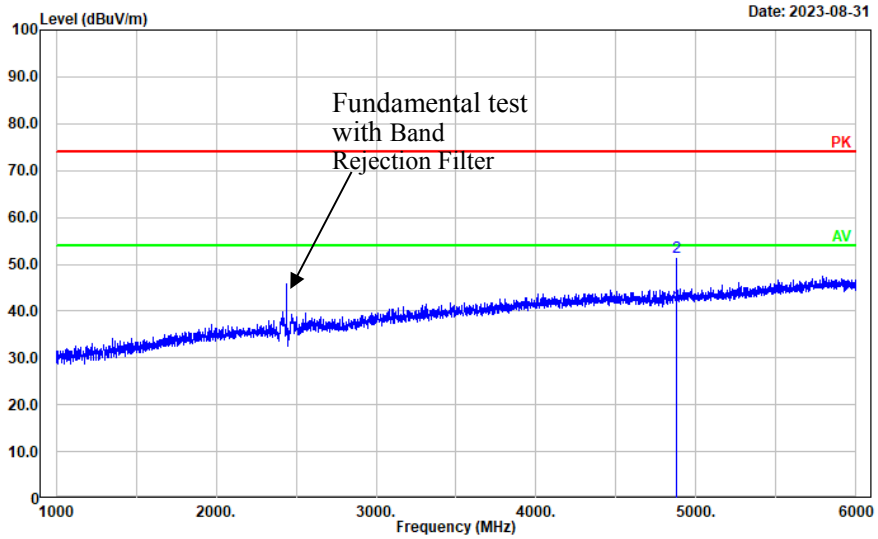

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4880.000	30.17	11.07	41.24	54.00	12.76	Average
2	4880.000	40.33	11.07	51.40	74.00	22.60	Peak

Vertical

6-18GHz

Project No.: CR230849077-RF
Tester: Mack Huang
Polarization: vertical
Note: BLE

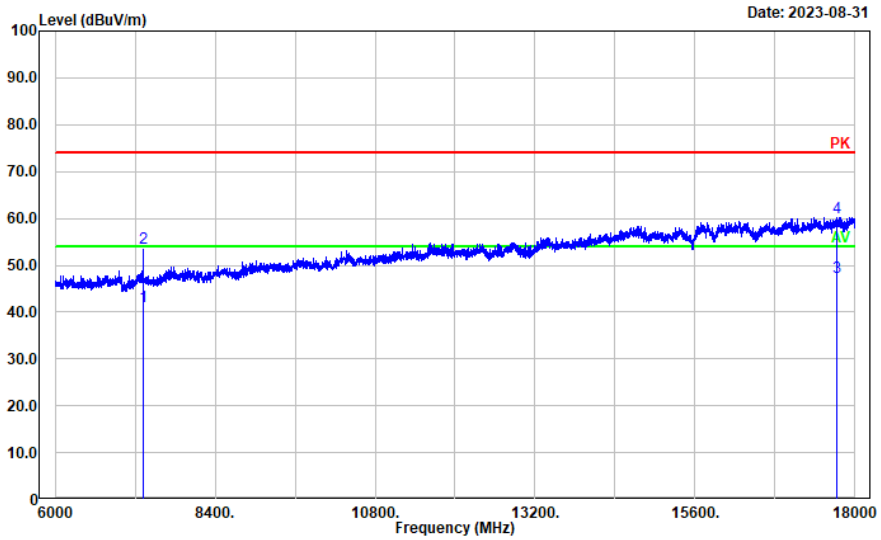

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7320.000	26.43	14.80	41.23	54.00	12.77	Average
2	7320.000	38.86	14.80	53.66	74.00	20.34	Peak
3	17731.150	17.05	30.50	47.55	54.00	6.45	Average
4	17731.150	29.76	30.50	60.26	74.00	13.74	Peak

Vertical

18-25GHz

Project No.: CR230849077-RF
Tester: Mack Huang
Polarization: Vertical
Note: BLE

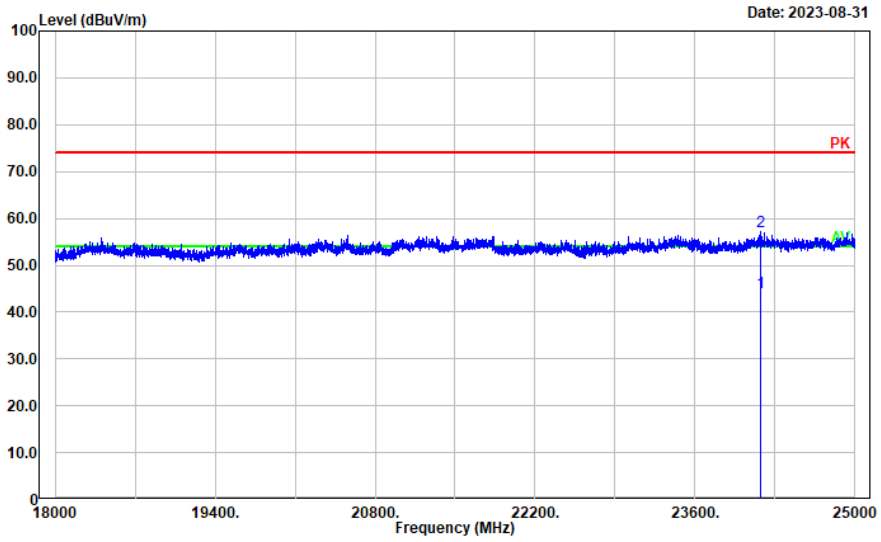

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	24173.830	39.35	4.93	44.28	54.00	9.72	Average
2	24173.830	52.33	4.93	57.26	74.00	16.74	Peak

4.3 6 dB Emission Bandwidth

Serial Number:	2ABX-1	Test Date:	2023/12/14
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jim Wei	Test Result:	Pass

Environmental Conditions:					
Temperature: (℃)	26.2	Relative Humidity: (%)	63	ATM Pressure: (kPa)	101.4

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2023/03/31	2024/03/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Channel	Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
Lowest	2402	0.544	⩾0.5
Middle	2440	0.556	⩾0.5
Highest	2480	0.552	⩾0.5

6dB Emission Bandwidth	
BLE Lowest Channel	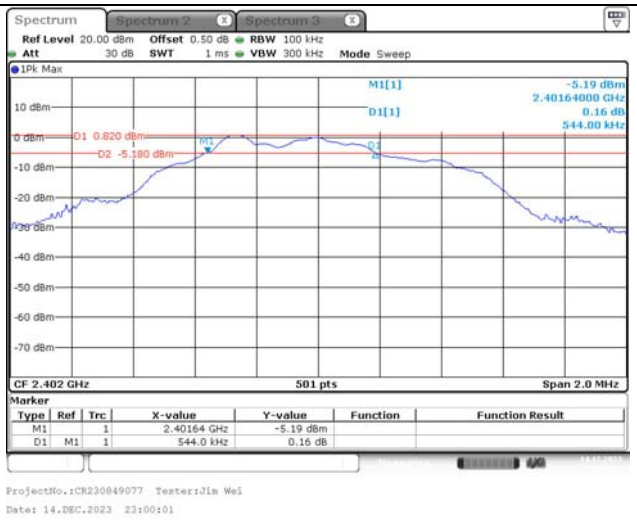
BLE Middle Channel	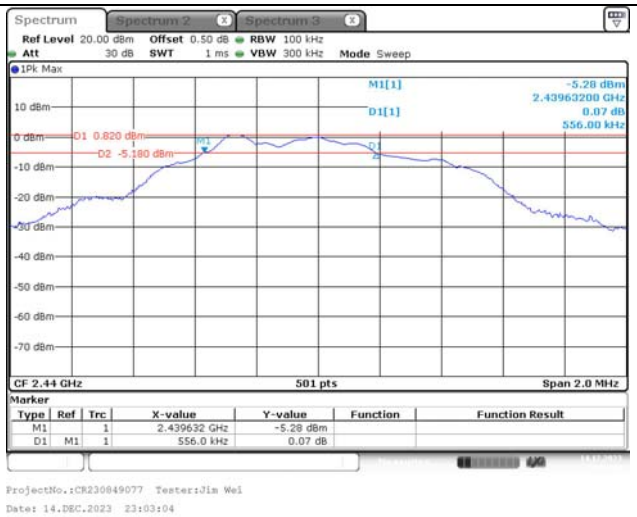
BLE Highest Channel	

4.4 Maximum Conducted Output Power

Serial Number:	2ABX-1	Test Date:	2023/12/14
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jim Wei	Test Result:	Pass

Environmental Conditions:					
Temperature: (℃)	26.2	Relative Humidity: (%)	63	ATM Pressure: (kPa)	101.4

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2023/03/31	2024/03/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Channel	Test Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)
Lowest	2402	**1.25**	≤30
Middle	2440	1.24	≤30
Highest	2480	0.96	≤30

Maximum Conducted Peak Output Power	
BLE Lowest Channel	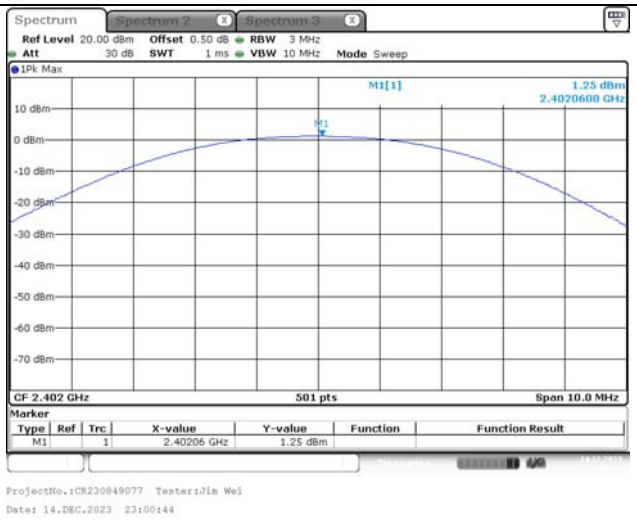
BLE Middle Channel	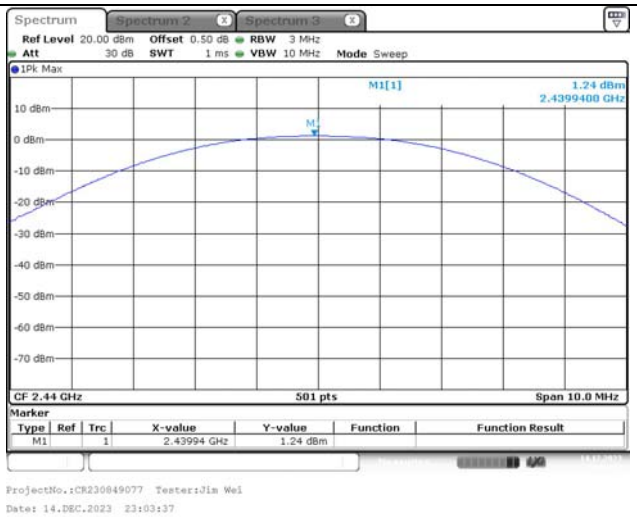
BLE Highest Channel	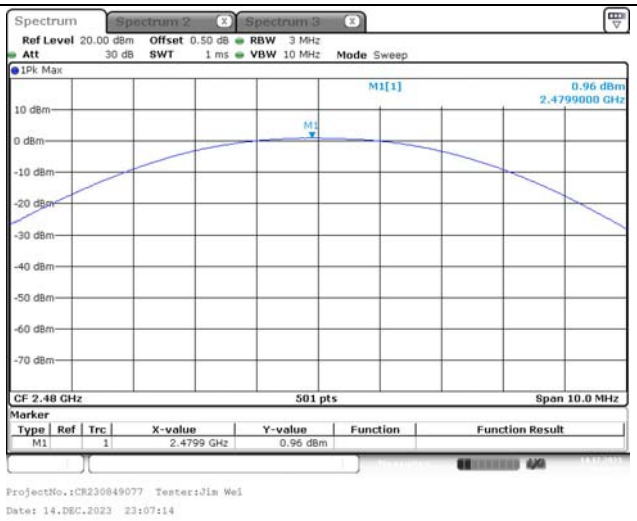

4.5 Maximum power spectral density

Serial Number:	2ABX-1	Test Date:	2023/12/14
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jim Wei	Test Result:	Pass

Environmental Conditions:					
Temperature: (℃)	26.2	Relative Humidity: (%)	63	ATM Pressure: (kPa)	101.4

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2023/03/31	2024/03/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Channel	Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
Lowest	2402	-16.32	≤8.00
Middle	2440	-16.35	≤8.00
Highest	2480	-16.62	≤8.00

Maximum power spectral density	
BLE Lowest Channel	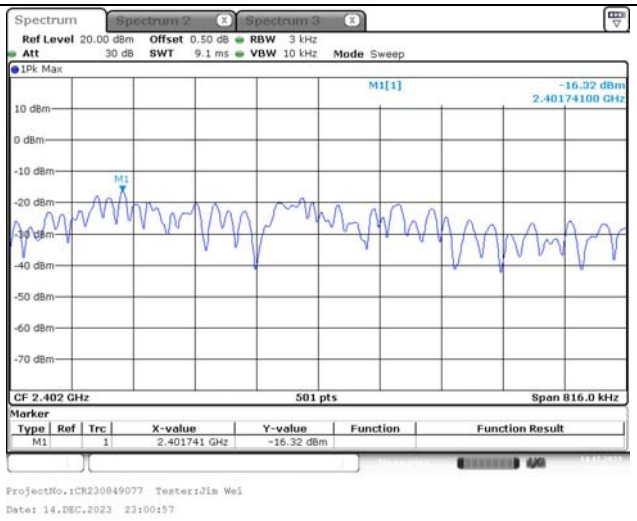
BLE Middle Channel	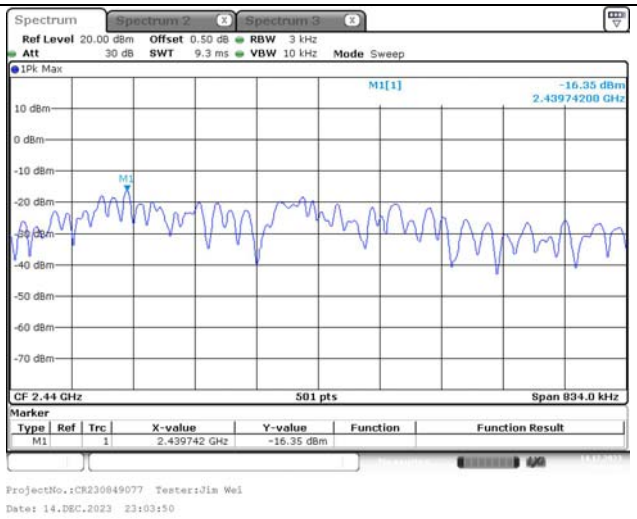
BLE Highest Channel	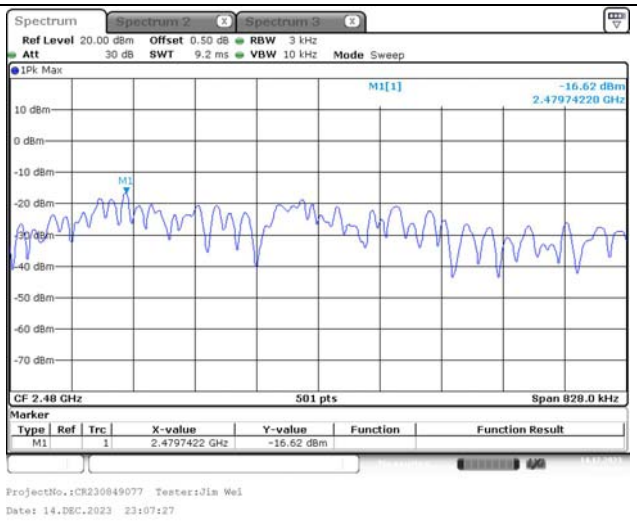

4.6 100 kHz Bandwidth of Frequency Band Edge

Serial Number:	2ABX-1	Test Date:	2023/12/14
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jim Wei	Test Result:	Pass

Environmental Conditions:					
Temperature: (℃)	26.2	Relative Humidity: (%)	63	ATM Pressure: (kPa)	101.4

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2023/03/31	2024/03/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

100 kHz Bandwidth of Frequency Band Edge	
BLE Lowest Band edge	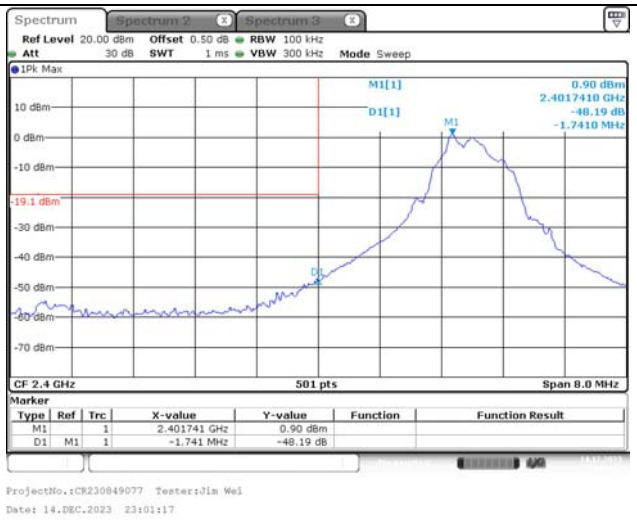
BLE Highest Band edge	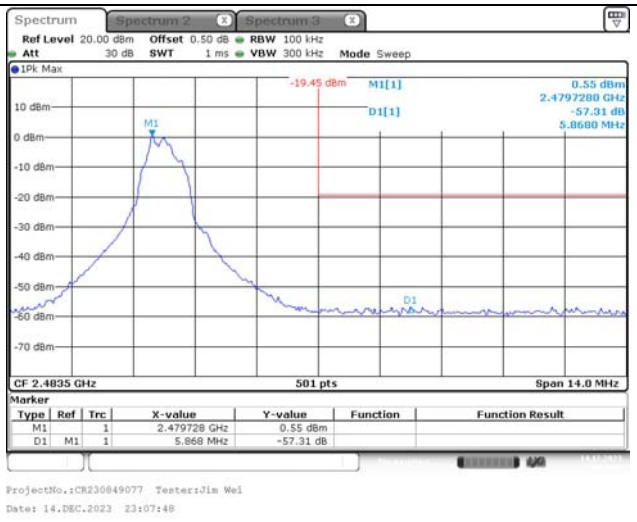

4.7 Duty Cycle

Serial Number:	2ABX-1	Test Date:	2023/12/14
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jim Wei	Test Result:	N/A

Environmental Conditions:					
Temperature: (℃)	26.2	Relative Humidity: (%)	63	ATM Pressure: (kPa)	101.4

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2023/03/31	2024/03/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Frequency (MHz)	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	VBW Setting (kHz)
2440	0.148	0.644	22.98	6757	10

Duty Cycle	
BLE 1Mbps	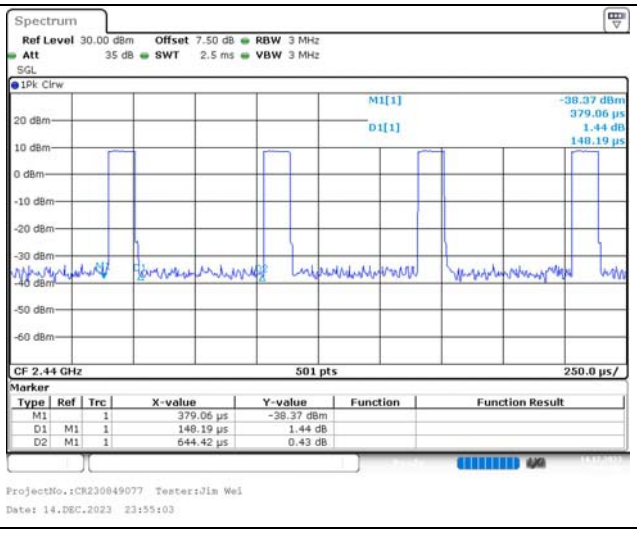

5. RF EXPOSURE EVALUATION

5.1 Applicable Standard

According to§15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:
[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] · [√f(GHz)] ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

5.2 Measurement Result

The max conducted power including tune-up tolerance is 1.5 dBm (1.41 mW).
[(max. power of channel, mW)/(min. test separation distance, mm)][√f(GHz)]
=1.41/5*(√2.480) = 0.4< 3.0

Note: the output power of NFC is far less than SAR test exclusion threshold, so SAR estimation is very low, consider simultaneous transmission Bluetooth/BLE and NFC is not necessary.

Result: Compliant. The stand-alone SAR evaluation is not necessary.

6. EUT PHOTOGRAPHS

Please refer to the attachment CR230849077-EXP EUT EXTERNAL PHOTOGRAPHS and CR230849077-INP EUT INTERNAL PHOTOGRAPHS

7. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR230849077-00A-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT ====