


Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE20 at 7095 MHz		

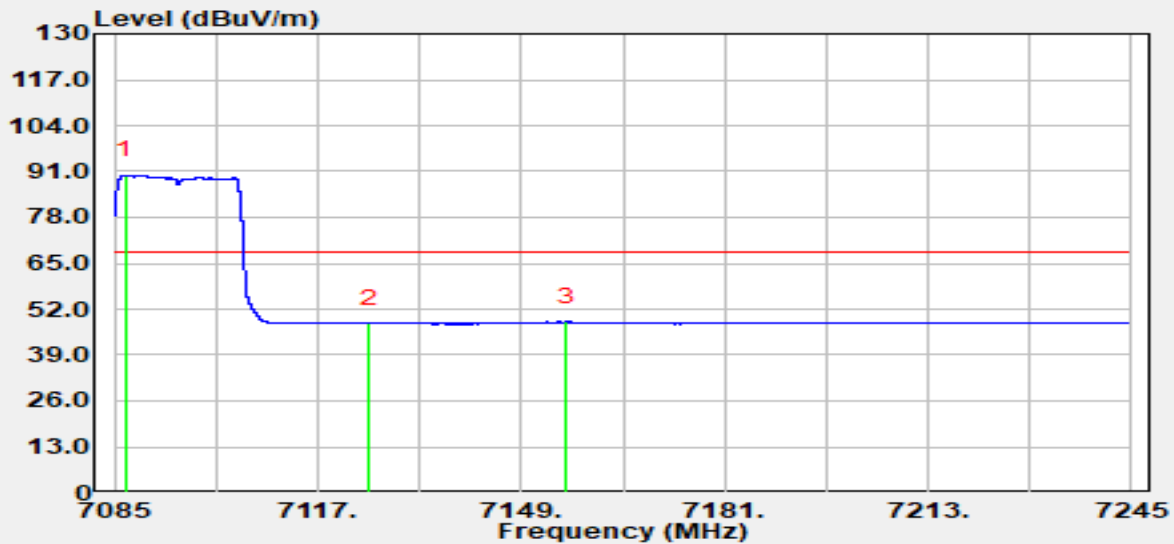


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7086.81	69.28	20.58	89.86	N/A	N/A	Average
2		7125.00	27.47	20.50	47.97	-20.23	68.20	Average
3	*	7156.15	27.47	20.90	48.38	-19.82	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE20 at 7095 MHz		

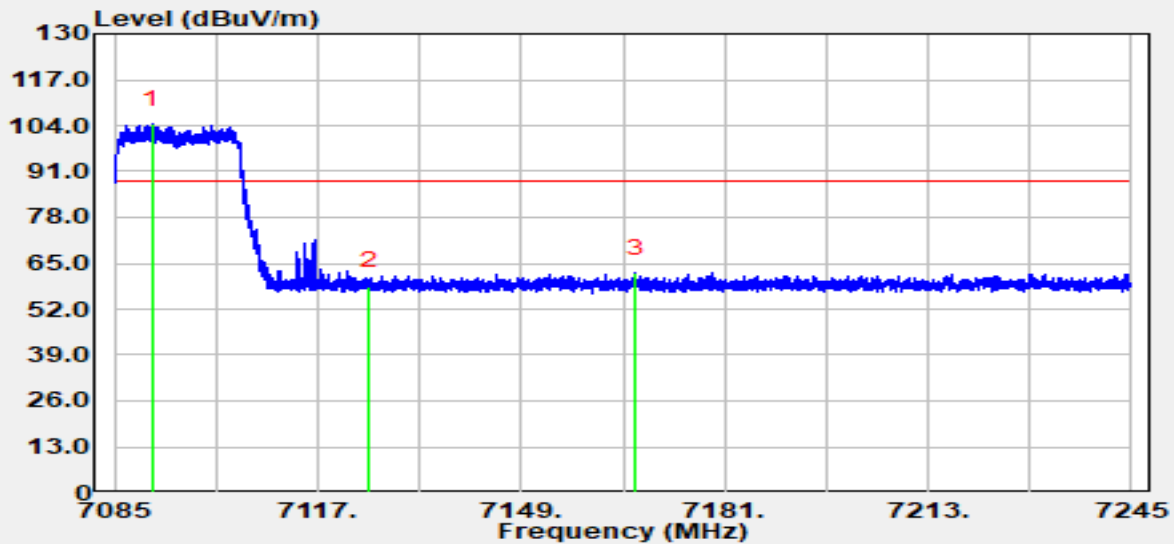


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7090.84	83.87	20.56	104.43	N/A	N/A	Peak
2		7125.00	38.07	20.50	58.57	-29.63	88.20	Peak
3	*	7167.05	41.45	20.66	62.10	-26.10	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE20 at 7095 MHz		

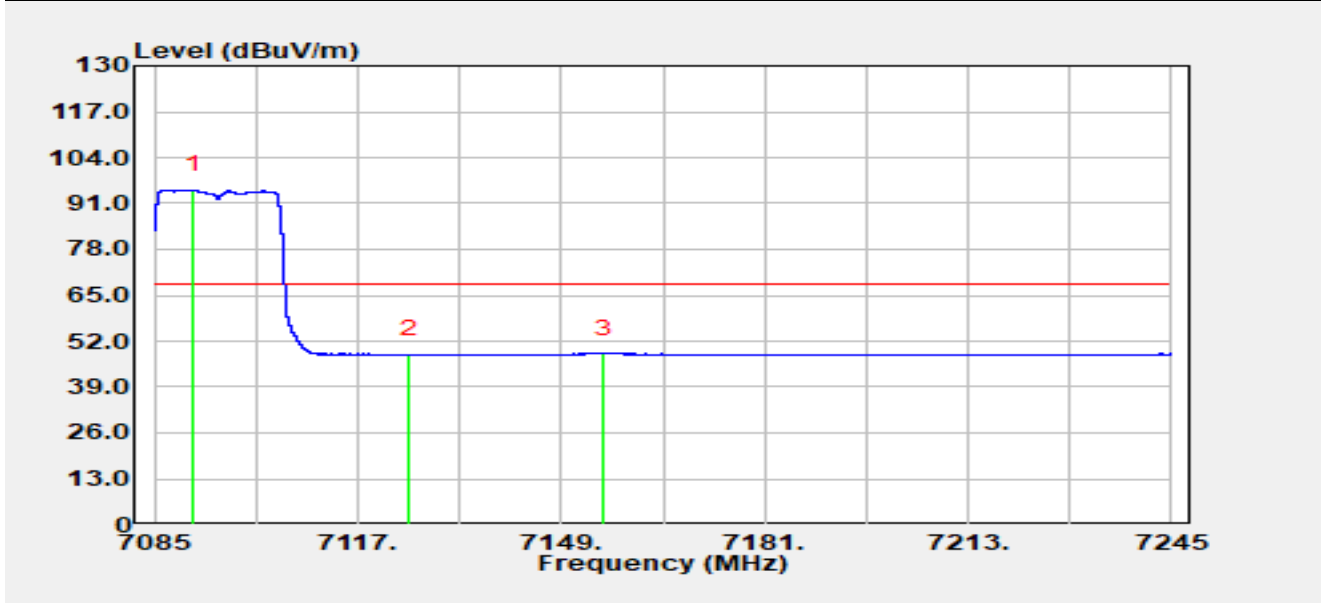


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7091.18	74.35	20.55	94.90	N/A	N/A	Average
2		7125.00	27.64	20.50	48.14	-20.06	68.20	Average
3	*	7155.66	27.64	20.89	48.53	-19.67	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE40 at 6125 MHz		

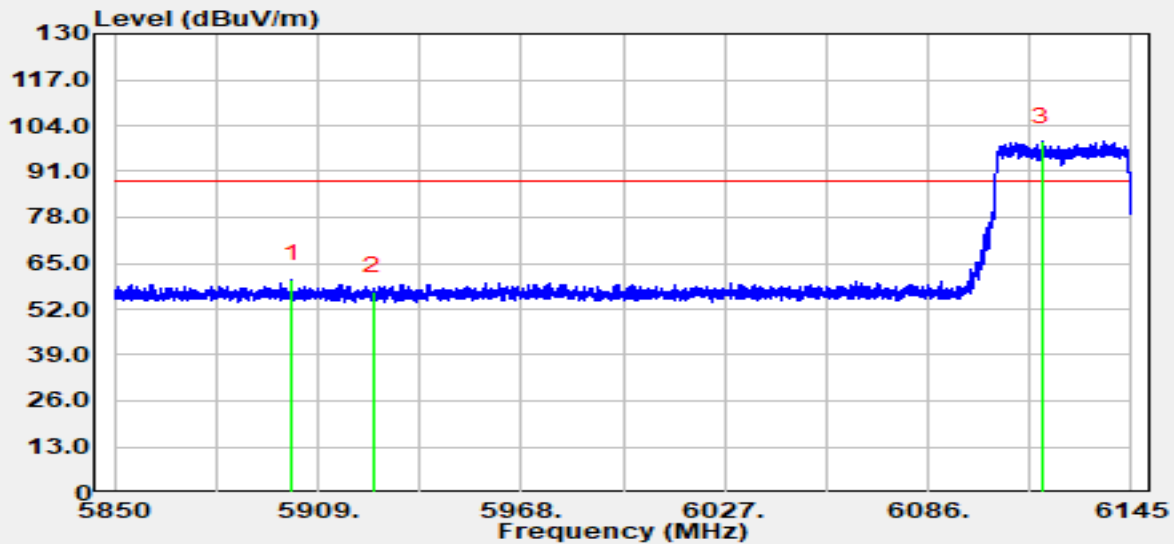


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5901.54	43.10	17.4 3	60.53	-27.67	88.20	Peak
2		5925.00	39.59	17.4 0	56.99	-31.21	88.20	Peak
3		6119.04	81.23	18.20	99.42	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE40 at 6125 MHz		

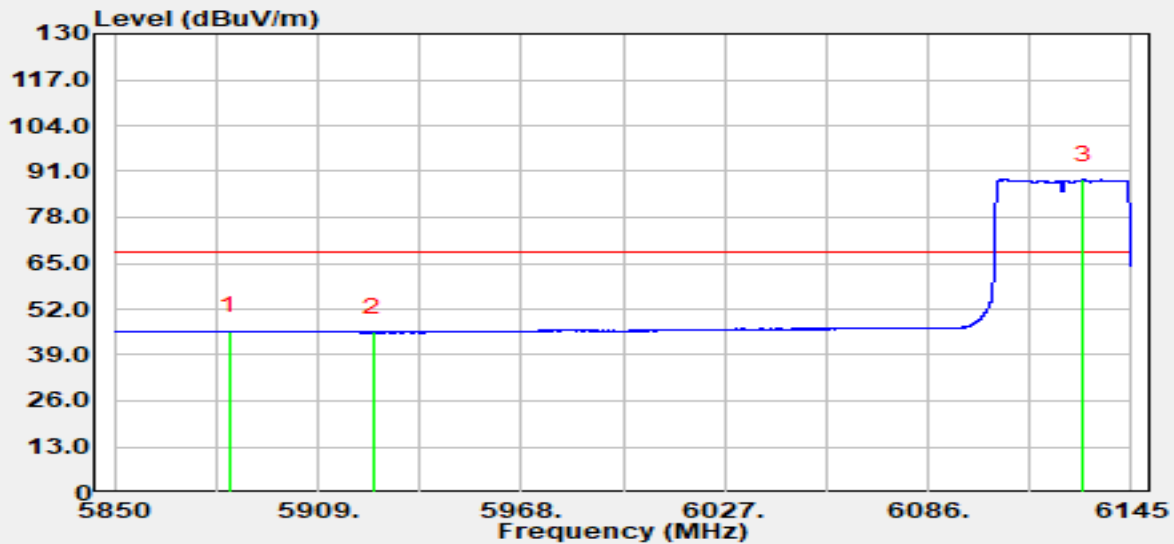


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5883.16	28.35	17.4 6	45.81	-22.39	68.20	Average
2		5925.00	28.00	17.4 0	45.40	-22.80	68.20	Average
3		6131.08	70.32	18.41	88.73	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE40 at 6125 MHz		

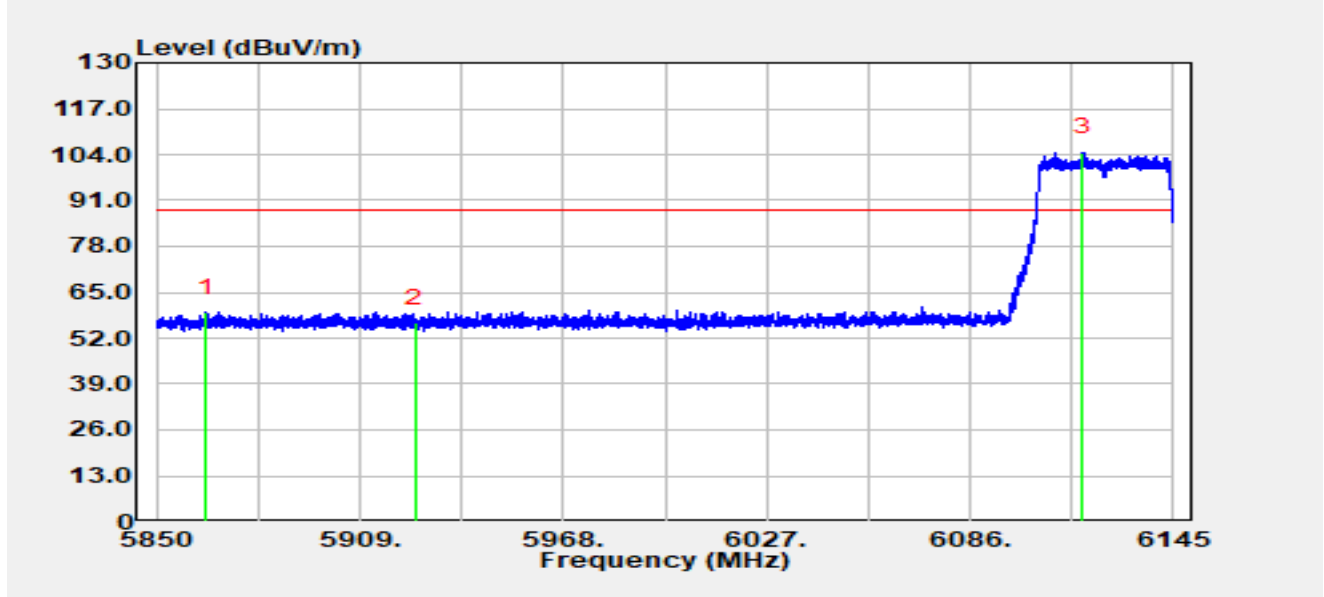


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5864.57	41.85	17.32	59.16	-29.04	88.20	Peak
2		5925.00	38.77	17.4 0	56.17	-32.03	88.20	Peak
3		6118.80	86.43	18.19	104.62	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE40 at 6125 MHz		

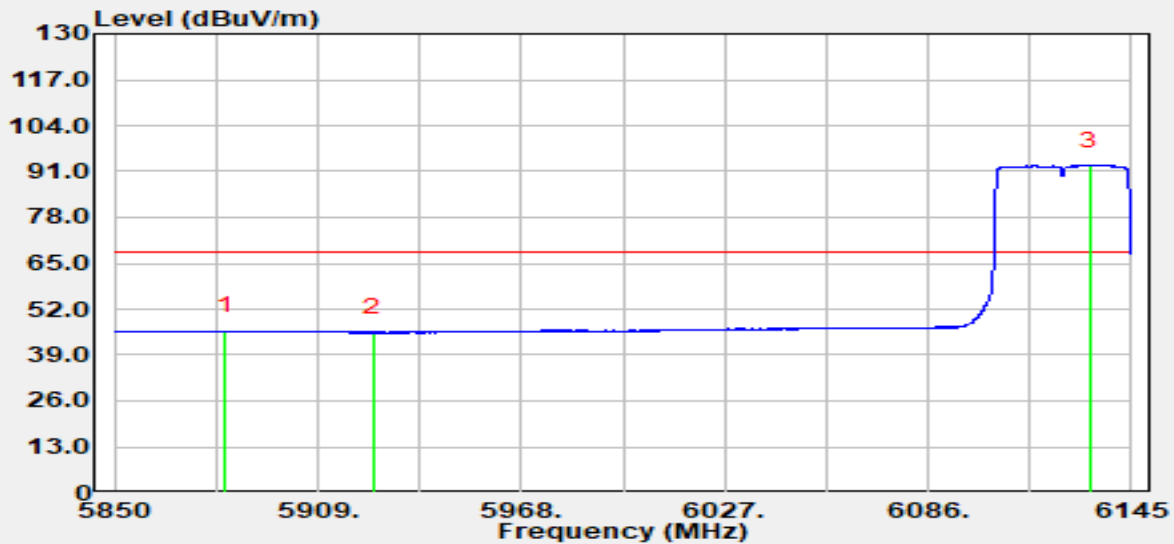


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5881.98	28.33	17.4 6	45.79	-22.41	68.20	Average
2		5925.00	27.98	17.4 0	45.38	-22.82	68.20	Average
3		6133.02	74.22	18.45	92.67	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE40 at 7085 MHz		

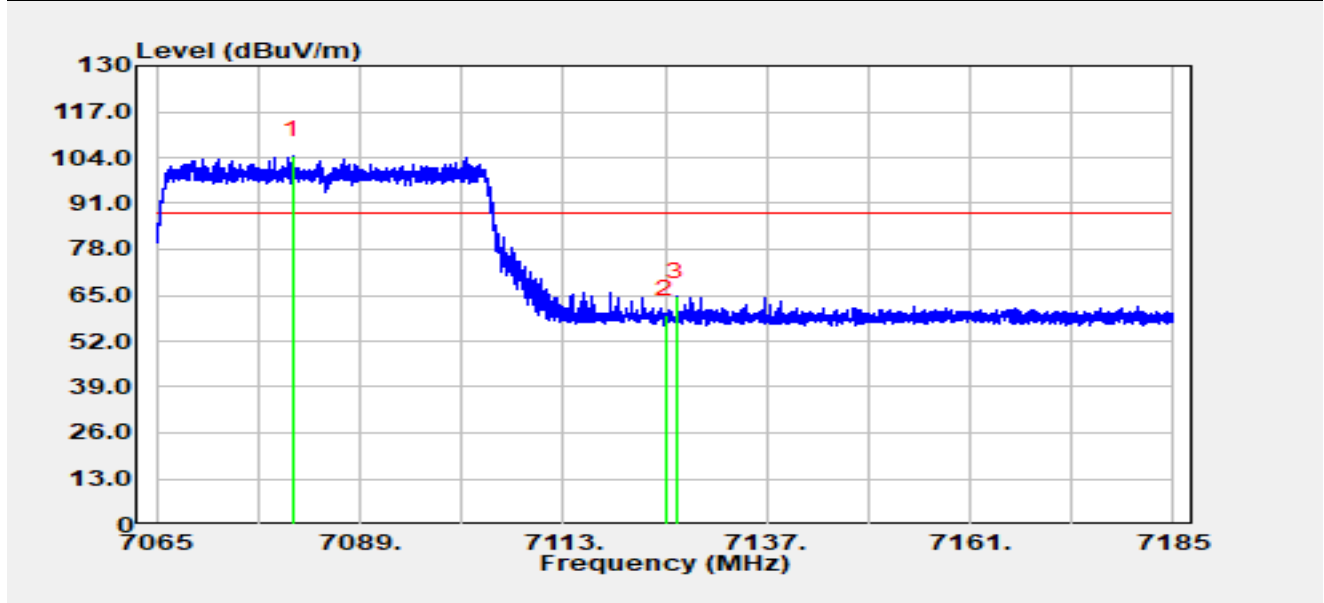


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7081.02	84.08	20.49	104.57	N/A	N/A	Peak
2		7125.00	38.91	20.50	59.41	-28.79	88.20	Peak
3	*	7126.33	44.20	20.50	64.69	-23.51	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE40 at 7085 MHz		

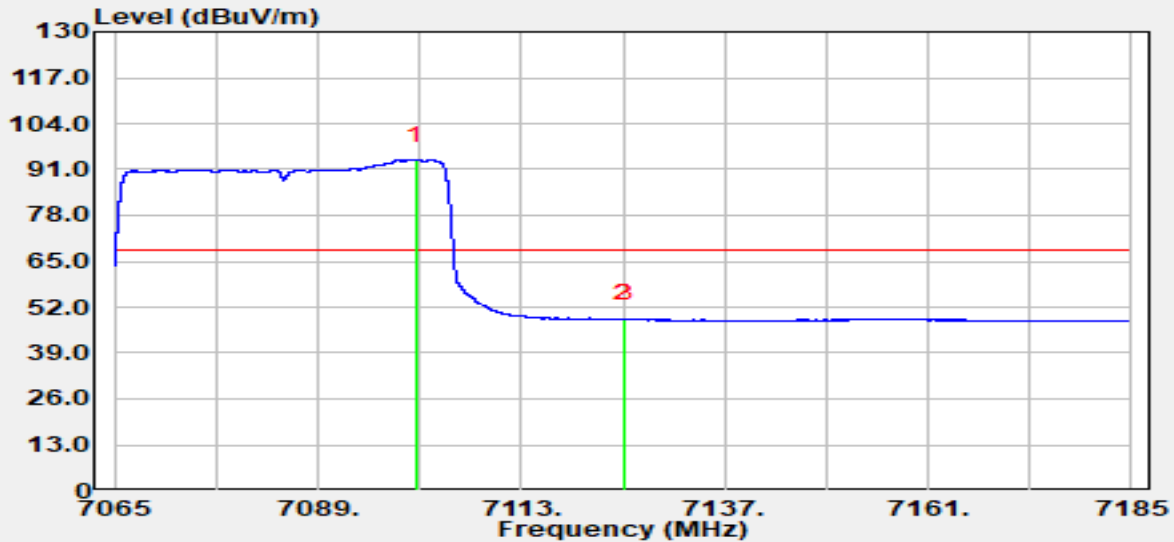


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7100.53	73.23	20.39	93.62	N/A	N/A	Average
2		7125.00	28.08	20.50	48.57	-19.63	68.20	Average
3	*	7125.19	28.08	20.50	48.58	-19.62	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE40 at 7085 MHz		

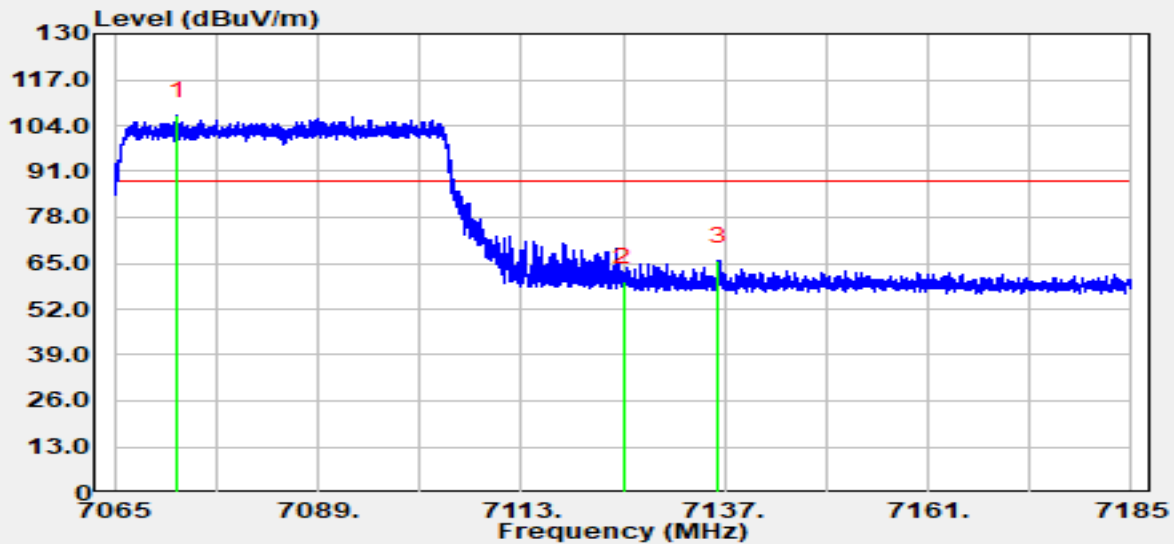


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7072.44	86.52	20.36	106.88	N/A	N/A	Peak
2		7125.00	39.18	20.50	59.68	-28.52	88.20	Peak
3	*	7136.32	45.31	20.40	65.72	-22.48	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE40 at 7085 MHz		

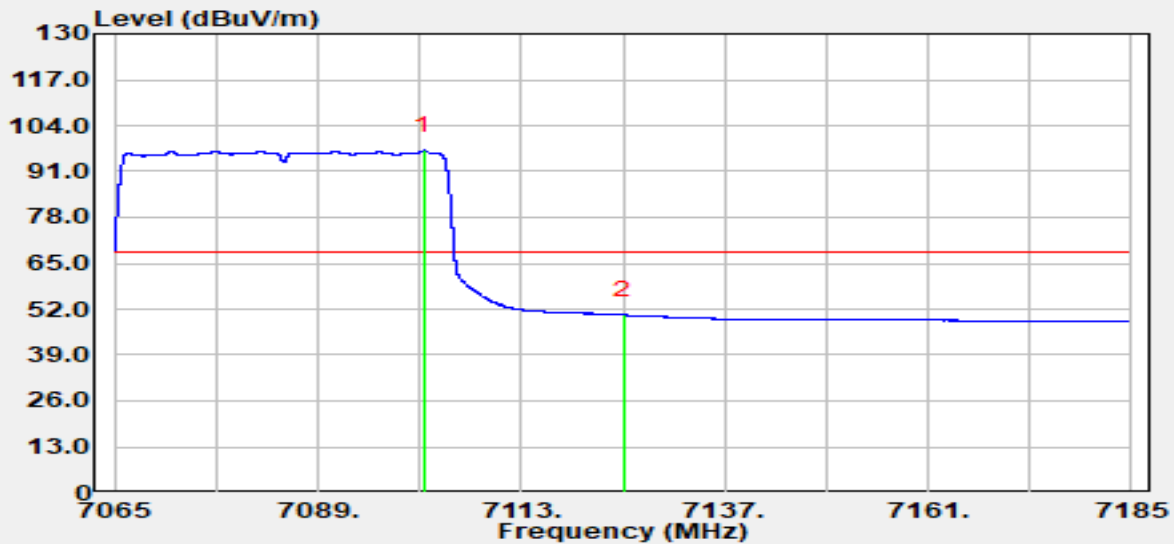


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7101.58	76.53	20.37	96.90	N/A	N/A	Average
2	*	7125.00	29.82	20.50	50.32	-17.88	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE80 at 6145 MHz		

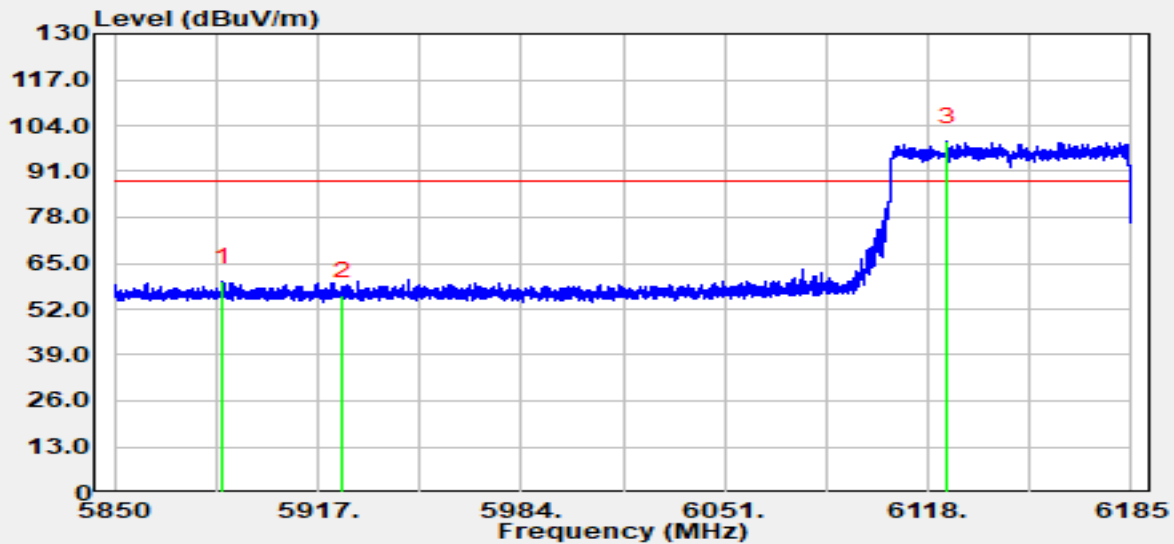


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5885.85	42.21	17.4 5	59.66	-28.54	88.20	Peak
2		5925.00	38.44	17.4 0	55.84	-32.36	88.20	Peak
3		6124.47	81.13	18.30	99.43	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE80 at 6145 MHz		

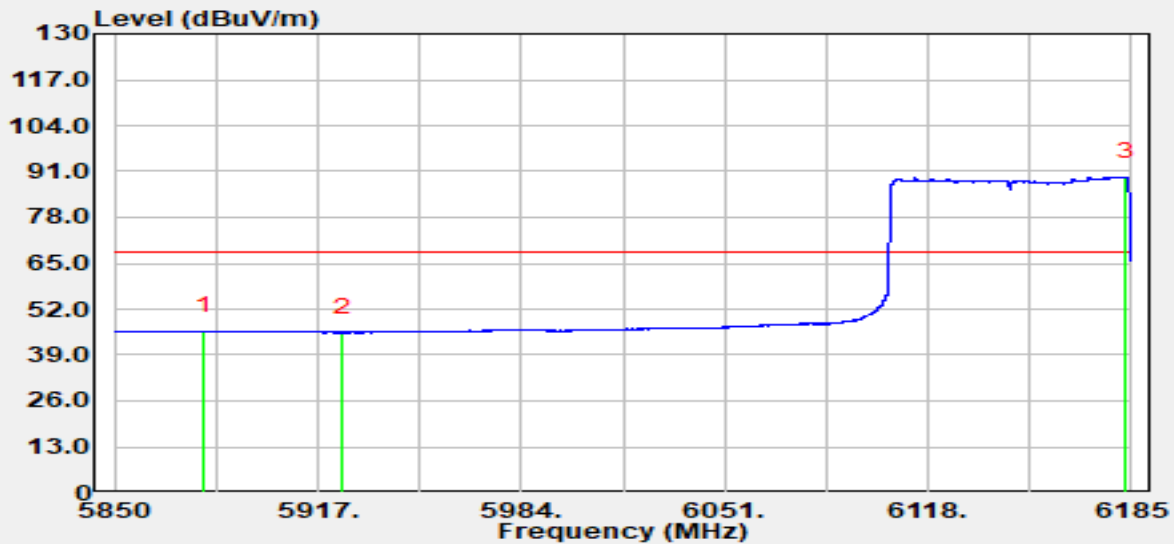


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5879.35	28.35	17.4 6	45.81	-22.39	68.20	Average
2		5925.00	27.98	17.4 0	45.38	-22.82	68.20	Average
3		6183.12	70.88	18.61	89.49	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE80 at 6145 MHz		

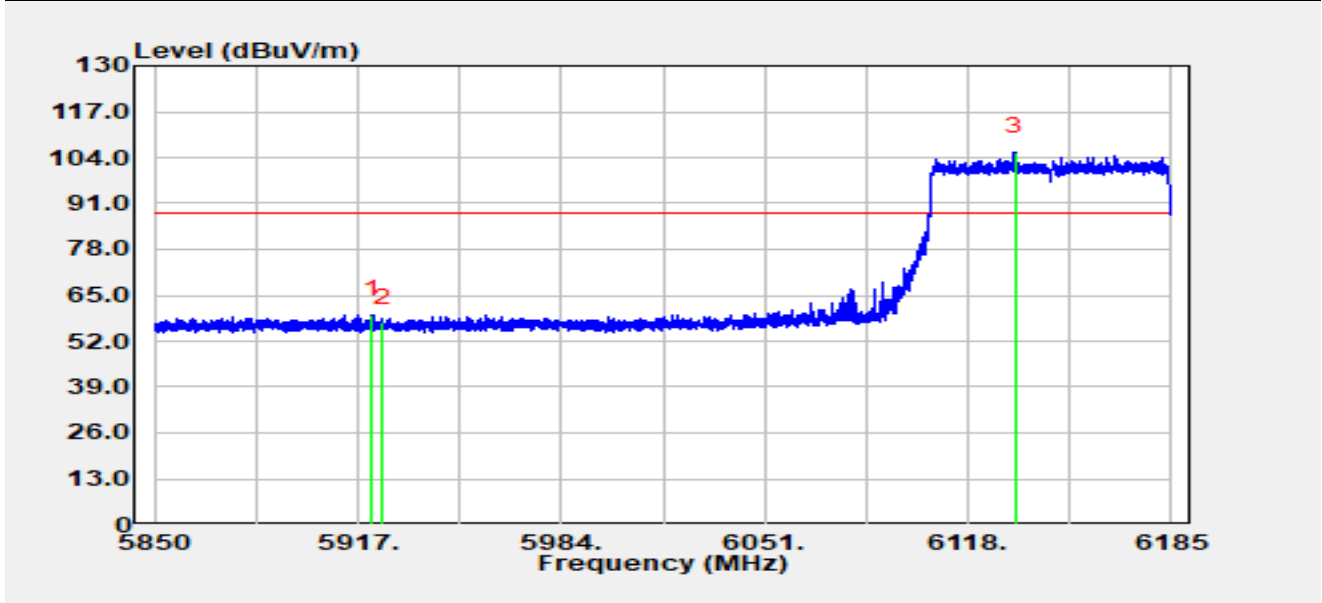


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.76	42.15	17.4 1	59.55	-28.65	88.20	Peak
2		5925.00	39.94	17.4 0	57.34	-30.86	88.20	Peak
3		6133.34	87.25	18.45	105.70	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE80 at 6145 MHz		

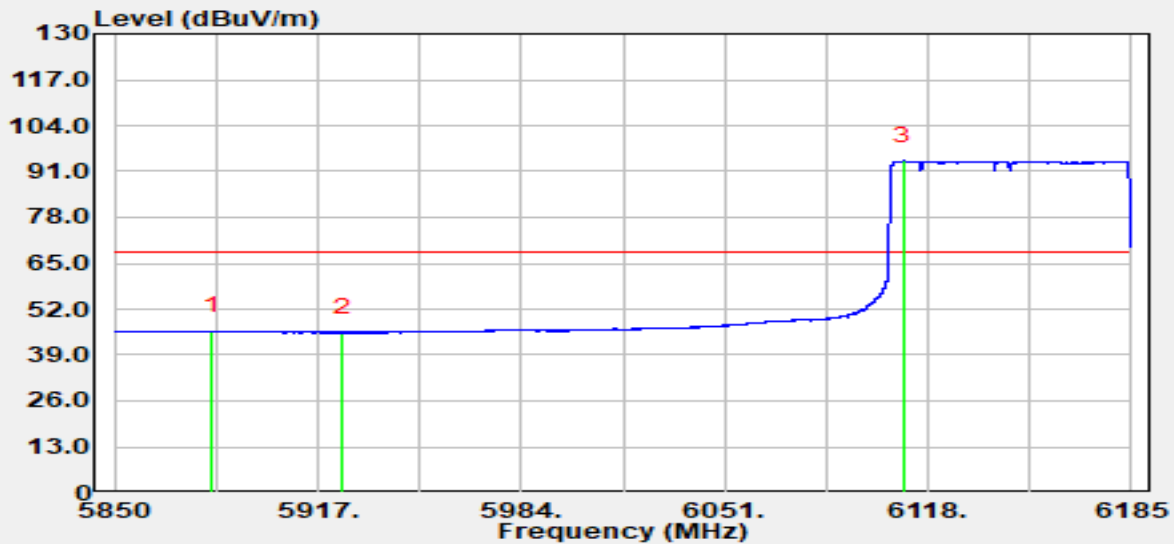


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5882.13	28.31	17.4 6	45.77	-22.43	68.20	Average
2		5925.00	27.88	17.4 0	45.28	-22.92	68.20	Average
3		6109.89	75.78	18.17	93.95	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE80 at 7025 MHz		

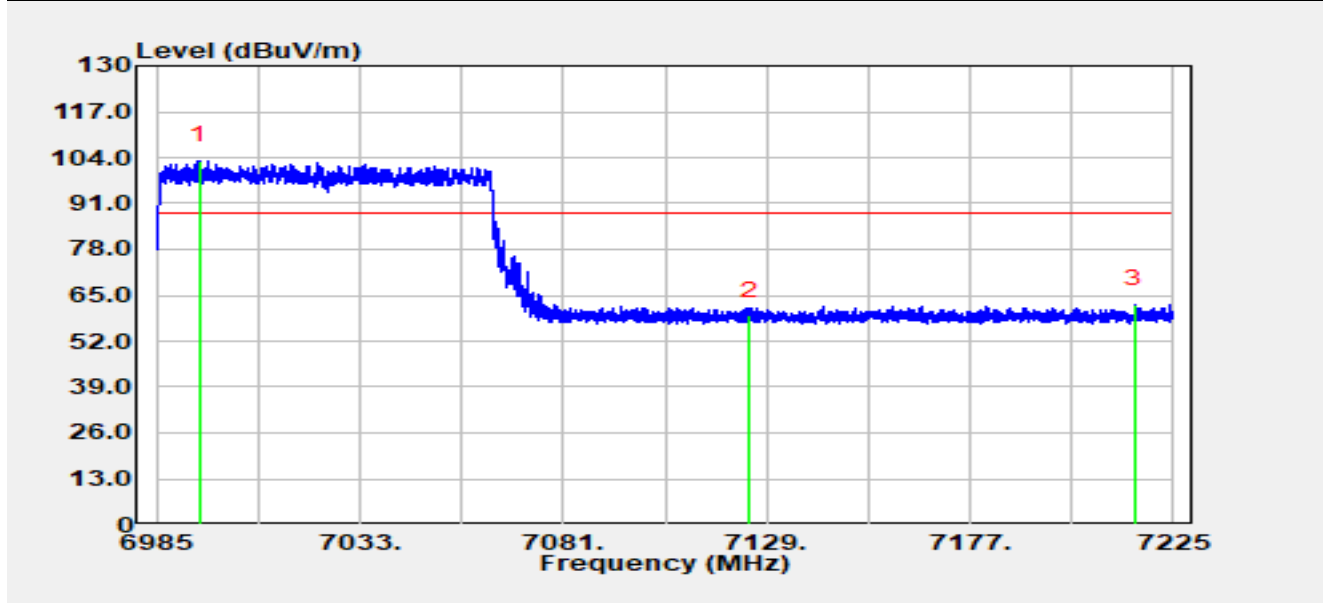


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6994.98	82.86	20.22	103.08	N/A	N/A	Peak
2		7125.00	38.65	20.50	59.15	-29.05	88.20	Peak
3	*	7215.78	41.65	20.79	62.44	-25.76	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE80 at 7025 MHz		

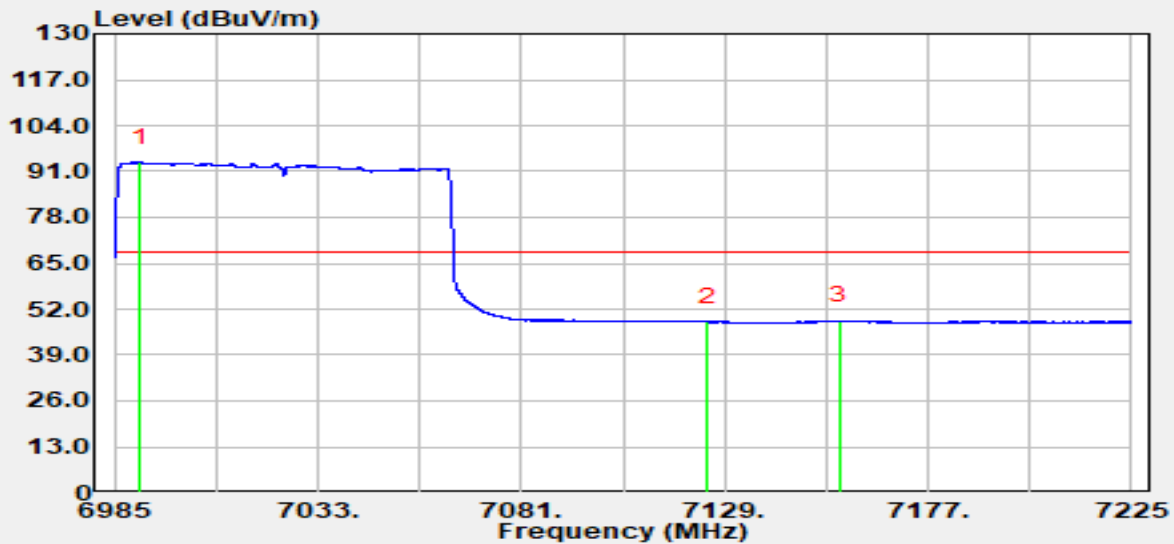


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6991.07	73.30	20.19	93.49	N/A	N/A	Average
2		7125.00	27.90	20.50	48.40	-19.80	68.20	Average
3	*	7156.22	27.75	20.91	48.65	-19.55	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE80 at 7025 MHz		

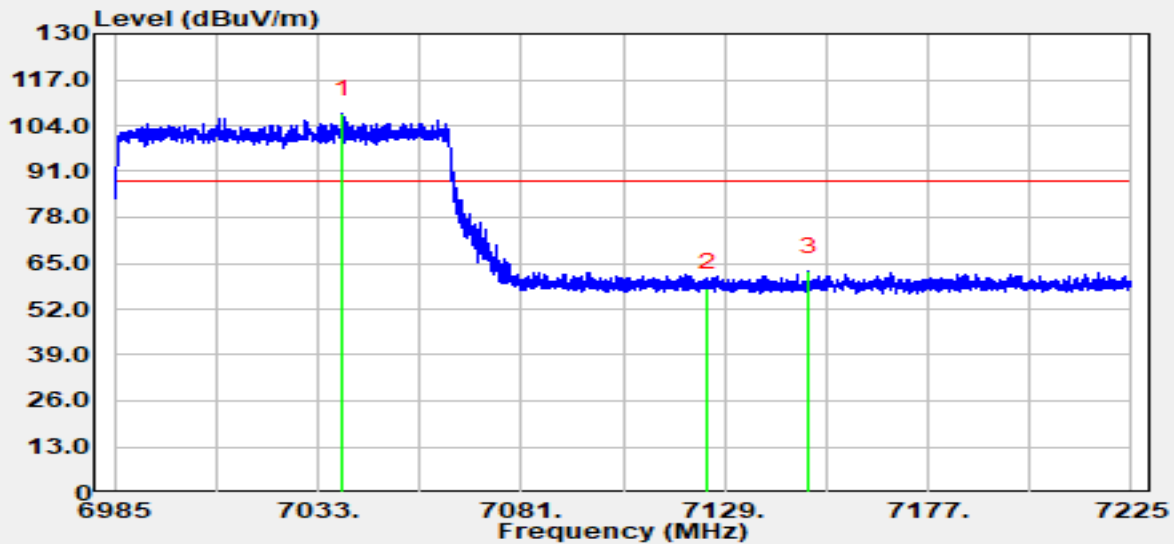


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7038.69	87.16	20.12	107.28	N/A	N/A	Peak
2		7125.00	37.53	20.50	58.03	-30.17	88.20	Peak
3	*	7148.92	41.90	20.65	62.56	-25.64	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE80 at 7025 MHz		

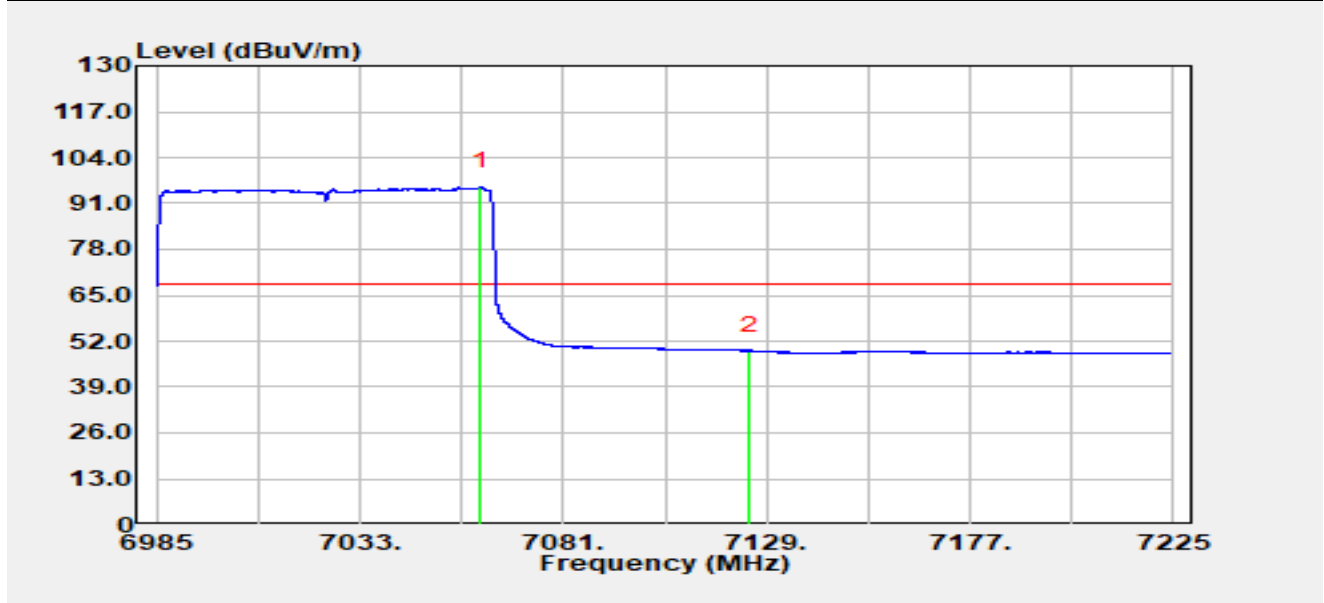


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7061.54	75.47	20.26	95.73	N/A	N/A	Average
2	*	7125.00	28.78	20.50	49.28	-18.92	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE160 at 6185 MHz		

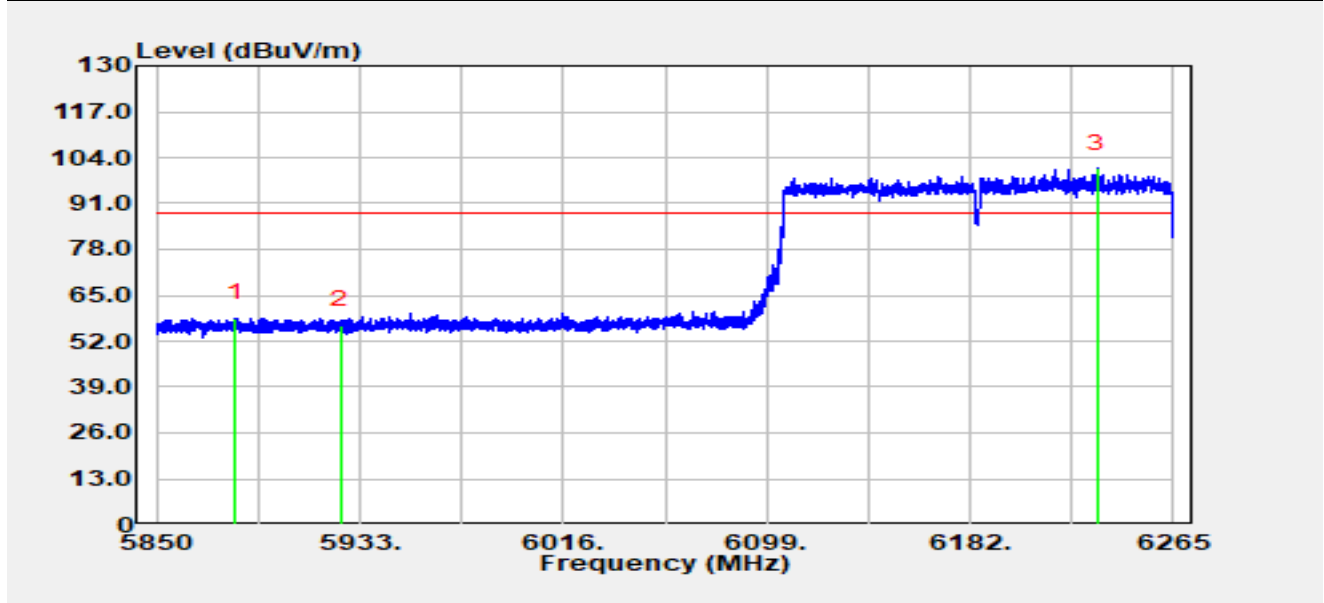


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5882.45	41.16	17.4 6	58.61	-29.59	88.20	Peak
2		5925.00	39.25	17.4 0	56.65	-31.55	88.20	Peak
3		6233.83	81.84	19.01	100.86	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE160 at 6185 MHz		

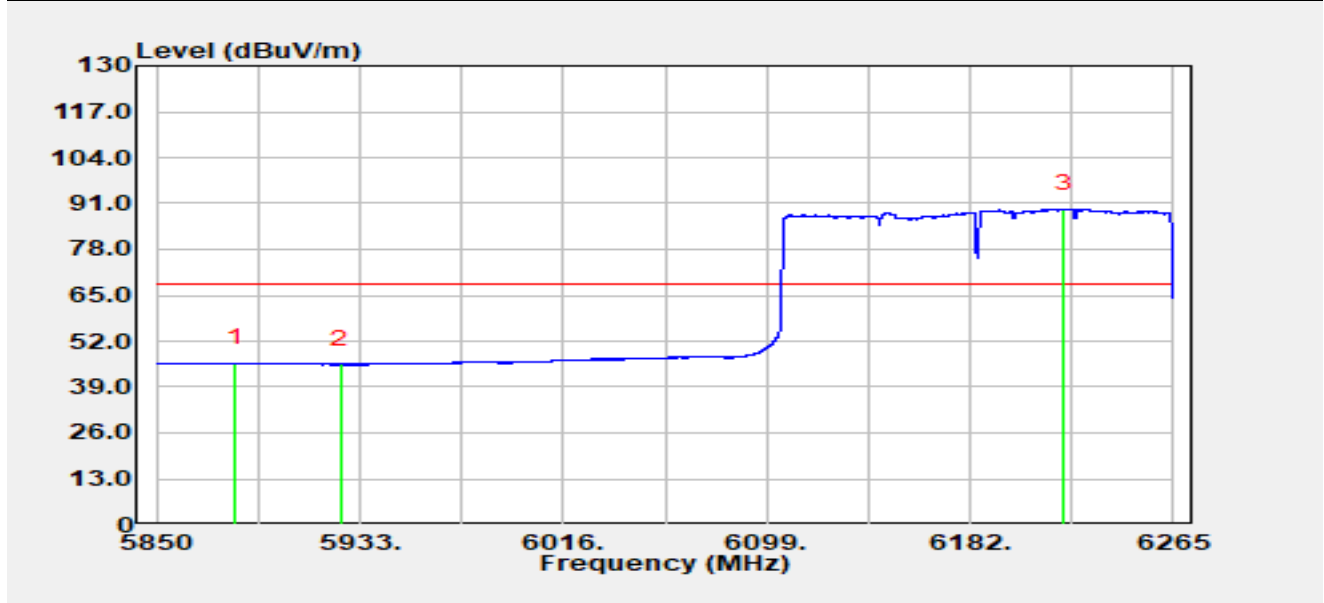


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5882.12	28.30	17.4 6	45.76	-22.44	68.20	Average
2		5925.00	28.01	17.4 0	45.41	-22.79	68.20	Average
3		6220.51	70.43	18.90	89.33	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE160 at 6185 MHz		

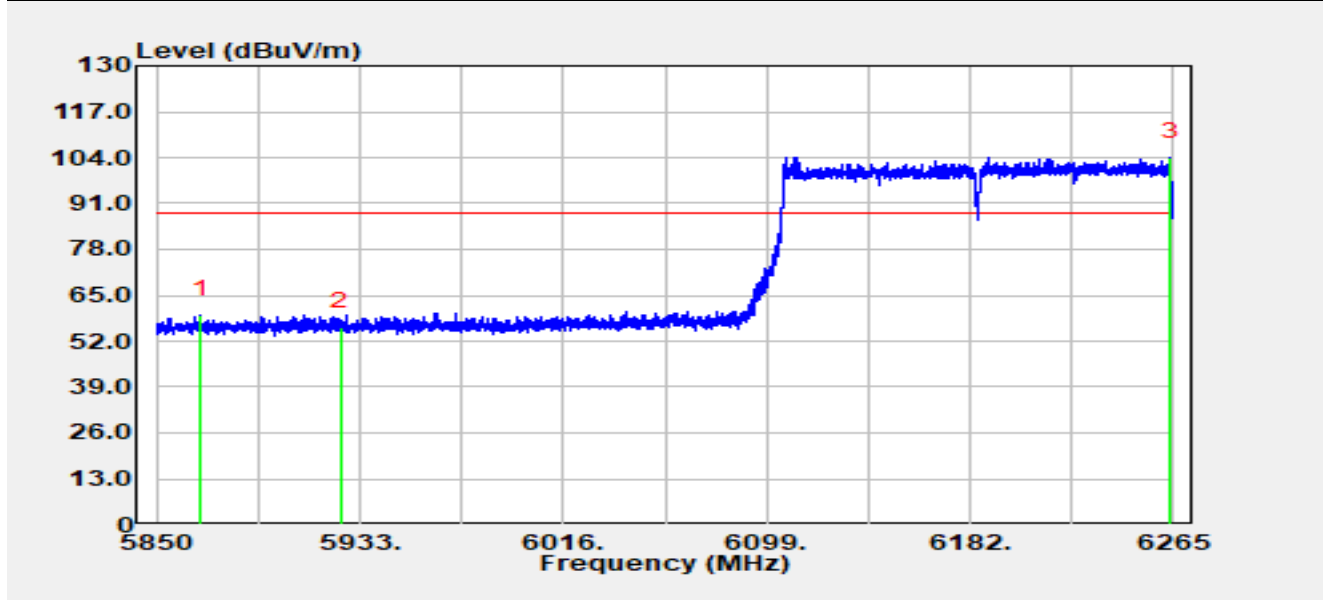


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5868.05	42.21	17.35	59.56	-28.64	88.20	Peak
2		5925.00	38.71	17.4 0	56.11	-32.09	88.20	Peak
3		6263.63	85.16	18.97	104.13	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE160 at 6185 MHz		

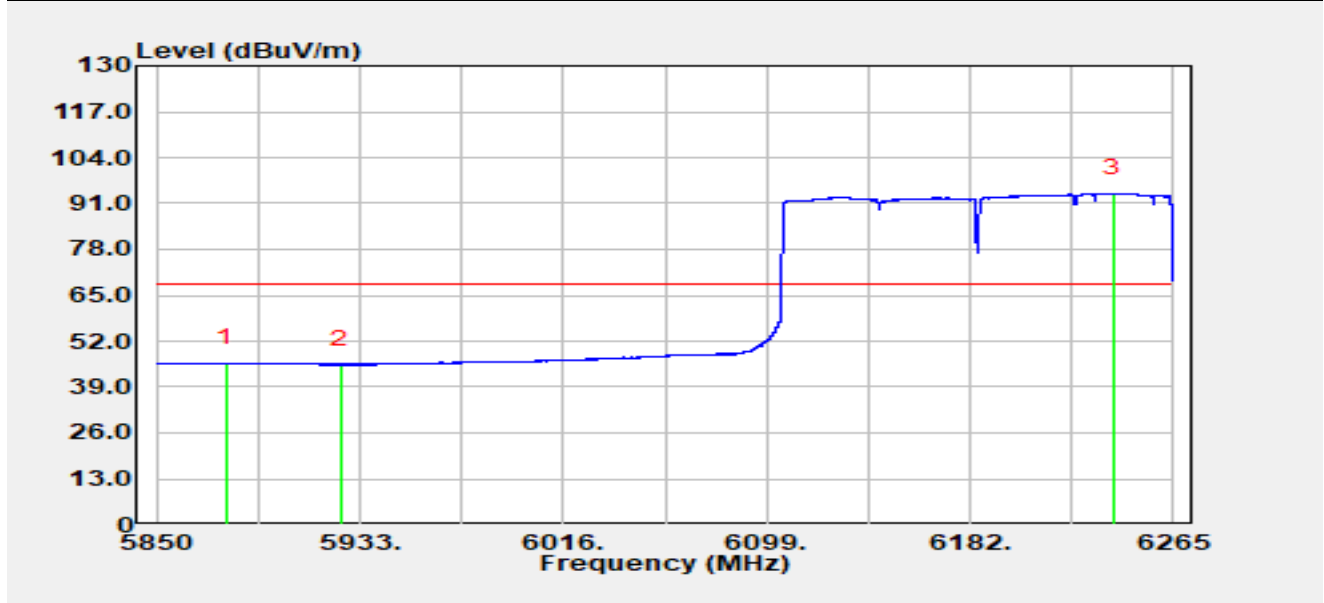


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5878.26	28.29	17.4 6	45.75	-22.45	68.20	Average
2		5925.00	27.92	17.4 0	45.32	-22.88	68.20	Average
3		6240.52	74.92	19.00	93.91	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE160 at 6985 MHz		

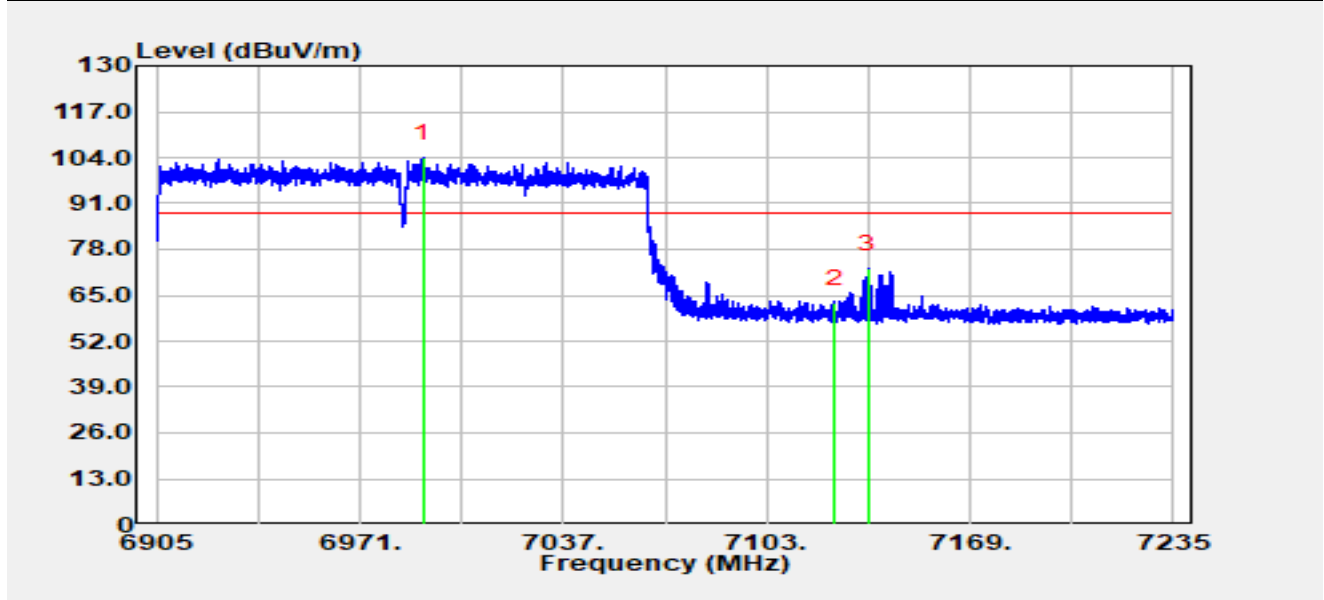


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6991.69	83.67	20.19	103.86	N/A	N/A	Peak
2		7125.00	42.19	20.50	62.69	-25.51	88.20	Peak
3	*	7135.84	52.07	20.41	72.48	-15.72	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE160 at 6985 MHz		

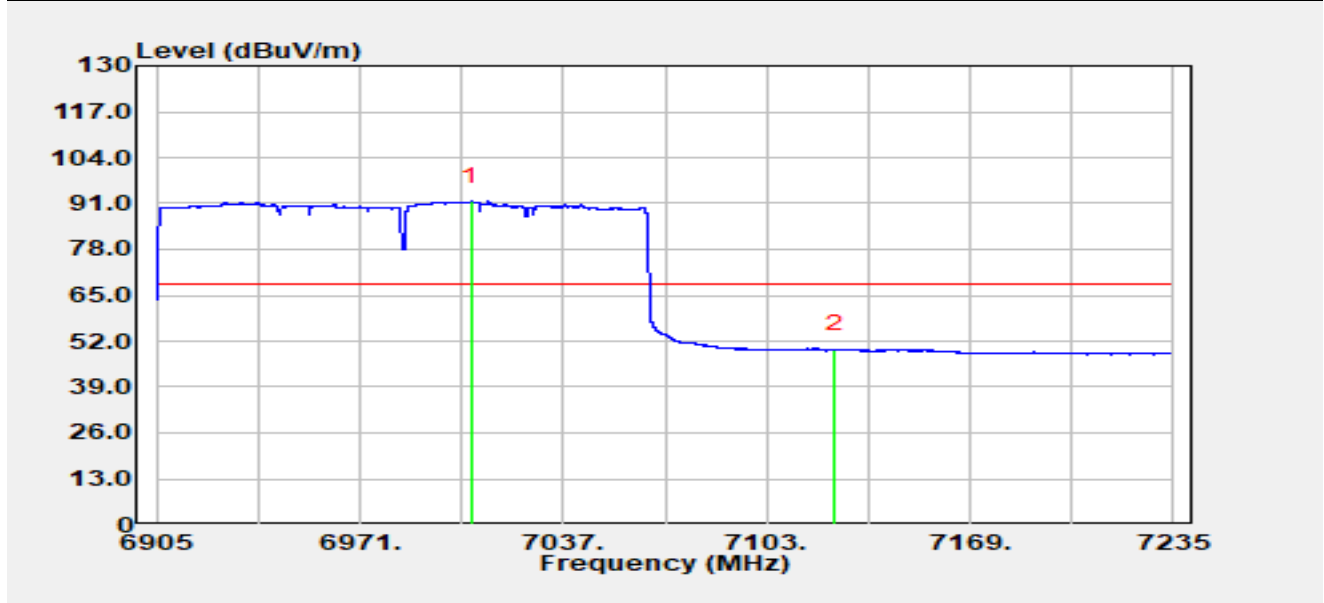


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7007.30	71.41	20.21	91.62	N/A	N/A	Average
2	*	7125.00	29.16	20.50	49.66	-18.54	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE160 at 6985 MHz		

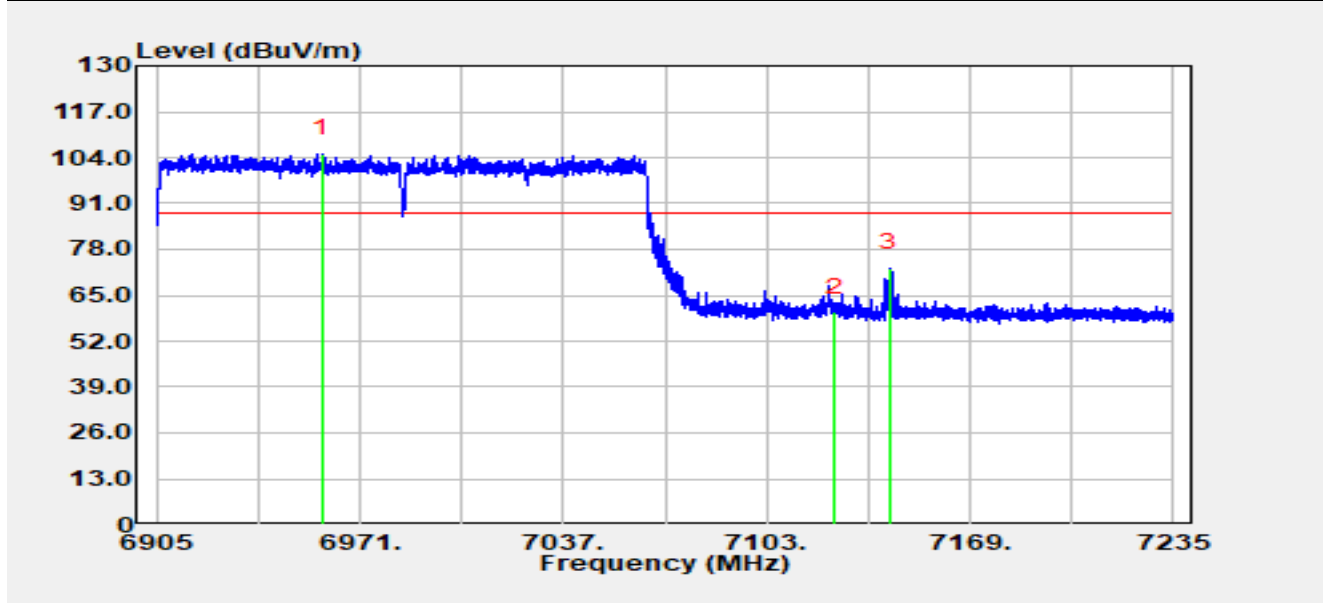


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6958.86	84.70	20.29	104.99	N/A	N/A	Peak
2		7125.00	39.68	20.50	60.18	-28.02	88.20	Peak
3	*	7142.80	52.36	20.47	72.83	-15.37	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11ax-HE160 at 6985 MHz		

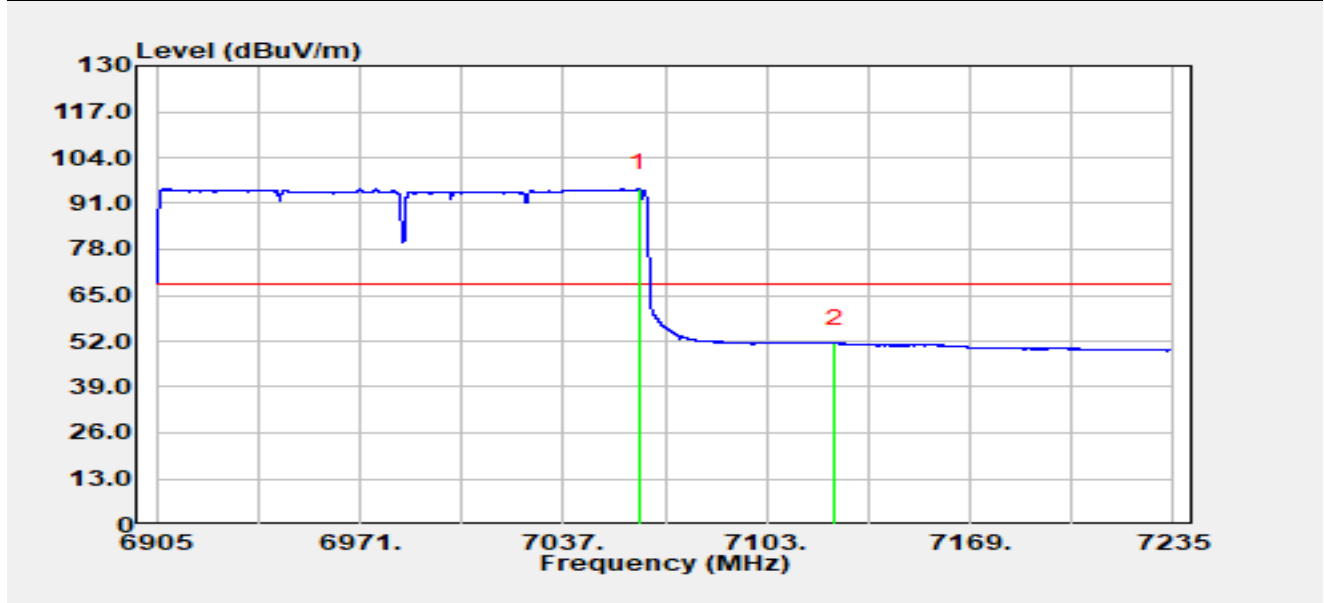


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7061.62	75.04	20.26	95.30	27.10	68.20	Average
2	*	7125.00	30.90	20.50	51.40	-16.80	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT20 at 6115 MHz		

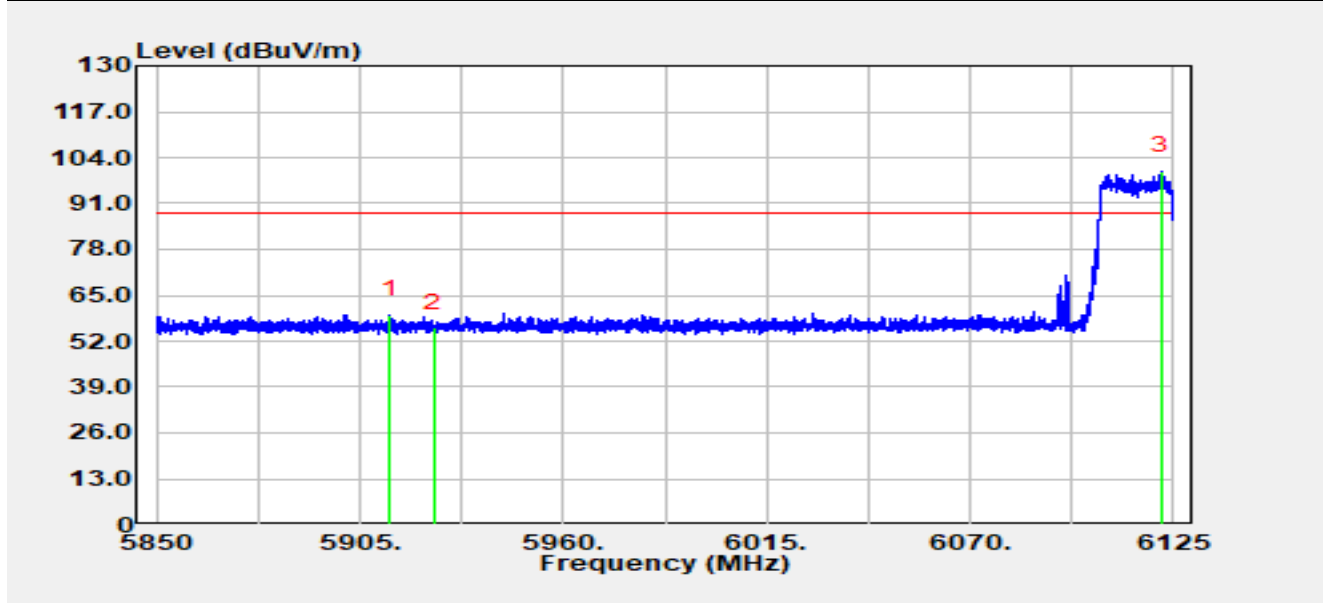


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5913.25	42.05	17.4 3	59.47	-28.73	88.20	Peak
2		5925.00	38.41	17.4 0	55.81	-32.39	88.20	Peak
3		6121.62	82.06	18.25	100.31	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT20 at 6115 MHz		

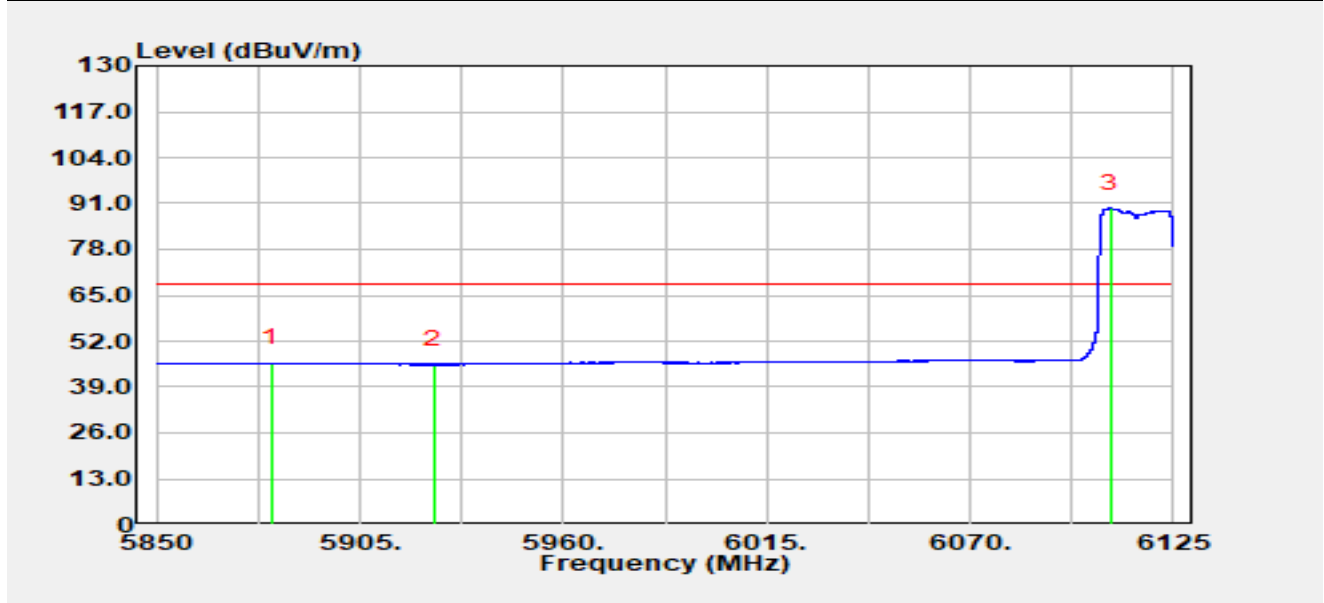


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5881.10	28.33	17.4 6	45.78	-22.42	68.20	Average
2		5925.00	27.96	17.4 0	45.36	-22.84	68.20	Average
3		6108.01	71.46	18.18	89.64	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT20 at 6115 MHz		

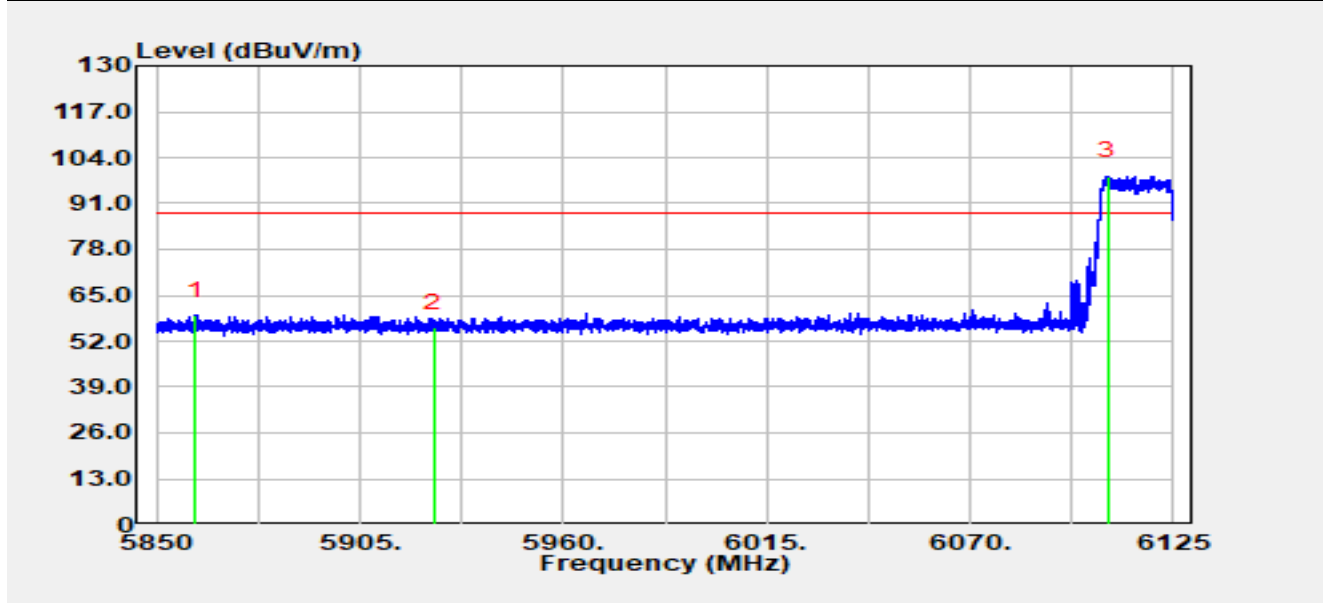


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5860.70	42.07	17.28	59.35	-28.85	88.20	Peak
2		5925.00	38.31	17.4 0	55.71	-32.49	88.20	Peak
3		6107.18	80.48	18.18	98.66	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT20 at 6115 MHz		

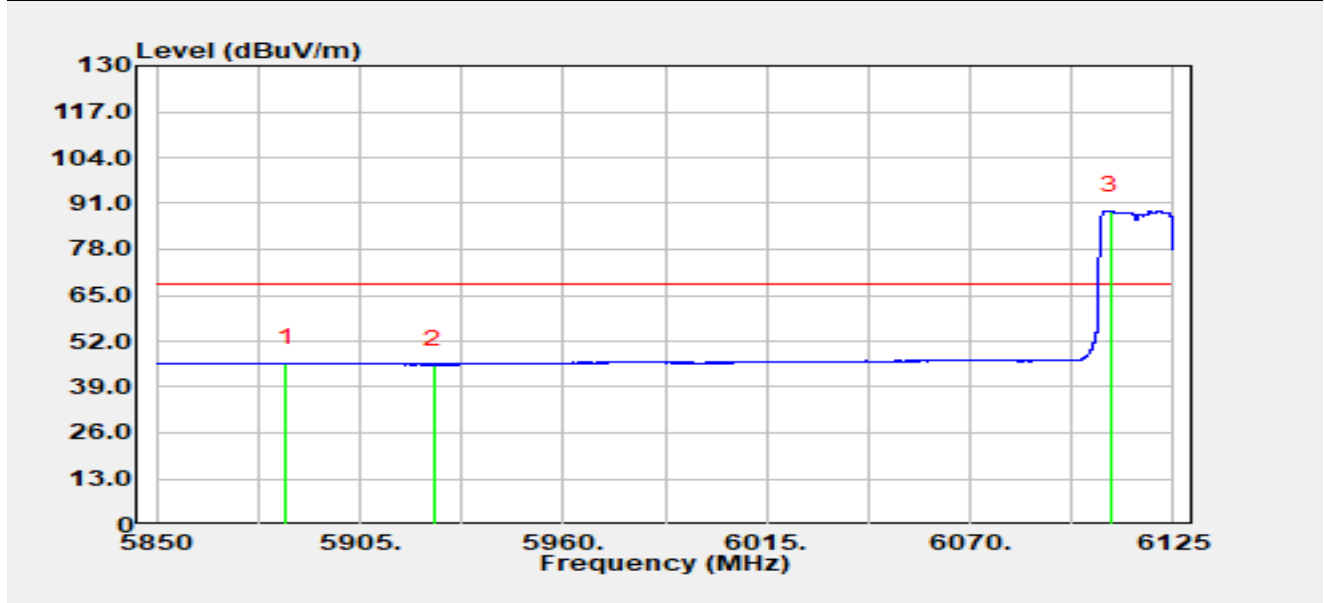


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5884.93	28.34	17.4 6	45.80	-22.40	68.20	Average
2		5925.00	27.94	17.4 0	45.34	-22.86	68.20	Average
3		6107.98	70.84	18.18	89.02	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT20 at 7095 MHz		

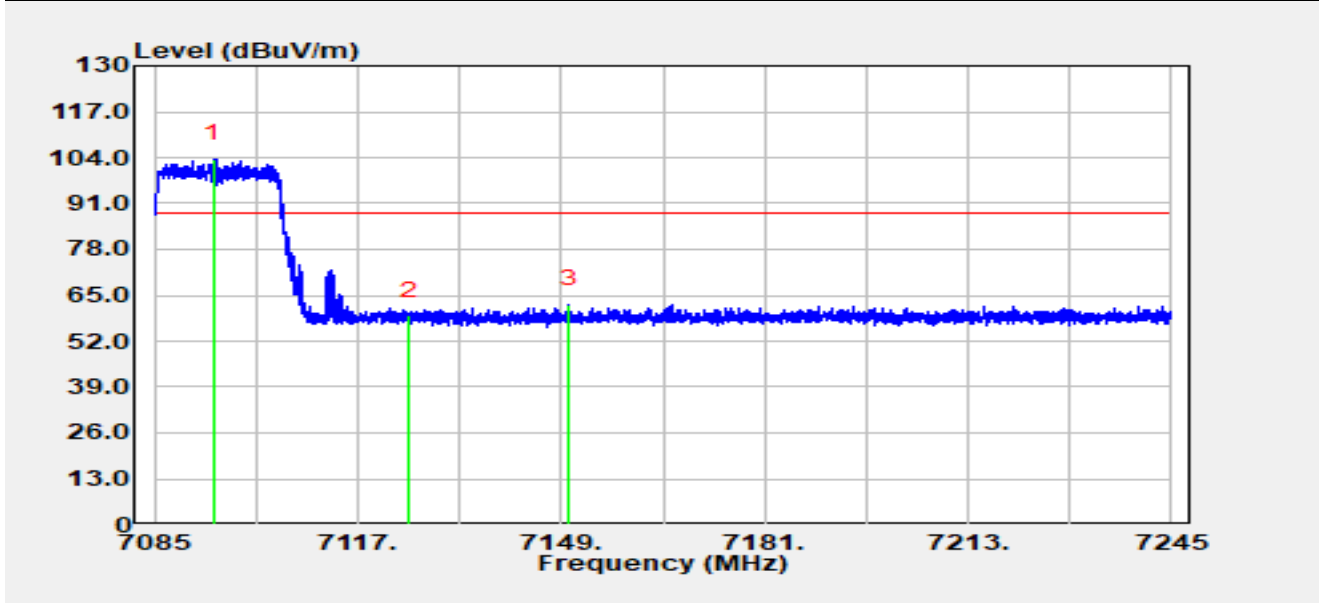


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7094.28	83.08	20.50	103.58	N/A	N/A	Peak
2		7125.00	38.69	20.50	59.19	-29.01	88.20	Peak
3	*	7150.26	41.67	20.70	62.37	-25.83	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT20 at 7095 MHz		

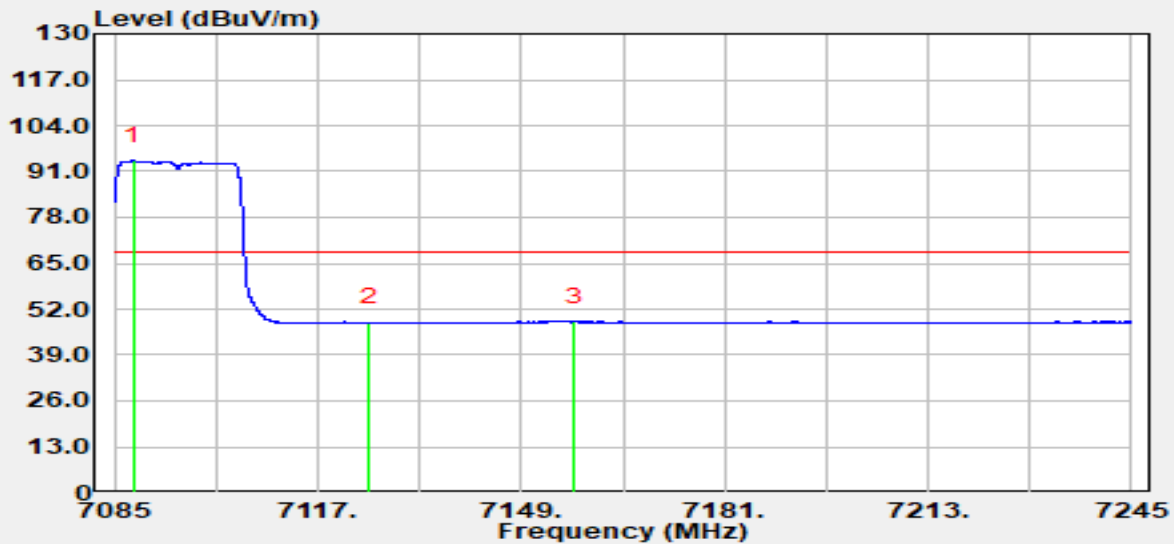


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7087.93	73.37	20.60	93.96	N/A	N/A	Average
2		7125.00	27.69	20.50	48.19	-20.01	68.20	Average
3	*	7157.37	27.63	20.88	48.51	-19.69	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT20 at 7095 MHz		

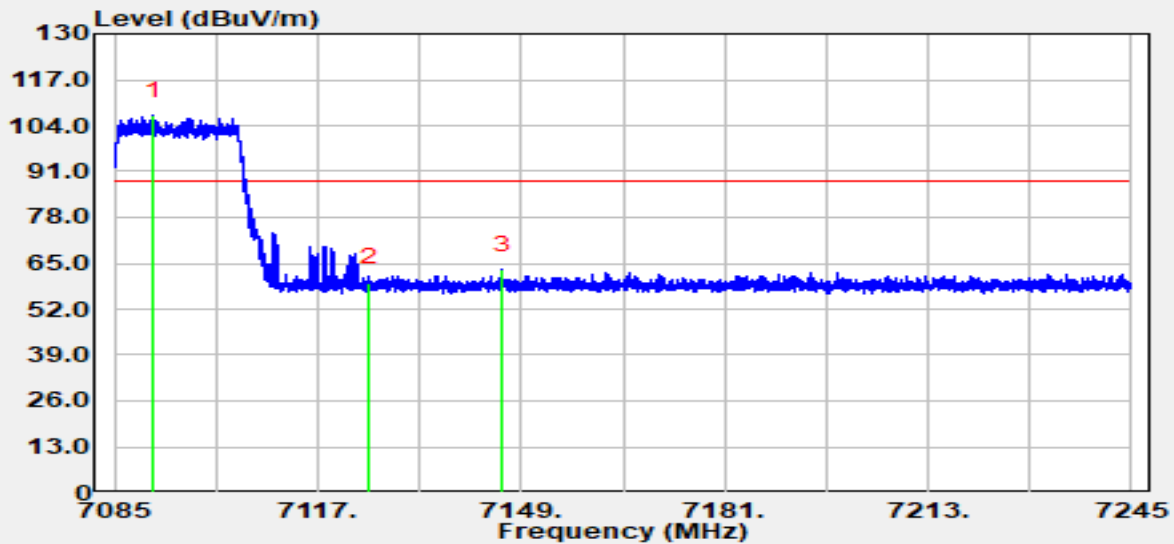


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7091.16	86.36	20.55	106.91	N/A	N/A	Peak
2		7125.00	38.89	20.50	59.39	-28.81	88.20	Peak
3	*	7146.07	42.53	20.56	63.09	-25.11	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT20 at 7095 MHz		

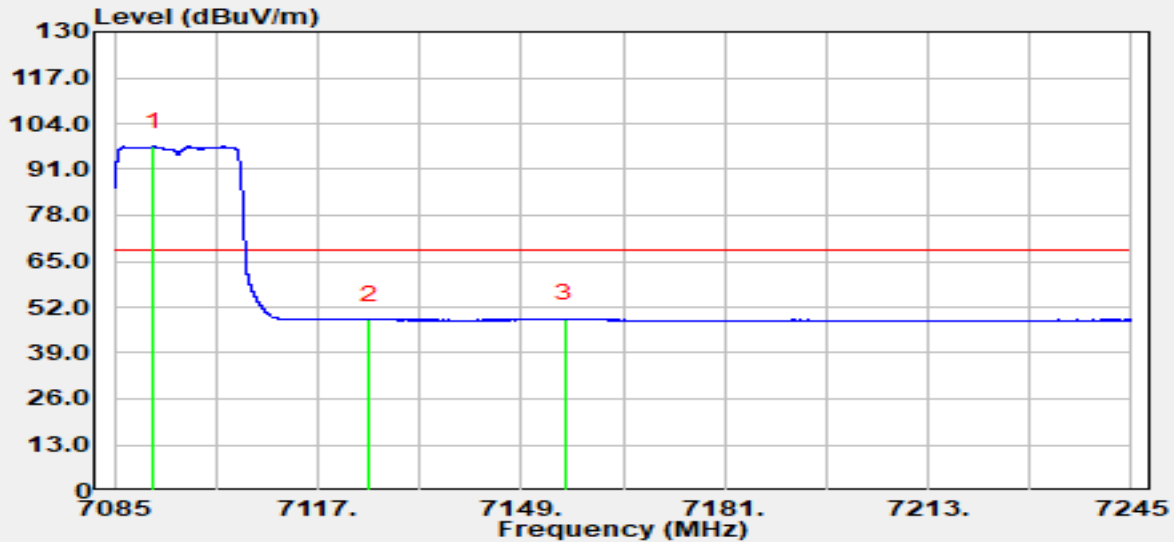


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7091.22	76.99	20.55	97.54	N/A	N/A	Average
2		7125.00	27.97	20.50	48.47	-19.73	68.20	Average
3	*	7155.78	27.74	20.89	48.63	-19.57	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT40 at 6125 MHz		

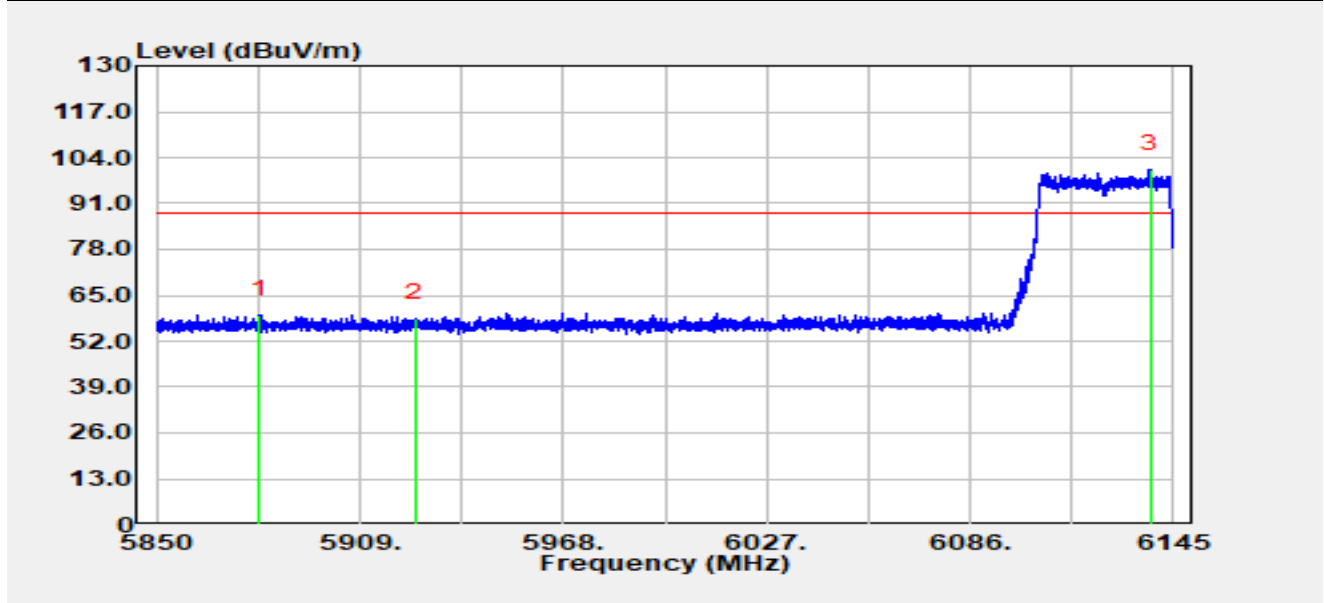


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5880.00	42.09	17.4 6	59.55	-28.65	88.20	Peak
2		5925.00	41.11	17.4 0	58.51	-29.69	88.20	Peak
3		6138.16	82.28	18.45	100.73	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT40 at 6125 MHz		

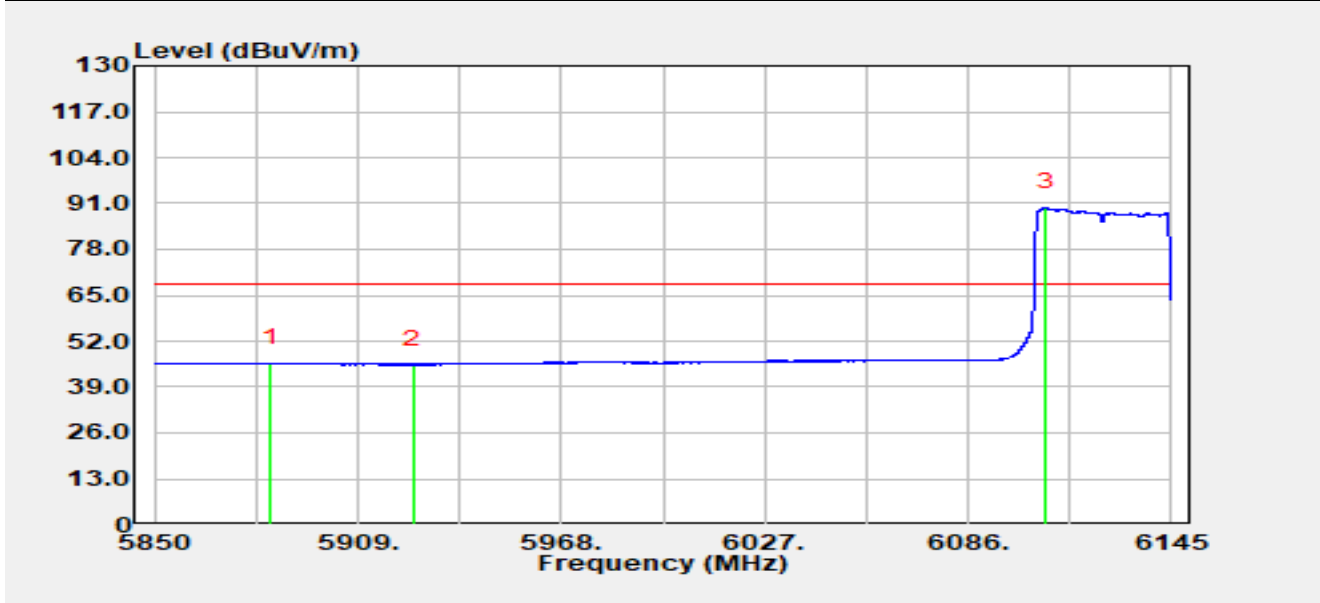


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5883.57	28.33	17.4 6	45.78	-22.42	68.20	Average
2		5925.00	27.96	17.4 0	45.36	-22.84	68.20	Average
3		6108.45	71.70	18.18	89.88	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT40 at 6125 MHz		

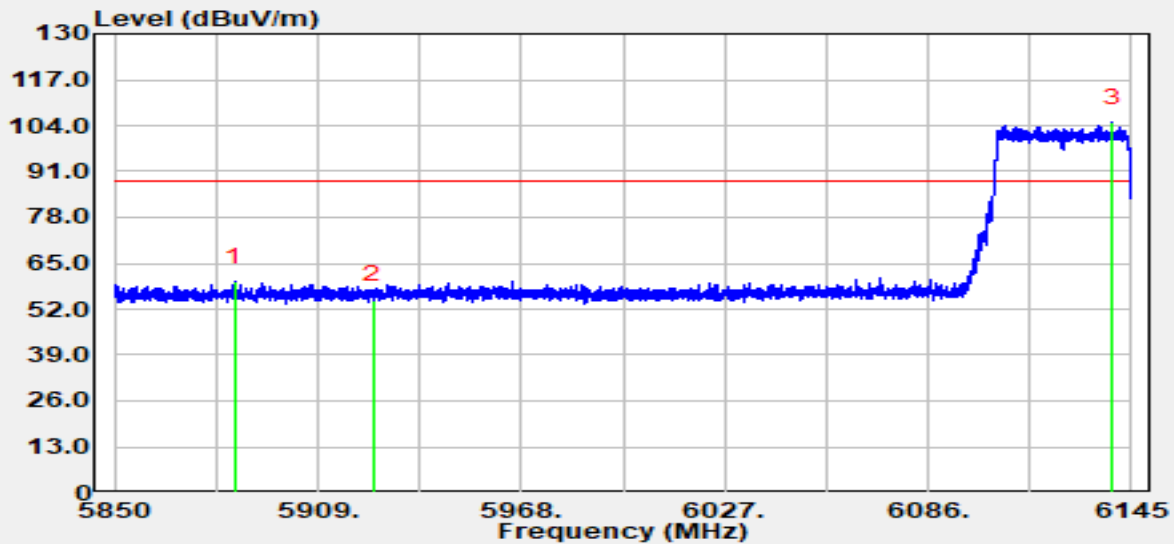


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5884.99	42.27	17.4 6	59.73	-28.47	88.20	Peak
2		5925.00	37.05	17.4 0	54.45	-33.75	88.20	Peak
3		6139.60	86.41	18.45	104.86	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT40 at 6125 MHz		

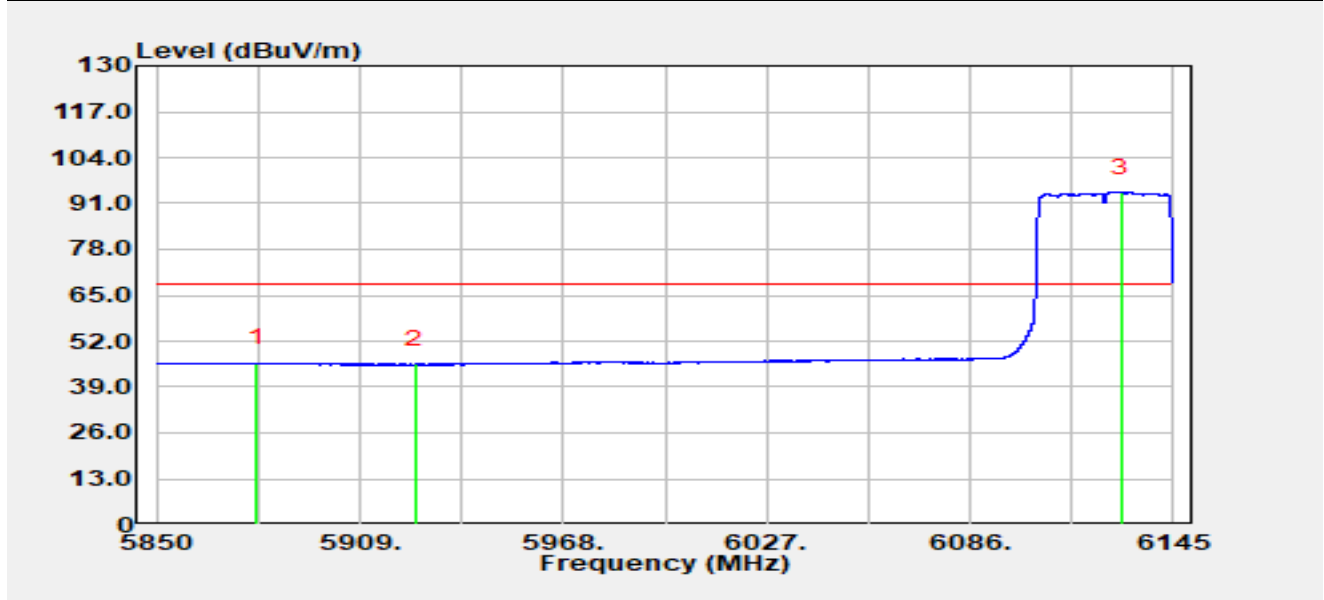


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5879.03	28.25	17.4 6	45.71	-22.49	68.20	Average
2		5925.00	27.99	17.4 0	45.38	-22.82	68.20	Average
3		6129.96	75.73	18.39	94.12	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT40 at 7085 MHz		

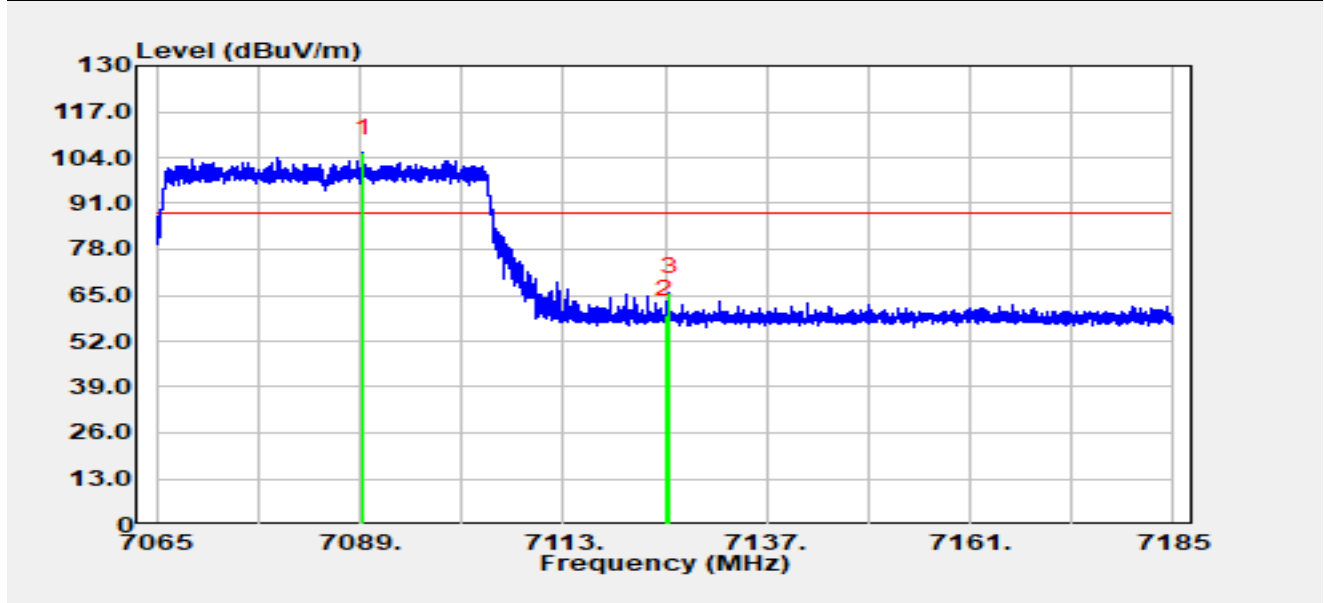


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7089.38	84.87	20.58	105.45	N/A	N/A	Peak
2		7125.00	38.96	20.50	59.46	-28.74	88.20	Peak
3	*	7125.53	45.39	20.50	65.89	-22.31	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT40 at 7085 MHz		

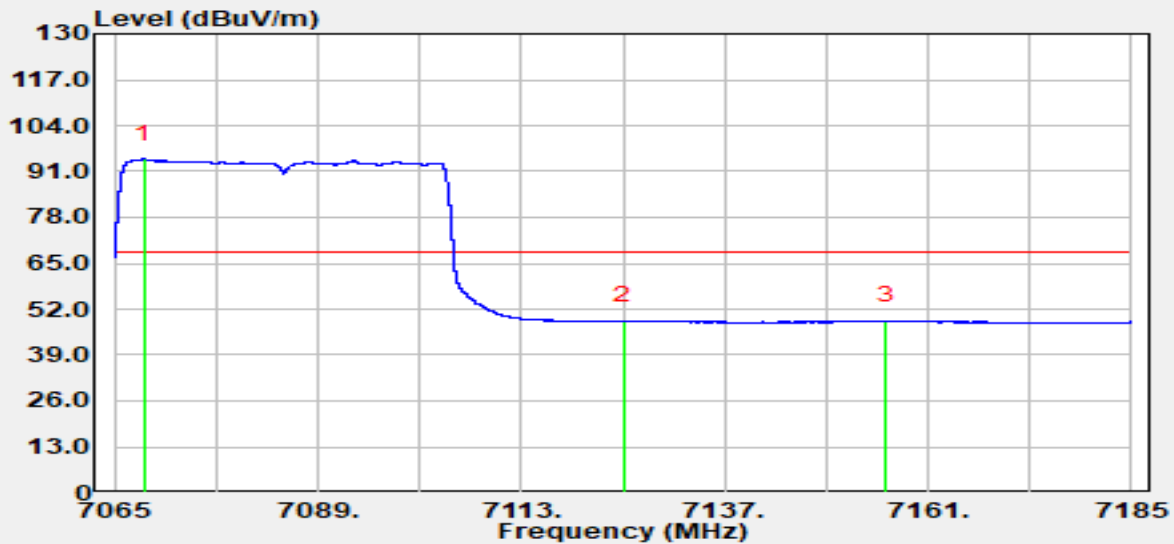


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7068.44	74.12	20.32	94.44	N/A	N/A	Average
2		7125.00	28.10	20.50	48.59	-19.61	68.20	Average
3	*	7156.12	27.75	20.90	48.65	-19.55	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT40 at 7085 MHz		

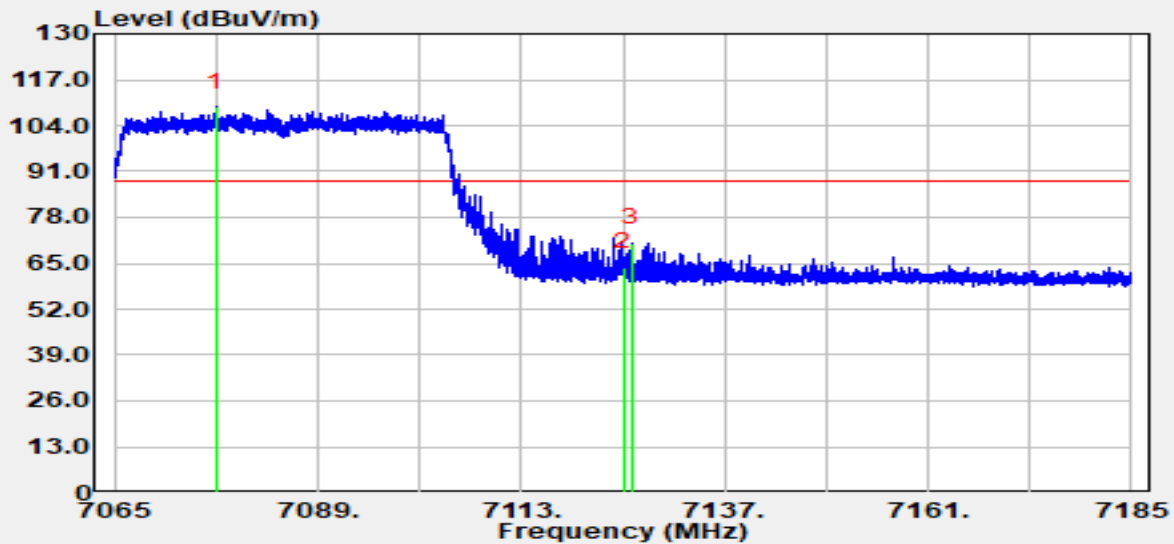


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7076.94	88.94	20.43	109.37	N/A	N/A	Peak
2		7125.00	43.33	20.50	63.83	-24.37	88.20	Peak
3	*	7126.09	50.31	20.50	70.81	-17.39	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT40 at 7085 MHz		

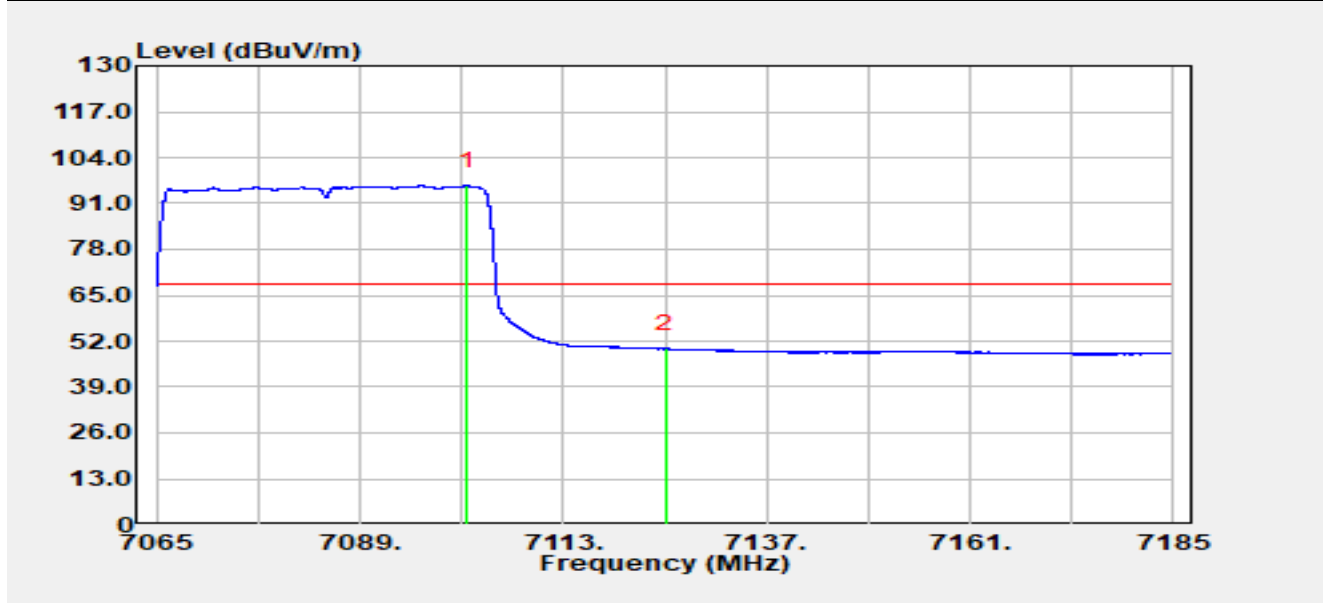


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7101.60	75.70	20.37	96.07	N/A	N/A	Average
2	*	7125.00	29.30	20.50	49.80	-18.40	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT80 at 6145 MHz		

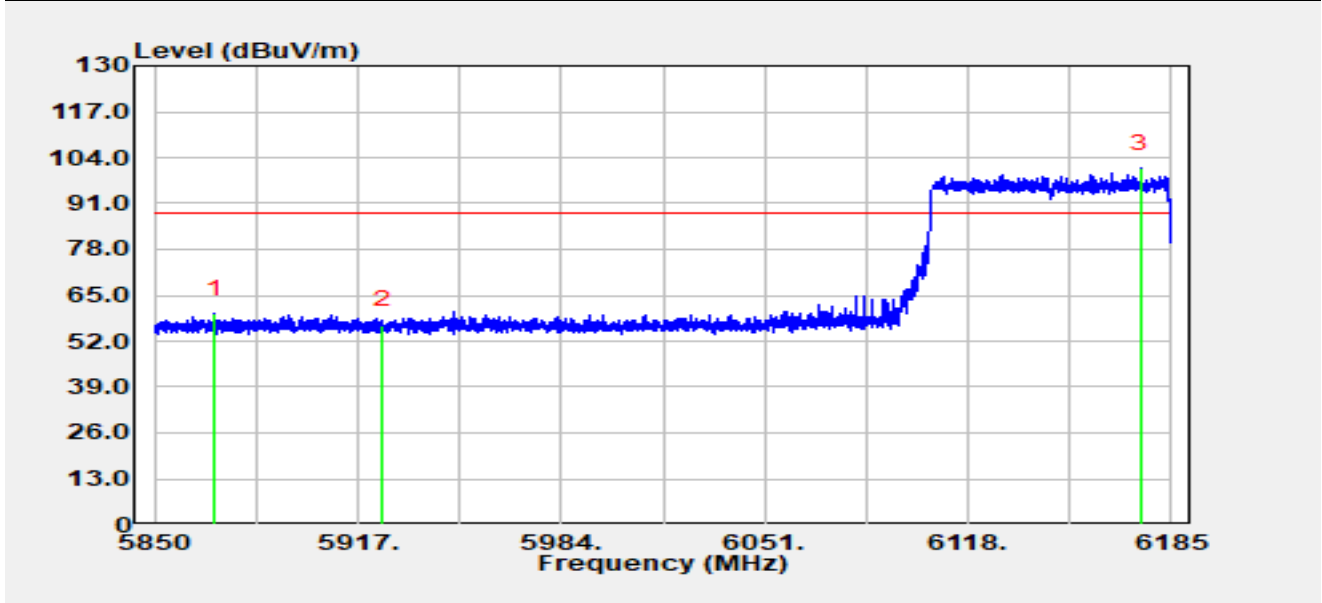


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5869.80	42.29	17.36	59.65	-28.55	88.20	Peak
2		5925.00	39.11	17.4 0	56.50	-31.70	88.20	Peak
3		6174.75	82.33	18.54	100.86	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT80 at 6145 MHz		

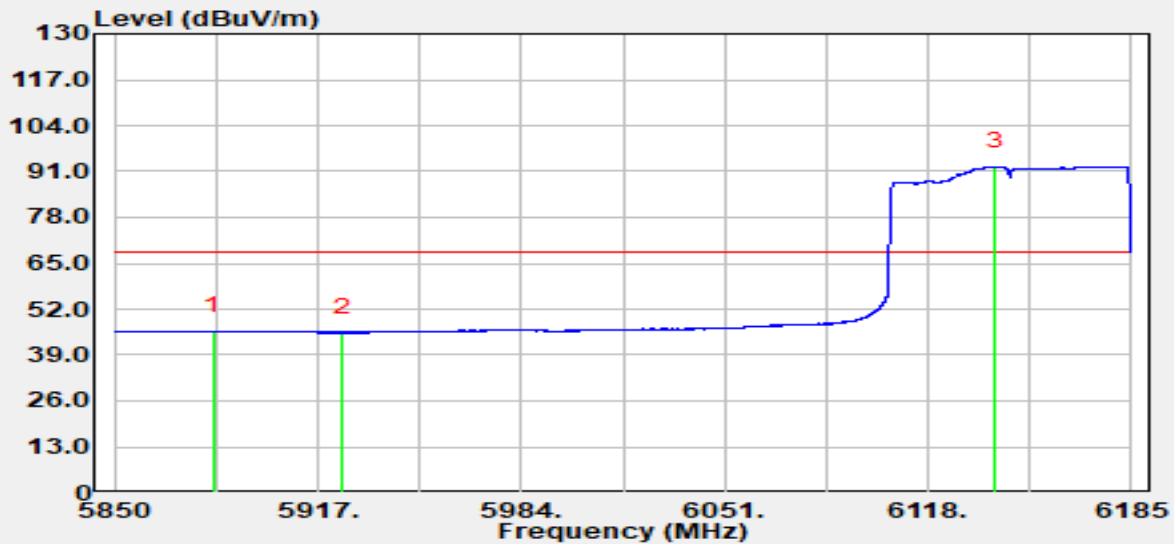


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5882.63	28.30	17.4 6	45.76	-22.44	68.20	Average
2		5925.00	27.93	17.4 0	45.33	-22.87	68.20	Average
3		6140.21	73.84	18.45	92.30	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT80 at 6145 MHz		

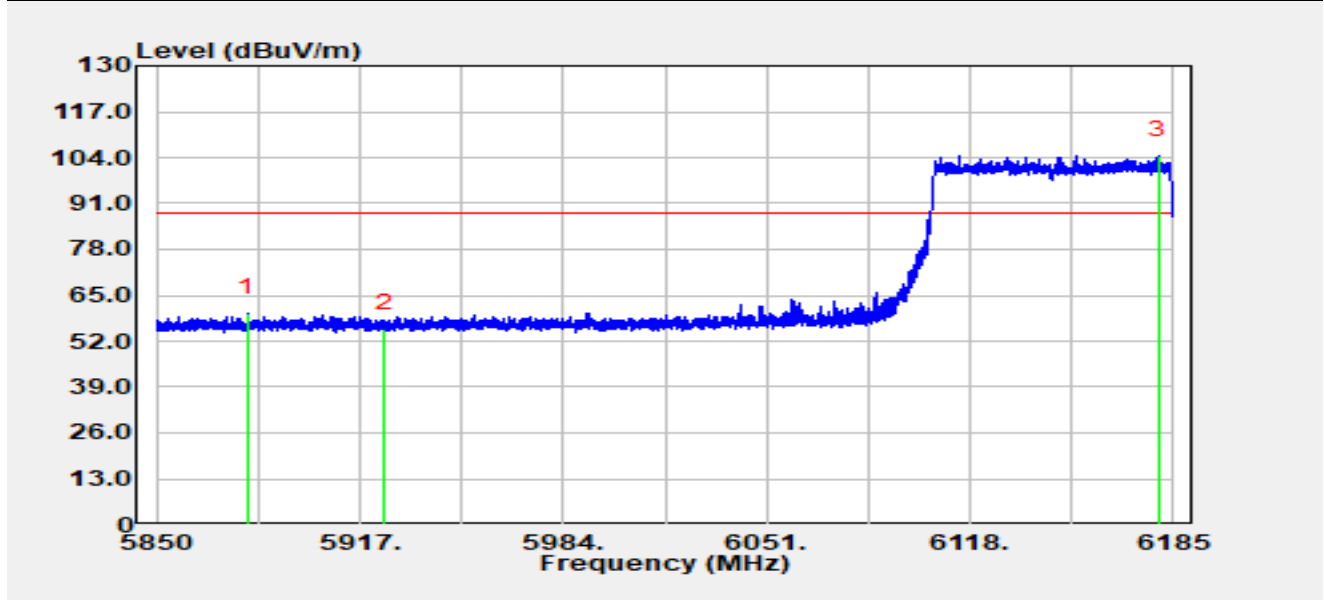


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5880.05	42.47	17.4 6	59.93	-28.27	88.20	Peak
2		5925.00	38.10	17.4 0	55.50	-32.70	88.20	Peak
3		6179.91	85.95	18.58	104.53	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT80 at 6145 MHz		

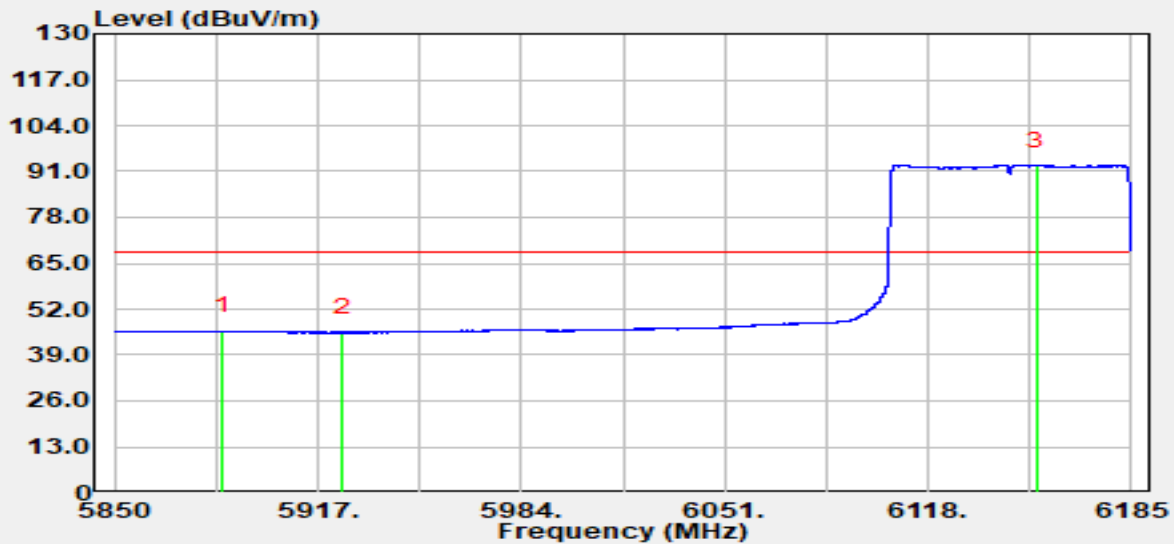


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5885.78	28.33	17.4 5	45.79	-22.41	68.20	Average
2		5925.00	27.88	17.4 0	45.28	-22.92	68.20	Average
3		6153.88	74.16	18.48	92.65	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT80 at 7025 MHz		

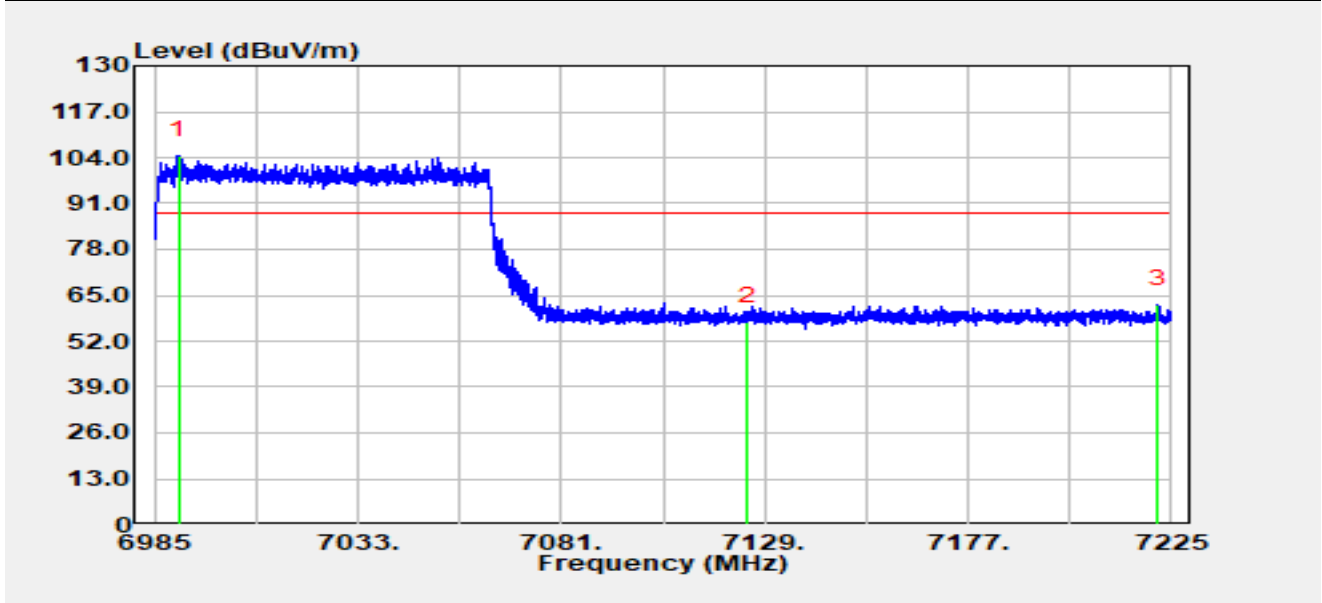


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6990.78	84.33	20.18	104.51	N/A	N/A	Peak
2		7125.00	37.06	20.50	57.55	-30.65	88.20	Peak
3	*	7221.90	41.52	20.81	62.33	-25.87	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT80 at 7025 MHz		

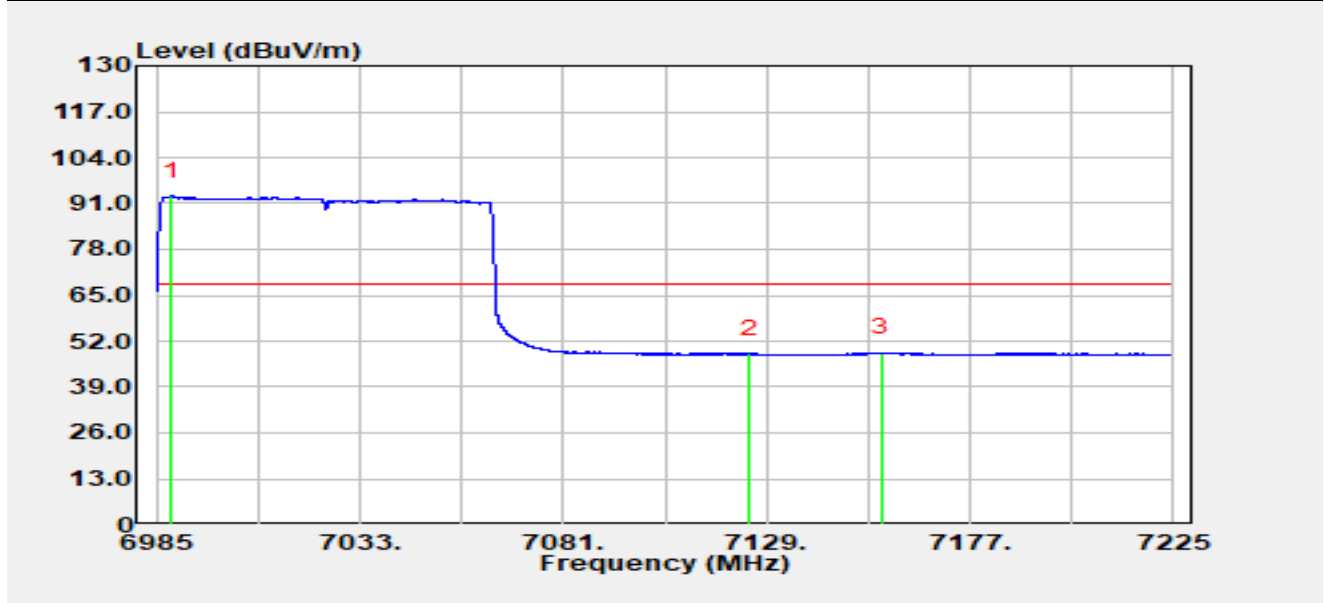


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6988.43	72.94	20.16	93.11	N/A	N/A	Average
2		7125.00	27.83	20.50	48.32	-19.88	68.20	Average
3	*	7156.00	27.72	20.90	48.62	-19.58	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT80 at 7025 MHz		

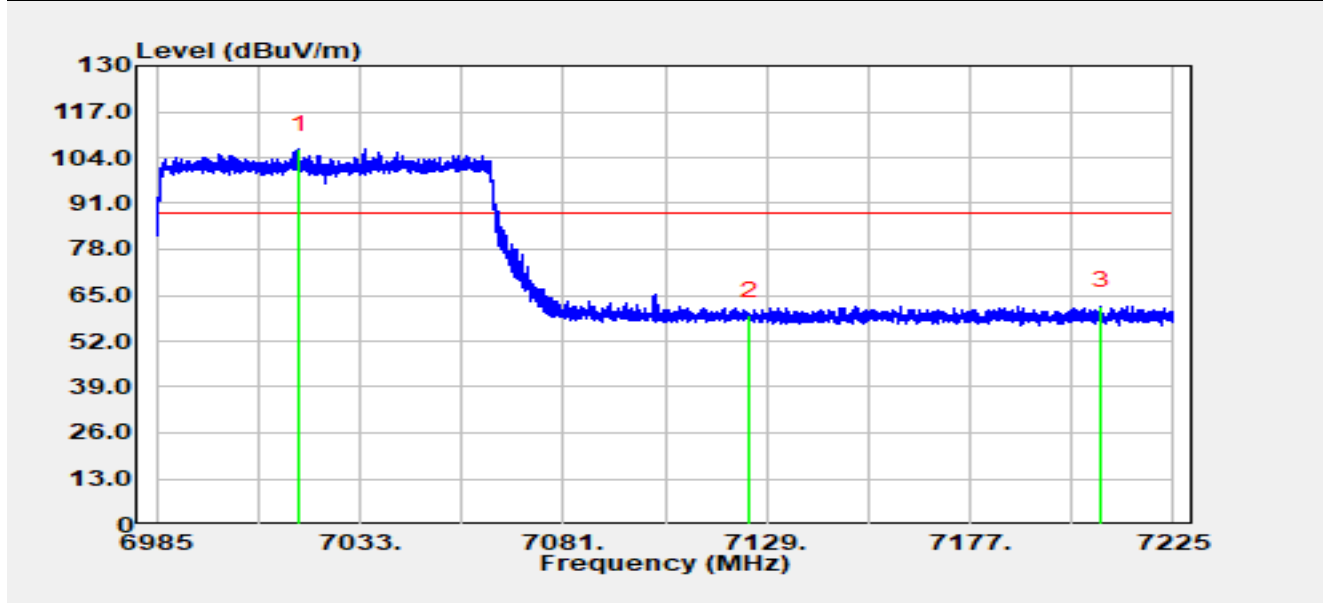


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7018.65	86.43	20.01	106.44	N/A	N/A	Peak
2		7125.00	38.85	20.50	59.35	-28.85	88.20	Peak
3	*	7207.84	41.31	20.74	62.04	-26.16	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT80 at 7025 MHz		

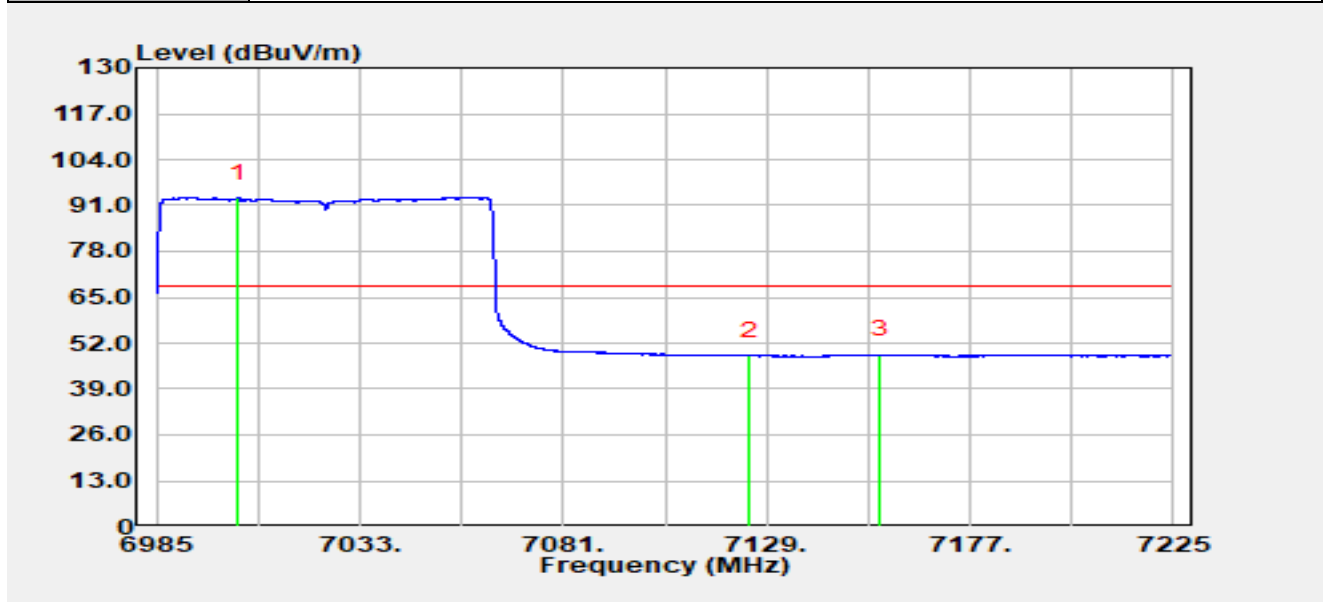


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7004.25	72.94	20.27	93.20	N/A	N/A	Average
2		7125.00	28.04	20.50	48.54	-19.66	68.20	Average
3	*	7155.76	27.91	20.89	48.80	-19.40	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT160 at 6185 MHz		

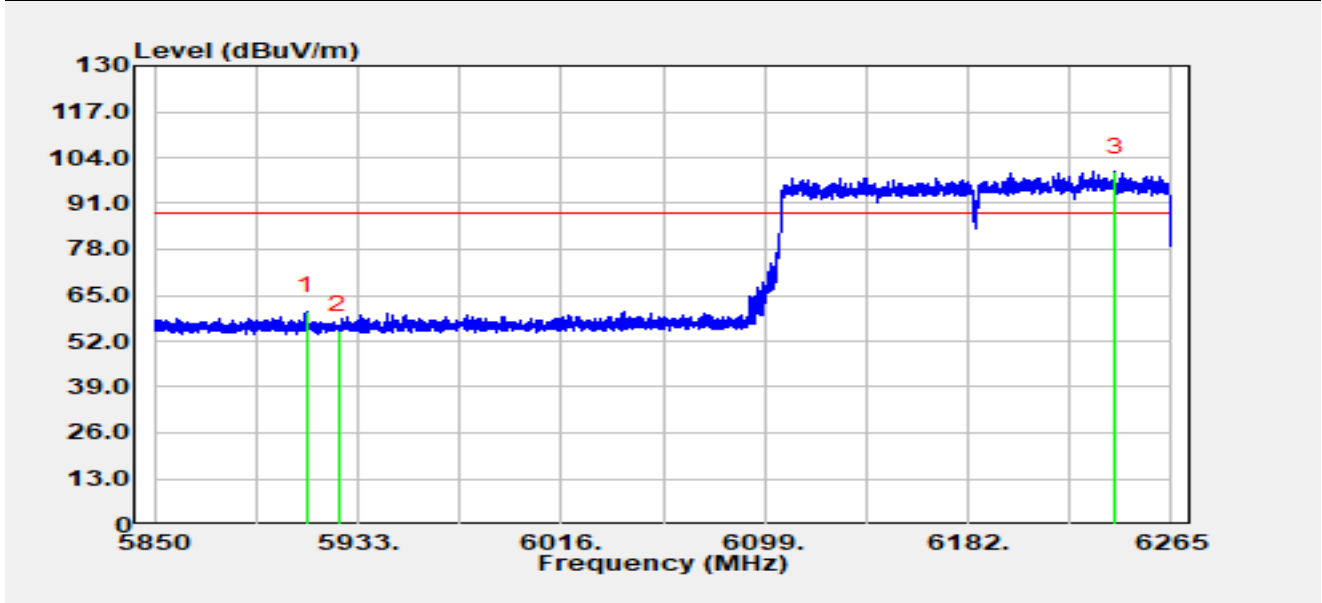


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5911.88	42.99	17.4 3	60.42	-27.78	88.20	Peak
2		5925.00	37.69	17.4 0	55.09	-33.11	88.20	Peak
3		6241.93	80.89	18.98	99.87	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT160 at 6185 MHz		

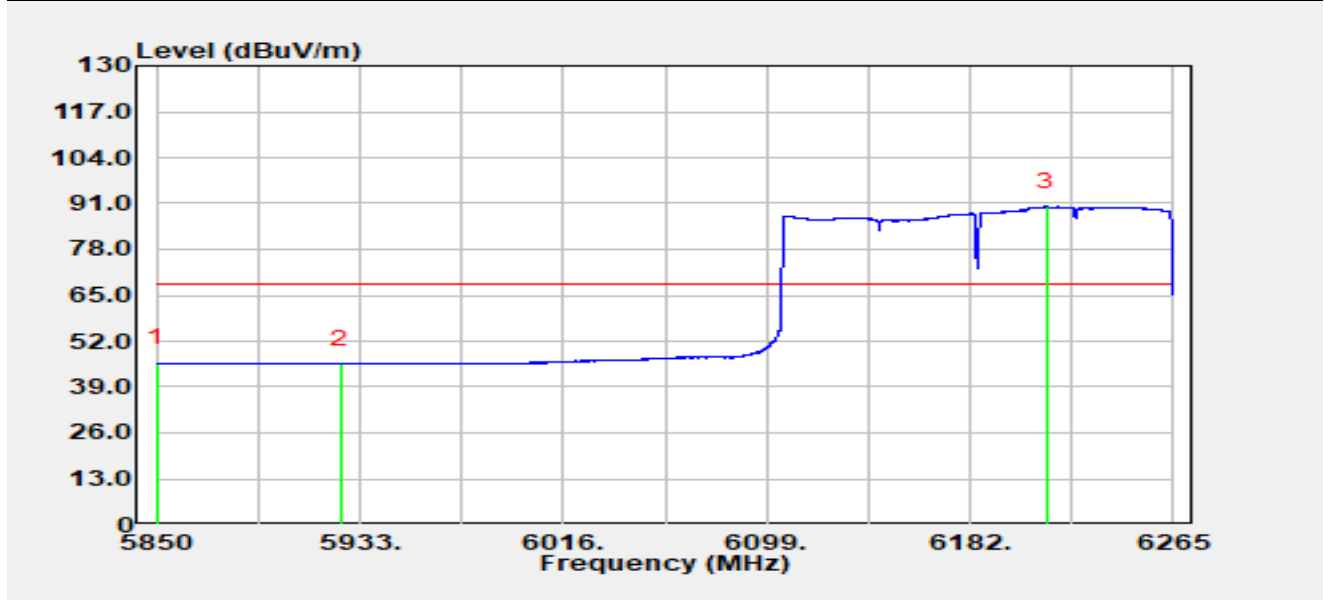


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5850.33	28.45	17.36	45.81	-22.39	68.20	Average
2		5925.00	28.09	17.40	45.49	-22.71	68.20	Average
3		6213.08	71.31	18.83	90.14	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT160 at 6185 MHz		

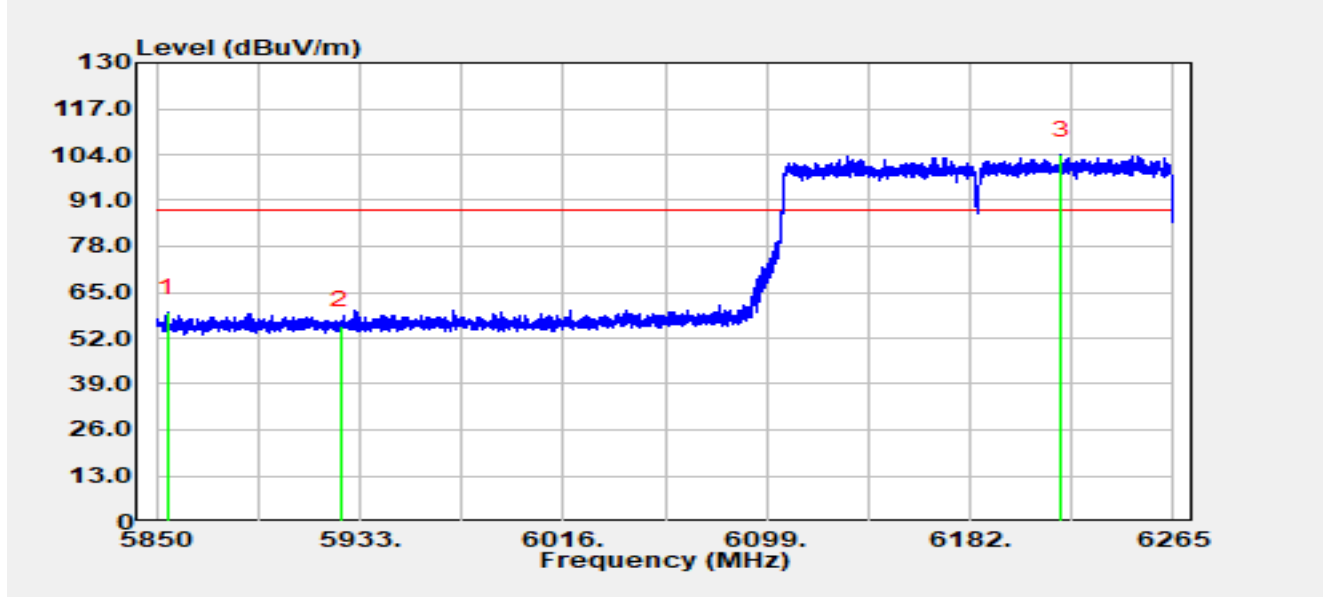


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5854.61	41.86	17.33	59.19	-29.01	88.20	Peak
2		5925.00	38.15	17.4 0	55.55	-32.65	88.20	Peak
3		6218.98	84.98	18.89	103.87	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT160 at 6185 MHz		

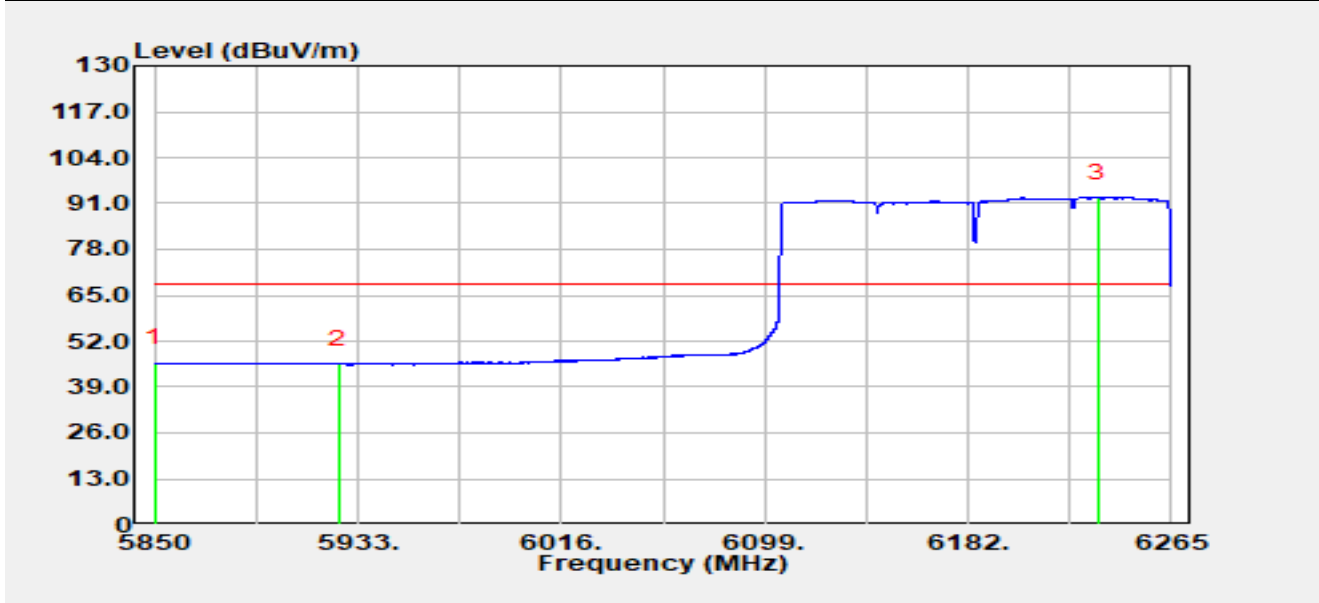


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5850.08	28.41	17.36	45.77	-22.43	68.20	Average
2		5925.00	28.17	17.4 0	45.57	-22.63	68.20	Average
3		6234.87	73.57	19.03	92.59	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT160 at 6985 MHz		

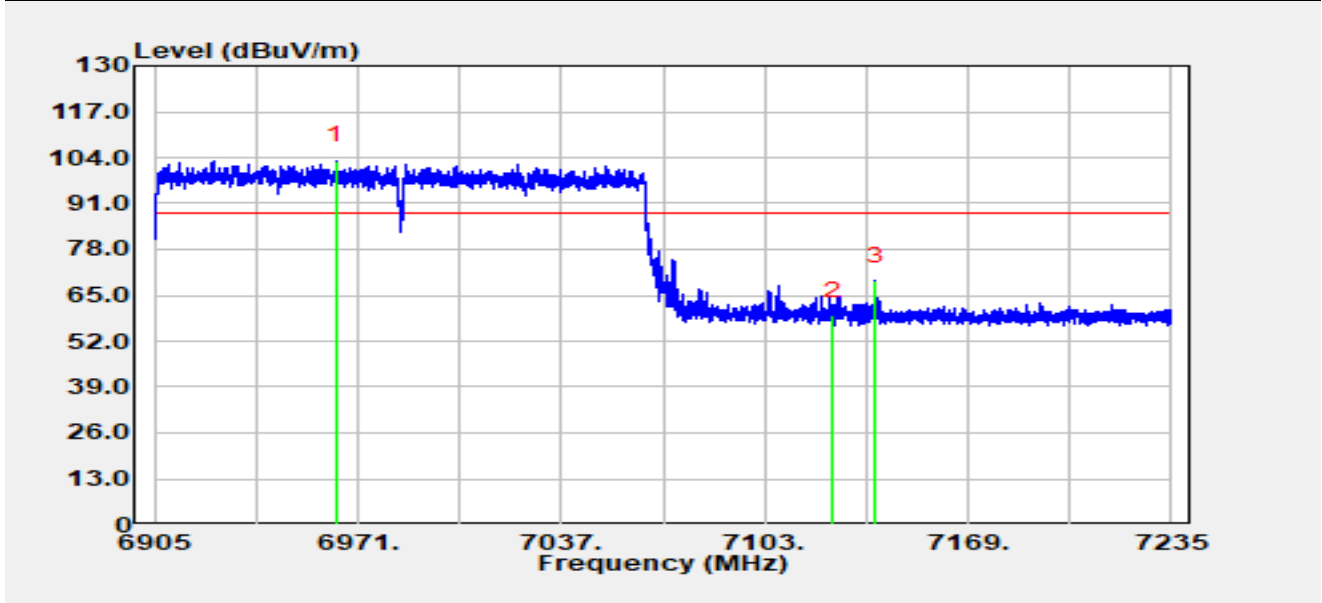


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6964.07	82.98	20.28	103.25	N/A	N/A	Peak
2		7125.00	38.76	20.50	59.26	-28.94	88.20	Peak
3	*	7138.90	48.66	20.38	69.03	-19.17	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT160 at 6985 MHz		

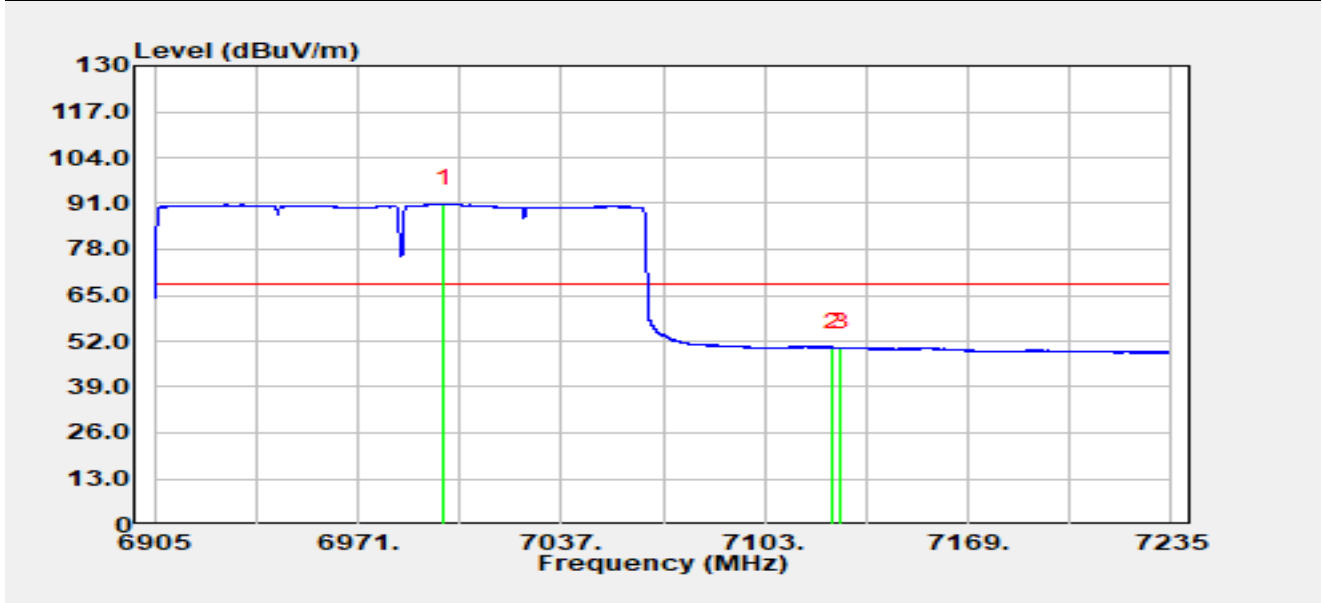


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6998.92	70.58	20.26	90.84	N/A	N/A	Average
2		7125.00	29.63	20.50	50.13	-18.07	68.20	Average
3	*	7127.55	29.79	20.49	50.28	-17.92	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT160 at 6985 MHz		

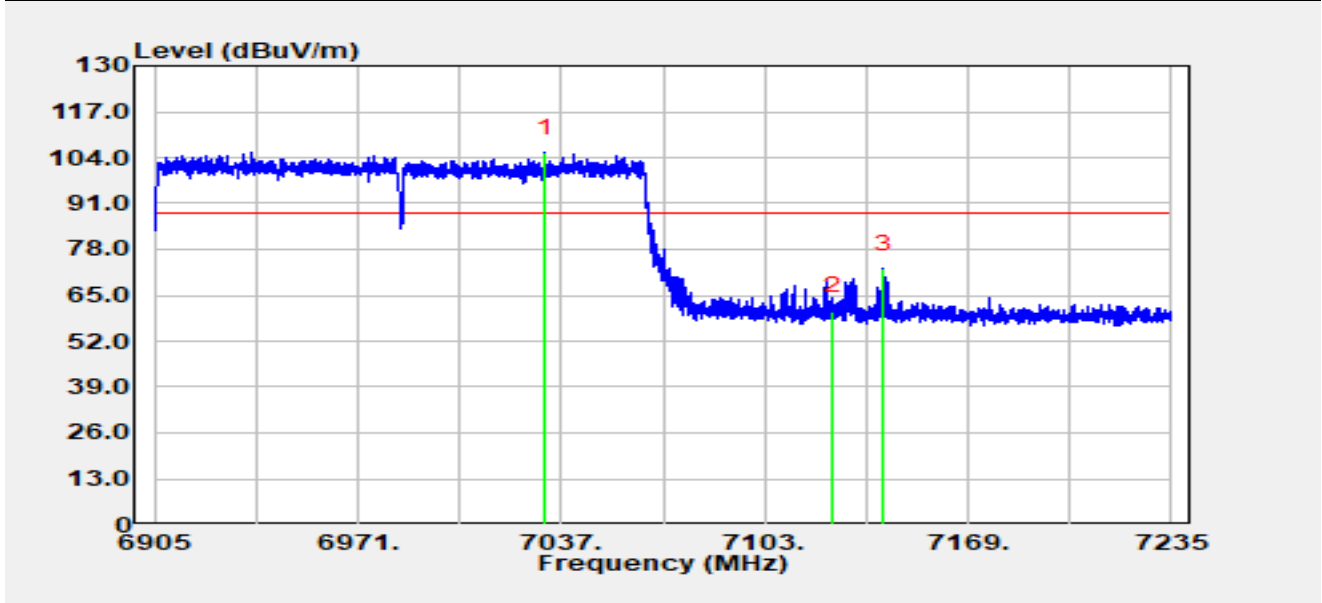


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7031.62	85.33	20.06	105.40	N/A	N/A	Peak
2		7125.00	39.90	20.50	60.40	-27.80	88.20	Peak
3	*	7141.41	52.13	20.43	72.56	-15.64	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT160 at 6985 MHz		

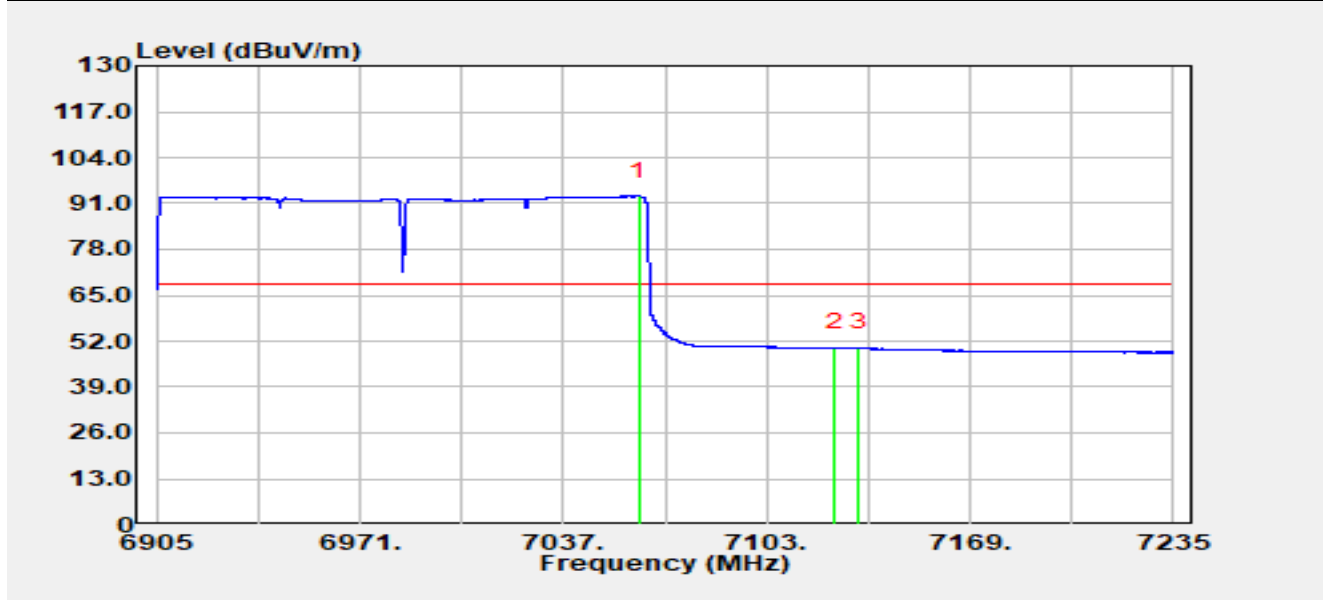


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7061.55	72.90	20.26	93.16	N/A	N/A	Average
2		7125.00	29.56	20.50	50.06	-18.14	68.20	Average
3	*	7132.90	29.75	20.44	50.19	-18.01	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6425 MHz		

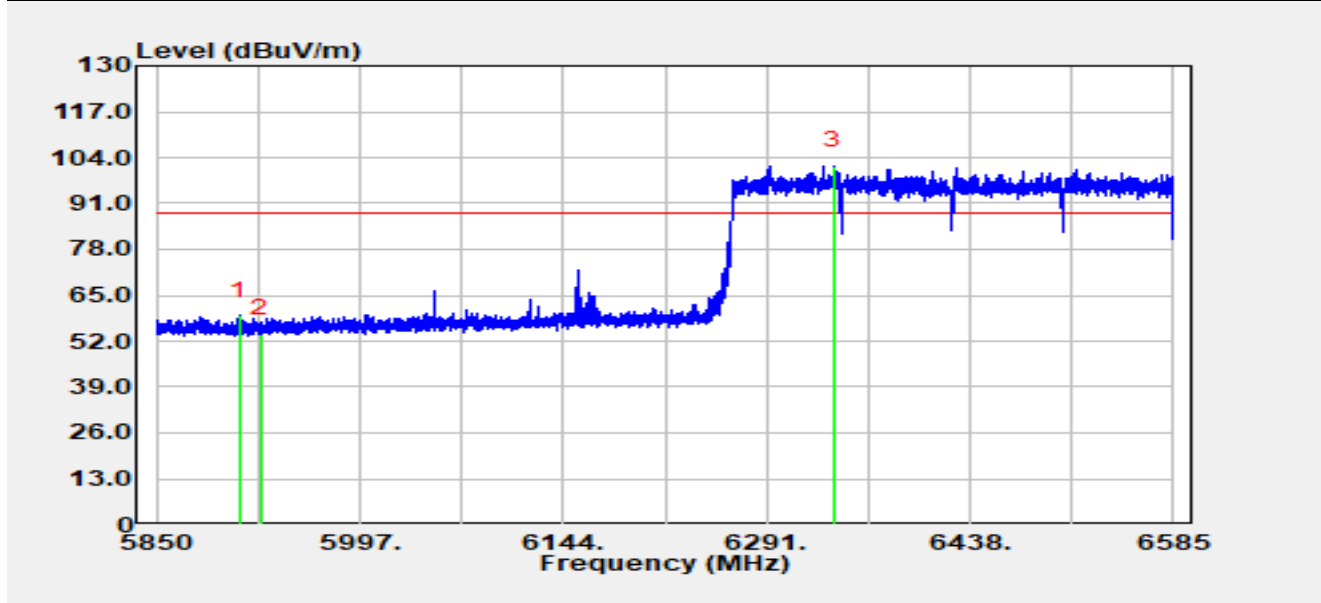


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5910.27	41.74	17.4 3	59.18	-29.02	88.20	Peak
2		5925.00	36.61	17.4 0	54.00	-34.20	88.20	Peak
3		6339.51	82.27	19.32	101.59	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6425 MHz		

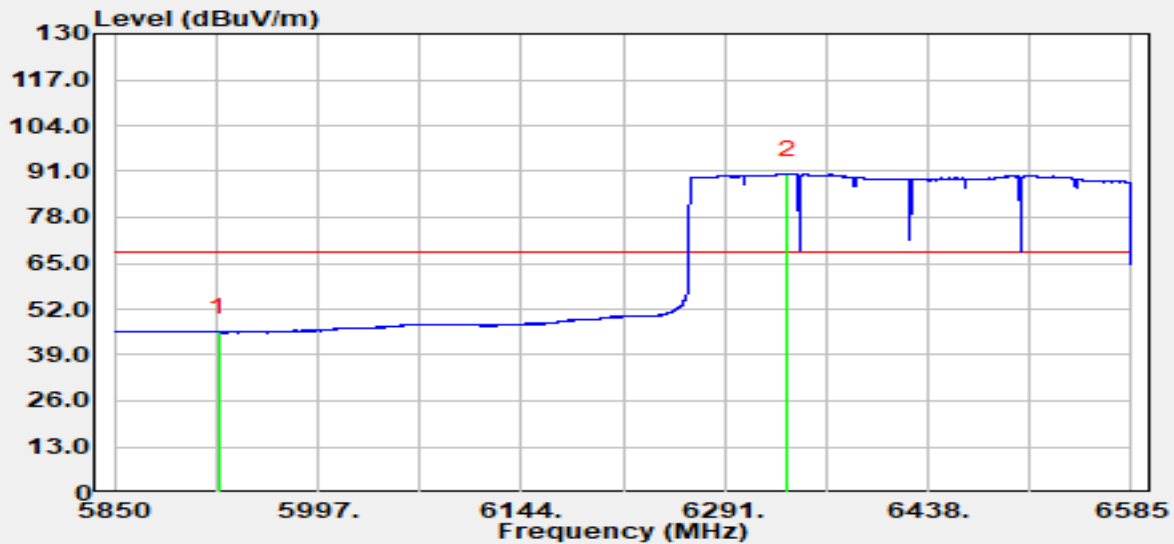


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	28.11	17.4 0	45.51	-22.69	68.20	Average
2		6336.72	70.93	19.32	90.25	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6425 MHz		

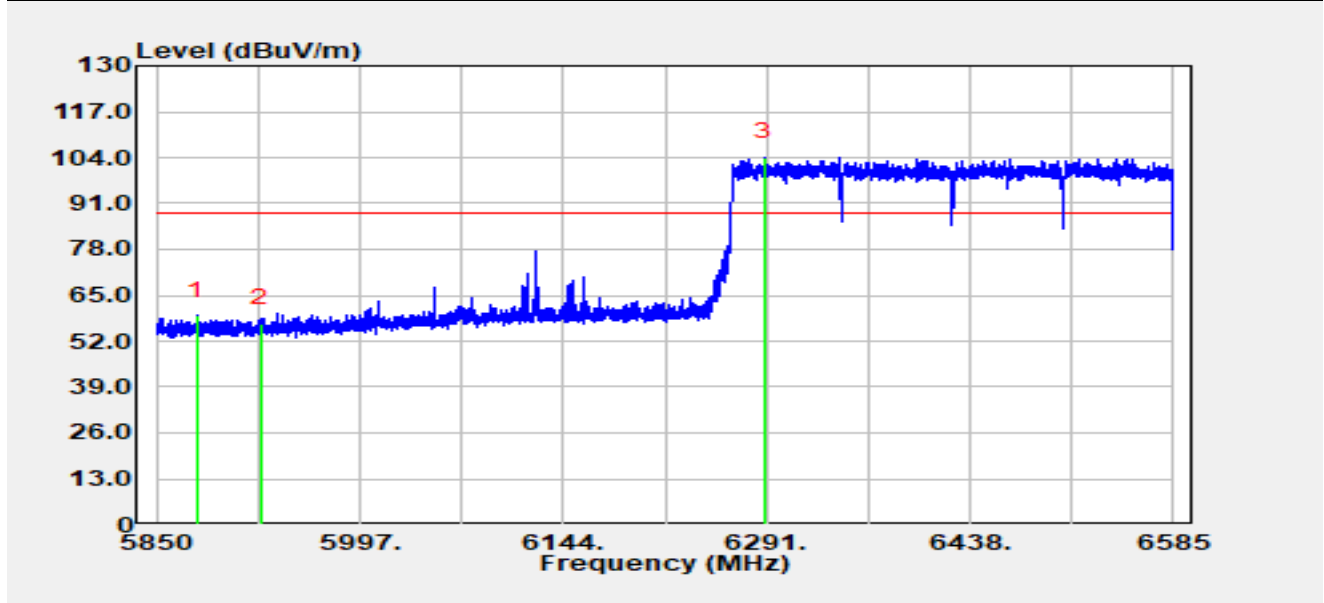


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5879.40	41.66	17.4 6	59.12	-29.08	88.20	Peak
2		5925.00	39.70	17.4 0	57.10	-31.10	88.20	Peak
3		6289.68	85.14	19.09	104.22	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6425 MHz		

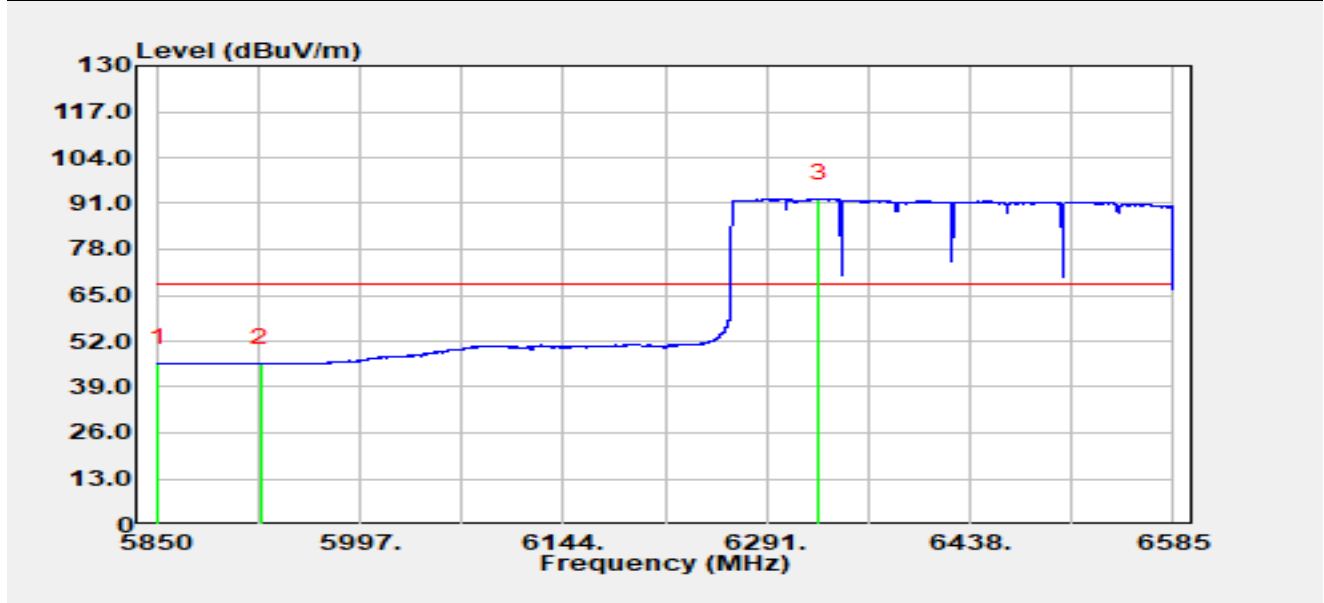


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5851.10	28.45	17.35	45.81	-22.39	68.20	Average
2		5925.00	28.25	17.4 0	45.65	-22.55	68.20	Average
3		6328.78	73.08	19.27	92.35	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6745 MHz		

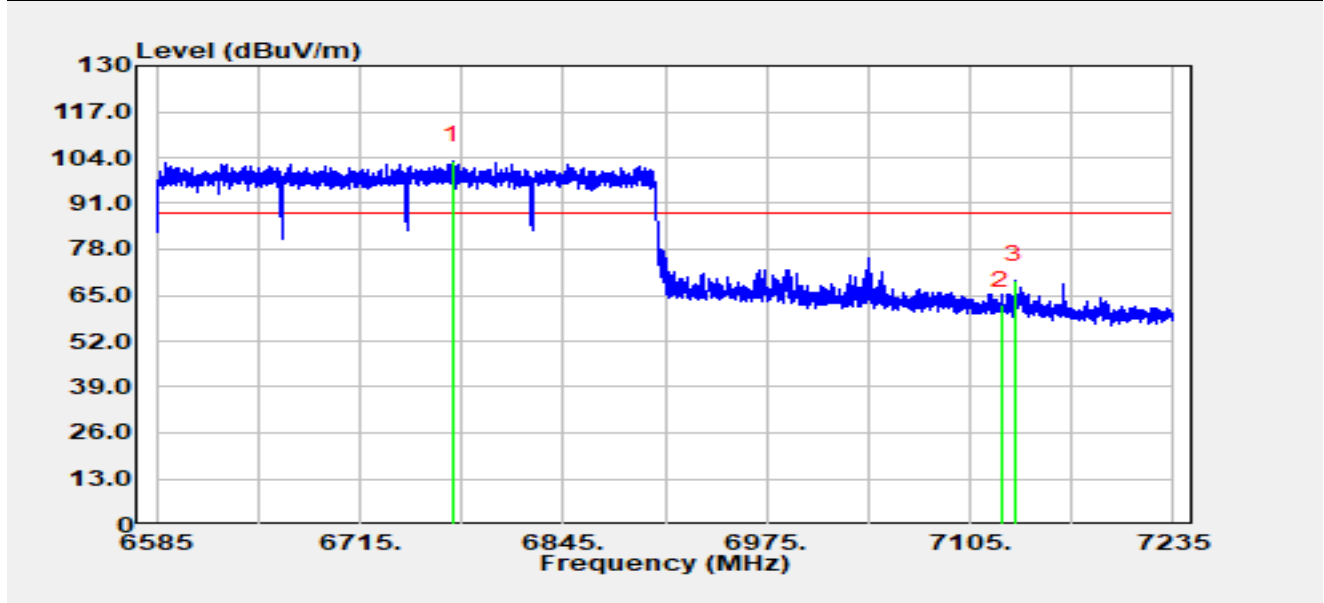


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6774.41	82.53	20.66	103.18	N/A	N/A	Peak
2		7125.00	41.75	20.50	62.25	-25.95	88.20	Peak
3	*	7133.86	48.97	20.43	69.40	-18.80	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6745 MHz		

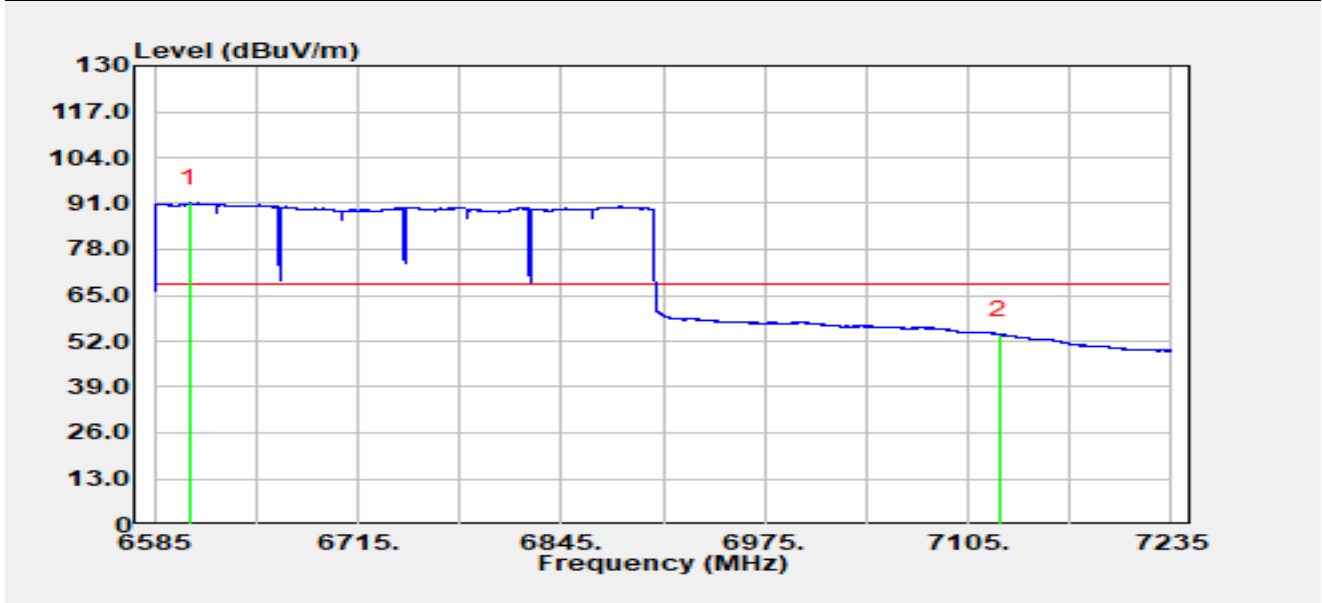


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6607.75	70.84	20.20	91.04	N/A	N/A	Average
2	*	7125.00	33.41	20.50	53.91	-14.29	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6745 MHz		

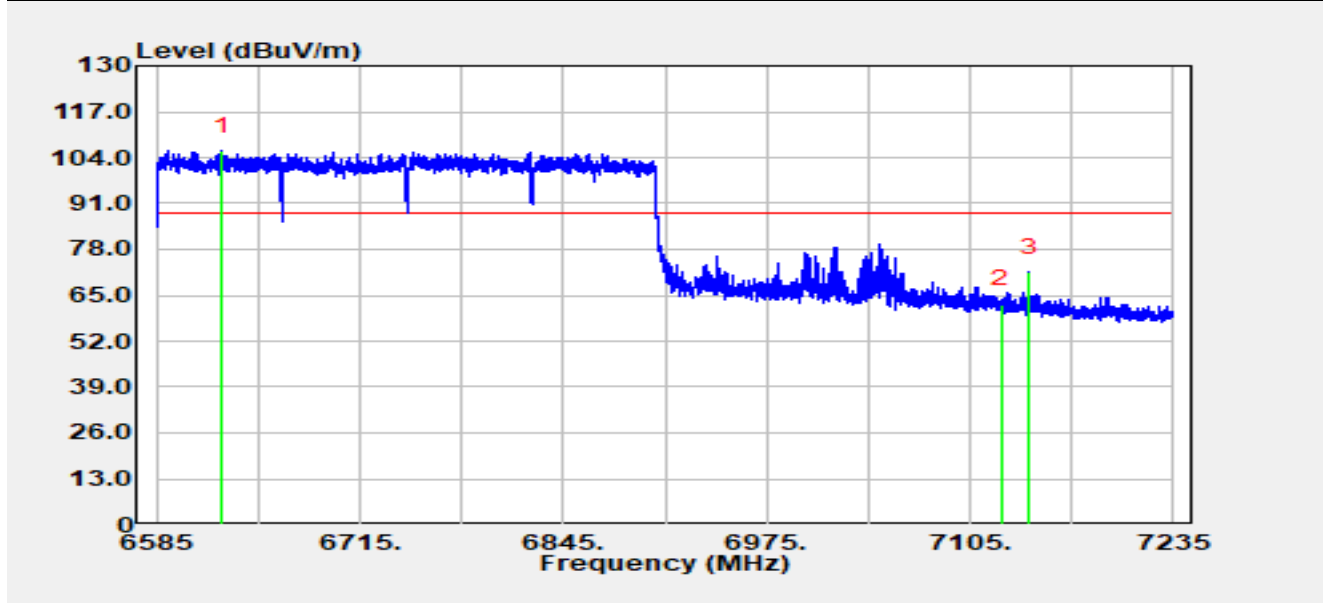


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6626.86	85.62	20.25	105.87	N/A	N/A	Peak
2		7125.00	41.86	20.50	62.36	-25.84	88.20	Peak
3	*	7142.77	50.96	20.47	71.44	-16.76	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6745 MHz		

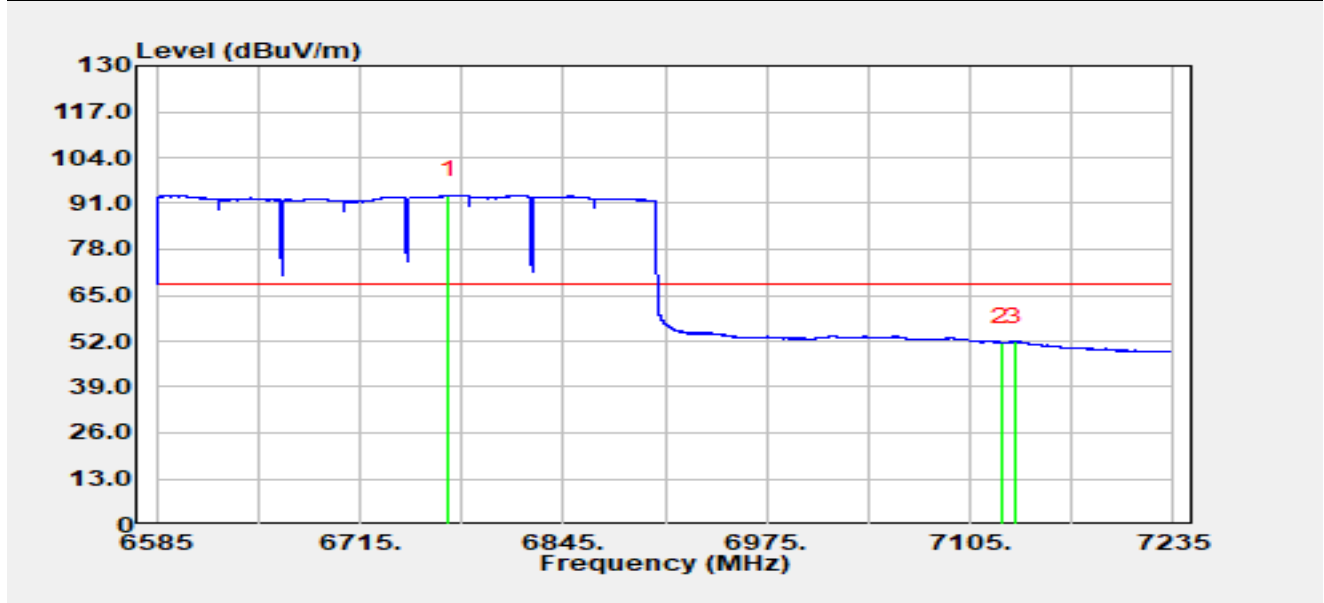


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6771.29	72.61	20.66	93.27	N/A	N/A	Average
2		7125.00	31.17	20.50	51.67	-16.53	68.20	Average
3	*	7133.60	31.40	20.43	51.84	-16.36	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6265 MHz		

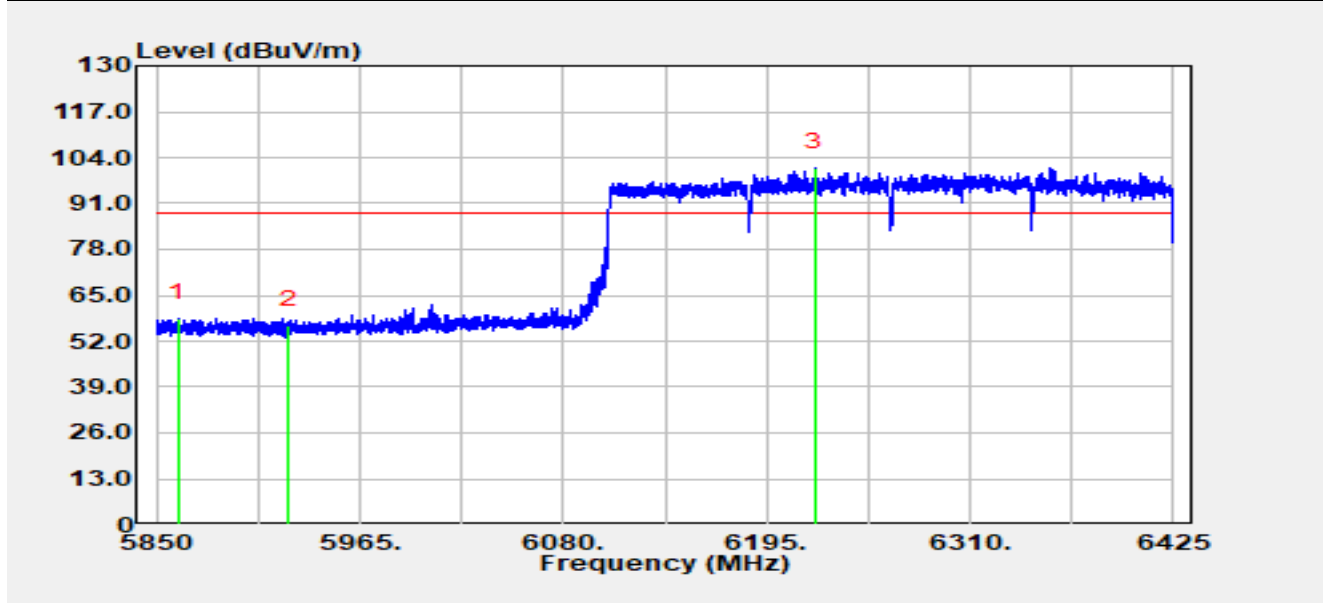


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5862.42	41.14	17.30	58.44	-29.76	88.20	Peak
2		5925.00	39.12	17.4 0	56.52	-31.68	88.20	Peak
3		6222.49	82.22	18.91	101.13	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6265 MHz		

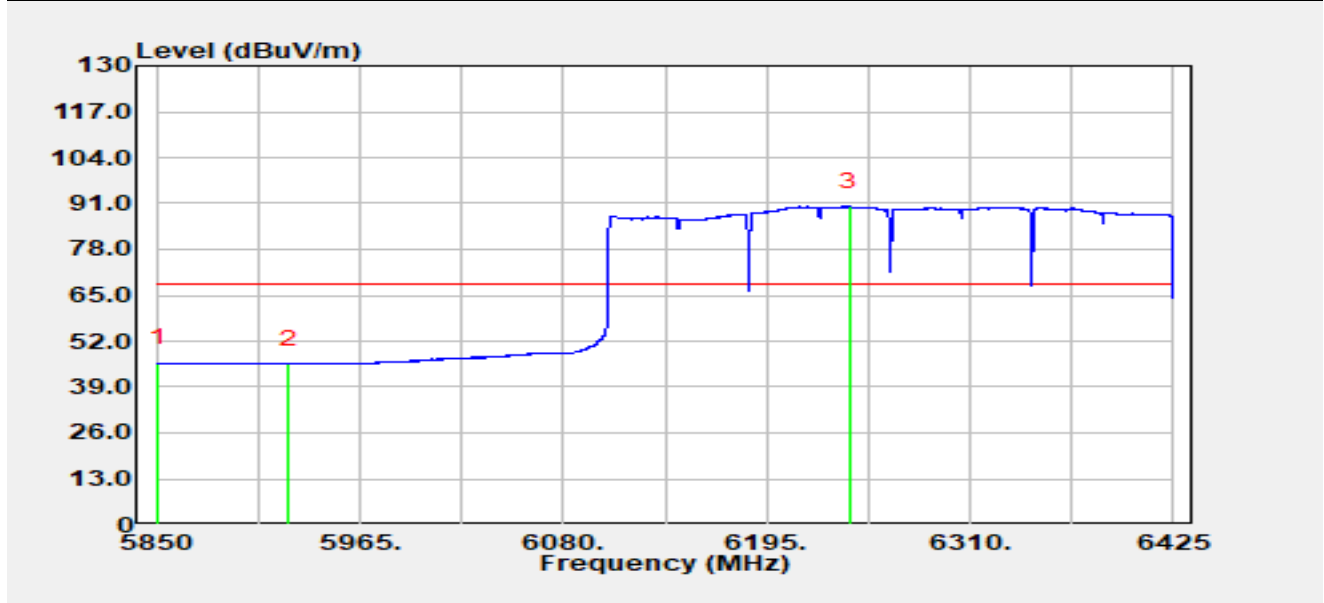


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5851.04	28.50	17.35	45.86	-22.34	68.20	Average
2		5925.00	28.13	17.4 0	45.53	-22.67	68.20	Average
3		6242.15	71.13	18.98	90.11	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6265 MHz		

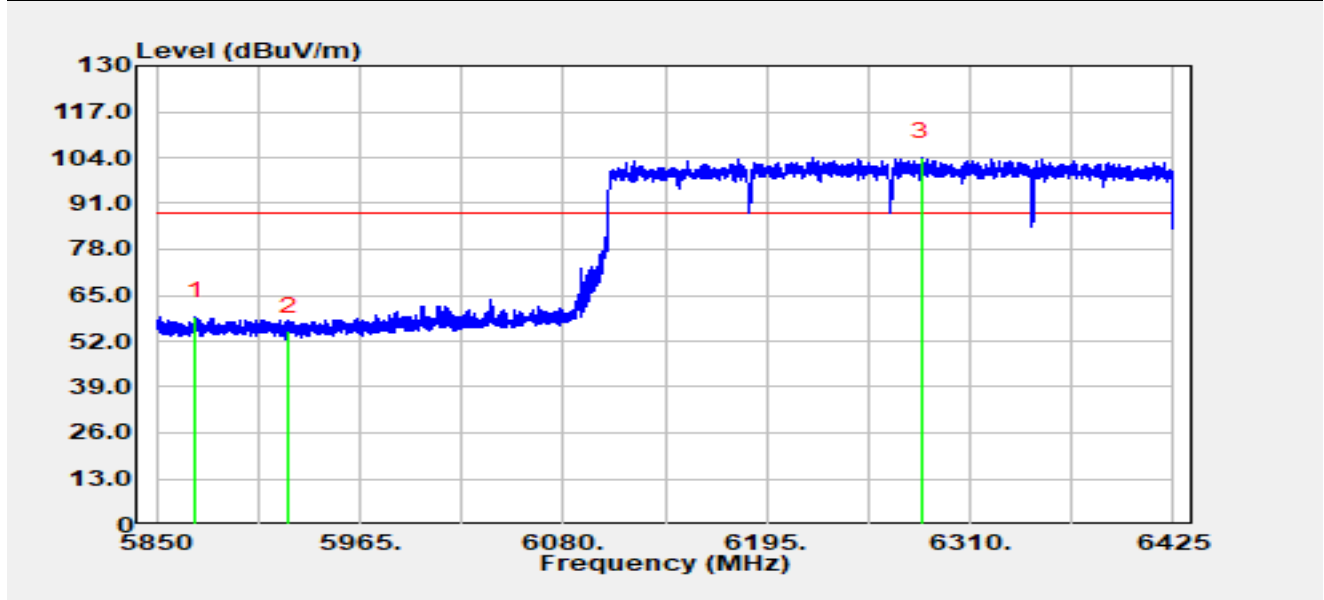


No	Mark	Frequency (MHz)	Reading (dBUV/m)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5871.74	41.65	17.39	59.04	-29.16	88.20	Peak
2		5925.00	37.54	17.4 0	54.94	-33.26	88.20	Peak
3		6282.75	85.10	19.04	104.14	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV/m) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6265 MHz		

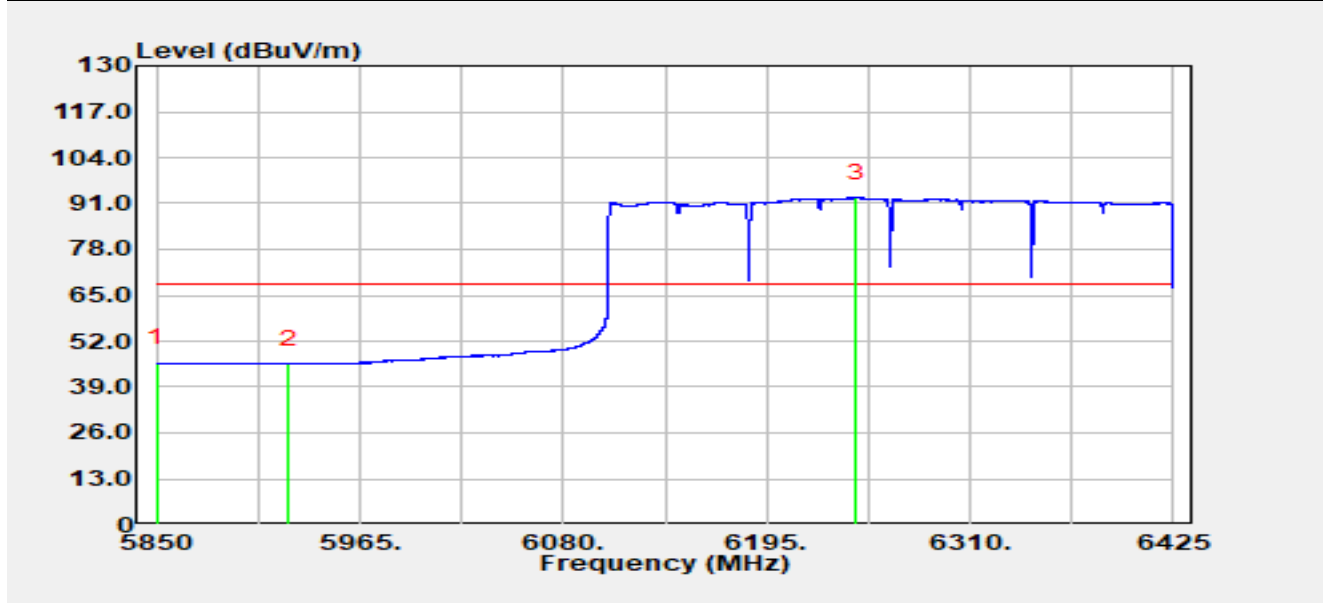


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5850.29	28.46	17.36	45.81	-22.39	68.20	Average
2		5925.00	28.20	17.4 0	45.60	-22.60	68.20	Average
3		6245.72	73.61	18.96	92.57	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6925 MHz		

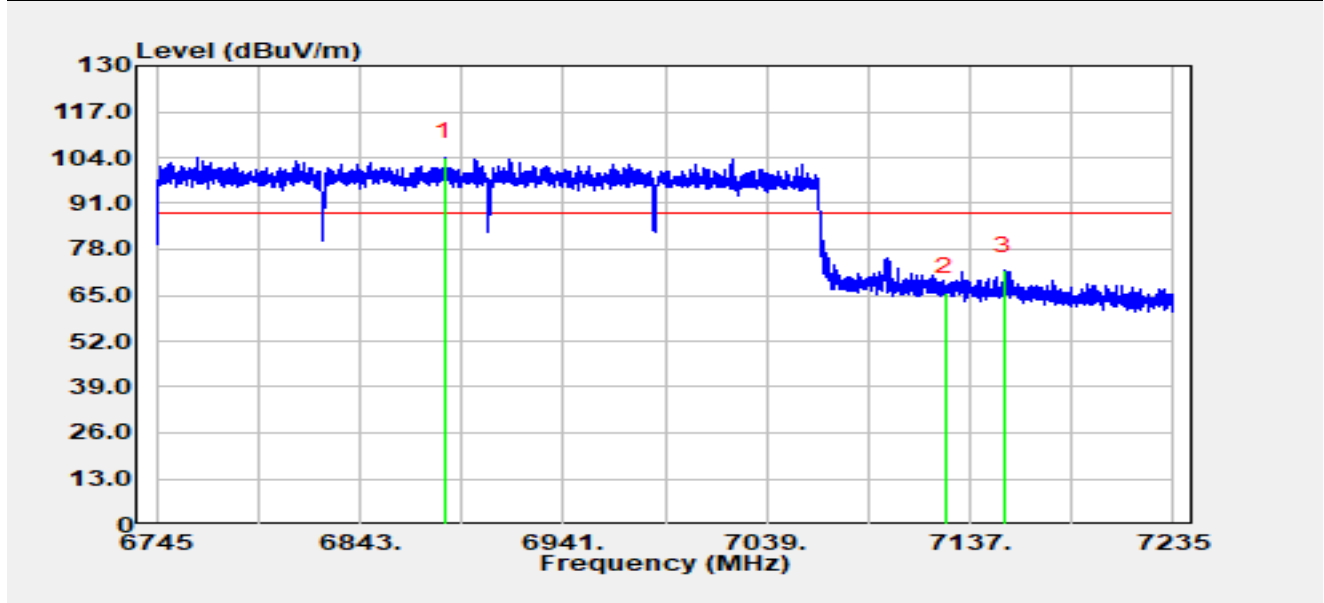


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6883.92	83.66	20.57	104.23	N/A	N/A	Peak
2		7125.00	45.42	20.50	65.92	-22.28	88.20	Peak
3	*	7153.32	51.24	20.81	72.05	-16.15	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6925 MHz		

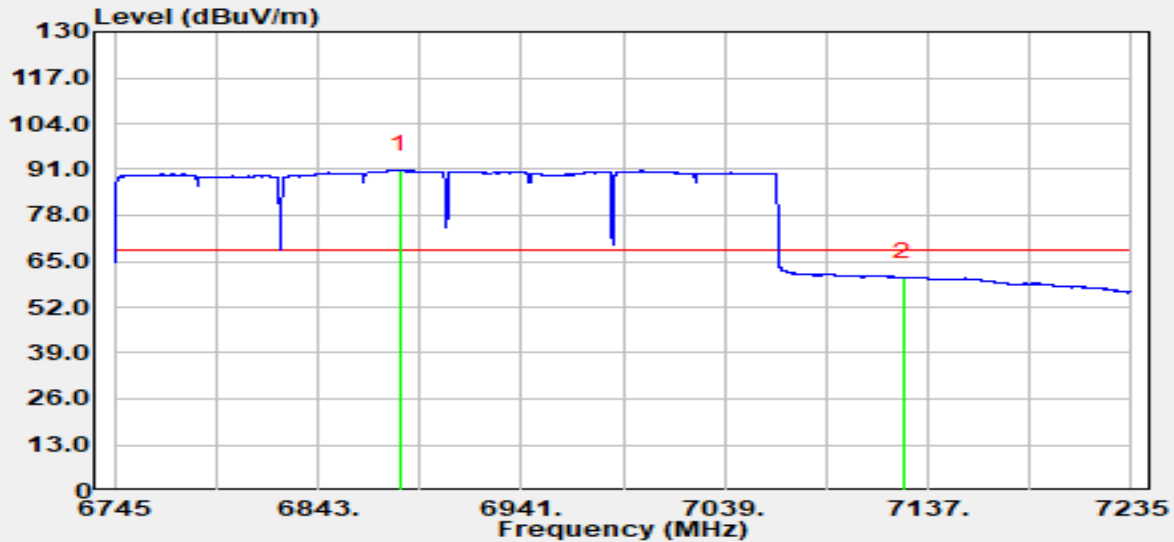


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6882.20	70.43	20.56	90.99	N/A	N/A	Average
2	*	7125.00	39.98	20.50	60.47	-7.73	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6925 MHz		

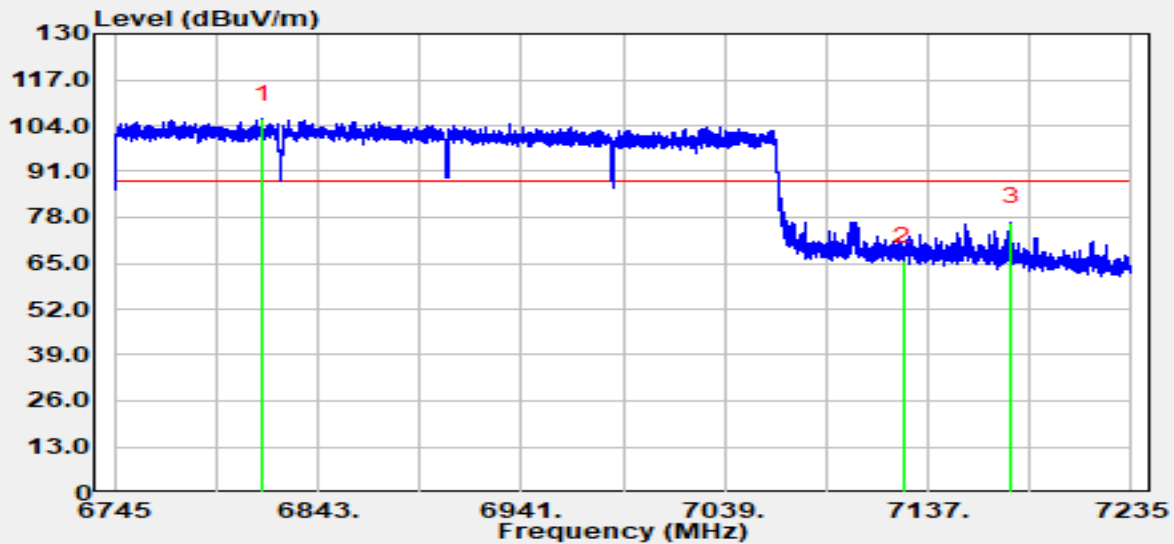


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6816.34	85.59	20.36	105.95	N/A	N/A	Peak
2		7125.00	45.22	20.50	65.72	-22.48	88.20	Peak
3	*	7177.03	56.16	20.56	76.73	-11.47	88.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-12-13
Temperature	17.4 °C	Humidity	44.6%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Mode B Nss=4 Transmit by 802.11be-EHT320 at 6925 MHz		

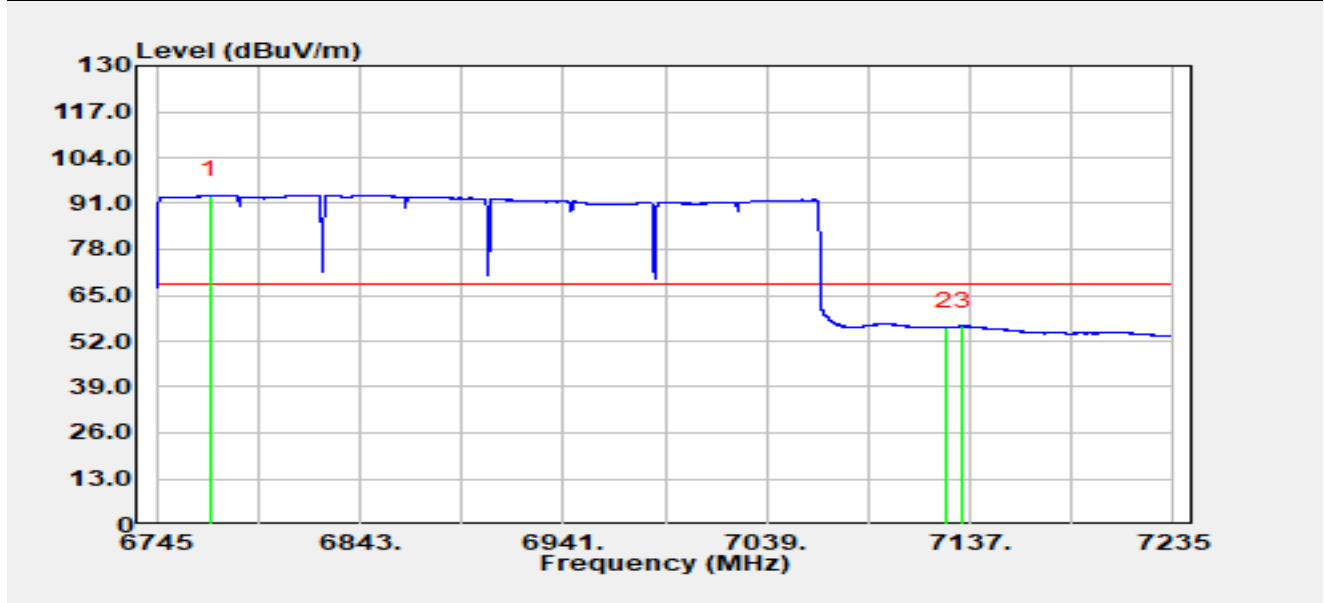

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6771.02	72.75	20.66	93.40	N/A	N/A	Average
2		7125.00	35.45	20.50	55.94	-12.26	68.20	Average
3	*	7133.28	35.80	20.44	56.23	-11.97	68.20	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.10 AC Conducted Emissions Test Result

Note Transmit by be-EHT320 at 6585 MHz

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2025-12-22


Temp 20.6 °C

Humi 39.4%

Polarity L

Test Site WJ-SR5

Spectrum Overview

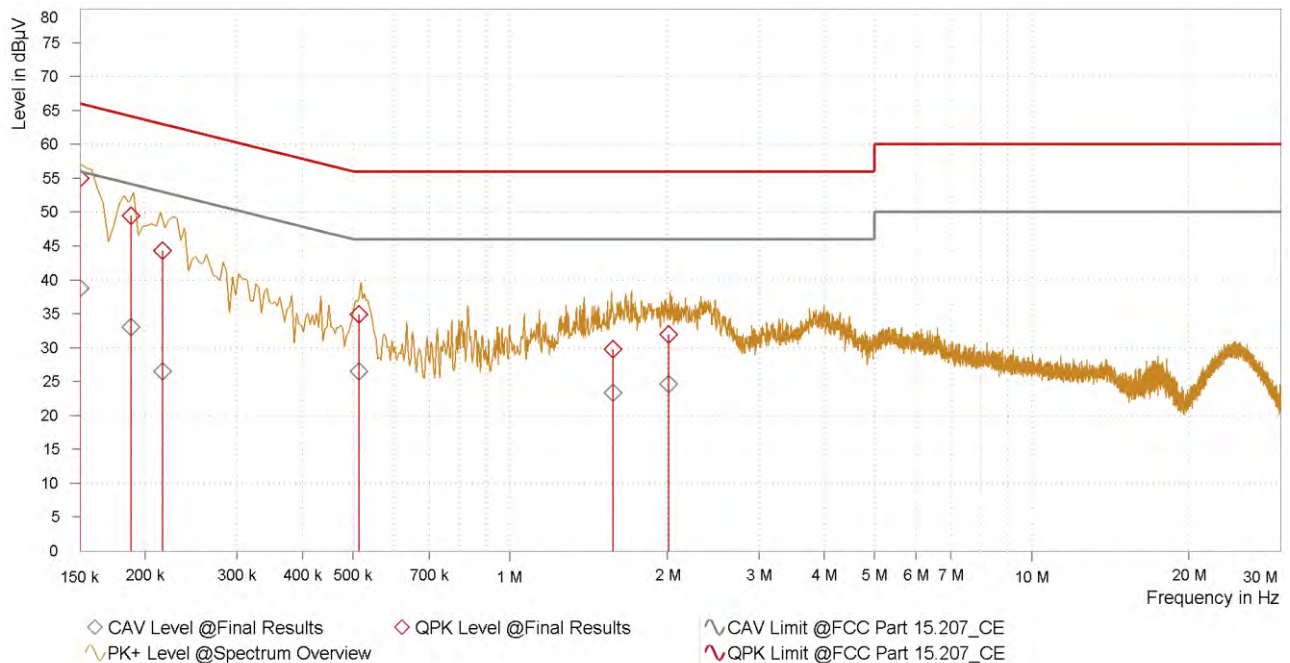

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.150	54.97	66.00	11.03	45.09	38.76	56.00	17.24	28.88	9.88	L1
0.188	49.49	64.12	14.64	39.61	33.02	54.12	21.11	23.14	9.88	L1
0.216	44.29	62.97	18.68	34.42	26.51	52.97	26.46	16.64	9.87	L1
0.513	34.94	56.00	21.06	25.10	26.48	46.00	19.52	16.63	9.85	L1
1.578	29.81	56.00	26.19	19.89	23.30	46.00	22.70	13.38	9.92	L1
2.014	31.91	56.00	24.09	21.97	24.63	46.00	21.37	14.69	9.94	L1

Notes:

1. QPK Level [dBμV]=QPK Raw Lvl [dBμV] + Correction [dB]
2. CAV Level [dBμV]=CAV Raw Lvl [dBμV] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

Note Transmit by be-EHT320 at 6585 MHz

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2025-12-22


Temp 20.6 °C

Humi 39.4%

Polarity N

Test Site WJ-SR5

Spectrum Overview

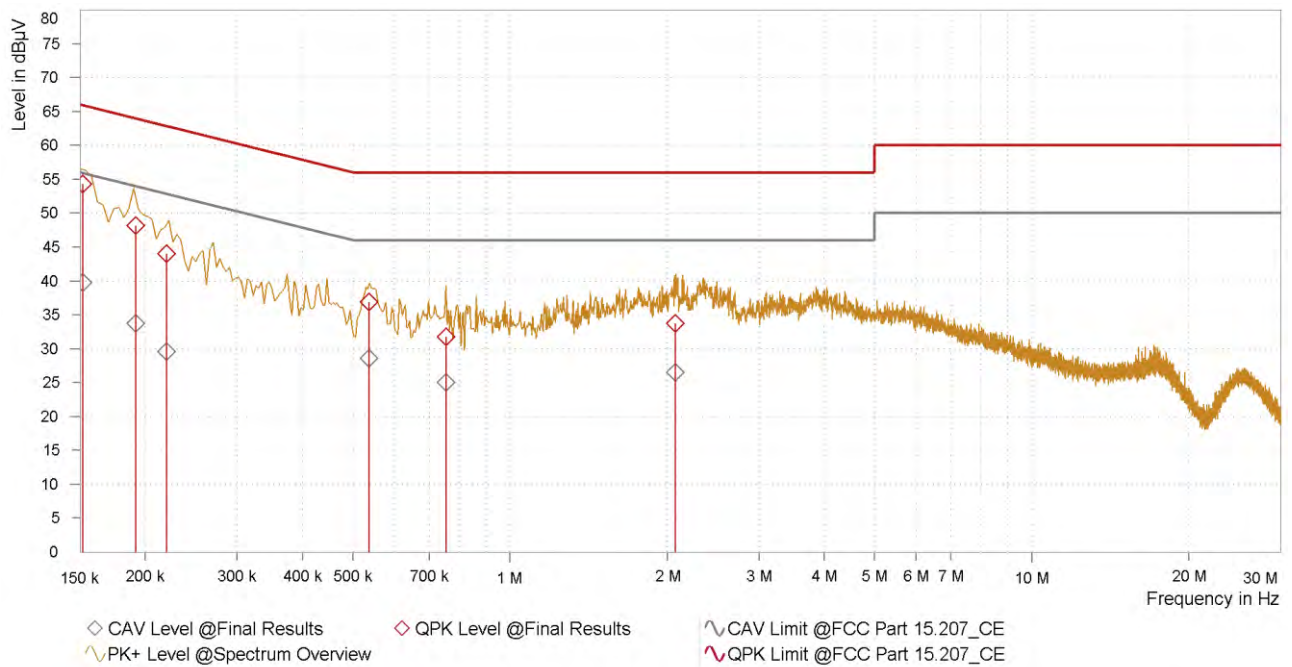

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.152	54.26	65.89	11.63	44.43	39.80	55.89	16.09	29.97	9.83	N
0.192	48.15	63.95	15.80	38.31	33.71	53.95	20.24	23.87	9.84	N
0.220	43.96	62.82	18.85	34.12	29.52	52.82	23.30	19.67	9.85	N
0.537	36.90	56.00	19.10	27.03	28.58	46.00	17.42	18.72	9.87	N
0.754	31.74	56.00	24.26	21.86	25.00	46.00	21.00	15.12	9.88	N
2.077	33.76	56.00	22.24	23.78	26.52	46.00	19.48	16.54	9.97	N

Notes:

1. QPK Level [dBμV]=QPK Raw Lvl [dBμV] + Correction [dB]
2. CAV Level [dBμV]=CAV Raw Lvl [dBμV] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

Appendix B - Test Setup Photograph

Refer to "R25S1037117-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1037117-UE" file.

_____ The End _____