


Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

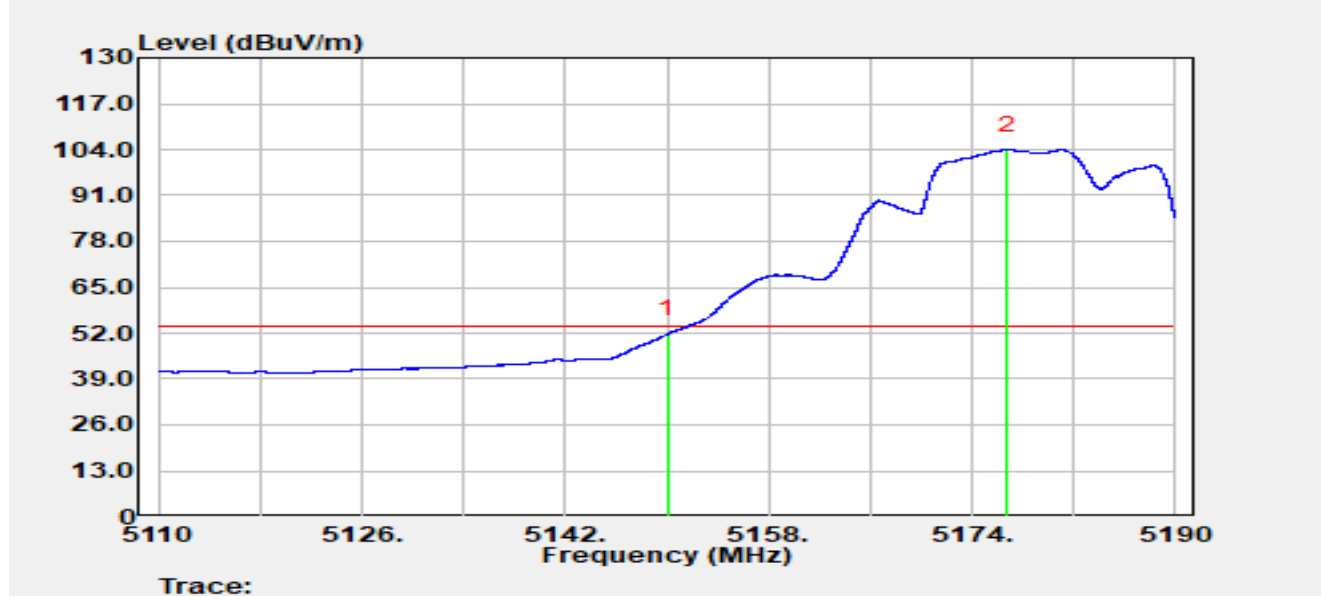


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	52.22	-0.54	51.67	-2.33	54.00	Average
2		5176.768	56.04	47.96	104.00	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

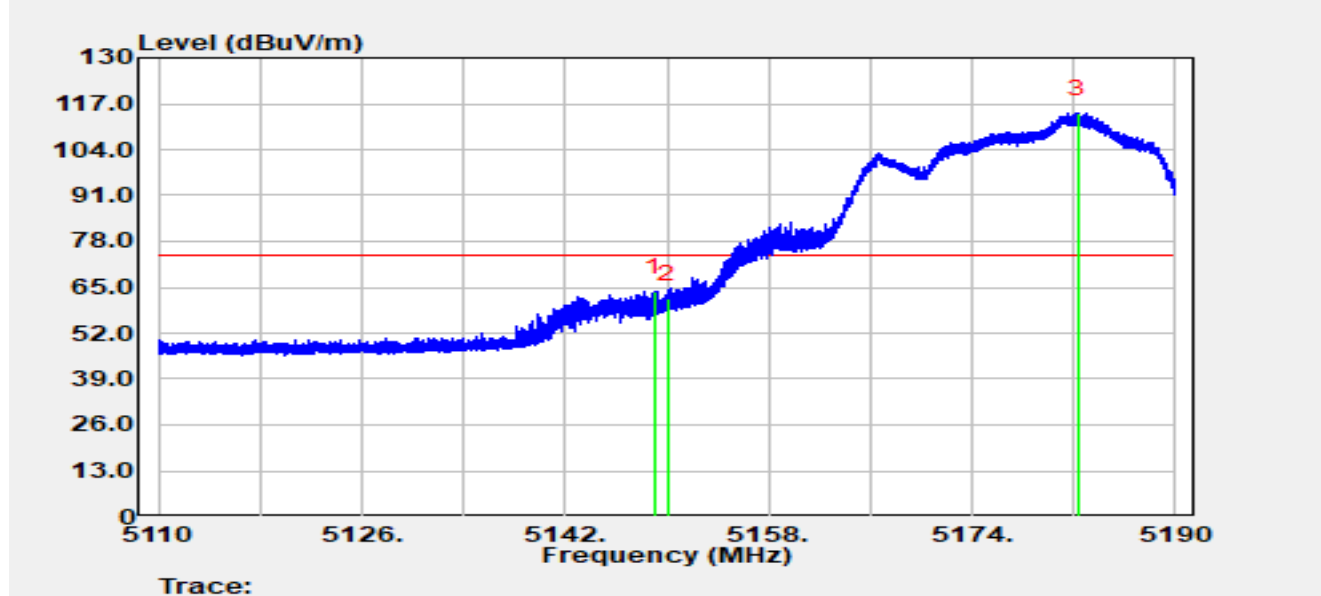


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.032	64.83	-1.09	63.74	-10.26	74.00	Peak
2		5150.000	62.33	-0.54	61.79	-12.21	74.00	Peak
3		5182.304	71.12	43.10	114.23	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

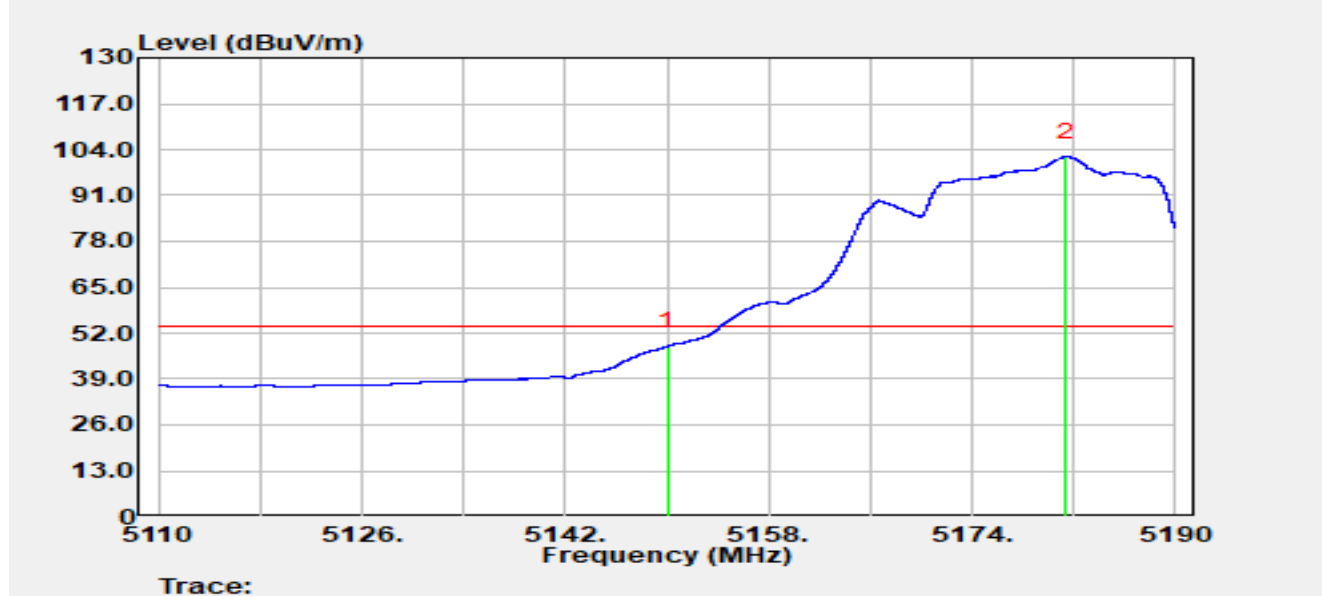


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	48.83	-0.54	48.29	-5.71	54.00	Average
2		5181.376	57.02	44.95	101.97	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

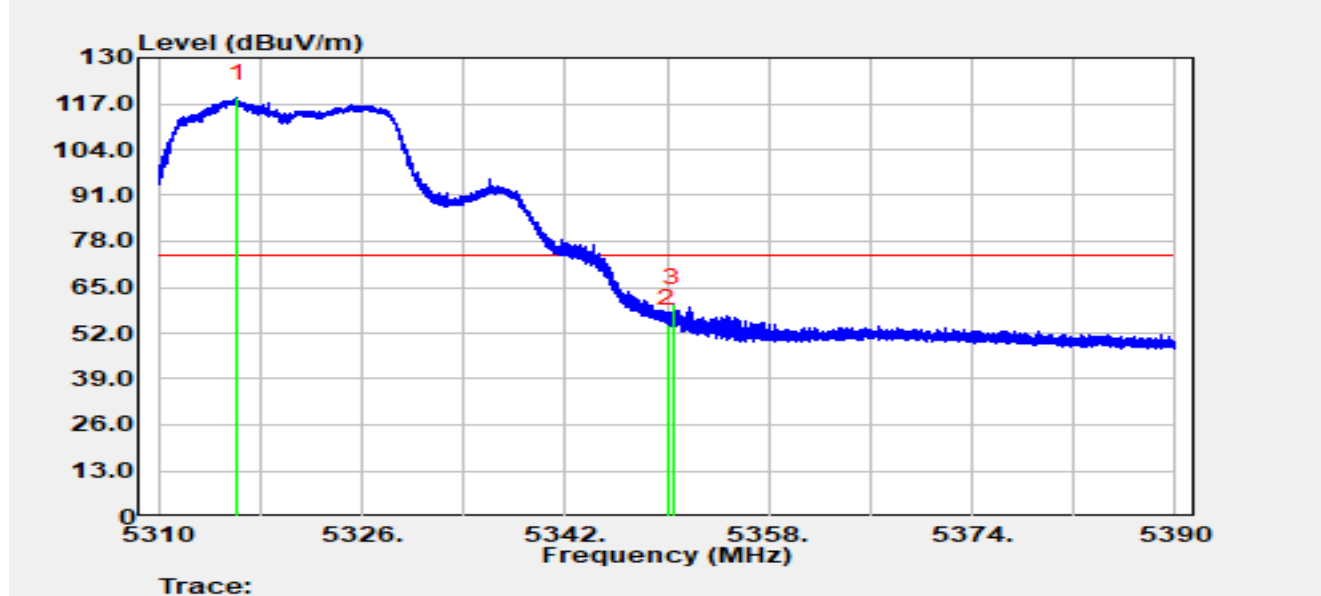


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5316.160	70.89	47.68	118.57	N/A	N/A	Peak
2		5350.000	52.24	2.28	54.52	-19.48	74.00	Peak
3	*	5350.424	58.40	2.04	60.44	-13.56	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

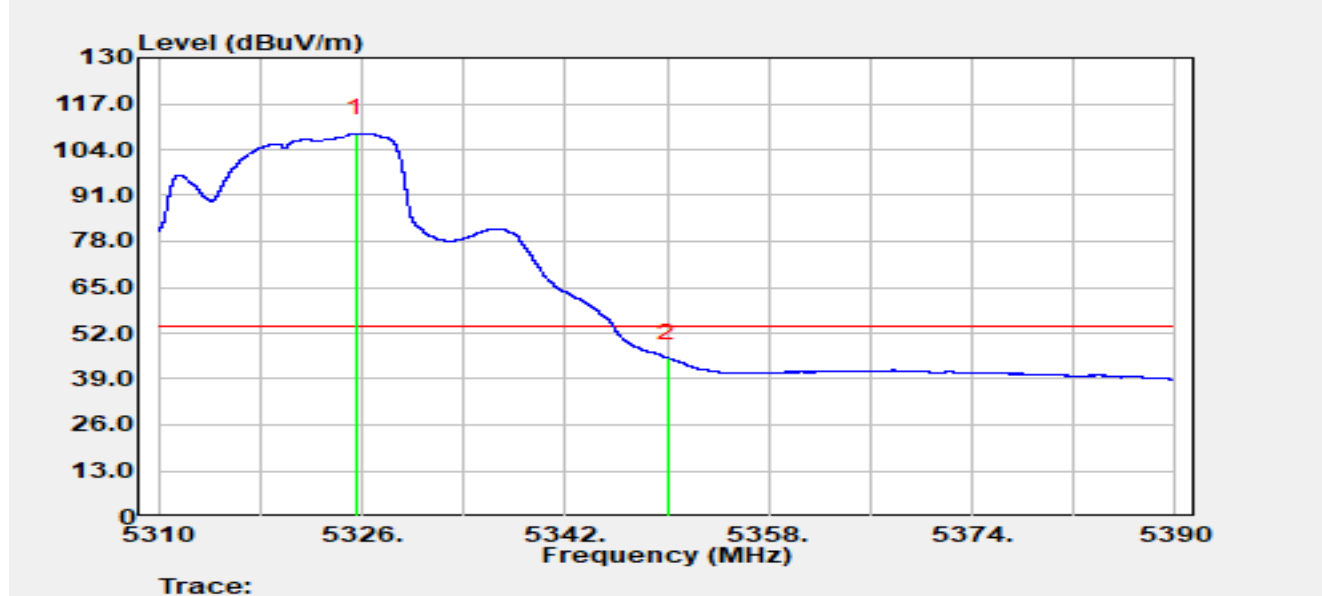


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5325.536	66.72	41.84	108.56	N/A	N/A	Average
2	*	5350.000	42.81	2.28	45.09	-8.91	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

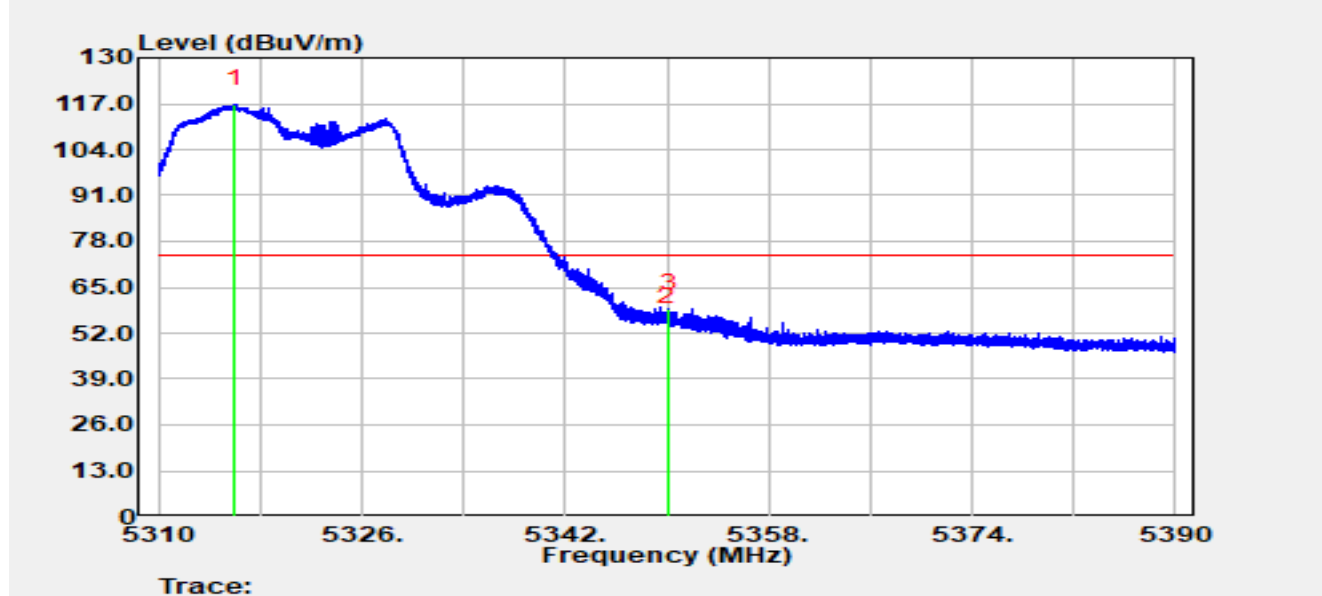


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5316.000	68.81	47.96	116.77	N/A	N/A	Peak
2		5350.000	52.87	2.28	55.15	-18.85	74.00	Peak
3	*	5350.168	56.86	2.20	59.06	-14.94	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

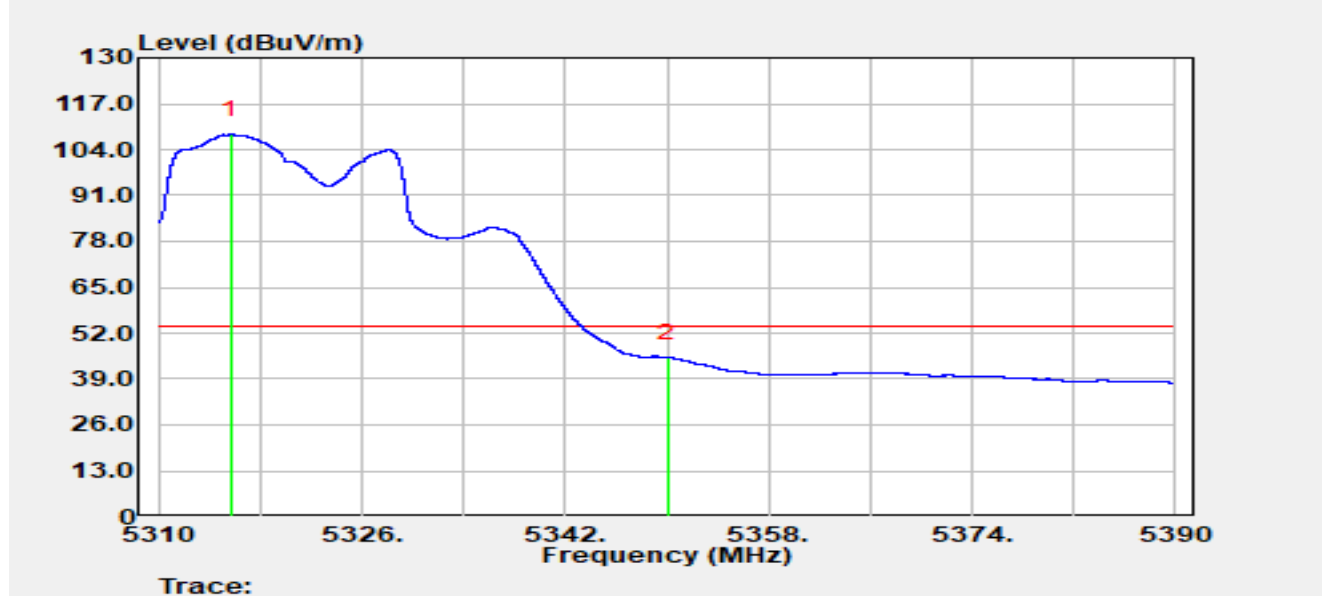


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5315.640	59.66	48.60	108.27	N/A	N/A	Average
2	*	5350.000	42.78	2.28	45.06	-8.94	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

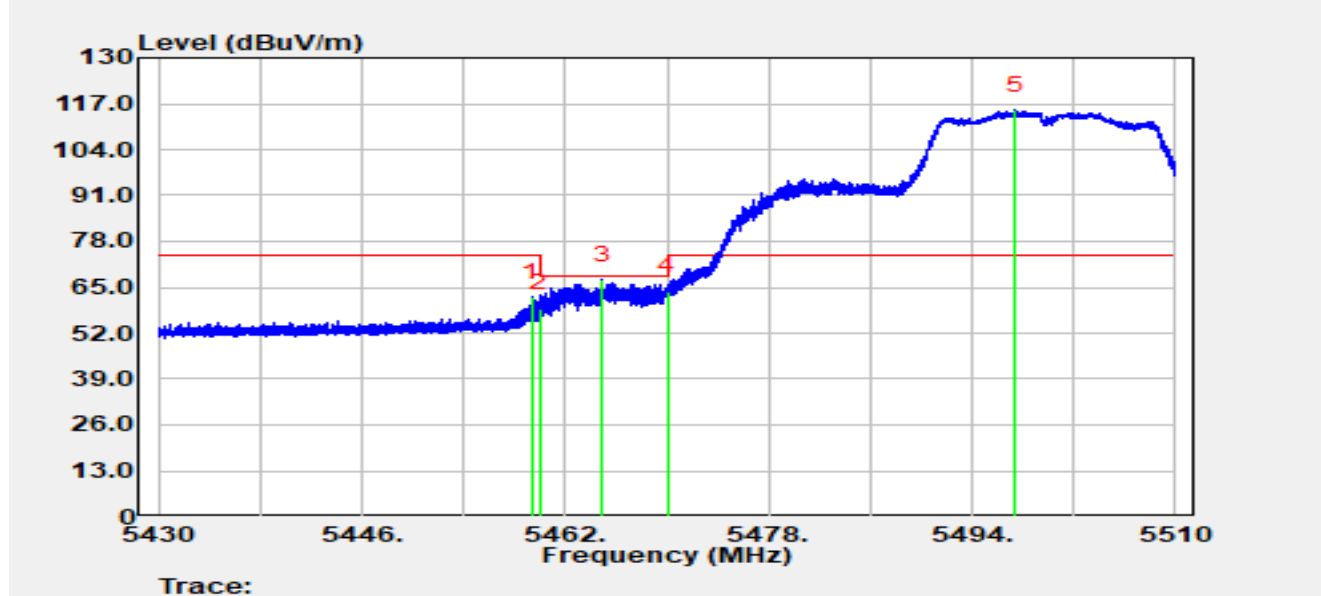


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.360	62.97	-0.77	62.19	-11.81	74.00	Peak
2		5460.000	59.60	-0.69	58.91	-9.29	68.20	Peak
3	*	5464.904	67.46	-0.27	67.19	-1.01	68.20	Peak
4		5470.000	62.98	1.00	63.98	-4.22	68.20	Peak
5		5497.360	74.65	40.42	115.06	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

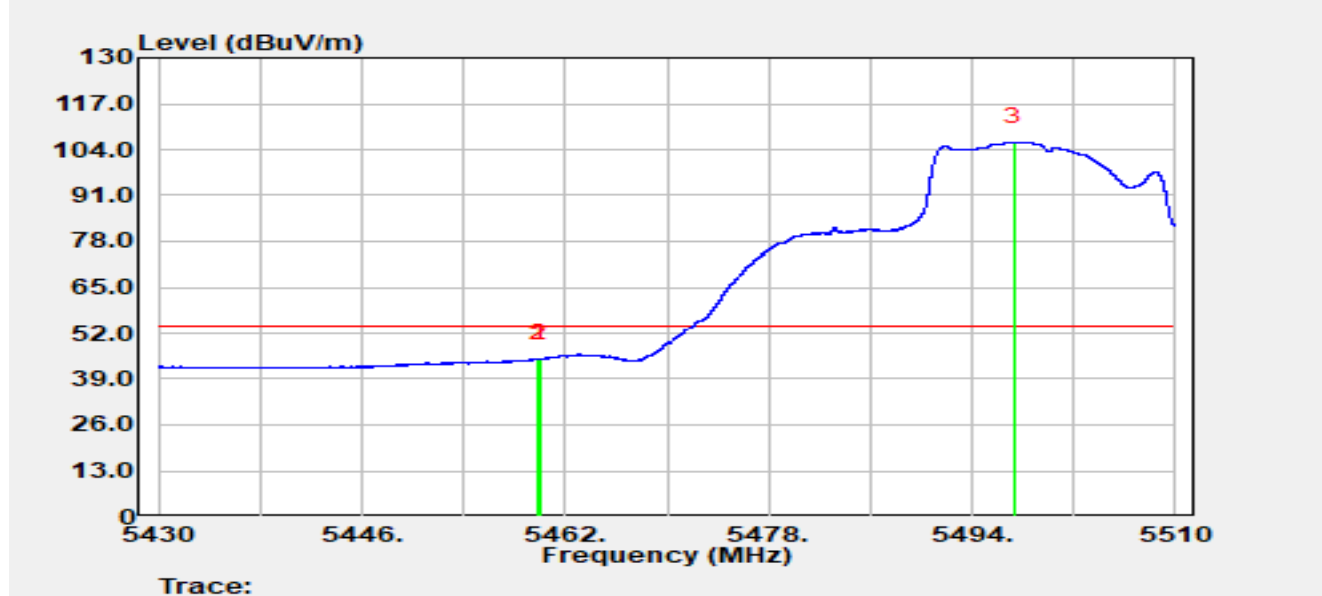


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.920	45.48	-0.70	44.78	-9.22	54.00	Average
2		5460.000	45.41	-0.69	44.72	-9.28	54.00	Average
3		5497.328	65.69	40.43	106.12	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

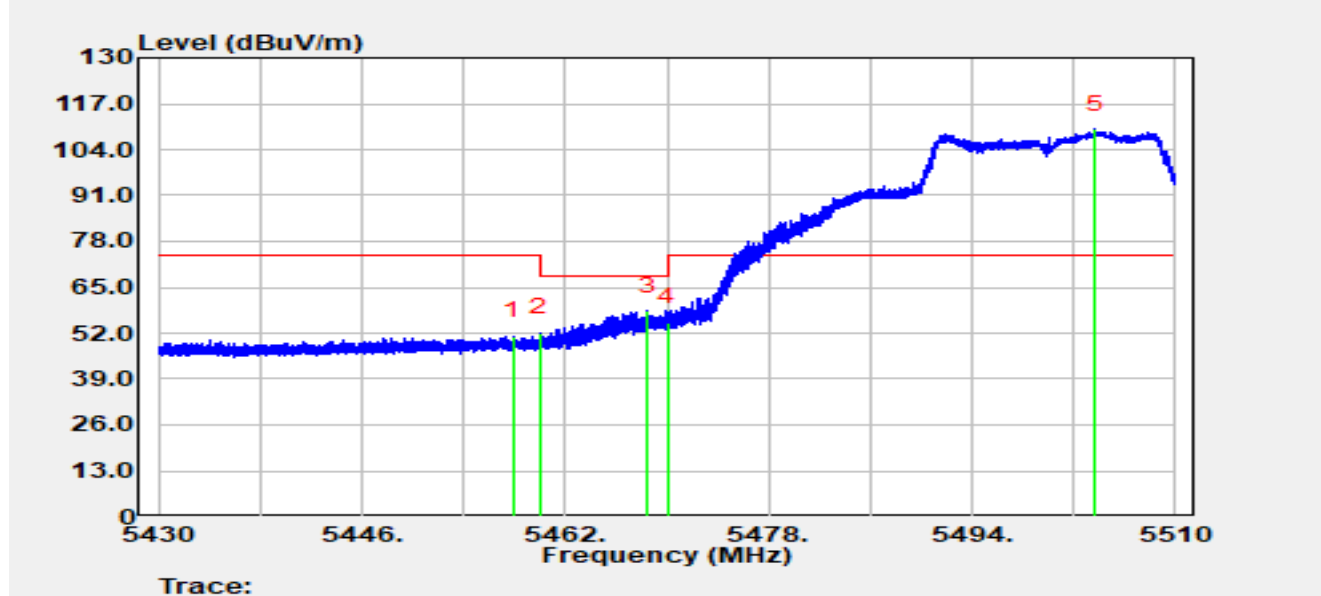


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.904	51.89	-0.86	51.03	-22.97	74.00	Peak
2		5460.000	52.72	-0.69	52.02	-16.18	68.20	Peak
3	*	5468.520	57.68	0.53	58.21	-9.99	68.20	Peak
4		5470.000	54.16	1.00	55.16	-13.04	68.20	Peak
5		5503.736	63.90	45.88	109.78	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

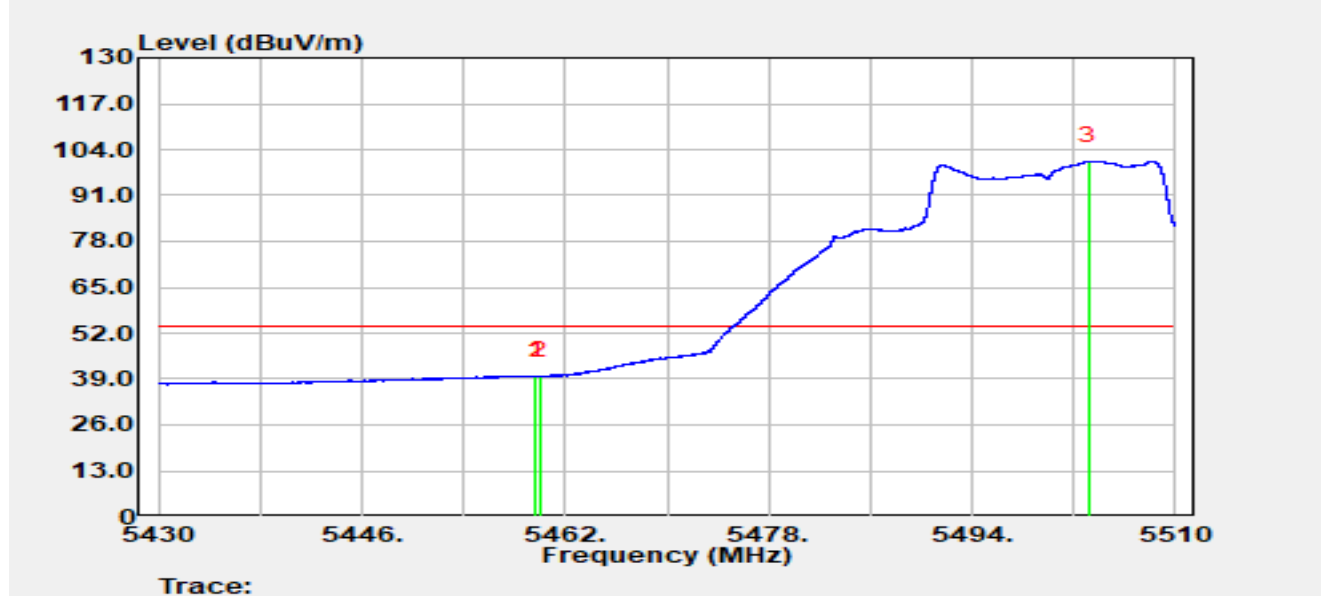


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.728	40.64	-0.73	39.91	-14.09	54.00	Average
2		5460.000	40.59	-0.69	39.90	-14.10	54.00	Average
3		5503.208	55.70	45.08	100.79	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

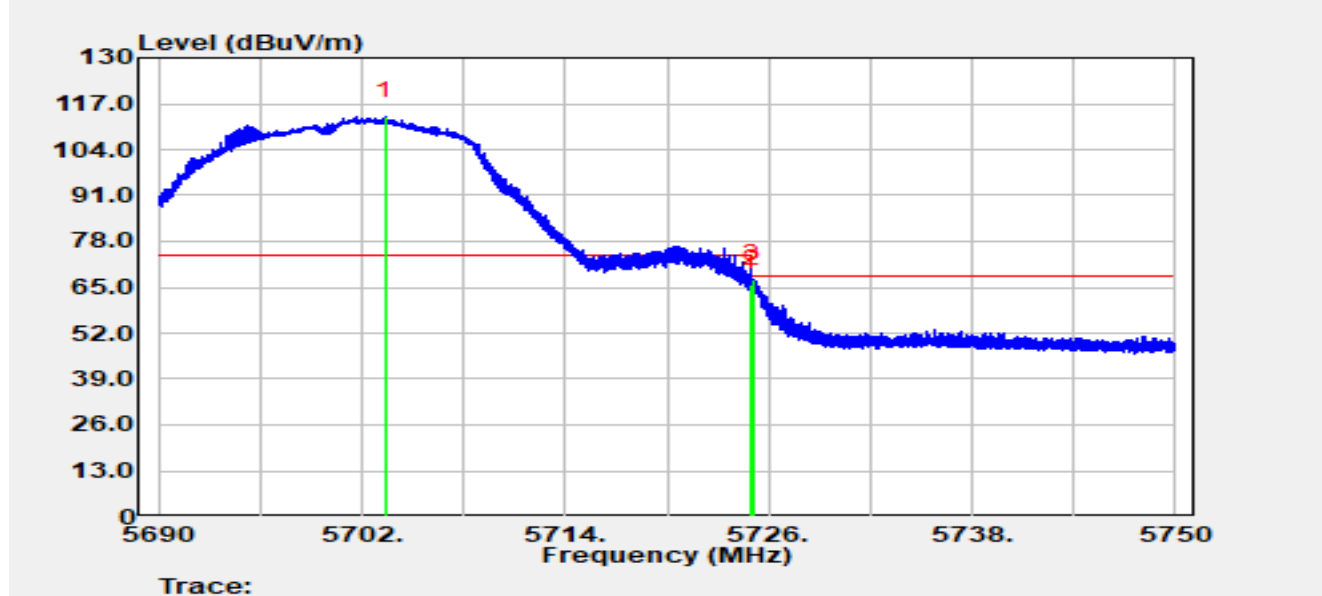


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5703.374	72.60	40.80	113.40	N/A	N/A	Peak
2		5725.000	64.84	1.01	65.84	-2.36	68.20	Peak
3	*	5725.088	66.32	0.96	67.28	-0.92	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

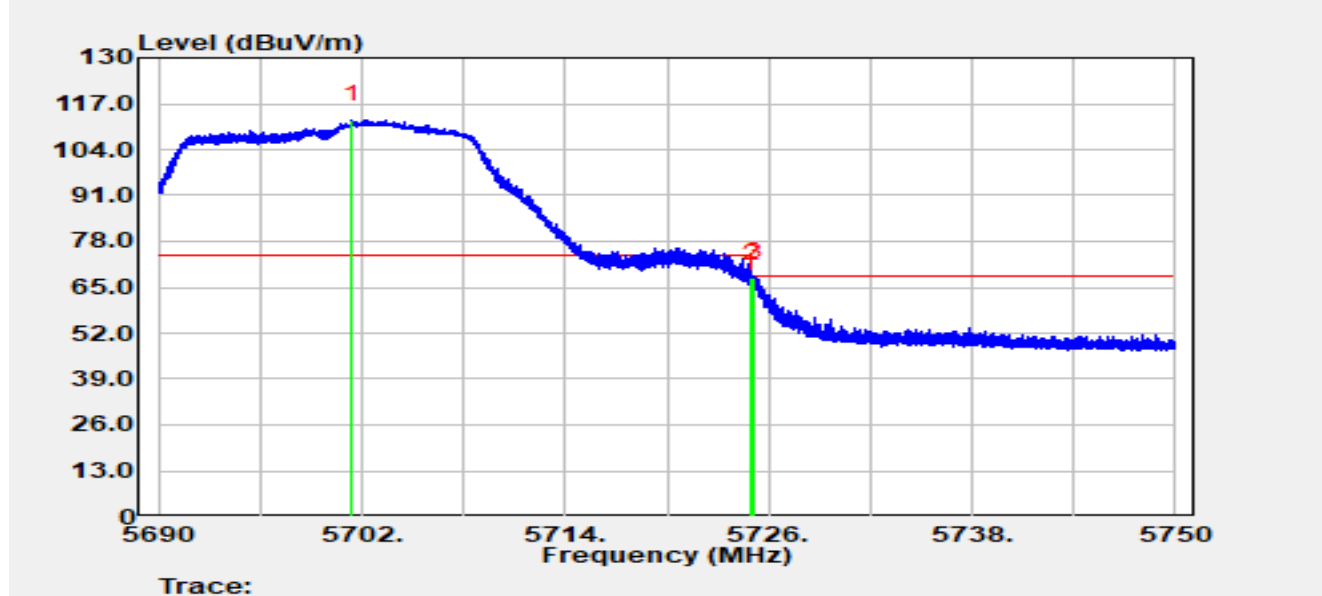


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5701.442	73.31	39.12	112.43	N/A	N/A	Peak
2		5725.000	66.68	1.01	67.69	-0.51	68.20	Peak
3	*	5725.142	66.78	0.92	67.71	-0.49	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

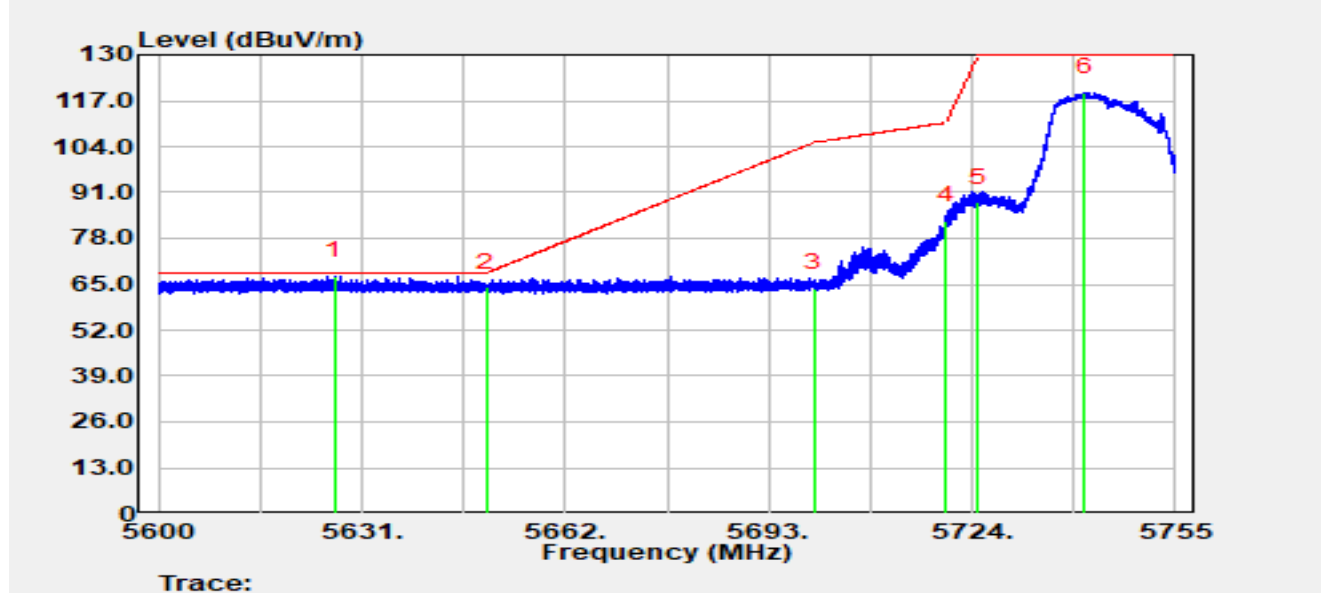


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5626.846	70.70	-3.39	67.30	-0.90	68.20	Peak
2		5650.000	67.67	-3.65	64.02	-4.18	68.20	Peak
3		5700.000	67.39	-3.47	63.92	-41.28	105.20	Peak
4		5720.000	86.45	-3.45	83.00	-27.80	110.80	Peak
5		5725.000	91.65	-3.47	88.18	-41.82	130.00	Peak
6		5741.221	122.98	-3.62	119.36	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

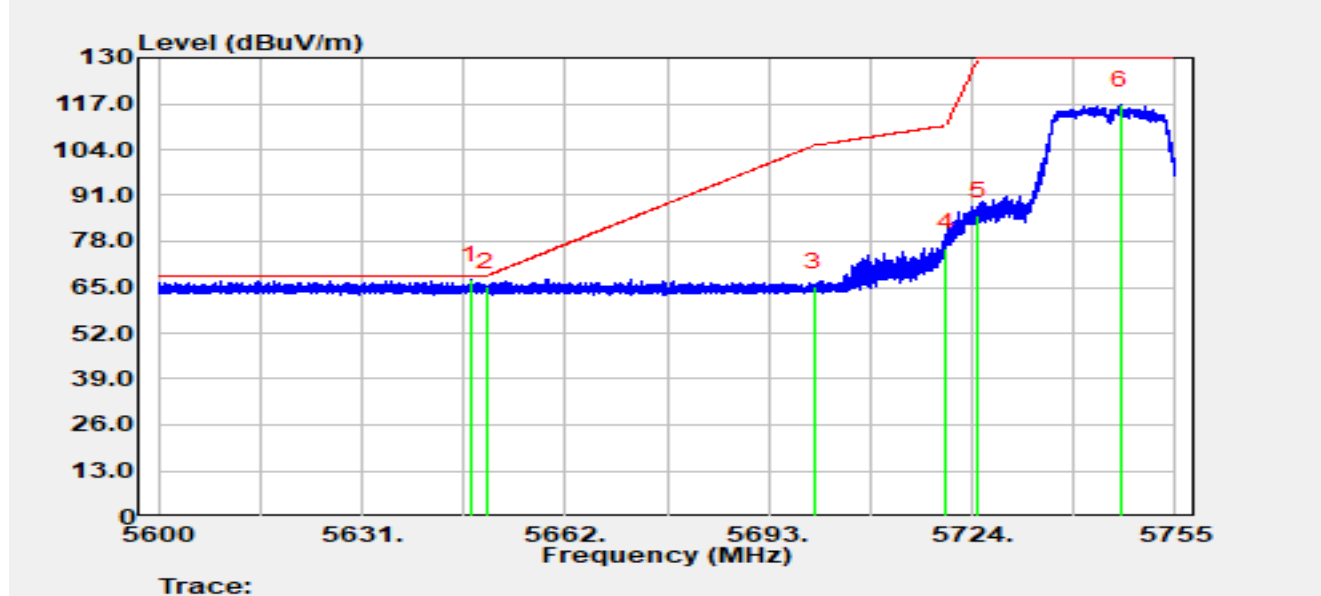


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5647.507	70.63	-3.65	66.99	-1.21	68.20	Peak
2		5650.000	68.73	-3.65	65.08	-3.12	68.20	Peak
3		5700.000	68.59	-3.47	65.11	-40.09	105.20	Peak
4		5720.000	79.62	-3.45	76.16	-34.64	110.80	Peak
5		5725.000	88.63	-3.47	85.17	-44.83	130.00	Peak
6		5746.723	120.16	-3.65	116.51	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

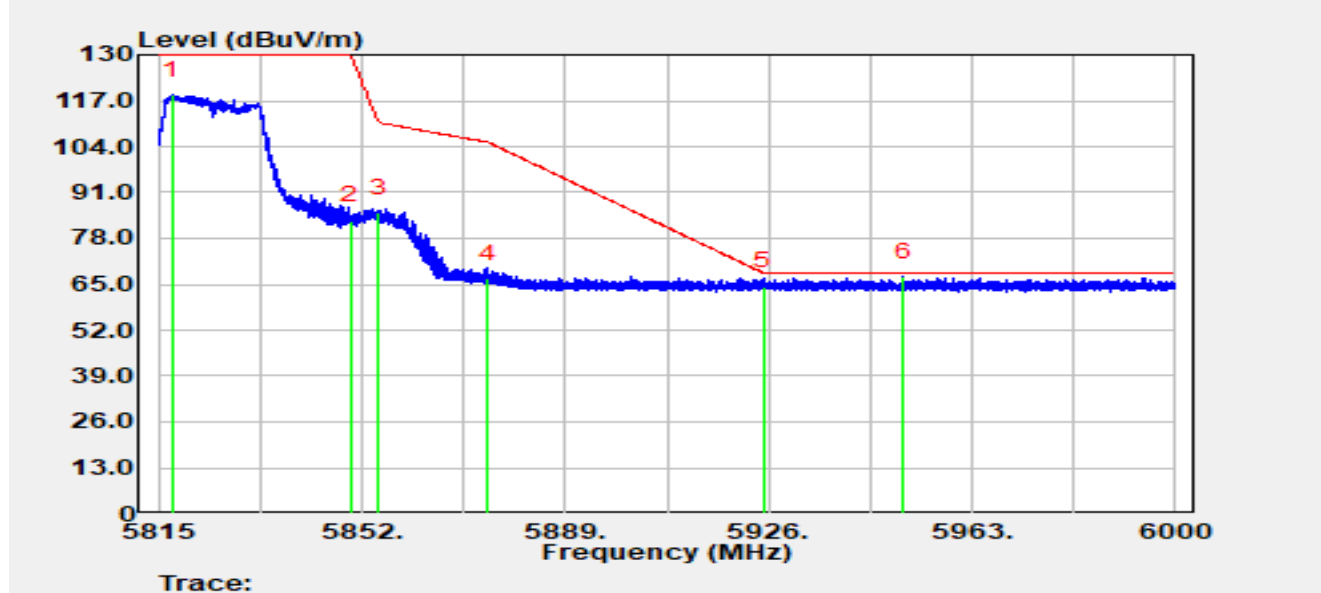


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5817.442	122.27	-3.80	118.47	N/A	N/A	Peak
2		5850.000	86.80	-3.75	83.04	-46.96	130.00	Peak
3		5855.000	88.89	-3.75	85.14	-25.66	110.80	Peak
4		5875.000	70.42	-3.82	66.60	-38.60	105.20	Peak
5		5925.000	68.02	-3.71	64.32	-3.88	68.20	Peak
6	*	5950.438	70.70	-3.68	67.02	-1.18	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

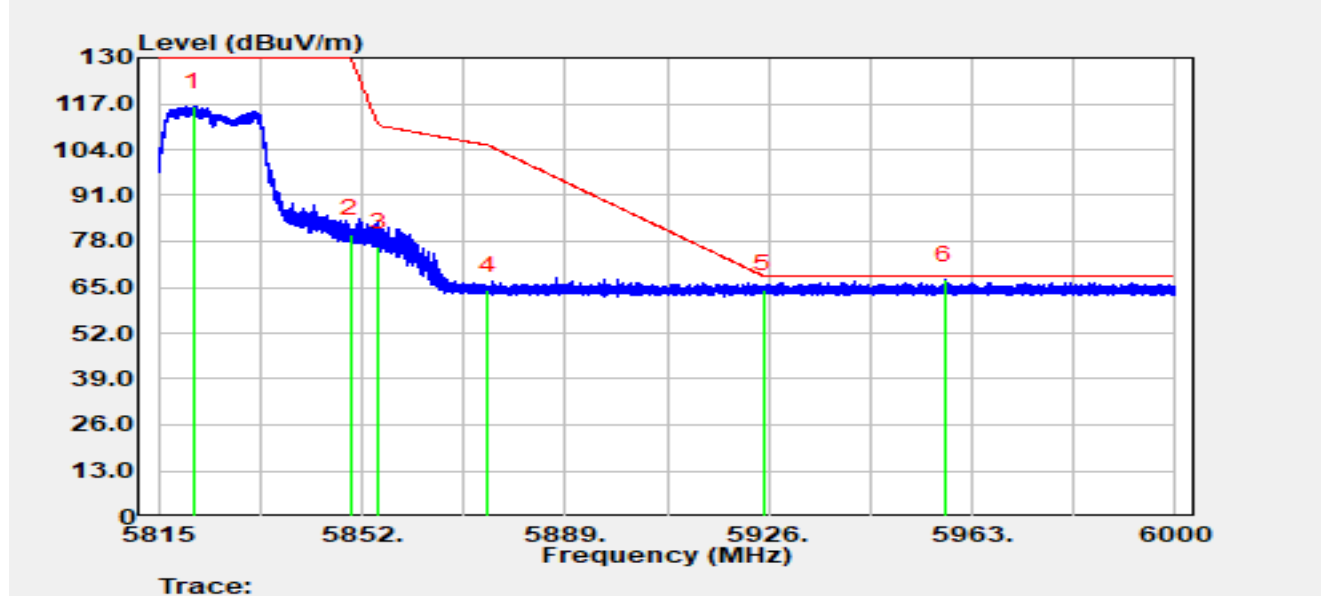


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5821.309	119.98	-3.78	116.20	N/A	N/A	Peak
2		5850.000	83.76	-3.75	80.01	-49.99	130.00	Peak
3		5855.000	80.22	-3.75	76.47	-34.33	110.80	Peak
4		5875.000	68.04	-3.82	64.22	-40.98	105.20	Peak
5		5925.000	68.01	-3.71	64.30	-3.90	68.20	Peak
6	*	5958.042	70.64	-3.66	66.99	-1.21	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

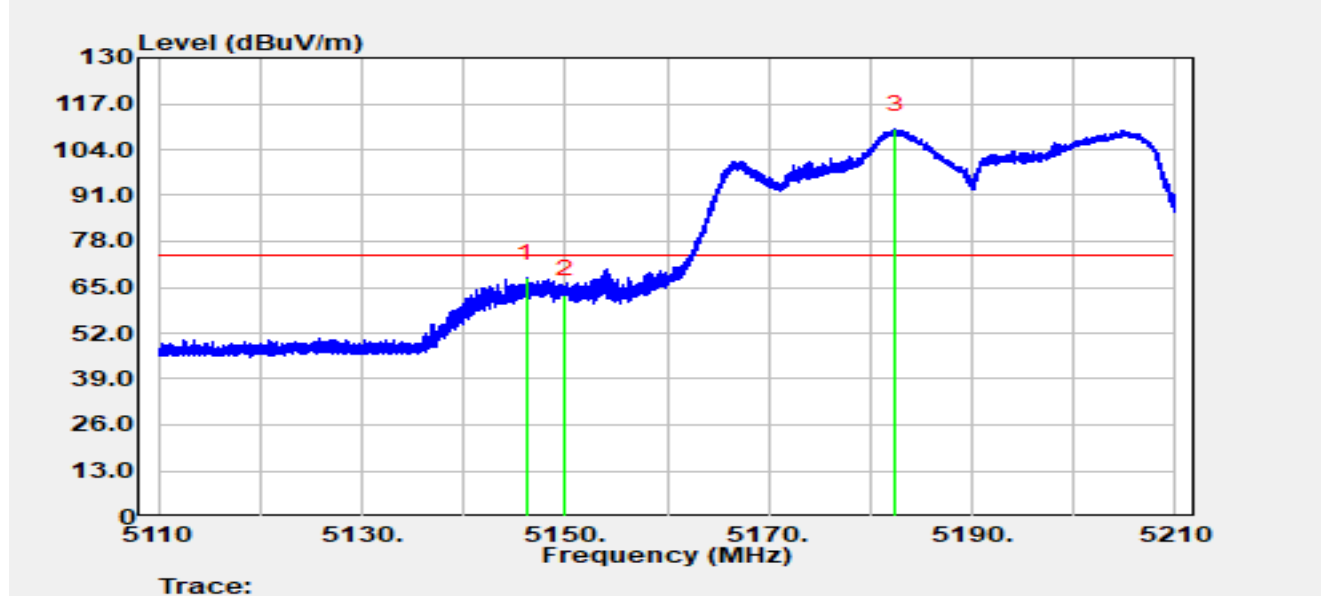


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.130	69.24	-1.56	67.68	-6.32	74.00	Peak
2		5150.000	63.51	-0.54	62.97	-11.03	74.00	Peak
3		5182.520	67.19	42.61	109.80	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

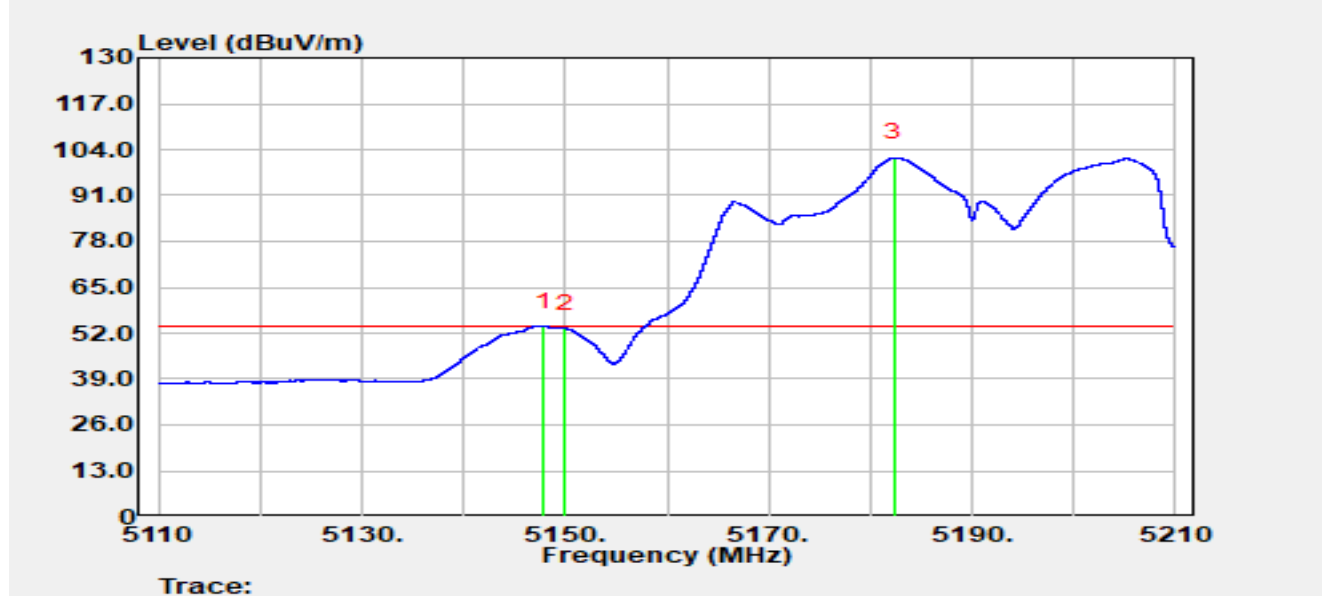


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.870	54.87	-0.97	53.90	-0.10	54.00	Average
2		5150.000	53.82	-0.54	53.27	-0.73	54.00	Average
3		5182.310	58.66	43.09	101.75	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

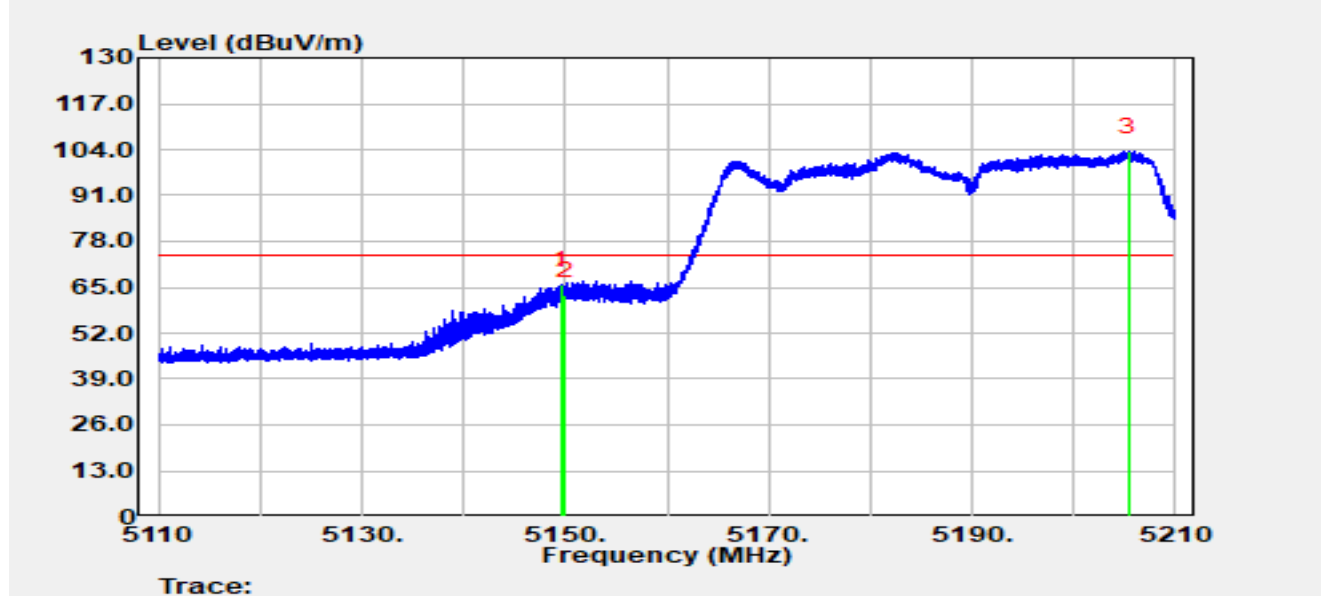


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.650	66.37	-0.74	65.63	-8.37	74.00	Peak
2		5150.000	63.30	-0.54	62.76	-11.24	74.00	Peak
3		5205.400	59.39	43.97	103.36	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

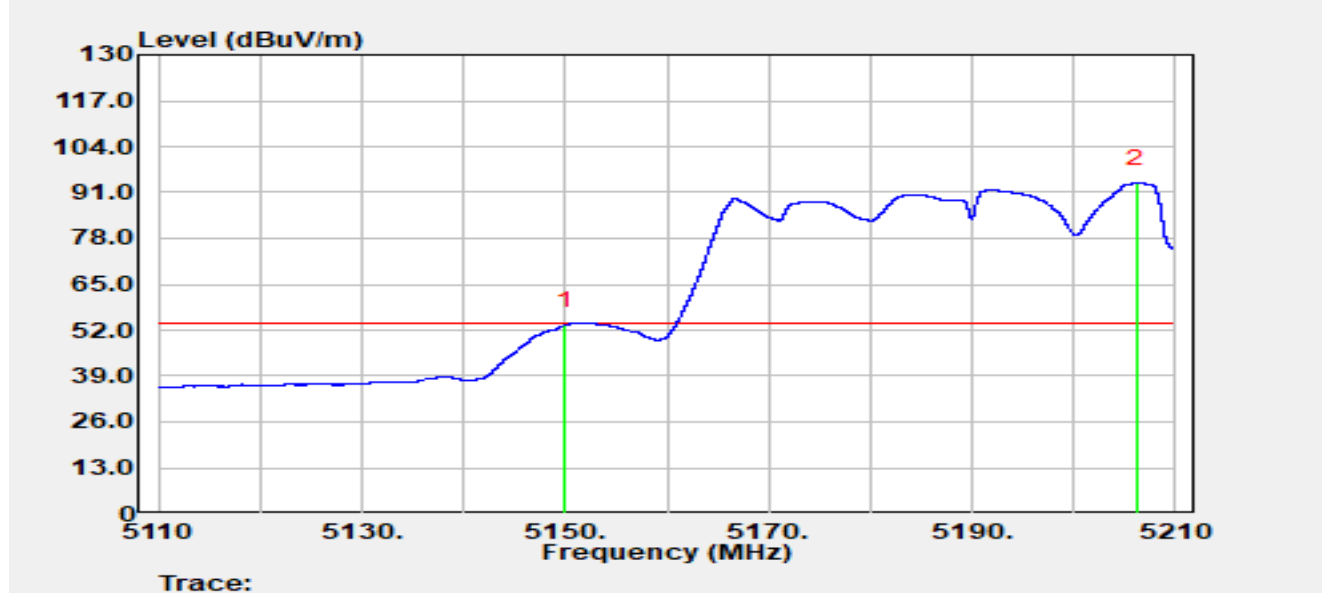


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	54.01	-0.54	53.47	-0.53	54.00	Average
2		5206.210	50.87	42.75	93.62	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

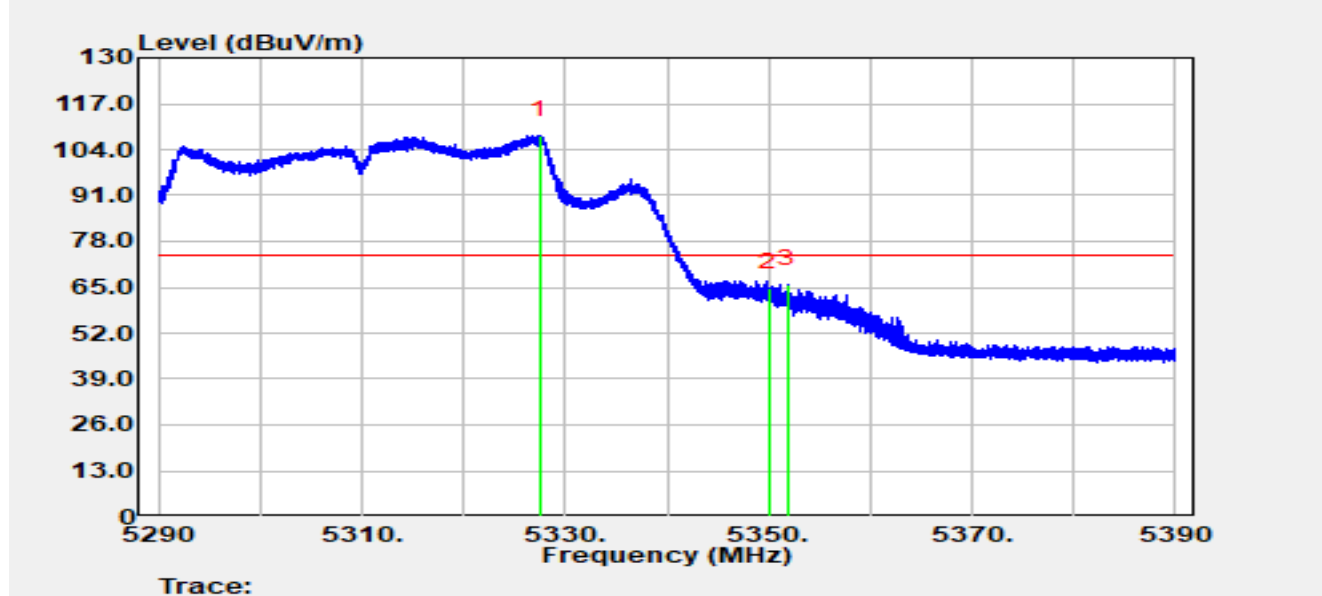


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.480	66.32	41.76	108.08	N/A	N/A	Peak
2		5350.000	62.56	2.28	64.84	-9.16	74.00	Peak
3	*	5351.820	64.79	1.05	65.83	-8.17	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

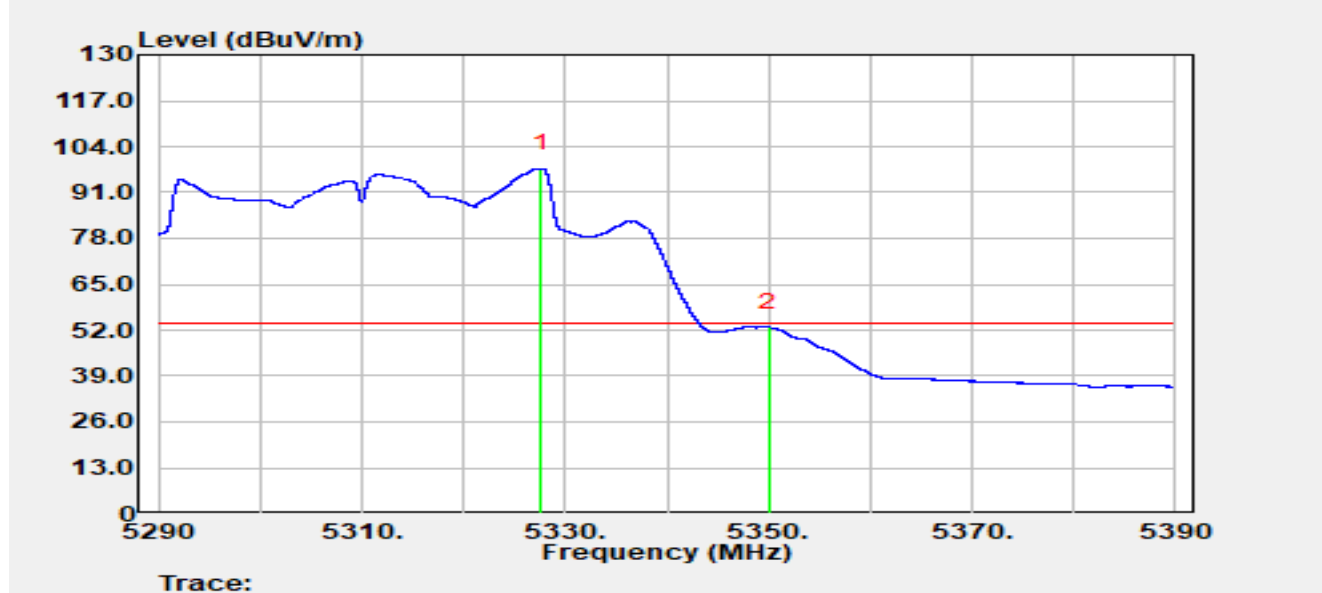


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.610	55.96	41.88	97.84	N/A	N/A	Average
2	*	5350.000	50.54	2.28	52.82	-1.18	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

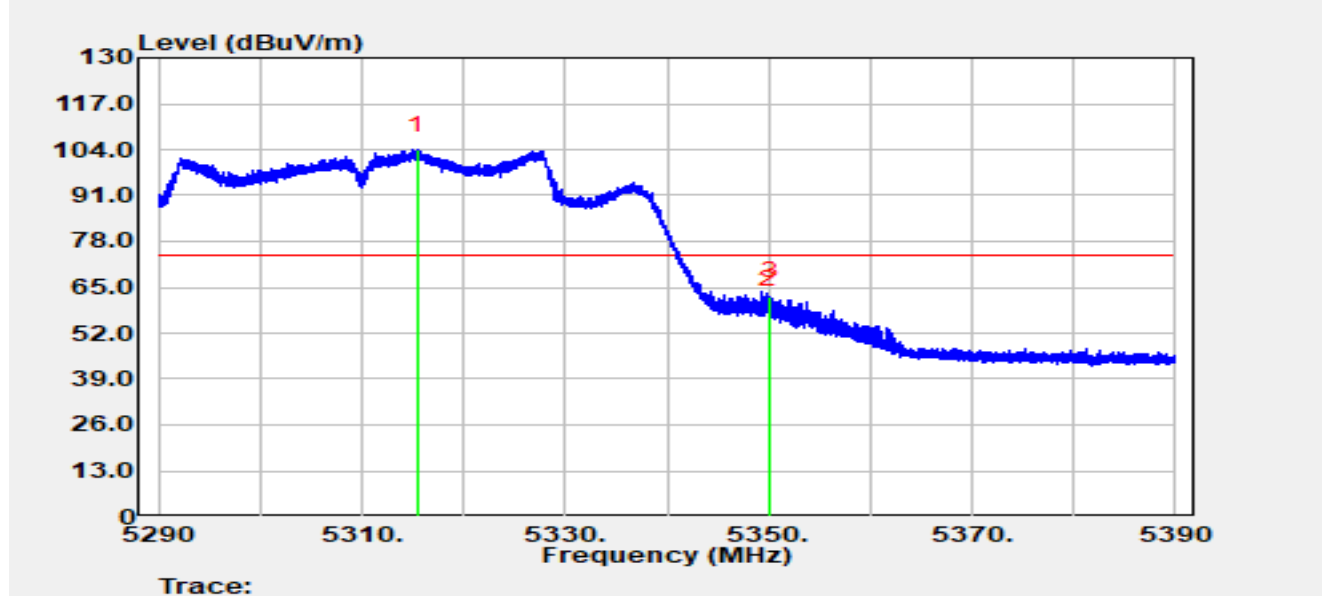


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5315.500	55.12	48.85	103.97	N/A	N/A	Peak
2		5350.000	57.64	2.28	59.93	-14.07	74.00	Peak
3	*	5350.210	60.27	2.17	62.44	-11.56	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

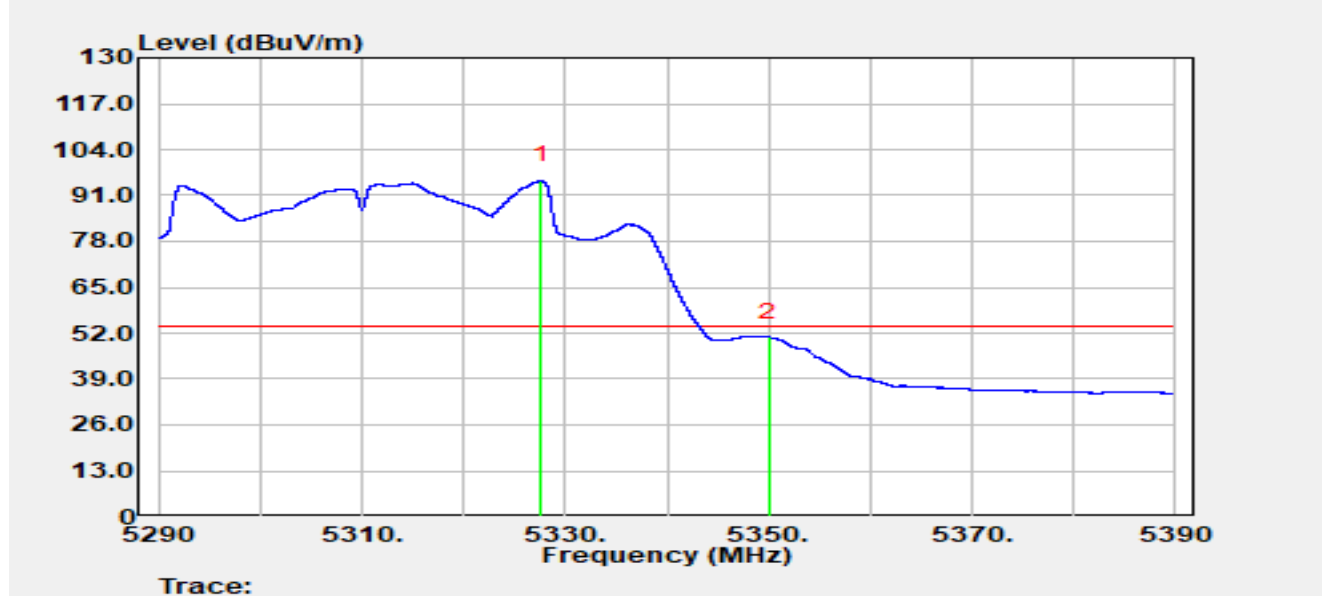


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.680	53.32	41.95	95.27	N/A	N/A	Average
2	*	5350.000	48.58	2.28	50.86	-3.14	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

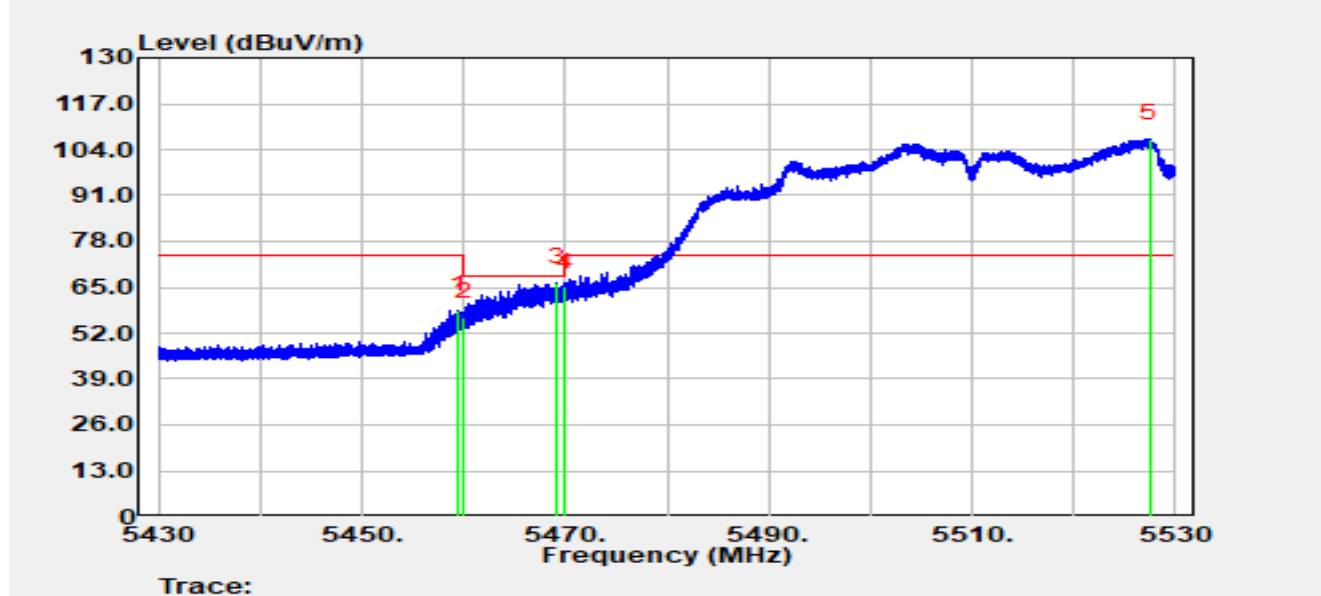


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.530	59.22	-0.75	58.46	-15.54	74.00	Peak
2		5460.000	57.15	-0.69	56.46	-11.74	68.20	Peak
3	*	5469.250	65.51	0.79	66.30	-1.90	68.20	Peak
4		5470.000	64.10	1.00	65.10	-3.10	68.20	Peak
5		5527.430	60.96	46.16	107.11	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

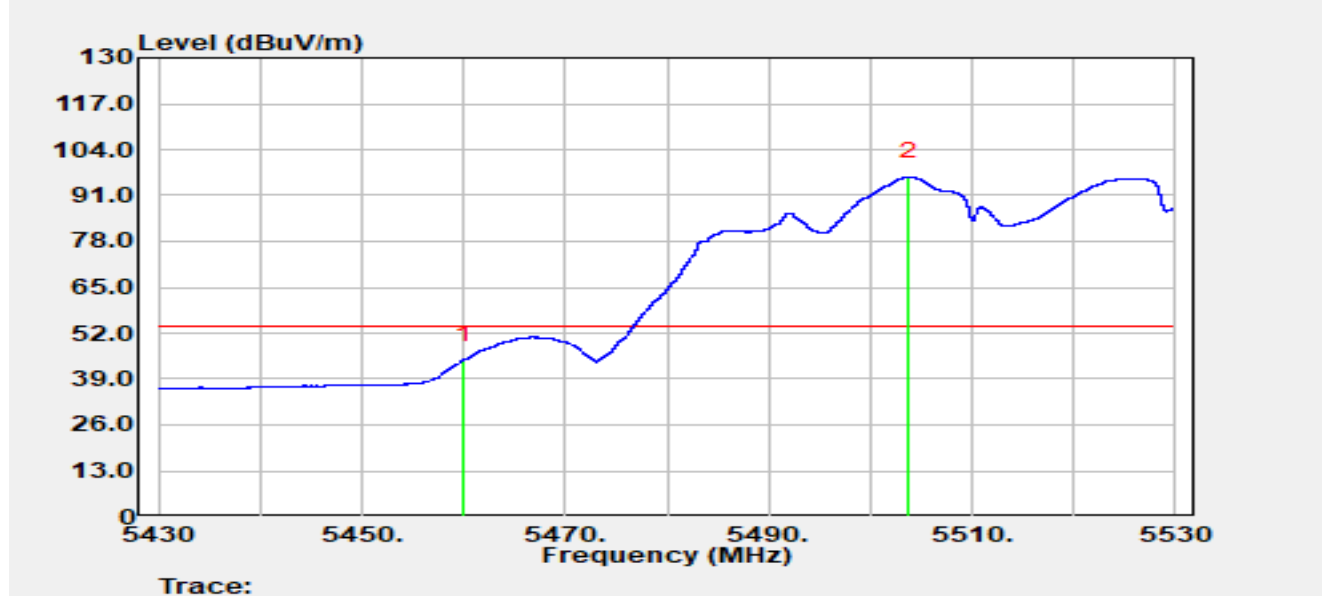


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	45.00	-0.69	44.31	-9.69	54.00	Average
2		5503.750	50.40	45.90	96.30	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

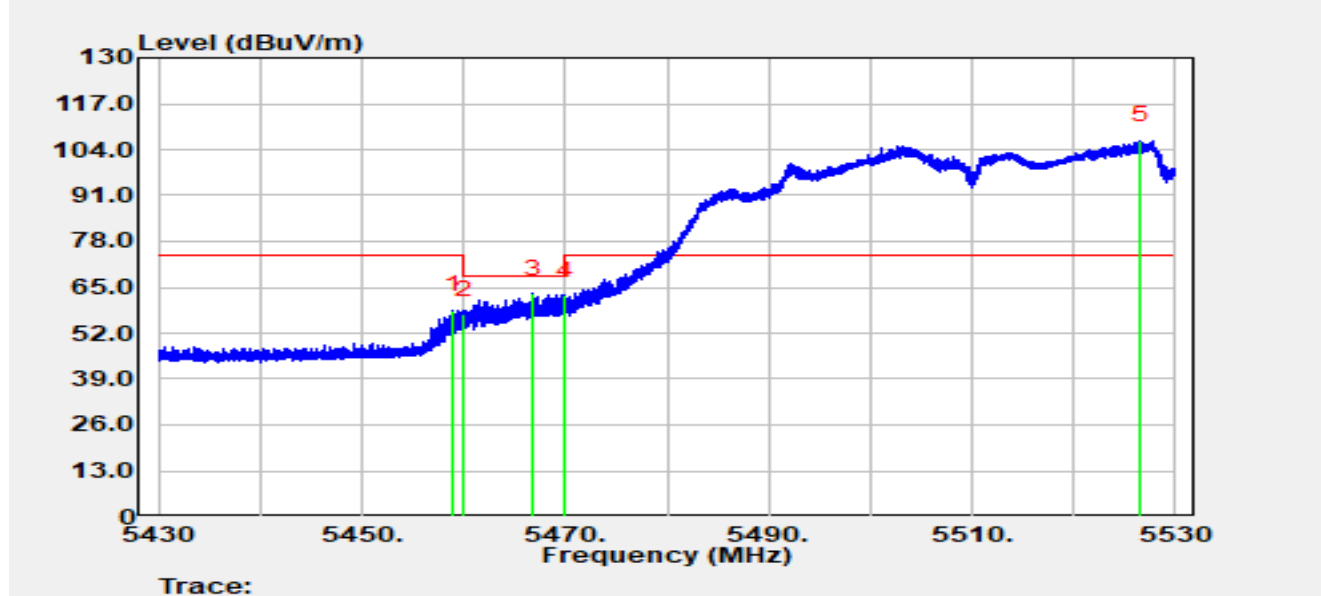


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.970	59.40	-0.81	58.59	-15.41	74.00	Peak
2		5460.000	58.07	-0.69	57.38	-10.82	68.20	Peak
3	*	5466.780	63.09	0.06	63.15	-5.05	68.20	Peak
4		5470.000	61.55	1.00	62.55	-5.65	68.20	Peak
5		5526.600	61.95	44.63	106.58	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

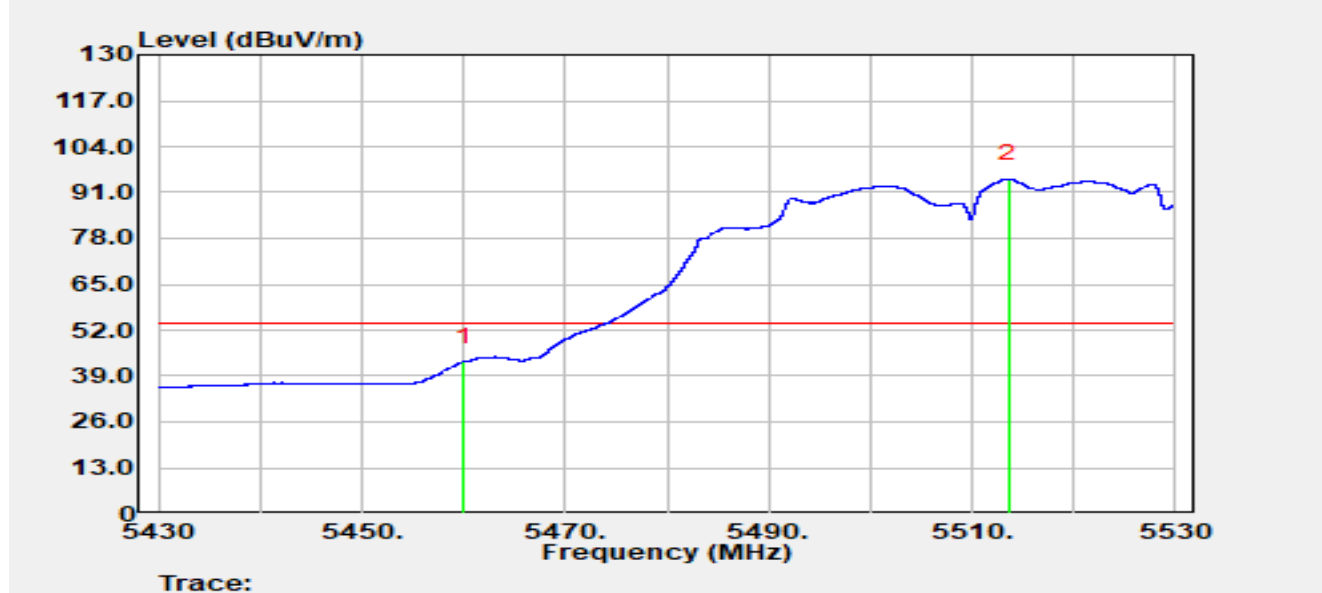


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	43.69	-0.69	43.00	-11.00	54.00	Average
2		5513.590	50.02	44.75	94.77	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

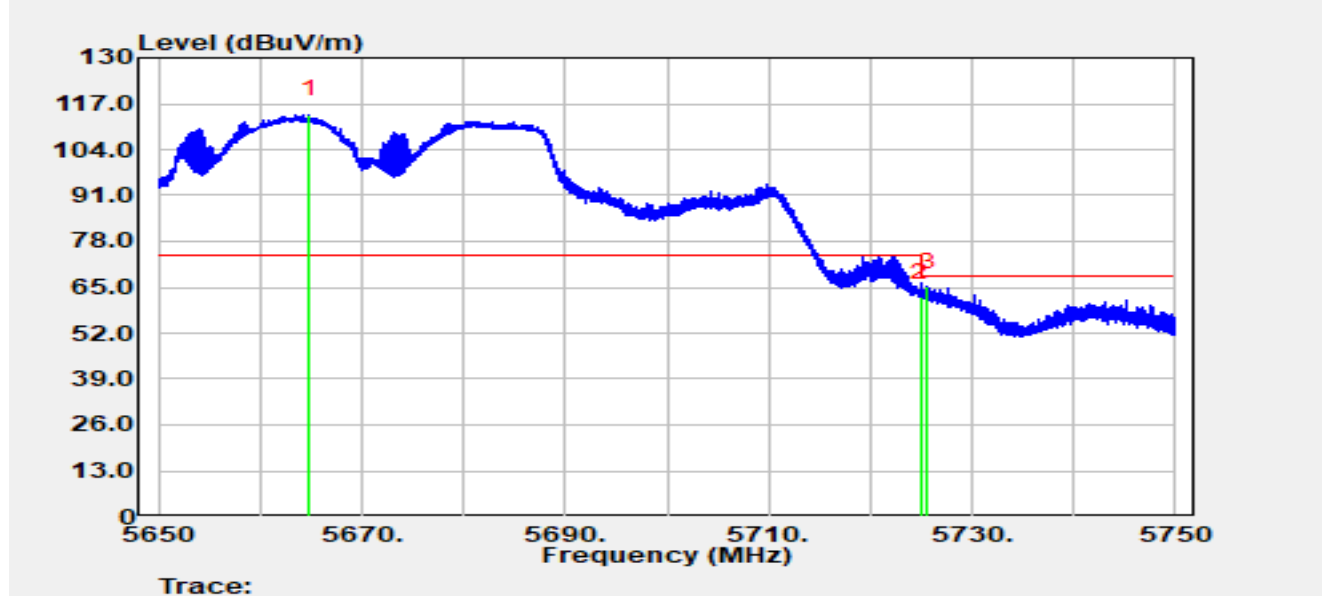


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5664.810	69.73	44.26	113.99	N/A	N/A	Peak
2		5725.000	61.13	1.01	62.14	-6.06	68.20	Peak
3	*	5725.650	64.52	0.64	65.16	-3.04	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

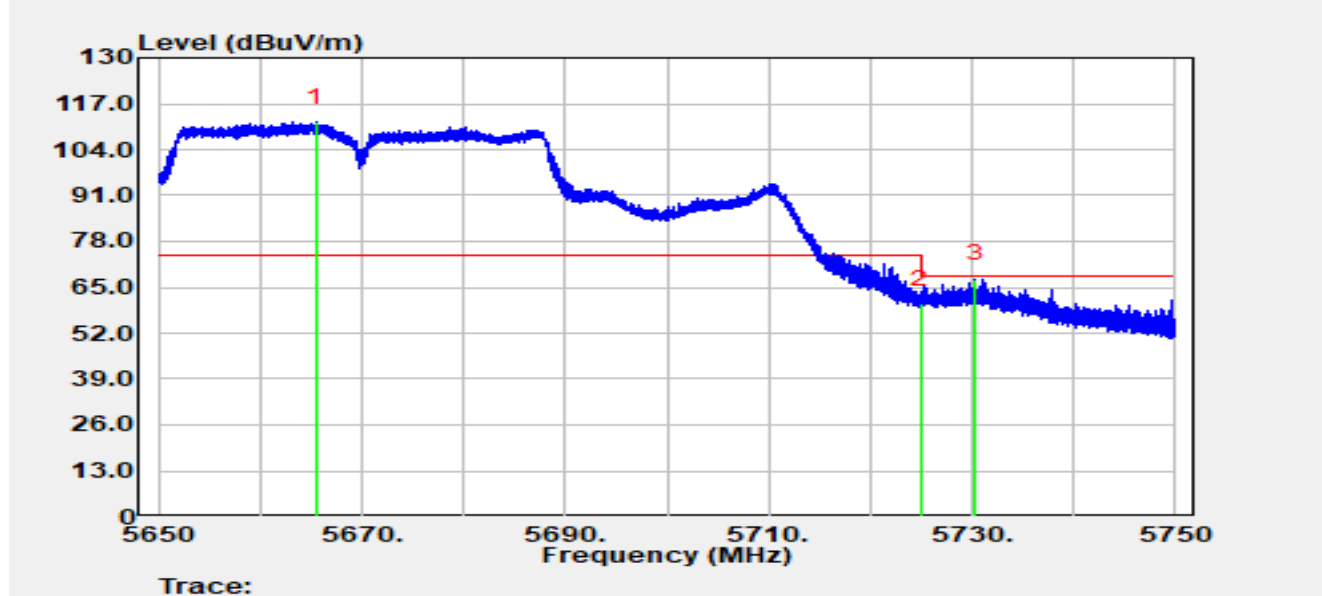


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5665.480	66.46	45.21	111.67	N/A	N/A	Peak
2		5725.000	59.14	1.01	60.15	-8.05	68.20	Peak
3	*	5730.350	68.23	-0.80	67.43	-0.77	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

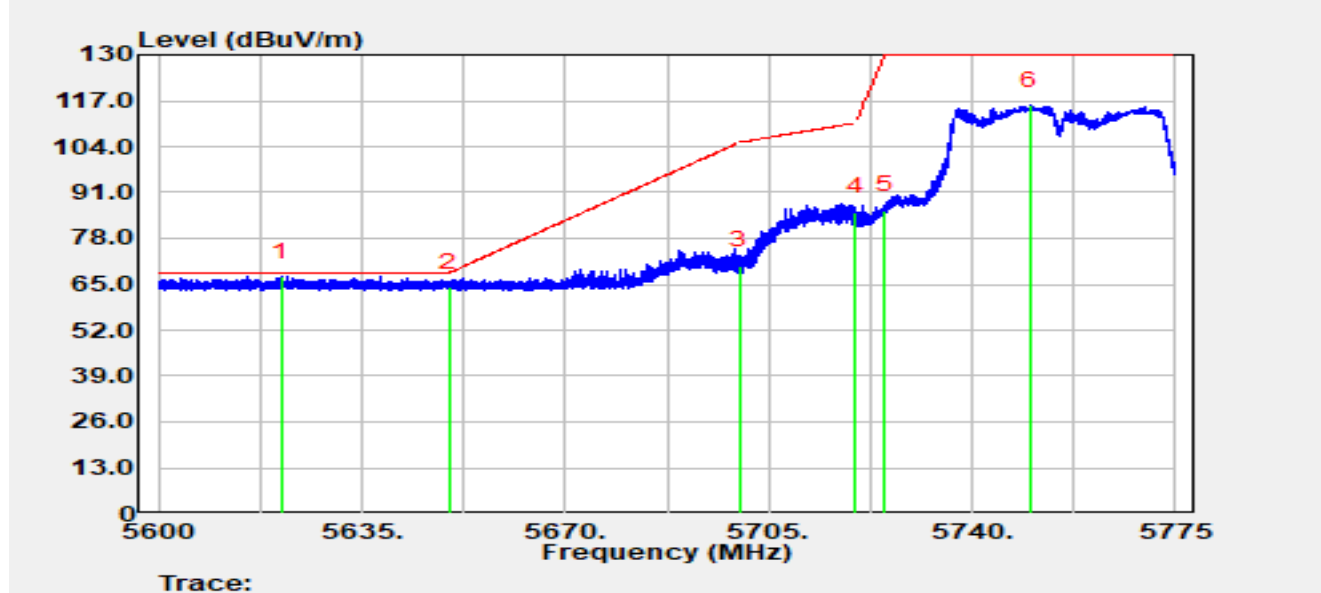


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5621.175	70.52	-3.37	67.14	-1.06	68.20	Peak
2		5650.000	67.90	-3.65	64.25	-3.95	68.20	Peak
3		5700.000	73.77	-3.47	70.29	-34.91	105.20	Peak
4		5720.000	88.87	-3.45	85.42	-25.38	110.80	Peak
5		5725.000	89.53	-3.47	86.06	-43.94	130.00	Peak
6		5749.975	119.27	-3.65	115.62	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

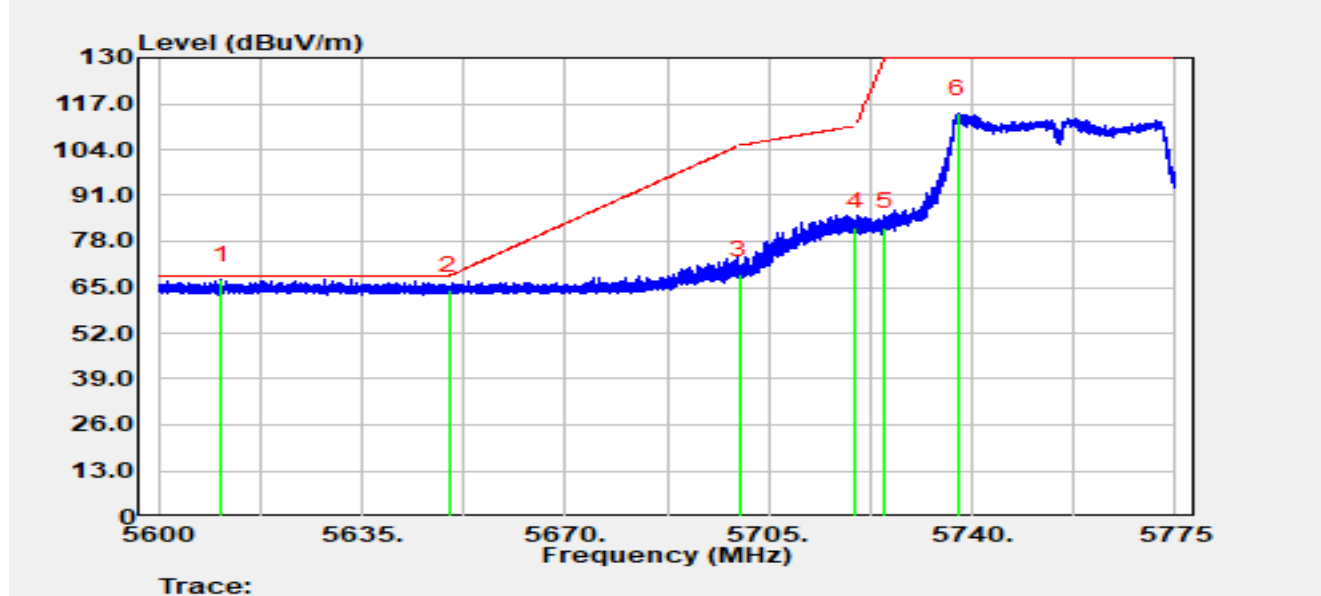


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5610.868	70.69	-3.49	67.20	-1.00	68.20	Peak
2		5650.000	67.72	-3.65	64.07	-4.13	68.20	Peak
3		5700.000	71.92	-3.47	68.44	-36.76	105.20	Peak
4		5720.000	85.51	-3.45	82.05	-28.75	110.80	Peak
5		5725.000	85.48	-3.47	82.02	-47.98	130.00	Peak
6		5737.533	117.65	-3.58	114.06	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

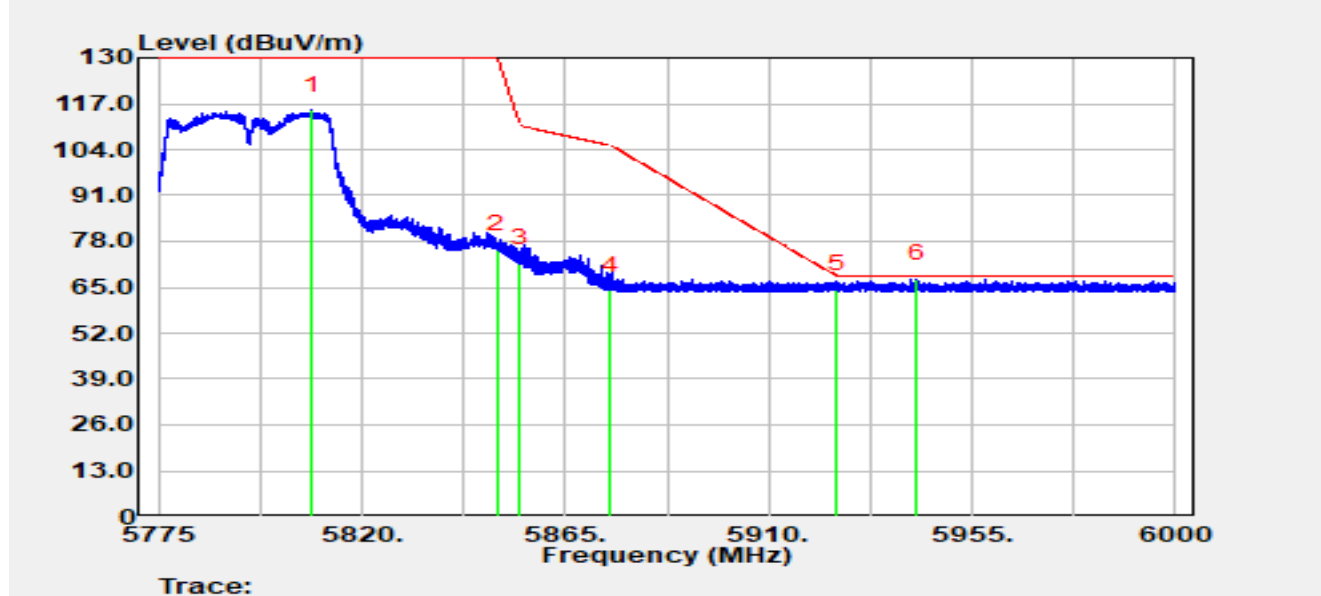


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5808.817	118.89	-3.82	115.07	N/A	N/A	Peak
2		5850.000	79.48	-3.75	75.73	-54.27	130.00	Peak
3		5855.000	75.61	-3.75	71.86	-38.94	110.80	Peak
4		5875.000	67.96	-3.82	64.14	-41.06	105.20	Peak
5		5925.000	68.09	-3.71	64.39	-3.81	68.20	Peak
6	*	5942.670	70.99	-3.70	67.29	-0.91	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

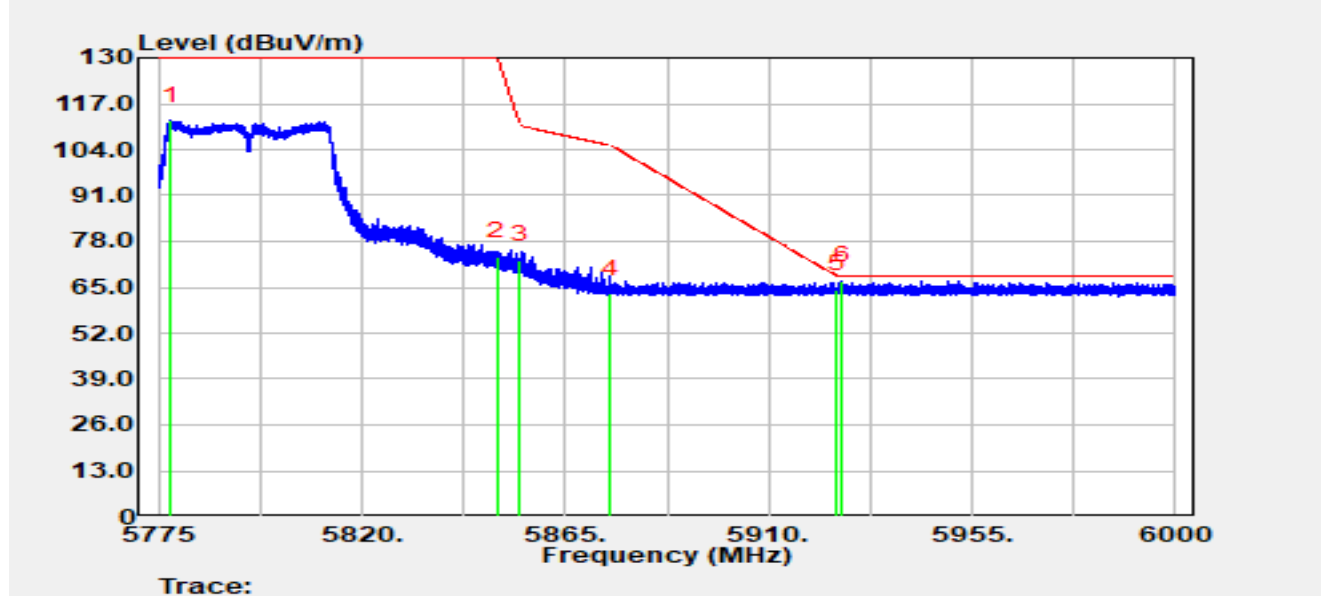


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5777.723	115.95	-3.70	112.25	N/A	N/A	Peak
2		5850.000	77.52	-3.75	73.77	-56.23	130.00	Peak
3		5855.000	76.55	-3.75	72.80	-38.00	110.80	Peak
4		5875.000	67.03	-3.82	63.21	-41.99	105.20	Peak
5		5925.000	68.08	-3.71	64.37	-3.83	68.20	Peak
6	*	5926.313	70.54	-3.69	66.85	-1.35	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

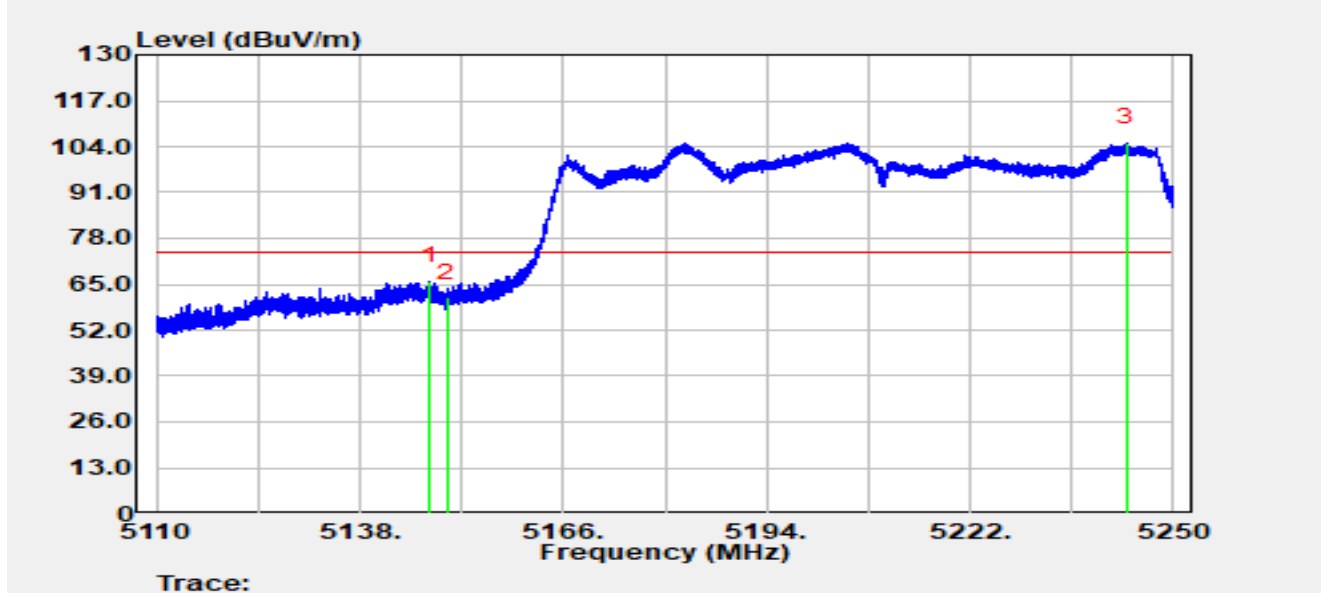


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.562	66.86	-1.04	65.82	-8.18	74.00	Peak
2		5150.000	61.71	-0.54	61.16	-12.84	74.00	Peak
3		5243.448	60.84	44.15	104.99	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

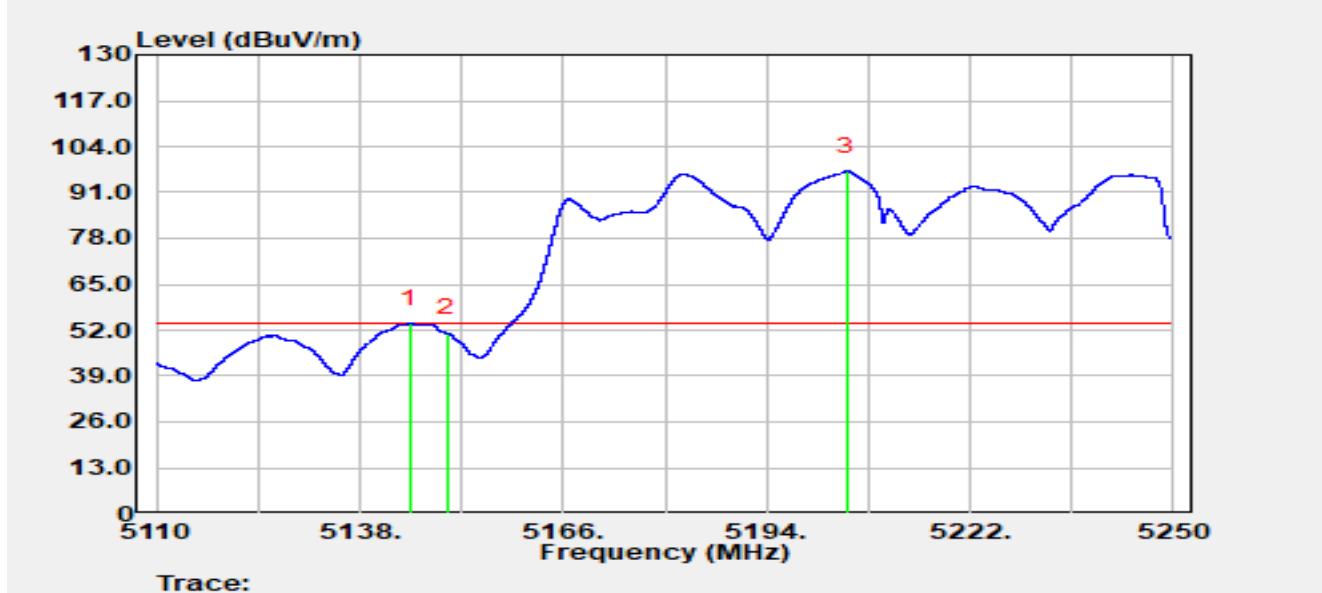


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.818	55.65	-1.69	53.96	-0.04	54.00	Average
2		5149.998	51.73	-0.54	51.18	-2.82	54.00	Average
3		5205.102	52.64	44.41	97.05	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

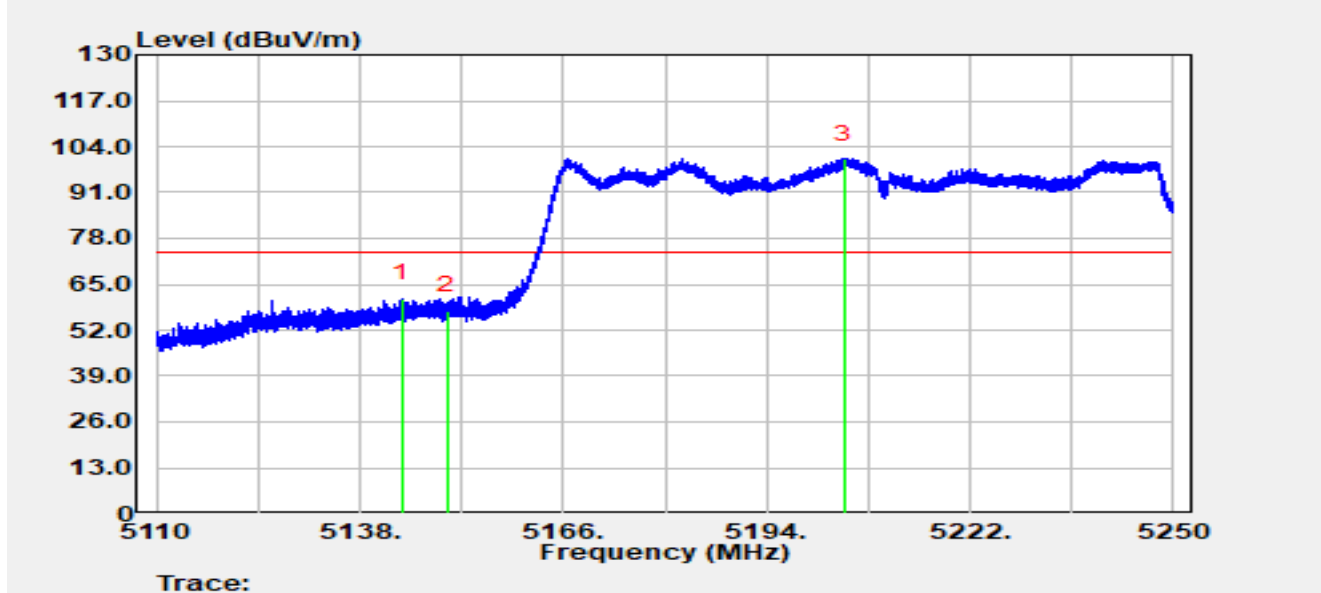


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.852	62.59	-1.57	61.02	-12.98	74.00	Peak
2		5150.000	57.98	-0.54	57.43	-16.57	74.00	Peak
3		5204.584	56.05	44.44	100.49	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

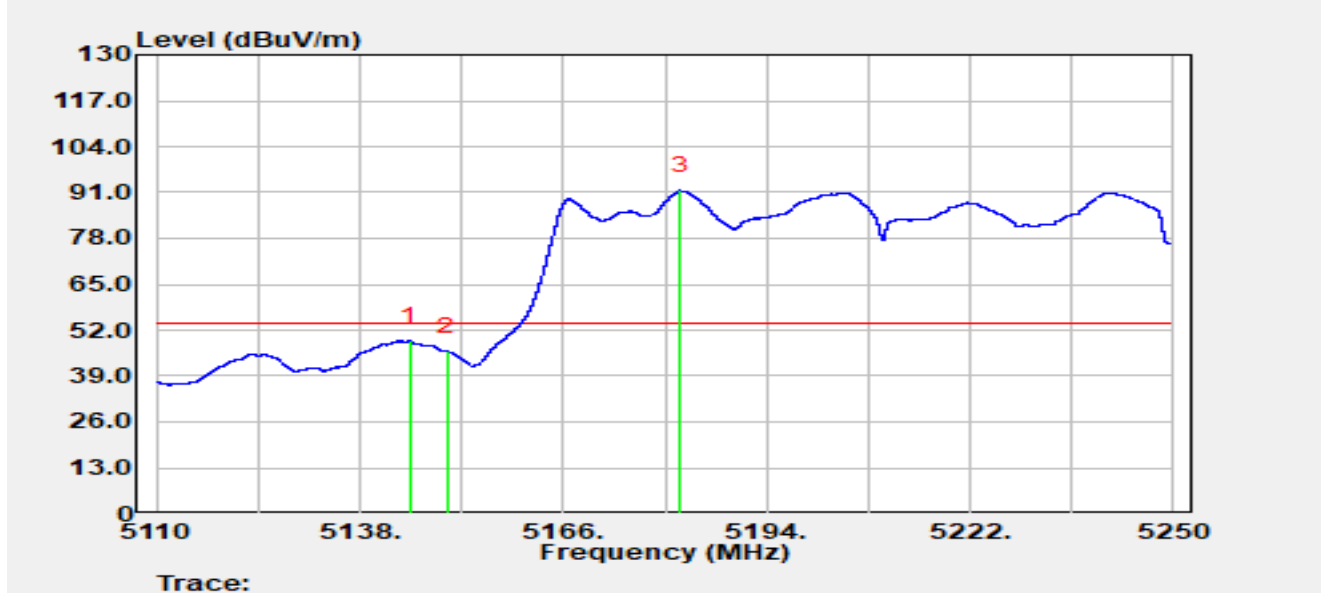


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.832	50.60	-1.69	48.91	-5.09	54.00	Average
2		5150.000	46.48	-0.54	45.93	-8.07	54.00	Average
3		5182.030	47.77	43.73	91.51	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

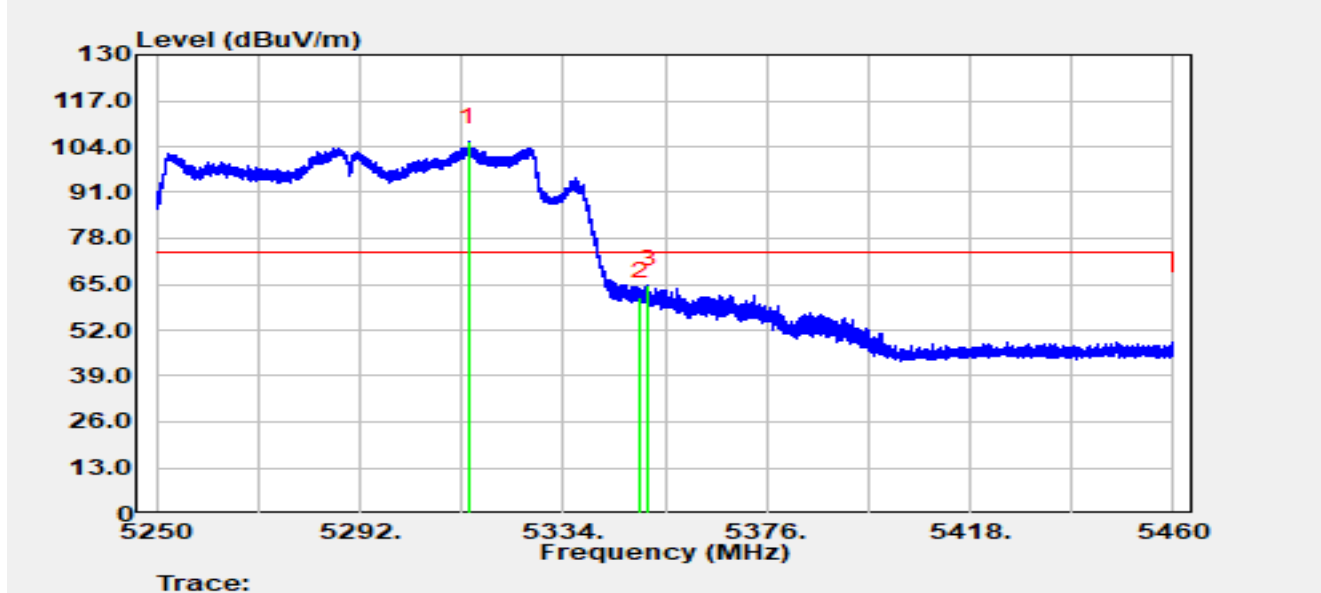


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.554	55.76	49.47	105.24	N/A	N/A	Peak
2		5350.000	59.27	2.28	61.55	-12.45	74.00	Peak
3	*	5351.598	63.57	1.21	64.78	-9.22	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

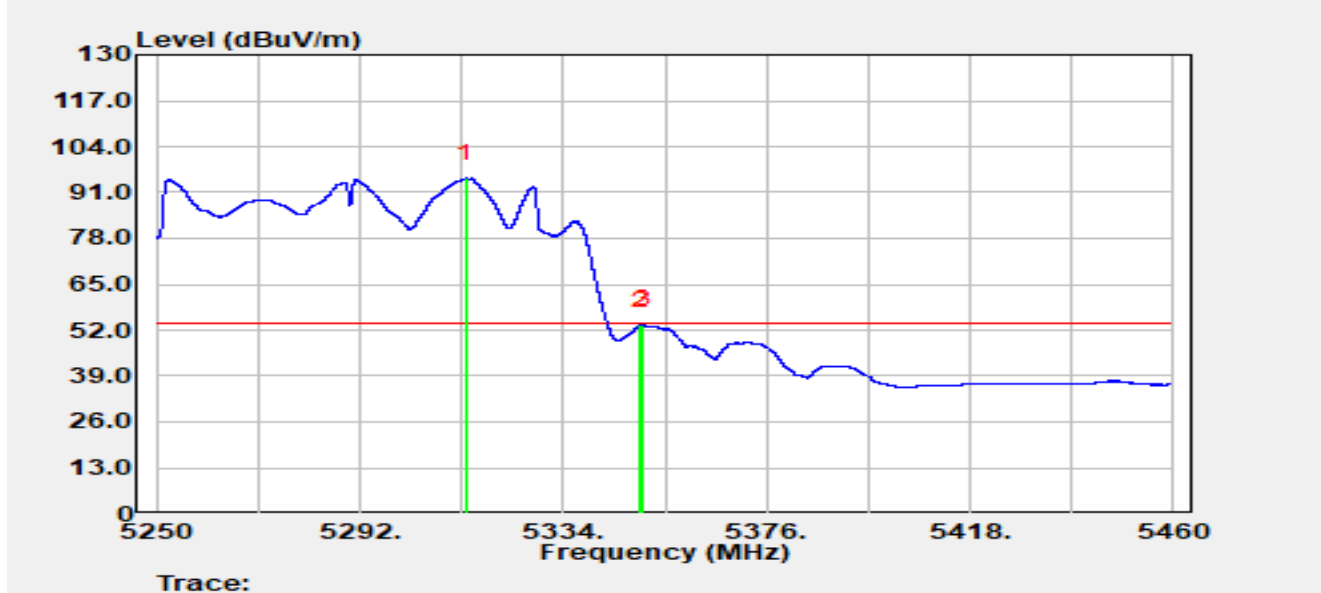


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.008	45.61	49.38	94.99	N/A	N/A	Average
2		5350.000	51.12	2.28	53.40	-0.60	54.00	Average
3	*	5350.380	51.47	2.07	53.55	-0.45	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

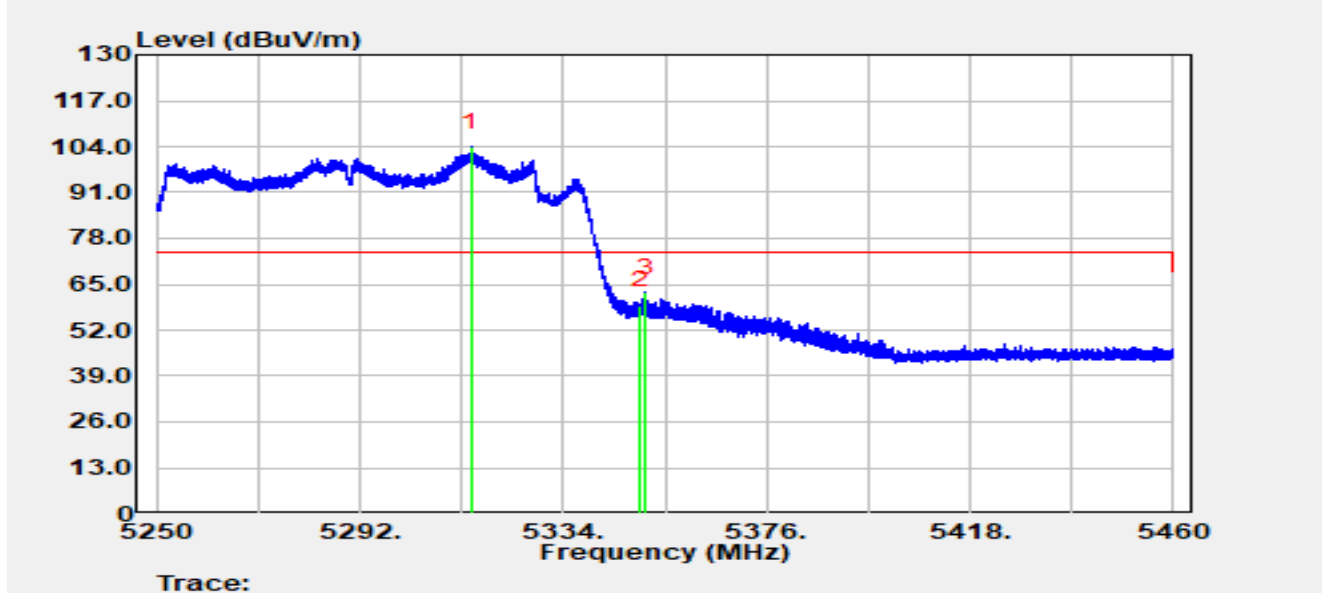


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5314.932	54.26	49.53	103.79	N/A	N/A	Peak
2		5350.000	56.78	2.28	59.07	-14.93	74.00	Peak
3	*	5351.010	61.14	1.64	62.78	-11.22	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

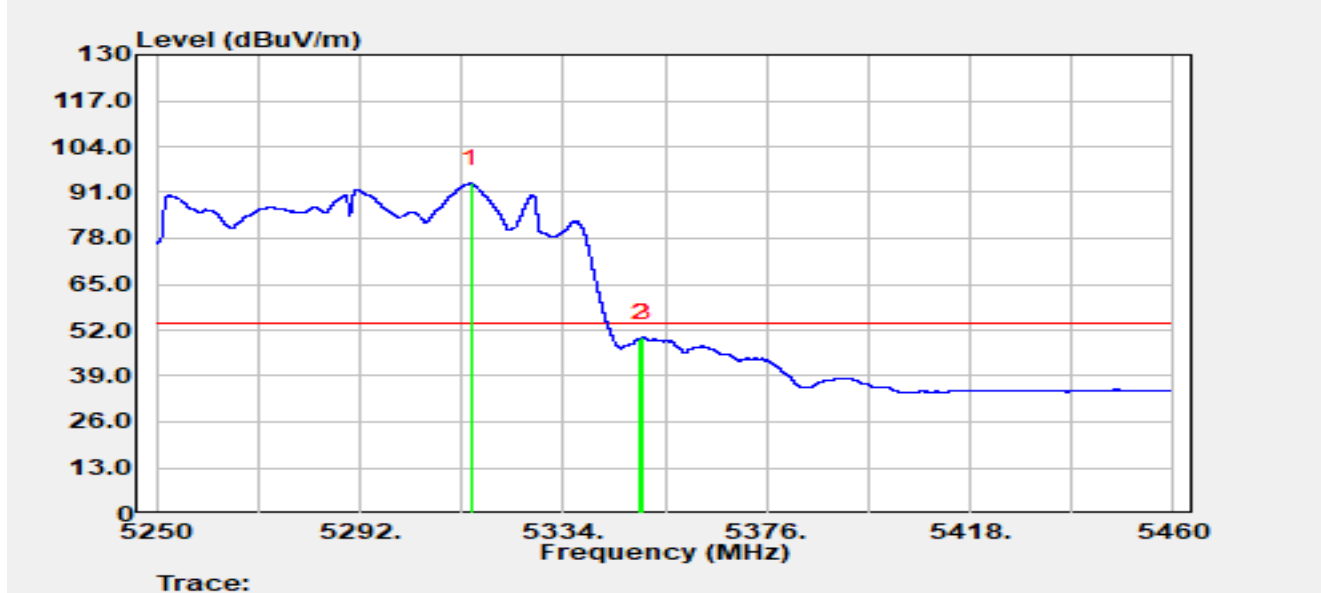


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5315.100	44.13	49.56	93.69	N/A	N/A	Average
2		5350.000	47.39	2.28	49.67	-4.33	54.00	Average
3	*	5350.380	47.82	2.07	49.90	-4.10	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

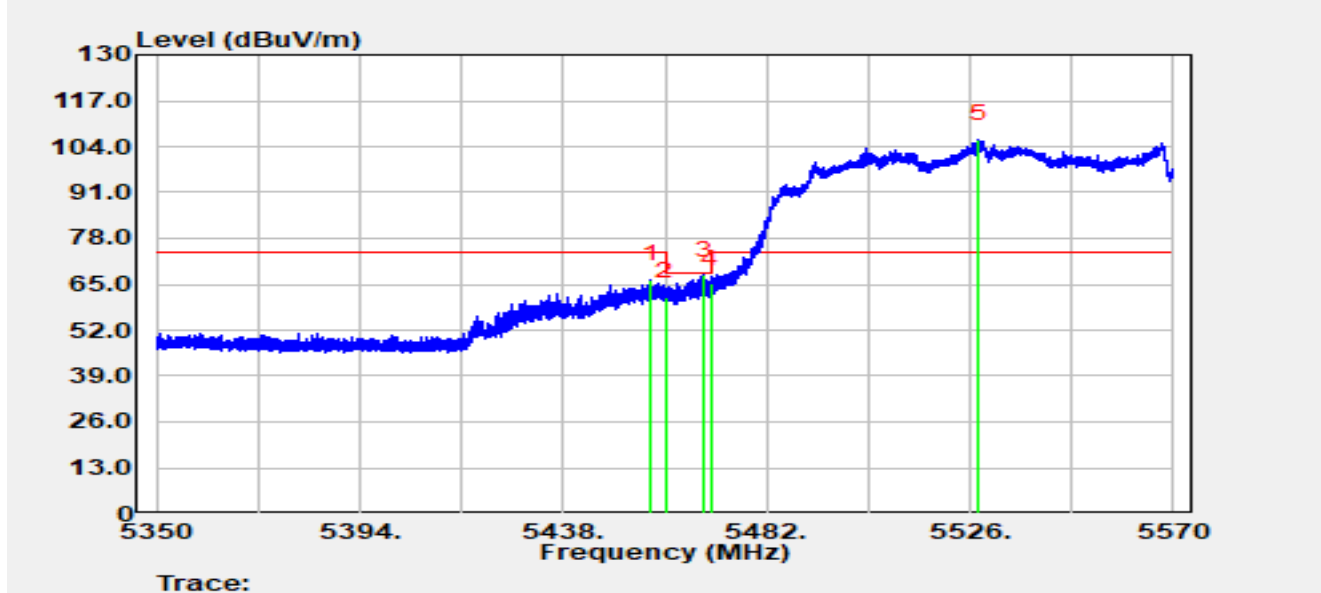


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.074	67.34	-0.91	66.43	-7.57	74.00	Peak
2		5460.000	62.22	-0.69	61.52	-6.68	68.20	Peak
3	*	5468.382	67.02	0.50	67.51	-0.69	68.20	Peak
4		5470.000	64.18	1.00	65.18	-3.02	68.20	Peak
5		5527.914	58.84	47.17	106.02	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

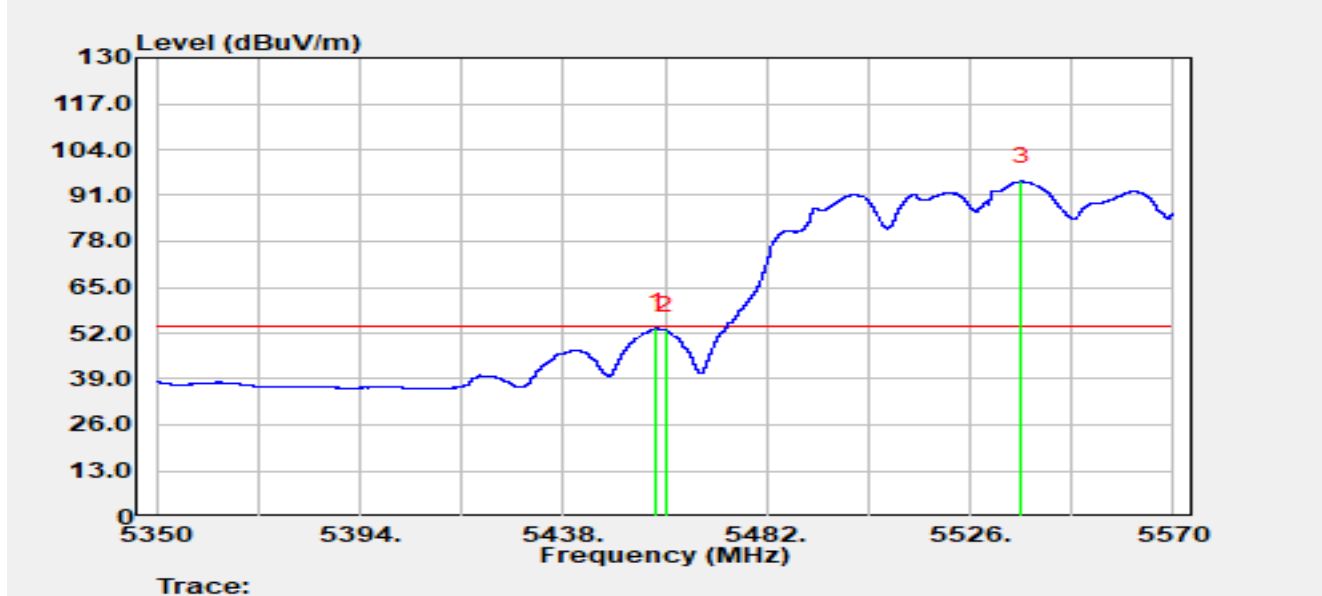


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5458.240	54.29	-0.81	53.48	-0.52	54.00	Average
2		5460.000	53.59	-0.69	52.89	-1.11	54.00	Average
3		5537.220	51.91	43.06	94.96	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

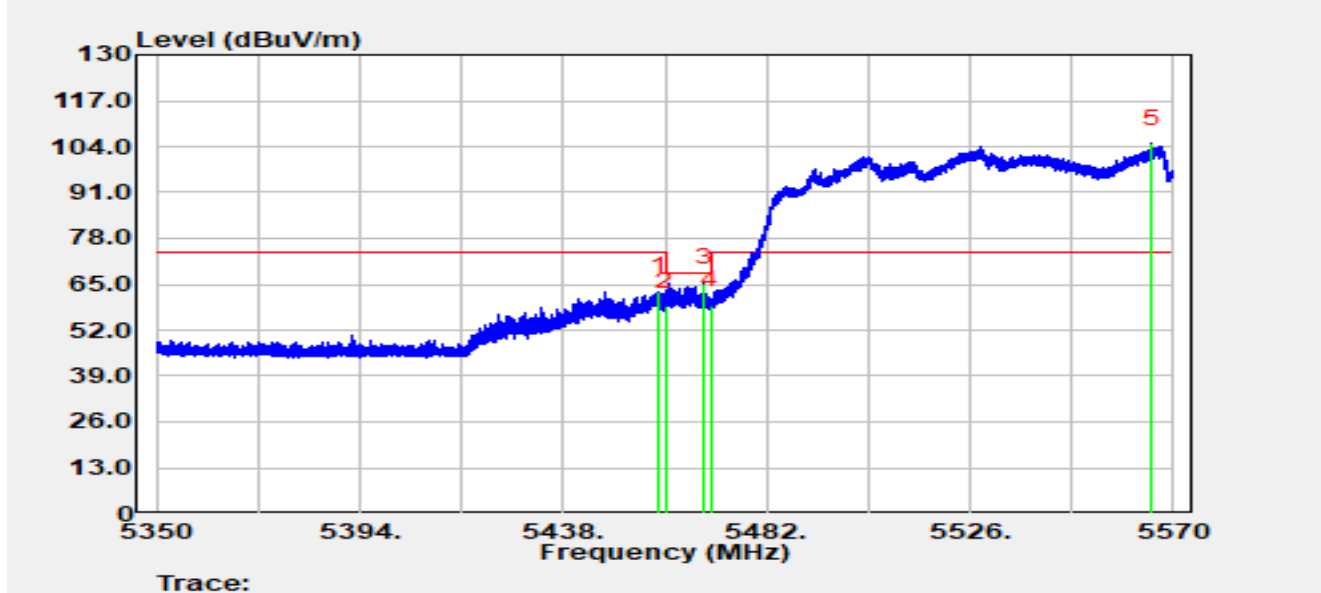


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.658	63.66	-0.81	62.85	-11.15	74.00	Peak
2		5460.000	59.41	-0.69	58.72	-9.48	68.20	Peak
3	*	5468.404	64.95	0.50	65.46	-2.74	68.20	Peak
4		5470.000	57.93	1.00	58.93	-9.27	68.20	Peak
5		5565.402	62.12	42.72	104.84	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

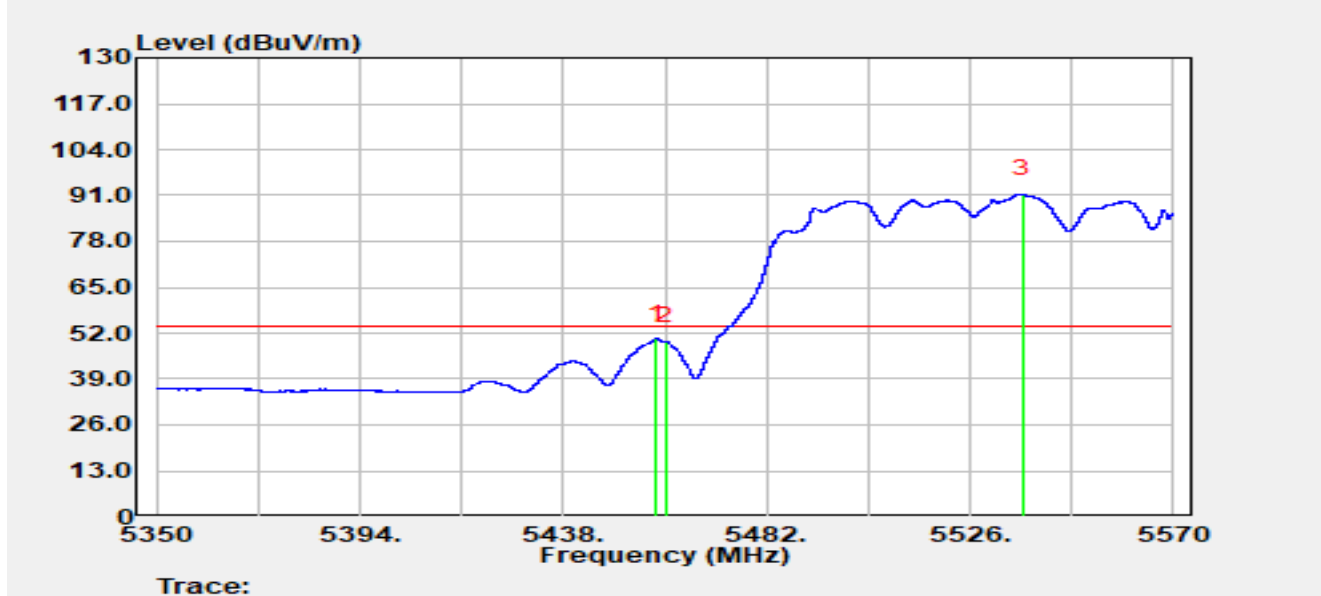


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5458.086	51.30	-0.83	50.46	-3.54	54.00	Average
2		5460.000	50.42	-0.69	49.73	-4.27	54.00	Average
3		5537.418	48.34	42.92	91.26	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

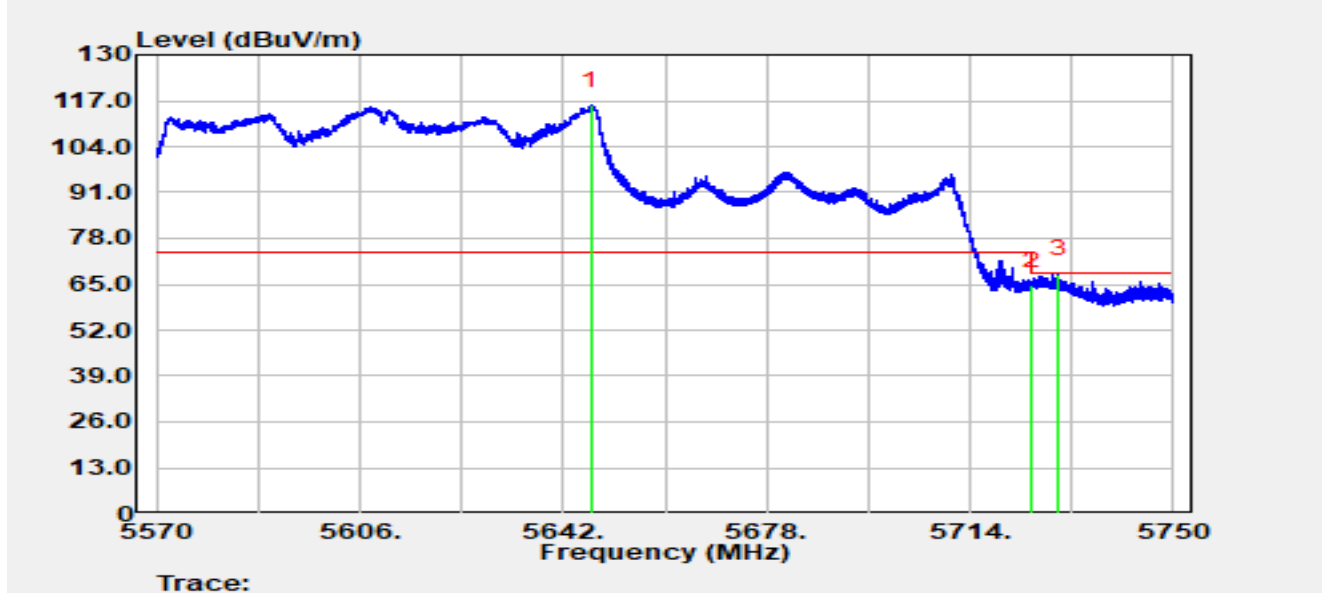


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5646.806	71.13	44.63	115.76	N/A	N/A	Peak
2		5725.000	63.55	1.01	64.56	-3.64	68.20	Peak
3	*	5729.588	68.43	-0.69	67.74	-0.46	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

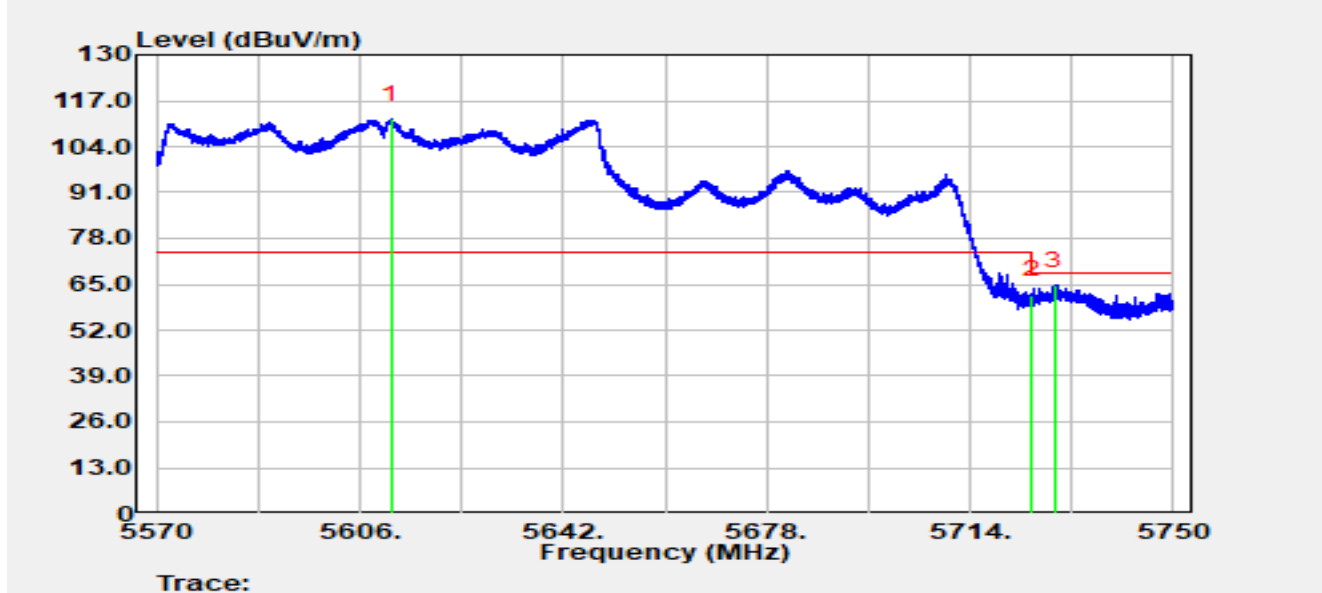


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5611.472	60.89	50.91	111.80	N/A	N/A	Peak
2		5725.000	60.85	1.01	61.86	-6.34	68.20	Peak
3	*	5728.904	65.22	-0.50	64.72	-3.48	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5°C	Humidity	50.8%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

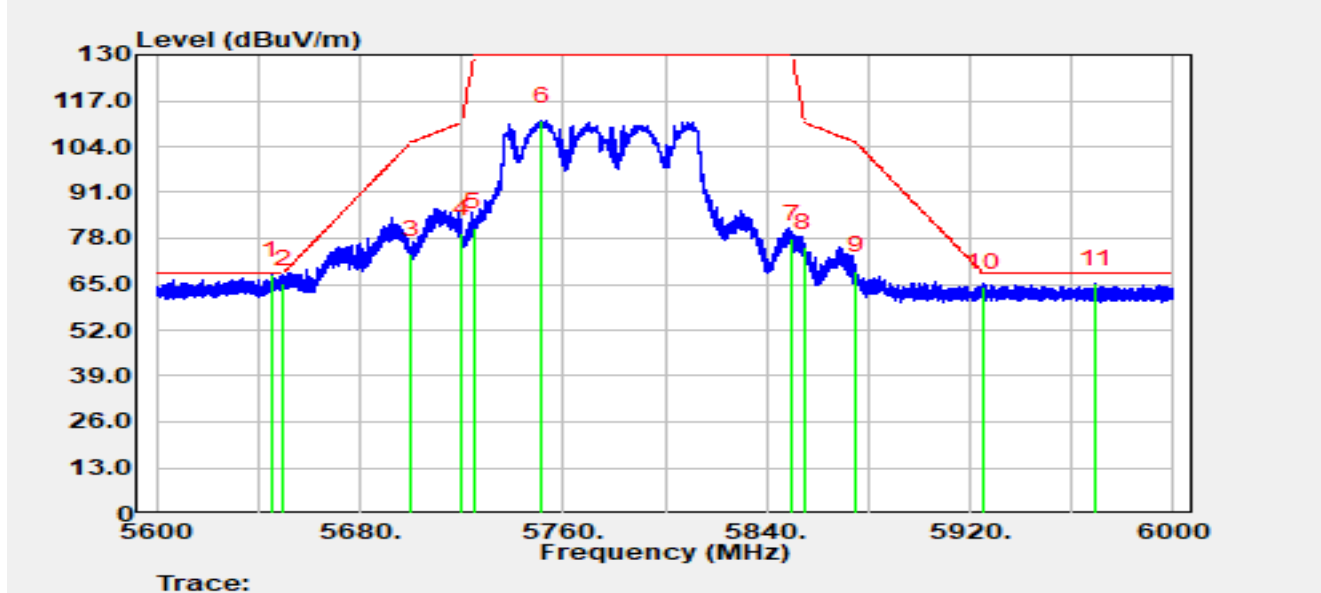


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5645.400	71.25	-3.65	67.60	-0.60	68.20	Peak
2		5650.000	68.72	-3.65	65.07	-3.13	68.20	Peak
3		5700.000	77.02	-3.47	73.55	-31.65	105.20	Peak
4		5720.000	82.84	-3.45	79.39	-31.41	110.80	Peak
5		5725.000	84.63	-3.47	81.16	-48.84	130.00	Peak
6		5751.280	115.00	-3.65	111.35	N/A	N/A	Peak
7		5850.000	81.66	-3.75	77.91	-52.09	130.00	Peak
8		5855.000	79.24	-3.75	75.49	-35.31	110.80	Peak
9		5875.000	72.55	-3.82	68.72	-36.48	105.20	Peak
10		5925.000	67.77	-3.71	64.07	-4.13	68.20	Peak
11		5969.720	68.87	-3.64	65.22	-2.98	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5°C	Humidity	50.8%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

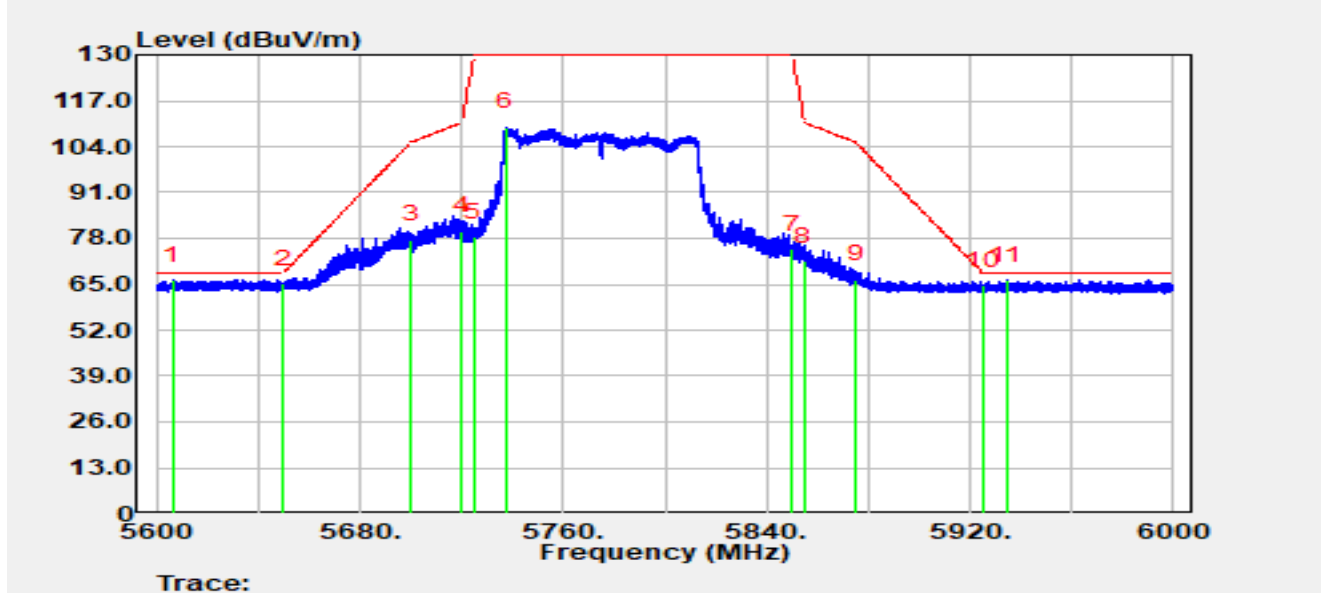


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5606.440	69.64	-3.52	66.12	-2.08	68.20	Peak
2		5650.000	68.73	-3.65	65.08	-3.12	68.20	Peak
3		5700.000	80.99	-3.47	77.52	-27.68	105.20	Peak
4		5720.000	83.49	-3.45	80.04	-30.76	110.80	Peak
5		5725.000	81.85	-3.47	78.39	-51.61	130.00	Peak
6		5737.600	113.06	-3.58	109.48	N/A	N/A	Peak
7		5850.000	78.57	-3.75	74.82	-55.18	130.00	Peak
8		5855.000	75.30	-3.75	71.55	-39.25	110.80	Peak
9		5875.000	70.15	-3.82	66.33	-38.87	105.20	Peak
10		5925.000	68.38	-3.71	64.68	-3.52	68.20	Peak
11	*	5934.240	69.82	-3.67	66.15	-2.05	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

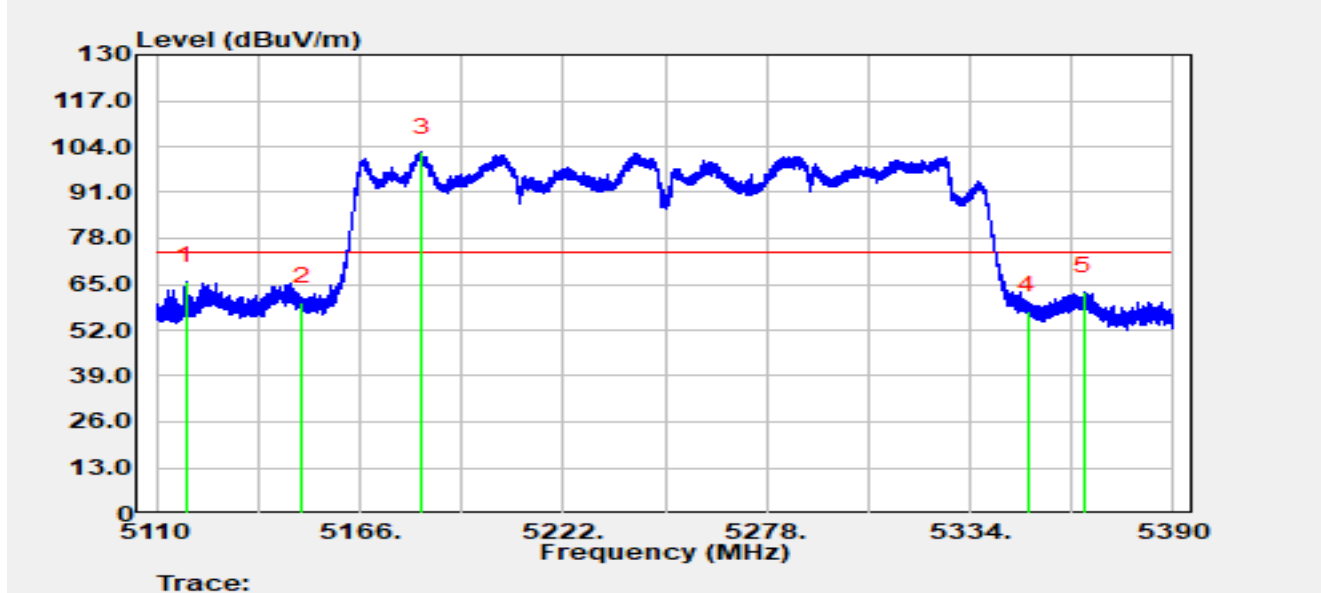


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5118.288	68.63	-2.87	65.75	-8.25	74.00	Peak
2		5150.000	60.53	-0.54	59.99	-14.01	74.00	Peak
3		5182.940	60.72	41.64	102.37	N/A	N/A	Peak
4		5350.000	55.35	2.28	57.63	-16.37	74.00	Peak
5		5365.220	64.18	-1.38	62.80	-11.20	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

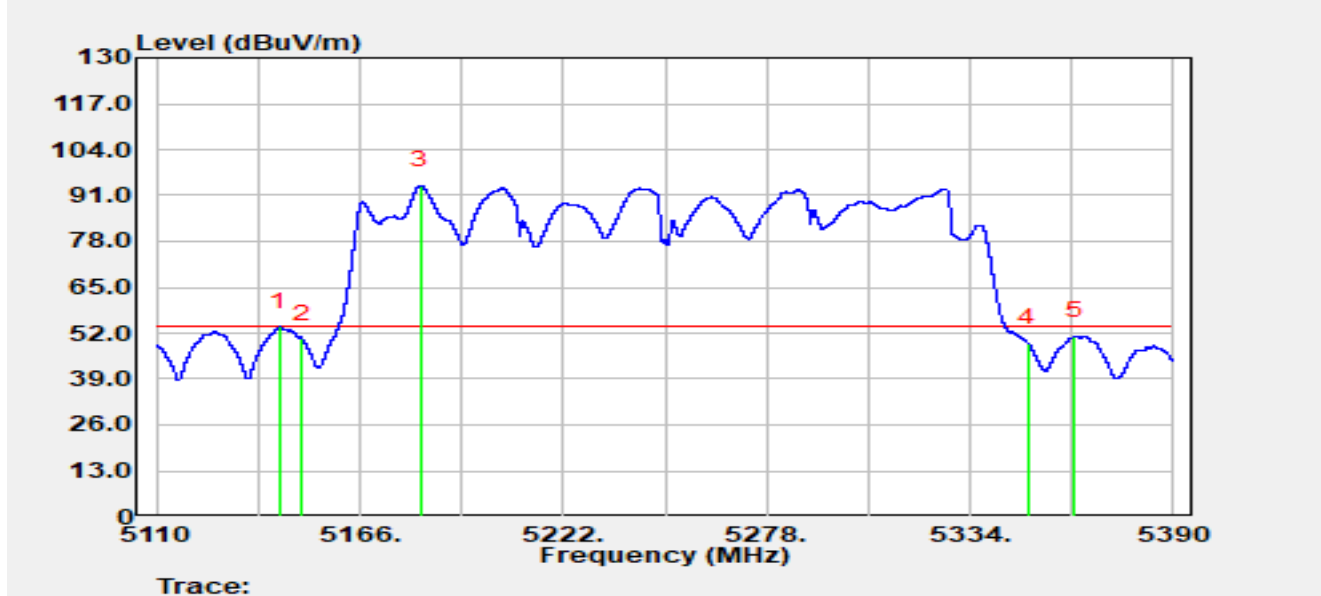


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.880	55.29	-1.58	53.72	-0.28	54.00	Average
2		5150.000	50.93	-0.54	50.39	-3.61	54.00	Average
3		5182.716	51.63	42.16	93.79	N/A	N/A	Average
4		5350.000	46.85	2.28	49.13	-4.87	54.00	Average
5		5362.896	52.38	-1.13	51.25	-2.75	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

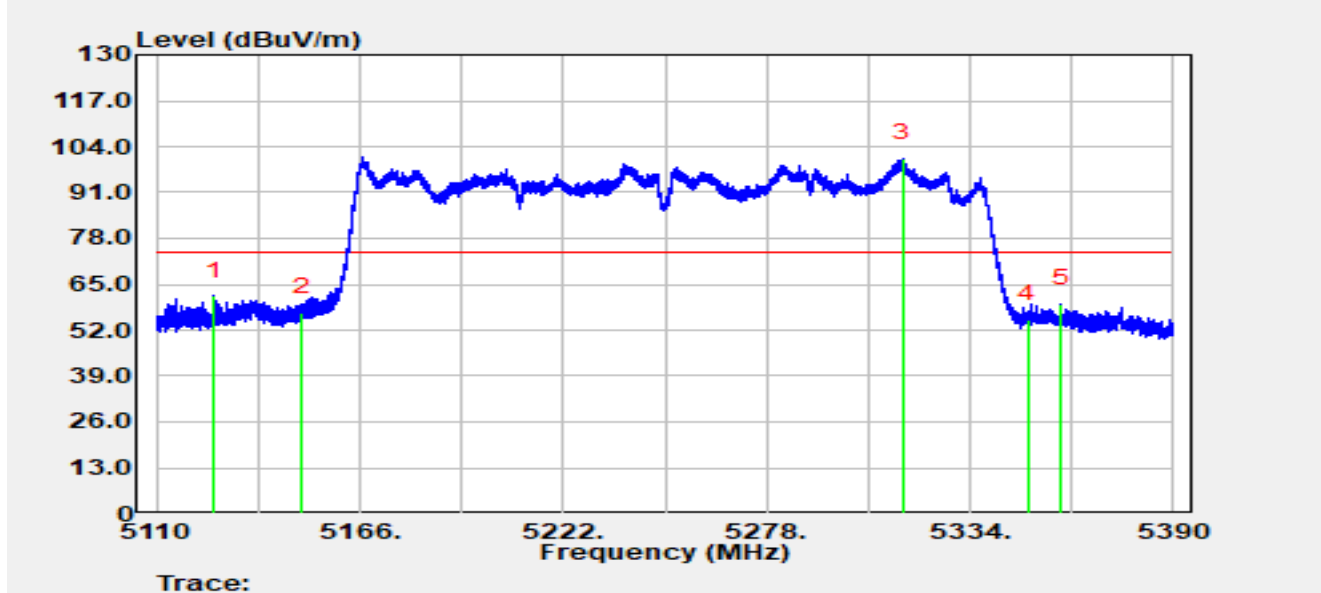


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5126.016	64.34	-2.72	61.62	-12.38	74.00	Peak
2		5150.000	57.64	-0.54	57.10	-16.90	74.00	Peak
3		5315.464	51.77	48.91	100.68	N/A	N/A	Peak
4		5350.000	52.90	2.28	55.18	-18.82	74.00	Peak
5		5359.144	60.33	-0.76	59.57	-14.43	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

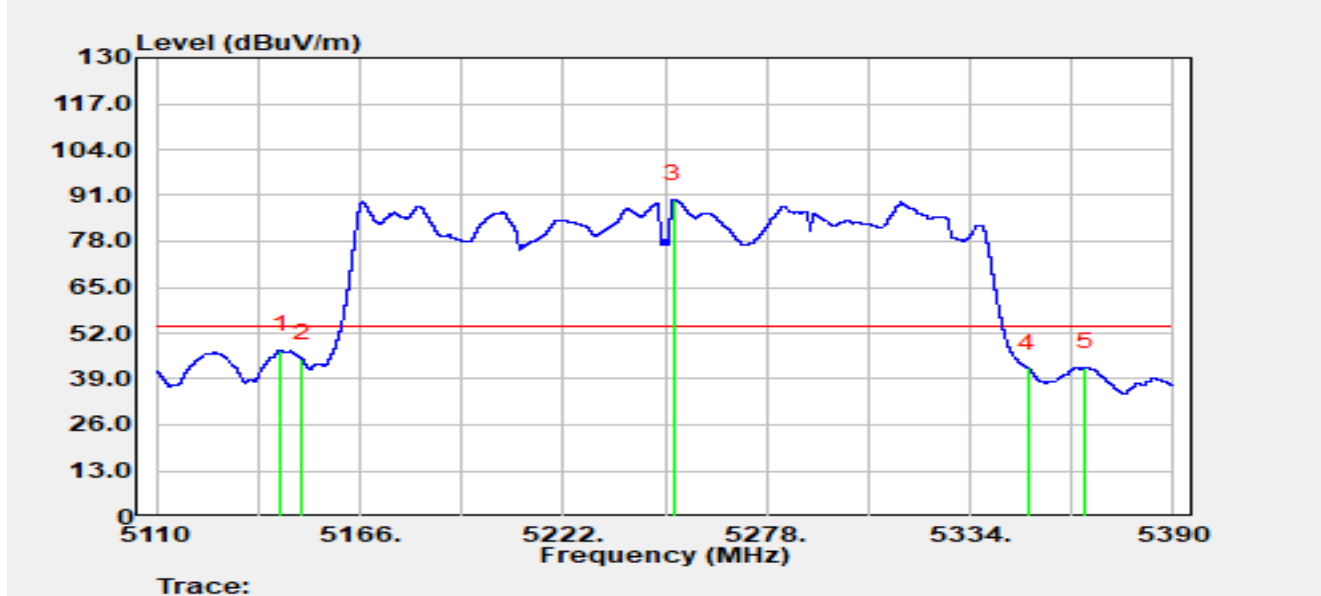


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.132	48.94	-1.61	47.33	-6.67	54.00	Average
2		5150.000	45.26	-0.54	44.72	-9.28	54.00	Average
3		5252.548	50.72	39.21	89.93	N/A	N/A	Average
4		5350.000	39.90	2.28	42.18	-11.82	54.00	Average
5		5365.724	43.84	-1.43	42.42	-11.58	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

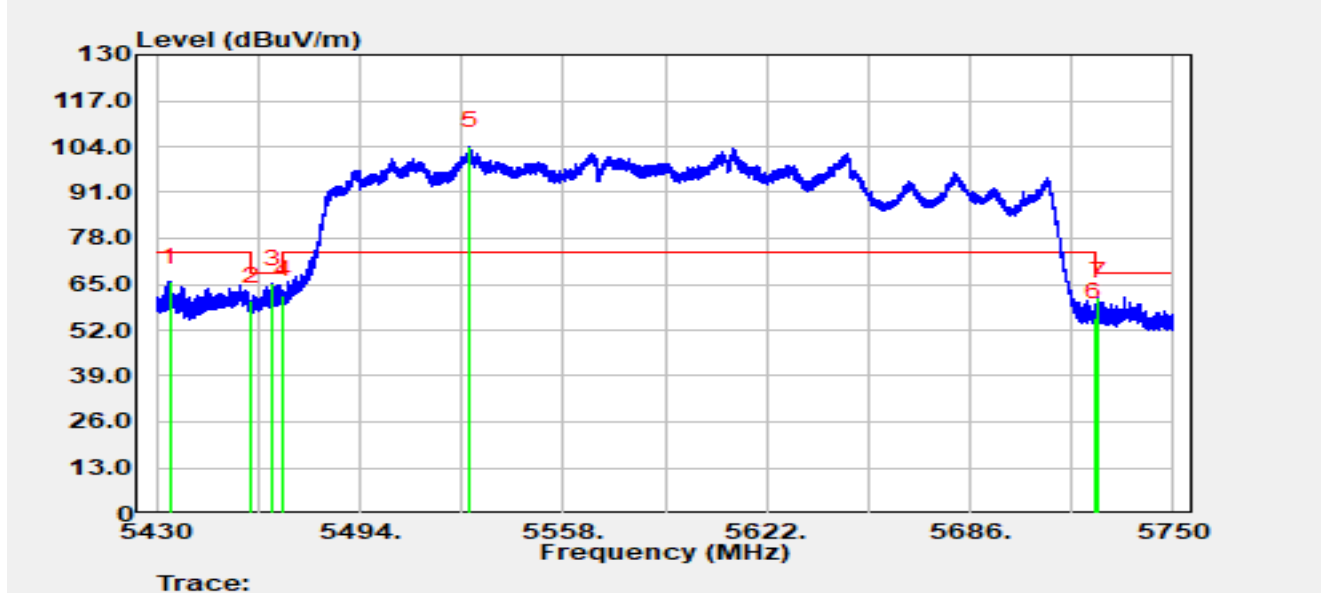


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5434.160	67.44	-1.86	65.58	-8.42	74.00	Peak
2		5460.000	60.86	-0.69	60.16	-8.04	68.20	Peak
3	*	5466.704	65.12	0.05	65.17	-3.03	68.20	Peak
4		5470.000	60.88	1.00	61.88	-6.32	68.20	Peak
5		5528.400	56.12	48.08	104.20	N/A	N/A	Peak
6		5725.000	54.60	1.01	55.61	-12.59	68.20	Peak
7		5726.256	61.02	0.36	61.38	-6.82	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

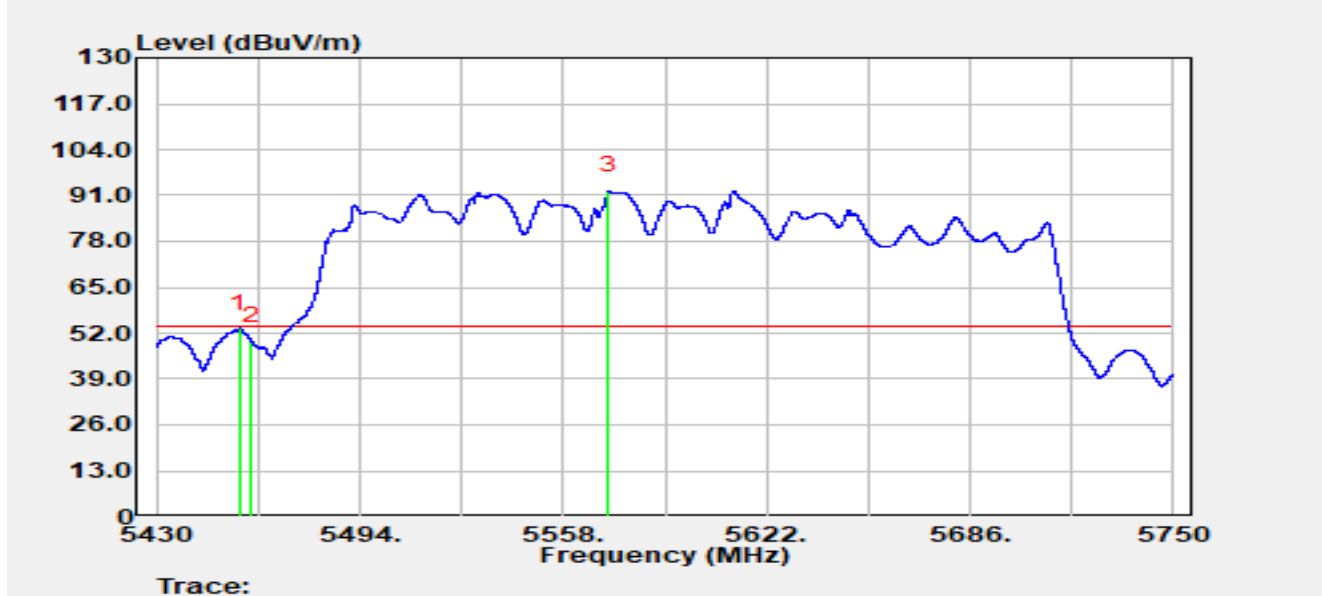


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5456.272	54.40	-0.99	53.42	-0.58	54.00	Average
2		5460.000	50.37	-0.69	49.68	-4.32	54.00	Average
3		5572.304	42.97	49.49	92.46	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

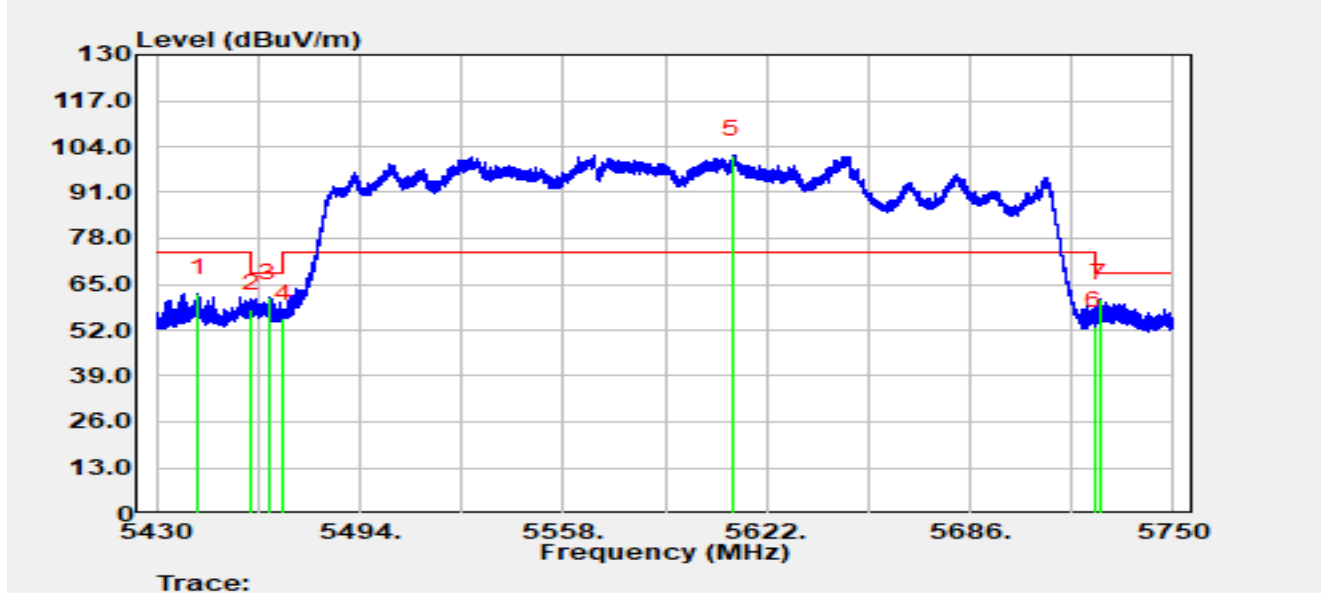


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5443.184	64.02	-1.63	62.39	-11.61	74.00	Peak
2		5460.000	58.63	-0.69	57.94	-10.26	68.20	Peak
3	*	5465.424	61.32	-0.16	61.16	-7.04	68.20	Peak
4		5470.000	54.22	1.00	55.22	-12.98	68.20	Peak
5		5611.376	50.90	50.82	101.71	N/A	N/A	Peak
6		5725.000	52.15	1.01	53.16	-15.04	68.20	Peak
7		5726.864	60.76	0.10	60.86	-7.34	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

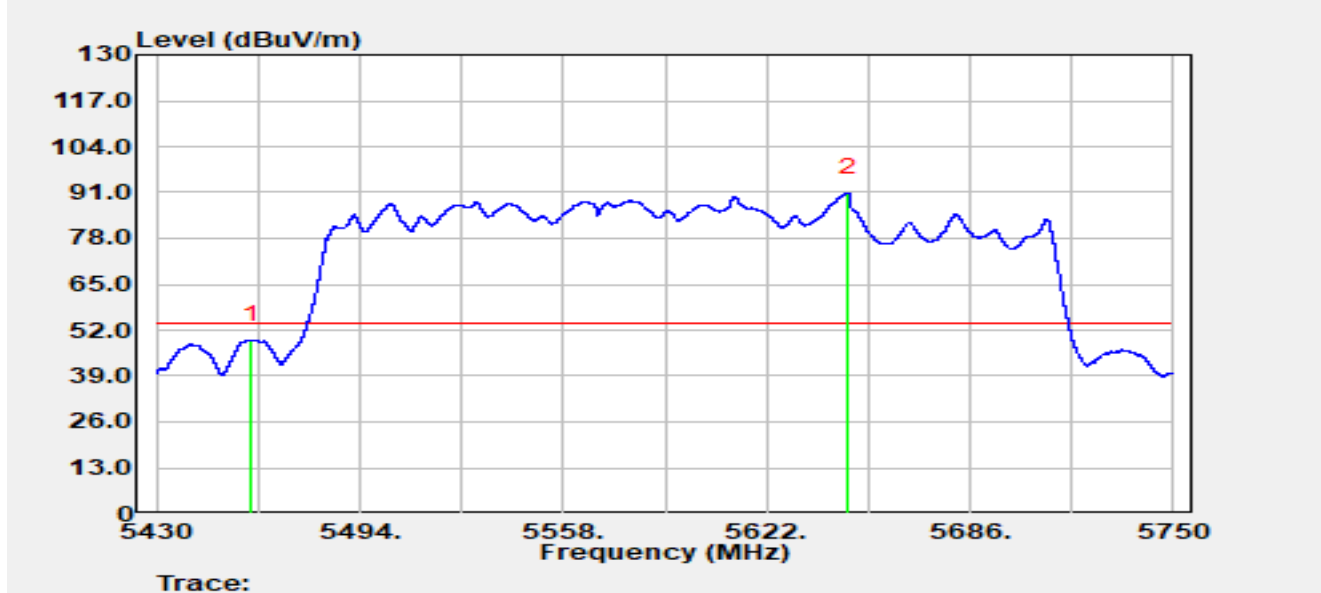


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	49.77	-0.69	49.08	-4.92	54.00	Average
2		5647.696	44.75	46.18	90.93	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 5180 MHz		

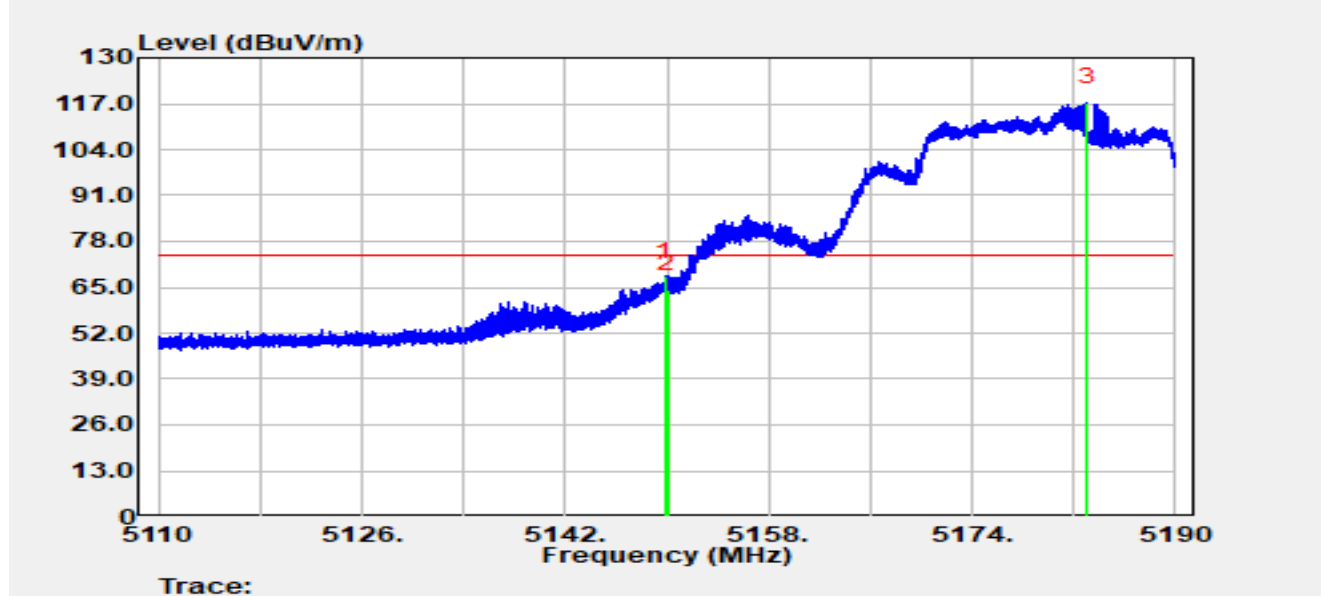


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.848	68.77	-0.63	68.14	-5.86	74.00	Peak
2		5150.000	64.96	-0.54	64.41	-9.59	74.00	Peak
3		5183.032	75.99	41.43	117.42	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 5180 MHz		

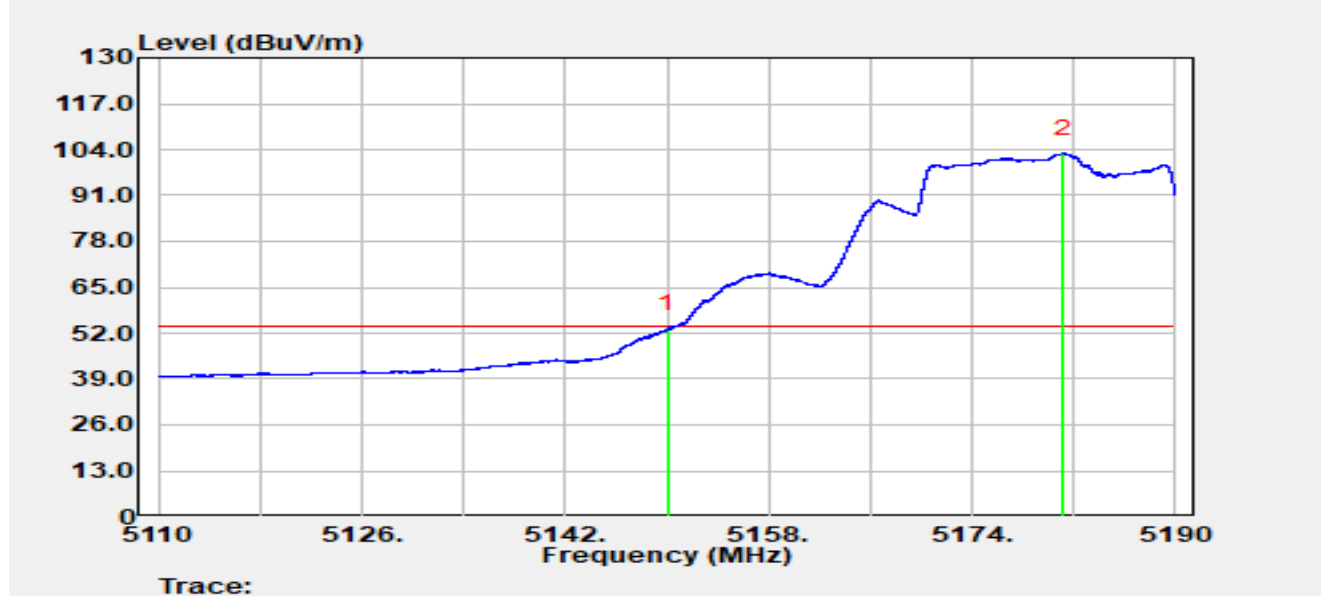


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	53.69	-0.54	53.15	-0.85	54.00	Average
2		5181.152	57.47	45.37	102.83	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 5180 MHz		

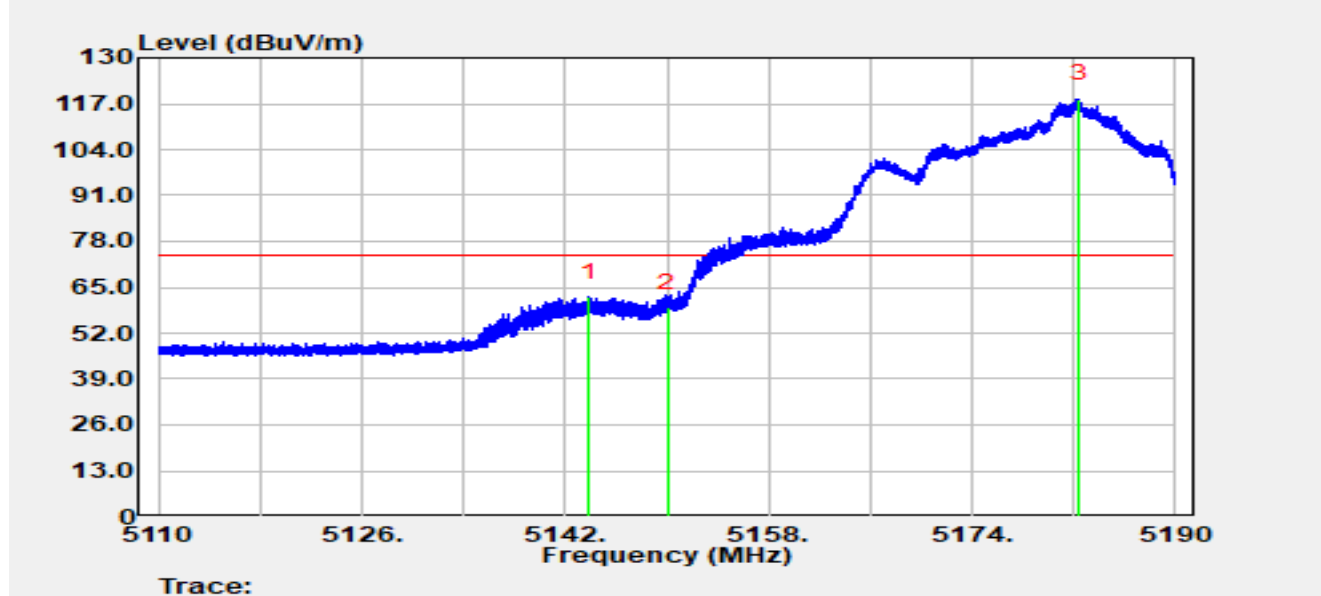


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.896	63.78	-1.58	62.20	-11.80	74.00	Peak
2		5150.000	59.67	-0.54	59.13	-14.87	74.00	Peak
3		5182.392	75.50	42.90	118.40	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 5180 MHz		

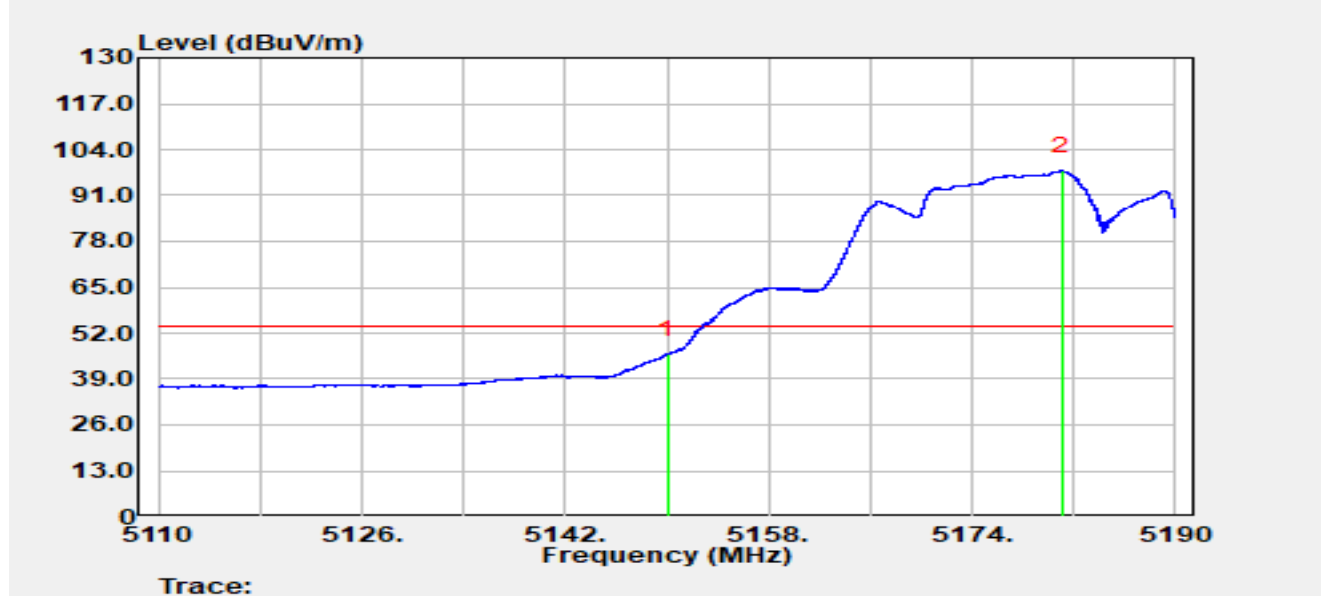


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	46.56	-0.54	46.02	-7.98	54.00	Average
2		5181.056	52.39	45.54	97.94	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 5320 MHz		

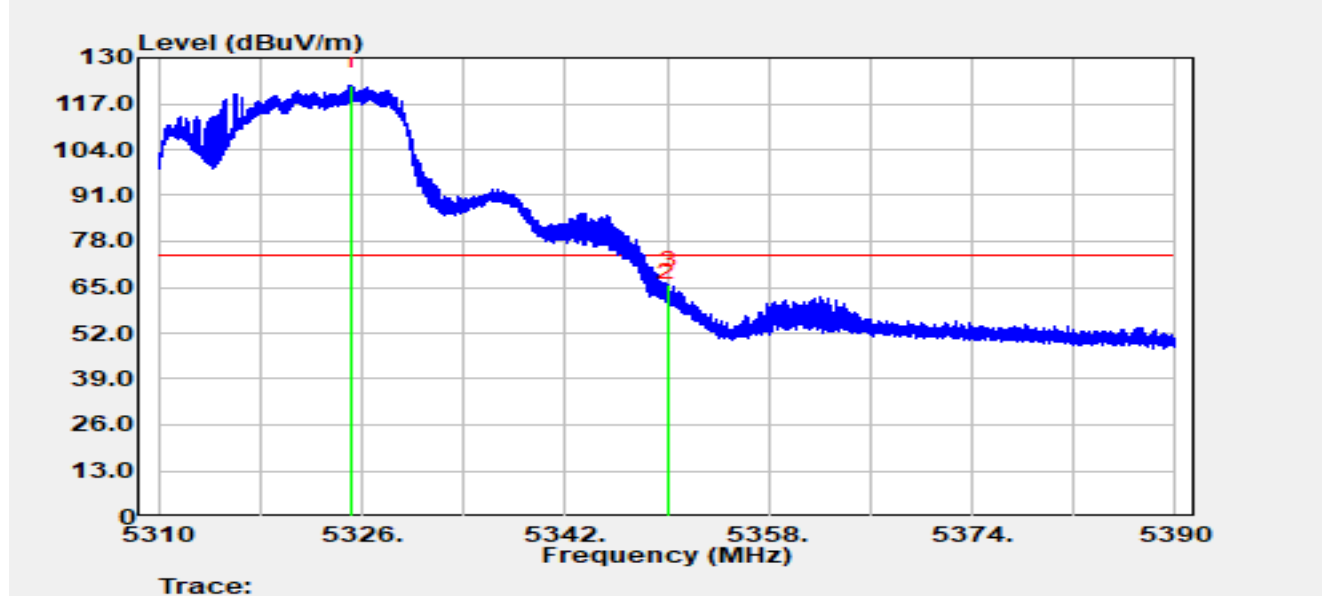


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5325.080	79.81	42.30	122.11	N/A	N/A	Peak
2		5350.000	59.98	2.28	62.26	-11.74	74.00	Peak
3	*	5350.120	63.31	2.22	65.53	-8.47	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 5320 MHz		

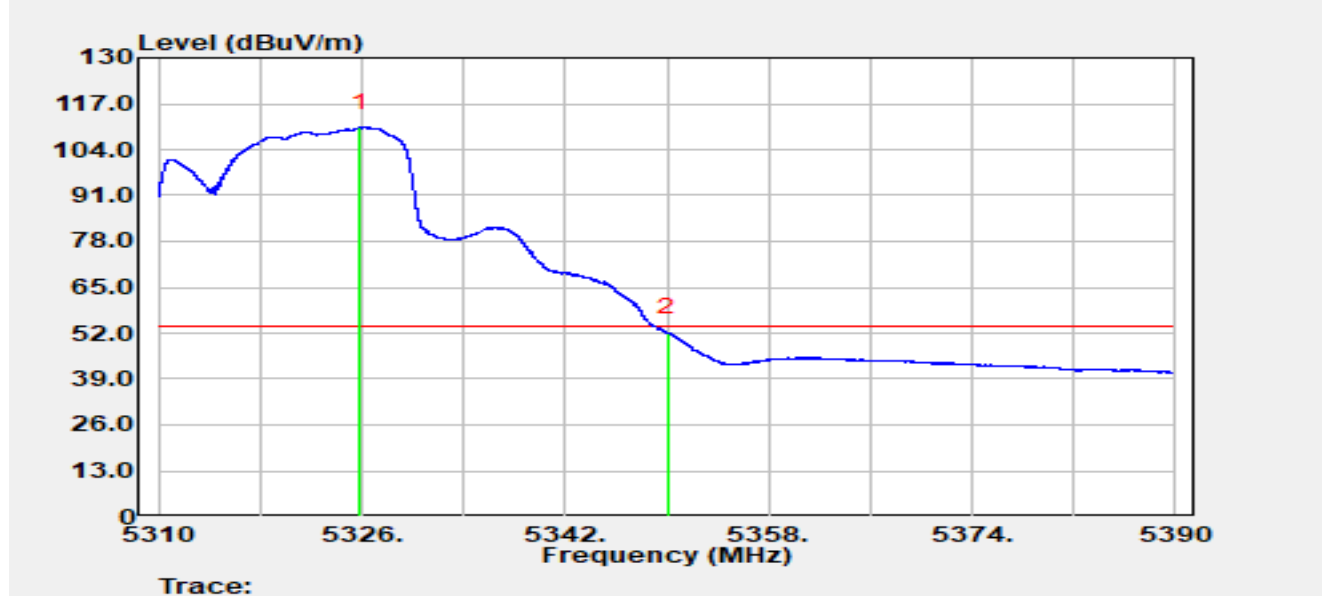


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5325.896	68.82	41.48	110.31	N/A	N/A	Average
2	*	5350.000	49.79	2.28	52.07	-1.93	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 5320 MHz		

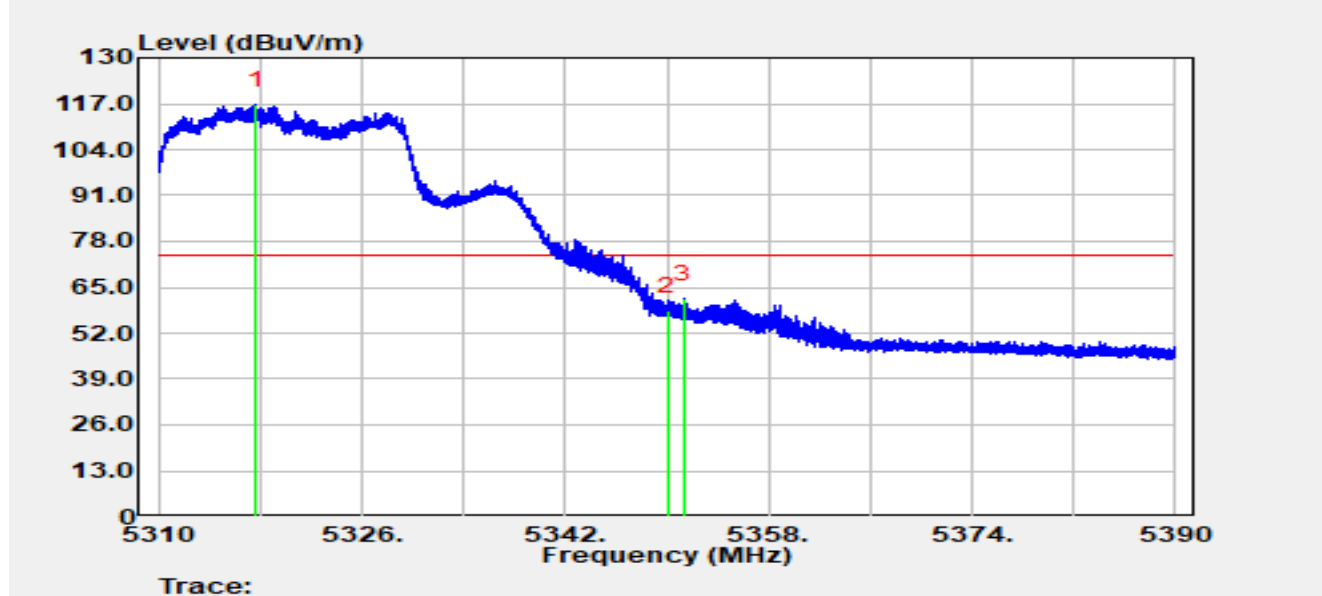


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5317.688	71.32	45.33	116.65	N/A	N/A	Peak
2		5350.000	56.02	2.28	58.30	-15.70	74.00	Peak
3	*	5351.304	60.16	1.43	61.59	-12.41	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 5320 MHz		

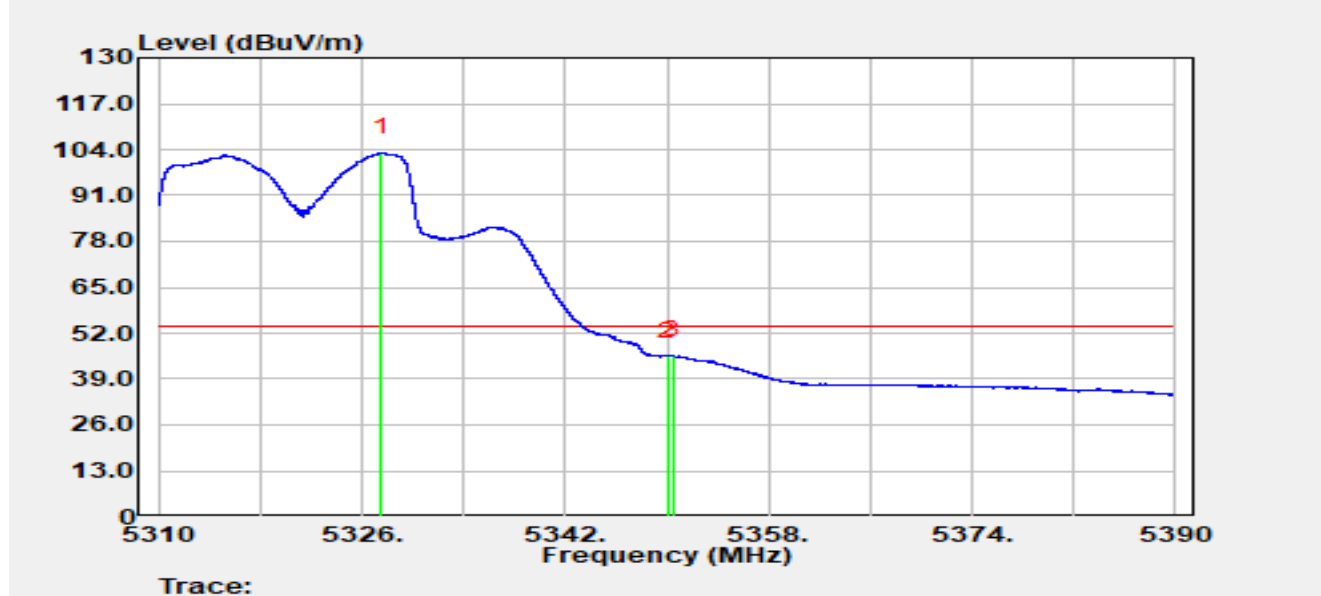


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.480	61.27	41.76	103.02	N/A	N/A	Average
2		5350.000	43.32	2.28	45.60	-8.40	54.00	Average
3	*	5350.488	43.70	2.00	45.70	-8.30	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 5500 MHz		

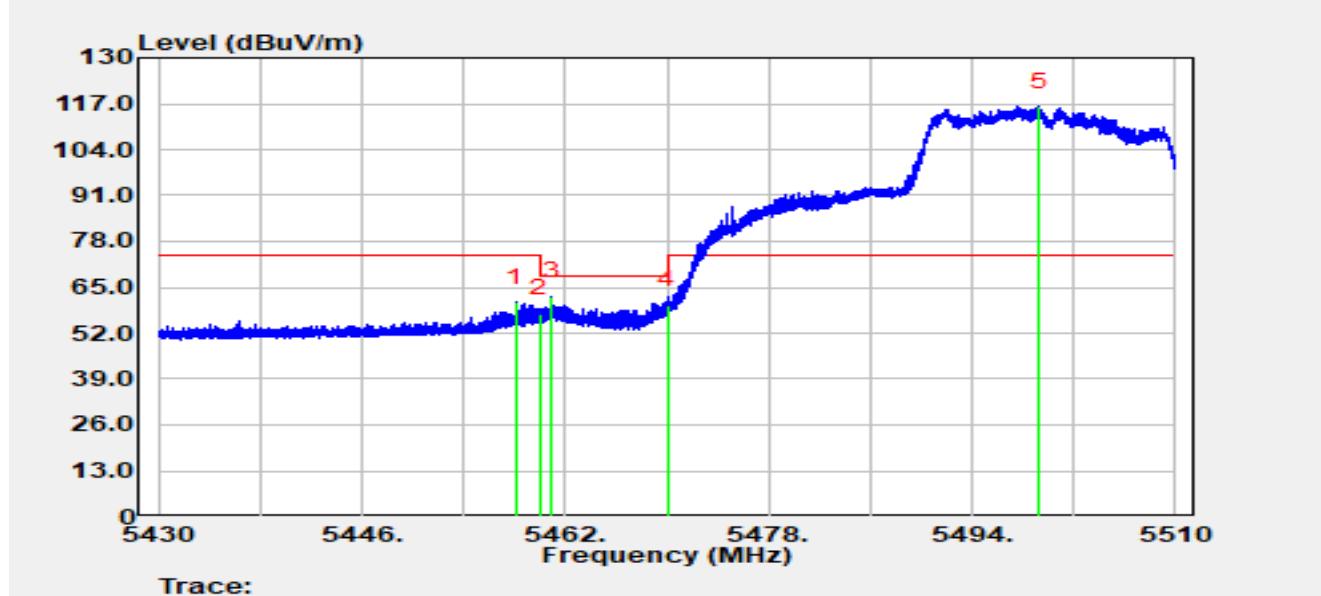


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.072	61.59	-0.83	60.75	-13.25	74.00	Peak
2		5460.000	58.14	-0.69	57.44	-10.76	68.20	Peak
3	*	5460.952	63.01	-0.67	62.33	-5.87	68.20	Peak
4		5470.000	58.90	1.00	59.91	-8.29	68.20	Peak
5		5499.248	75.86	40.35	116.21	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 5500 MHz		

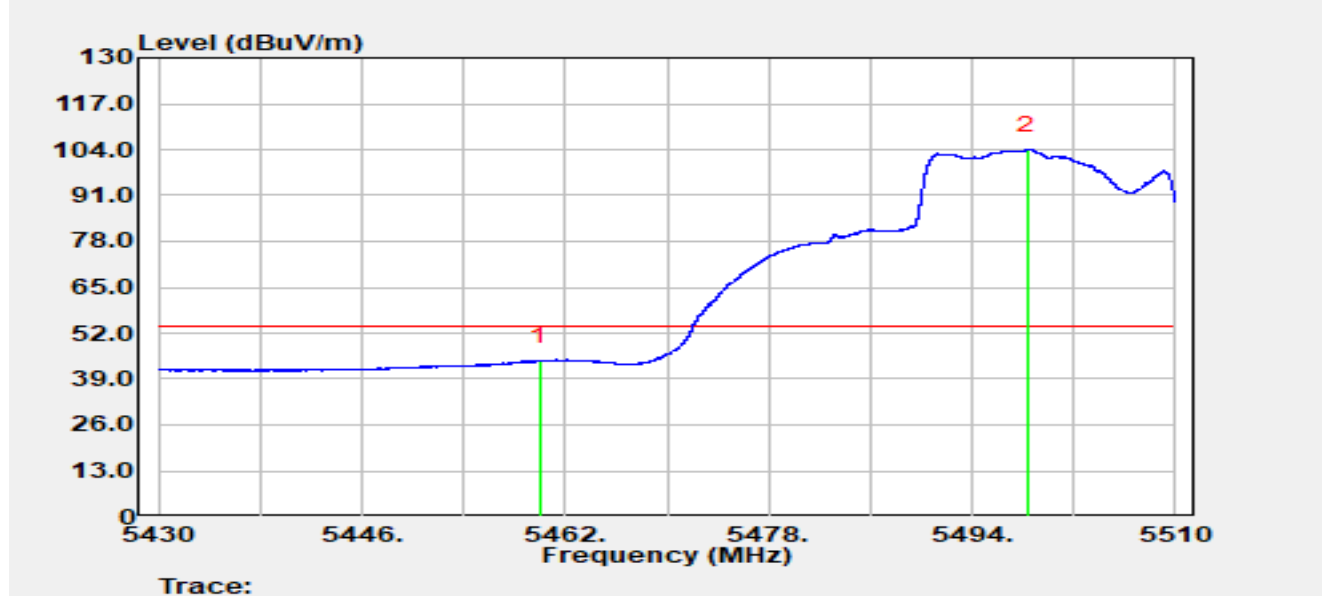


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	44.81	-0.69	44.12	-9.88	54.00	Average
2		5498.368	63.68	40.19	103.87	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 5500 MHz		

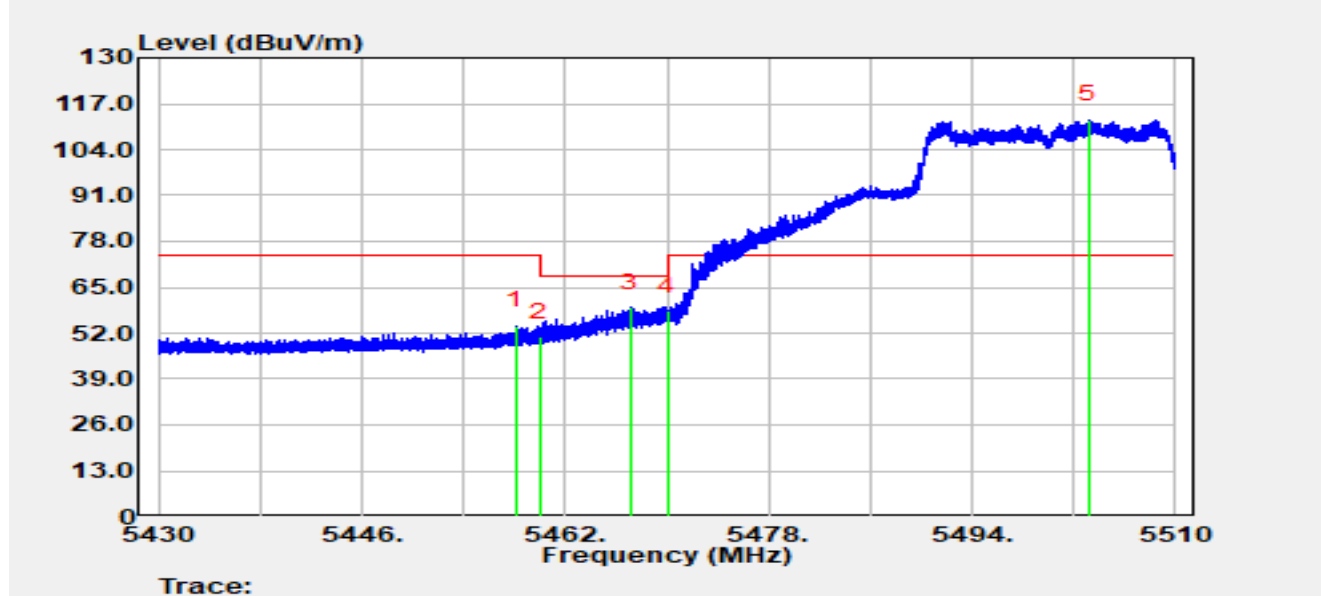


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.064	54.82	-0.83	53.99	-20.01	74.00	Peak
2		5460.000	51.58	-0.69	50.88	-17.32	68.20	Peak
3	*	5467.112	59.17	0.15	59.31	-8.89	68.20	Peak
4		5470.000	57.32	1.00	58.32	-9.88	68.20	Peak
5		5503.192	67.40	45.05	112.45	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 5500 MHz		

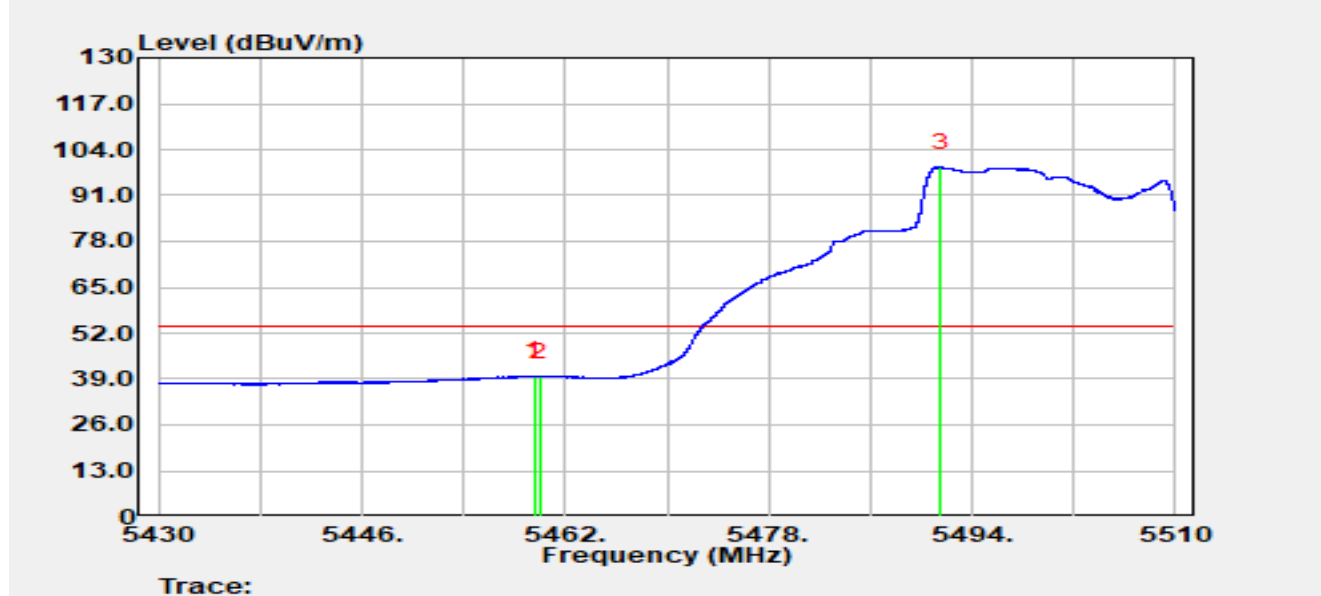


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.600	40.59	-0.75	39.84	-14.16	54.00	Average
2		5460.000	40.32	-0.69	39.63	-14.37	54.00	Average
3		5491.544	51.32	47.73	99.05	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 5700 MHz		

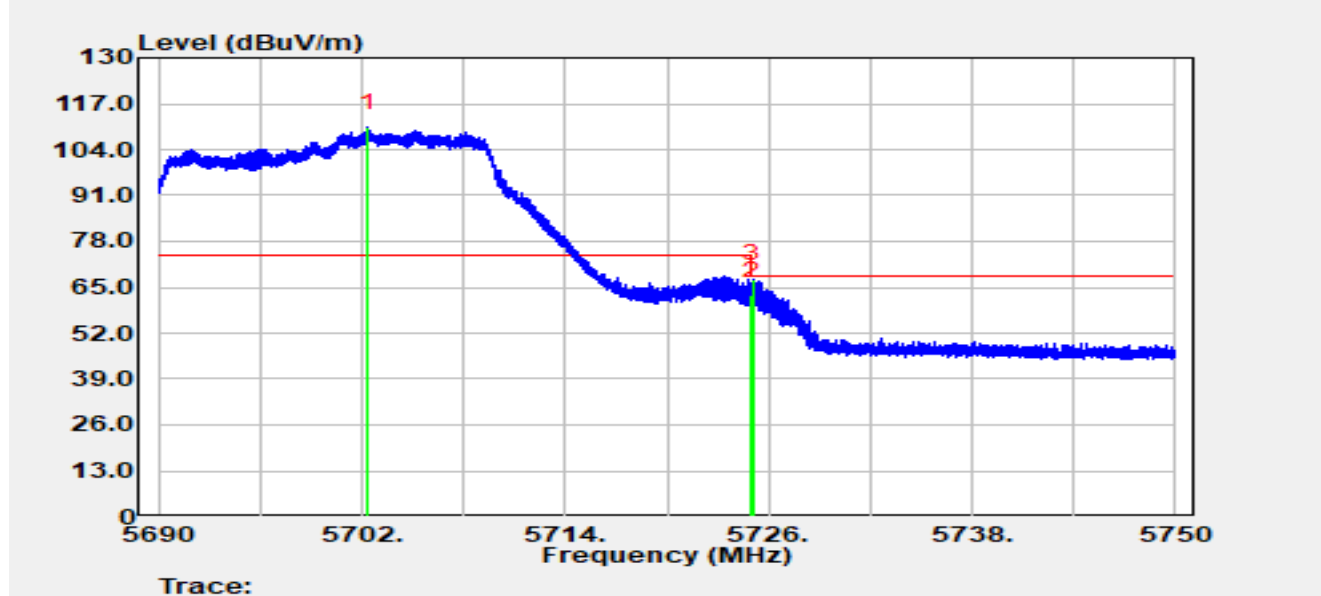


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.378	70.22	40.10	110.32	N/A	N/A	Peak
2		5725.000	61.61	1.01	62.62	-5.58	68.20	Peak
3	*	5725.070	66.43	0.97	67.39	-0.81	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 5700 MHz		

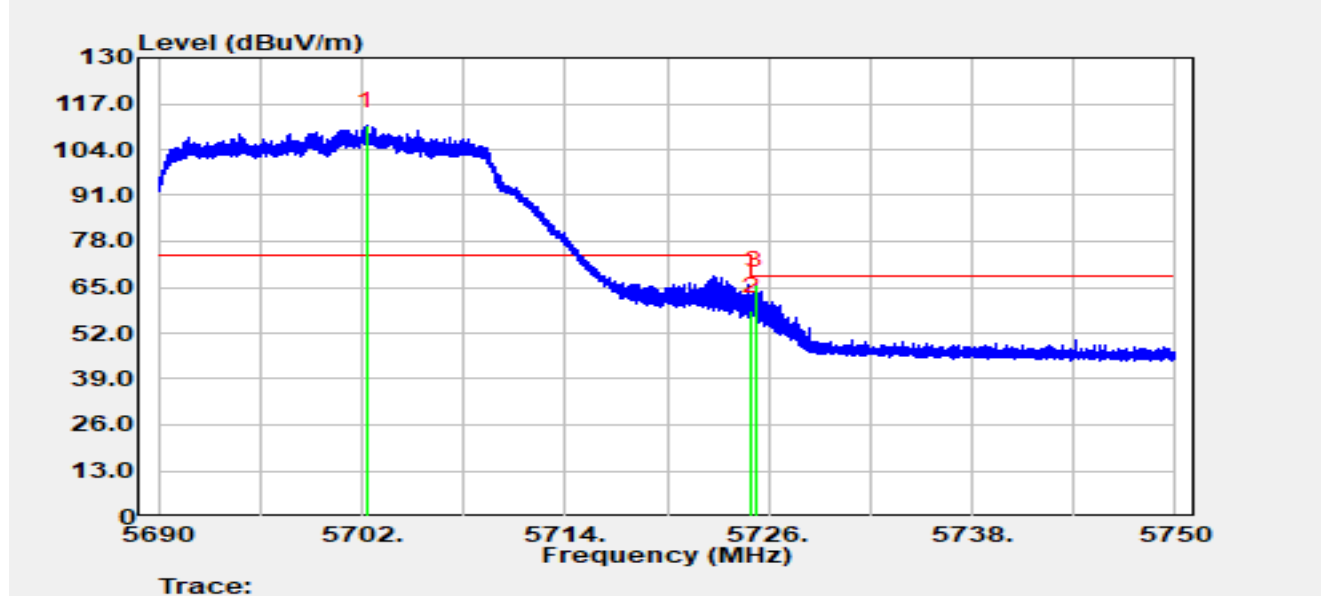


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.300	70.81	40.03	110.84	N/A	N/A	Peak
2		5725.000	57.29	1.01	58.30	-9.90	68.20	Peak
3	*	5725.256	64.63	0.86	65.49	-2.71	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 5745 MHz		

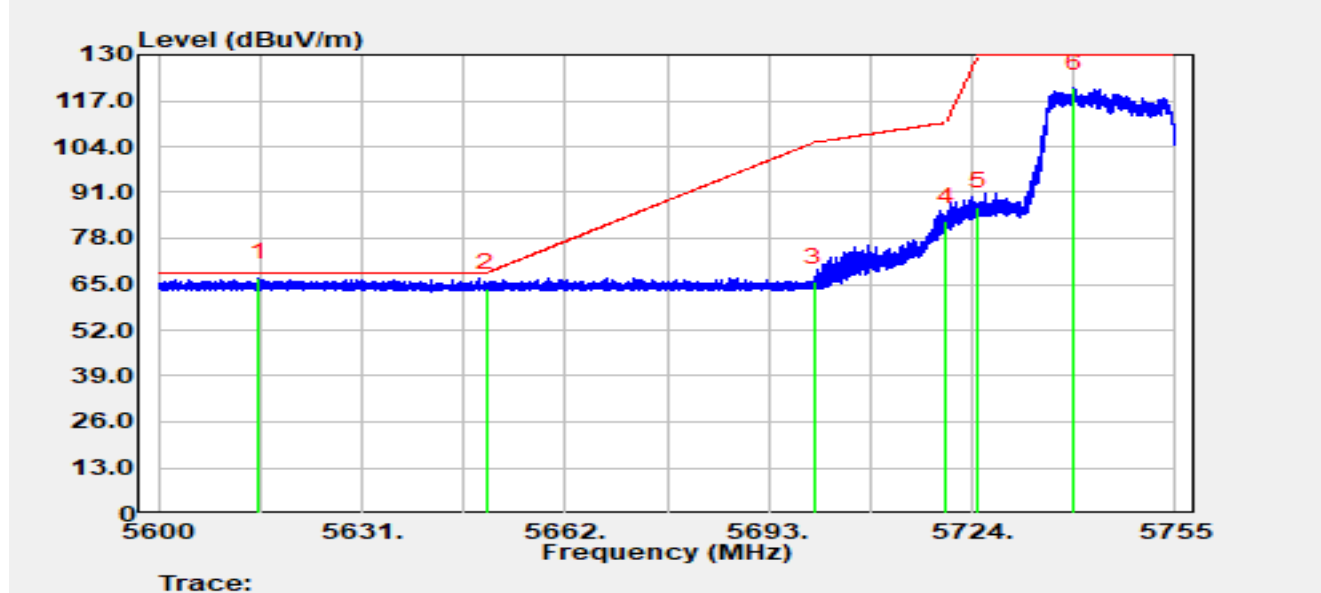


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5615.360	70.24	-3.44	66.80	-1.40	68.20	Peak
2		5650.000	67.60	-3.65	63.96	-4.24	68.20	Peak
3		5700.000	69.15	-3.47	65.68	-39.52	105.20	Peak
4		5720.000	86.21	-3.45	82.76	-28.04	110.80	Peak
5		5725.000	90.36	-3.47	86.89	-43.11	130.00	Peak
6		5739.438	124.20	-3.60	120.60	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 5745 MHz		

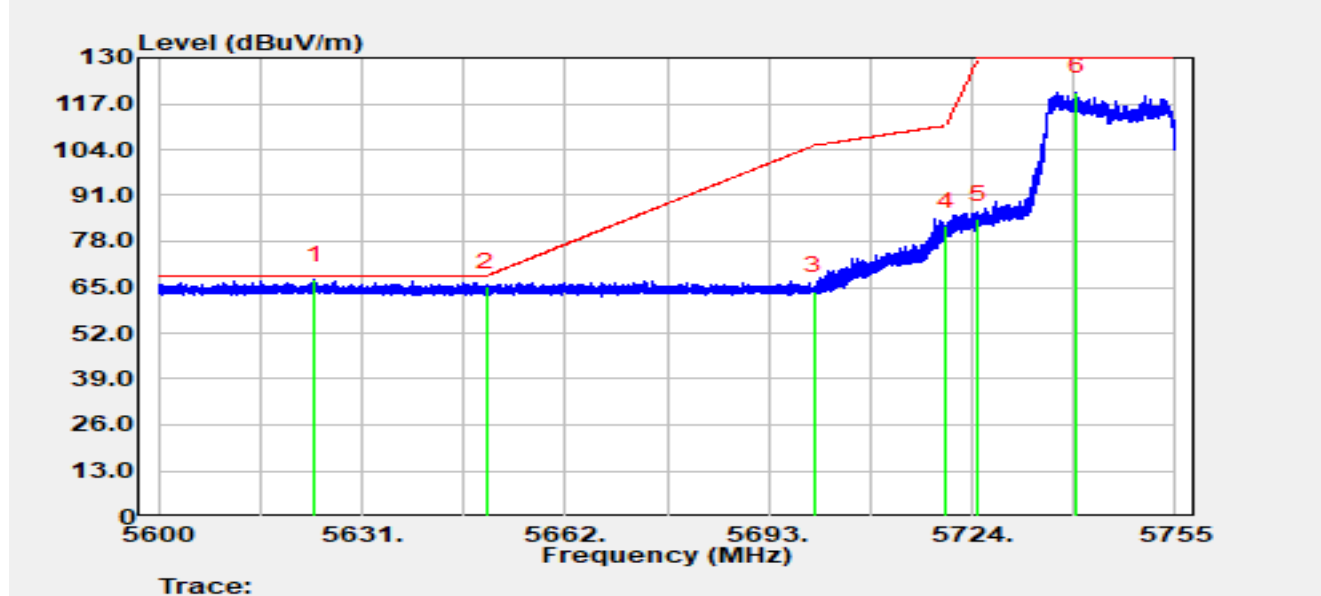

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5623.839	70.33	-3.34	66.98	-1.22	68.20	Peak
2		5650.000	68.68	-3.65	65.03	-3.17	68.20	Peak
3		5700.000	67.44	-3.47	63.96	-41.24	105.20	Peak
4		5720.000	85.76	-3.45	82.30	-28.50	110.80	Peak
5		5725.000	87.65	-3.47	84.19	-45.81	130.00	Peak
6		5739.872	123.81	-3.61	120.21	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 5825 MHz		




No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5822.659	124.54	-3.77	120.78	N/A	N/A	Peak
2		5850.000	87.18	-3.75	83.43	-46.57	130.00	Peak
3		5855.000	84.20	-3.75	80.45	-30.35	110.80	Peak
4		5875.000	70.10	-3.82	66.28	-38.92	105.20	Peak
5		5925.000	67.57	-3.71	63.87	-4.33	68.20	Peak
6	*	5936.711	70.16	-3.68	66.48	-1.72	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 5825 MHz		

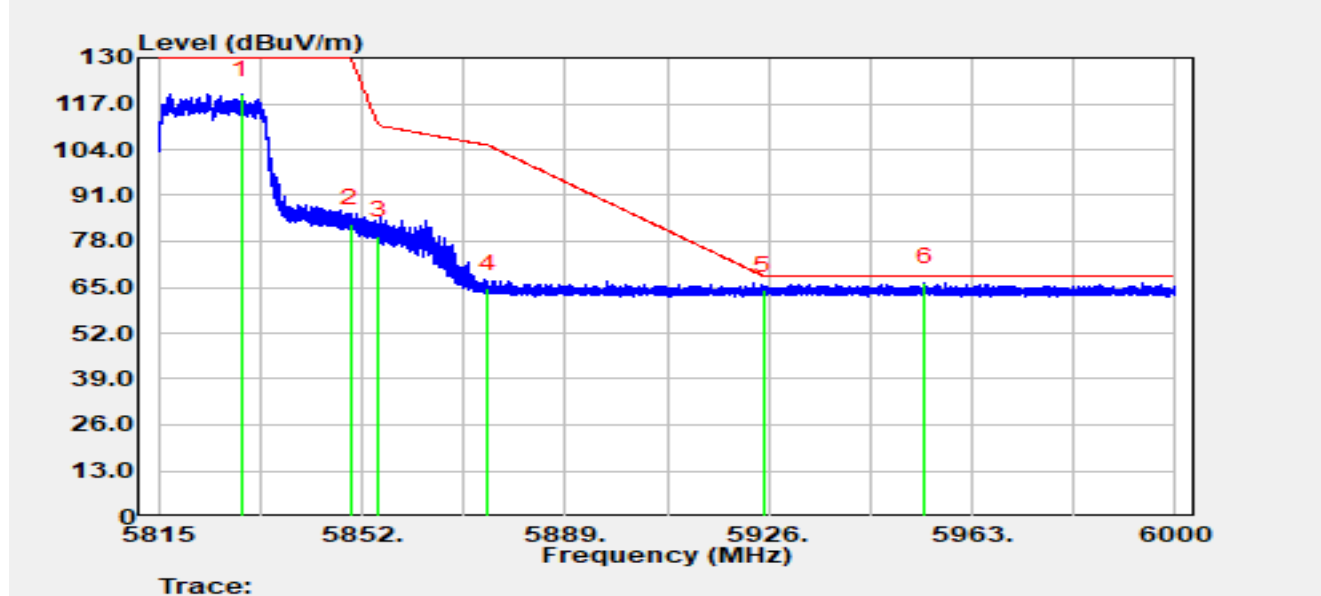


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5830.059	123.43	-3.74	119.69	N/A	N/A	Peak
2		5850.000	86.72	-3.75	82.96	-47.04	130.00	Peak
3		5855.000	83.37	-3.75	79.62	-31.18	110.80	Peak
4		5875.000	68.45	-3.82	64.63	-40.57	105.20	Peak
5		5925.000	67.90	-3.71	64.20	-4.00	68.20	Peak
6	*	5954.508	70.08	-3.67	66.41	-1.79	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 5190 MHz		

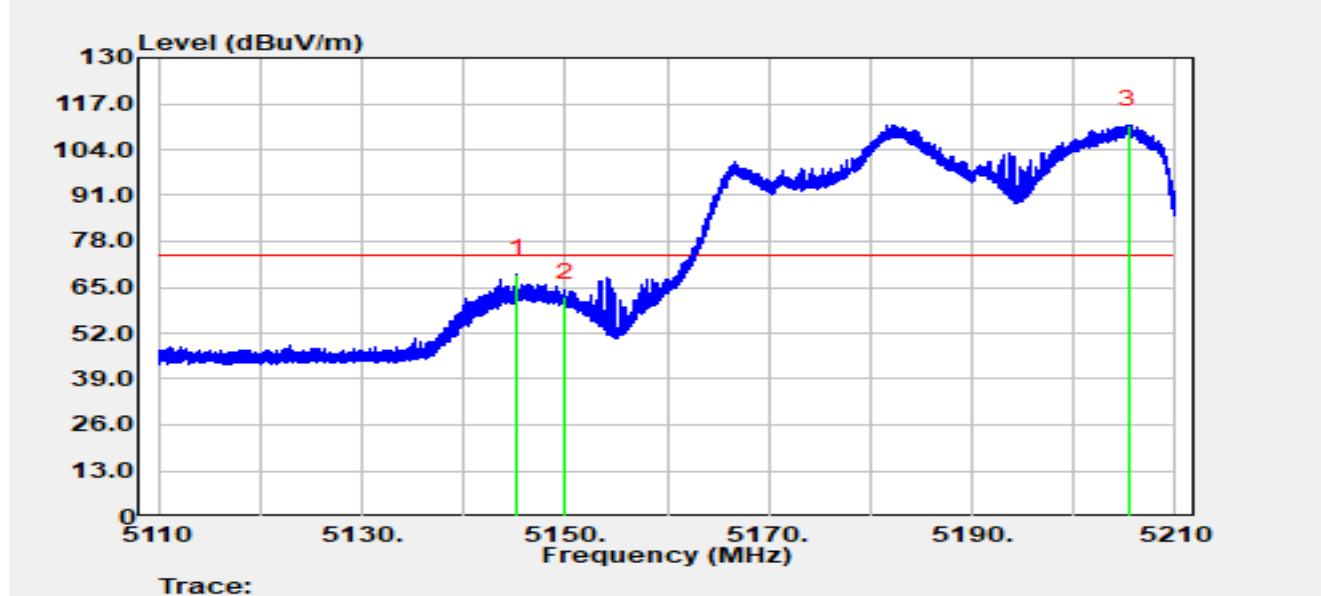


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.270	70.50	-1.73	68.77	-5.23	74.00	Peak
2		5150.000	62.82	-0.54	62.28	-11.72	74.00	Peak
3		5205.430	67.05	43.92	110.97	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 5190 MHz		

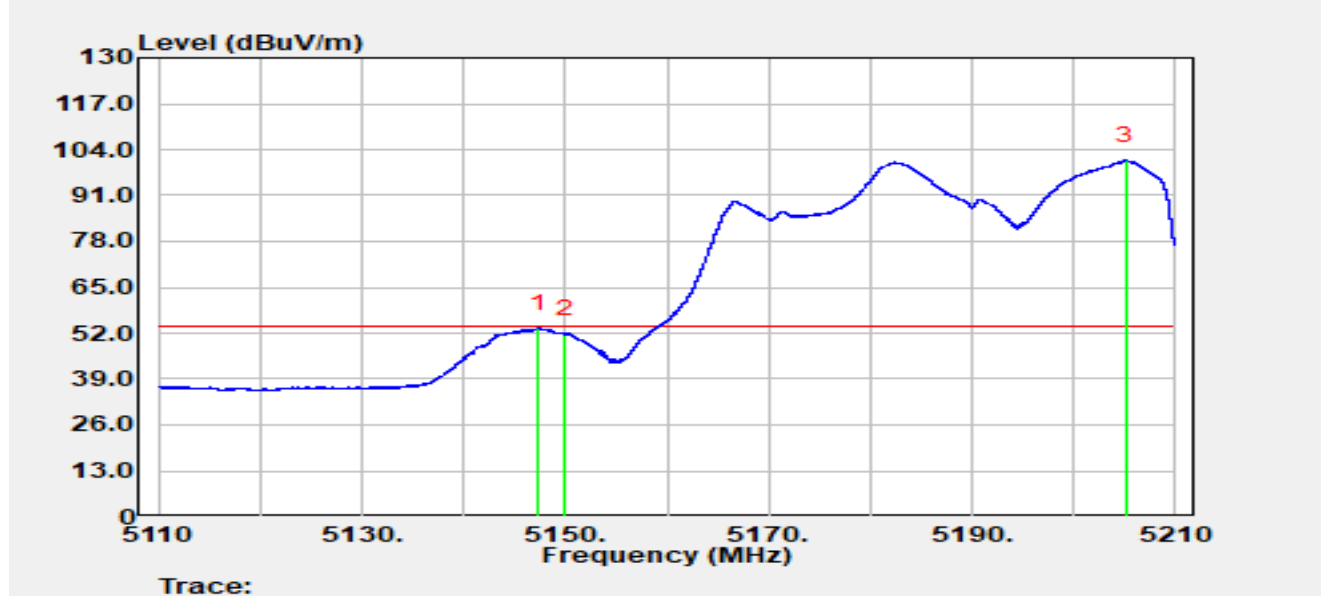


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.400	54.38	-1.07	53.30	-0.70	54.00	Average
2		5150.000	52.28	-0.54	51.74	-2.26	54.00	Average
3		5205.100	56.45	44.41	100.86	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 5190 MHz		

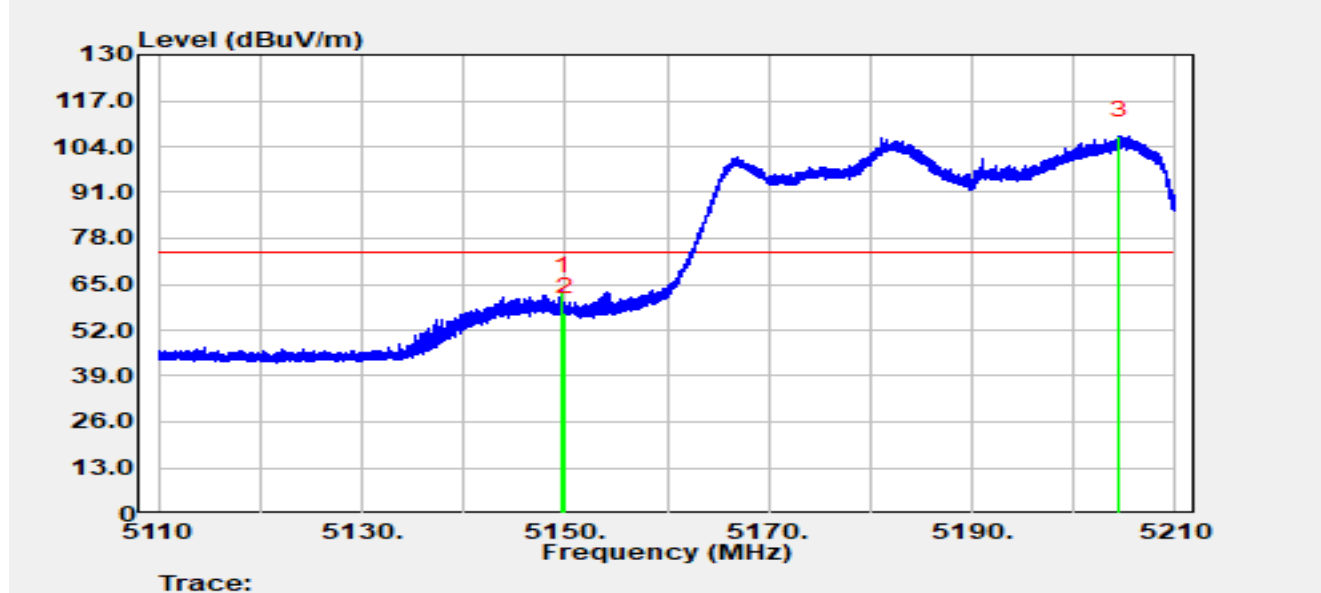


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.670	63.94	-0.73	63.21	-10.79	74.00	Peak
2		5150.000	57.67	-0.54	57.12	-16.88	74.00	Peak
3		5204.420	62.58	44.45	107.03	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 5190 MHz		

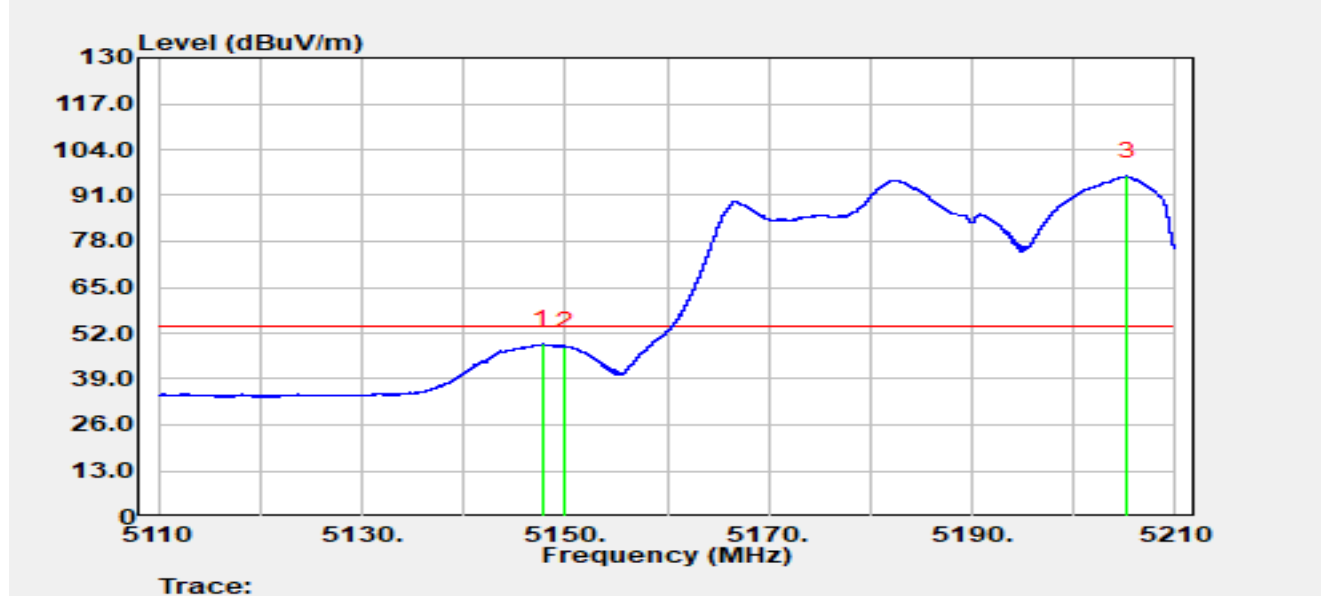


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.760	49.81	-0.99	48.81	-5.19	54.00	Average
2		5150.000	48.72	-0.54	48.18	-5.82	54.00	Average
3		5205.190	52.15	44.28	96.43	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 5310 MHz		

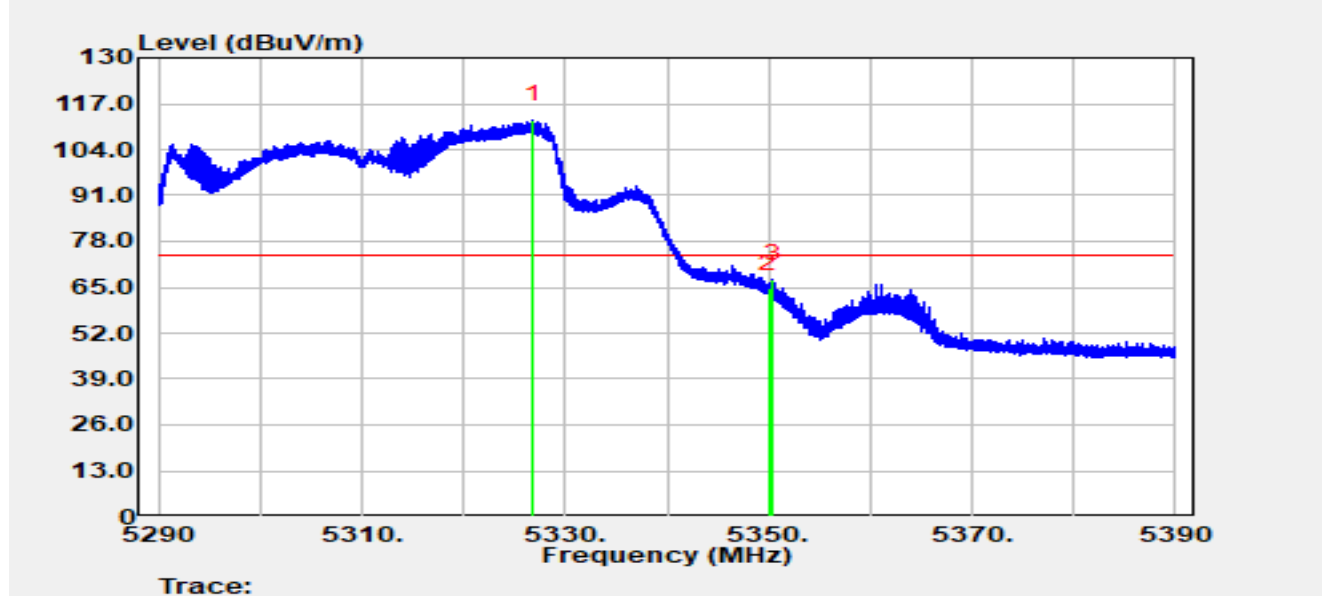


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5326.860	70.97	41.43	112.40	N/A	N/A	Peak
2		5350.000	62.25	2.28	64.53	-9.47	74.00	Peak
3	*	5350.370	65.37	2.08	67.45	-6.55	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 5310 MHz		

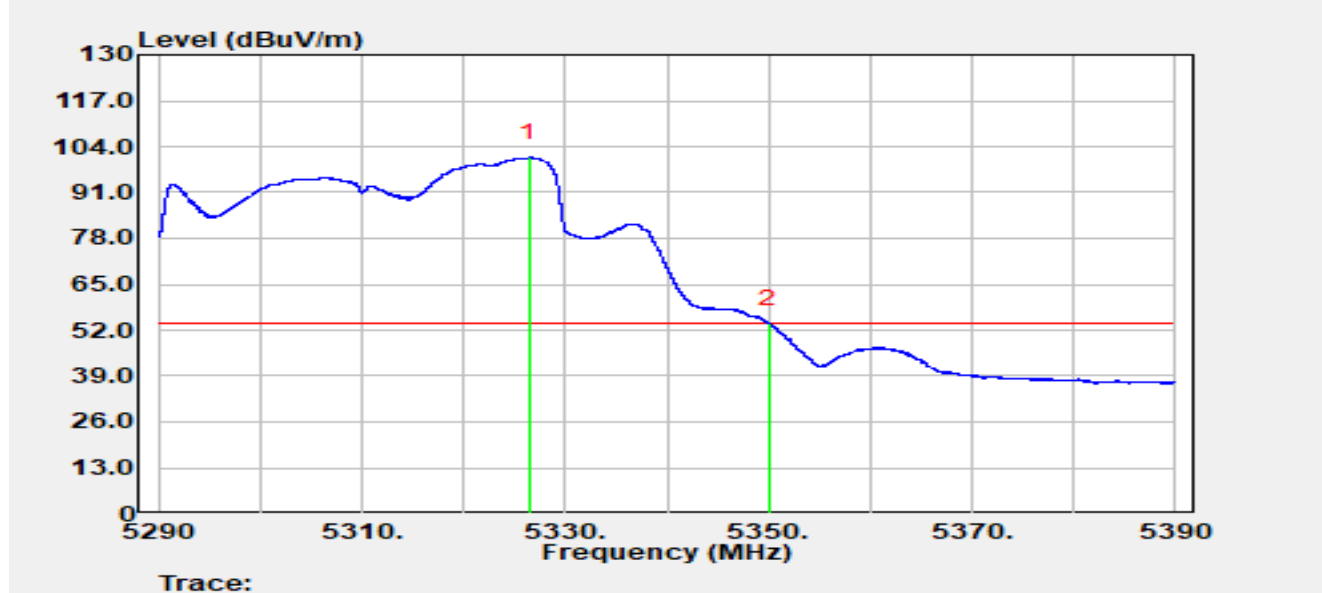


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.470	59.49	41.35	100.84	N/A	N/A	Average
2	*	5350.000	51.50	2.28	53.79	-0.21	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 5310 MHz		

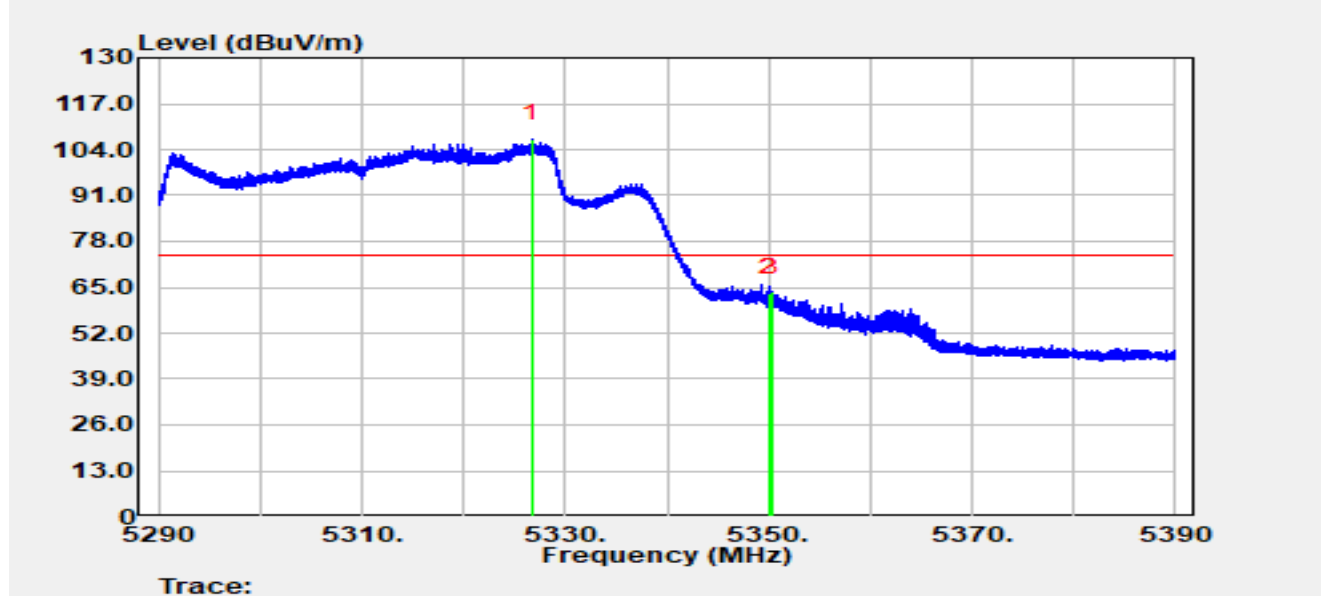


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.650	65.77	41.39	107.16	N/A	N/A	Peak
2		5350.000	61.07	2.28	63.35	-10.65	74.00	Peak
3	*	5350.290	61.50	2.13	63.63	-10.37	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 5310 MHz		

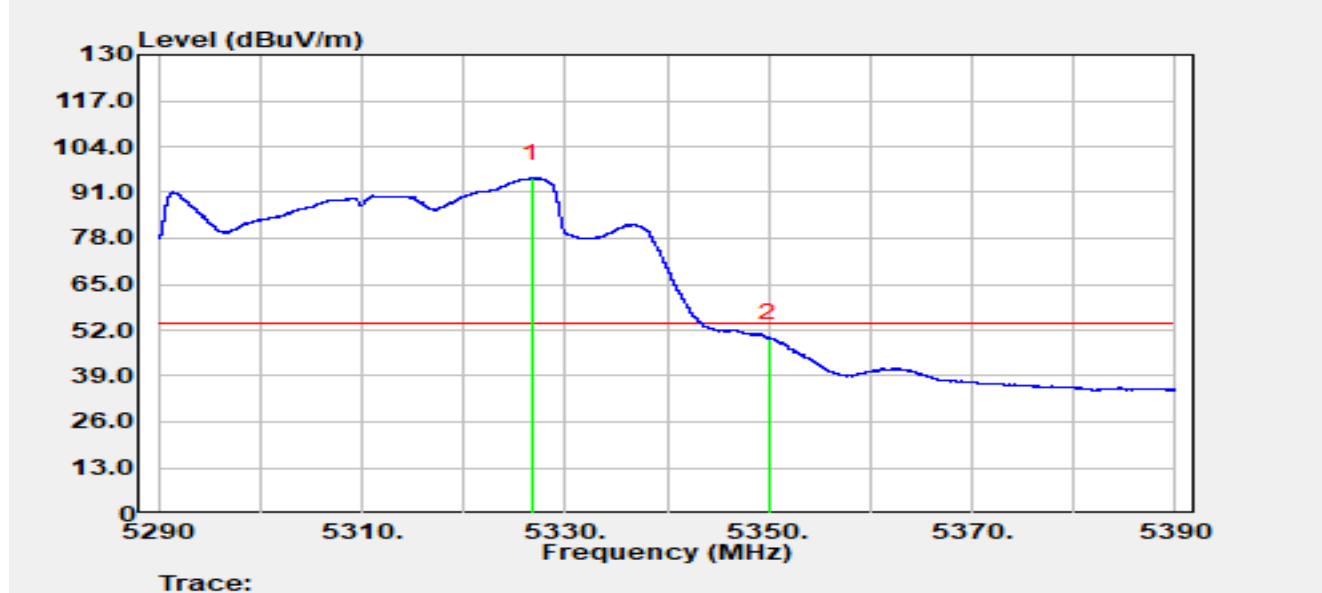


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.690	53.66	41.39	95.05	N/A	N/A	Average
2	*	5350.000	47.45	2.28	49.73	-4.27	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 5510 MHz		

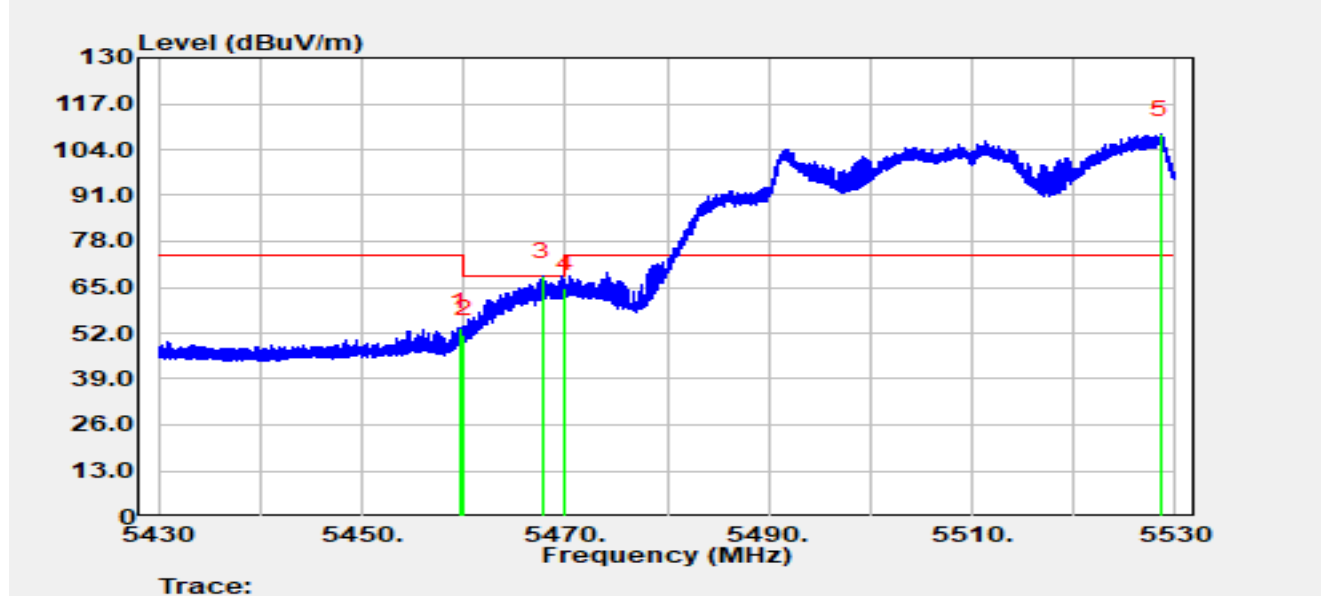


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.670	54.45	-0.74	53.72	-20.28	74.00	Peak
2		5460.000	52.31	-0.69	51.62	-16.58	68.20	Peak
3	*	5467.730	67.79	0.28	68.07	-0.13	68.20	Peak
4		5470.000	63.64	1.00	64.64	-3.56	68.20	Peak
5		5528.520	60.03	48.26	108.28	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 5510 MHz		

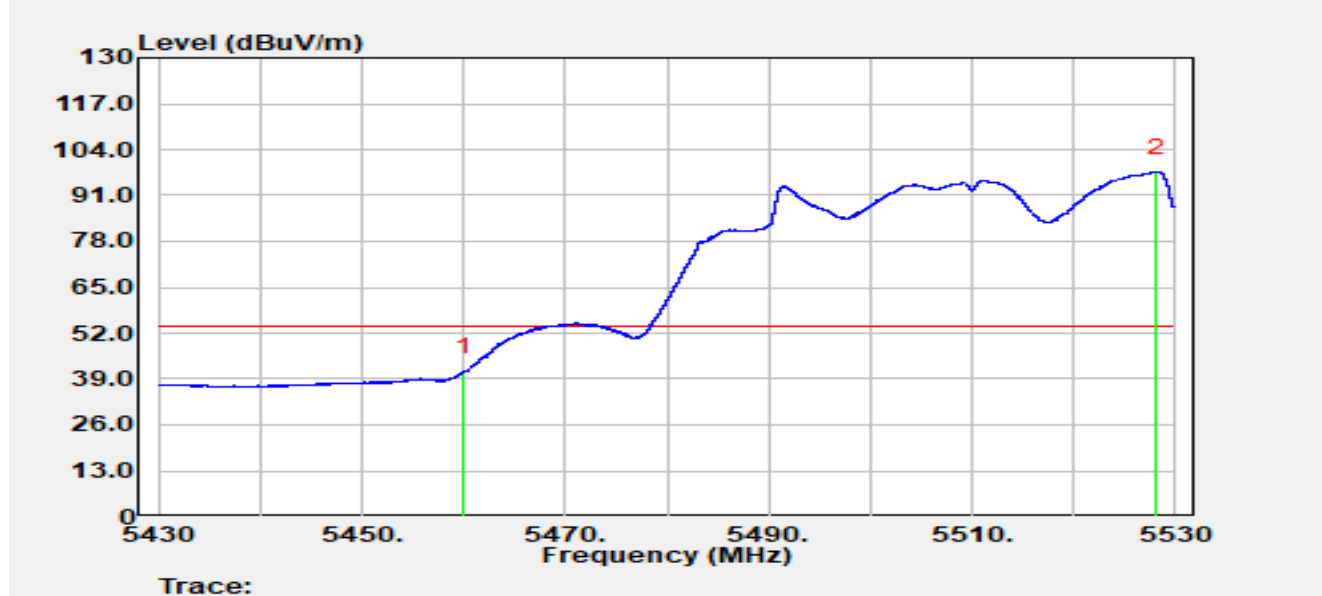


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	41.47	-0.69	40.77	-13.23	54.00	Average
2		5528.190	49.88	47.70	97.58	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 5510 MHz		

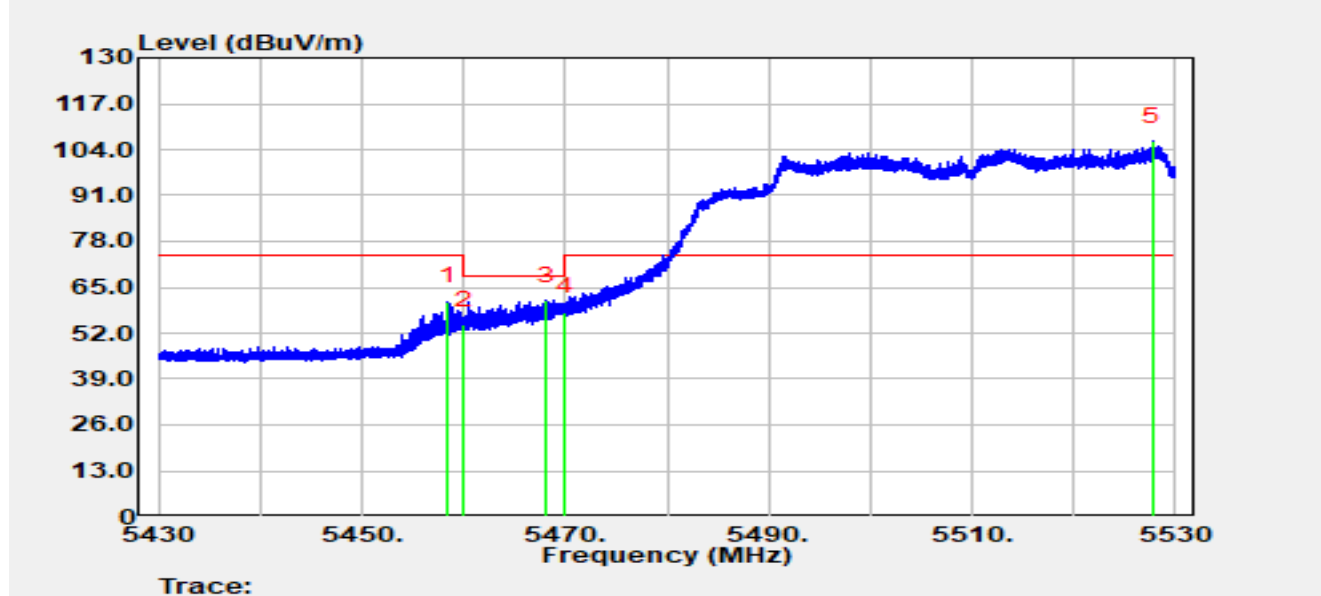


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.480	61.79	-0.79	61.00	-13.00	74.00	Peak
2		5460.000	55.10	-0.69	54.41	-13.79	68.20	Peak
3	*	5468.130	60.85	0.40	61.25	-6.95	68.20	Peak
4		5470.000	57.07	1.00	58.07	-10.13	68.20	Peak
5		5527.730	59.48	46.78	106.26	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 5510 MHz		

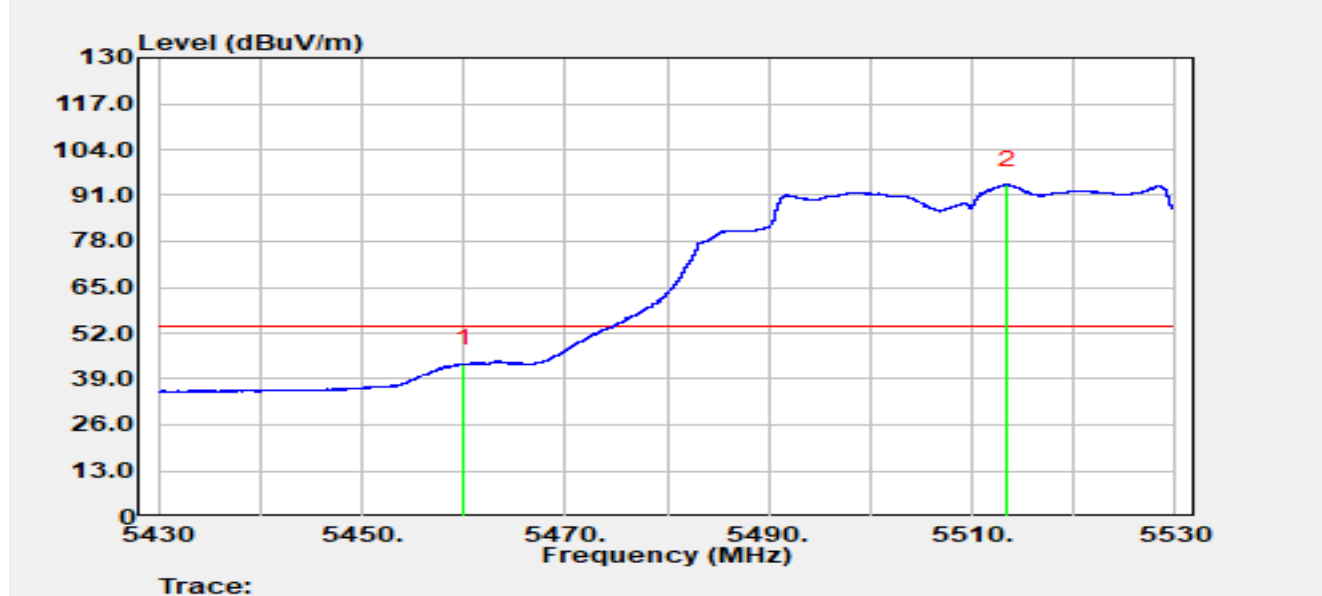


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	44.00	-0.69	43.31	-10.69	54.00	Average
2		5513.510	49.42	44.66	94.07	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 5670 MHz		

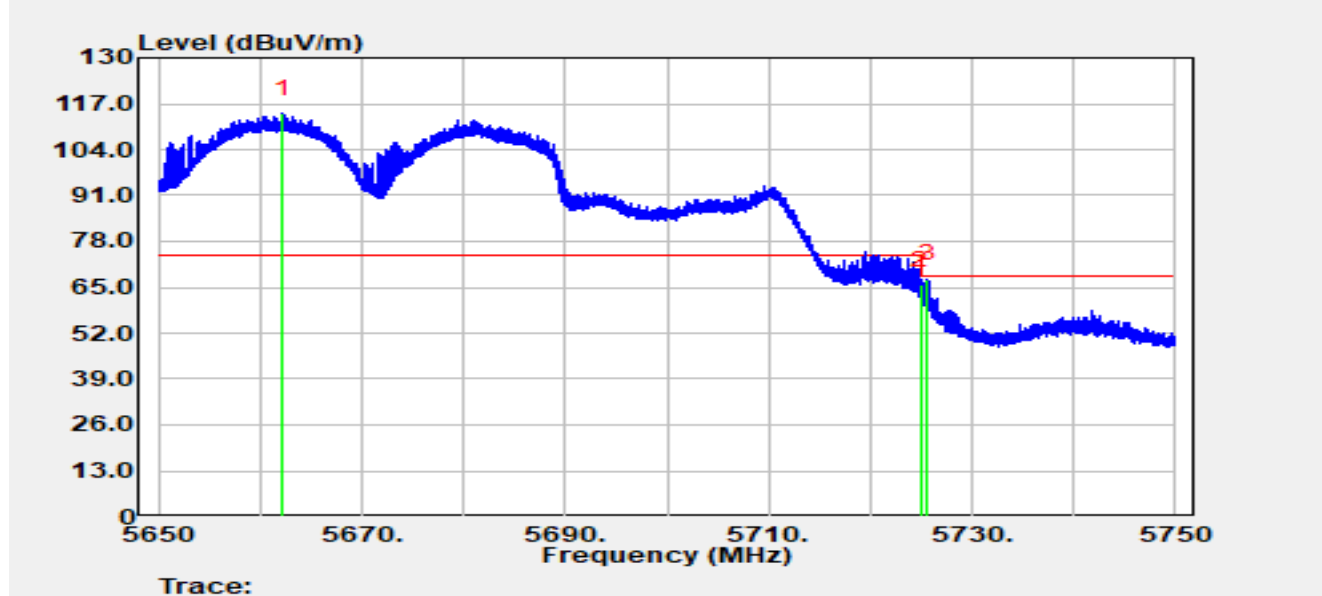


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5662.240	72.72	41.38	114.09	N/A	N/A	Peak
2		5725.000	64.71	1.01	65.72	-2.48	68.20	Peak
3	*	5725.600	66.73	0.67	67.41	-0.79	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 5670 MHz		

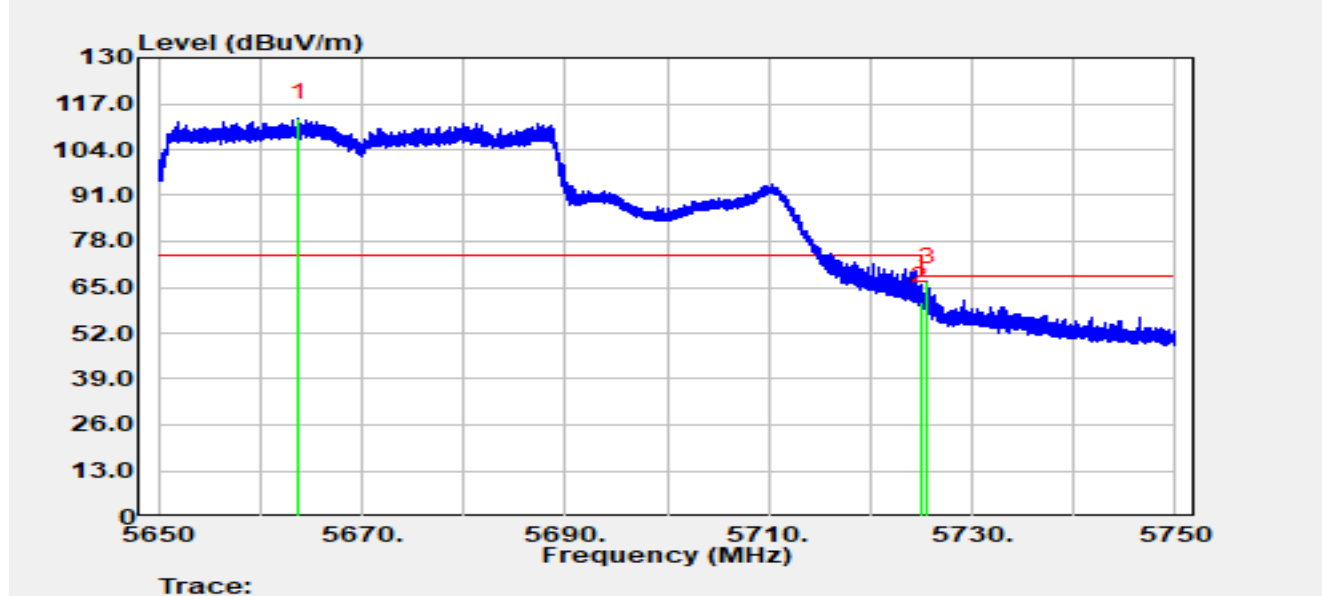


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5663.790	70.12	42.81	112.94	N/A	N/A	Peak
2		5725.000	59.90	1.01	60.90	-7.30	68.20	Peak
3	*	5725.660	66.07	0.64	66.71	-1.49	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 5755 MHz		

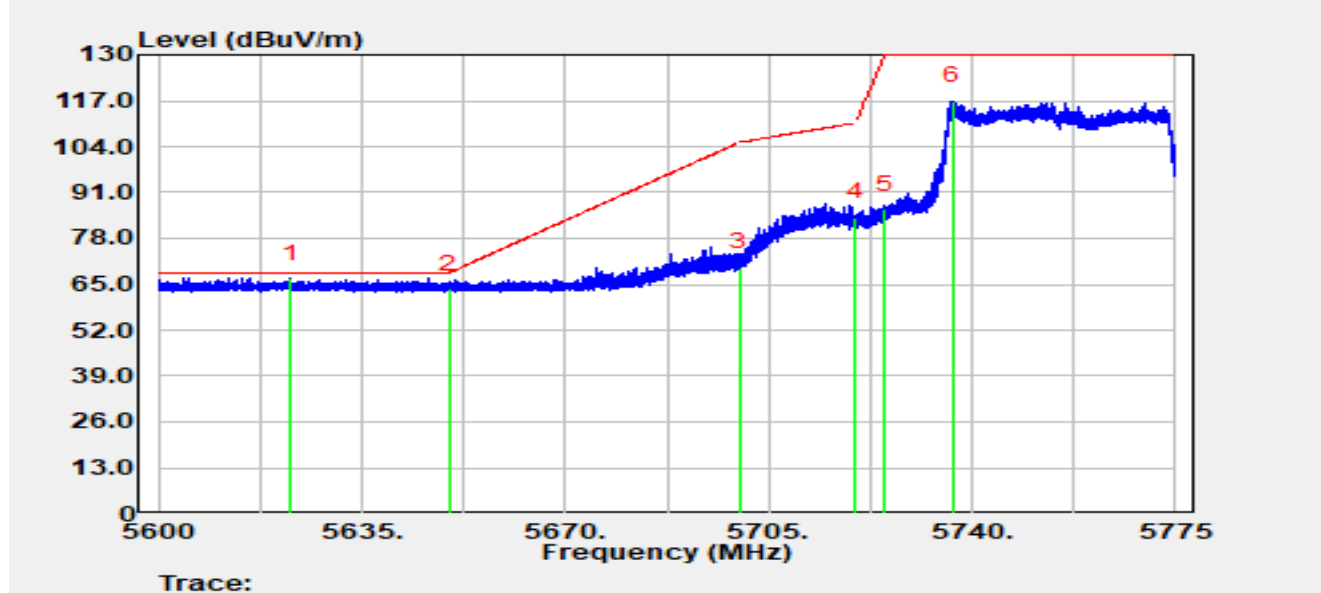


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5622.855	69.93	-3.35	66.57	-1.63	68.20	Peak
2		5650.000	67.30	-3.65	63.66	-4.54	68.20	Peak
3		5700.000	73.34	-3.47	69.86	-35.34	105.20	Peak
4		5720.000	87.45	-3.45	83.99	-26.81	110.80	Peak
5		5725.000	89.79	-3.47	86.32	-43.68	130.00	Peak
6		5736.728	120.50	-3.57	116.93	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 5755 MHz		

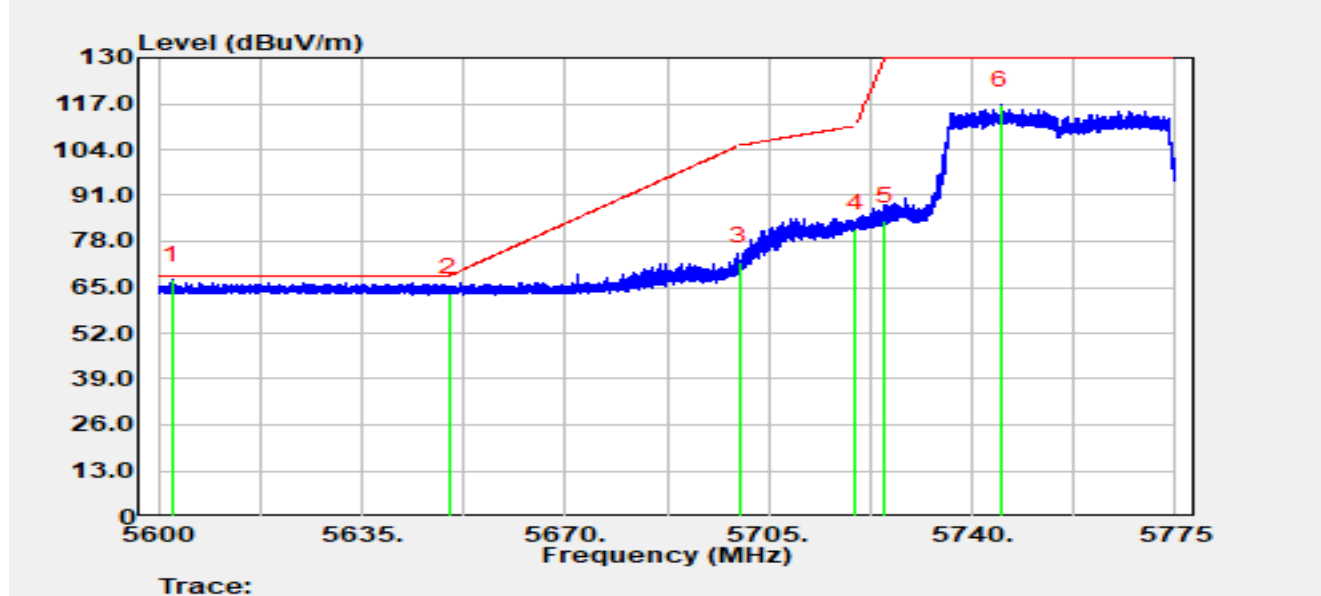


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5602.345	70.57	-3.44	67.13	-1.07	68.20	Peak
2		5650.000	67.10	-3.65	63.45	-4.75	68.20	Peak
3		5700.000	75.63	-3.47	72.16	-33.04	105.20	Peak
4		5720.000	84.98	-3.45	81.53	-29.27	110.80	Peak
5		5725.000	87.14	-3.47	83.68	-46.32	130.00	Peak
6		5744.865	120.30	-3.64	116.65	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 5795 MHz		

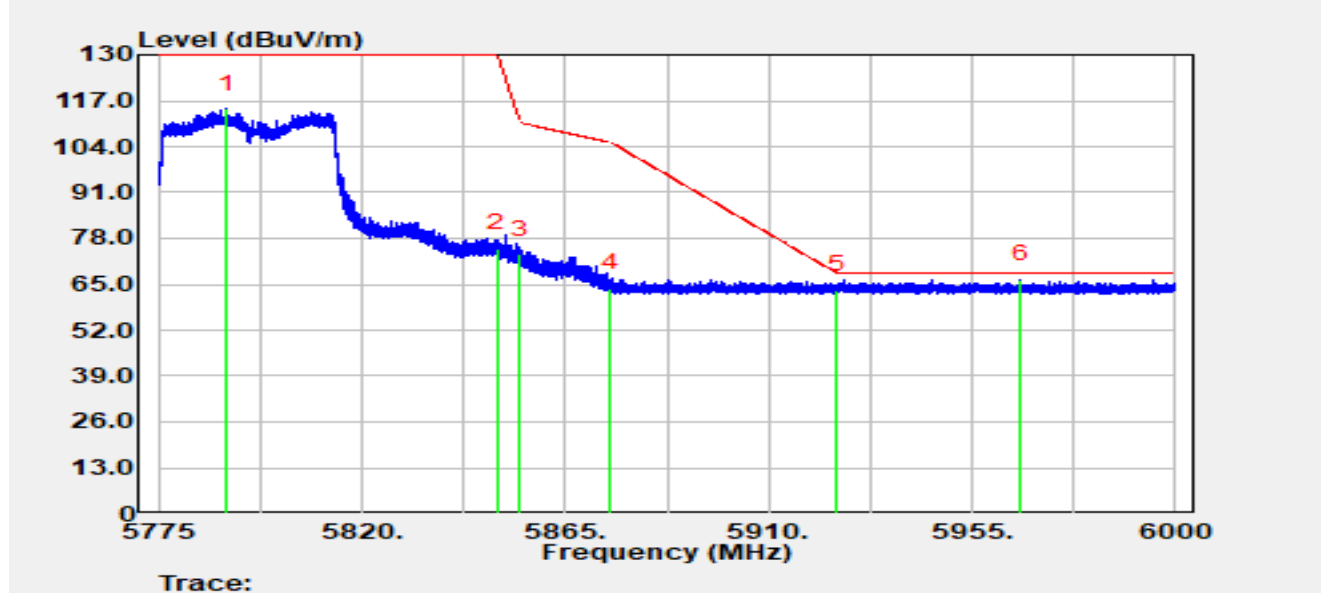


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5790.007	118.25	-3.69	114.56	N/A	N/A	Peak
2		5850.000	78.94	-3.75	75.18	-54.82	130.00	Peak
3		5855.000	77.23	-3.75	73.48	-37.32	110.80	Peak
4		5875.000	67.71	-3.82	63.88	-41.32	105.20	Peak
5		5925.000	67.03	-3.71	63.32	-4.88	68.20	Peak
6	*	5965.643	69.92	-3.63	66.29	-1.91	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 5795 MHz		

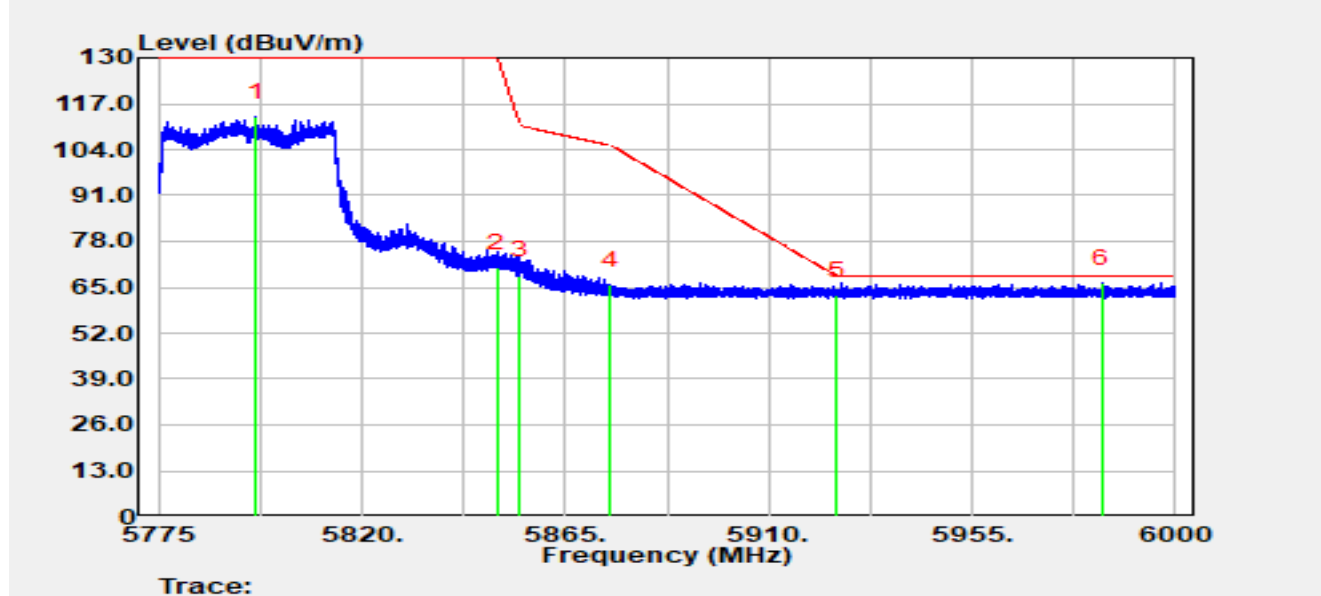


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5796.600	116.96	-3.71	113.25	N/A	N/A	Peak
2		5850.000	74.21	-3.75	70.46	-59.54	130.00	Peak
3		5855.000	72.18	-3.75	68.43	-42.37	110.80	Peak
4		5875.000	69.38	-3.82	65.56	-39.64	105.20	Peak
5		5925.000	66.44	-3.71	62.73	-5.47	68.20	Peak
6	*	5983.620	69.79	-3.67	66.12	-2.08	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 5210 MHz		

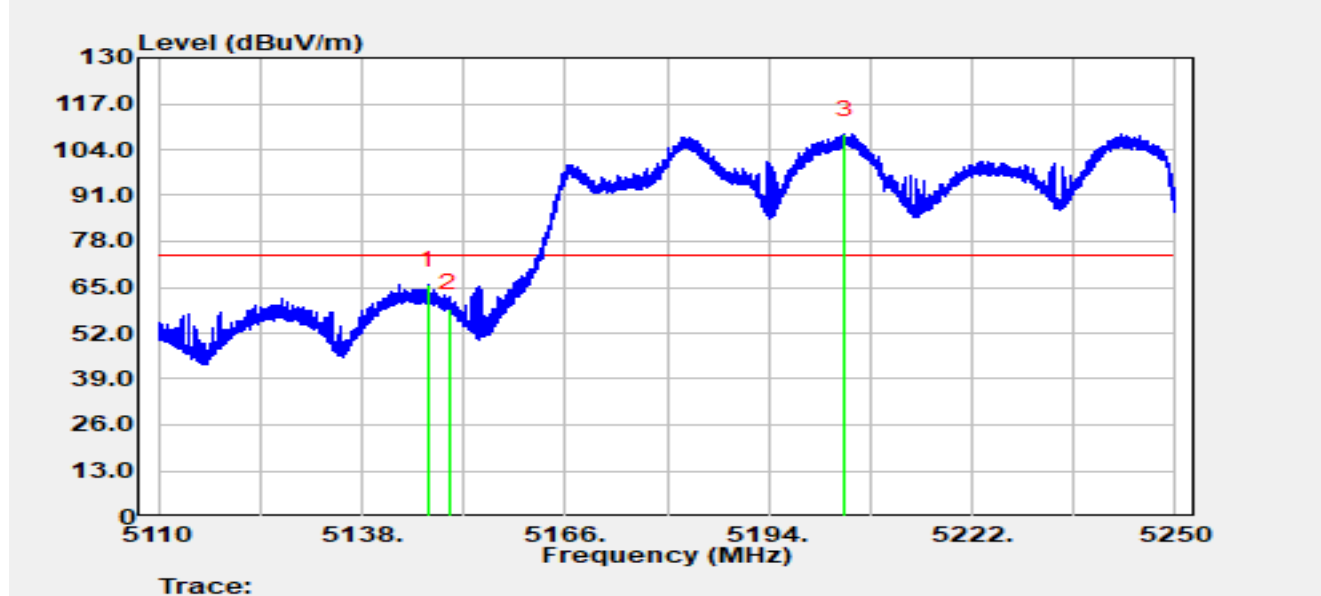


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.044	66.70	-1.15	65.55	-8.45	74.00	Peak
2		5150.000	59.55	-0.54	59.01	-14.99	74.00	Peak
3		5204.402	63.82	44.45	108.26	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 5210 MHz		

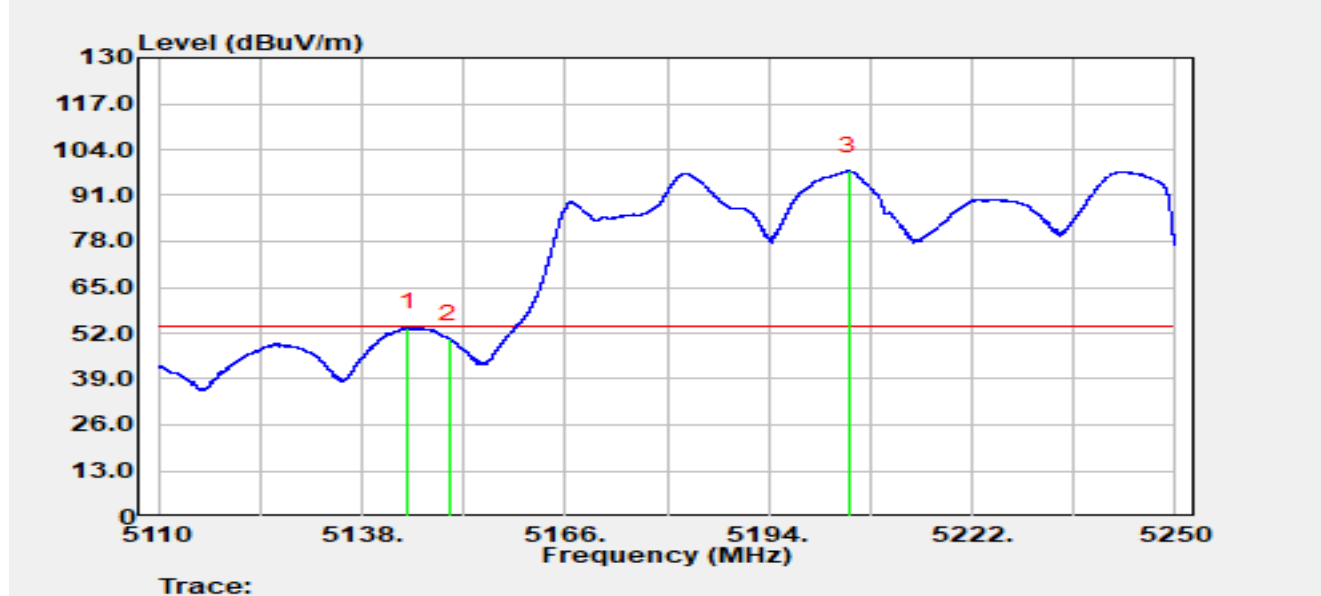


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.286	55.19	-1.62	53.57	-0.43	54.00	Average
2		5150.000	50.90	-0.54	50.36	-3.64	54.00	Average
3		5205.102	53.68	44.41	98.09	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 5210 MHz		

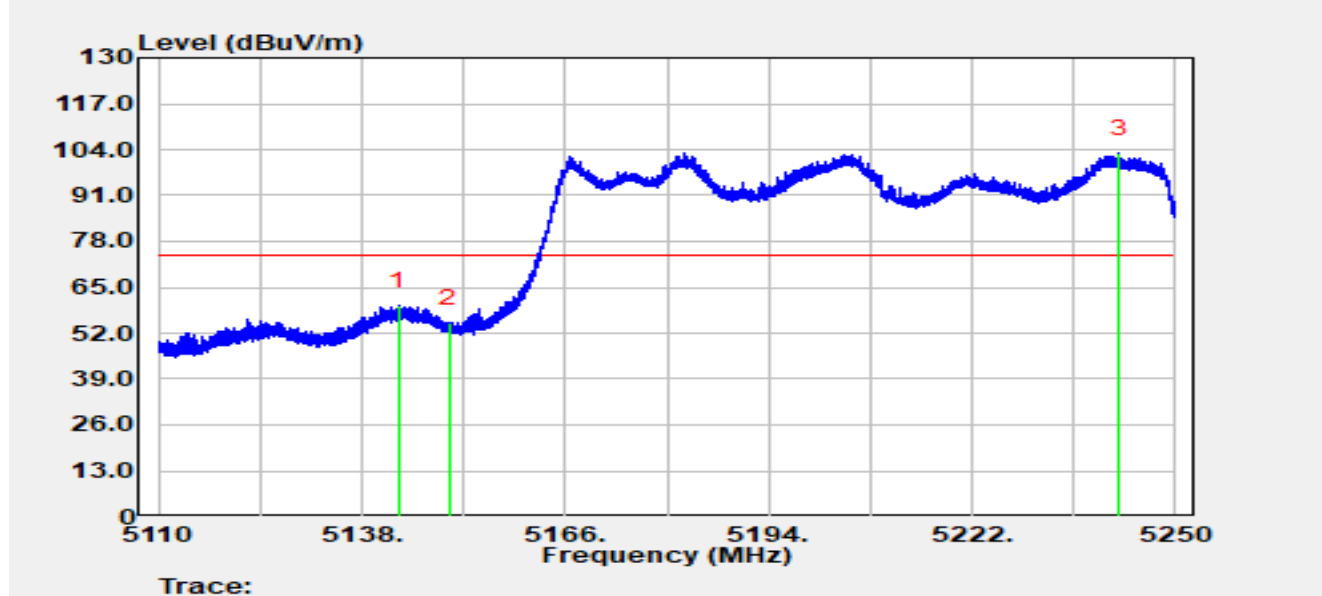


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.040	61.52	-1.76	59.76	-14.24	74.00	Peak
2		5150.000	55.31	-0.54	54.77	-19.23	74.00	Peak
3		5242.286	56.72	46.19	102.91	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 5210 MHz		

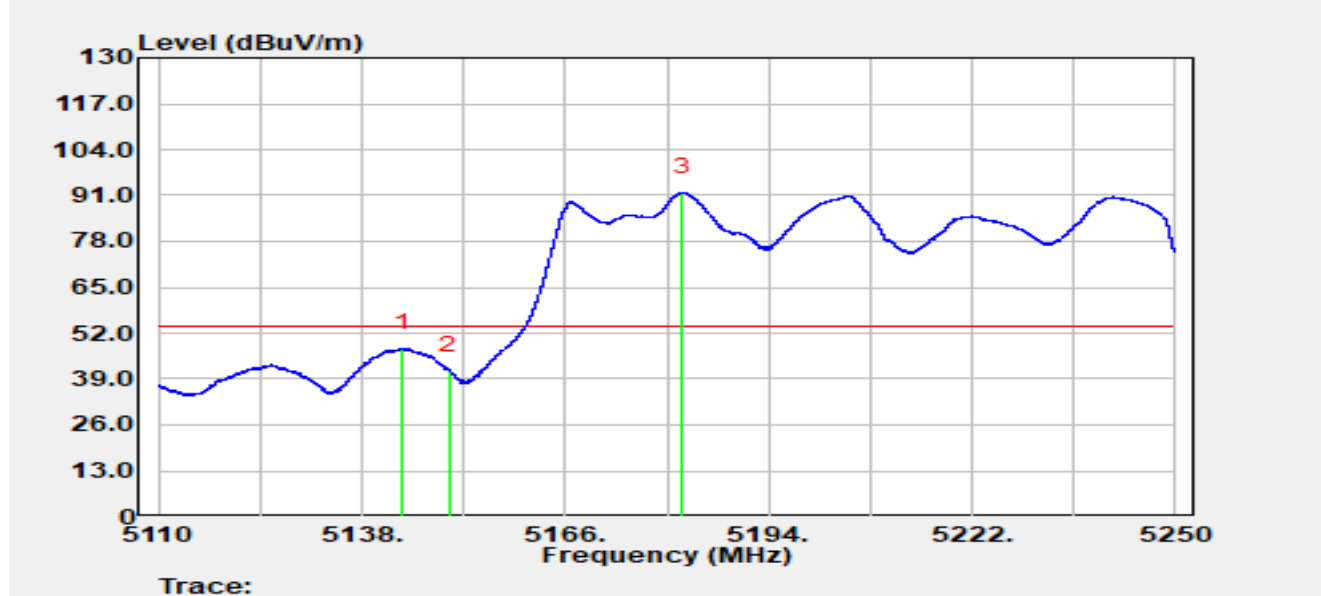


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.600	49.24	-1.54	47.69	-6.31	54.00	Average
2		5150.000	41.95	-0.54	41.41	-12.59	54.00	Average
3		5182.198	48.43	43.35	91.78	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 5290 MHz		

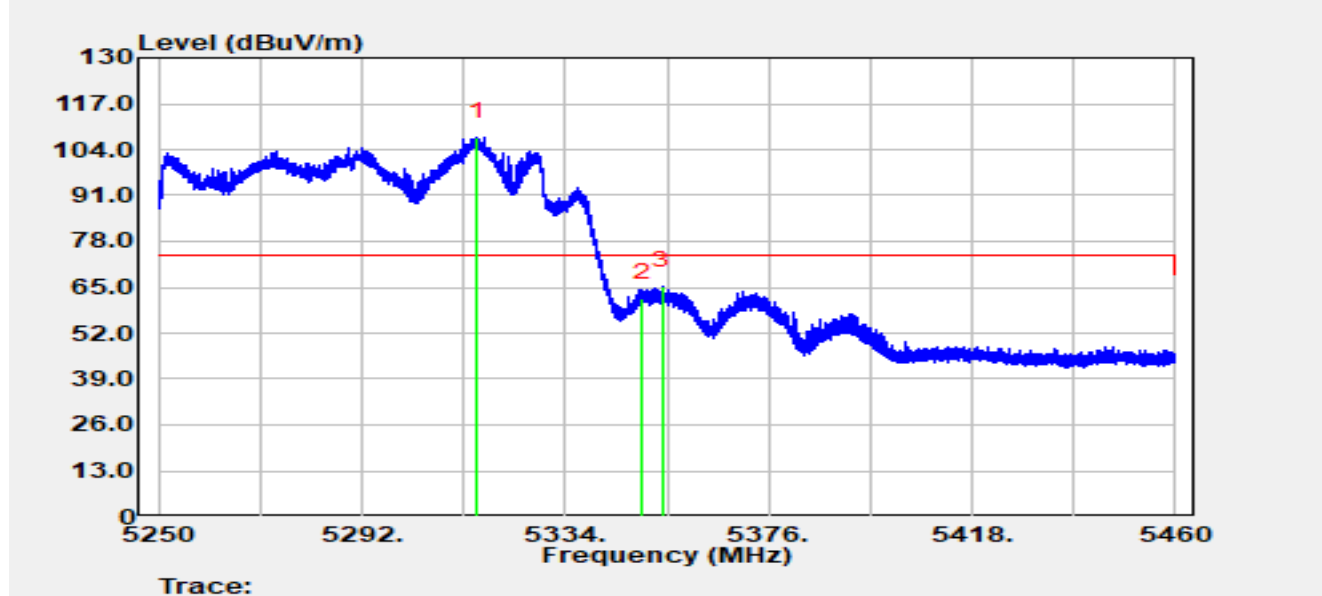


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5315.856	59.36	48.22	107.58	N/A	N/A	Peak
2		5350.000	59.67	2.28	61.95	-12.05	74.00	Peak
3	*	5354.055	65.29	0.18	65.46	-8.54	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 5290 MHz		

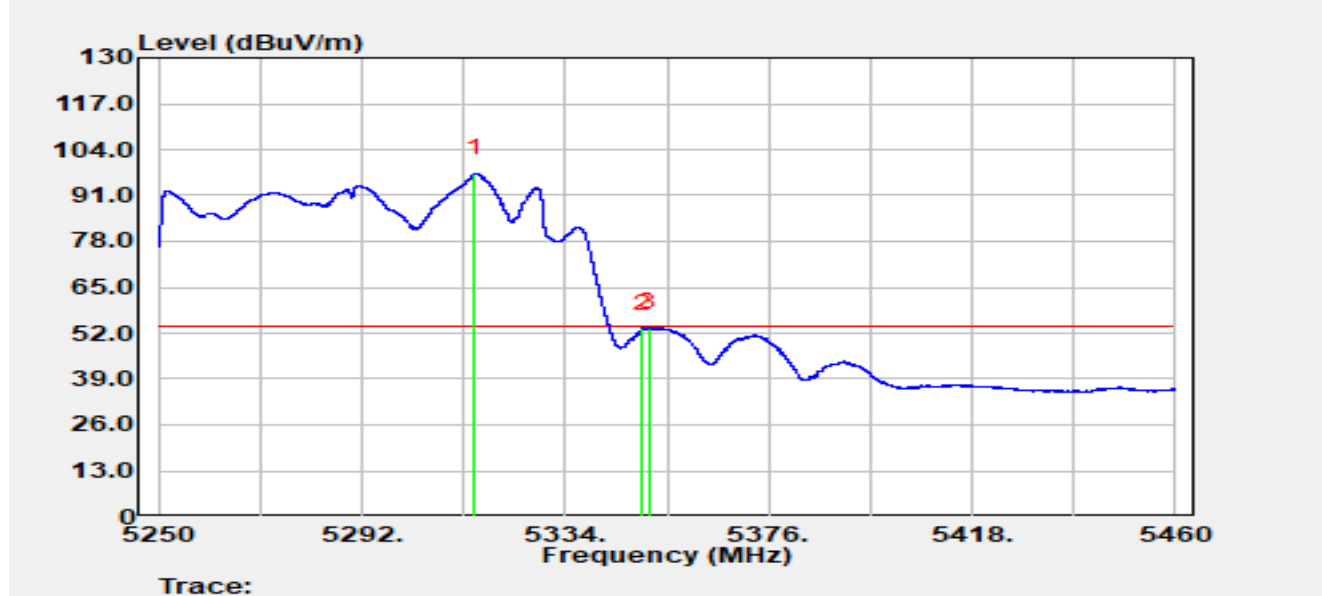


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5315.121	47.65	49.52	97.18	N/A	N/A	Average
2		5350.000	51.01	2.28	53.29	-0.71	54.00	Average
3	*	5351.220	52.09	1.49	53.58	-0.42	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 5290 MHz		

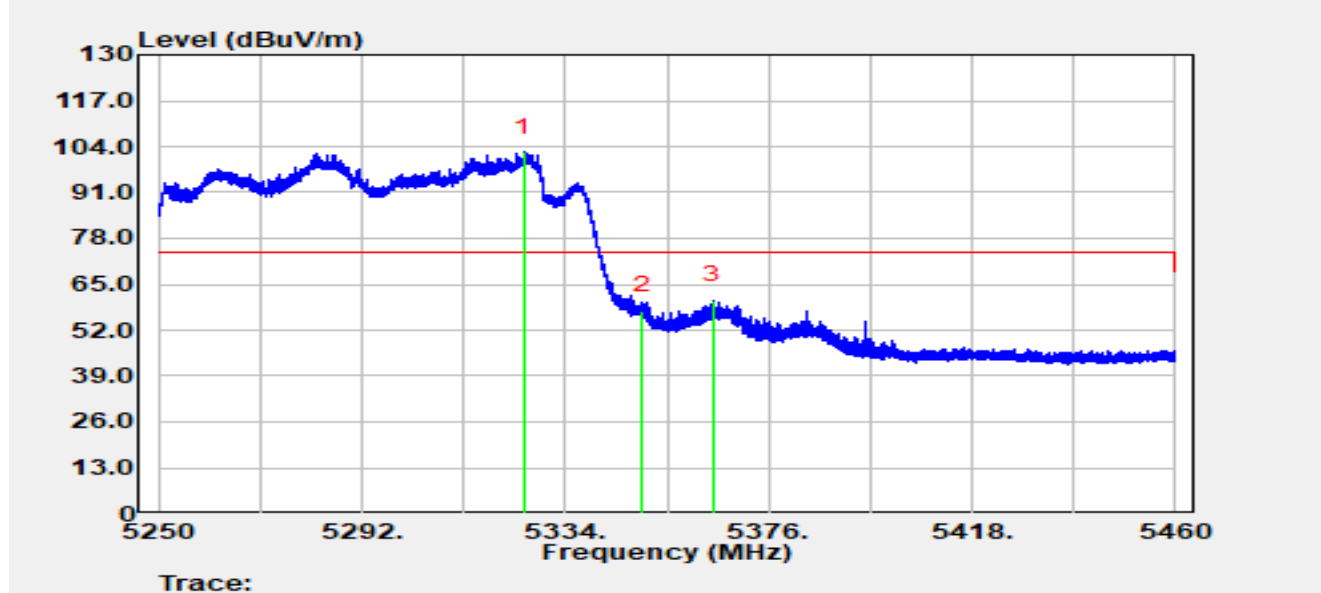


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5325.411	60.33	41.97	102.29	N/A	N/A	Peak
2		5350.000	55.29	2.28	57.57	-16.43	74.00	Peak
3	*	5364.471	61.64	-1.30	60.34	-13.66	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 5290 MHz		

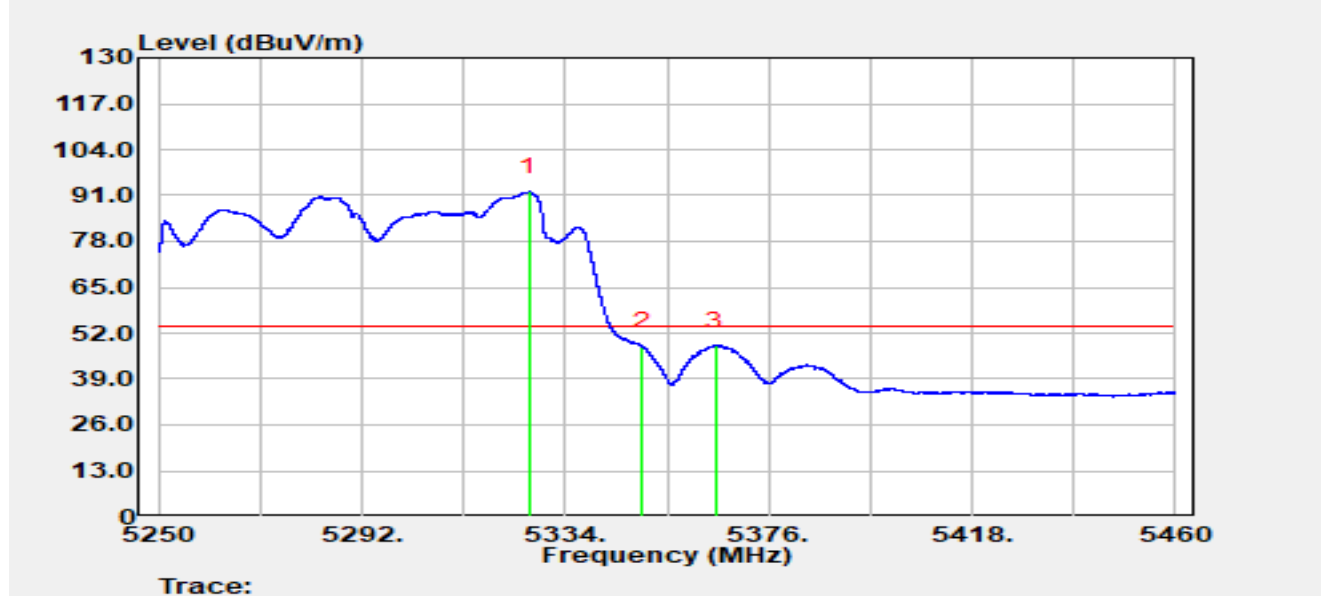


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.545	50.66	41.37	92.03	N/A	N/A	Average
2		5350.000	45.87	2.28	48.15	-5.85	54.00	Average
3	*	5365.059	49.91	-1.37	48.55	-5.45	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 5530 MHz		

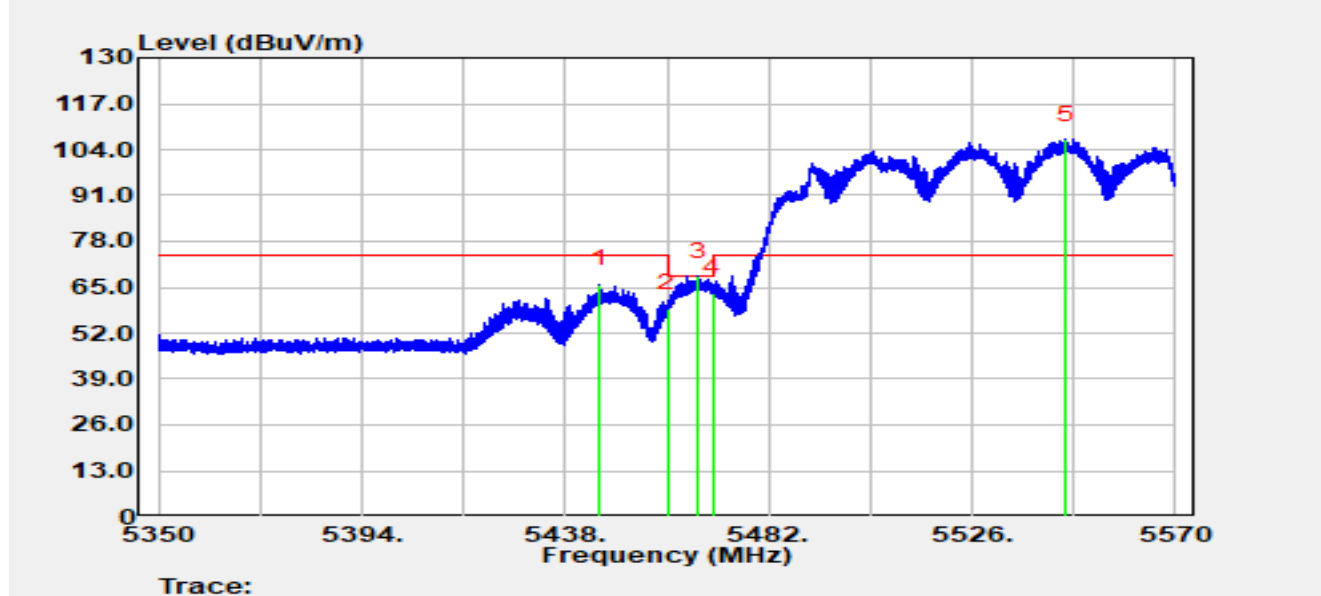


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5445.414	67.32	-1.52	65.80	-8.20	74.00	Peak
2		5460.000	59.66	-0.69	58.97	-9.23	68.20	Peak
3	*	5466.842	68.00	0.08	68.08	-0.12	68.20	Peak
4		5470.000	62.44	1.00	63.44	-4.76	68.20	Peak
5		5546.196	63.59	43.30	106.89	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 5530 MHz		

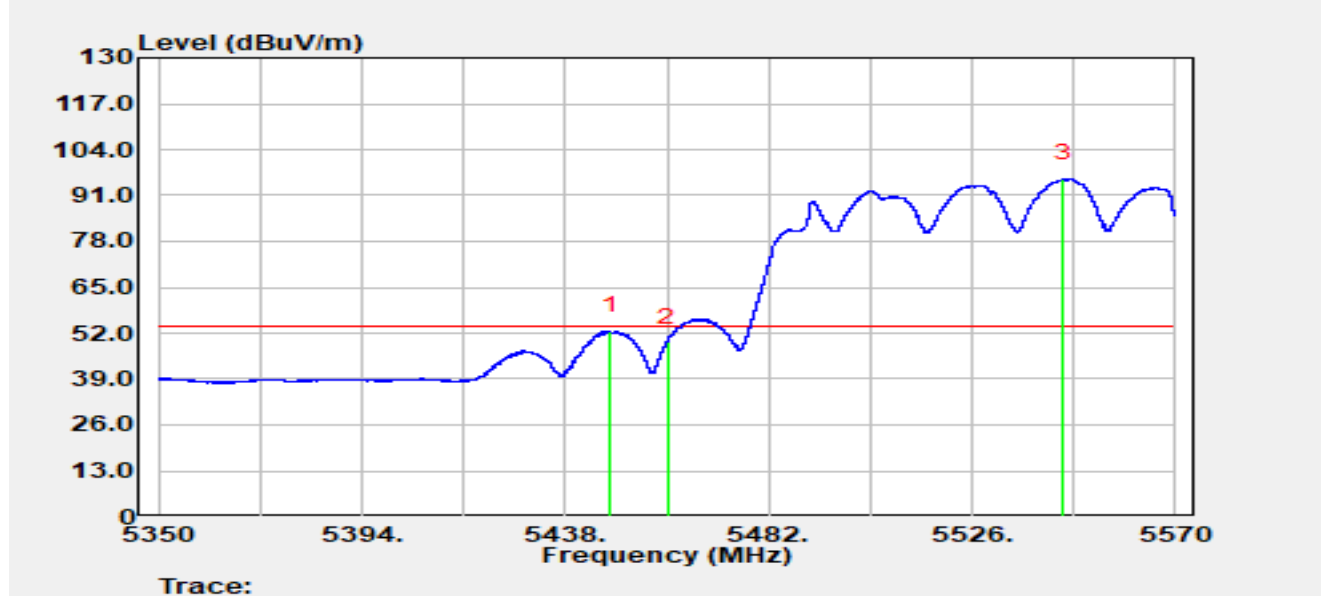


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5447.790	54.05	-1.44	52.61	-1.39	54.00	Average
2		5460.000	50.17	-0.69	49.47	-4.53	54.00	Average
3		5545.756	52.71	42.99	95.70	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 5530 MHz		

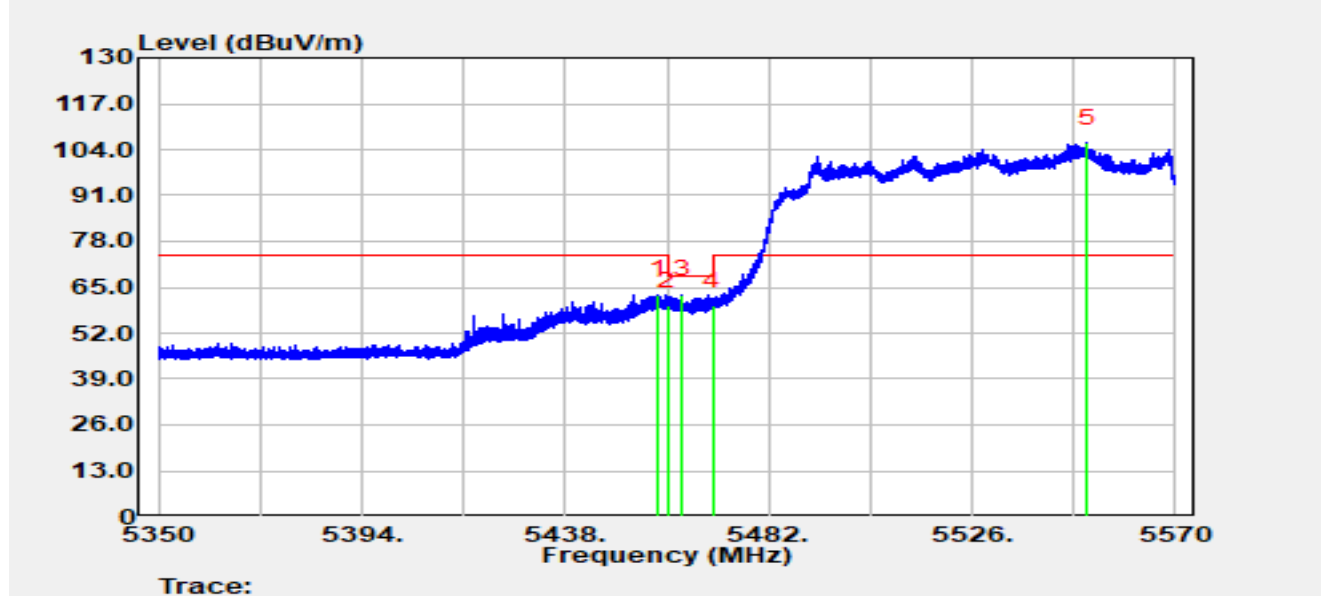


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.240	63.70	-0.81	62.89	-11.11	74.00	Peak
2		5460.000	60.44	-0.69	59.75	-8.45	68.20	Peak
3		5463.212	63.43	-0.48	62.95	-5.25	68.20	Peak
4		5470.000	58.65	1.00	59.65	-8.55	68.20	Peak
5		5550.816	57.27	48.47	105.74	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 5530 MHz		

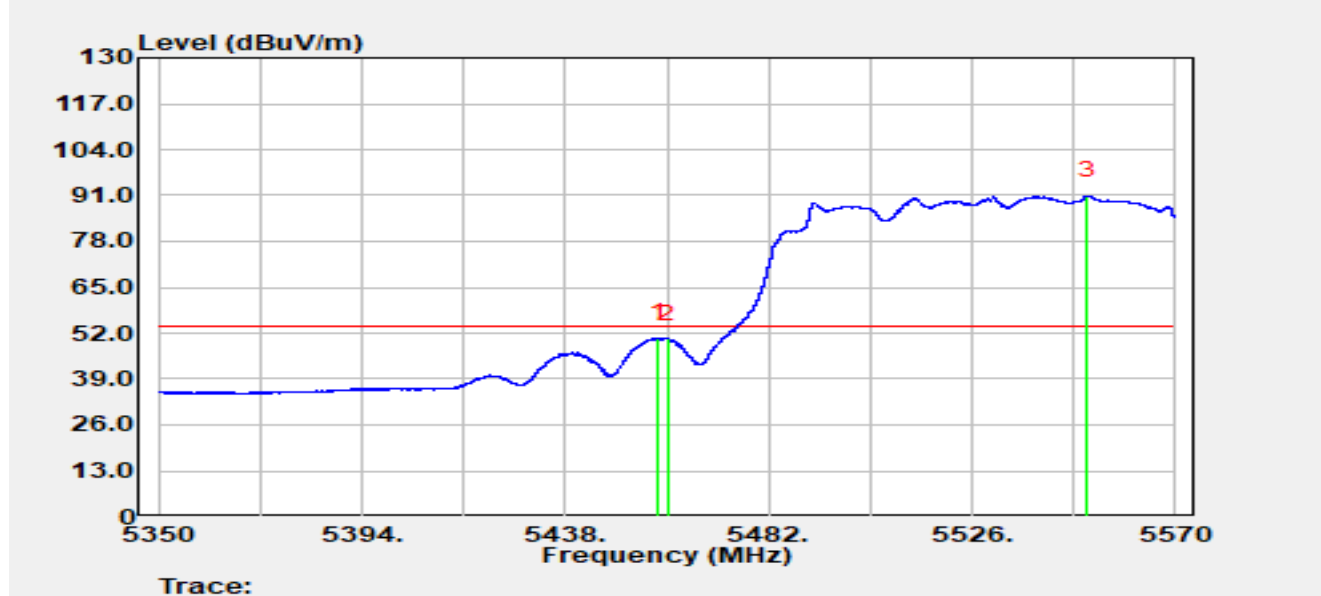


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.196	51.45	-0.81	50.64	-3.36	54.00	Average
2		5460.000	51.07	-0.69	50.38	-3.62	54.00	Average
3		5551.036	42.31	48.54	90.85	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 5610 MHz		

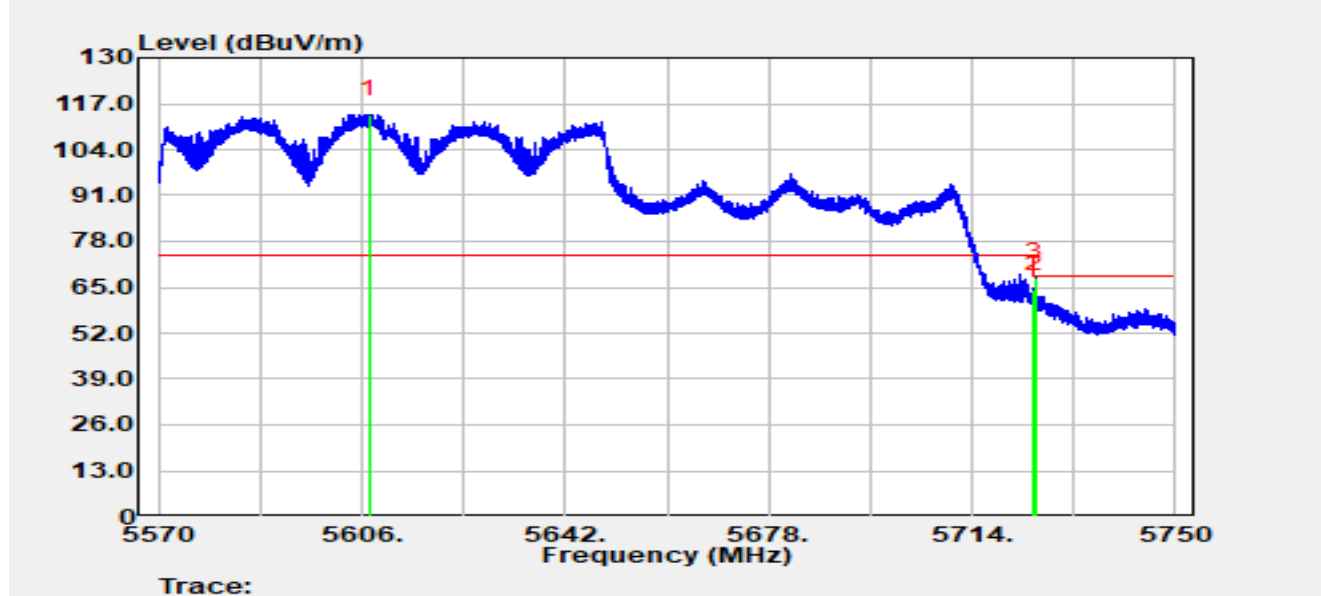


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5607.368	69.46	44.59	114.05	N/A	N/A	Peak
2		5725.000	63.46	1.01	64.47	-3.73	68.20	Peak
3	*	5725.088	66.90	0.96	67.85	-0.35	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 5610 MHz		

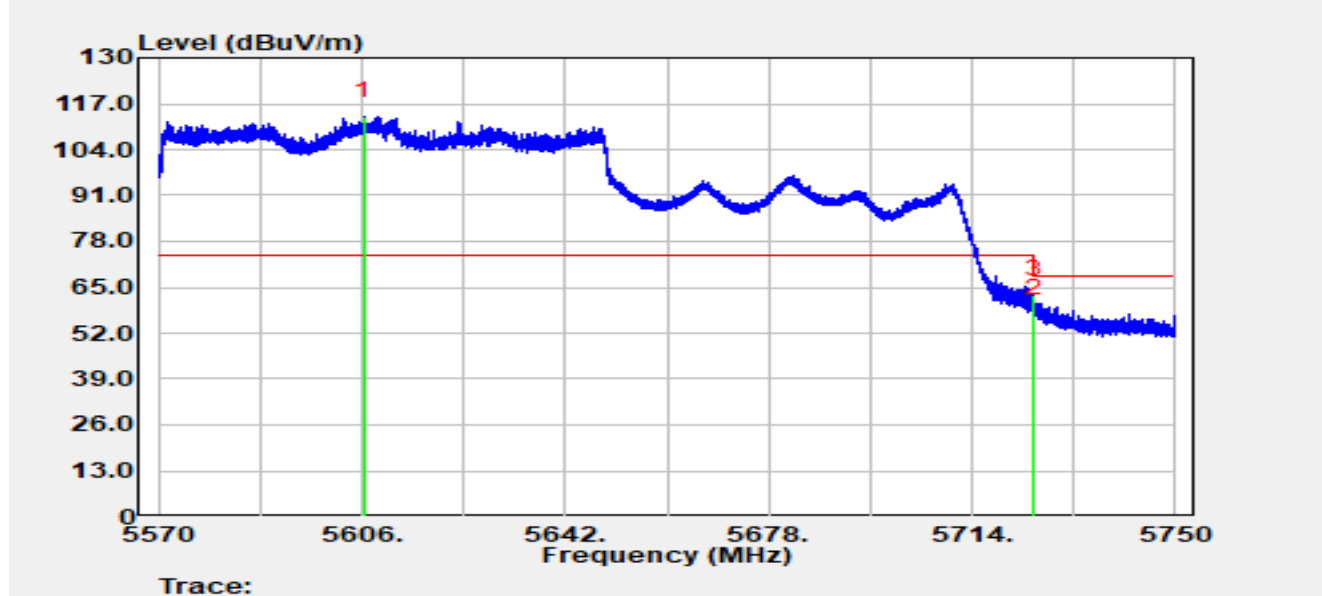


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5606.450	70.25	43.23	113.47	N/A	N/A	Peak
2		5725.000	56.84	1.01	57.84	-10.36	68.20	Peak
3	*	5725.070	61.97	0.97	62.93	-5.27	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 5775 MHz		

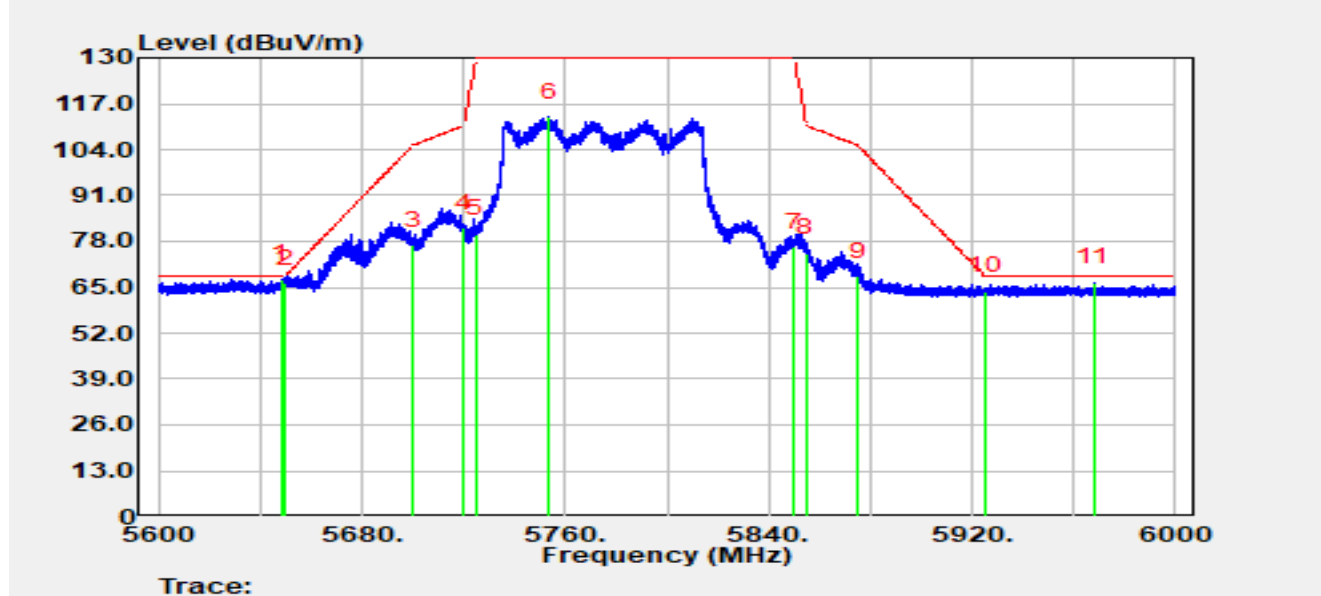


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5648.080	70.94	-3.65	67.29	-0.91	68.20	Peak
2		5650.000	69.77	-3.65	66.13	-2.07	68.20	Peak
3		5700.000	80.40	-3.47	76.92	-28.28	105.20	Peak
4		5720.000	85.25	-3.45	81.80	-29.00	110.80	Peak
5		5725.000	83.57	-3.47	80.10	-49.90	130.00	Peak
6		5753.680	116.85	-3.65	113.20	N/A	N/A	Peak
7		5850.000	80.22	-3.75	76.46	-53.54	130.00	Peak
8		5855.000	78.37	-3.75	74.62	-36.18	110.80	Peak
9		5875.000	71.84	-3.82	68.02	-37.18	105.20	Peak
10		5925.000	67.68	-3.71	63.97	-4.23	68.20	Peak
11		5968.000	69.92	-3.64	66.28	-1.92	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 5775 MHz		

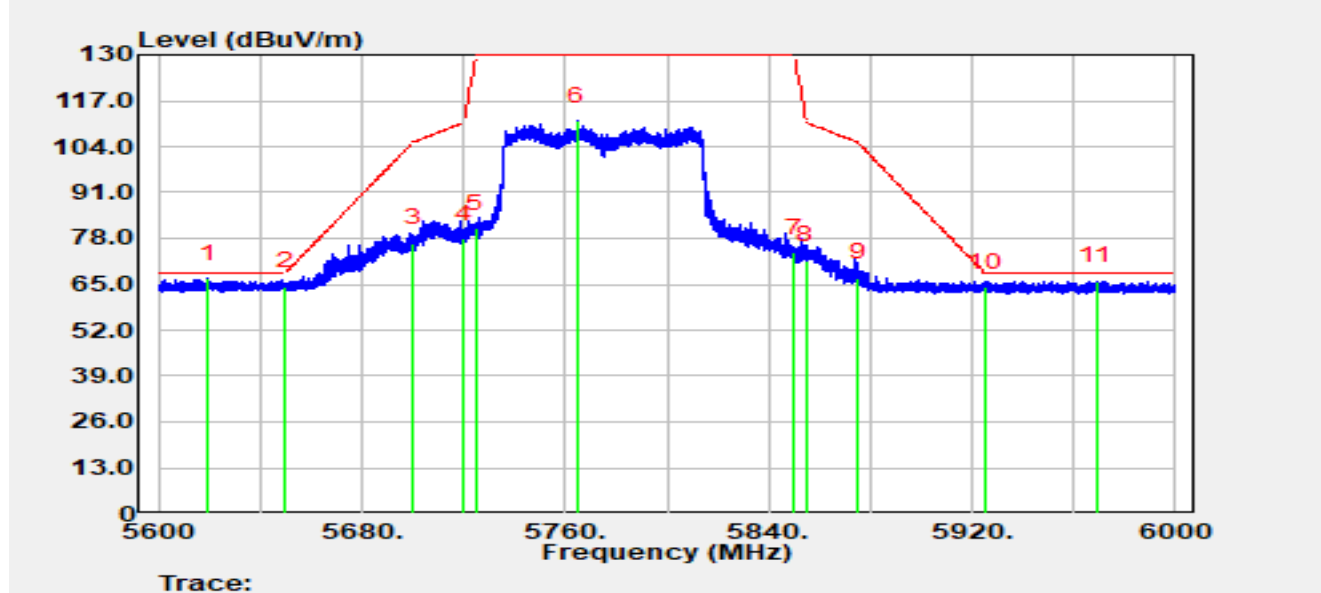


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5619.360	70.03	-3.39	66.63	-1.57	68.20	Peak
2		5650.000	67.97	-3.65	64.32	-3.88	68.20	Peak
3		5700.000	80.18	-3.47	76.71	-28.49	105.20	Peak
4		5720.000	81.39	-3.45	77.93	-32.87	110.80	Peak
5		5725.000	84.40	-3.47	80.93	-49.07	130.00	Peak
6		5764.720	114.85	-3.66	111.19	N/A	N/A	Peak
7		5850.000	77.67	-3.75	73.91	-56.09	130.00	Peak
8		5855.000	75.38	-3.75	71.63	-39.17	110.80	Peak
9		5875.000	70.68	-3.82	66.86	-38.34	105.20	Peak
10		5925.000	67.76	-3.71	64.06	-4.14	68.20	Peak
11		5968.880	69.62	-3.64	65.98	-2.22	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 5250 MHz		

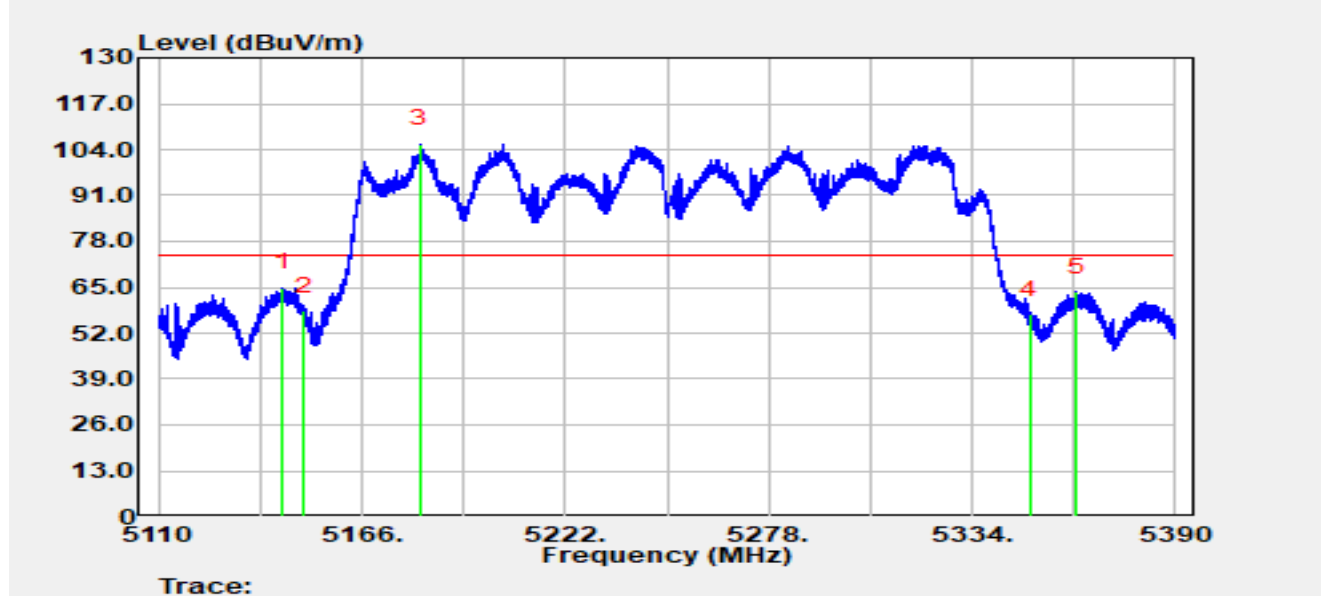


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.356	66.47	-1.63	64.84	-9.16	74.00	Peak
2		5150.000	58.68	-0.54	58.13	-15.87	74.00	Peak
3		5182.128	62.10	43.51	105.61	N/A	N/A	Peak
4		5350.000	55.08	2.28	57.36	-16.64	74.00	Peak
5		5362.952	64.71	-1.13	63.59	-10.41	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 5250 MHz		

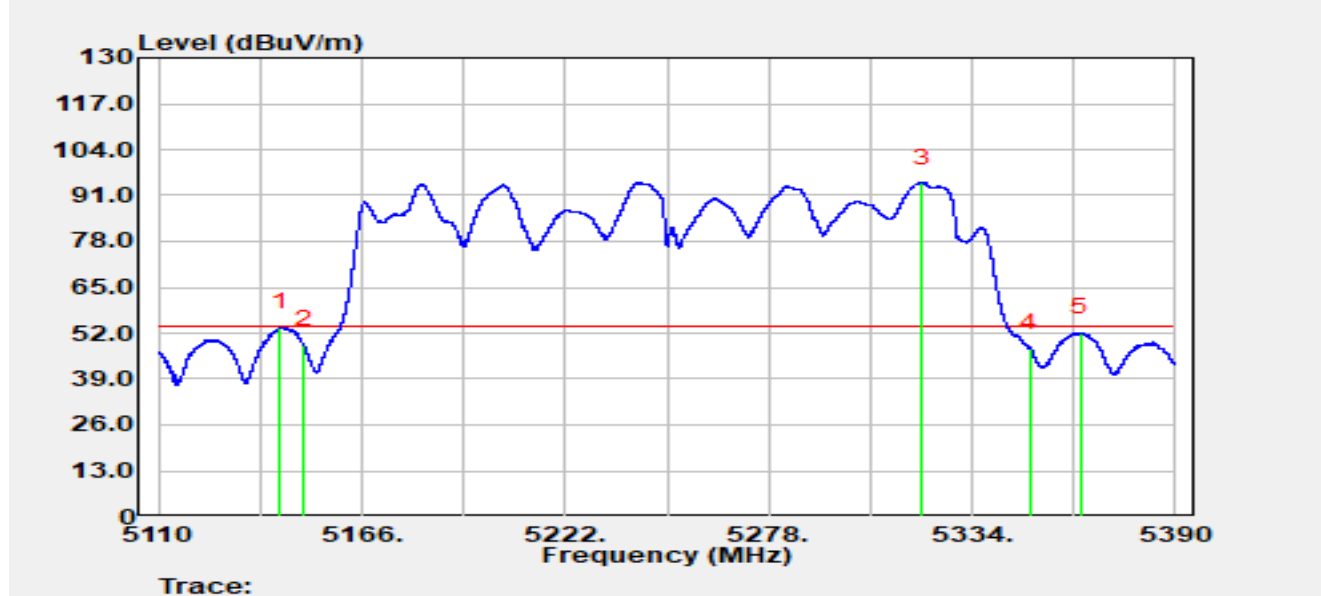


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.628	55.24	-1.55	53.69	-0.31	54.00	Average
2		5150.000	49.18	-0.54	48.64	-5.36	54.00	Average
3		5320.112	51.15	43.52	94.66	N/A	N/A	Average
4		5350.000	45.48	2.28	47.76	-6.24	54.00	Average
5		5363.932	53.25	-1.21	52.05	-1.95	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 5250 MHz		

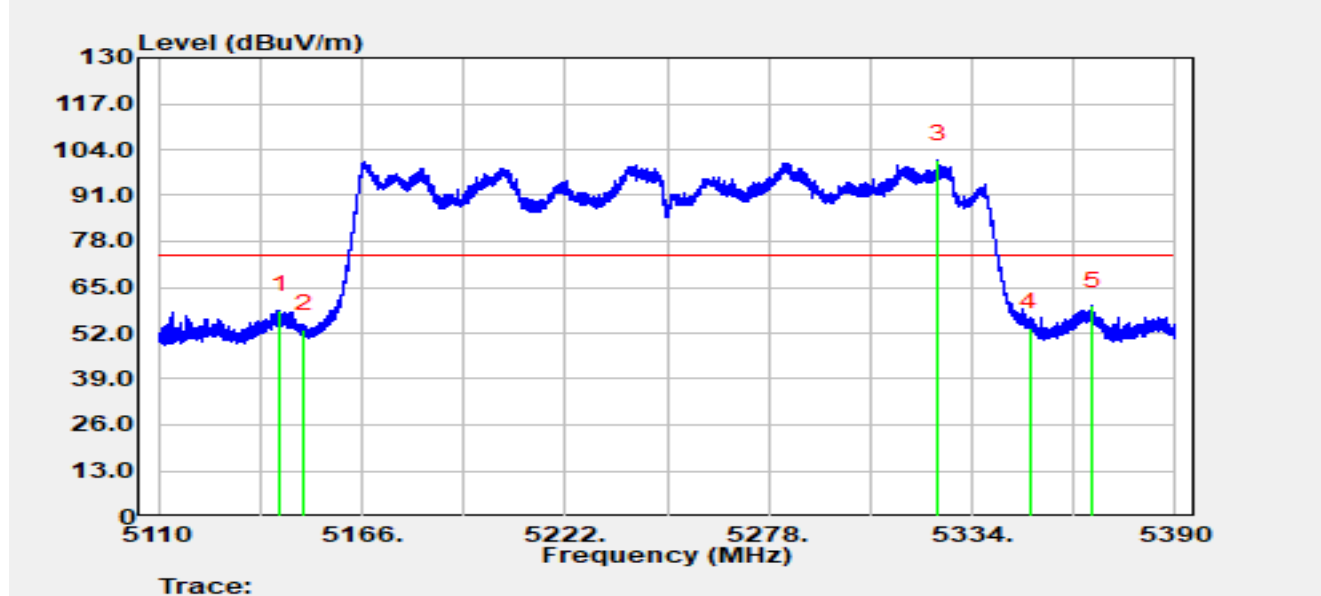


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5143.628	60.15	-1.55	58.61	-15.39	74.00	Peak
2		5150.000	53.66	-0.54	53.12	-20.88	74.00	Peak
3		5324.816	58.52	42.56	101.08	N/A	N/A	Peak
4		5350.000	51.44	2.28	53.72	-20.28	74.00	Peak
5	*	5367.152	61.20	-1.50	59.69	-14.31	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 5250 MHz		

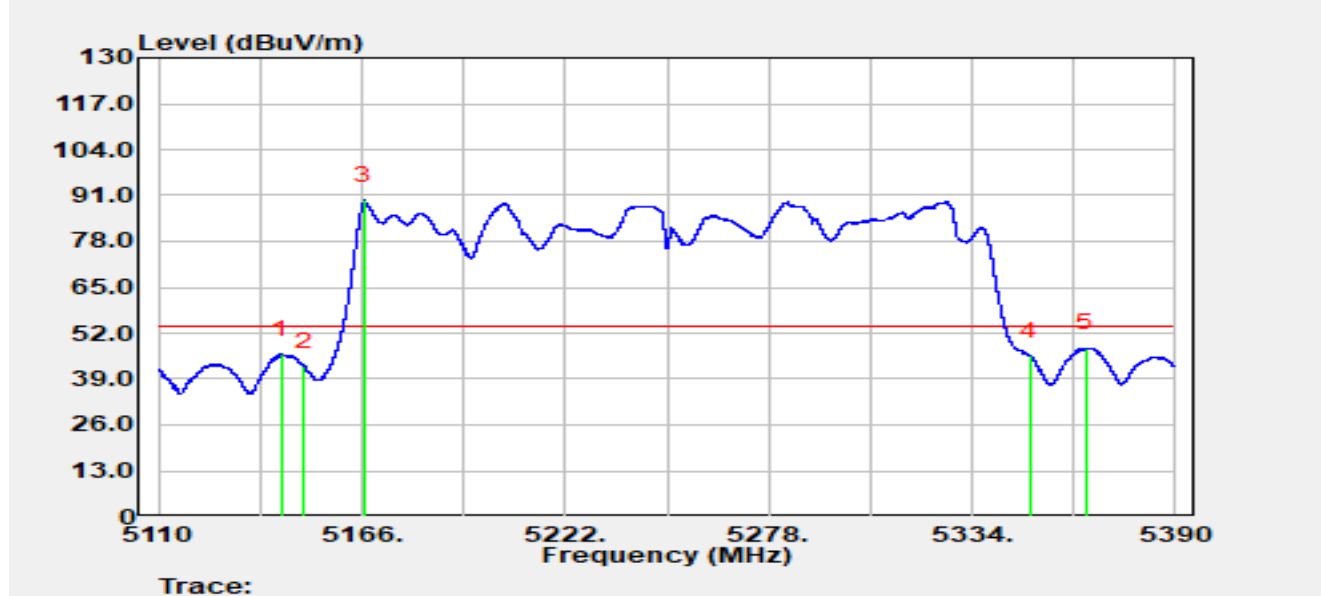


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5143.684	47.61	-1.55	46.06	-7.94	54.00	Average
2		5150.000	43.19	-0.54	42.65	-11.35	54.00	Average
3		5166.588	36.44	53.09	89.53	N/A	N/A	Average
4		5350.000	43.14	2.28	45.42	-8.58	54.00	Average
5	*	5365.220	49.16	-1.38	47.78	-6.22	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 5570 MHz		

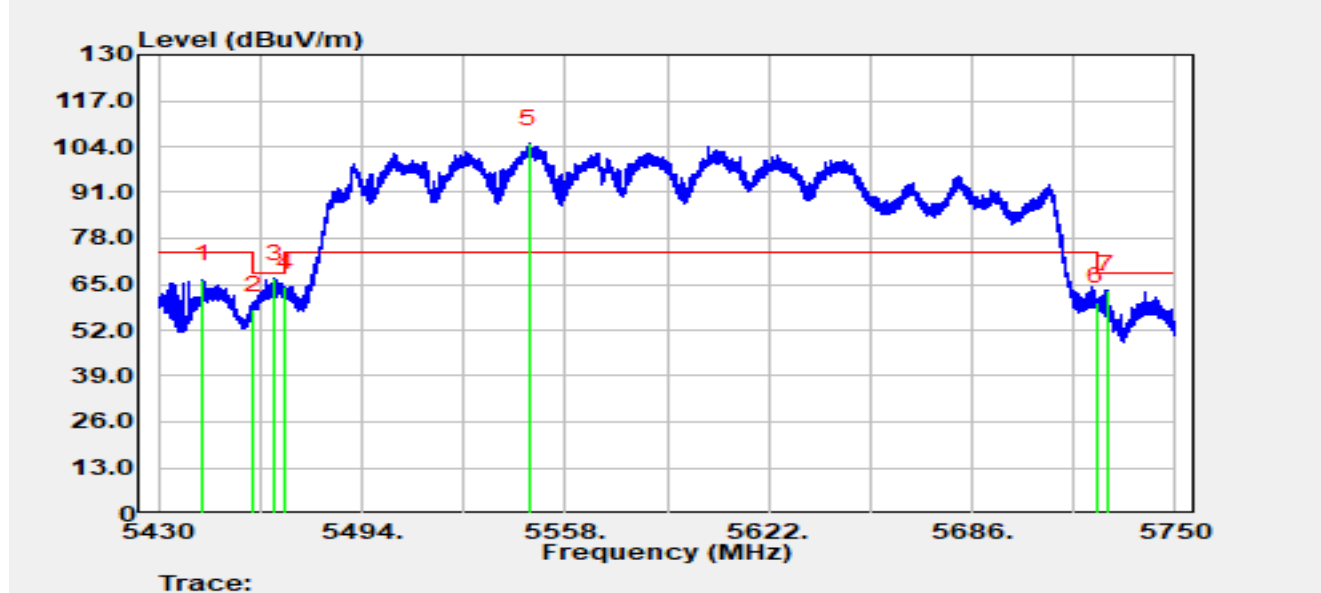


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5444.112	67.95	-1.60	66.35	-7.65	74.00	Peak
2		5460.000	58.52	-0.69	57.83	-10.37	68.20	Peak
3	*	5466.384	66.73	-0.02	66.71	-1.49	68.20	Peak
4		5470.000	63.18	1.00	64.18	-4.02	68.20	Peak
5		5546.704	61.15	43.60	104.75	N/A	N/A	Peak
6		5725.000	58.85	1.01	59.85	-8.35	68.20	Peak
7		5728.400	63.78	-0.37	63.41	-4.79	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 5570 MHz		

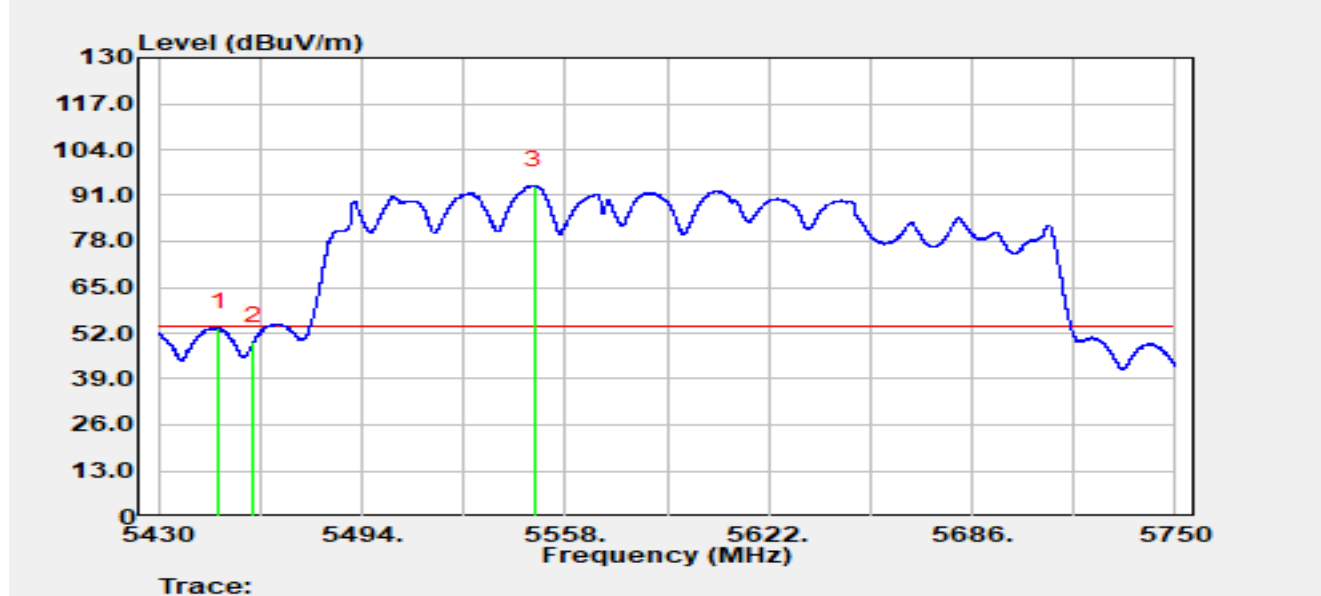


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5449.072	54.94	-1.37	53.57	-0.43	54.00	Average
2		5460.000	50.35	-0.69	49.66	-4.34	54.00	Average
3		5548.304	48.35	45.52	93.86	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 5570 MHz		

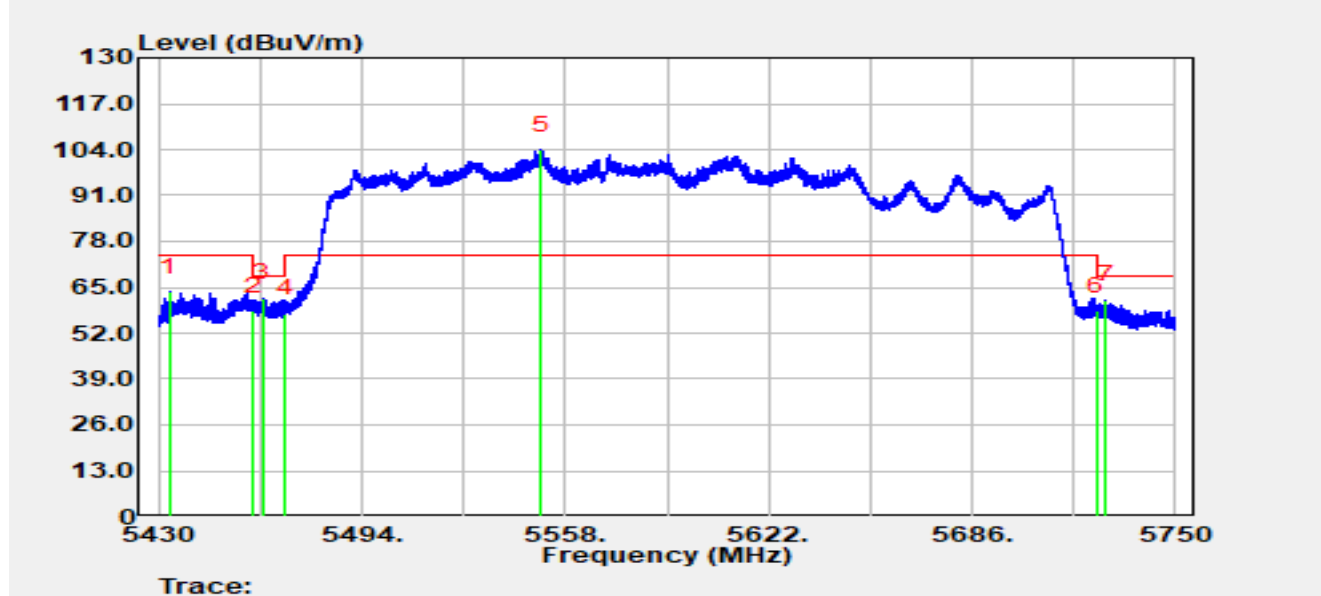


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5433.616	65.45	-1.91	63.54	-10.46	74.00	Peak
2		5460.000	59.07	-0.69	58.38	-9.82	68.20	Peak
3	*	5462.768	62.52	-0.50	62.01	-6.19	68.20	Peak
4		5470.000	56.57	1.00	57.57	-10.63	68.20	Peak
5		5550.448	55.71	48.14	103.85	N/A	N/A	Peak
6		5725.000	57.20	1.01	58.20	-10.00	68.20	Peak
7		5728.272	61.82	-0.35	61.47	-6.73	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 5570 MHz		

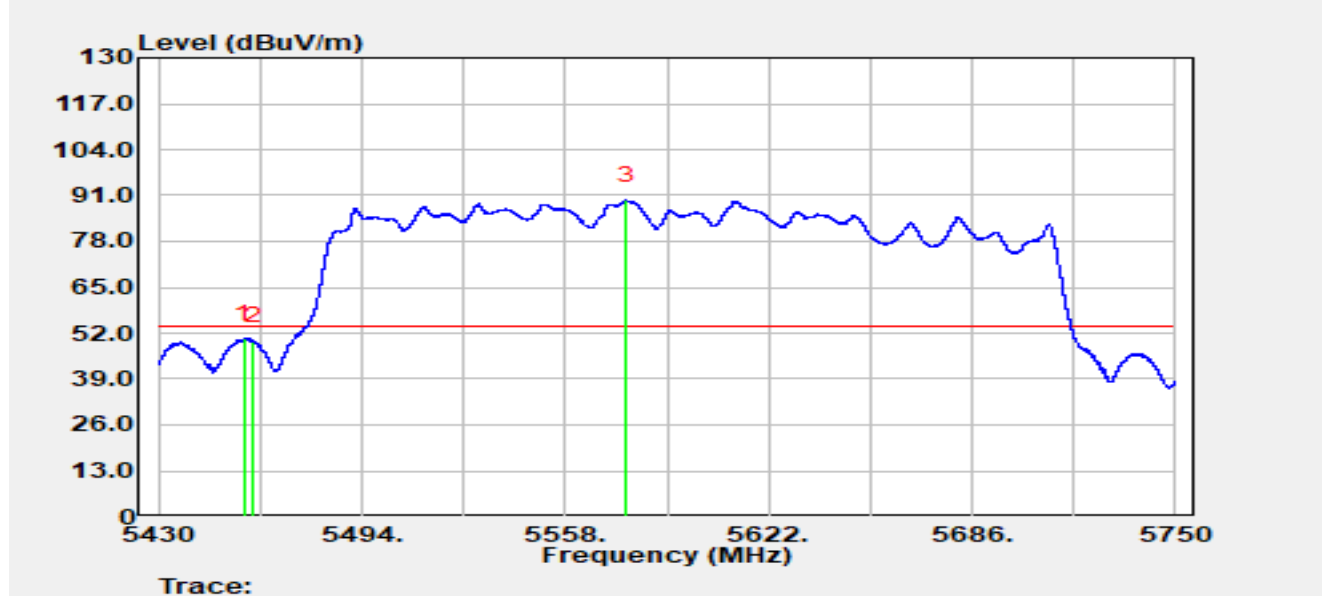


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5456.848	51.39	-0.92	50.47	-3.53	54.00	Average
2		5460.000	50.37	-0.69	49.67	-4.33	54.00	Average
3		5577.104	45.92	43.64	89.56	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

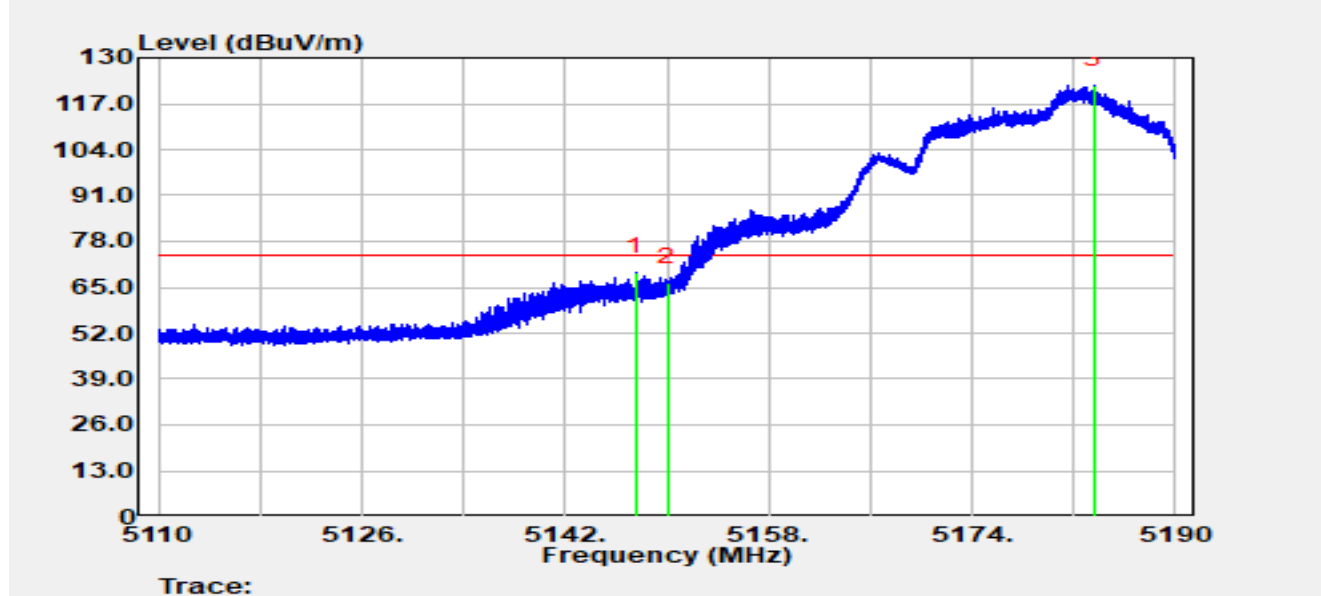


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.512	70.23	-1.05	69.18	-4.82	74.00	Peak
2		5150.000	66.86	-0.54	66.32	-7.68	74.00	Peak
3		5183.544	81.93	40.43	122.36	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

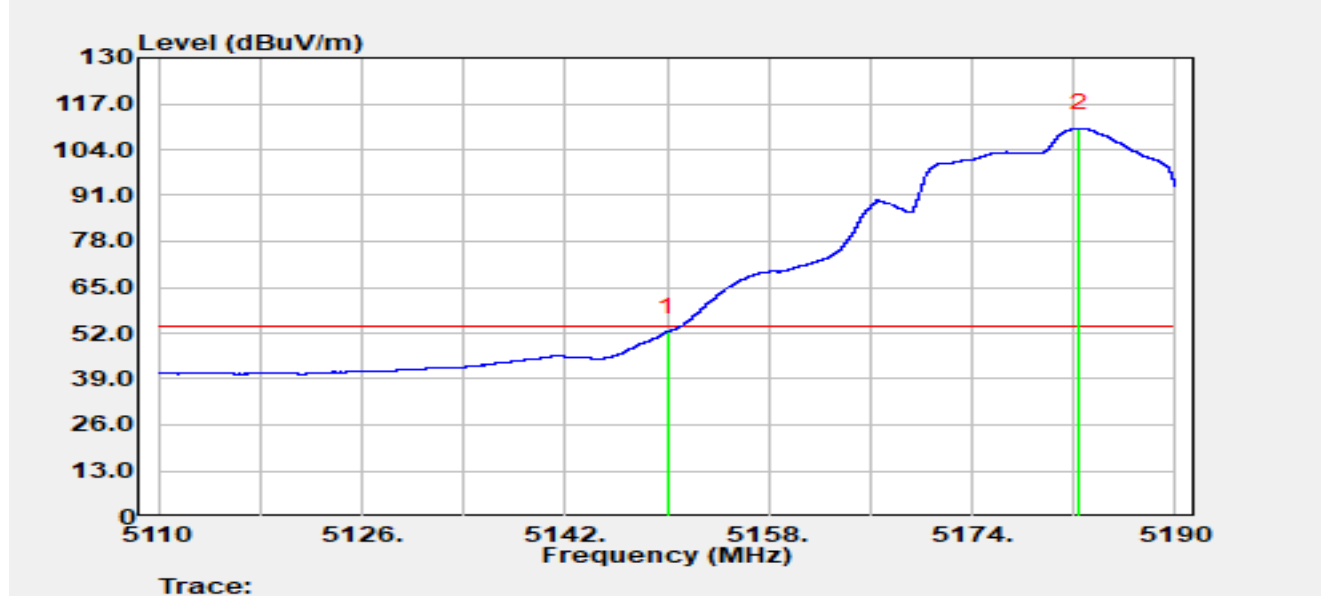


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	52.84	-0.54	52.30	-1.70	54.00	Average
2		5182.424	67.29	42.83	110.12	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

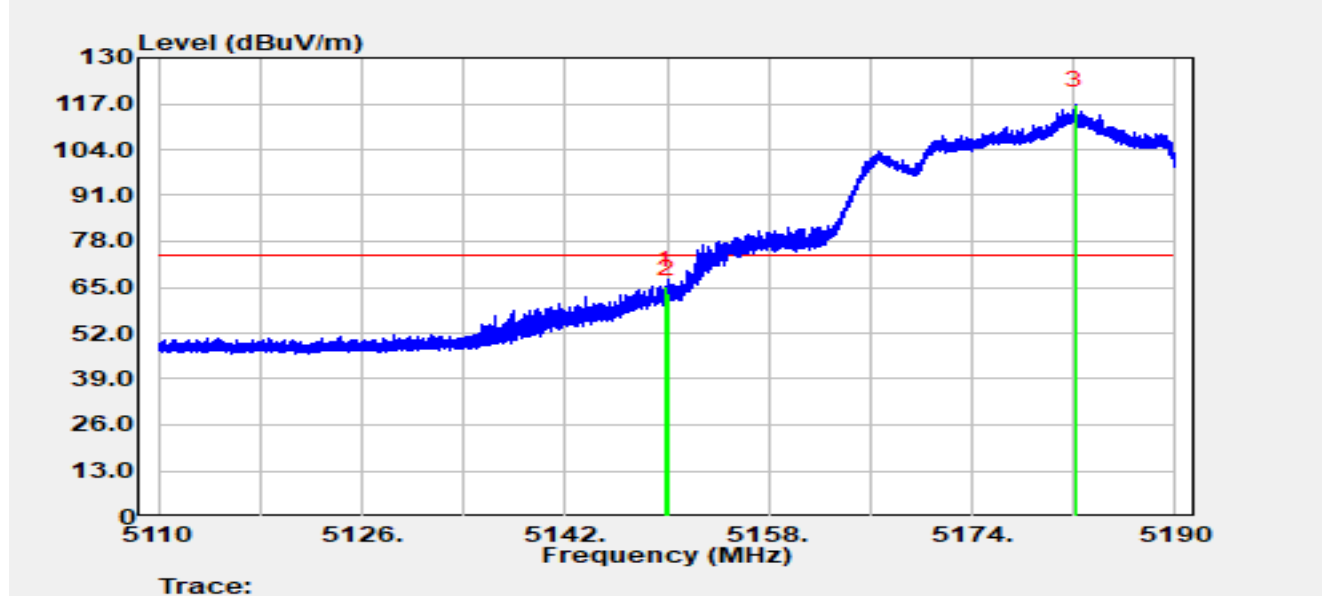


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.832	66.12	-0.64	65.48	-8.52	74.00	Peak
2		5150.000	63.75	-0.54	63.21	-10.79	74.00	Peak
3		5182.096	73.04	43.58	116.62	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

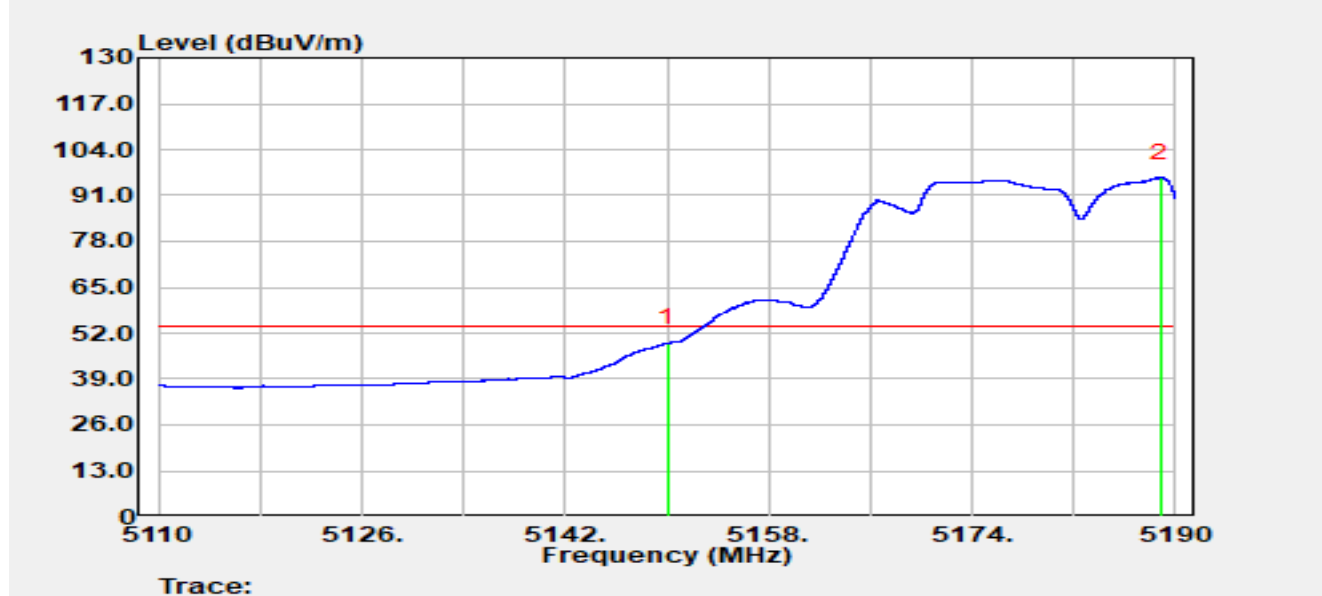


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	49.61	-0.54	49.07	-4.93	54.00	Average
2		5188.840	56.06	40.01	96.06	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

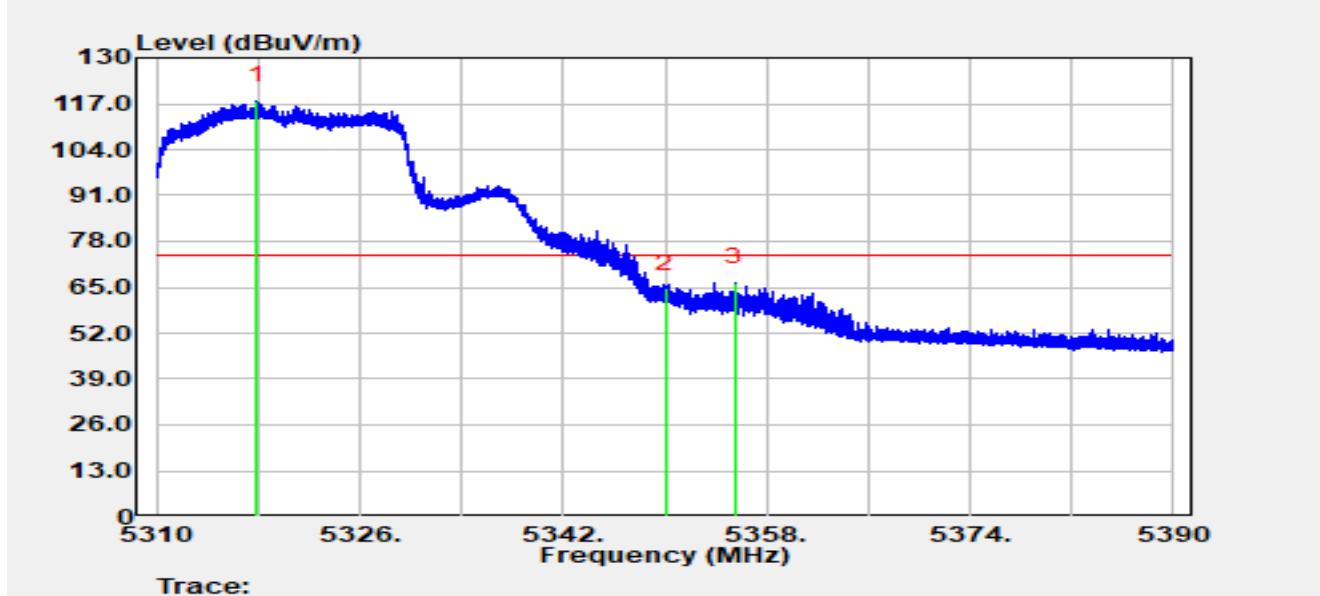


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5317.928	72.84	45.05	117.90	N/A	N/A	Peak
2		5350.000	62.26	2.28	64.54	-9.46	74.00	Peak
3	*	5355.520	66.48	-0.19	66.29	-7.71	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

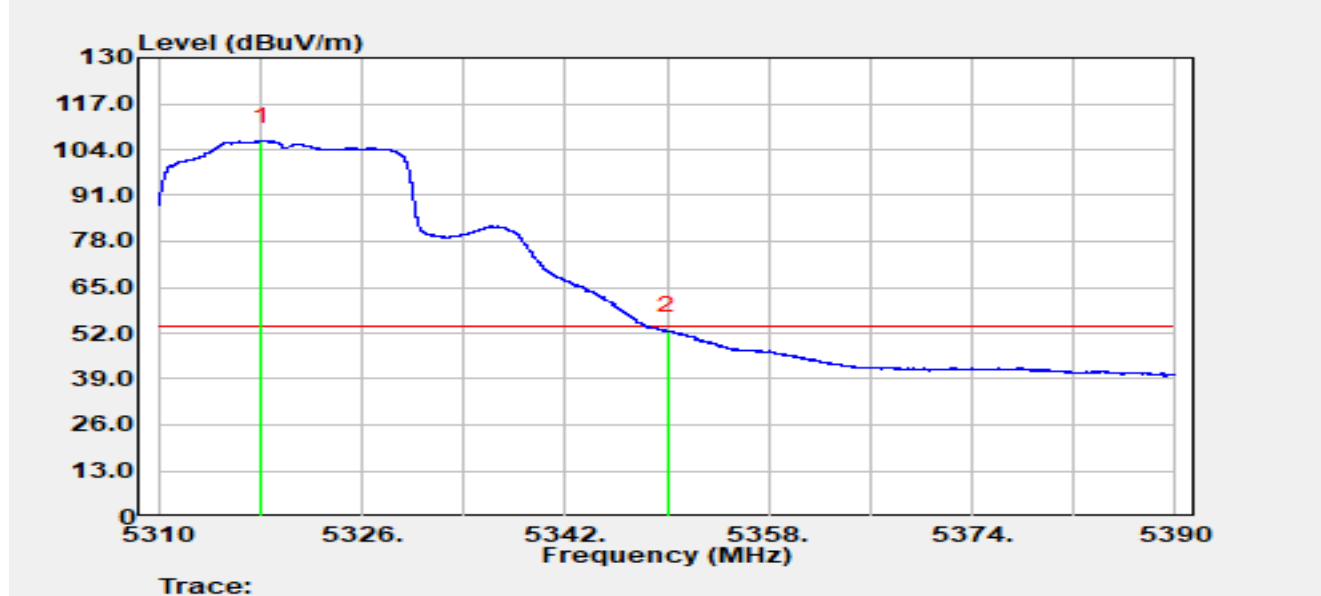


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5318.080	61.46	44.88	106.34	N/A	N/A	Average
2	*	5350.000	50.39	2.28	52.67	-1.33	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

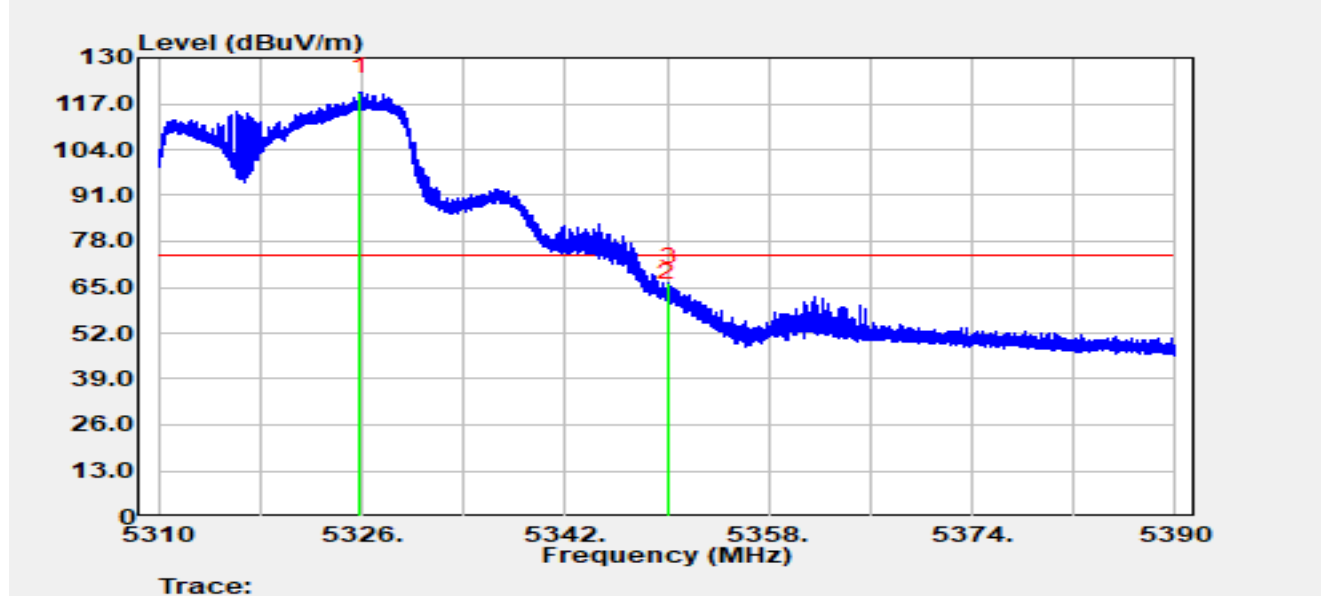


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5325.872	78.81	41.51	120.31	N/A	N/A	Peak
2		5350.000	59.78	2.28	62.06	-11.94	74.00	Peak
3	*	5350.144	64.03	2.21	66.23	-7.77	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

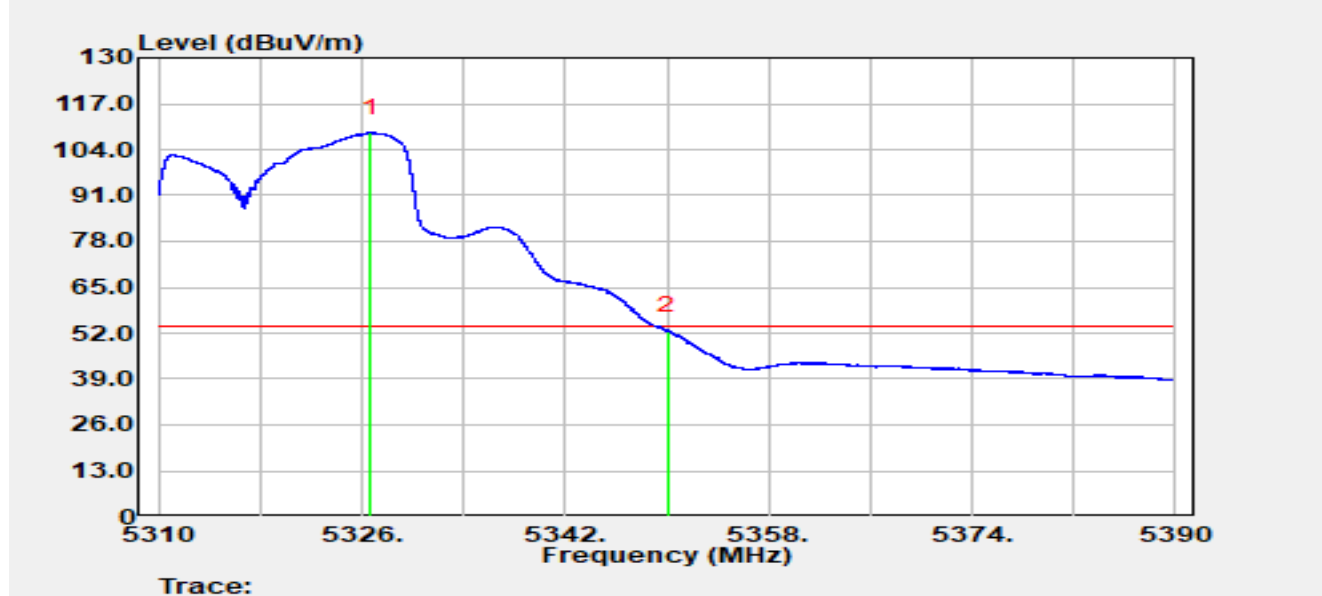


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.640	67.33	41.38	108.72	N/A	N/A	Average
2	*	5350.000	50.40	2.28	52.68	-1.32	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

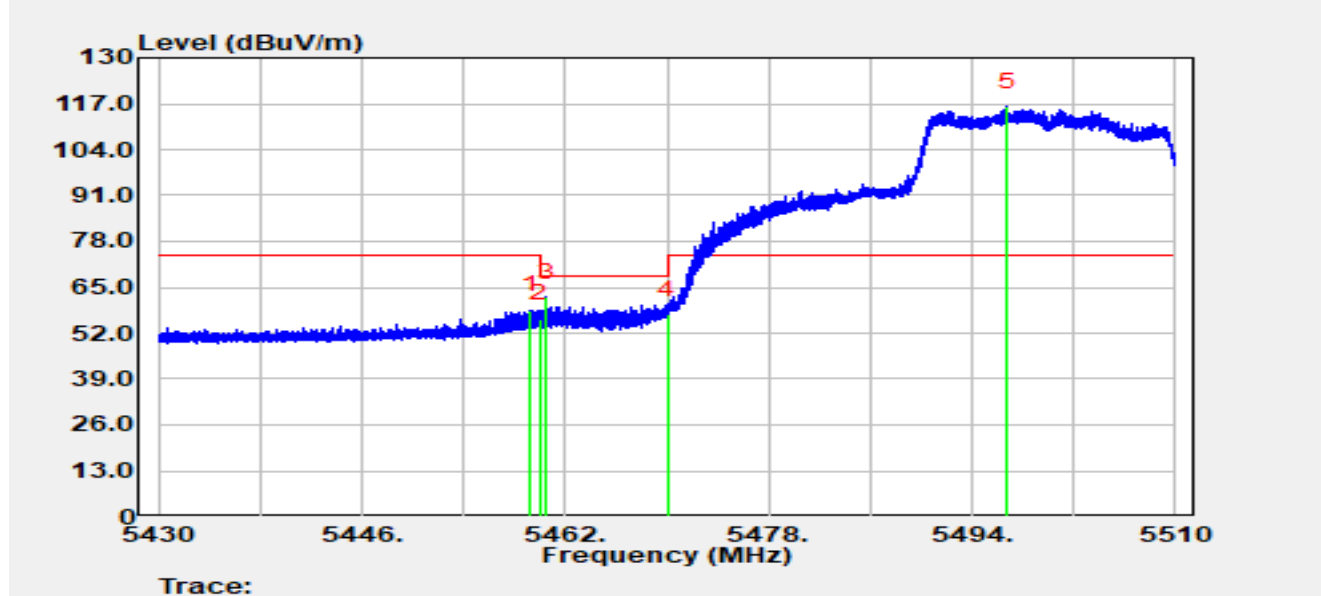


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.304	59.36	-0.78	58.59	-15.41	74.00	Peak
2		5460.000	56.63	-0.69	55.94	-12.26	68.20	Peak
3	*	5460.472	63.00	-0.72	62.28	-5.92	68.20	Peak
4		5470.000	56.23	1.00	57.23	-10.97	68.20	Peak
5		5496.768	75.48	40.69	116.16	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

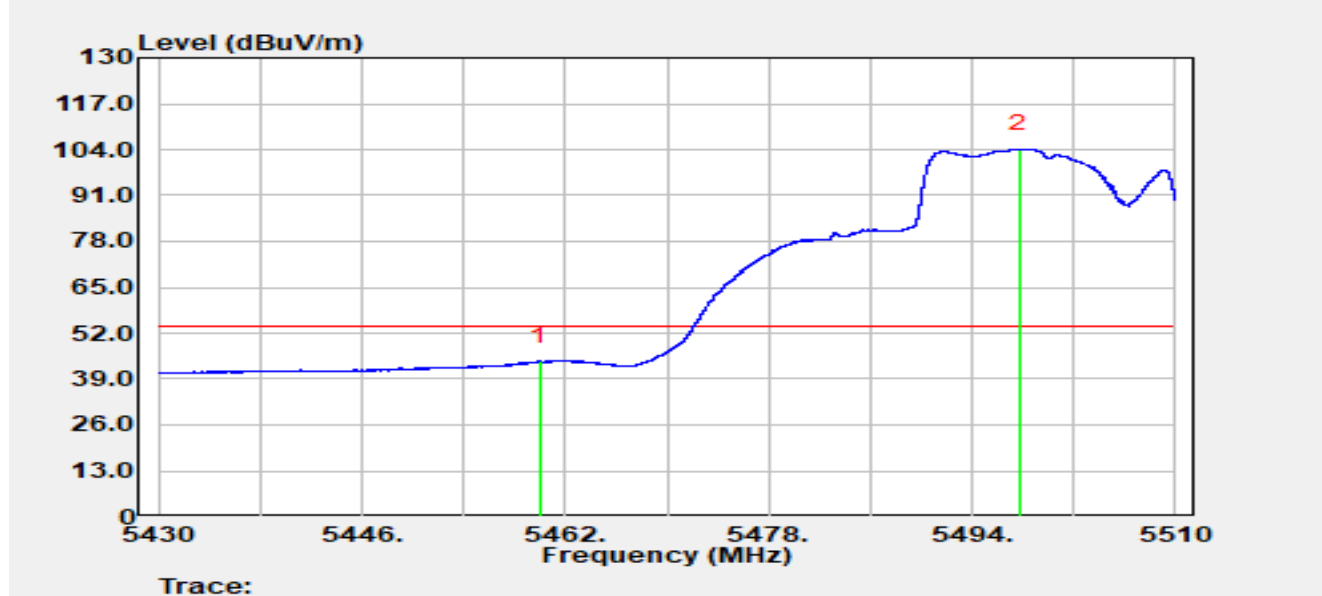


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	44.69	-0.69	43.99	-10.01	54.00	Average
2		5497.768	63.73	40.30	104.03	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

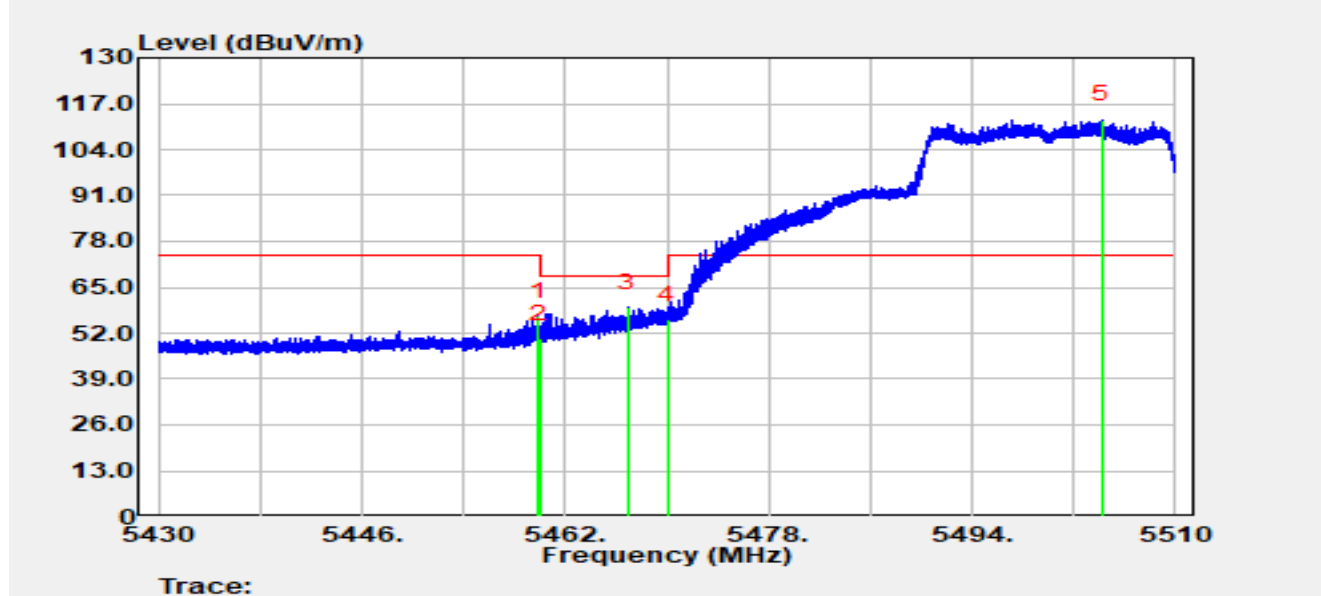


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.912	57.41	-0.70	56.71	-17.29	74.00	Peak
2		5460.000	51.22	-0.69	50.53	-17.67	68.20	Peak
3	*	5466.872	59.03	0.09	59.12	-9.08	68.20	Peak
4		5470.000	54.73	1.00	55.73	-12.47	68.20	Peak
5		5504.232	66.04	46.39	112.42	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

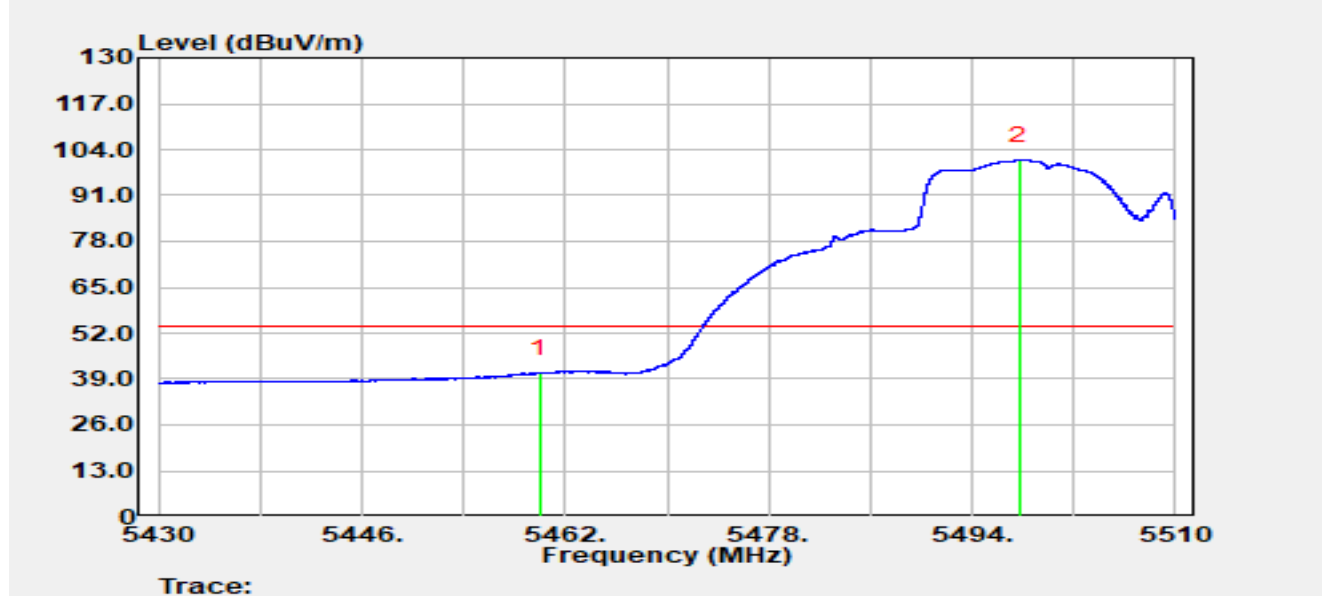


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	41.27	-0.69	40.58	-13.42	54.00	Average
2		5497.704	60.66	40.32	100.98	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

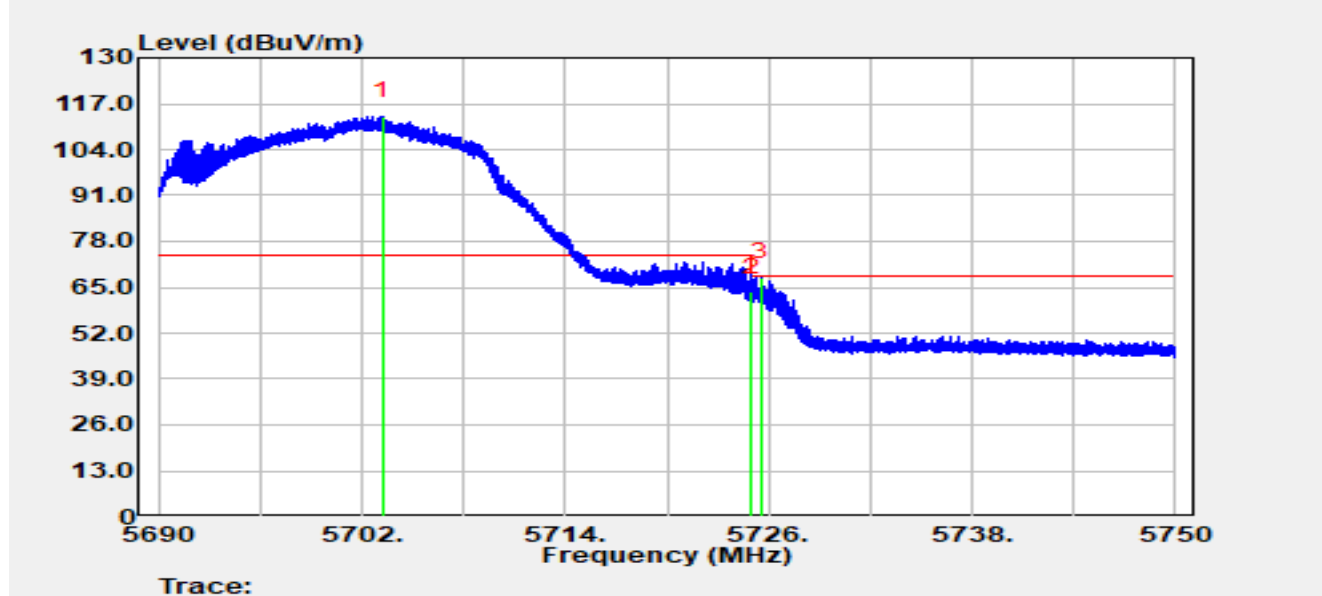


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5703.188	72.76	40.68	113.45	N/A	N/A	Peak
2		5725.000	62.72	1.01	63.73	-4.47	68.20	Peak
3	*	5725.538	67.18	0.71	67.89	-0.31	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

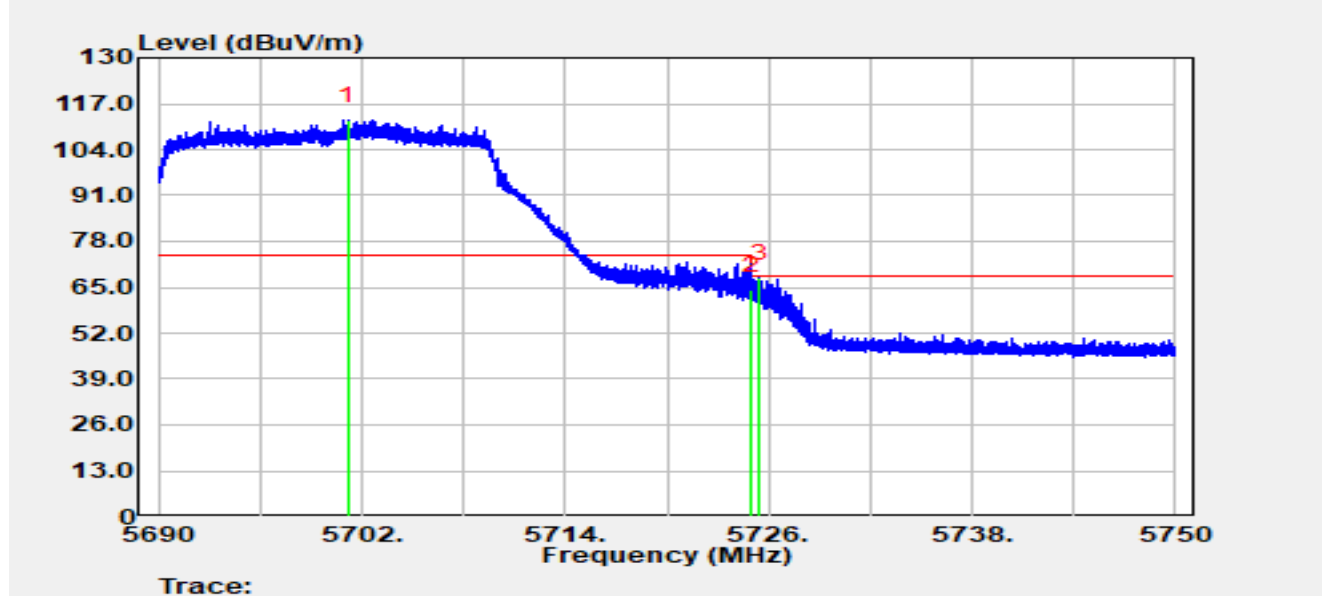


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5701.160	73.42	38.85	112.28	N/A	N/A	Peak
2		5725.000	63.13	1.01	64.14	-4.06	68.20	Peak
3	*	5725.466	66.83	0.75	67.58	-0.62	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

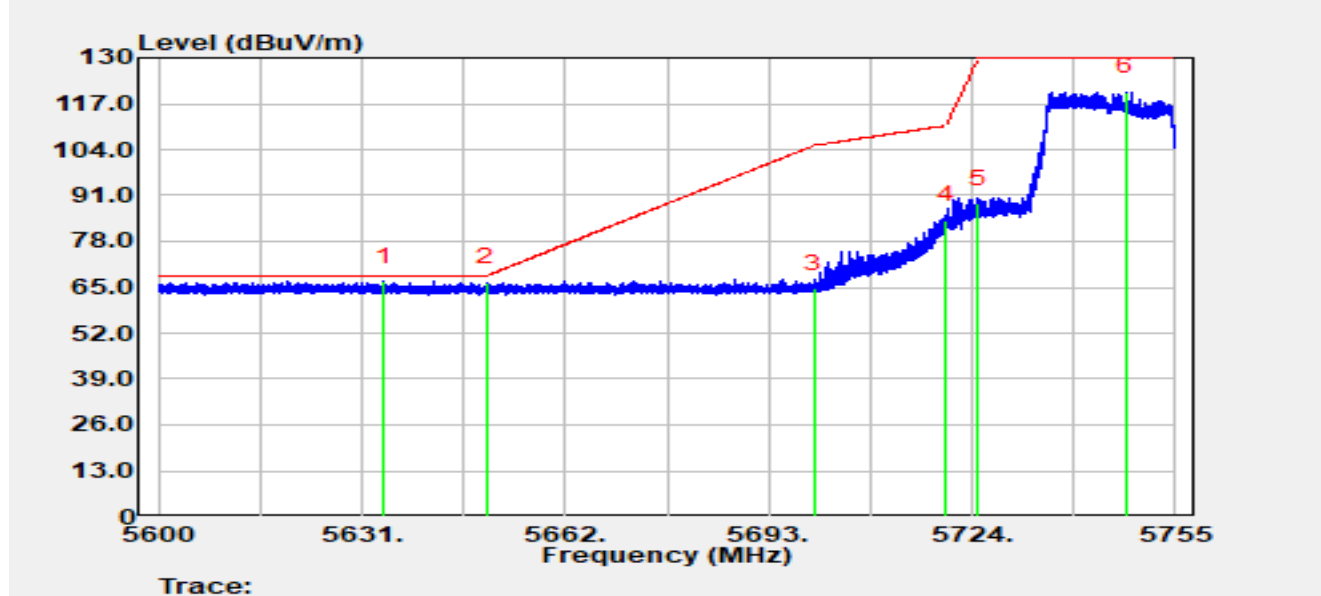


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5634.395	70.14	-3.53	66.61	-1.59	68.20	Peak
2		5650.000	70.08	-3.65	66.43	-1.77	68.20	Peak
3		5700.000	68.15	-3.47	64.68	-40.52	105.20	Peak
4		5720.000	87.42	-3.45	83.97	-26.83	110.80	Peak
5		5725.000	92.21	-3.47	88.75	-41.25	130.00	Peak
6		5747.390	124.07	-3.65	120.43	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

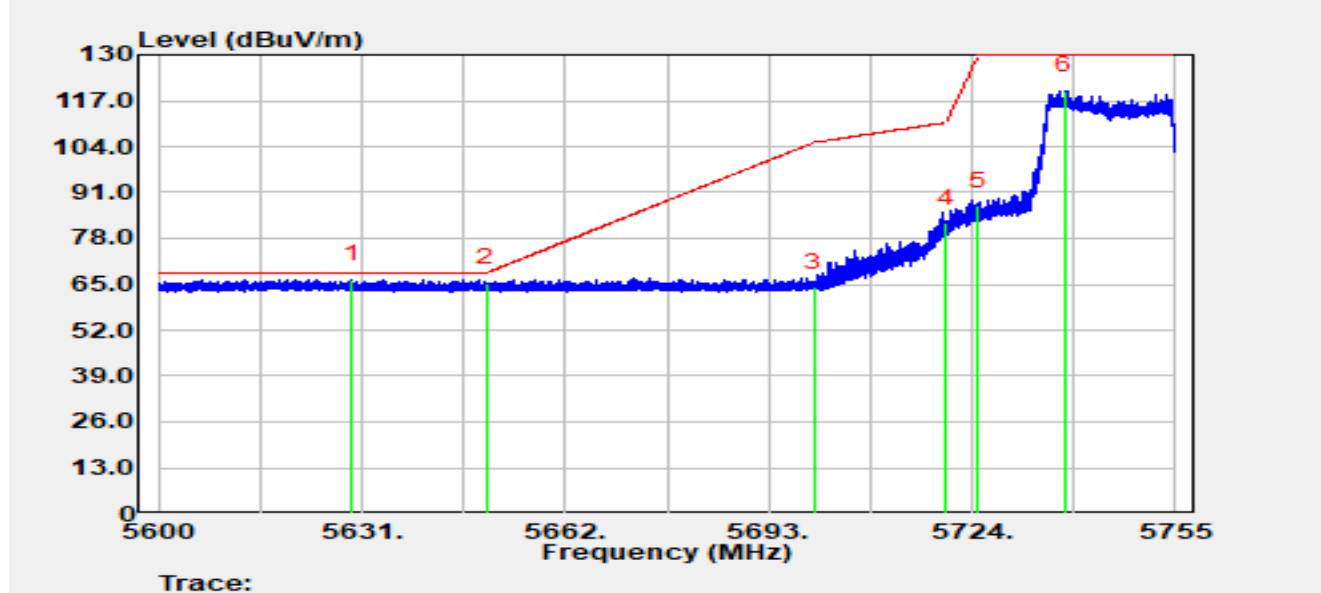


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5629.527	69.70	-3.44	66.26	-1.94	68.20	Peak
2		5650.000	68.92	-3.65	65.27	-2.93	68.20	Peak
3		5700.000	67.73	-3.47	64.26	-40.94	105.20	Peak
4		5720.000	85.75	-3.45	82.30	-28.50	110.80	Peak
5		5725.000	90.63	-3.47	87.16	-42.84	130.00	Peak
6		5738.167	123.39	-3.59	119.80	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

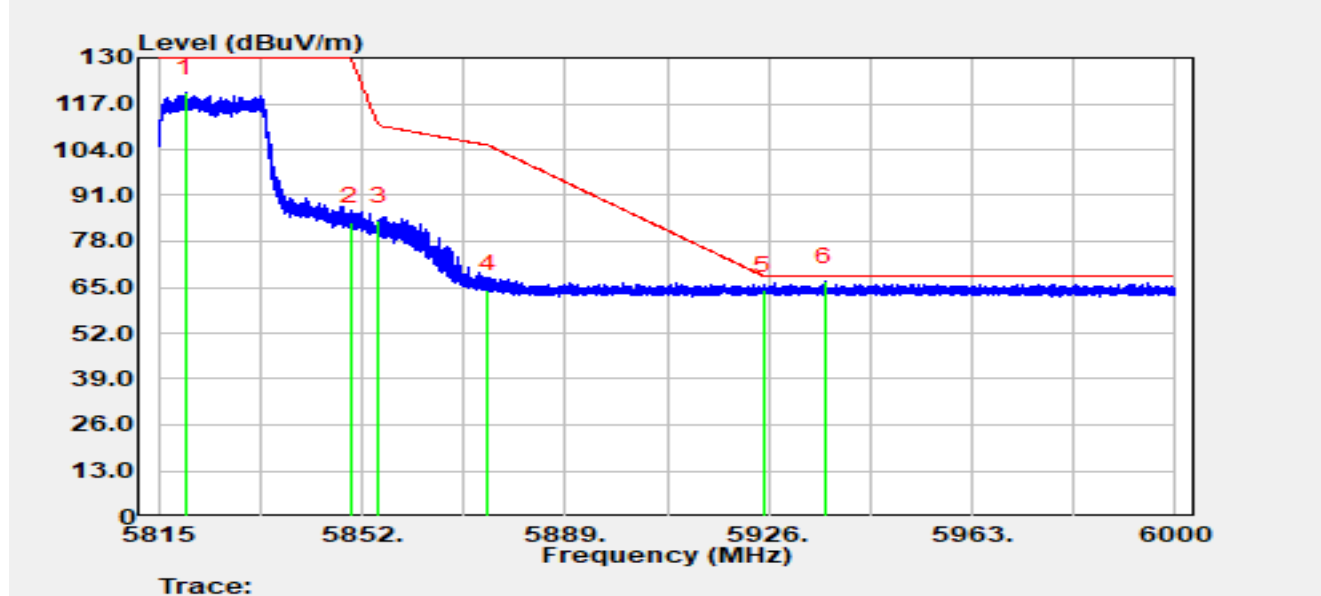


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5819.958	123.83	-3.79	120.04	N/A	N/A	Peak
2		5850.000	87.28	-3.75	83.52	-46.48	130.00	Peak
3		5855.000	87.48	-3.75	83.73	-27.07	110.80	Peak
4		5875.000	68.30	-3.82	64.47	-40.73	105.20	Peak
5		5925.000	67.79	-3.71	64.08	-4.12	68.20	Peak
6	*	5936.120	70.37	-3.68	66.69	-1.51	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

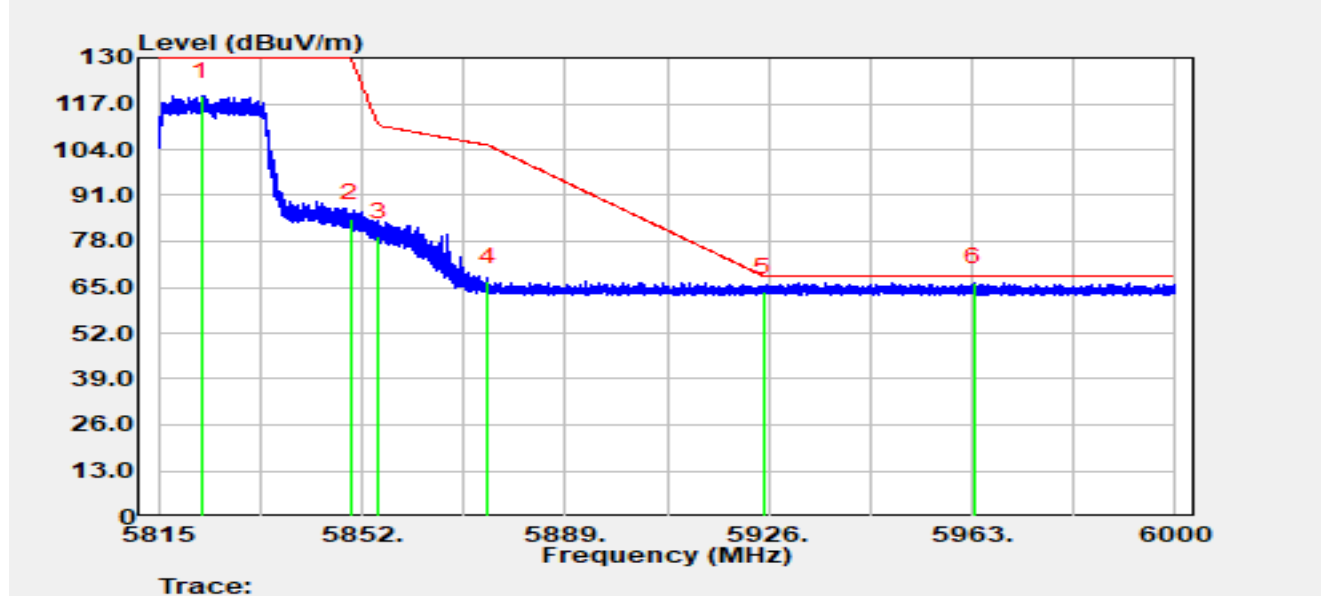


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5822.789	122.88	-3.77	119.11	N/A	N/A	Peak
2		5850.000	88.14	-3.75	84.39	-45.61	130.00	Peak
3		5855.000	82.99	-3.75	79.24	-31.56	110.80	Peak
4		5875.000	70.40	-3.82	66.57	-38.63	105.20	Peak
5		5925.000	67.27	-3.71	63.57	-4.63	68.20	Peak
6	*	5963.314	70.02	-3.63	66.39	-1.81	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

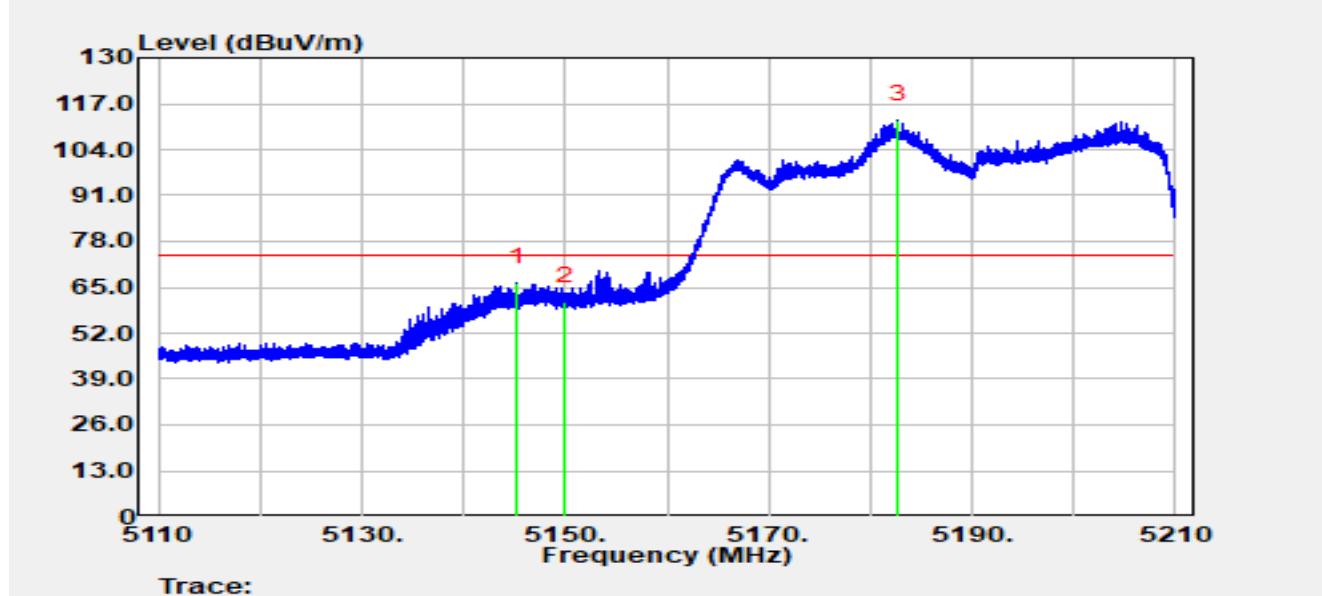


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.300	68.11	-1.74	66.38	-7.62	74.00	Peak
2		5150.000	61.58	-0.54	61.04	-12.96	74.00	Peak
3		5182.740	70.34	42.10	112.45	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

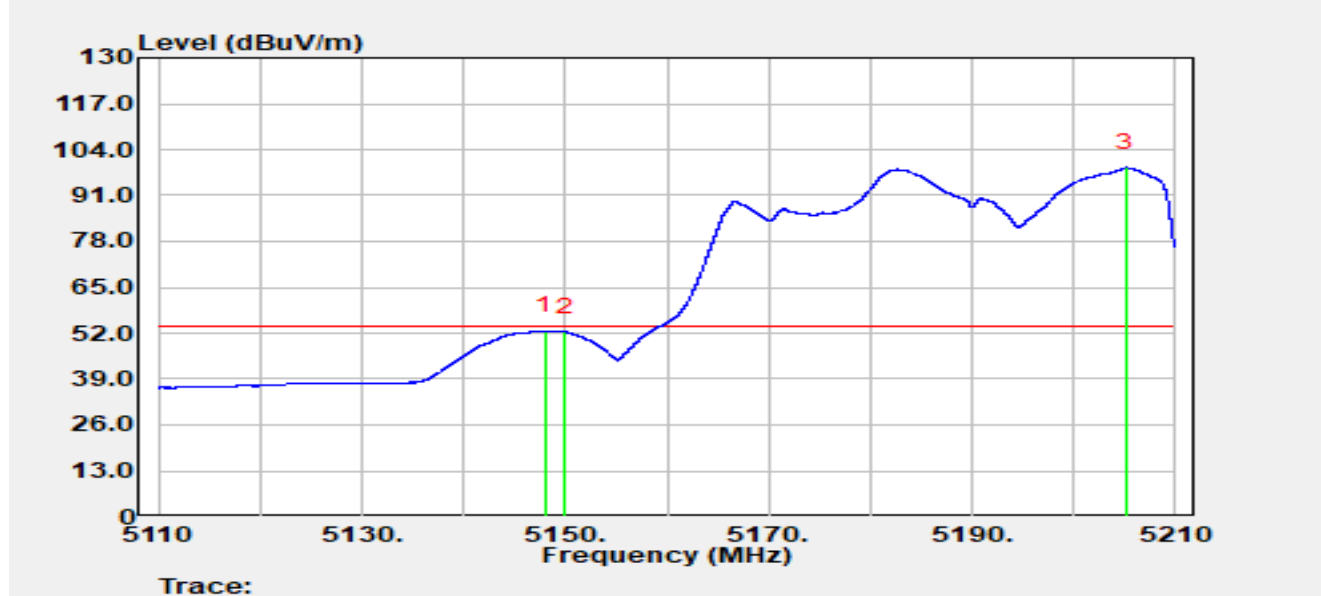


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.950	53.55	-0.97	52.59	-1.41	54.00	Average
2		5150.000	52.96	-0.54	52.42	-1.58	54.00	Average
3		5205.100	54.51	44.41	98.92	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

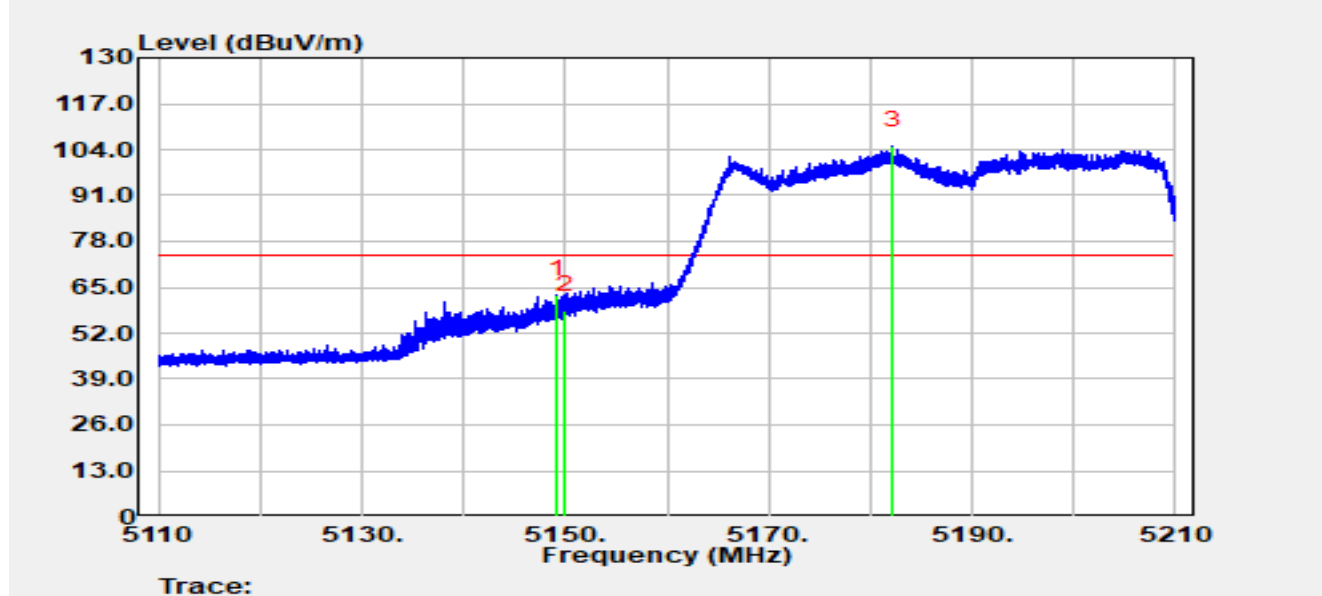


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.240	63.78	-0.97	62.80	-11.20	74.00	Peak
2		5150.000	59.06	-0.54	58.52	-15.48	74.00	Peak
3		5182.230	61.91	43.27	105.18	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

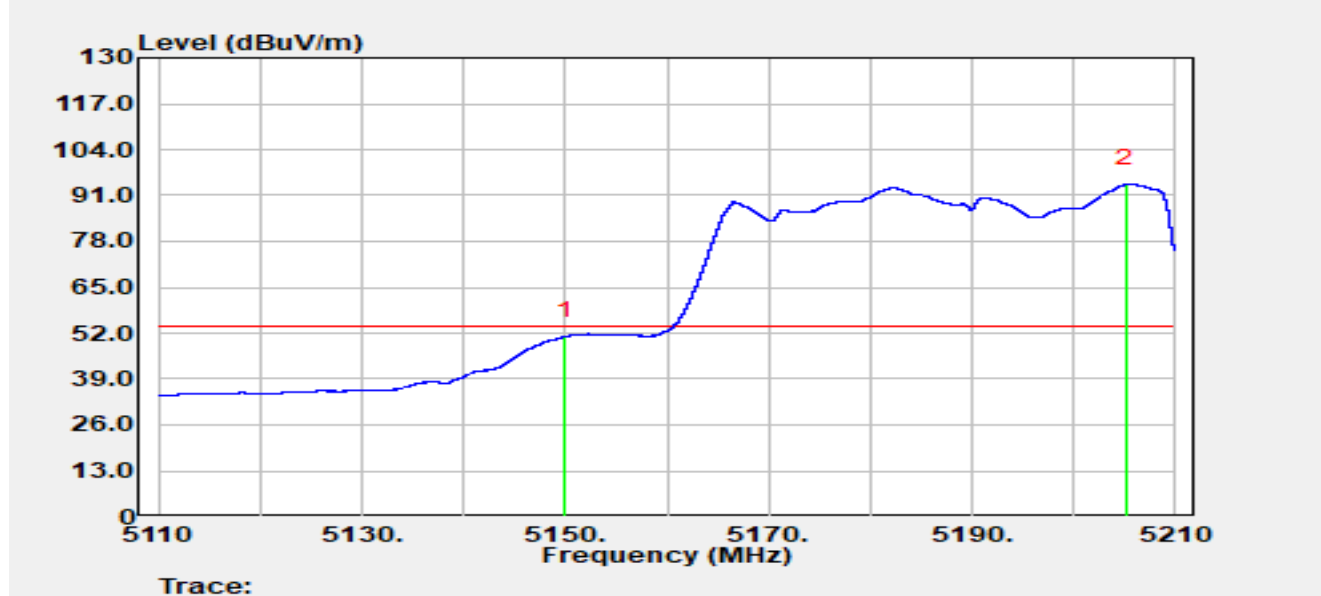


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	51.61	-0.54	51.07	-2.93	54.00	Average
2		5205.100	49.86	44.41	94.27	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

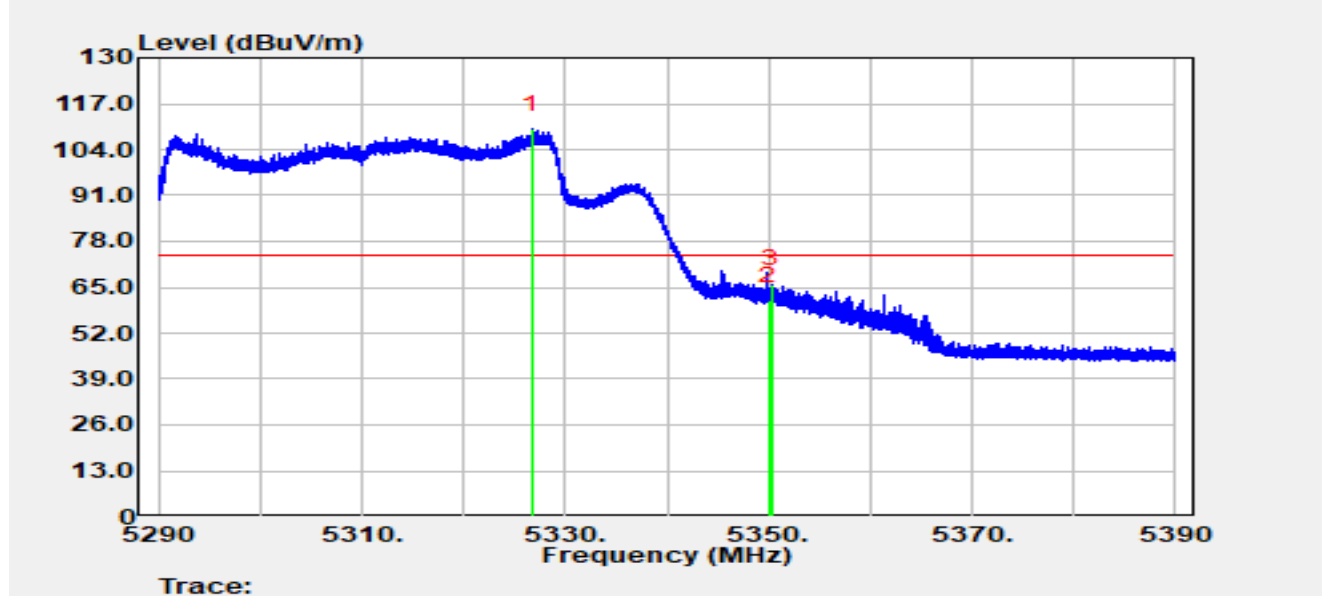


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.660	68.31	41.39	109.70	N/A	N/A	Peak
2		5350.000	58.99	2.28	61.27	-12.73	74.00	Peak
3	*	5350.320	63.63	2.11	65.75	-8.25	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

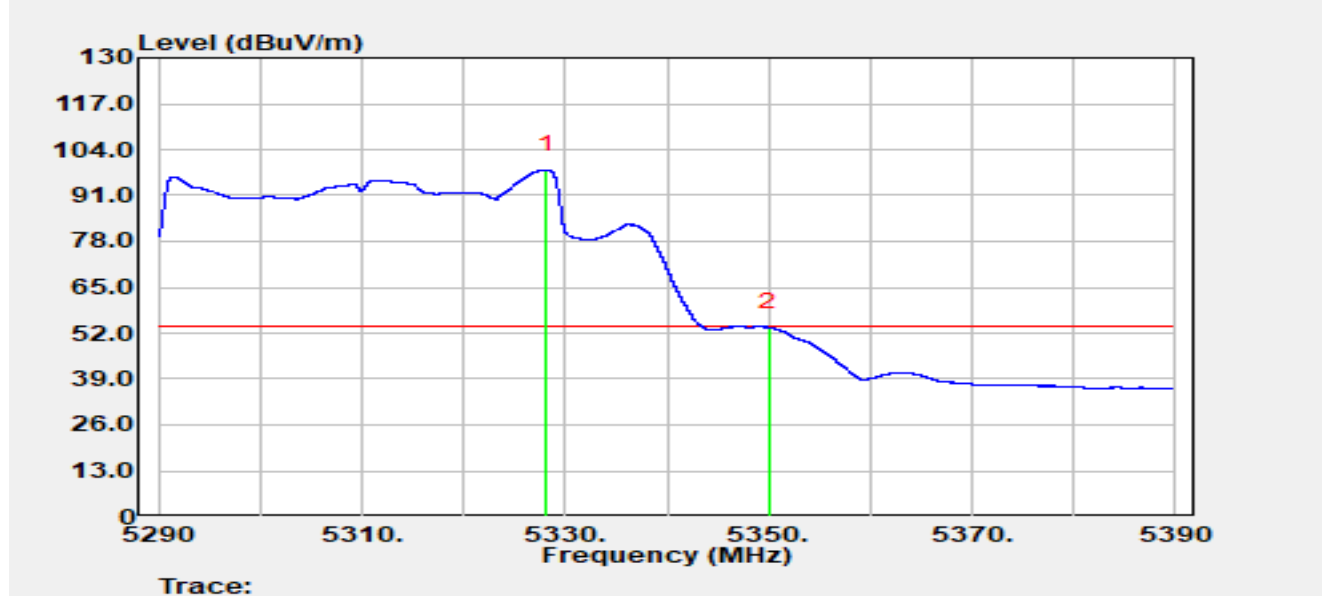


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5328.150	55.84	42.39	98.23	N/A	N/A	Average
2	*	5350.000	51.32	2.28	53.60	-0.40	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

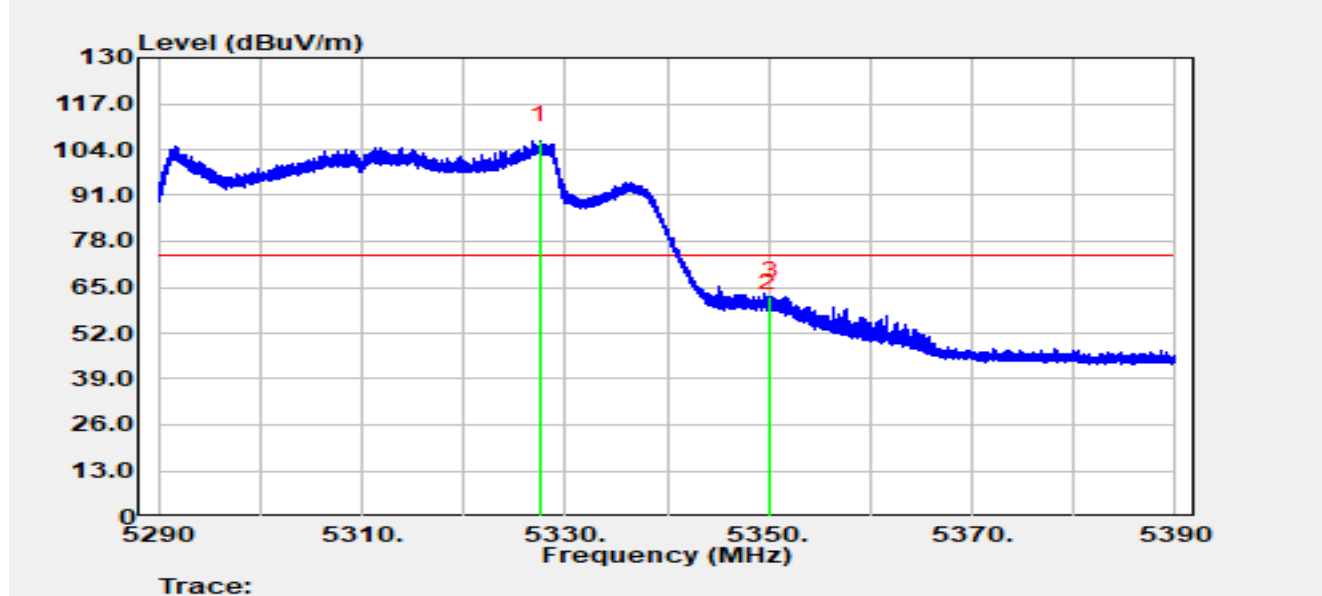


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.500	64.74	41.78	106.52	N/A	N/A	Peak
2		5350.000	57.07	2.28	59.36	-14.64	74.00	Peak
3	*	5350.130	60.31	2.21	62.52	-11.48	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

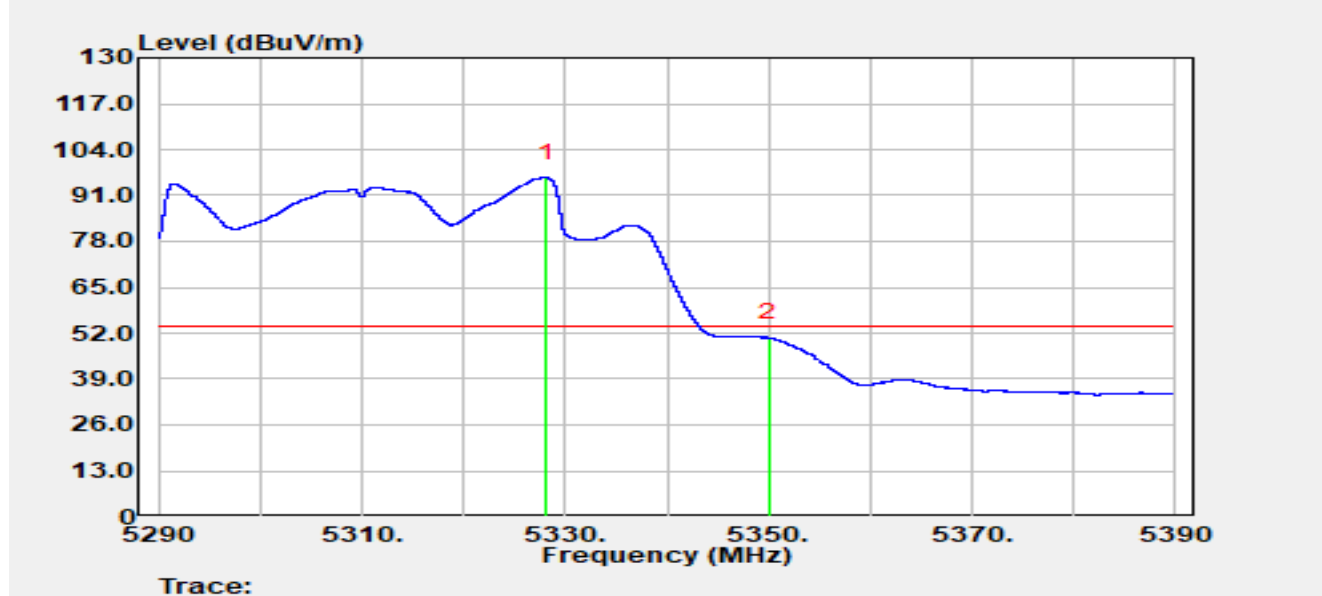


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5328.090	53.68	42.33	96.01	N/A	N/A	Average
2	*	5350.000	48.41	2.28	50.70	-3.30	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

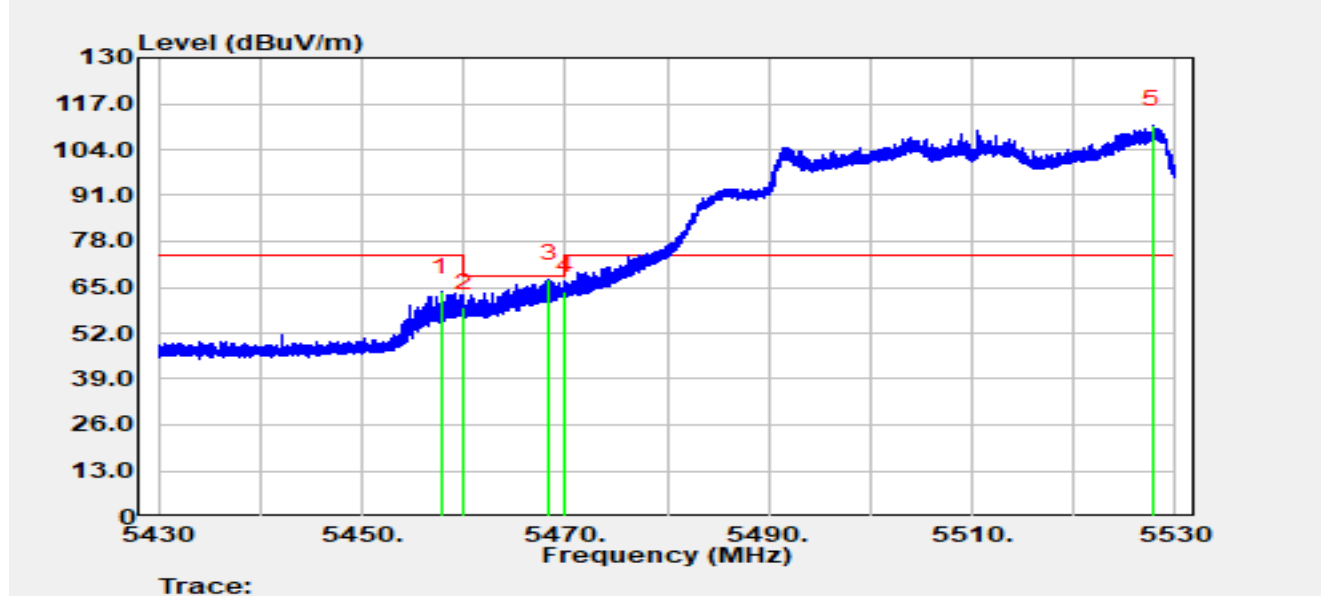


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.760	64.42	-0.89	63.53	-10.47	74.00	Peak
2		5460.000	59.87	-0.69	59.18	-9.02	68.20	Peak
3	*	5468.460	66.91	0.52	67.42	-0.78	68.20	Peak
4		5470.000	62.98	1.00	63.98	-4.22	68.20	Peak
5		5527.770	64.19	46.86	111.05	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

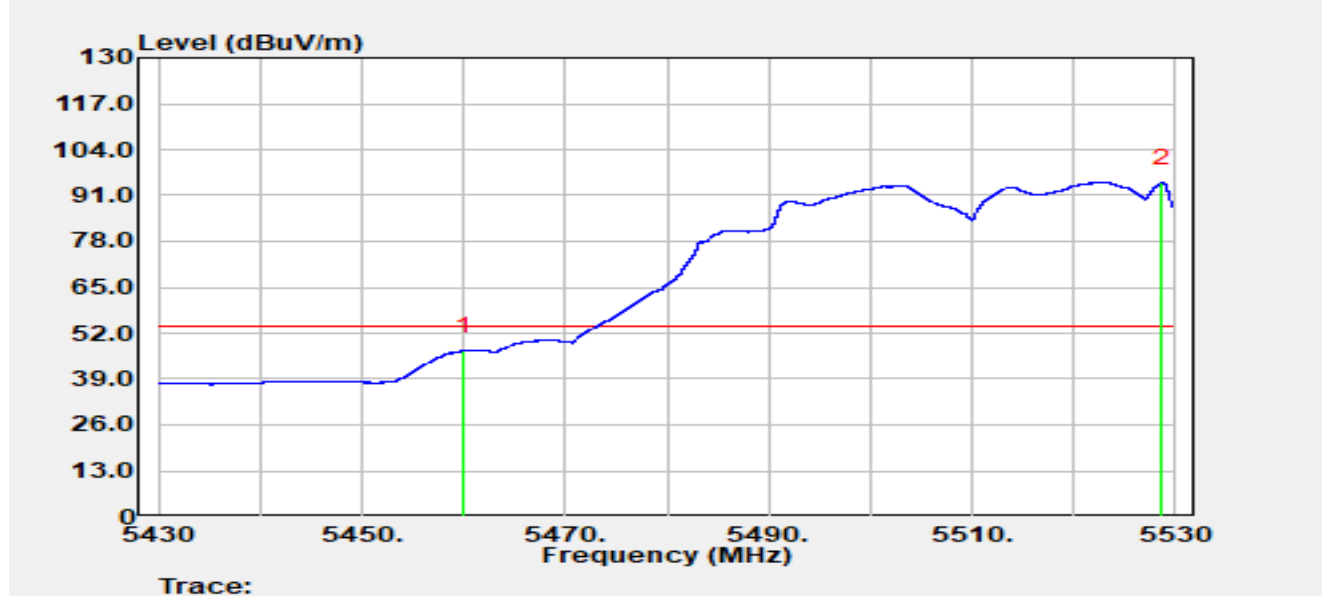


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	47.72	-0.69	47.03	-6.97	54.00	Average
2		5528.670	46.15	48.48	94.63	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

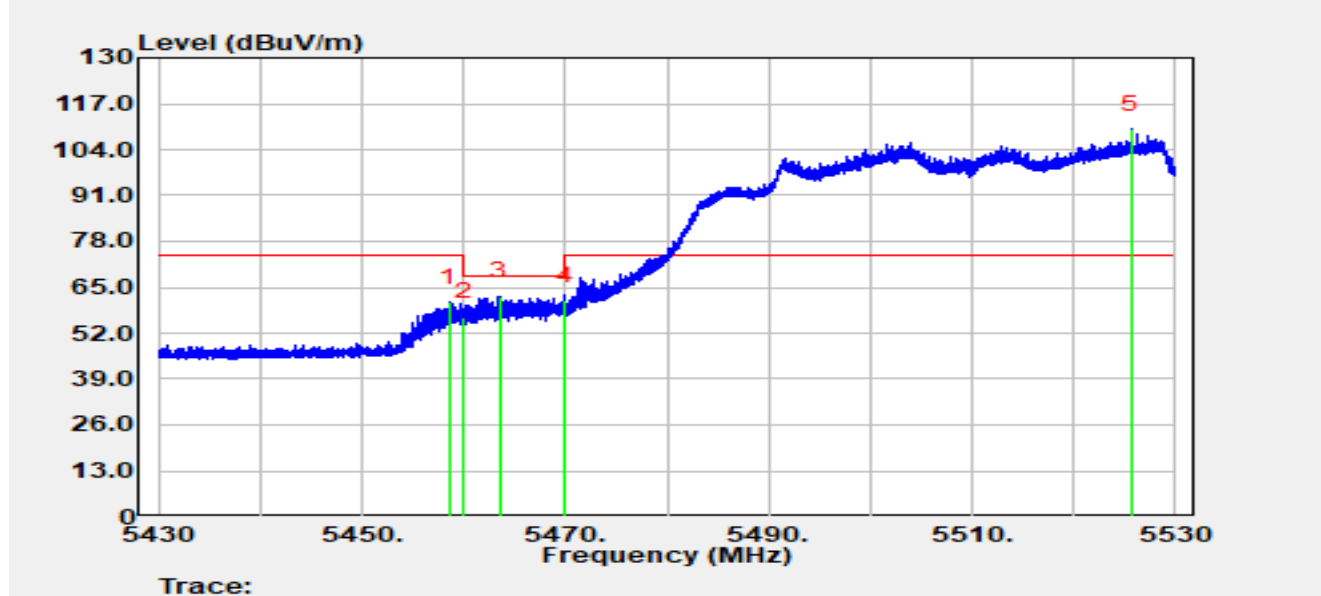


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.580	61.56	-0.80	60.75	-13.25	74.00	Peak
2		5460.000	57.19	-0.69	56.50	-11.70	68.20	Peak
3	*	5463.540	62.96	-0.44	62.52	-5.68	68.20	Peak
4		5470.000	60.08	1.00	61.08	-7.12	68.20	Peak
5		5525.690	66.15	43.51	109.66	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

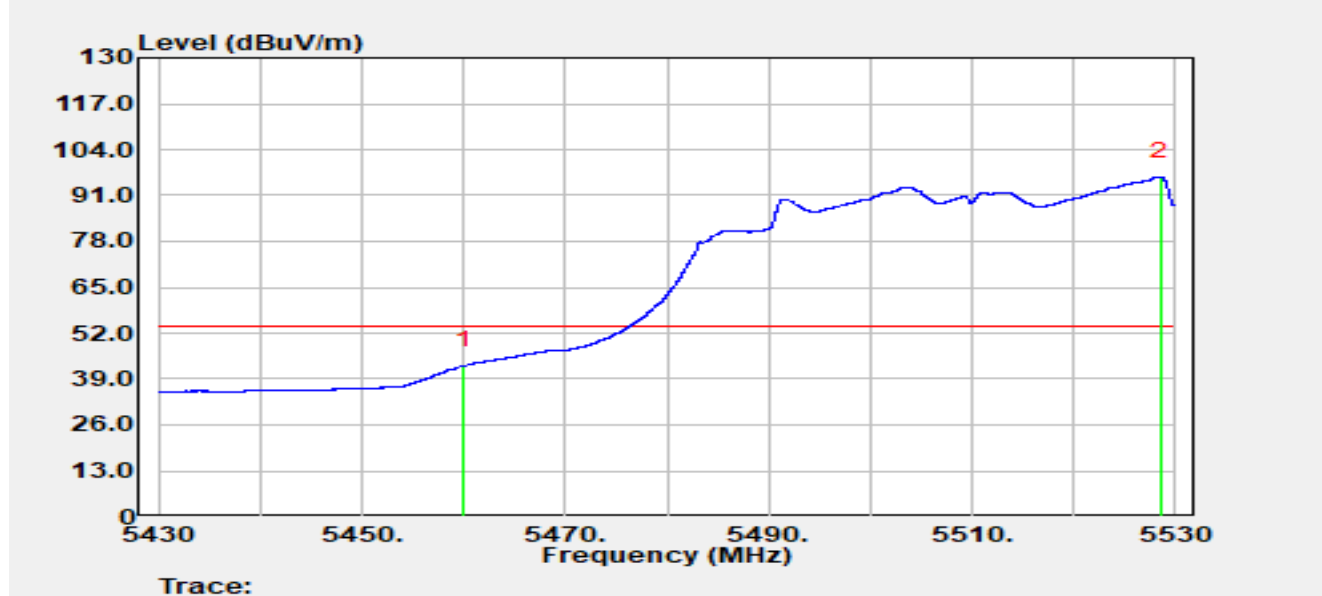


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	43.44	-0.69	42.75	-11.25	54.00	Average
2		5528.500	47.99	48.23	96.22	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5670 MHz		

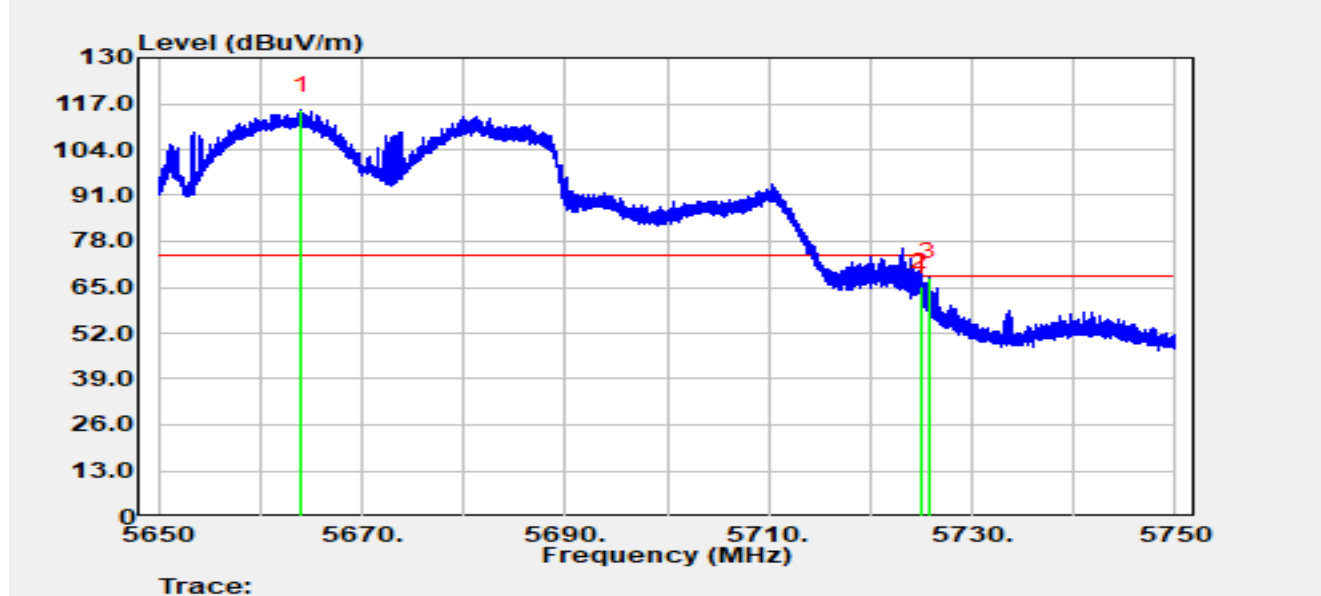


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5664.080	72.03	43.16	115.19	N/A	N/A	Peak
2		5725.000	64.12	1.01	65.12	-3.08	68.20	Peak
3	*	5725.770	67.16	0.58	67.73	-0.47	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5 °C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5670 MHz		

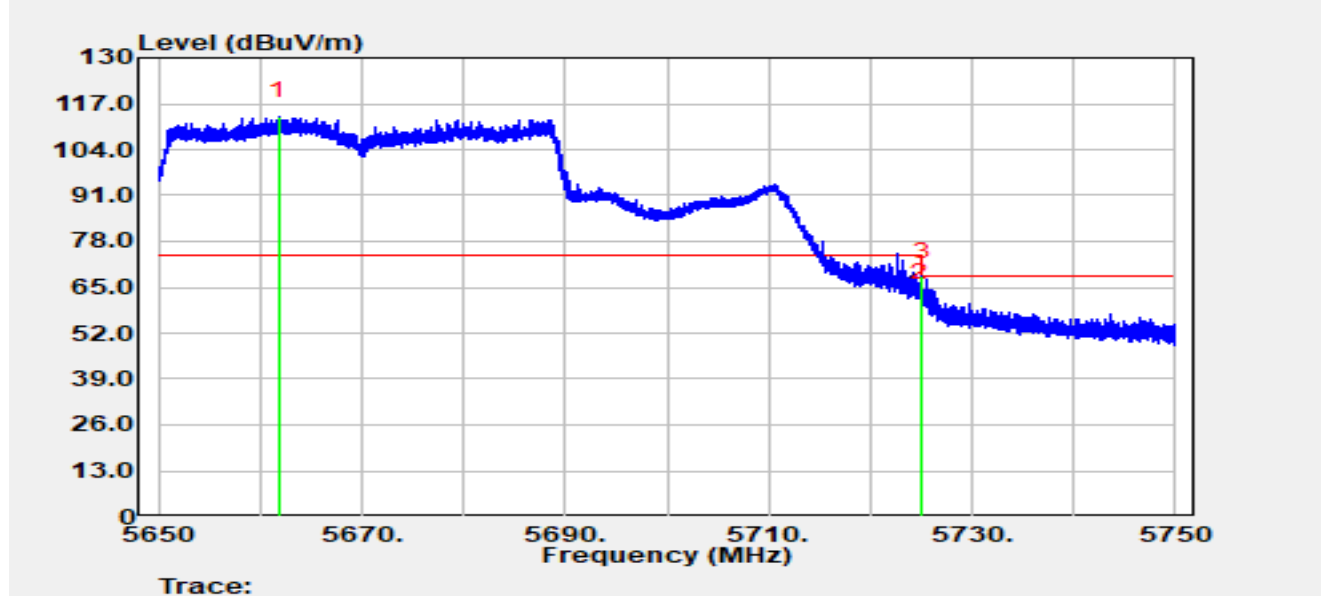


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5661.870	72.37	41.08	113.45	N/A	N/A	Peak
2		5725.000	60.99	1.01	61.99	-6.21	68.20	Peak
3	*	5725.070	67.06	0.97	68.03	-0.17	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5755 MHz		

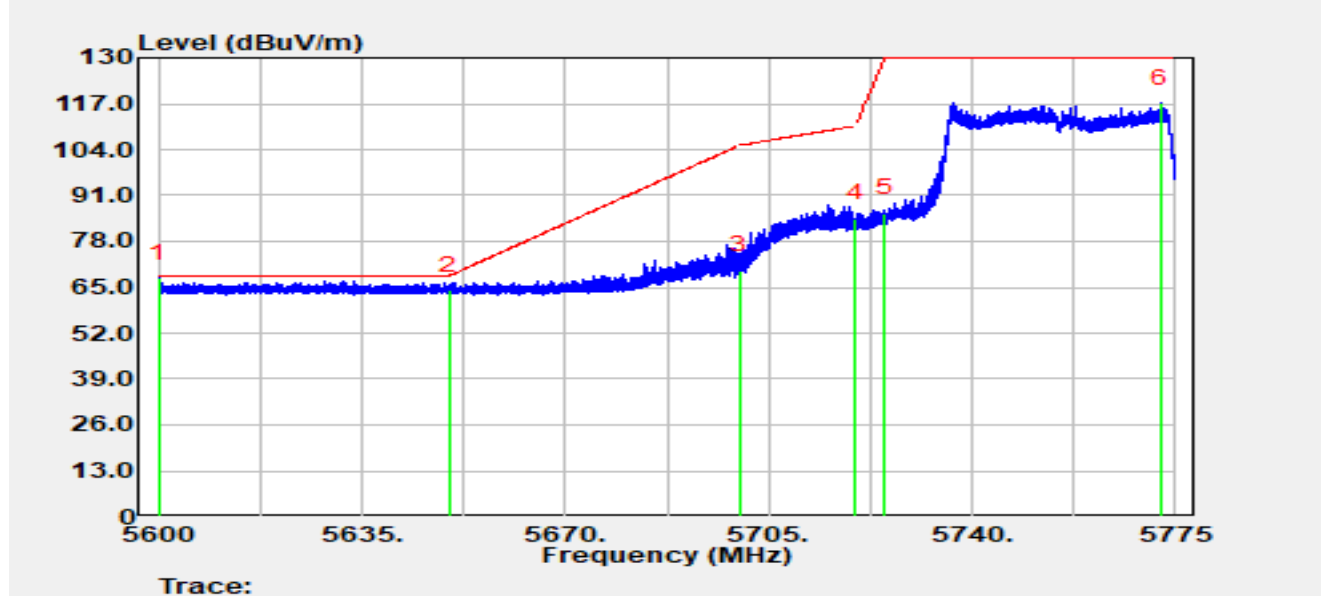


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5600.158	70.89	-3.40	67.48	-0.72	68.20	Peak
2		5650.000	67.85	-3.65	64.20	-4.00	68.20	Peak
3		5700.000	73.16	-3.47	69.69	-35.51	105.20	Peak
4		5720.000	87.93	-3.45	84.47	-26.33	110.80	Peak
5		5725.000	89.45	-3.47	85.98	-44.02	130.00	Peak
6		5772.480	120.86	-3.68	117.18	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5755 MHz		

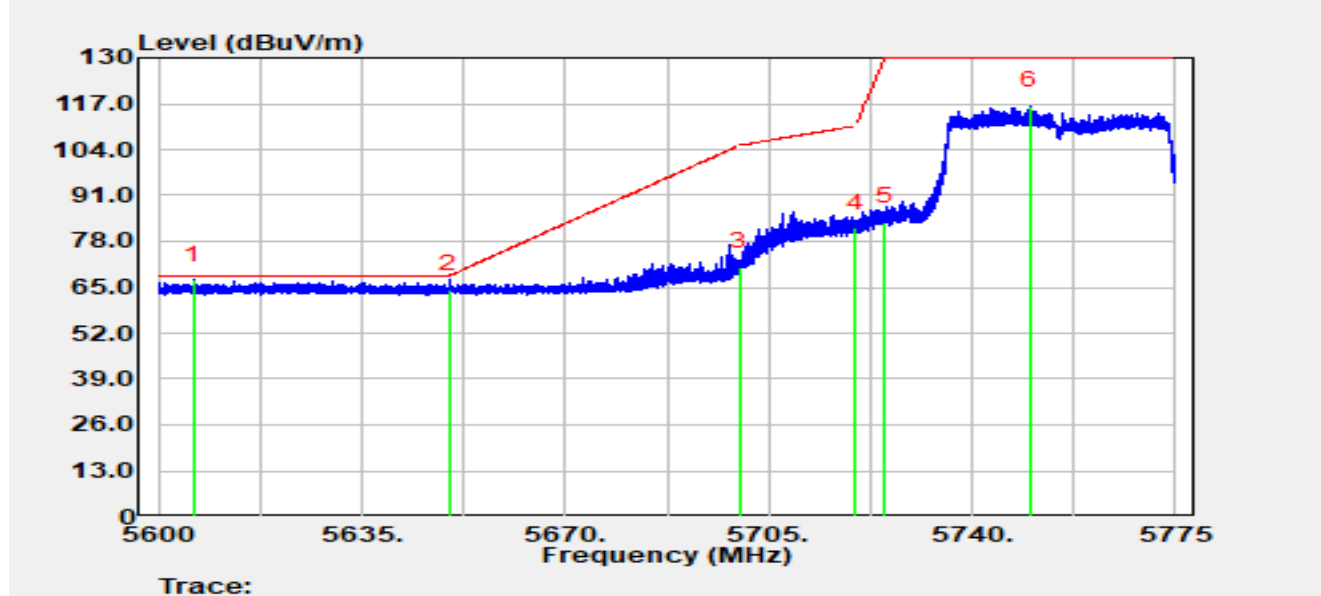


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5606.107	70.56	-3.51	67.04	-1.16	68.20	Peak
2		5650.000	68.10	-3.65	64.45	-3.75	68.20	Peak
3		5700.000	74.34	-3.47	70.87	-34.33	105.20	Peak
4		5720.000	85.14	-3.45	81.69	-29.11	110.80	Peak
5		5725.000	86.97	-3.47	83.51	-46.49	130.00	Peak
6		5749.922	120.16	-3.65	116.50	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5795 MHz		

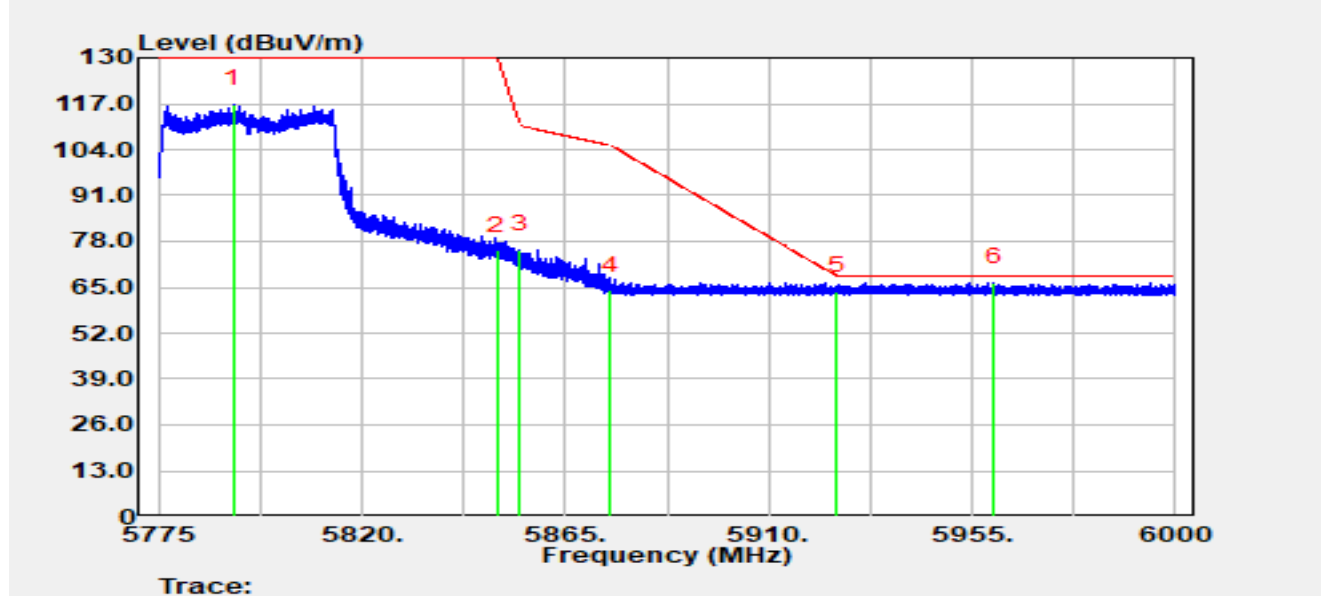


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5791.447	120.45	-3.69	116.76	N/A	N/A	Peak
2		5850.000	79.30	-3.75	75.55	-54.45	130.00	Peak
3		5855.000	79.51	-3.75	75.76	-35.04	110.80	Peak
4		5875.000	67.85	-3.82	64.02	-41.18	105.20	Peak
5		5925.000	67.61	-3.71	63.91	-4.29	68.20	Peak
6	*	5959.928	69.98	-3.65	66.34	-1.86	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5795 MHz		

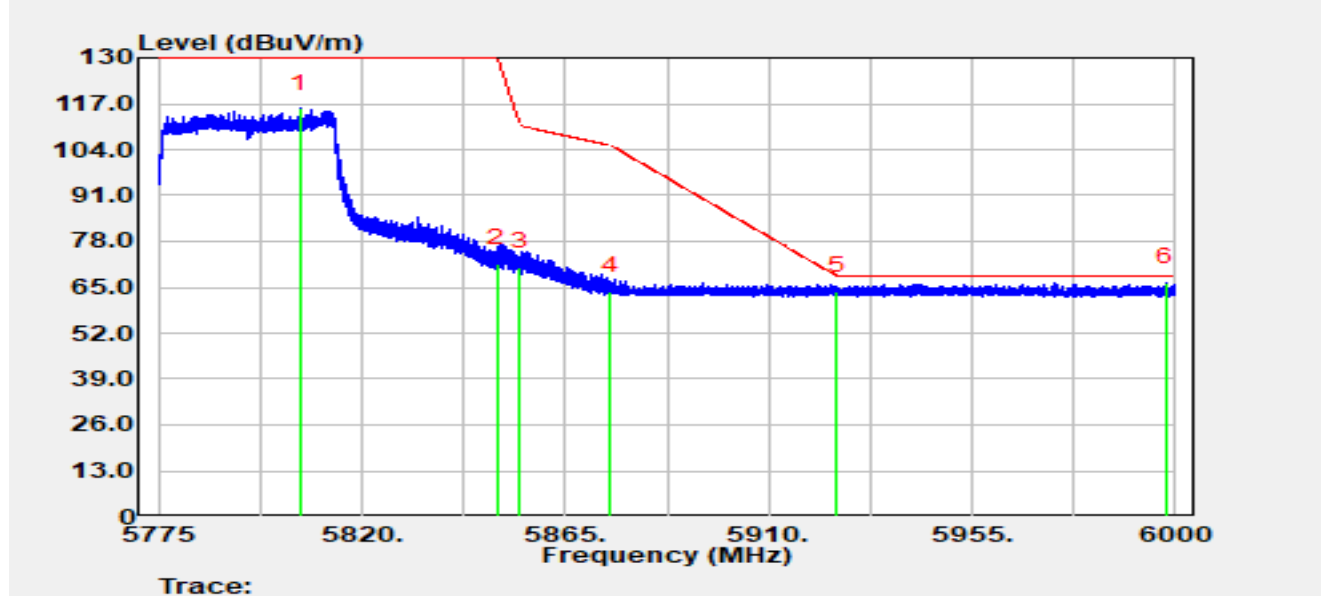


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5806.208	119.57	-3.80	115.77	N/A	N/A	Peak
2		5850.000	75.48	-3.75	71.72	-58.28	130.00	Peak
3		5855.000	74.49	-3.75	70.74	-40.06	110.80	Peak
4		5875.000	67.72	-3.82	63.89	-41.31	105.20	Peak
5		5925.000	67.70	-3.71	64.00	-4.20	68.20	Peak
6	*	5997.772	70.17	-3.72	66.44	-1.76	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

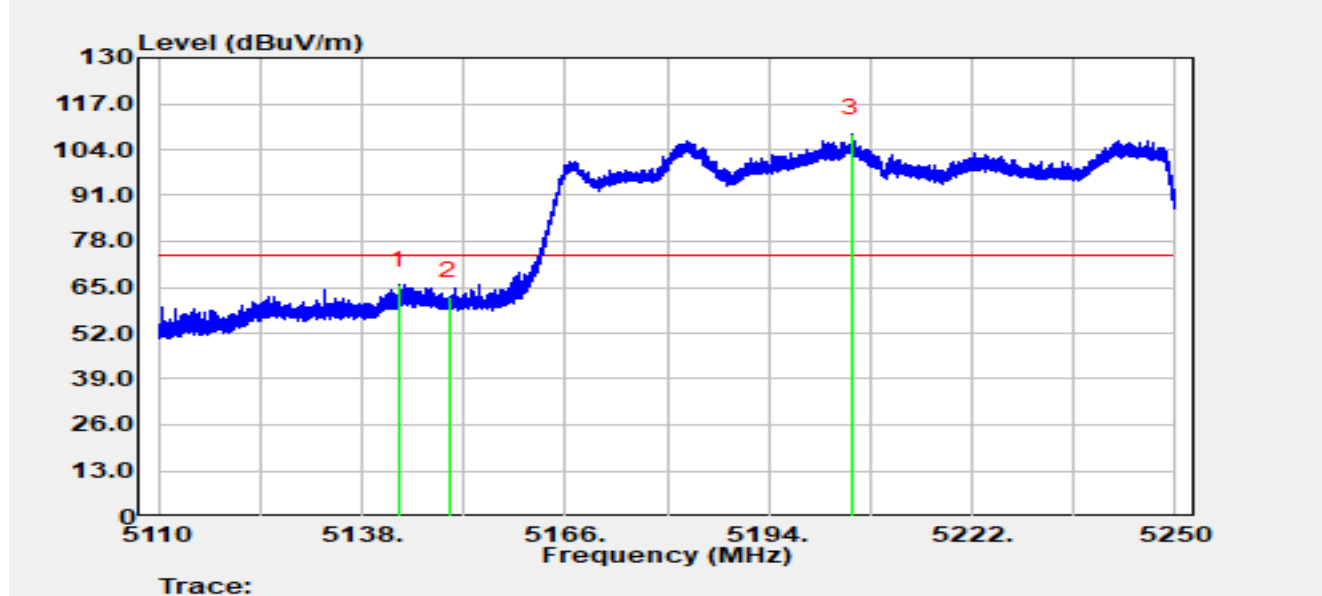


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.110	67.43	-1.72	65.70	-8.30	74.00	Peak
2		5150.000	63.02	-0.54	62.48	-11.52	74.00	Peak
3		5205.382	64.47	43.99	108.47	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

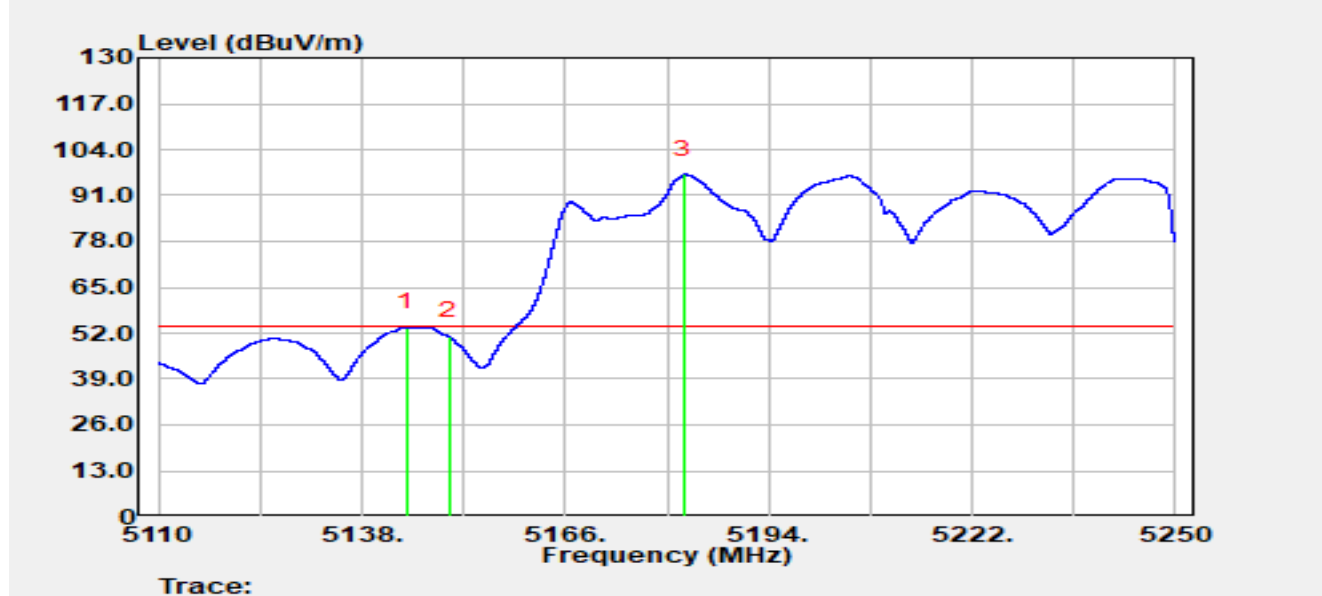


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.090	55.26	-1.60	53.65	-0.35	54.00	Average
2		5150.000	51.60	-0.54	51.05	-2.95	54.00	Average
3		5182.296	53.80	43.12	96.92	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

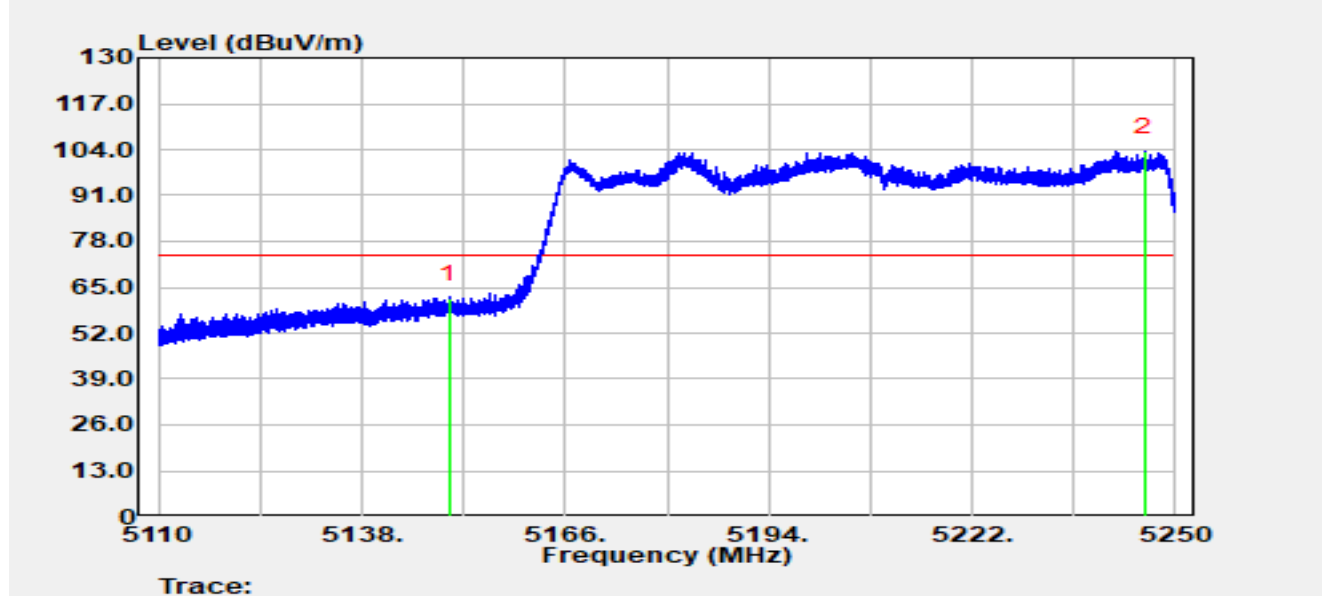


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	62.22	-0.54	61.67	-12.33	74.00	Peak
2		5245.674	62.07	41.37	103.44	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

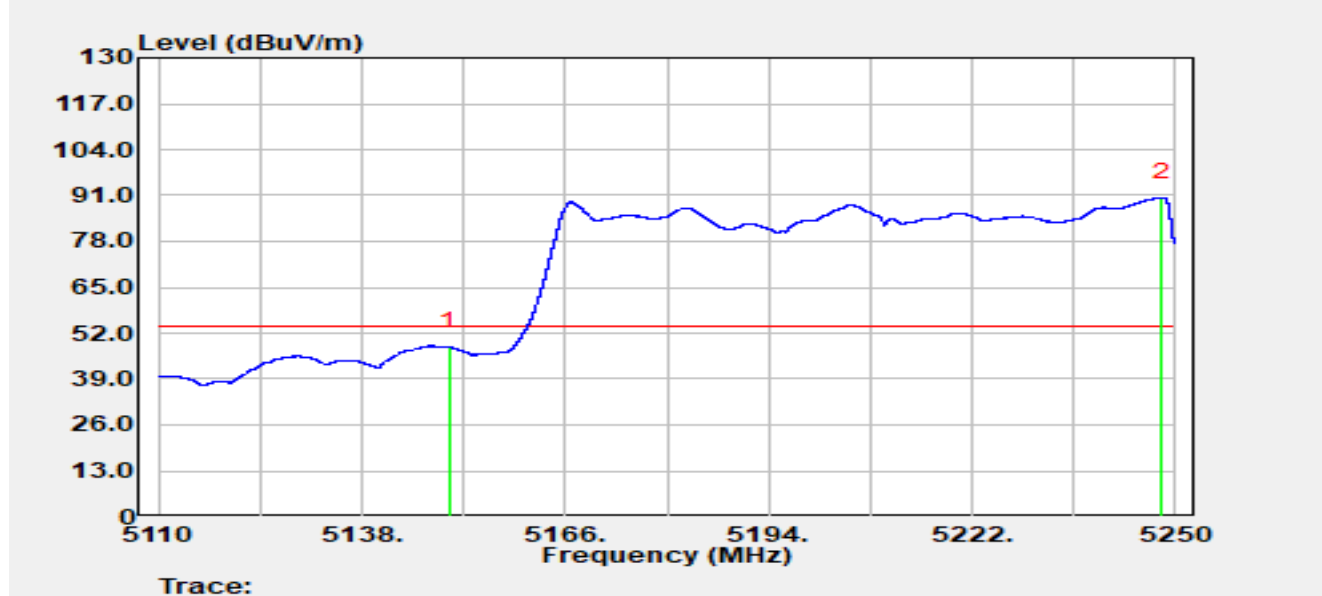


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	48.63	-0.54	48.09	-5.91	54.00	Average
2		5248.152	50.71	39.76	90.47	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

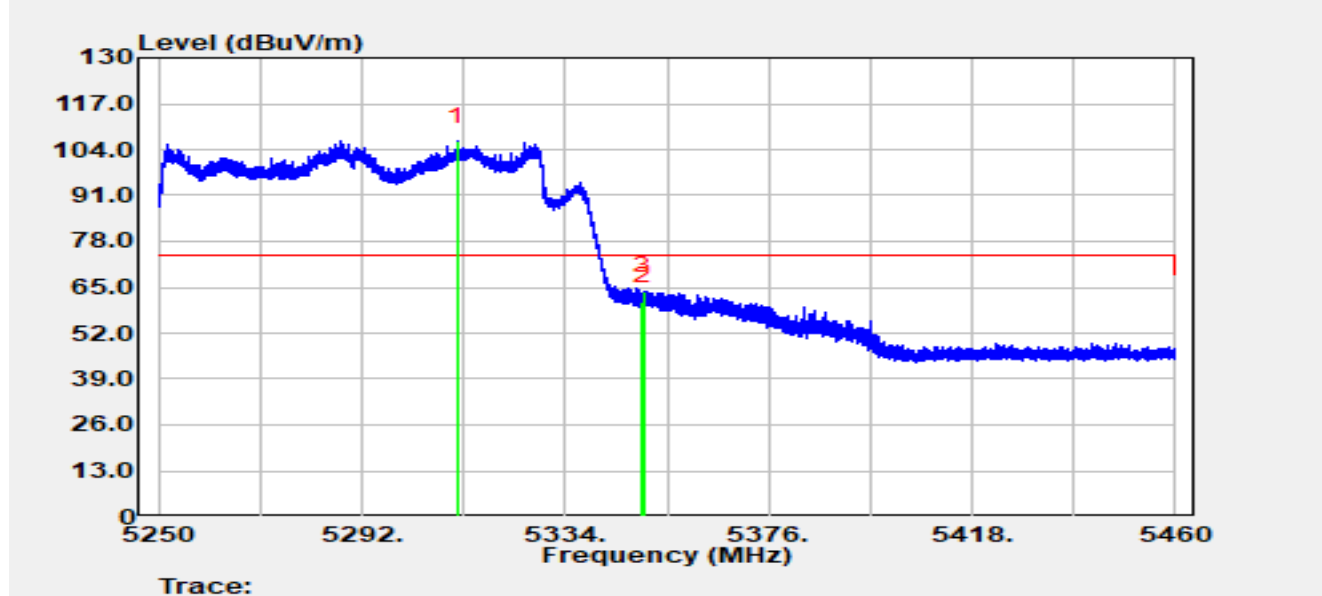


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.698	59.97	46.48	106.45	N/A	N/A	Peak
2		5350.000	58.65	2.28	60.93	-13.07	74.00	Peak
3	*	5350.212	61.70	2.17	63.88	-10.12	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

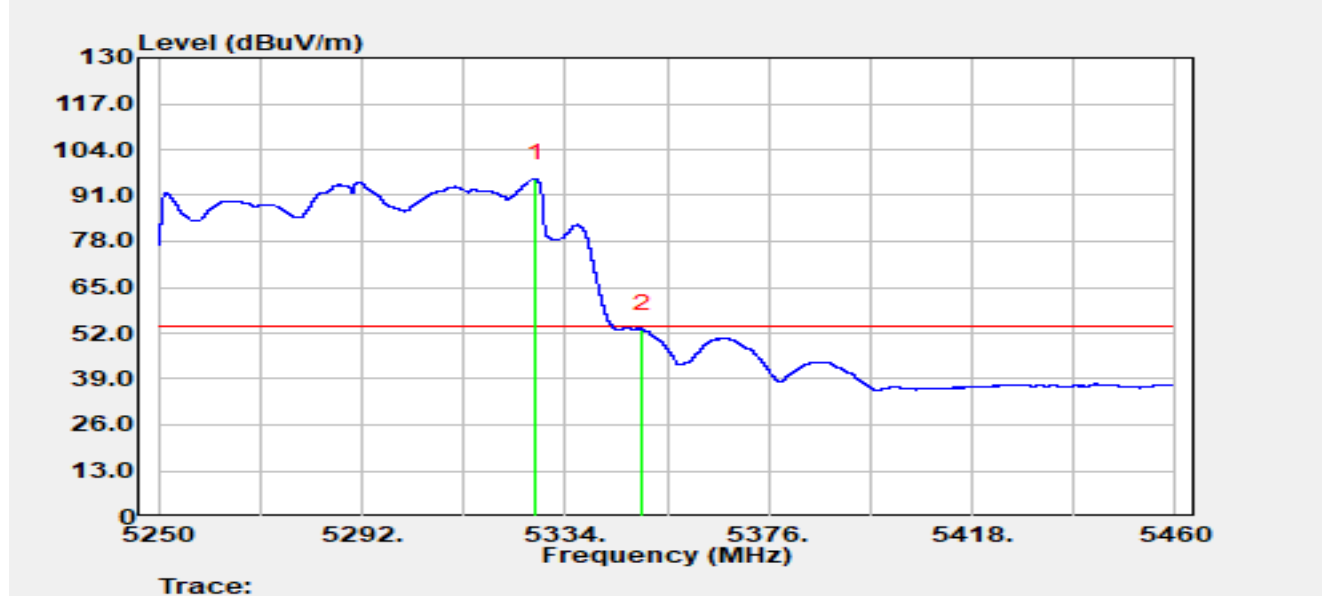


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.931	53.50	42.18	95.68	N/A	N/A	Average
2	*	5350.000	50.79	2.28	53.07	-0.93	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

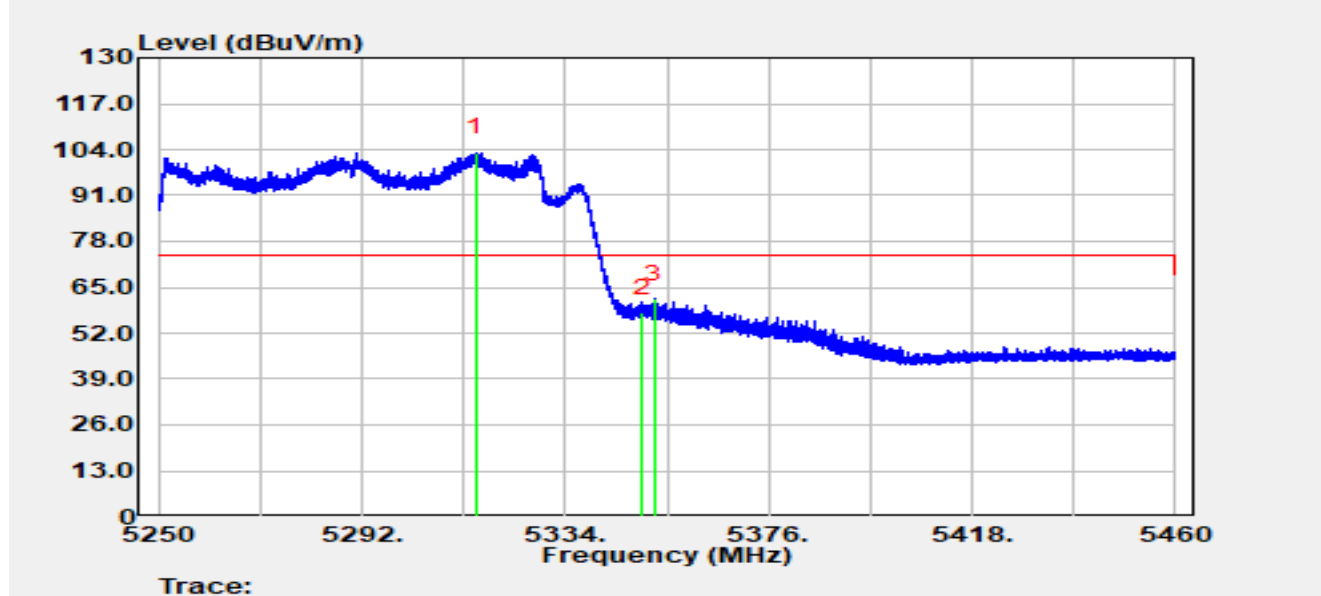


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5315.646	54.61	48.59	103.20	N/A	N/A	Peak
2		5350.000	55.44	2.28	57.72	-16.28	74.00	Peak
3	*	5352.375	61.12	0.63	61.75	-12.25	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

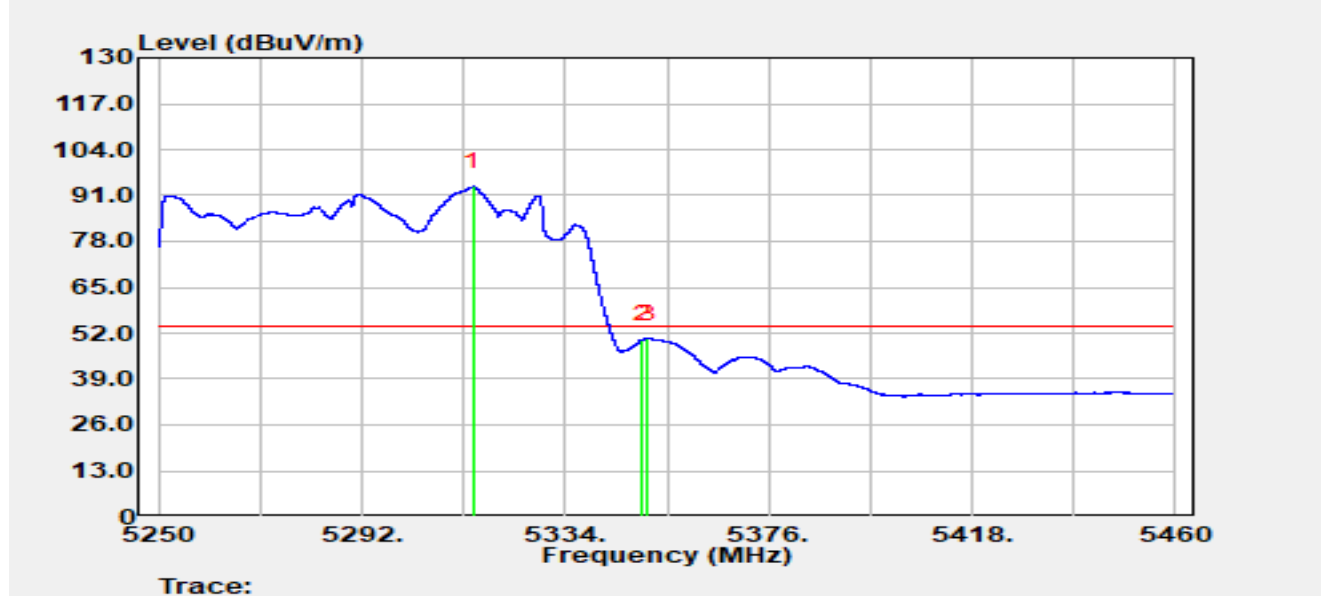


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5315.100	44.06	49.56	93.62	N/A	N/A	Average
2		5350.000	47.80	2.28	50.08	-3.92	54.00	Average
3	*	5350.947	48.76	1.68	50.44	-3.56	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

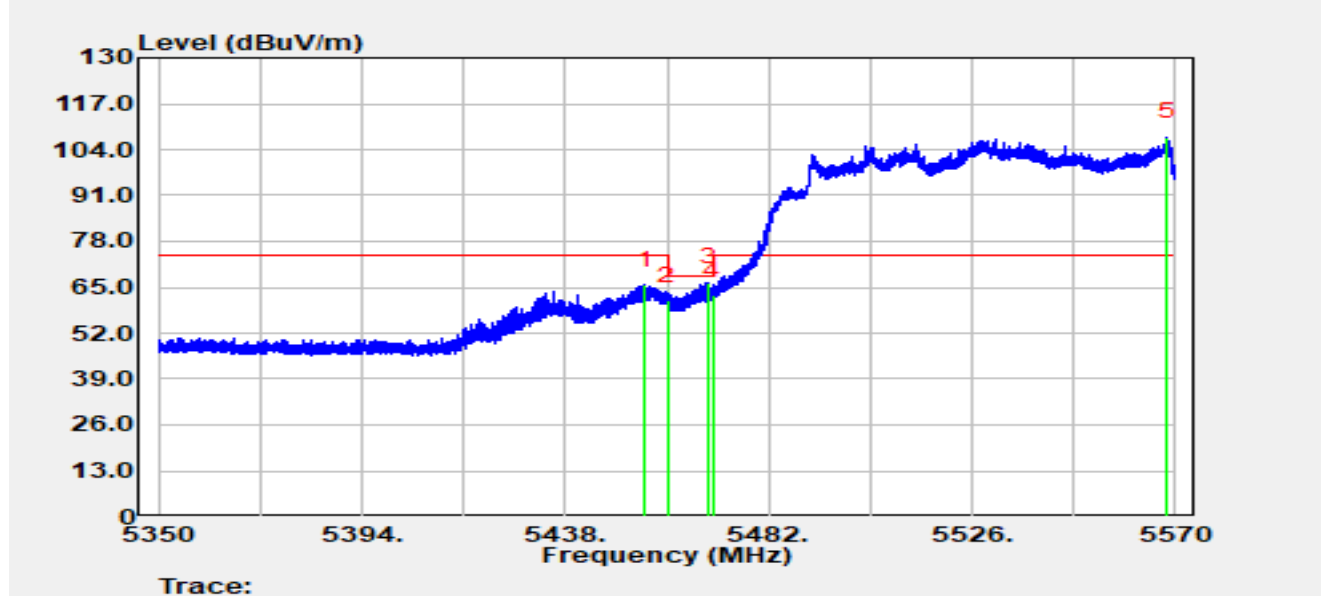


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5455.314	66.74	-1.01	65.73	-8.27	74.00	Peak
2		5460.000	61.87	-0.69	61.17	-7.03	68.20	Peak
3	*	5469.020	65.64	0.69	66.33	-1.87	68.20	Peak
4		5470.000	61.65	1.00	62.65	-5.55	68.20	Peak
5		5568.240	61.10	46.49	107.58	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

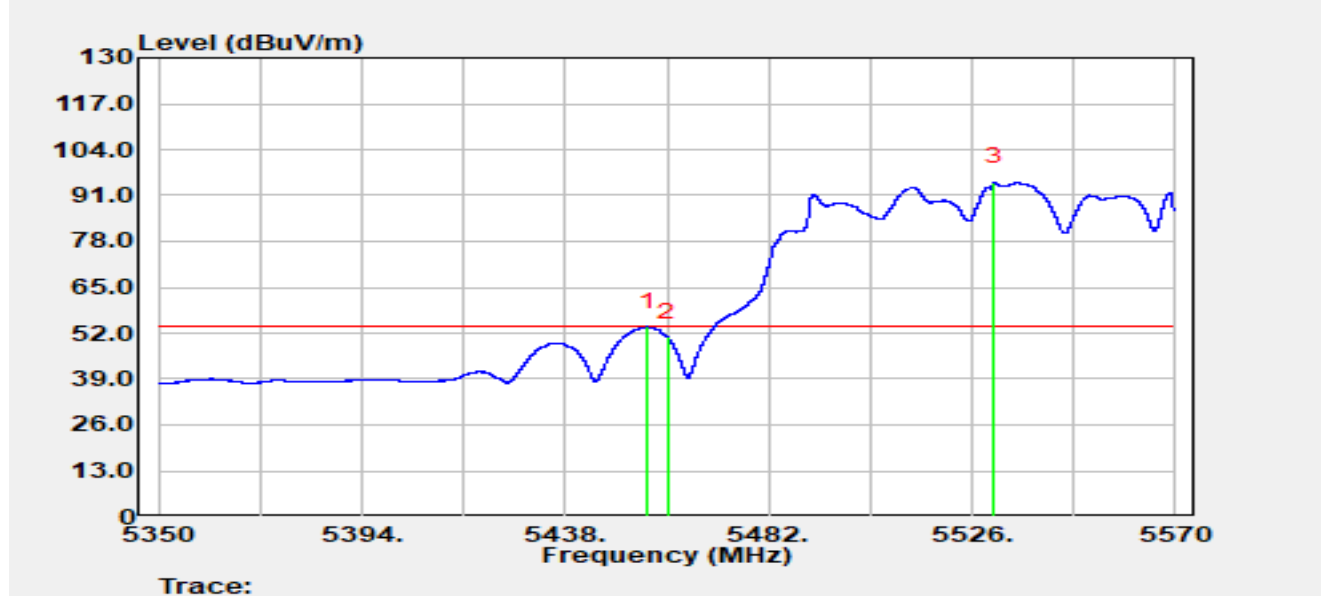


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5455.776	54.71	-0.99	53.73	-0.27	54.00	Average
2		5460.000	51.56	-0.69	50.86	-3.14	54.00	Average
3		5530.818	43.58	51.27	94.85	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

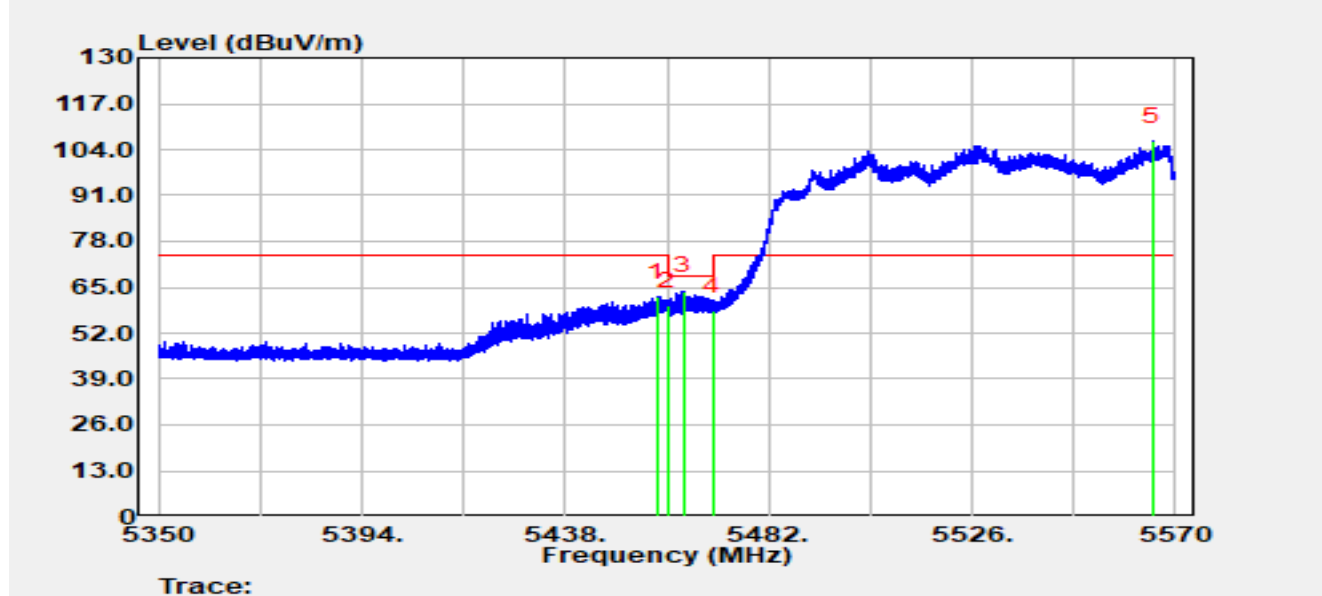


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.888	63.12	-0.87	62.25	-11.75	74.00	Peak
2		5460.000	60.43	-0.69	59.74	-8.46	68.20	Peak
3	*	5463.498	64.23	-0.44	63.79	-4.41	68.20	Peak
4		5470.000	57.18	1.00	58.18	-10.02	68.20	Peak
5		5565.094	63.84	42.37	106.21	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

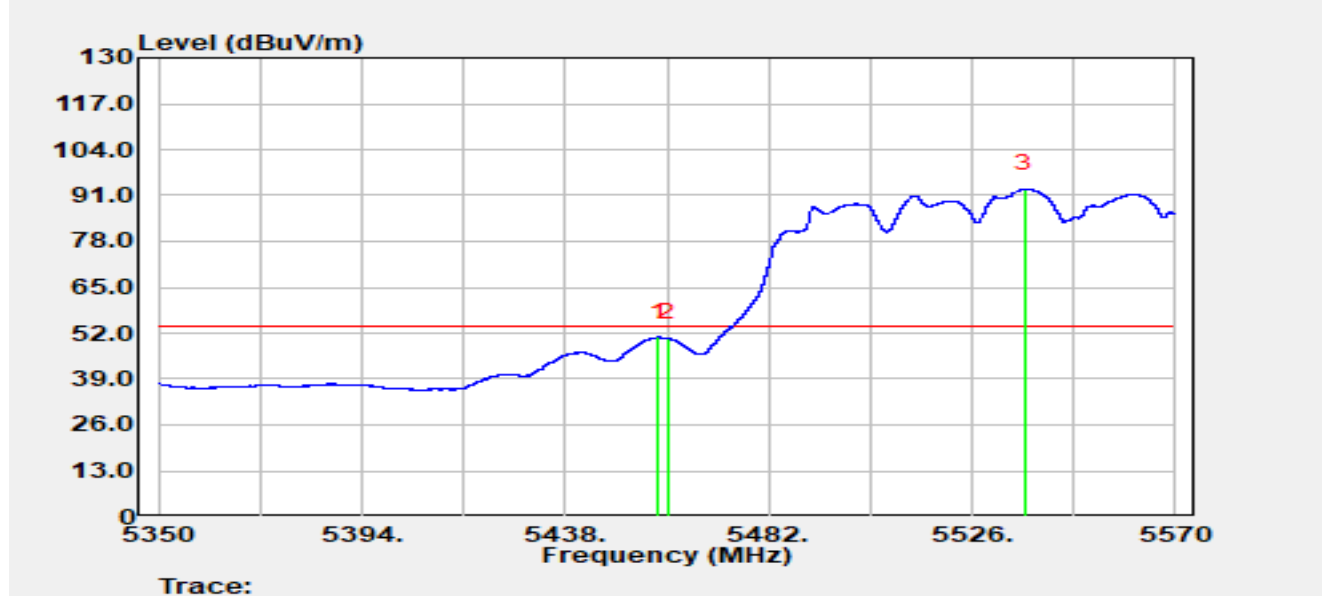


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.240	51.66	-0.81	50.85	-3.15	54.00	Average
2		5460.000	51.30	-0.69	50.60	-3.40	54.00	Average
3		5537.506	49.95	42.86	92.81	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2°C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

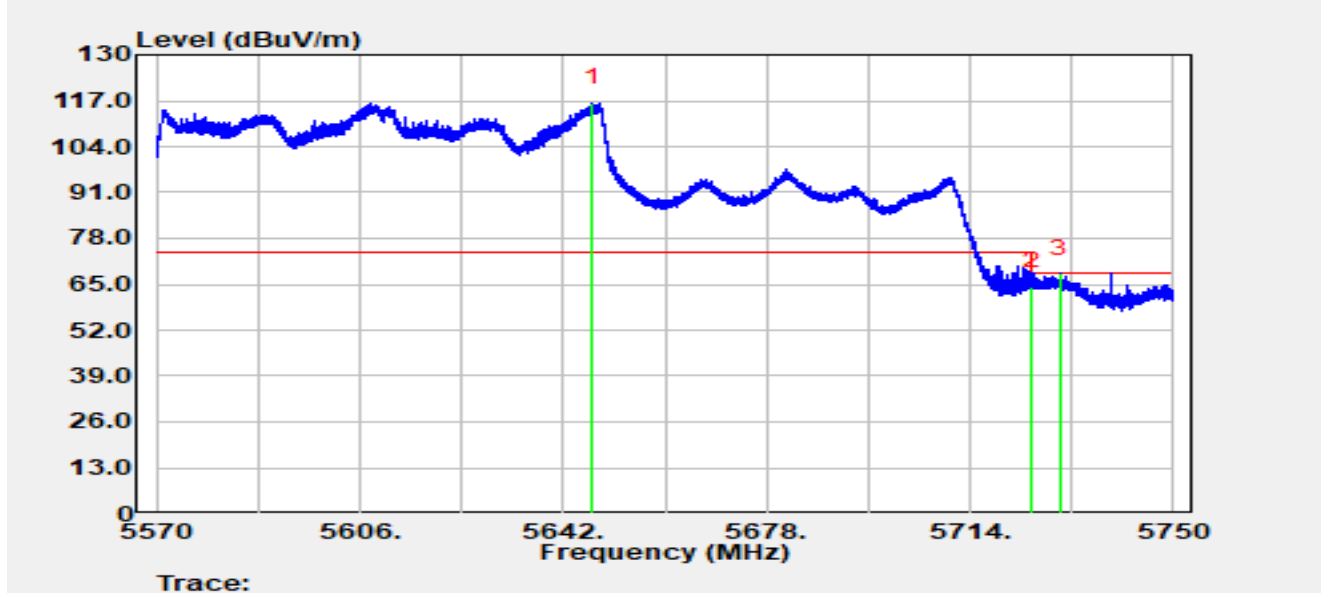


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5647.094	71.26	45.22	116.48	N/A	N/A	Peak
2		5725.000	63.47	1.01	64.48	-3.72	68.20	Peak
3	*	5729.966	68.86	-0.76	68.10	-0.10	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

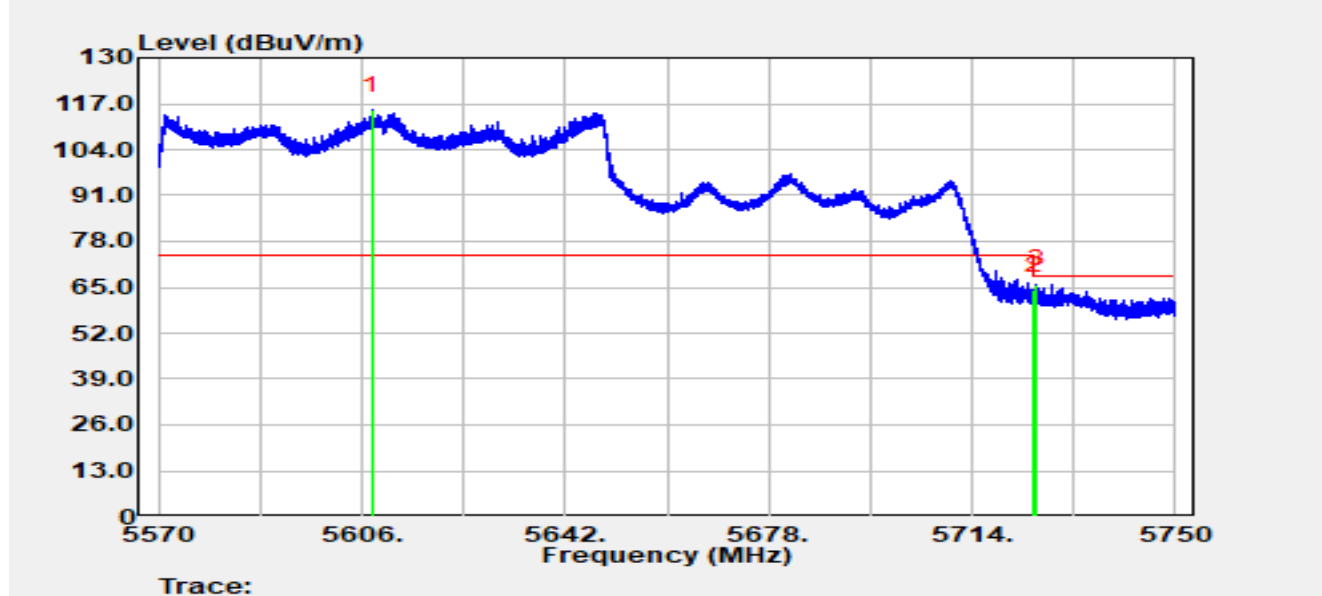


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5607.728	69.97	45.08	115.05	N/A	N/A	Peak
2		5725.000	63.05	1.01	64.05	-4.15	68.20	Peak
3	*	5725.322	64.94	0.83	65.77	-2.43	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5775 MHz		

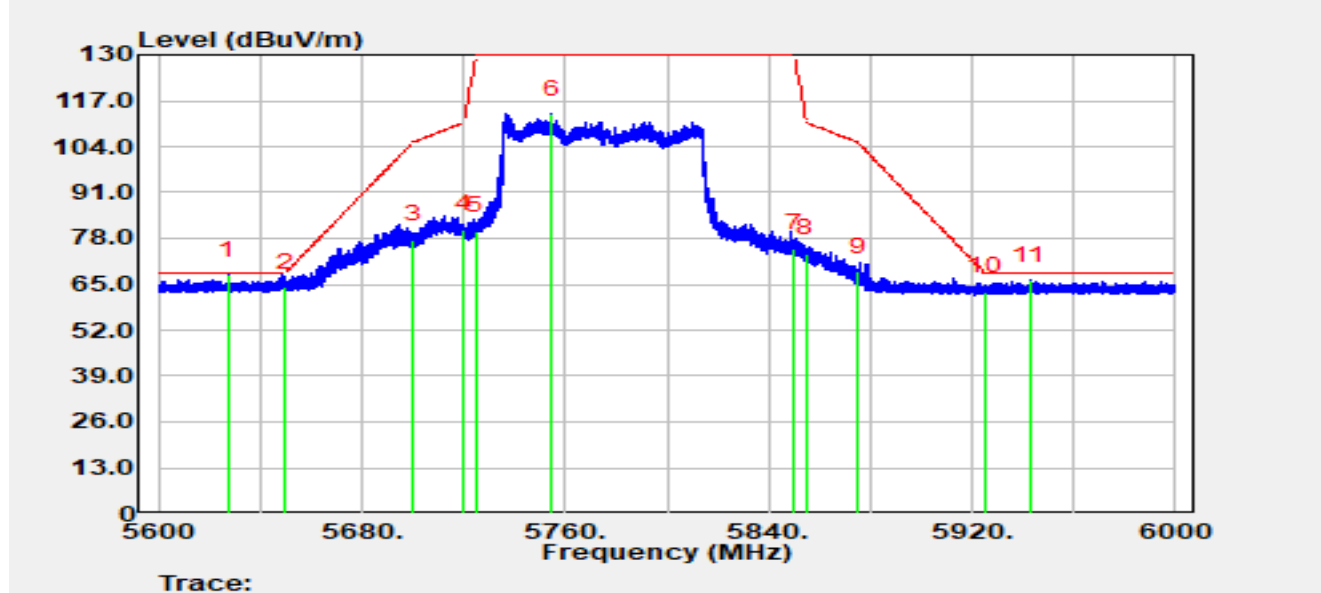


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5627.200	70.99	-3.40	67.59	-0.61	68.20	Peak
2		5650.000	67.79	-3.65	64.14	-4.06	68.20	Peak
3		5700.000	81.19	-3.47	77.71	-27.49	105.20	Peak
4		5720.000	84.08	-3.45	80.63	-30.17	110.80	Peak
5		5725.000	83.57	-3.47	80.11	-49.89	130.00	Peak
6		5754.840	116.82	-3.65	113.16	N/A	N/A	Peak
7		5850.000	78.92	-3.75	75.17	-54.83	130.00	Peak
8		5855.000	77.52	-3.75	73.77	-37.03	110.80	Peak
9		5875.000	72.38	-3.82	68.56	-36.64	105.20	Peak
10		5925.000	66.63	-3.71	62.93	-5.27	68.20	Peak
11		5942.600	69.78	-3.70	66.08	-2.12	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5775 MHz		

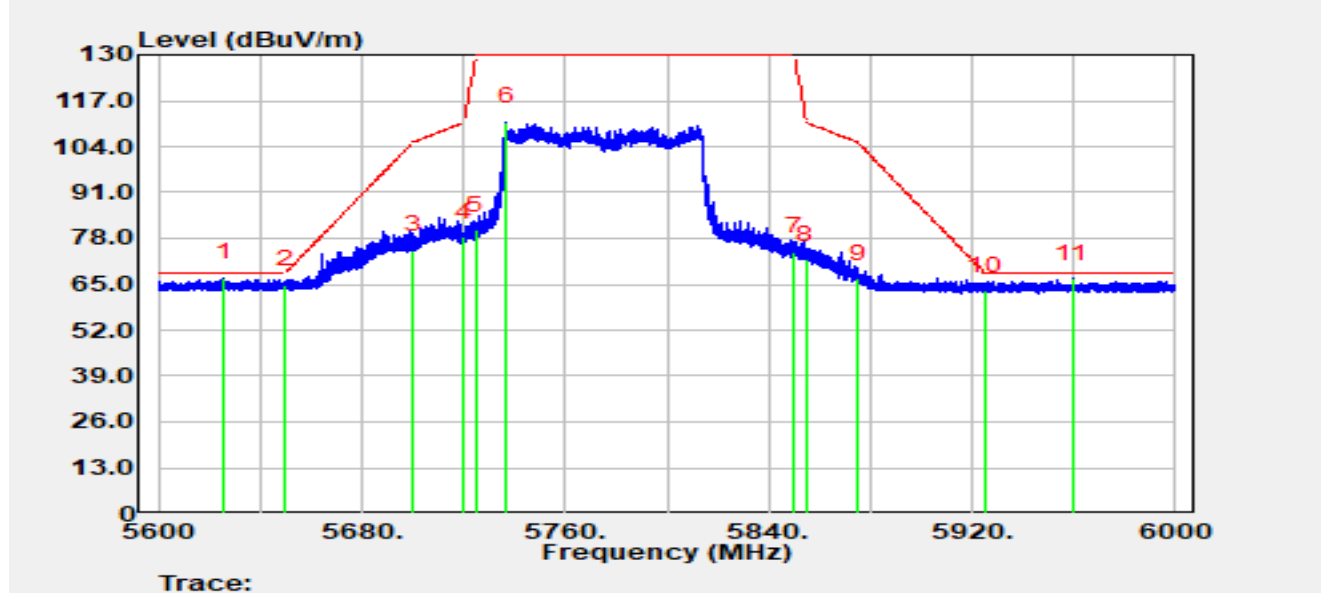


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5626.040	70.10	-3.38	66.72	-1.48	68.20	Peak
2		5650.000	68.53	-3.65	64.88	-3.32	68.20	Peak
3		5700.000	78.27	-3.47	74.79	-30.41	105.20	Peak
4		5720.000	81.80	-3.45	78.34	-32.46	110.80	Peak
5		5725.000	83.90	-3.47	80.43	-49.57	130.00	Peak
6		5736.680	114.48	-3.57	110.91	N/A	N/A	Peak
7		5850.000	77.91	-3.75	74.16	-55.84	130.00	Peak
8		5855.000	75.84	-3.75	72.09	-38.71	110.80	Peak
9		5875.000	70.35	-3.82	66.52	-38.68	105.20	Peak
10		5925.000	66.94	-3.71	63.23	-4.97	68.20	Peak
11		5959.720	70.17	-3.65	66.52	-1.68	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

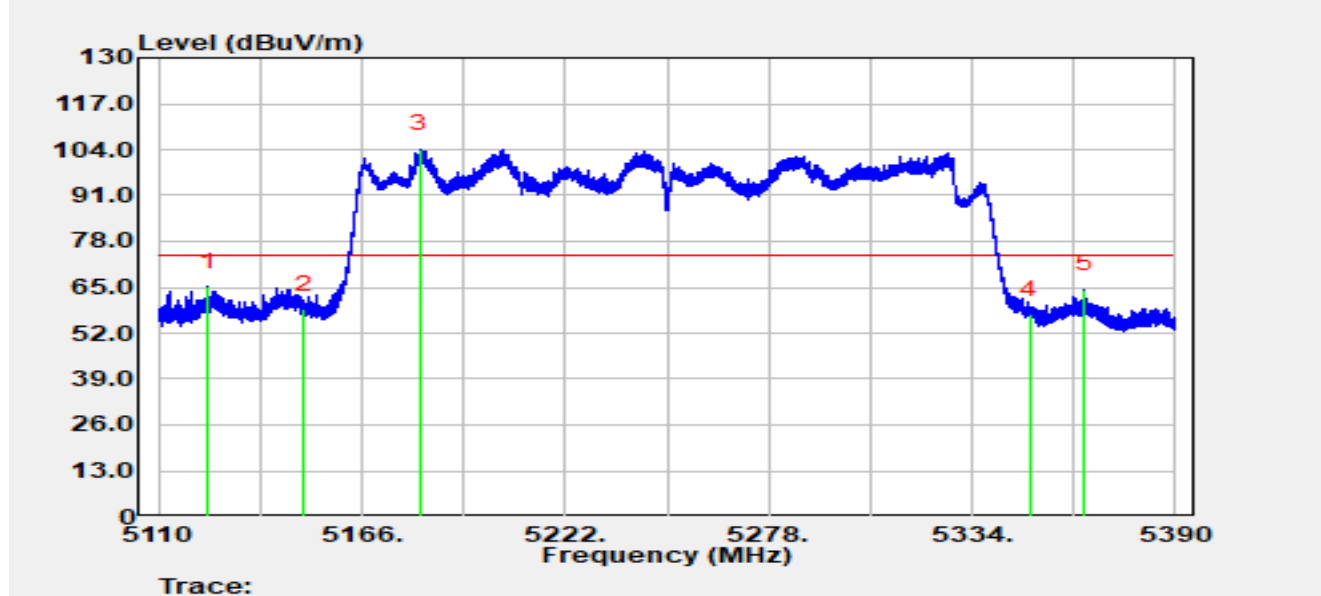


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5123.636	67.92	-2.90	65.01	-8.99	74.00	Peak
2		5150.000	59.29	-0.54	58.75	-15.25	74.00	Peak
3		5182.100	60.48	43.57	104.06	N/A	N/A	Peak
4		5350.000	54.90	2.28	57.18	-16.82	74.00	Peak
5		5364.856	65.66	-1.35	64.31	-9.69	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

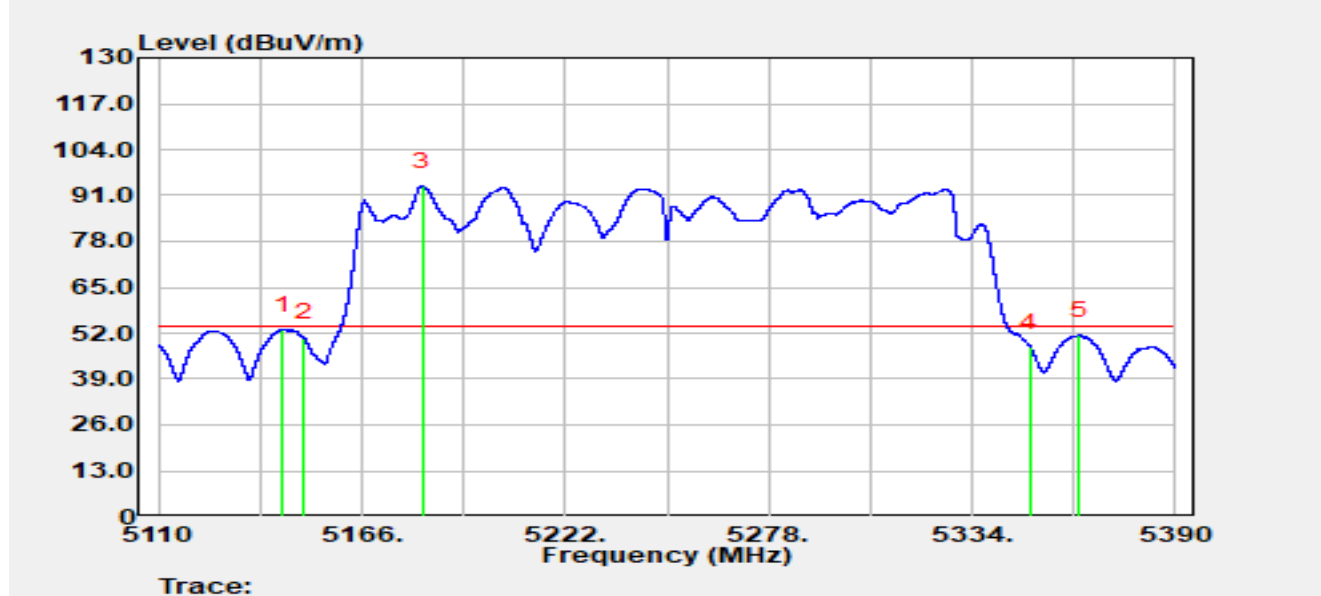


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.328	54.60	-1.63	52.97	-1.03	54.00	Average
2		5150.000	51.23	-0.54	50.69	-3.31	54.00	Average
3		5182.688	51.31	42.22	93.53	N/A	N/A	Average
4		5350.000	45.75	2.28	48.04	-5.96	54.00	Average
5		5363.512	52.45	-1.14	51.31	-2.69	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

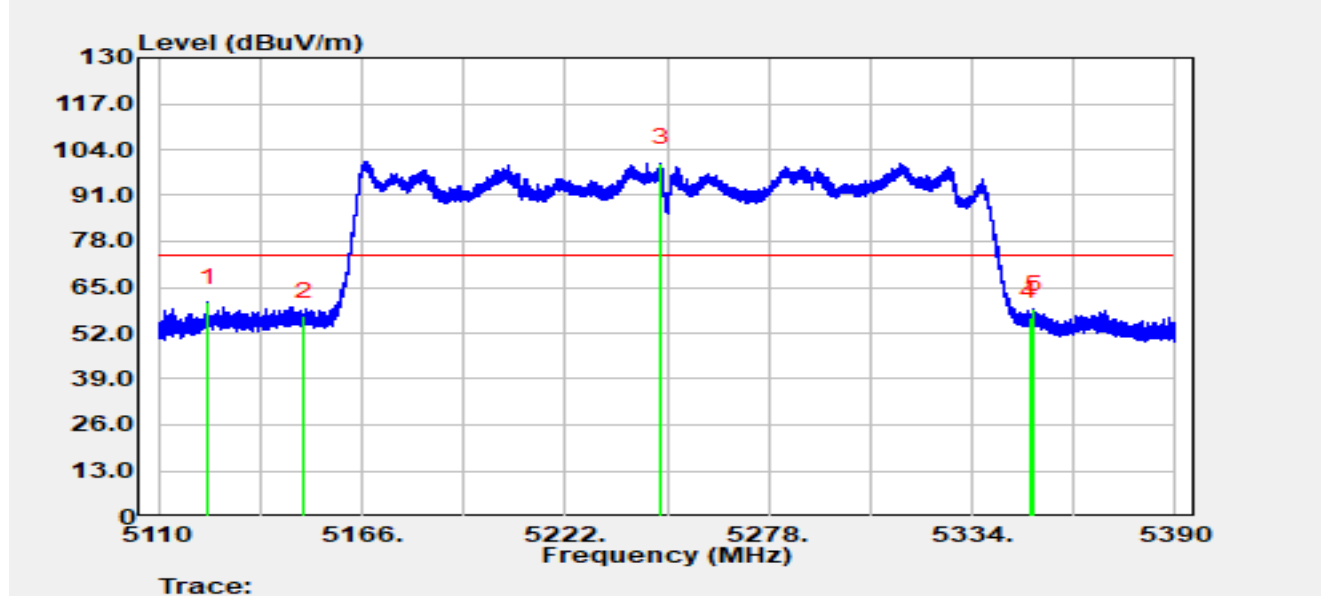


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5123.692	63.54	-2.90	60.63	-13.37	74.00	Peak
2		5150.000	57.30	-0.54	56.75	-17.25	74.00	Peak
3		5248.460	60.56	39.59	100.15	N/A	N/A	Peak
4		5350.000	54.29	2.28	56.57	-17.43	74.00	Peak
5		5350.996	57.17	1.64	58.82	-15.18	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5250 MHz		

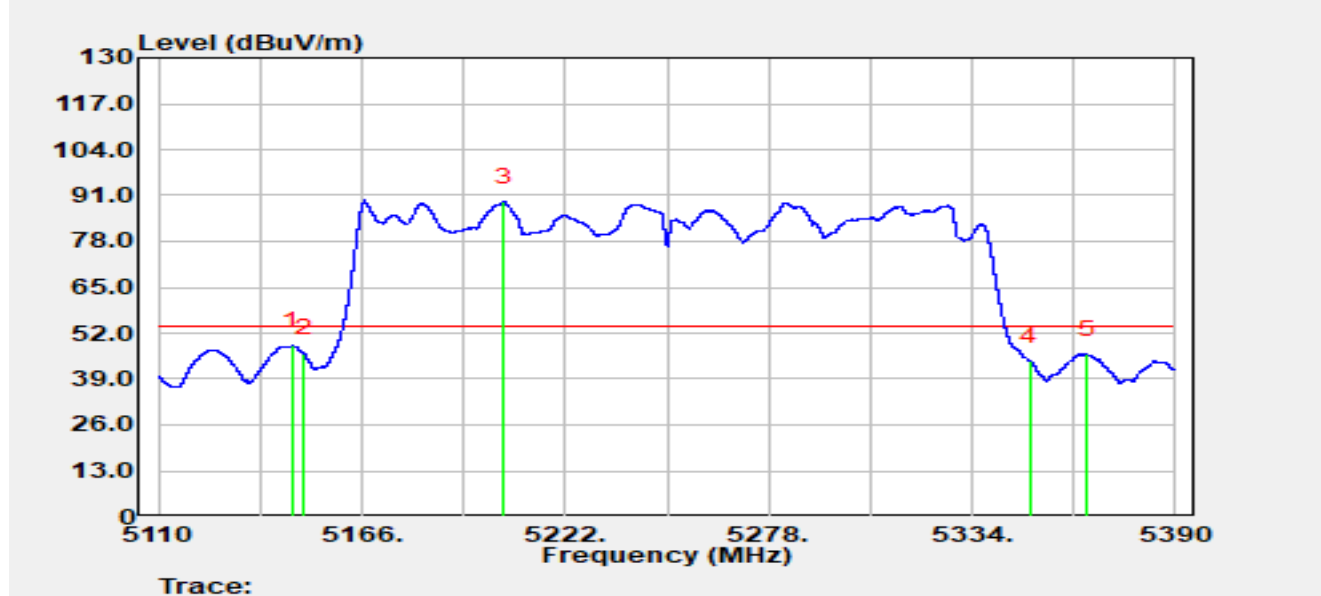


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.848	49.59	-1.20	48.39	-5.61	54.00	Average
2		5150.000	46.75	-0.54	46.21	-7.79	54.00	Average
3		5205.116	44.82	44.39	89.21	N/A	N/A	Average
4		5350.000	41.78	2.28	44.06	-9.94	54.00	Average
5		5365.752	47.40	-1.43	45.97	-8.03	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

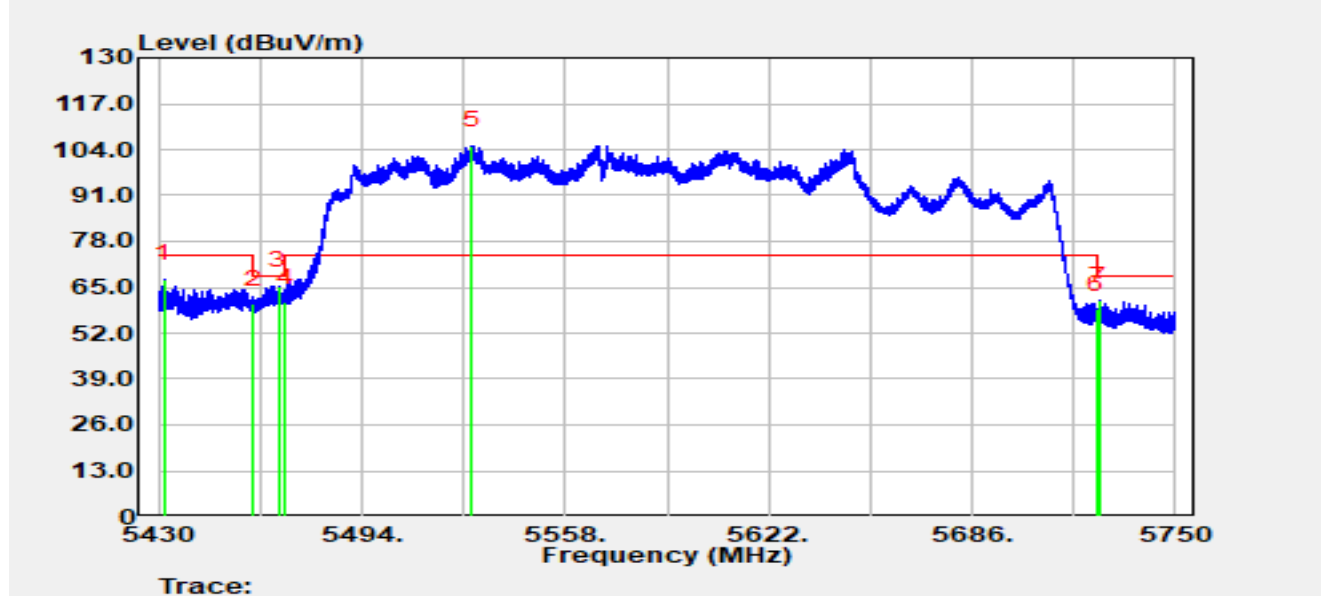


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5431.824	69.18	-1.96	67.23	-6.77	74.00	Peak
2		5460.000	61.03	-0.69	60.34	-7.86	68.20	Peak
3	*	5467.984	65.03	0.34	65.37	-2.83	68.20	Peak
4		5470.000	59.81	1.00	60.81	-7.39	68.20	Peak
5		5528.496	56.98	48.22	105.21	N/A	N/A	Peak
6		5725.000	57.83	1.01	58.83	-9.37	68.20	Peak
7		5726.160	60.76	0.39	61.15	-7.05	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

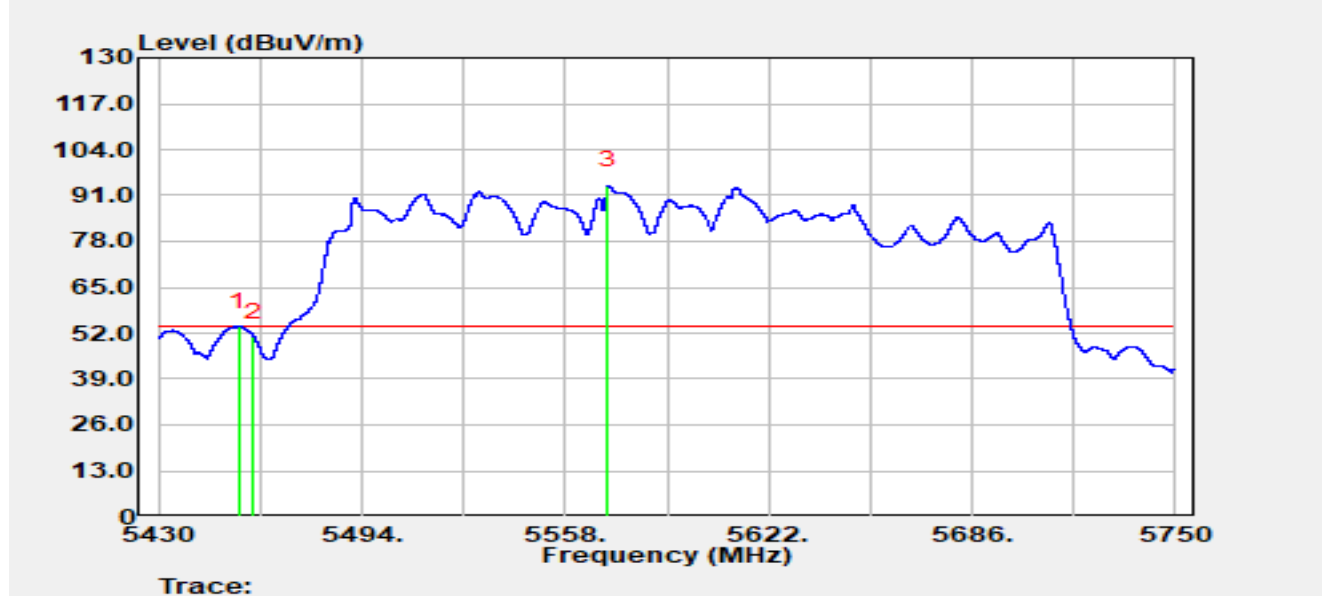


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5455.184	54.89	-1.01	53.87	-0.13	54.00	Average
2		5460.000	51.58	-0.69	50.89	-3.11	54.00	Average
3		5571.536	43.60	50.29	93.89	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

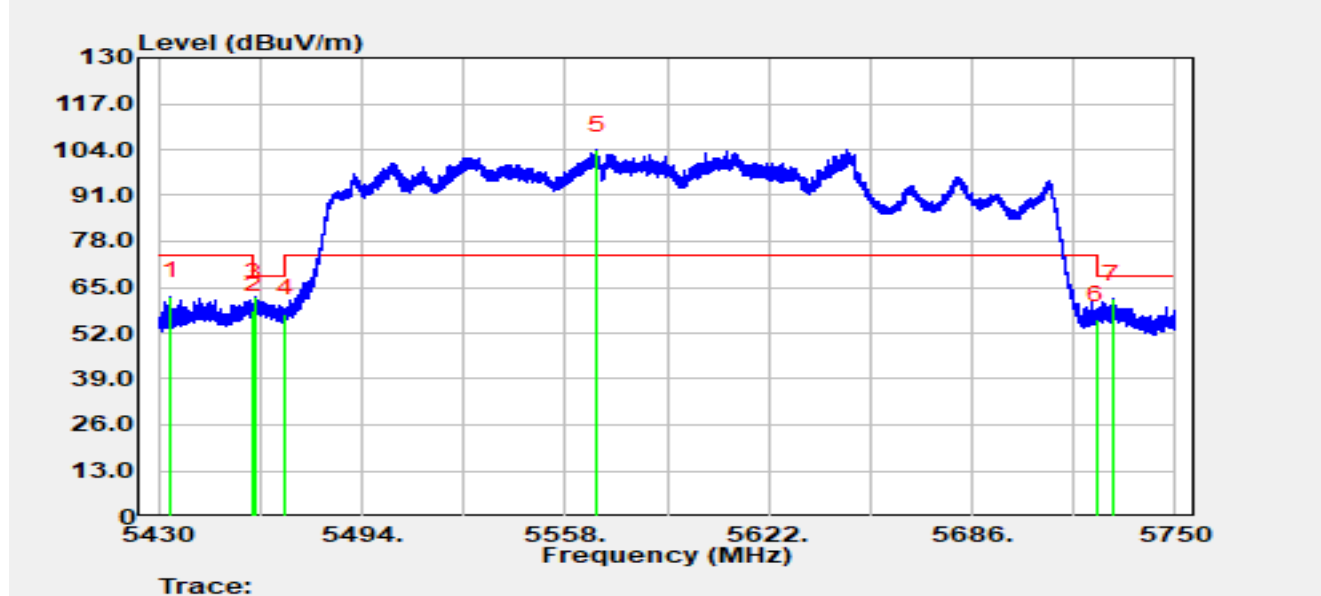


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5433.776	64.21	-1.88	62.33	-11.67	74.00	Peak
2		5460.000	59.31	-0.69	58.62	-9.58	68.20	Peak
3	*	5460.336	62.84	-0.72	62.12	-6.08	68.20	Peak
4		5470.000	56.62	1.00	57.62	-10.58	68.20	Peak
5		5568.080	57.72	46.27	103.99	N/A	N/A	Peak
6		5725.000	54.85	1.01	55.85	-12.35	68.20	Peak
7		5730.128	62.56	-0.78	61.78	-6.42	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	16.2 °C	Humidity	55.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 5570 MHz		

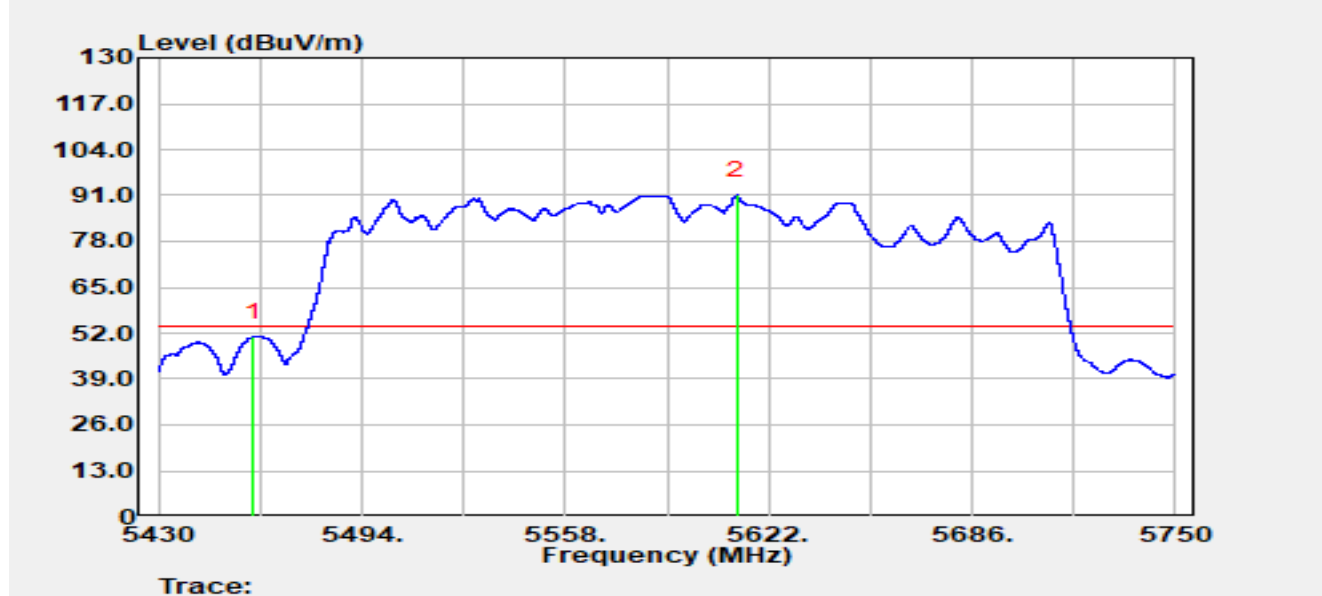


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	51.67	-0.69	50.98	-3.02	54.00	Average
2		5612.016	39.84	51.17	91.02	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-08
Temperature	15.8 °C	Humidity	50.1%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT240 at 5610 MHz		

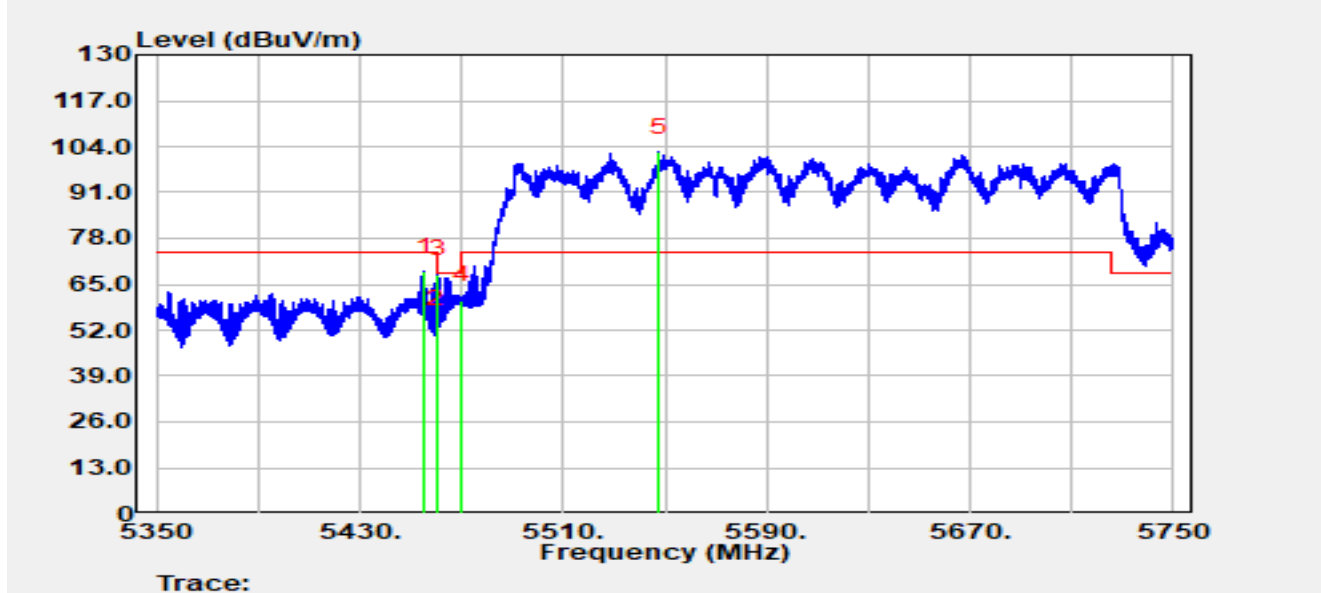


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5455.320	72.02	-3.52	68.51	-5.49	74.00	Peak
2		5460.000	56.95	-3.25	53.70	-14.50	68.20	Peak
3	*	5460.600	70.84	-3.09	67.76	-0.44	68.20	Peak
4		5470.000	62.33	-1.75	60.58	-7.62	68.20	Peak
5		5547.640	57.97	44.33	102.30	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-08
Temperature	15.8 °C	Humidity	50.1%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT240 at 5610 MHz		

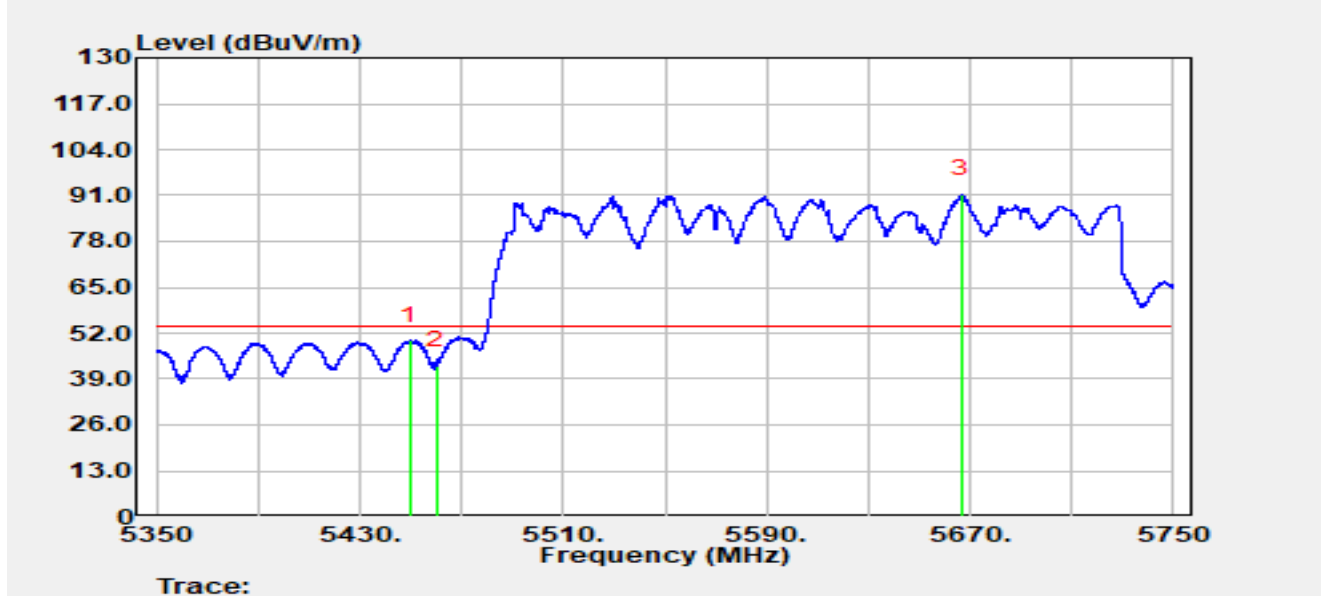


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5449.840	53.80	-3.89	49.91	-4.09	54.00	Average
2		5460.000	46.17	-3.25	42.92	-11.08	54.00	Average
3		5666.800	44.27	46.98	91.25	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-08
Temperature	15.8 °C	Humidity	50.1%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT240 at 5610 MHz		

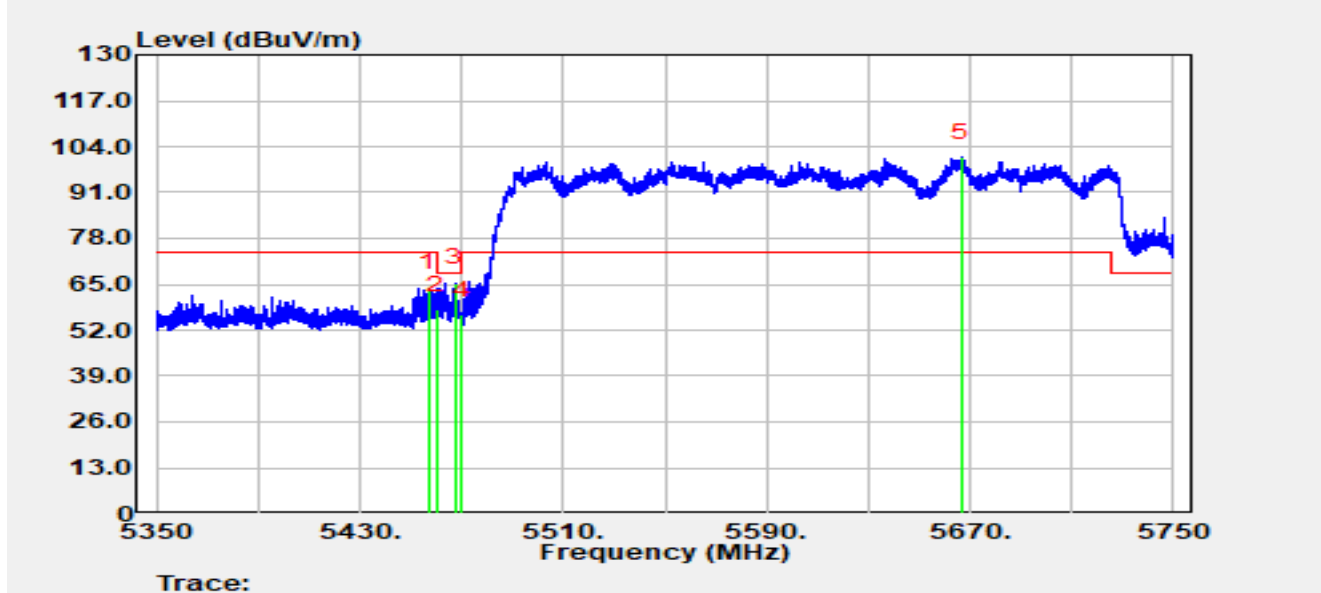


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.840	67.40	-3.38	64.02	-9.98	74.00	Peak
2		5460.000	61.09	-3.25	57.84	-10.36	68.20	Peak
3	*	5467.720	67.54	-2.25	65.29	-2.91	68.20	Peak
4		5470.000	58.09	-1.75	56.34	-11.86	68.20	Peak
5		5666.440	54.53	46.32	100.85	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-08
Temperature	15.8 °C	Humidity	50.1%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT240 at 5610 MHz		

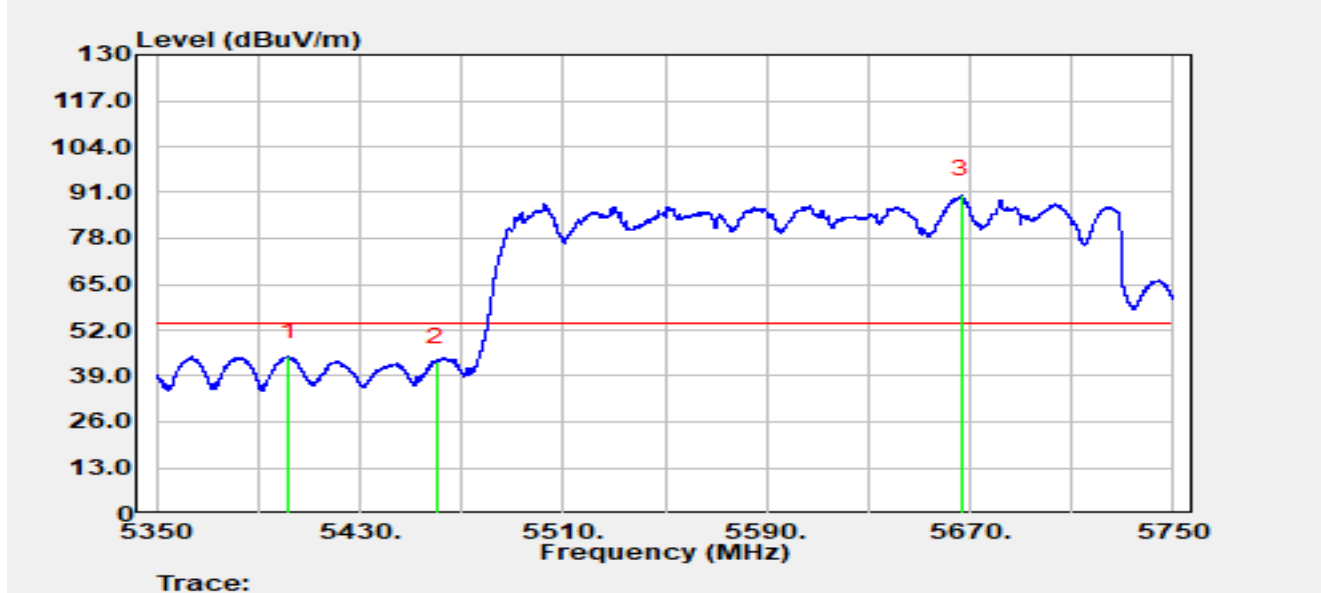

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5402.200	48.97	-4.34	44.62	-9.38	54.00	Average
2		5460.000	46.23	-3.25	42.98	-11.02	54.00	Average
3		5666.600	43.88	46.61	90.50	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Note Transmit by ax-HE40 at 5230 MHz

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2026-01-15


Temp 16.4°C

Humi 39.4%

Polarity L

Test Site WJ-SR5

Spectrum Overview

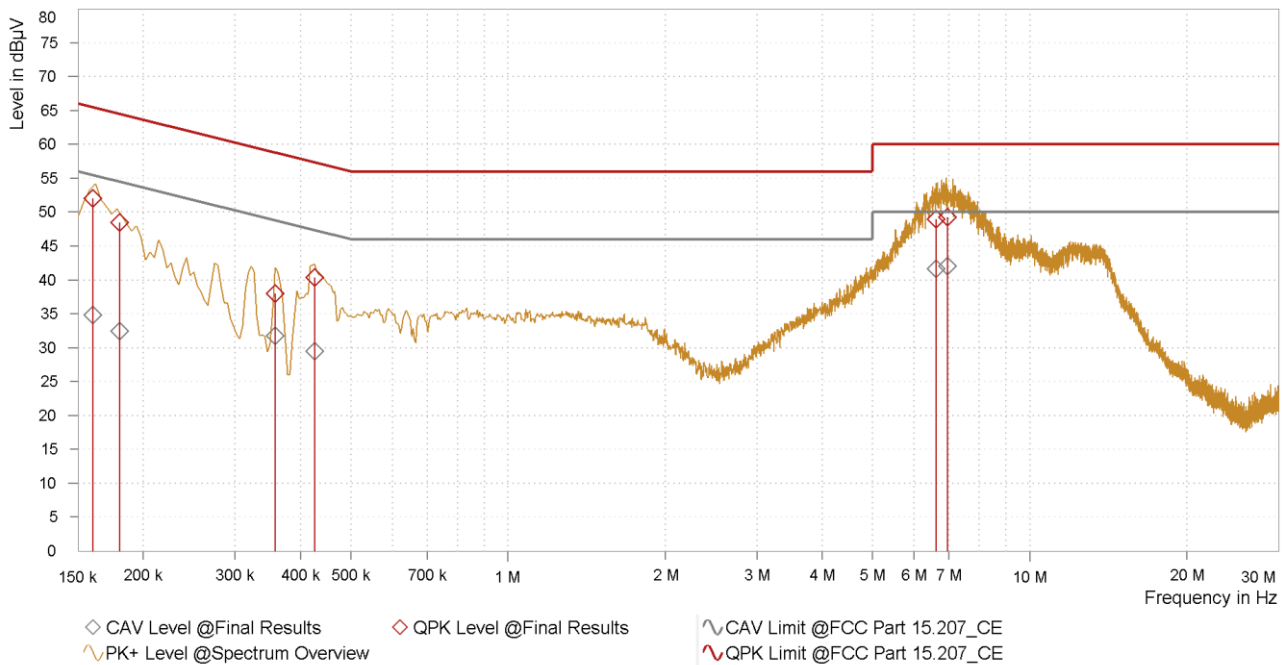

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.160	52.04	65.46	13.43	42.16	34.79	55.46	20.67	24.92	9.88	L1
0.180	48.50	64.49	15.98	38.63	32.47	54.49	22.02	22.59	9.88	L1
0.358	37.97	58.77	20.81	28.11	31.74	48.77	17.04	21.88	9.86	L1
0.426	40.30	57.33	17.03	30.45	29.45	47.33	17.88	19.60	9.85	L1
6.620	48.96	60.00	11.04	38.83	41.60	50.00	8.40	31.48	10.13	L1
6.957	49.25	60.00	10.75	39.11	42.07	50.00	7.93	31.93	10.14	L1

Notes

1. QPK Level [dB μ V]=QPK Raw Lvl [dB μ V] + Correction [dB]
2. CAV Level [dB μ V]=CAV Raw Lvl [dB μ V] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

Note Transmit by ax-HE40 at 5230 MHz

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2026-01-15


Temp 16.4°C

Humi 39.4%

Polarity N

Test Site WJ-SR5

Spectrum Overview

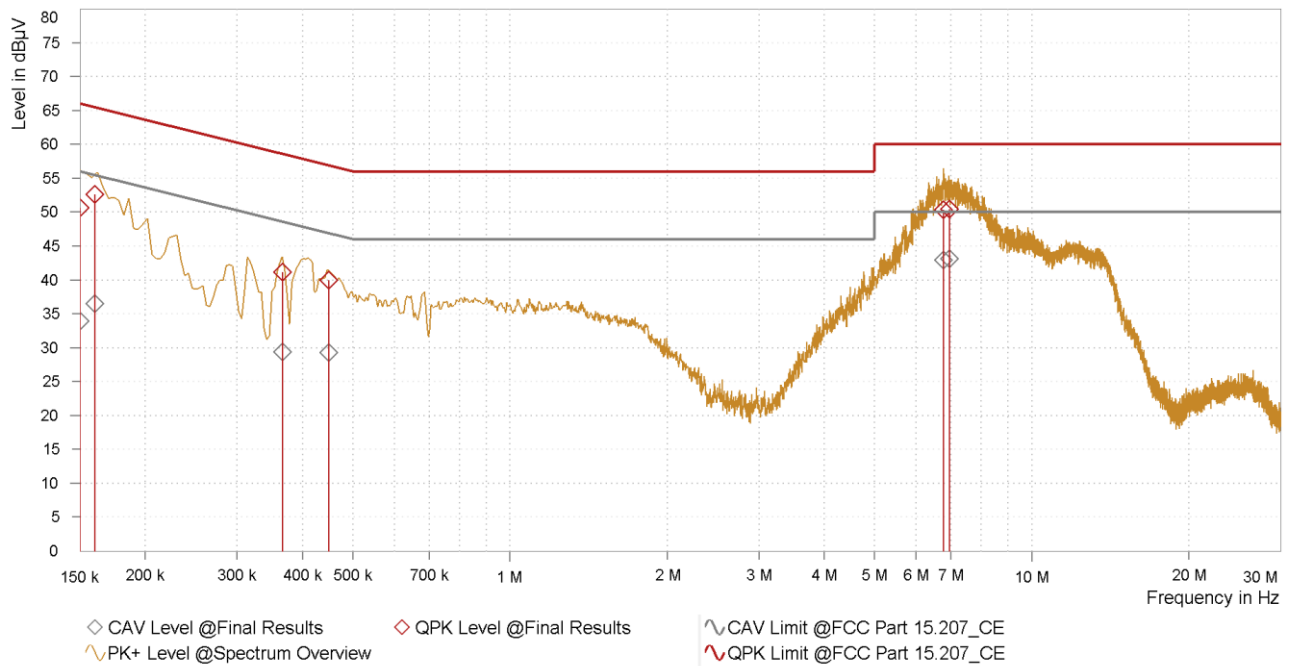

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.150	50.59	66.00	15.41	40.76	33.94	56.00	22.06	24.12	9.83	N
0.160	52.61	65.46	12.85	42.78	36.48	55.46	18.99	26.64	9.83	N
0.366	41.16	58.59	17.43	31.30	29.34	48.59	19.25	19.48	9.86	N
0.450	39.91	56.88	16.96	30.05	29.29	46.88	17.58	19.43	9.86	N
6.778	50.35	60.00	9.65	40.06	42.91	50.00	7.09	32.62	10.29	N
6.949	50.41	60.00	9.59	40.11	43.08	50.00	6.92	32.78	10.30	N

Notes

1. QPK Level [dBμV]=QPK Raw Lvl [dBμV] + Correction [dB]
2. CAV Level [dBμV]=CAV Raw Lvl [dBμV] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

Appendix B - Test Setup Photograph

Refer to "R25S1036128-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1036128-UE" file.

_____ The End _____