



## 802.11ac-VHT40 Power Spectral Density - Ant 1


Channel 38 (5190 MHz)

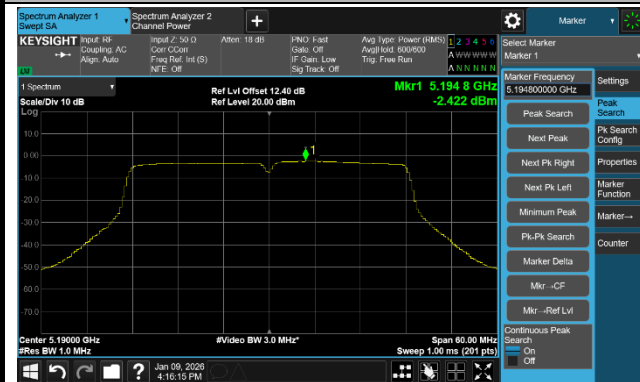


Channel 46 (5230 MHz)

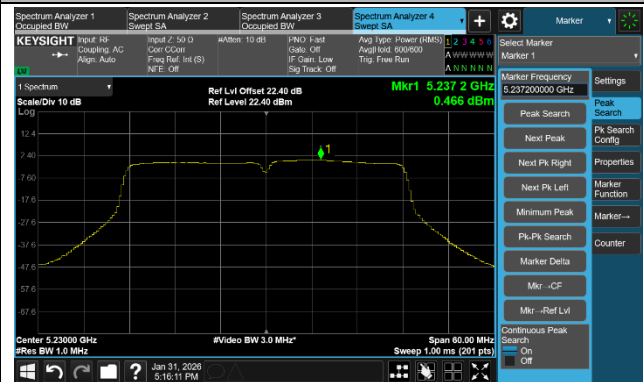

Channel 151 (5755 MHz)

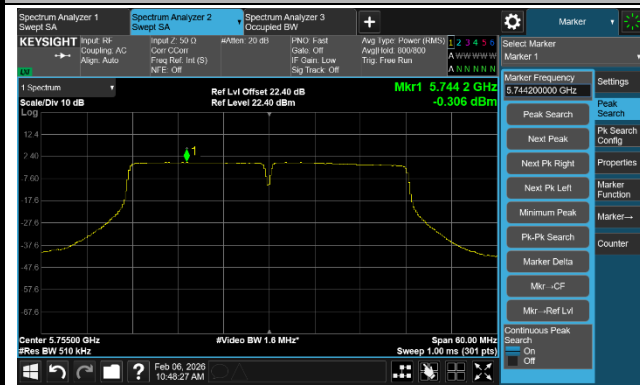


Channel 159 (5795 MHz)

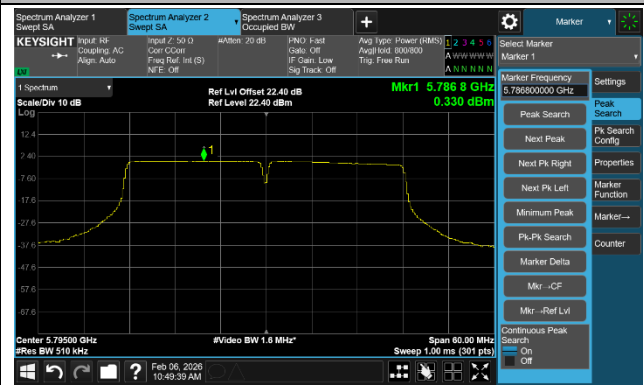


## 802.11ac-VHT80 Power Spectral Density - Ant 1

## Channel 42 (5210 MHz)

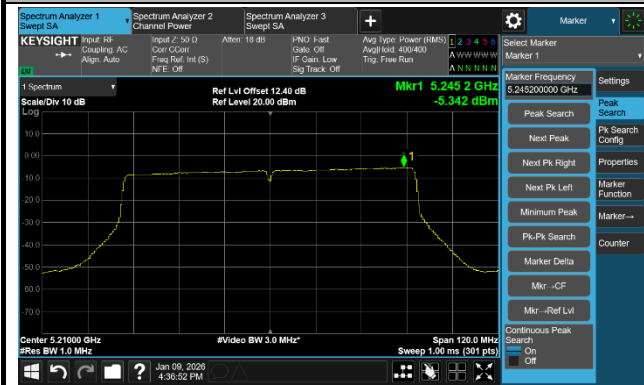

## Channel 155 (5775 MHz)

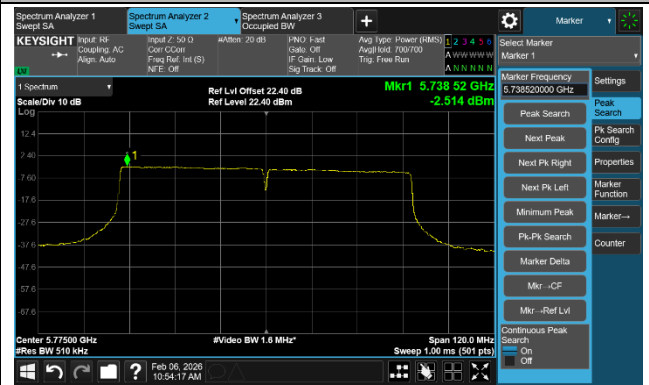

### A.6 Frequency Stability Test Result

|           |            |               |                         |
|-----------|------------|---------------|-------------------------|
| Test Site | WZ-TR3     | Test Engineer | Molly Wu                |
| Test Date | 2026-01-23 | Test Mode     | 5180 MHz (Carrier Mode) |

| Voltage (%) | Power (VAC) | Temp (°C) | Frequency Tolerance (ppm) |           |           |            |
|-------------|-------------|-----------|---------------------------|-----------|-----------|------------|
|             |             |           | 0 minutes                 | 2 minutes | 5 minutes | 10 minutes |
| 100%        | 120         | - 30      | 7.32                      | 7.29      | 7.24      | 7.21       |
|             |             | - 20      | 9.16                      | 9.17      | 9.15      | 9.13       |
|             |             | - 10      | 9.12                      | 9.28      | 9.42      | 9.57       |
|             |             | 0         | 6.09                      | 6.02      | 5.99      | 6.01       |
|             |             | + 10      | 1.80                      | 2.25      | 2.49      | 2.70       |
|             |             | + 20      | -2.50                     | -2.35     | -2.22     | -2.12      |
|             |             | + 30      | -4.19                     | -4.04     | -3.89     | -3.75      |
|             |             | + 40      | -7.97                     | -7.88     | -7.80     | -7.71      |
|             |             | + 50      | -7.68                     | -8.03     | -8.12     | -8.21      |
| 115%        | 138         | + 20      | -3.08                     | -3.59     | -3.85     | -4.08      |
| 85%         | 102         | + 20      | -4.32                     | -4.48     | -4.60     | -4.69      |

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} × 10<sup>6</sup>.

### A.7 Radiated Spurious Emissions Test Result

|           |                                                                                                                                                                                     |               |                      |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen            |
| Test Date | 2025-12-22                                                                                                                                                                          | Test Mode     | 802.11a - Channel 36 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                      |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9831.50         | 33.82                | 14.14         | 47.96                  | 68.20          | -20.24      | Peak     | Horizontal   |
|      | 11511.10        | 31.24                | 18.11         | 49.35                  | 74.00          | -24.65      | Peak     | Horizontal   |
| *    | 16726.70        | 30.96                | 22.32         | 53.28                  | 68.20          | -14.92      | Peak     | Horizontal   |
|      | 18000.00        | 12.54                | 31.72         | 44.26                  | 54.00          | -9.74       | Average  | Horizontal   |
|      | 18000.00        | 27.75                | 31.72         | 59.47                  | 74.00          | -14.53      | Peak     | Horizontal   |
|      | 12218.30        | 31.40                | 18.31         | 49.71                  | 74.00          | -24.29      | Peak     | Vertical     |
| *    | 14149.50        | 29.07                | 21.80         | 50.87                  | 68.20          | -17.33      | Peak     | Vertical     |
| *    | 16901.80        | 27.57                | 22.63         | 50.20                  | 68.20          | -18.00      | Peak     | Vertical     |
|      | 18000.00        | 12.39                | 31.72         | 44.11                  | 54.00          | -9.89       | Average  | Vertical     |
|      | 18000.00        | 27.41                | 31.72         | 59.13                  | 74.00          | -14.87      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                      |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen            |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11a - Channel 44 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                      |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 11421.00        | 31.91                | 18.16         | 50.07                  | 74.00          | -23.93      | Peak     | Horizontal   |
| *    | 14460.60        | 31.20                | 22.16         | 53.36                  | 68.20          | -14.84      | Peak     | Horizontal   |
| *    | 17199.30        | 31.45                | 23.29         | 54.74                  | 68.20          | -13.46      | Peak     | Horizontal   |
|      | 18000.00        | 12.80                | 31.72         | 44.52                  | 54.00          | -9.48       | Average  | Horizontal   |
|      | 18000.00        | 29.09                | 31.72         | 60.81                  | 74.00          | -13.19      | Peak     | Horizontal   |
|      | 11579.10        | 30.83                | 18.10         | 48.93                  | 74.00          | -25.07      | Peak     | Vertical     |
| *    | 14186.90        | 31.44                | 22.15         | 53.59                  | 68.20          | -14.61      | Peak     | Vertical     |
| *    | 17229.90        | 31.03                | 23.42         | 54.45                  | 68.20          | -13.75      | Peak     | Vertical     |
|      | 18000.00        | 12.57                | 31.72         | 44.29                  | 54.00          | -9.71       | Average  | Vertical     |
|      | 18000.00        | 27.96                | 31.72         | 59.68                  | 74.00          | -14.32      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                      |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen            |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11a - Channel 48 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                      |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10516.60        | 32.01                | 15.85         | 47.86                  | 68.20          | -20.34      | Peak     | Horizontal   |
|      | 11538.30        | 31.10                | 18.04         | 49.14                  | 74.00          | -24.86      | Peak     | Horizontal   |
| *    | 17326.80        | 31.00                | 23.85         | 54.85                  | 68.20          | -13.35      | Peak     | Horizontal   |
|      | 18000.00        | 12.69                | 31.72         | 44.41                  | 54.00          | -9.59       | Average  | Horizontal   |
|      | 18000.00        | 28.55                | 31.72         | 60.27                  | 74.00          | -13.73      | Peak     | Horizontal   |
| *    | 10105.20        | 31.99                | 14.27         | 46.26                  | 68.20          | -21.94      | Peak     | Vertical     |
|      | 11592.70        | 31.01                | 18.08         | 49.09                  | 74.00          | -24.91      | Peak     | Vertical     |
| *    | 16891.60        | 29.89                | 22.58         | 52.47                  | 68.20          | -15.73      | Peak     | Vertical     |
|      | 17853.80        | 14.61                | 29.82         | 44.43                  | 54.00          | -9.57       | Average  | Vertical     |
|      | 17853.80        | 29.78                | 29.82         | 59.60                  | 74.00          | -14.40      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                       |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen             |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11a - Channel 149 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                       |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 7660.60         | 36.60                | 10.65         | 47.25                  | 74.00          | -26.75      | Peak     | Horizontal   |
| *    | 9806.00         | 32.97                | 14.21         | 47.18                  | 68.20          | -21.02      | Peak     | Horizontal   |
| *    | 17131.30        | 30.62                | 22.46         | 53.08                  | 68.20          | -15.12      | Peak     | Horizontal   |
|      | 17991.50        | 13.84                | 30.44         | 44.28                  | 54.00          | -9.72       | Average  | Horizontal   |
|      | 17991.50        | 30.07                | 30.44         | 60.51                  | 74.00          | -13.49      | Peak     | Horizontal   |
| *    | 10142.60        | 32.74                | 14.40         | 47.14                  | 68.20          | -21.06      | Peak     | Vertical     |
|      | 11424.40        | 30.96                | 18.17         | 49.13                  | 74.00          | -24.87      | Peak     | Vertical     |
| *    | 17110.90        | 31.58                | 22.51         | 54.09                  | 68.20          | -14.11      | Peak     | Vertical     |
|      | 17996.60        | 13.21                | 31.21         | 44.42                  | 54.00          | -9.58       | Average  | Vertical     |
|      | 17996.60        | 29.55                | 31.21         | 60.76                  | 74.00          | -13.24      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                       |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen             |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11a - Channel 157 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                       |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 7713.30         | 38.37                | 10.81         | 49.18                  | 74.00          | -24.82      | Peak     | Horizontal   |
| *    | 10276.90        | 29.43                | 15.24         | 44.67                  | 68.20          | -23.53      | Peak     | Horizontal   |
| *    | 14583.00        | 31.23                | 22.24         | 53.47                  | 68.20          | -14.73      | Peak     | Horizontal   |
|      | 18000.00        | 12.57                | 31.72         | 44.29                  | 54.00          | -9.71       | Average  | Horizontal   |
|      | 18000.00        | 29.05                | 31.72         | 60.77                  | 74.00          | -13.23      | Peak     | Horizontal   |
| *    | 10072.90        | 33.62                | 14.23         | 47.85                  | 68.20          | -20.35      | Peak     | Vertical     |
|      | 11441.40        | 31.25                | 17.98         | 49.23                  | 74.00          | -24.77      | Peak     | Vertical     |
| *    | 17070.10        | 30.31                | 22.47         | 52.78                  | 68.20          | -15.42      | Peak     | Vertical     |
|      | 17862.30        | 15.19                | 29.33         | 44.52                  | 54.00          | -9.48       | Average  | Vertical     |
|      | 17862.30        | 29.86                | 29.33         | 59.19                  | 74.00          | -14.81      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                       |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen             |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11a - Channel 165 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                       |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 7766.00         | 38.03                | 10.83         | 48.86                  | 68.20          | -19.34      | Peak     | Horizontal   |
|      | 11183.00        | 32.31                | 17.68         | 49.99                  | 74.00          | -24.01      | Peak     | Horizontal   |
| *    | 17211.20        | 30.99                | 23.46         | 54.45                  | 68.20          | -13.75      | Peak     | Horizontal   |
|      | 17940.50        | 13.22                | 29.72         | 42.94                  | 54.00          | -11.06      | Average  | Horizontal   |
|      | 17940.50        | 30.22                | 29.72         | 59.94                  | 74.00          | -14.06      | Peak     | Horizontal   |
|      | 11538.30        | 31.49                | 18.04         | 49.53                  | 74.00          | -24.47      | Peak     | Vertical     |
| *    | 14316.10        | 30.93                | 22.05         | 52.98                  | 68.20          | -15.22      | Peak     | Vertical     |
| *    | 17228.20        | 30.84                | 23.48         | 54.32                  | 68.20          | -13.88      | Peak     | Vertical     |
|      | 17994.90        | 13.27                | 30.95         | 44.22                  | 54.00          | -9.78       | Average  | Vertical     |
|      | 17994.90        | 29.04                | 30.95         | 59.99                  | 74.00          | -14.01      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen                   |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11ac-VHT20 - Channel 36 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9945.40         | 32.74                | 14.15         | 46.89                  | 68.20          | -21.31      | Peak     | Horizontal   |
|      | 11443.10        | 30.46                | 17.95         | 48.41                  | 74.00          | -25.59      | Peak     | Horizontal   |
| *    | 16891.60        | 30.67                | 22.58         | 53.25                  | 68.20          | -14.95      | Peak     | Horizontal   |
|      | 18000.00        | 13.16                | 31.72         | 44.88                  | 54.00          | -9.12       | Average  | Horizontal   |
|      | 18000.00        | 28.34                | 31.72         | 60.06                  | 74.00          | -13.94      | Peak     | Horizontal   |
| *    | 10157.90        | 33.73                | 14.45         | 48.18                  | 68.20          | -20.02      | Peak     | Vertical     |
|      | 11499.20        | 31.11                | 18.02         | 49.13                  | 74.00          | -24.87      | Peak     | Vertical     |
| *    | 17076.90        | 31.43                | 22.39         | 53.82                  | 68.20          | -14.38      | Peak     | Vertical     |
|      | 17998.30        | 13.27                | 31.46         | 44.73                  | 54.00          | -9.27       | Average  | Vertical     |
|      | 17998.30        | 28.96                | 31.47         | 60.43                  | 74.00          | -13.57      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen                   |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11ac-VHT20 - Channel 44 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10180.00        | 32.81                | 14.70         | 47.51                  | 68.20          | -20.69      | Peak     | Horizontal   |
|      | 11053.80        | 31.57                | 17.55         | 49.12                  | 74.00          | -24.88      | Peak     | Horizontal   |
| *    | 17297.90        | 30.08                | 23.83         | 53.91                  | 68.20          | -14.29      | Peak     | Horizontal   |
|      | 17994.90        | 13.19                | 30.95         | 44.14                  | 54.00          | -9.86       | Average  | Horizontal   |
|      | 17994.90        | 29.90                | 30.95         | 60.85                  | 74.00          | -13.15      | Peak     | Horizontal   |
|      | 11439.70        | 30.75                | 18.00         | 48.75                  | 74.00          | -25.25      | Peak     | Vertical     |
| *    | 14311.00        | 30.96                | 22.00         | 52.96                  | 68.20          | -15.24      | Peak     | Vertical     |
| *    | 17219.70        | 30.00                | 23.50         | 53.50                  | 68.20          | -14.70      | Peak     | Vertical     |
|      | 17959.20        | 13.62                | 30.53         | 44.15                  | 54.00          | -9.85       | Average  | Vertical     |
|      | 17959.20        | 29.64                | 30.53         | 60.17                  | 74.00          | -13.83      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen                   |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11ac-VHT20 - Channel 48 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9908.00         | 32.99                | 14.21         | 47.20                  | 68.20          | -21.00      | Peak     | Horizontal   |
|      | 11801.80        | 30.91                | 17.88         | 48.79                  | 74.00          | -25.21      | Peak     | Horizontal   |
| *    | 16830.40        | 30.30                | 22.66         | 52.96                  | 68.20          | -15.24      | Peak     | Horizontal   |
|      | 18000.00        | 12.52                | 31.72         | 44.24                  | 54.00          | -9.76       | Average  | Horizontal   |
|      | 18000.00        | 27.58                | 31.72         | 59.30                  | 74.00          | -14.70      | Peak     | Horizontal   |
|      | 10843.00        | 32.96                | 17.16         | 50.12                  | 74.00          | -23.88      | Peak     | Vertical     |
| *    | 14171.60        | 30.33                | 22.43         | 52.76                  | 68.20          | -15.44      | Peak     | Vertical     |
| *    | 17326.80        | 28.34                | 23.85         | 52.19                  | 68.20          | -16.01      | Peak     | Vertical     |
|      | 18000.00        | 13.00                | 31.72         | 44.72                  | 54.00          | -9.28       | Average  | Vertical     |
|      | 18000.00        | 27.65                | 31.72         | 59.37                  | 74.00          | -14.63      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen                    |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11ac-VHT20 - Channel 149 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10355.10        | 31.88                | 15.44         | 47.32                  | 68.20          | -20.88      | Peak     | Horizontal   |
|      | 11490.70        | 31.03                | 17.92         | 48.95                  | 74.00          | -25.05      | Peak     | Horizontal   |
| *    | 17126.20        | 31.65                | 22.56         | 54.21                  | 68.20          | -13.99      | Peak     | Horizontal   |
|      | 17945.60        | 14.38                | 29.91         | 44.29                  | 54.00          | -9.71       | Average  | Horizontal   |
|      | 17945.60        | 30.46                | 29.91         | 60.37                  | 74.00          | -13.63      | Peak     | Horizontal   |
| *    | 10390.80        | 32.39                | 15.77         | 48.16                  | 68.20          | -20.04      | Peak     | Vertical     |
|      | 11487.30        | 32.11                | 17.89         | 50.00                  | 74.00          | -24.00      | Peak     | Vertical     |
| *    | 16895.00        | 30.18                | 22.59         | 52.77                  | 68.20          | -15.43      | Peak     | Vertical     |
|      | 18000.00        | 13.17                | 31.72         | 44.89                  | 54.00          | -9.11       | Average  | Vertical     |
|      | 18000.00        | 28.38                | 31.72         | 60.10                  | 74.00          | -13.90      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen                    |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11ac-VHT20 - Channel 157 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 7713.30         | 36.96                | 10.81         | 47.77                  | 74.00          | -26.23      | Peak     | Horizontal   |
| *    | 14424.90        | 30.75                | 22.32         | 53.07                  | 68.20          | -15.13      | Peak     | Horizontal   |
| *    | 17561.40        | 31.41                | 26.34         | 57.75                  | 68.20          | -10.45      | Peak     | Horizontal   |
|      | 17955.80        | 14.39                | 30.40         | 44.79                  | 54.00          | -9.21       | Average  | Horizontal   |
|      | 17955.80        | 29.15                | 30.40         | 59.55                  | 74.00          | -14.45      | Peak     | Horizontal   |
|      | 11432.90        | 30.39                | 18.07         | 48.46                  | 74.00          | -25.54      | Peak     | Vertical     |
| *    | 14545.60        | 30.30                | 22.21         | 52.51                  | 68.20          | -15.69      | Peak     | Vertical     |
| *    | 17440.70        | 30.98                | 25.05         | 56.03                  | 68.20          | -12.17      | Peak     | Vertical     |
|      | 17996.60        | 13.51                | 31.21         | 44.72                  | 54.00          | -9.28       | Average  | Vertical     |
|      | 17996.60        | 28.88                | 31.21         | 60.09                  | 74.00          | -13.91      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen                    |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11ac-VHT20 - Channel 165 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 7766.00         | 37.51                | 10.83         | 48.34                  | 68.20          | -19.86      | Peak     | Horizontal   |
|      | 11084.40        | 31.64                | 17.25         | 48.89                  | 74.00          | -25.11      | Peak     | Horizontal   |
| *    | 16850.80        | 30.41                | 22.68         | 53.09                  | 68.20          | -15.11      | Peak     | Horizontal   |
|      | 17998.30        | 13.52                | 31.46         | 44.98                  | 54.00          | -9.02       | Average  | Horizontal   |
|      | 17998.30        | 29.03                | 31.47         | 60.50                  | 74.00          | -13.50      | Peak     | Horizontal   |
| *    | 9826.40         | 33.05                | 14.14         | 47.19                  | 68.20          | -21.01      | Peak     | Vertical     |
|      | 11502.60        | 30.90                | 18.04         | 48.94                  | 74.00          | -25.06      | Peak     | Vertical     |
| *    | 17209.50        | 29.95                | 23.45         | 53.40                  | 68.20          | -14.80      | Peak     | Vertical     |
|      | 18000.00        | 13.06                | 31.72         | 44.78                  | 54.00          | -9.22       | Average  | Vertical     |
|      | 18000.00        | 28.40                | 31.72         | 60.12                  | 74.00          | -13.88      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen                   |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11ac-VHT40 - Channel 38 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9744.80         | 33.37                | 14.05         | 47.42                  | 68.20          | -20.78      | Peak     | Horizontal   |
|      | 12323.70        | 31.04                | 18.87         | 49.91                  | 74.00          | -24.09      | Peak     | Horizontal   |
| *    | 17109.20        | 31.35                | 22.49         | 53.84                  | 68.20          | -14.36      | Peak     | Horizontal   |
|      | 17952.40        | 14.33                | 30.27         | 44.60                  | 54.00          | -9.40       | Average  | Horizontal   |
|      | 17952.40        | 30.51                | 30.27         | 60.78                  | 74.00          | -13.22      | Peak     | Horizontal   |
| *    | 10324.50        | 31.59                | 15.60         | 47.19                  | 68.20          | -21.01      | Peak     | Vertical     |
|      | 11024.90        | 31.79                | 17.69         | 49.48                  | 74.00          | -24.52      | Peak     | Vertical     |
| *    | 14164.80        | 29.73                | 22.27         | 52.00                  | 68.20          | -16.20      | Peak     | Vertical     |
|      | 18000.00        | 12.77                | 31.72         | 44.49                  | 54.00          | -9.51       | Average  | Vertical     |
|      | 18000.00        | 28.72                | 31.72         | 60.44                  | 74.00          | -13.56      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen                   |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11ac-VHT40 - Channel 46 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 10025.30        | 32.79                | 14.23         | 47.02                  | 68.20          | -21.18      | Peak     | Horizontal   |
|      | 11509.40        | 30.91                | 18.10         | 49.01                  | 74.00          | -24.99      | Peak     | Horizontal   |
| *    | 16847.40        | 30.03                | 22.71         | 52.74                  | 68.20          | -15.46      | Peak     | Horizontal   |
|      | 18000.00        | 12.93                | 31.72         | 44.65                  | 54.00          | -9.35       | Average  | Horizontal   |
|      | 18000.00        | 27.10                | 31.72         | 58.82                  | 74.00          | -15.18      | Peak     | Horizontal   |
| *    | 10057.60        | 33.15                | 14.14         | 47.29                  | 68.20          | -20.91      | Peak     | Vertical     |
|      | 11710.00        | 32.28                | 17.97         | 50.25                  | 74.00          | -23.75      | Peak     | Vertical     |
| *    | 17177.20        | 31.08                | 23.04         | 54.12                  | 68.20          | -14.08      | Peak     | Vertical     |
|      | 18000.00        | 12.88                | 31.72         | 44.60                  | 54.00          | -9.40       | Average  | Vertical     |
|      | 18000.00        | 28.25                | 31.72         | 59.97                  | 74.00          | -14.03      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen                    |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11ac-VHT40 - Channel 151 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 7674.20         | 36.42                | 10.88         | 47.30                  | 74.00          | -26.70      | Peak     | Horizontal   |
| *    | 14458.90        | 31.27                | 22.21         | 53.48                  | 68.20          | -14.72      | Peak     | Horizontal   |
| *    | 17437.30        | 29.70                | 24.71         | 54.41                  | 68.20          | -13.79      | Peak     | Horizontal   |
|      | 17994.90        | 13.76                | 30.95         | 44.71                  | 54.00          | -9.29       | Average  | Horizontal   |
|      | 17994.90        | 30.46                | 30.95         | 61.41                  | 74.00          | -12.59      | Peak     | Horizontal   |
| *    | 9940.30         | 32.95                | 14.19         | 47.14                  | 68.20          | -21.06      | Peak     | Vertical     |
|      | 11453.30        | 32.01                | 17.82         | 49.83                  | 74.00          | -24.17      | Peak     | Vertical     |
| *    | 16903.50        | 30.00                | 22.65         | 52.65                  | 68.20          | -15.55      | Peak     | Vertical     |
|      | 18000.00        | 12.96                | 31.72         | 44.68                  | 54.00          | -9.32       | Average  | Vertical     |
|      | 18000.00        | 27.87                | 31.72         | 59.59                  | 74.00          | -14.41      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen                    |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11ac-VHT40 - Channel 159 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|      | 7726.90         | 37.08                | 10.68         | 47.76                  | 74.00          | -26.24      | Peak     | Horizontal   |
| *    | 14062.80        | 31.03                | 22.01         | 53.04                  | 68.20          | -15.16      | Peak     | Horizontal   |
| *    | 16954.50        | 31.24                | 22.38         | 53.62                  | 68.20          | -14.58      | Peak     | Horizontal   |
|      | 18000.00        | 12.82                | 31.72         | 44.54                  | 54.00          | -9.46       | Average  | Horizontal   |
|      | 18000.00        | 27.33                | 31.72         | 59.05                  | 74.00          | -14.95      | Peak     | Horizontal   |
| *    | 10418.00        | 32.36                | 16.11         | 48.47                  | 68.20          | -19.73      | Peak     | Vertical     |
|      | 11162.60        | 31.42                | 17.76         | 49.18                  | 74.00          | -24.82      | Peak     | Vertical     |
| *    | 17406.70        | 30.33                | 24.28         | 54.61                  | 68.20          | -13.59      | Peak     | Vertical     |
|      | 18000.00        | 12.83                | 31.72         | 44.55                  | 54.00          | -9.45       | Average  | Vertical     |
|      | 18000.00        | 27.68                | 31.72         | 59.40                  | 74.00          | -14.60      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen                   |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11ac-VHT80 - Channel 42 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                             |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| *    | 9874.00         | 33.35                | 14.15         | 47.50                  | 68.20          | -20.70      | Peak     | Horizontal   |
|      | 11060.60        | 31.82                | 17.43         | 49.25                  | 74.00          | -24.75      | Peak     | Horizontal   |
| *    | 17201.00        | 30.31                | 23.32         | 53.63                  | 68.20          | -14.57      | Peak     | Horizontal   |
|      | 18000.00        | 13.08                | 31.72         | 44.80                  | 54.00          | -9.20       | Average  | Horizontal   |
|      | 18000.00        | 27.09                | 31.72         | 58.81                  | 74.00          | -15.19      | Peak     | Horizontal   |
| *    | 9906.30         | 33.69                | 14.21         | 47.90                  | 68.20          | -20.30      | Peak     | Vertical     |
|      | 11038.50        | 31.79                | 17.76         | 49.55                  | 74.00          | -24.45      | Peak     | Vertical     |
| *    | 17110.90        | 30.14                | 22.51         | 52.65                  | 68.20          | -15.55      | Peak     | Vertical     |
|      | 17994.90        | 13.78                | 30.95         | 44.73                  | 54.00          | -9.27       | Average  | Vertical     |
|      | 17994.90        | 30.04                | 30.95         | 60.99                  | 74.00          | -13.01      | Peak     | Vertical     |

Note 1: “\*” is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)


Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------|
| Test Site | WZ-AC2                                                                                                                                                                              | Test Engineer | Dick Shen                    |
| Test Date | 2025-12-26                                                                                                                                                                          | Test Mode     | 802.11ac-VHT80 - Channel 155 |
| Remark    | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                              |

| Mark                                                                                                                                                                                                | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
|                                                                                                                                                                                                     | 7699.70         | 36.89                | 10.99         | 47.88                  | 74.00          | -26.12      | Peak     | Horizontal   |
| *                                                                                                                                                                                                   | 9943.70         | 32.92                | 14.16         | 47.08                  | 68.20          | -21.12      | Peak     | Horizontal   |
| *                                                                                                                                                                                                   | 14877.10        | 32.17                | 21.14         | 53.31                  | 68.20          | -14.89      | Peak     | Horizontal   |
|                                                                                                                                                                                                     | 17998.30        | 12.66                | 31.46         | 44.12                  | 54.00          | -9.88       | Average  | Horizontal   |
|                                                                                                                                                                                                     | 17998.30        | 28.66                | 31.47         | 60.13                  | 74.00          | -13.87      | Peak     | Horizontal   |
| *                                                                                                                                                                                                   | 10355.10        | 31.55                | 15.44         | 46.99                  | 68.20          | -21.21      | Peak     | Vertical     |
|                                                                                                                                                                                                     | 11793.30        | 31.25                | 17.83         | 49.08                  | 74.00          | -24.92      | Peak     | Vertical     |
| *                                                                                                                                                                                                   | 17024.20        | 30.56                | 22.14         | 52.70                  | 68.20          | -15.50      | Peak     | Vertical     |
|                                                                                                                                                                                                     | 17843.60        | 12.59                | 29.93         | 42.52                  | 54.00          | -11.48      | Average  | Vertical     |
|                                                                                                                                                                                                     | 17843.60        | 30.02                | 29.93         | 59.95                  | 74.00          | -14.05      | Peak     | Vertical     |
| Note 1: “*” is not in restricted band<br>Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)<br>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB) |                 |                      |               |                        |                |             |          |              |

### The Result of Radiated Emission below 30 MHz:

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-12-24 |
| Temperature  | 25.0 °C                         | Humidity      | 34.7%      |
| Limit        | FCC_Part 15.209_RSE             | Test Engineer | Jerry Lu   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Coaxial    |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

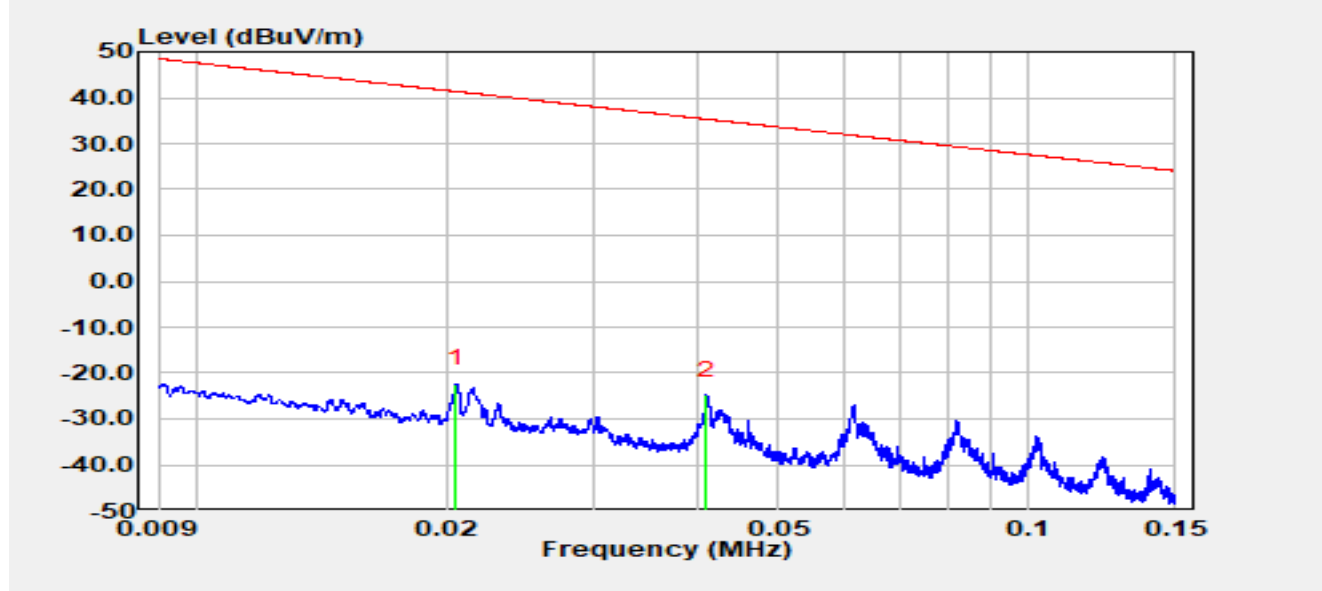


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 0.02            | 38.34          | -60.76     | -22.43               | -63.77      | 41.35          | Peak     |
| 2  | *    | 0.04            | 36.18          | -60.97     | -24.79               | -60.13      | 35.34          | Peak     |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) +  $40 \times \log(d1/d2)$  (dB),  $d1 = 3$  m,  $d2 = 300$  m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-12-24 |
| Temperature  | 25.0 °C                         | Humidity      | 34.7%      |
| Limit        | FCC_Part 15.209_RSE             | Test Engineer | Jerry Lu   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Coplanar   |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

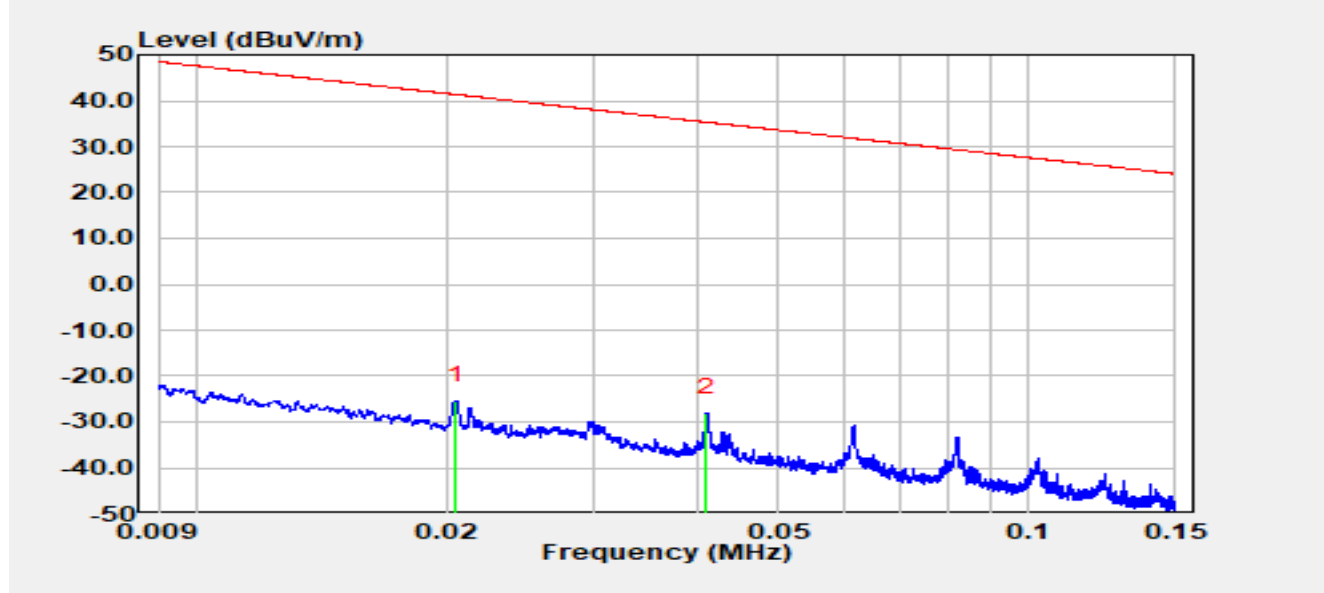


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 0.02            | 35.41          | -60.76     | -25.35               | -66.69      | 41.35          | Peak     |
| 2  | *    | 0.04            | 32.88          | -60.97     | -28.08               | -63.42      | 35.33          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) +  $40 \times \log(d1/d2)$  (dB),  $d1 = 3$  m,  $d2 = 300$  m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-12-24 |
| Temperature  | 25.0 °C                         | Humidity      | 34.7%      |
| Limit        | FCC_Part 15.209_RSE             | Test Engineer | Jerry Lu   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Coaxial    |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

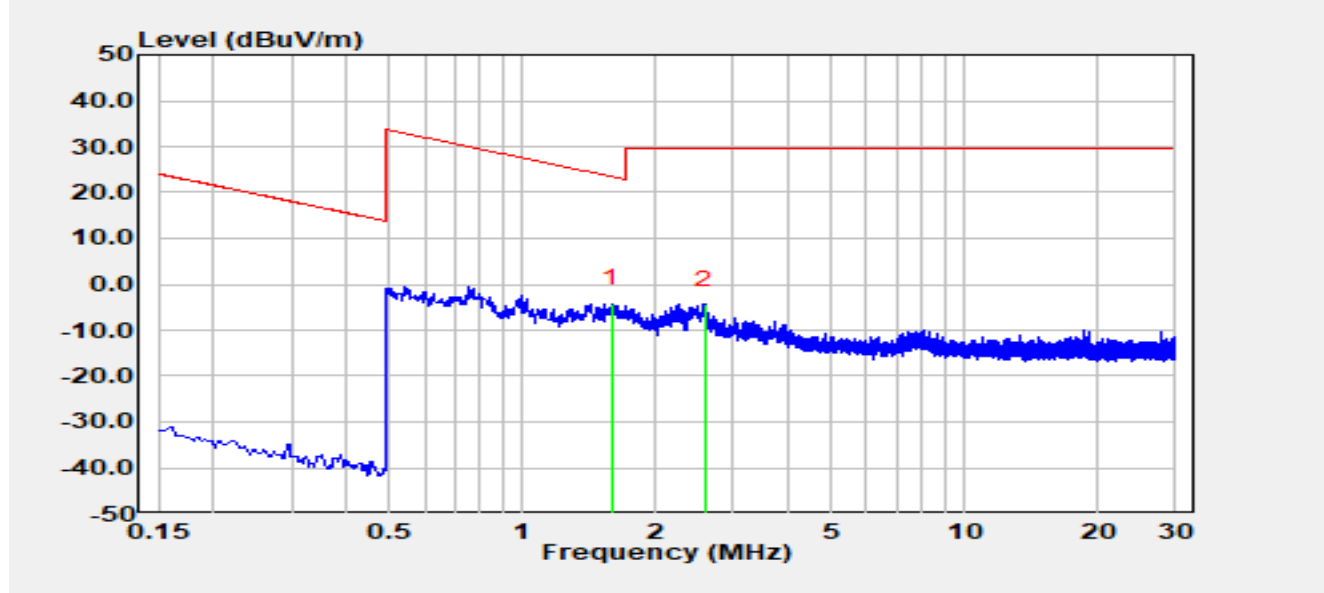


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 1.59            | 16.81          | -20.97     | -4.16                | -27.79      | 23.63          | Peak     |
| 2  |      | 2.59            | 16.46          | -20.84     | -4.38                | -33.88      | 29.50          | Peak     |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) +  $40 \times \log(d1/d2)$  (dB),  $d1 = 3$  m,  $d2 = 300$  m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-12-24 |
| Temperature  | 25.0 °C                         | Humidity      | 34.7%      |
| Limit        | FCC_Part 15.209_RSE             | Test Engineer | Jerry Lu   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Coplanar   |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

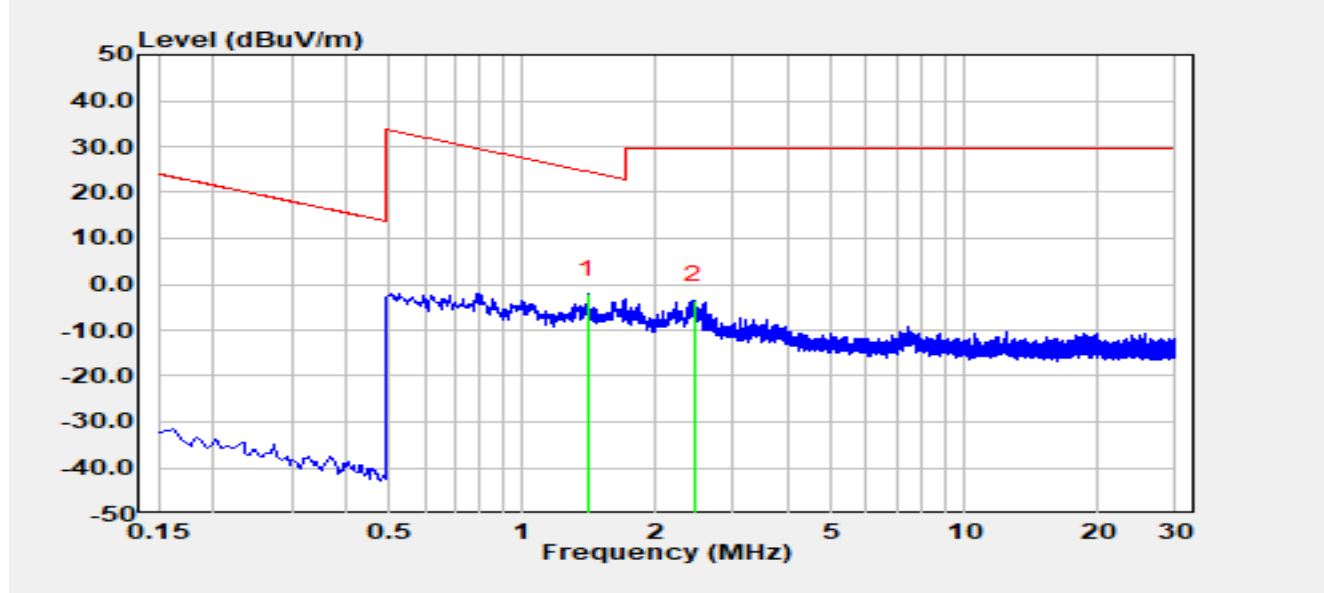


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 1.40            | 18.73          | -20.99     | -2.26                | -26.94      | 24.68          | Peak     |
| 2  |      | 2.45            | 17.36          | -20.86     | -3.50                | -33.00      | 29.50          | Peak     |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) +  $40 \times \log(d1/d2)$  (dB),  $d1 = 3$  m,  $d2 = 300$  m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### The Result of Radiated Emission below 1 GHz:

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-12-24 |
| Temperature  | 25.0 °C                         | Humidity      | 34.7%      |
| Limit        | FCC_Part 15.209_RSE (3 m)       | Test Engineer | Jerry Lu   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

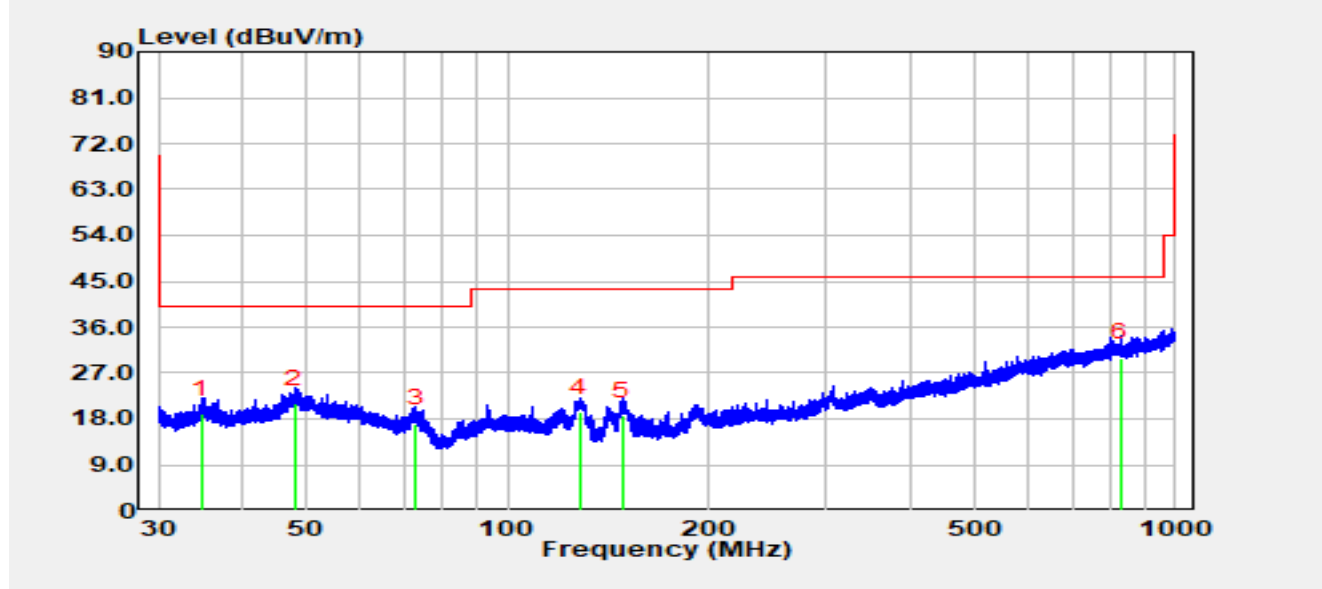


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 34.78           | 1.37           | 17.57      | 18.94                | -21.06      | 40.00          | QP       |
| 2  |      | 48.06           | 0.39           | 20.53      | 20.92                | -19.08      | 40.00          | QP       |
| 3  |      | 72.90           | 1.45           | 15.62      | 17.07                | -22.93      | 40.00          | QP       |
| 4  |      | 128.38          | 3.19           | 16.02      | 19.21                | -24.29      | 43.50          | QP       |
| 5  |      | 148.70          | 3.26           | 15.26      | 18.52                | -24.98      | 43.50          | QP       |
| 6  | *    | 827.49          | -1.14          | 31.09      | 29.95                | -16.05      | 46.00          | QP       |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-12-24 |
| Temperature  | 25.0 °C                         | Humidity      | 34.7%      |
| Limit        | FCC_Part 15.209_RSE (3 m)       | Test Engineer | Jerry Lu   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

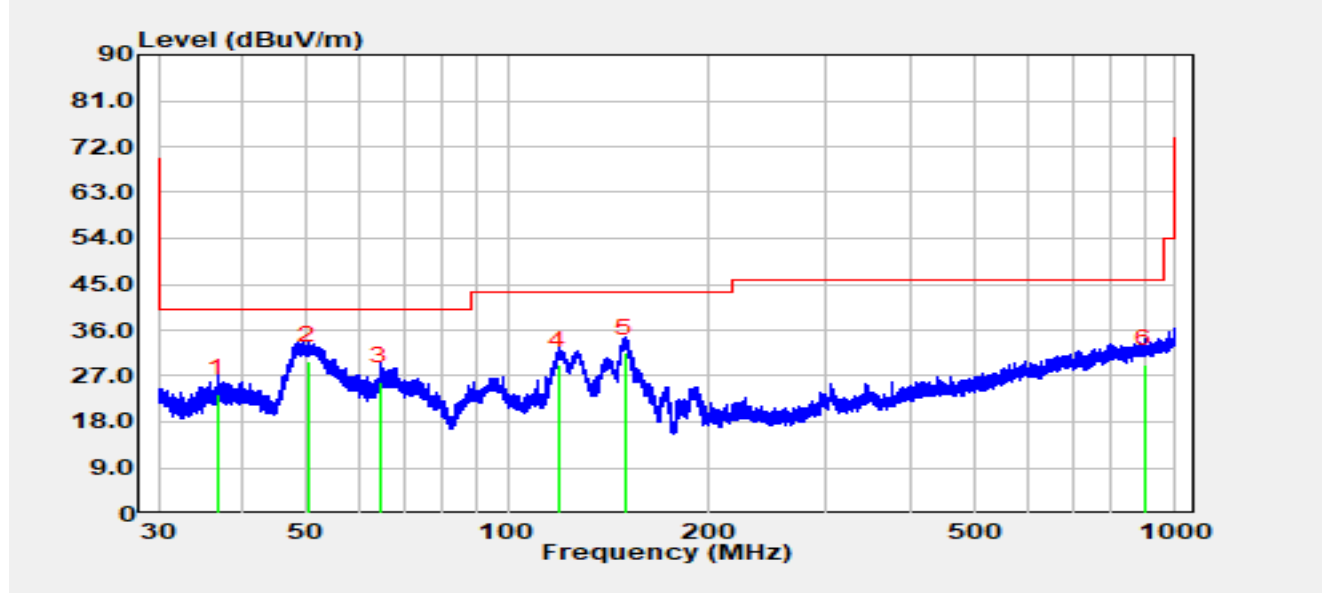


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 36.78           | 5.22           | 18.31      | 23.53                | -16.47      | 40.00          | QP       |
| 2  | *    | 50.18           | 9.47           | 20.54      | 30.01                | -9.99       | 40.00          | QP       |
| 3  |      | 64.46           | 7.51           | 18.41      | 25.92                | -14.08      | 40.00          | QP       |
| 4  |      | 119.06          | 12.16          | 16.98      | 29.14                | -14.36      | 43.50          | QP       |
| 5  |      | 149.54          | 16.28          | 15.27      | 31.55                | -11.95      | 43.50          | QP       |
| 6  |      | 898.26          | -2.32          | 31.69      | 29.37                | -16.63      | 46.00          | QP       |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### The Result of Radiated Emission between 1 ~ 18 GHz:

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-12-26 |
| Temperature  | 20.1 °C                                | Humidity      | 39.7%      |
| Limit        | FCC_Part 15.209_RSE (3 m)              | Test Engineer | Dick Shen  |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5825 MHz |               |            |

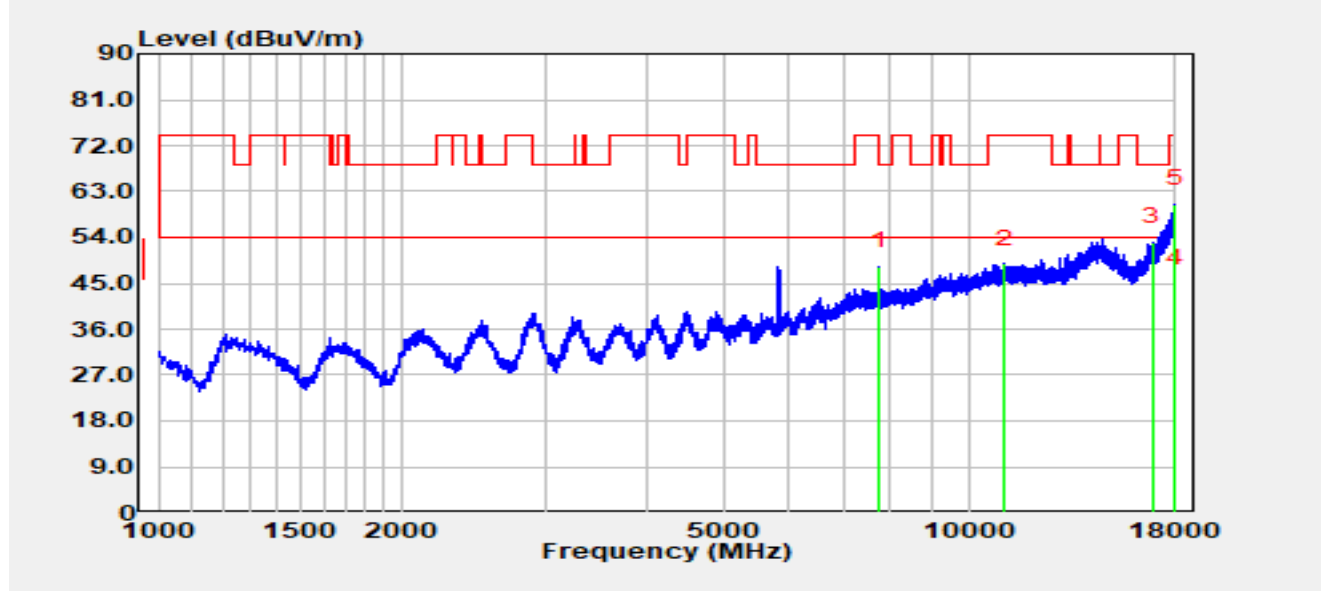


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7766.00         | 37.51          | 10.83      | 48.34                | -19.86      | 68.20          | Peak     |
| 2  |      | 11084.40        | 31.64          | 17.25      | 48.89                | -25.11      | 74.00          | Peak     |
| 3  |      | 16850.80        | 30.41          | 22.68      | 53.09                | -15.11      | 68.20          | Peak     |
| 4  | *    | 17998.30        | 13.52          | 31.46      | 44.98                | -9.02       | 54.00          | Average  |
| 5  |      | 17998.30        | 29.03          | 31.47      | 60.49                | -13.51      | 74.00          | Peak     |

#### Notes:

- "\*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC2                                 | Test Date     | 2025-12-26 |
| Temperature  | 20.1 °C                                | Humidity      | 39.7%      |
| Limit        | FCC_Part 15.209_RSE (3 m)              | Test Engineer | Dick Shen  |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5825 MHz |               |            |

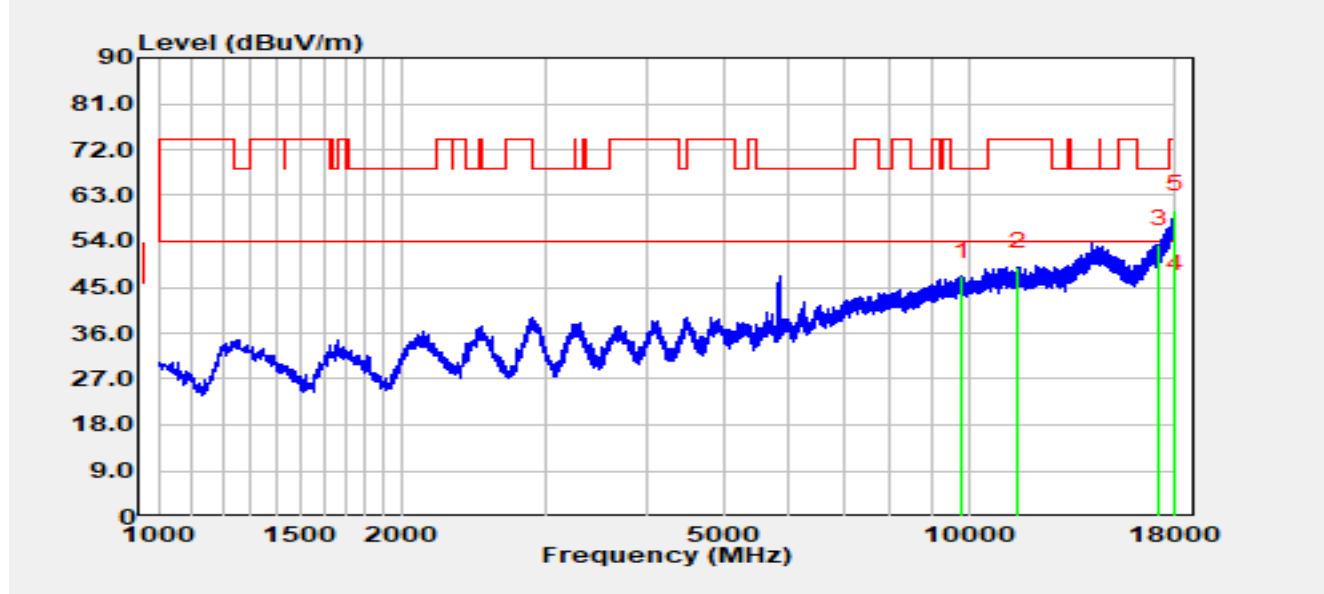


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 9826.40         | 33.05          | 14.14      | 47.19                | -21.01      | 68.20          | Peak     |
| 2  |      | 11502.60        | 30.90          | 18.04      | 48.94                | -25.06      | 74.00          | Peak     |
| 3  |      | 17209.50        | 29.95          | 23.45      | 53.40                | -14.80      | 68.20          | Peak     |
| 4  | *    | 18000.00        | 13.06          | 31.72      | 44.78                | -9.22       | 54.00          | Average  |
| 5  |      | 18000.00        | 28.40          | 31.72      | 60.13                | -13.87      | 74.00          | Peak     |

Notes:

- "\*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### The Result of Radiated Emission above 18 GHz:

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-12-26 |
| Temperature  | 20.1 °C                         | Humidity      | 39.7%      |
| Limit        | FCC_Part 15.209_RSE (3 m)       | Test Engineer | Jerry Lu   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

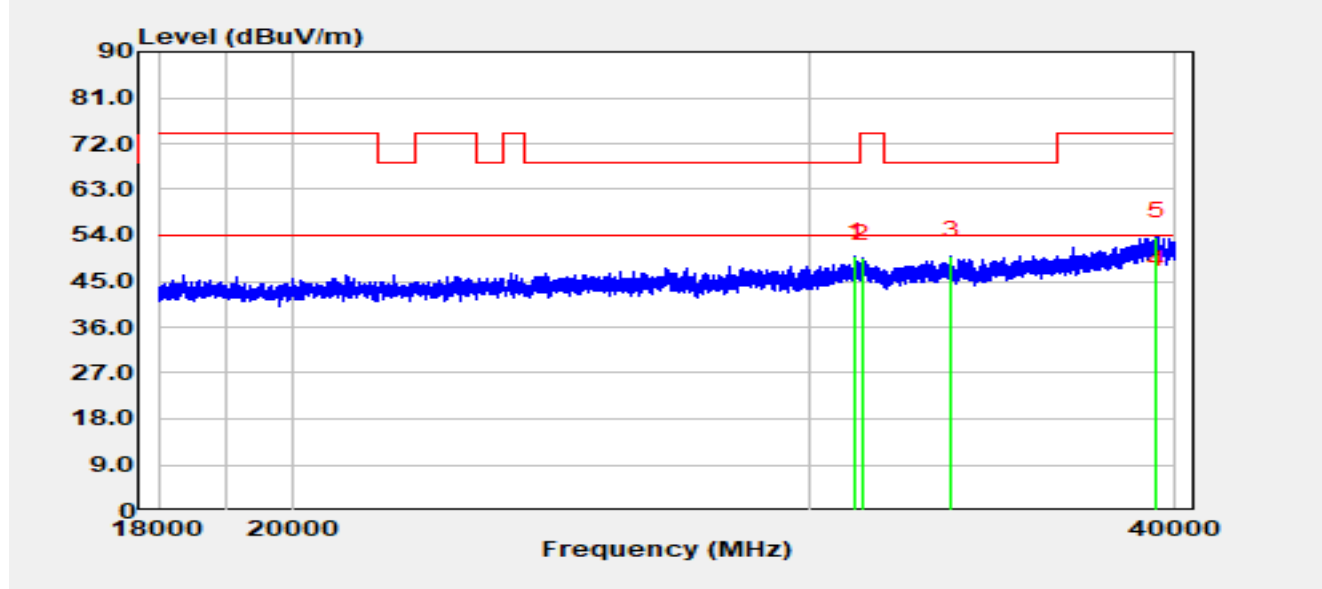


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 31127.40        | 53.70          | -3.89      | 49.81                | -18.39      | 68.20          | Peak     |
| 2  |      | 31266.00        | 53.42          | -3.95      | 49.47                | -24.53      | 74.00          | Peak     |
| 3  |      | 33529.80        | 54.38          | -4.42      | 49.95                | -18.25      | 68.20          | Peak     |
| 4  | *    | 39390.60        | 43.51          | 0.83       | 44.34                | -9.66       | 54.00          | Average  |
| 5  |      | 39390.60        | 52.94          | 0.83       | 53.77                | -20.23      | 74.00          | Peak     |

#### Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC2                          | Test Date     | 2025-12-26 |
| Temperature  | 20.1 °C                         | Humidity      | 39.7%      |
| Limit        | FCC_Part 15.209_RSE (3 m)       | Test Engineer | Jerry Lu   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

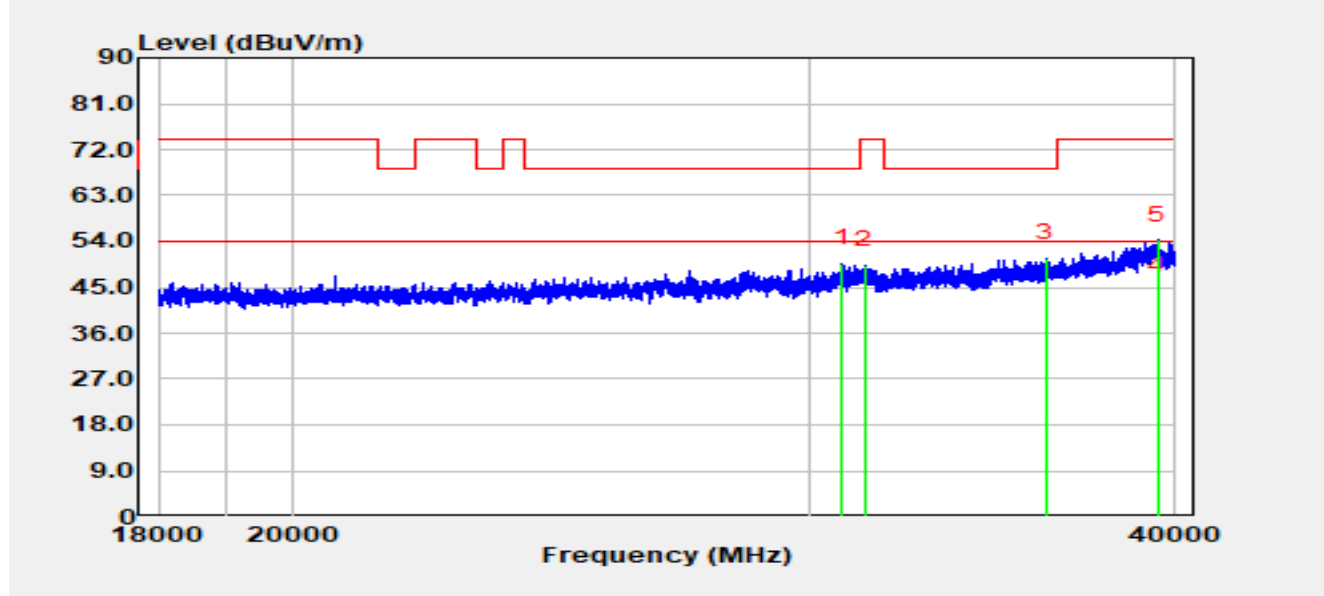


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 30779.80        | 54.22          | -4.61      | 49.61                | -18.59      | 68.20          | Peak     |
| 2  |      | 31327.60        | 53.34          | -4.07      | 49.27                | -24.73      | 74.00          | Peak     |
| 3  |      | 36132.40        | 57.00          | -6.32      | 50.69                | -17.51      | 68.20          | Peak     |
| 4  | *    | 39450.00        | 43.89          | 0.32       | 44.21                | -9.79       | 54.00          | Average  |
| 5  |      | 39450.00        | 53.95          | 0.32       | 54.28                | -19.72      | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### A.8 Radiated Restricted Band Edge Test Result

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC1                          | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                         | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

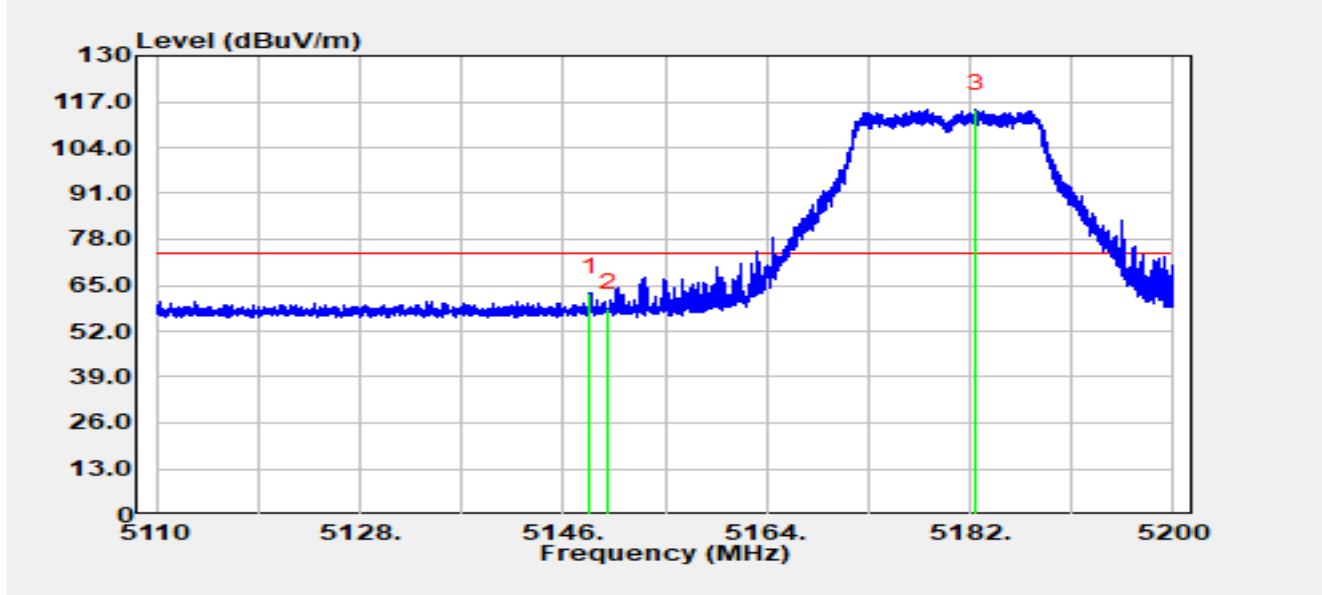


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5148.37         | 42.39          | 20.43      | 62.82                | -11.18      | 74.00          | Peak     |
| 2  |      | 5150.00         | 38.08          | 20.43      | 58.51                | -15.49      | 74.00          | Peak     |
| 3  |      | 5182.50         | 94.64          | 20.32      | 114.96               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC1                          | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                         | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

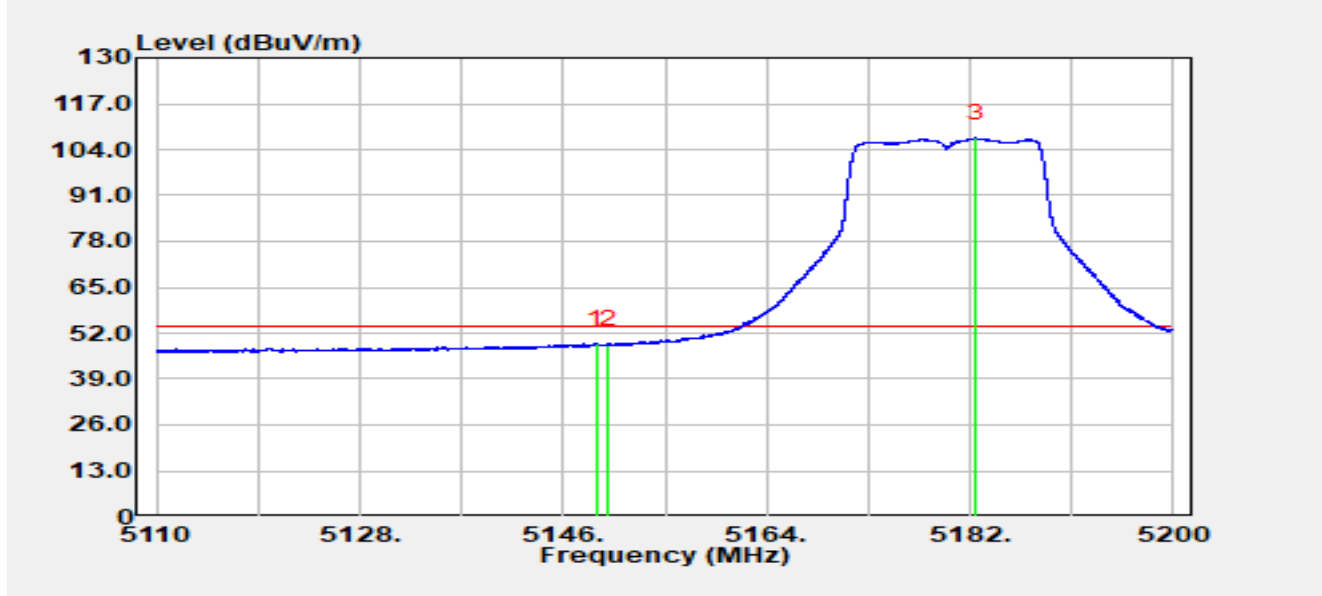


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5148.87         | 28.47          | 20.43      | 48.89                | -5.11       | 54.00          | Average  |
| 2  |      | 5150.00         | 28.37          | 20.43      | 48.80                | -5.20       | 54.00          | Average  |
| 3  |      | 5182.54         | 86.90          | 20.32      | 107.22               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC1                          | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                         | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

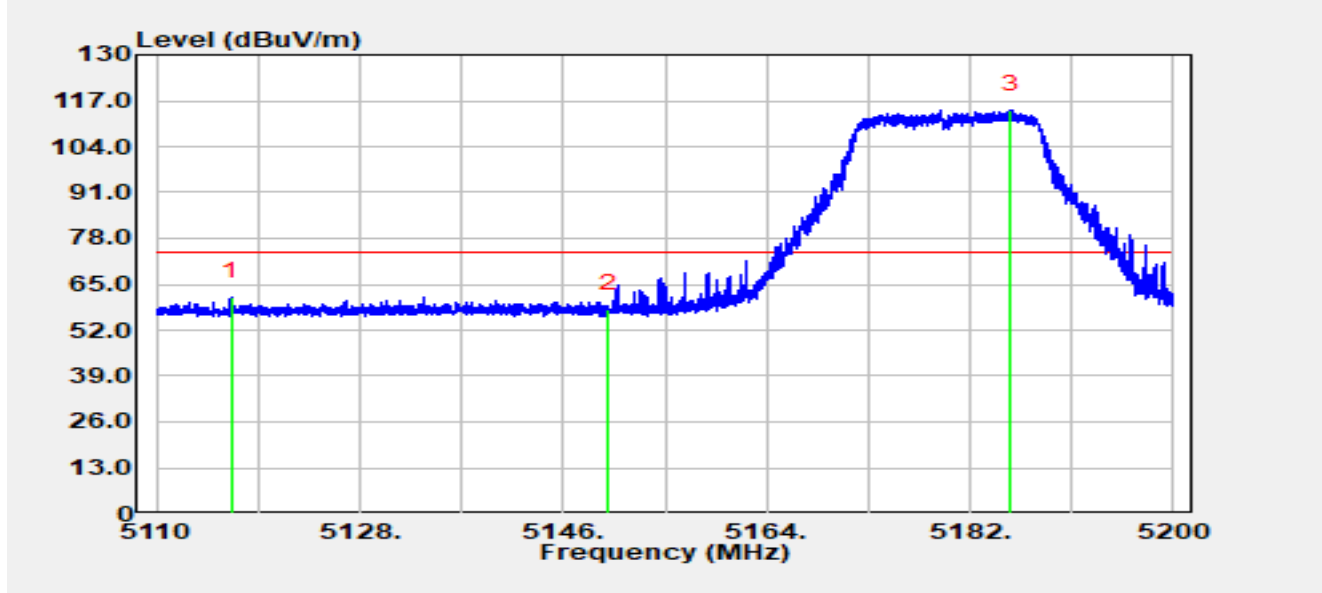


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5116.57         | 40.90          | 20.48      | 61.38                | -12.62      | 74.00          | Peak     |
| 2  |      | 5150.00         | 37.47          | 20.43      | 57.90                | -16.10      | 74.00          | Peak     |
| 3  |      | 5185.65         | 94.01          | 20.30      | 114.32               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC1                          | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                         | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                 | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

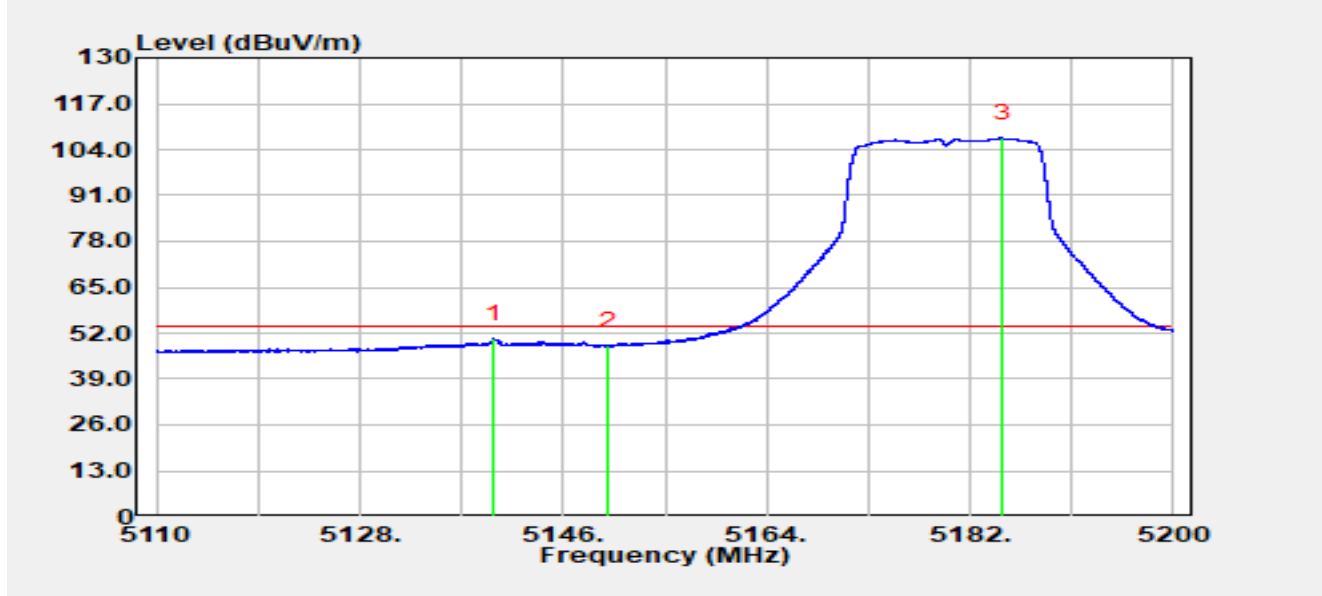


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5139.89         | 29.90          | 20.40      | 50.30                | -3.70       | 54.00          | Average  |
| 2  |      | 5150.00         | 27.98          | 20.43      | 48.41                | -5.59       | 54.00          | Average  |
| 3  |      | 5184.89         | 86.91          | 20.31      | 107.22               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC1                          | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                         | Humidity      | 29.8%      |
| Limit        | FCC_5.8G_RE (3 m)               | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11a at 5745 MHz |               |            |

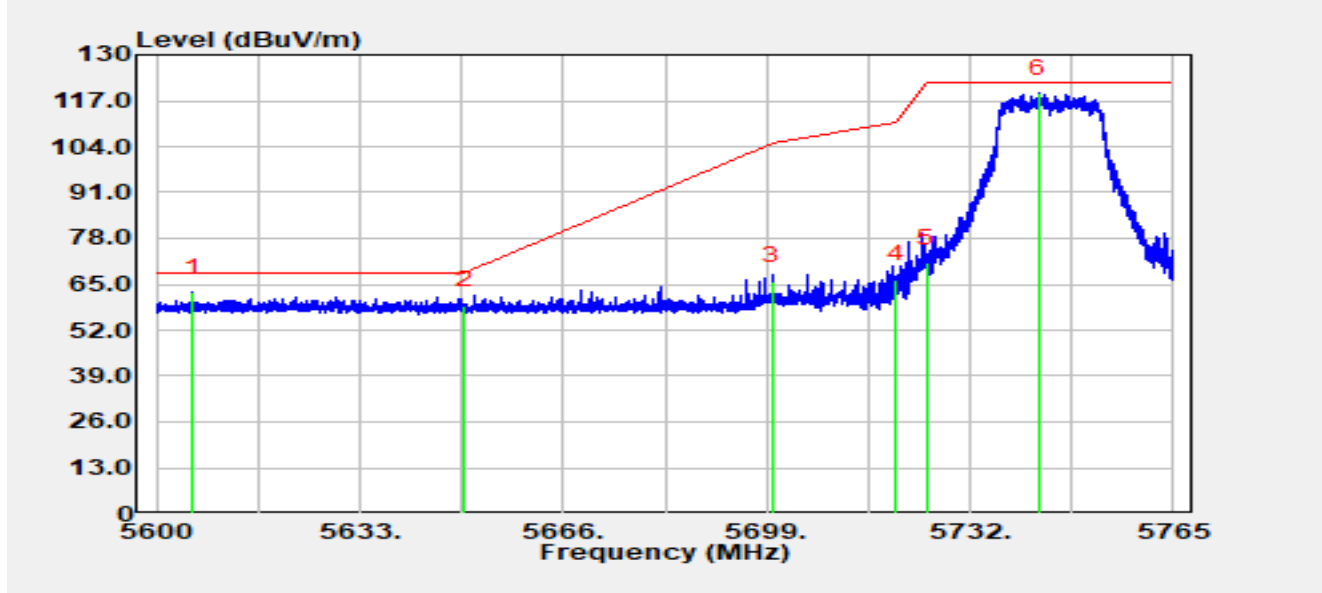


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5605.79         | 42.08          | 20.70      | 62.78                | -5.42       | 68.20          | Peak     |
| 2  |      | 5650.00         | 38.38          | 20.55      | 58.93                | -9.27       | 68.20          | Peak     |
| 3  |      | 5700.00         | 45.06          | 20.77      | 65.83                | -39.37      | 105.20         | Peak     |
| 4  |      | 5720.00         | 45.71          | 20.72      | 66.42                | -44.38      | 110.80         | Peak     |
| 5  |      | 5725.00         | 50.29          | 20.70      | 70.99                | -51.21      | 122.20         | Peak     |
| 6  |      | 5743.07         | 98.47          | 20.66      | 119.13               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC1                          | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                         | Humidity      | 29.8%      |
| Limit        | FCC_5.8G_RE (3 m)               | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11a at 5745 MHz |               |            |

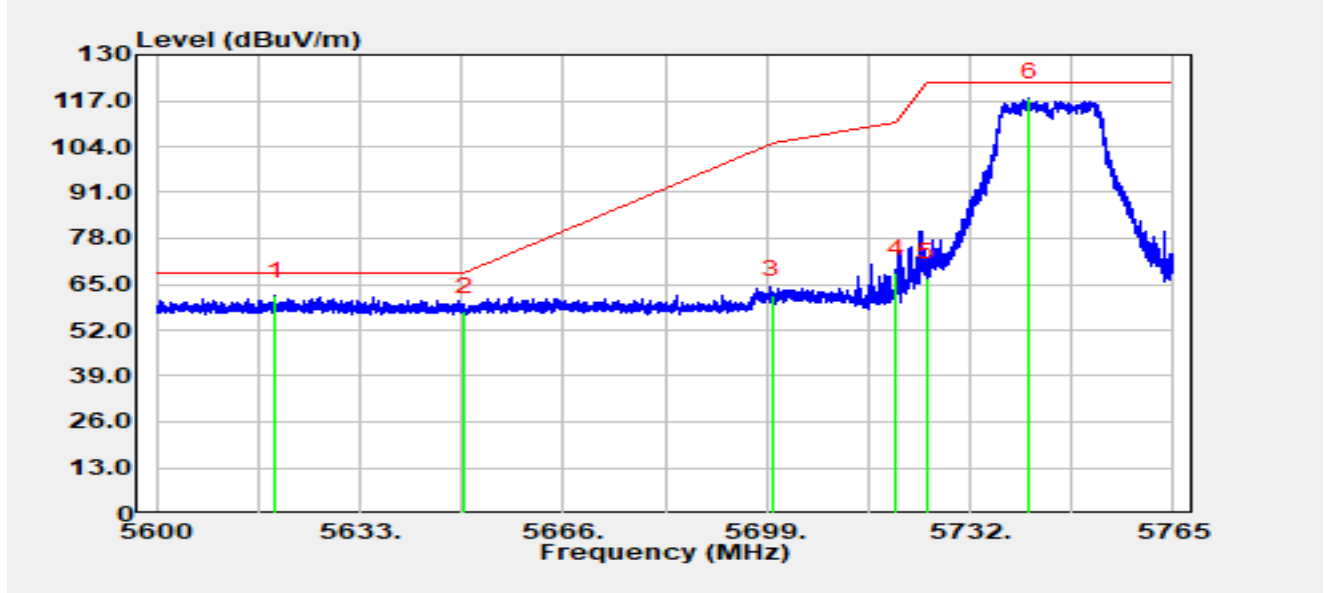


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5619.26         | 41.09          | 20.64      | 61.73                | -6.47       | 68.20          | Peak     |
| 2  |      | 5650.00         | 36.69          | 20.55      | 57.24                | -10.96      | 68.20          | Peak     |
| 3  |      | 5700.00         | 41.07          | 20.77      | 61.83                | -43.37      | 105.20         | Peak     |
| 4  |      | 5720.00         | 47.32          | 20.72      | 68.04                | -42.76      | 110.80         | Peak     |
| 5  |      | 5725.00         | 46.06          | 20.70      | 66.76                | -55.44      | 122.20         | Peak     |
| 6  |      | 5741.52         | 97.12          | 20.67      | 117.79               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC1                          | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                         | Humidity      | 29.8%      |
| Limit        | FCC_5.8G_RE (3 m)               | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11a at 5785 MHz |               |            |

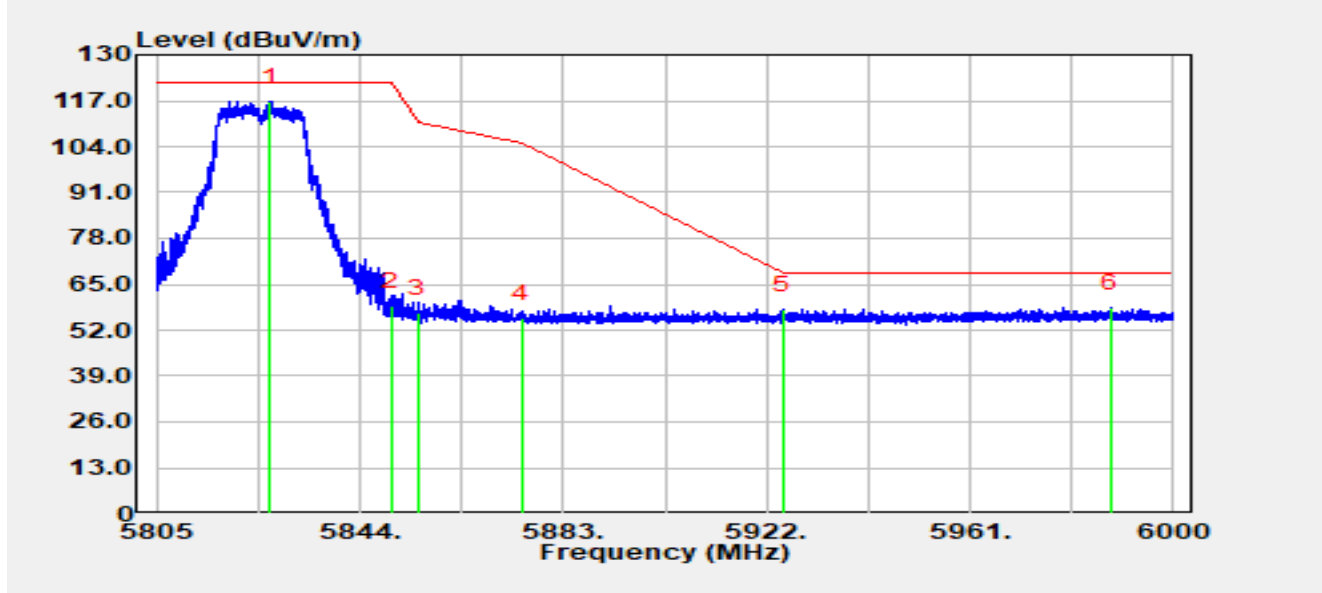


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5826.88         | 95.62          | 21.04      | 116.66               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 37.77          | 20.95      | 58.72                | -63.48      | 122.20         | Peak     |
| 3  |      | 5855.00         | 35.69          | 20.98      | 56.67                | -54.13      | 110.80         | Peak     |
| 4  |      | 5875.00         | 34.10          | 21.14      | 55.24                | -49.96      | 105.20         | Peak     |
| 5  |      | 5925.00         | 36.63          | 21.21      | 57.84                | -10.36      | 68.20          | Peak     |
| 6  | *    | 5987.95         | 36.85          | 21.48      | 58.33                | -9.87       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-AC1                          | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                         | Humidity      | 29.8%      |
| Limit        | FCC_5.8G_RE (3 m)               | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11a at 5785 MHz |               |            |

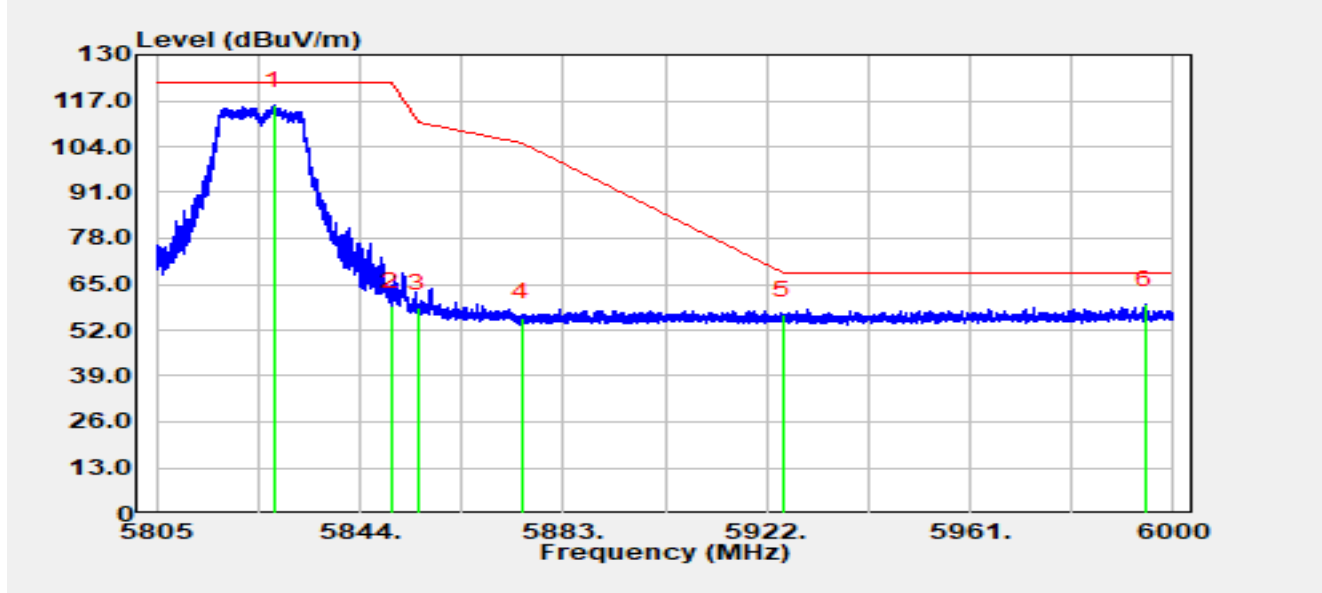


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5827.48         | 94.65          | 21.04      | 115.70               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 37.75          | 20.95      | 58.70                | -63.50      | 122.20         | Peak     |
| 3  |      | 5855.00         | 37.37          | 20.98      | 58.34                | -52.46      | 110.80         | Peak     |
| 4  |      | 5875.00         | 34.42          | 21.14      | 55.57                | -49.63      | 105.20         | Peak     |
| 5  |      | 5925.00         | 35.16          | 21.21      | 56.37                | -11.83      | 68.20          | Peak     |
| 6  | *    | 5994.50         | 37.72          | 21.50      | 59.22                | -8.98       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5180 MHz |               |            |

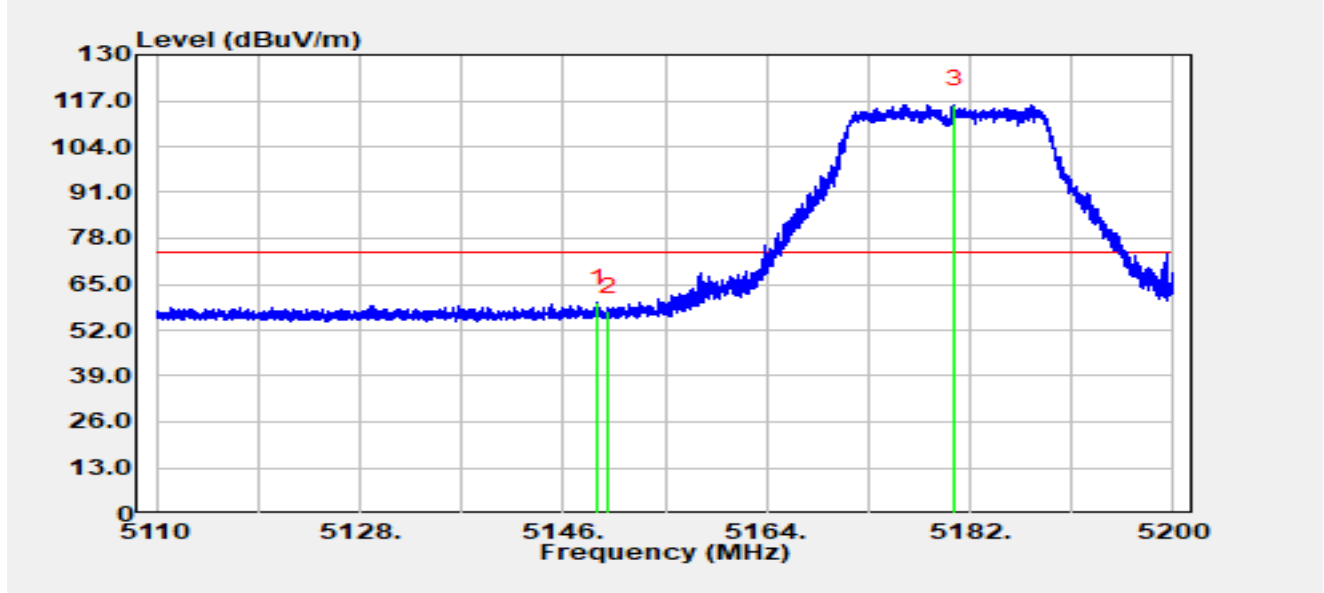


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.02         | 39.29          | 20.43      | 59.72                | -14.28      | 74.00          | Peak     |
| 2  |      | 5150.00         | 36.90          | 20.43      | 57.33                | -16.67      | 74.00          | Peak     |
| 3  |      | 5180.65         | 95.54          | 20.32      | 115.87               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5180 MHz |               |            |

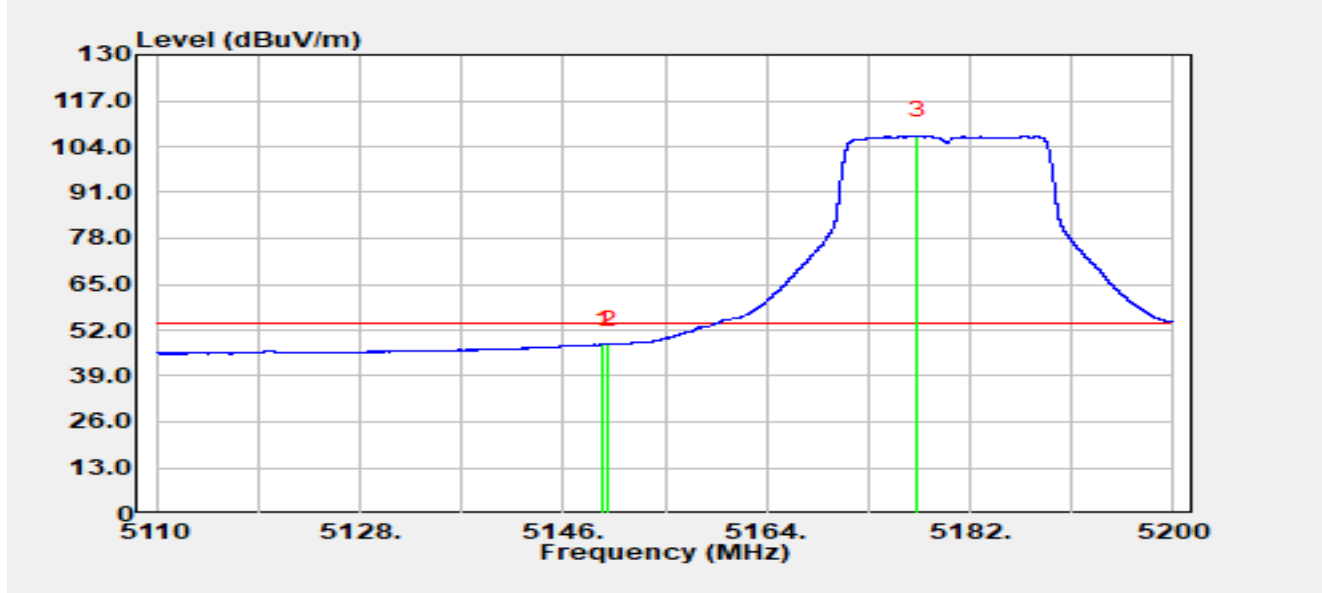


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5149.52         | 27.50          | 20.43      | 47.93                | -6.07       | 54.00          | Average  |
| 2  | *    | 5150.00         | 27.52          | 20.43      | 47.95                | -6.05       | 54.00          | Average  |
| 3  |      | 5177.37         | 86.63          | 20.34      | 106.96               | N/A         | N/A            | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5180 MHz |               |            |

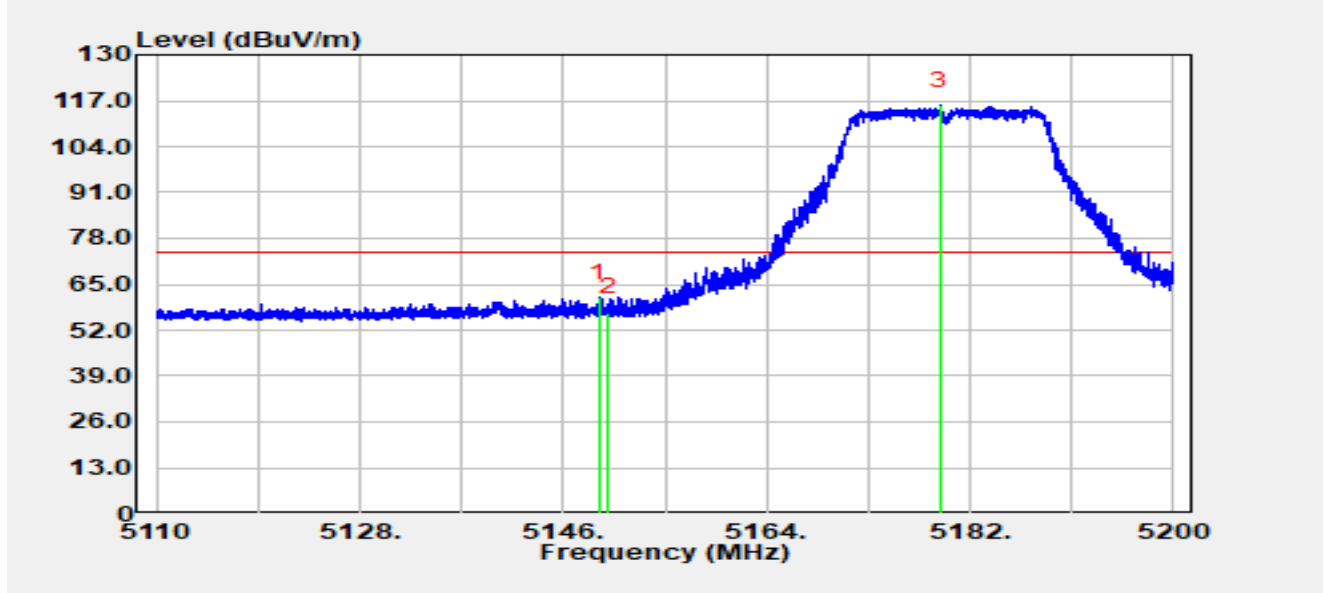


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.13         | 40.81          | 20.43      | 61.24                | -12.76      | 74.00          | Peak     |
| 2  |      | 5150.00         | 36.52          | 20.43      | 56.95                | -17.05      | 74.00          | Peak     |
| 3  |      | 5179.33         | 95.21          | 20.33      | 115.54               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5180 MHz |               |            |

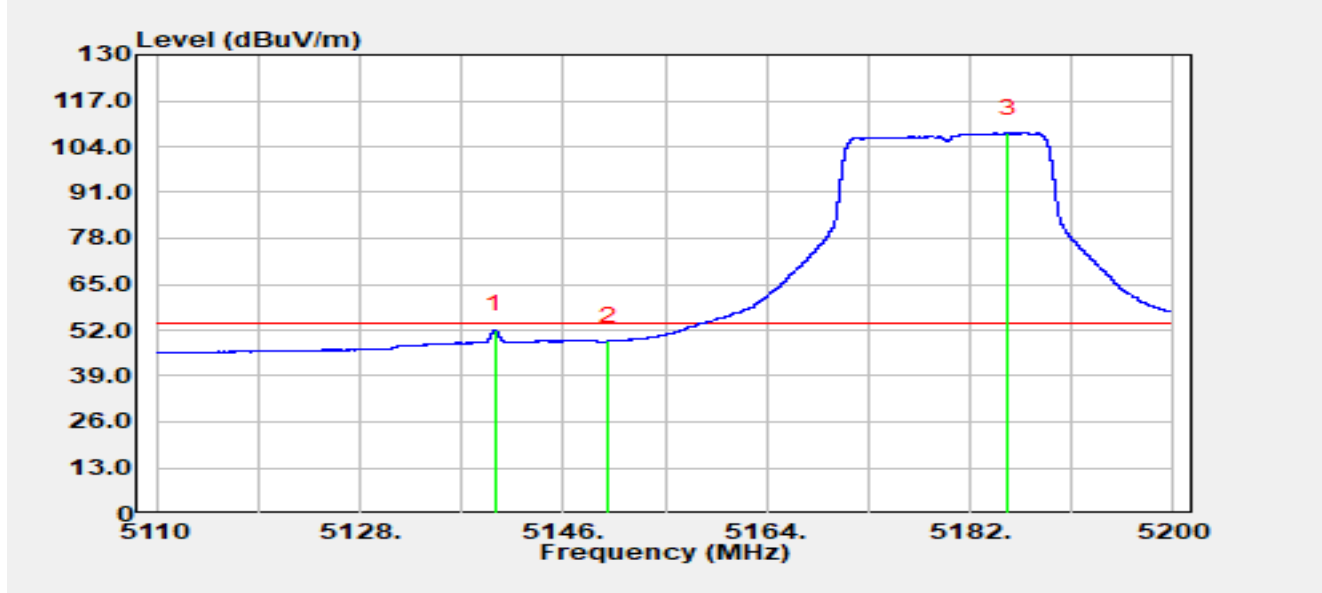


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5139.94         | 31.64          | 20.40      | 52.04                | -1.96       | 54.00          | Average  |
| 2  |      | 5150.00         | 28.46          | 20.43      | 48.89                | -5.11       | 54.00          | Average  |
| 3  |      | 5185.31         | 87.50          | 20.31      | 107.81               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5745 MHz |               |            |

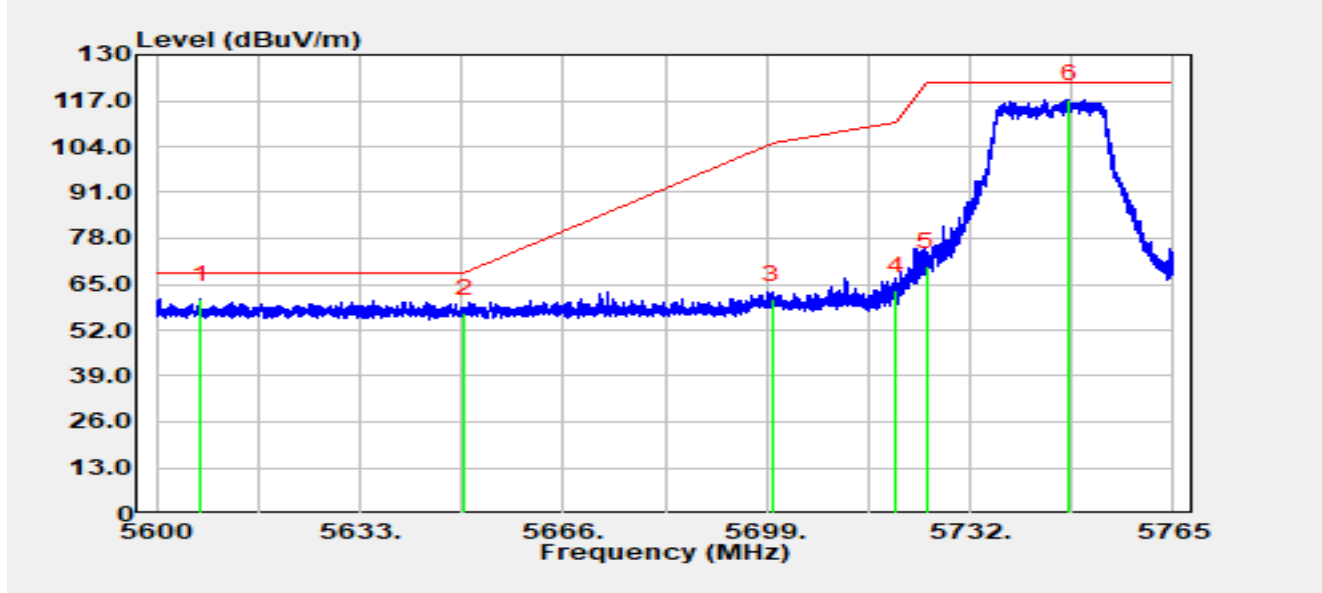


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5607.19         | 40.08          | 20.69      | 60.78                | -7.42       | 68.20          | Peak     |
| 2  |      | 5650.00         | 36.15          | 20.55      | 56.70                | -11.50      | 68.20          | Peak     |
| 3  |      | 5700.00         | 39.98          | 20.77      | 60.75                | -44.45      | 105.20         | Peak     |
| 4  |      | 5720.00         | 42.49          | 20.72      | 63.21                | -47.59      | 110.80         | Peak     |
| 5  |      | 5725.00         | 49.32          | 20.70      | 70.02                | -52.18      | 122.20         | Peak     |
| 6  |      | 5748.14         | 96.76          | 20.67      | 117.43               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5745 MHz |               |            |

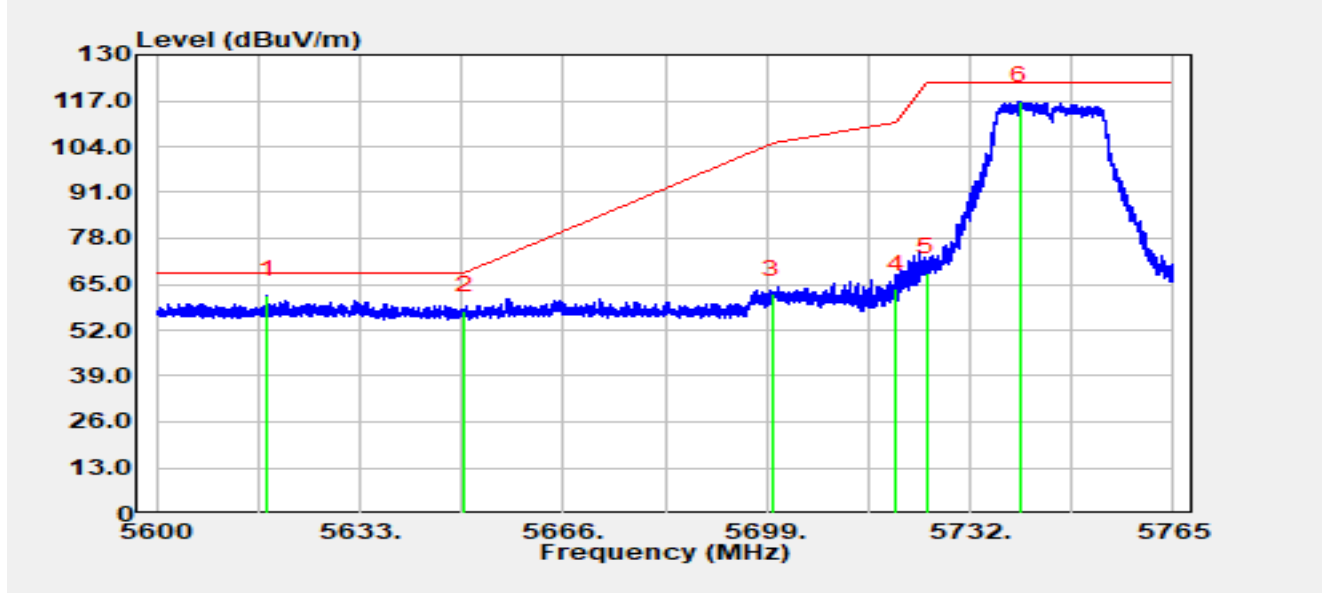


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5618.02         | 41.37          | 20.64      | 62.01                | -6.19       | 68.20          | Peak     |
| 2  |      | 5650.00         | 37.05          | 20.55      | 57.60                | -10.60      | 68.20          | Peak     |
| 3  |      | 5700.00         | 41.42          | 20.77      | 62.19                | -43.01      | 105.20         | Peak     |
| 4  |      | 5720.00         | 43.03          | 20.72      | 63.75                | -47.05      | 110.80         | Peak     |
| 5  |      | 5725.00         | 47.71          | 20.70      | 68.41                | -53.79      | 122.20         | Peak     |
| 6  |      | 5740.09         | 96.32          | 20.67      | 116.99               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5825 MHz |               |            |

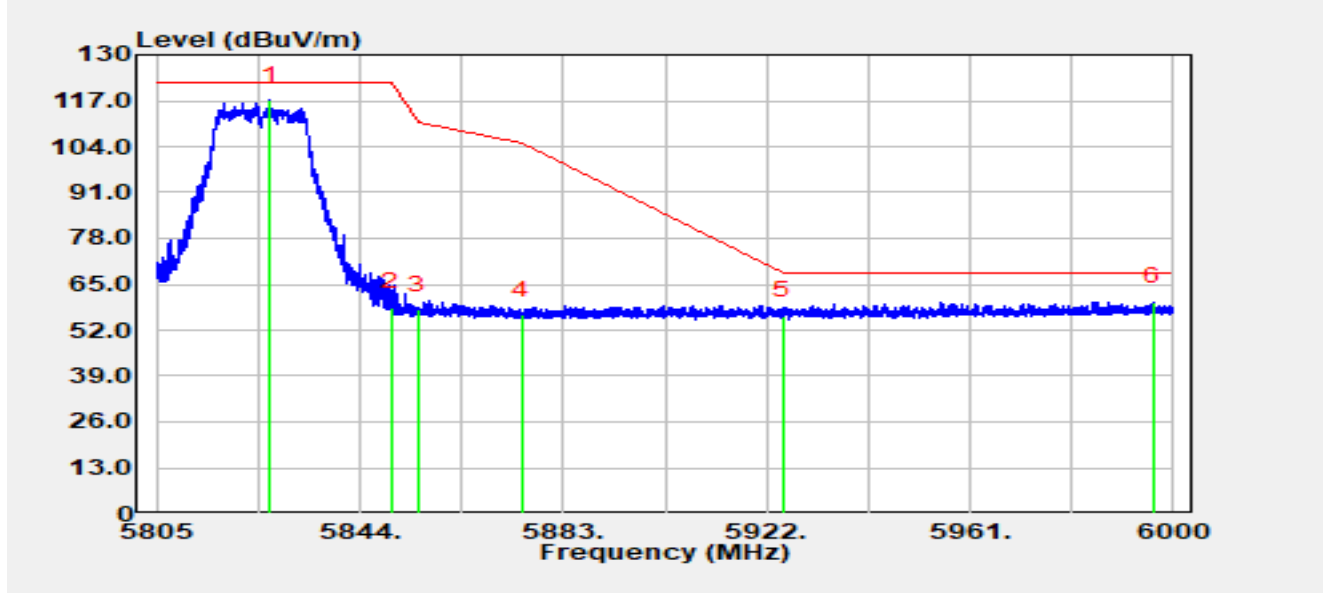


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5826.76         | 96.09          | 21.04      | 117.13               | N/A         | N/A            | Peak     |
| 2  |      | 5850.01         | 37.65          | 20.95      | 58.59                | -63.59      | 122.19         | Peak     |
| 3  |      | 5855.00         | 36.90          | 20.98      | 57.88                | -52.92      | 110.80         | Peak     |
| 4  |      | 5875.00         | 35.23          | 21.14      | 56.37                | -48.83      | 105.20         | Peak     |
| 5  |      | 5925.00         | 34.89          | 21.21      | 56.10                | -12.10      | 68.20          | Peak     |
| 6  | *    | 5996.22         | 38.52          | 21.50      | 60.02                | -8.18       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT20 at 5825 MHz |               |            |

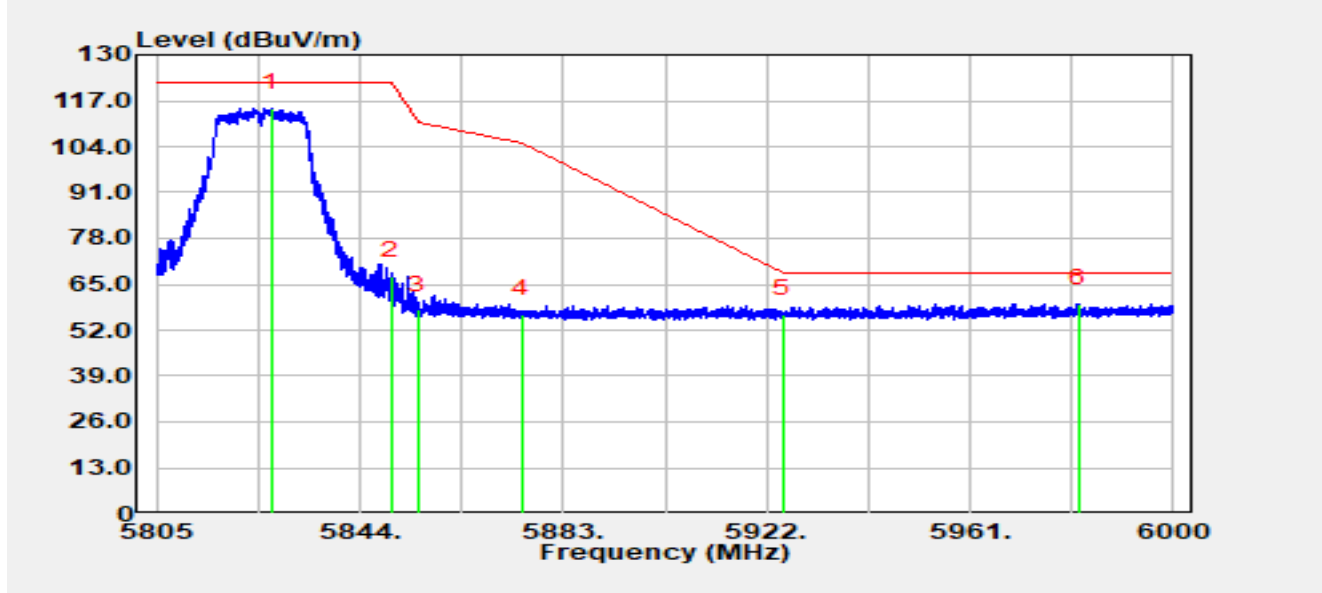


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5827.09         | 93.95          | 21.04      | 114.99               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 46.44          | 20.95      | 67.39                | -54.81      | 122.20         | Peak     |
| 3  |      | 5855.00         | 36.73          | 20.98      | 57.71                | -53.09      | 110.80         | Peak     |
| 4  |      | 5875.00         | 35.43          | 21.14      | 56.57                | -48.63      | 105.20         | Peak     |
| 5  |      | 5925.00         | 35.32          | 21.21      | 56.52                | -11.68      | 68.20          | Peak     |
| 6  | *    | 5981.69         | 38.06          | 21.47      | 59.53                | -8.67       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5190 MHz |               |            |

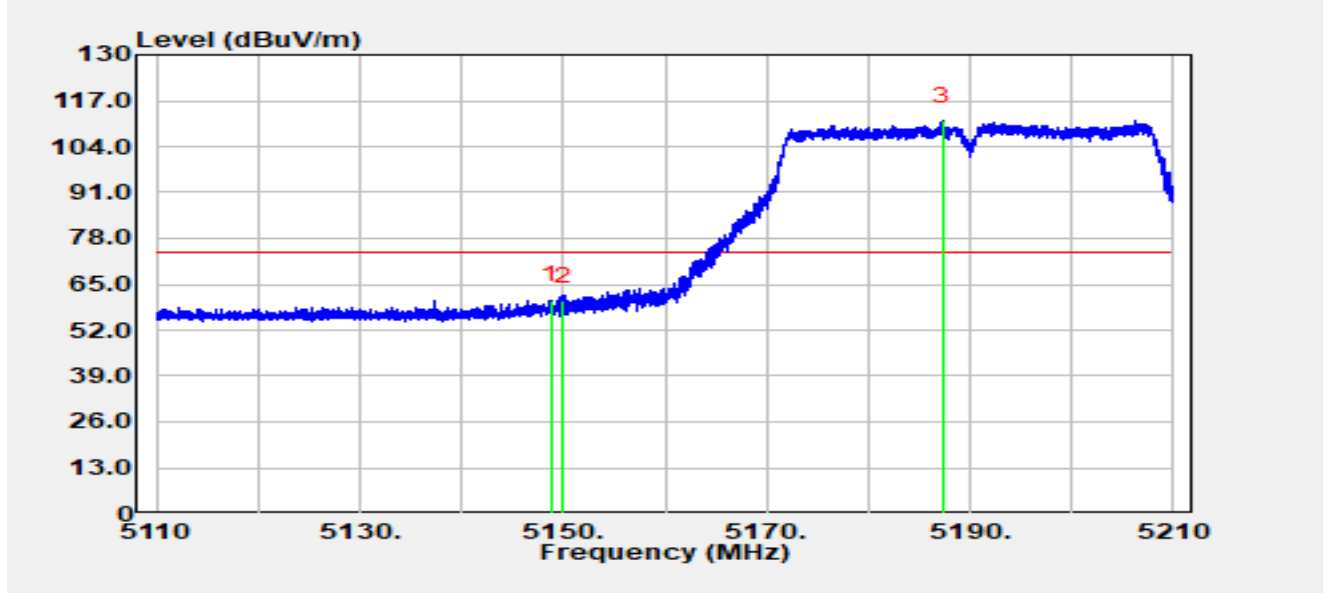


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5148.74         | 40.05          | 20.43      | 60.48                | -13.52      | 74.00          | Peak     |
| 2  |      | 5150.00         | 39.85          | 20.43      | 60.28                | -13.72      | 74.00          | Peak     |
| 3  |      | 5187.25         | 90.97          | 20.30      | 111.27               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5190 MHz |               |            |

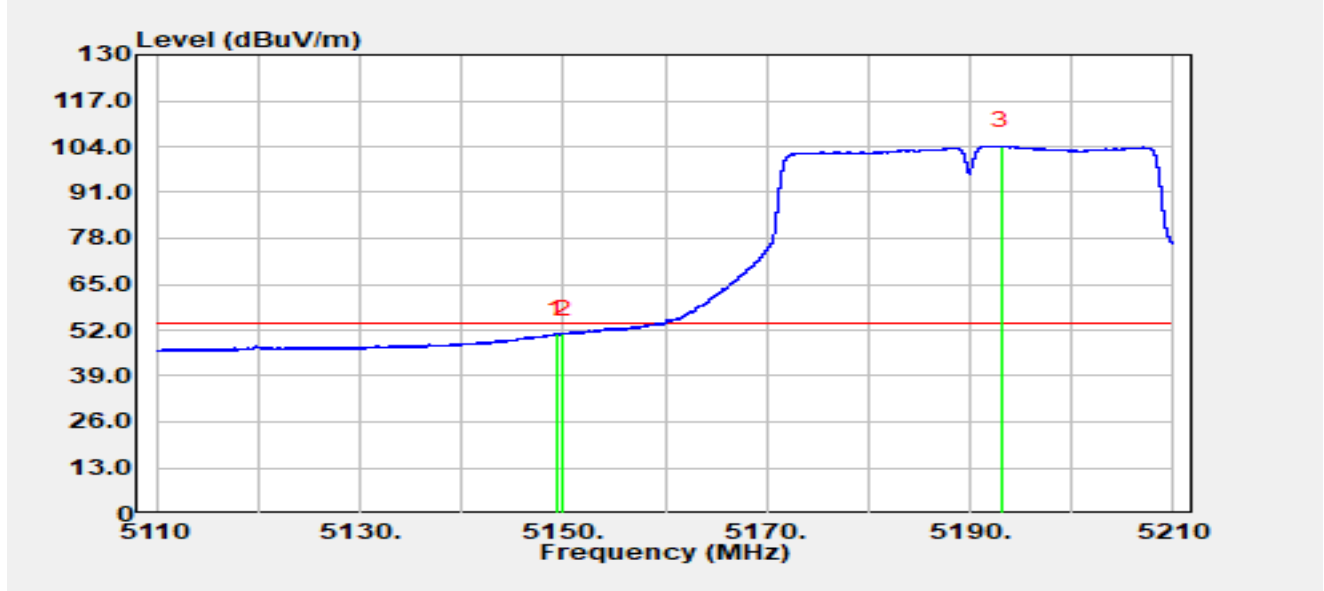


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.32         | 30.52          | 20.43      | 50.95                | -3.05       | 54.00          | Average  |
| 2  |      | 5150.00         | 30.45          | 20.43      | 50.88                | -3.12       | 54.00          | Average  |
| 3  |      | 5193.12         | 83.73          | 20.30      | 104.03               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5190 MHz |               |            |

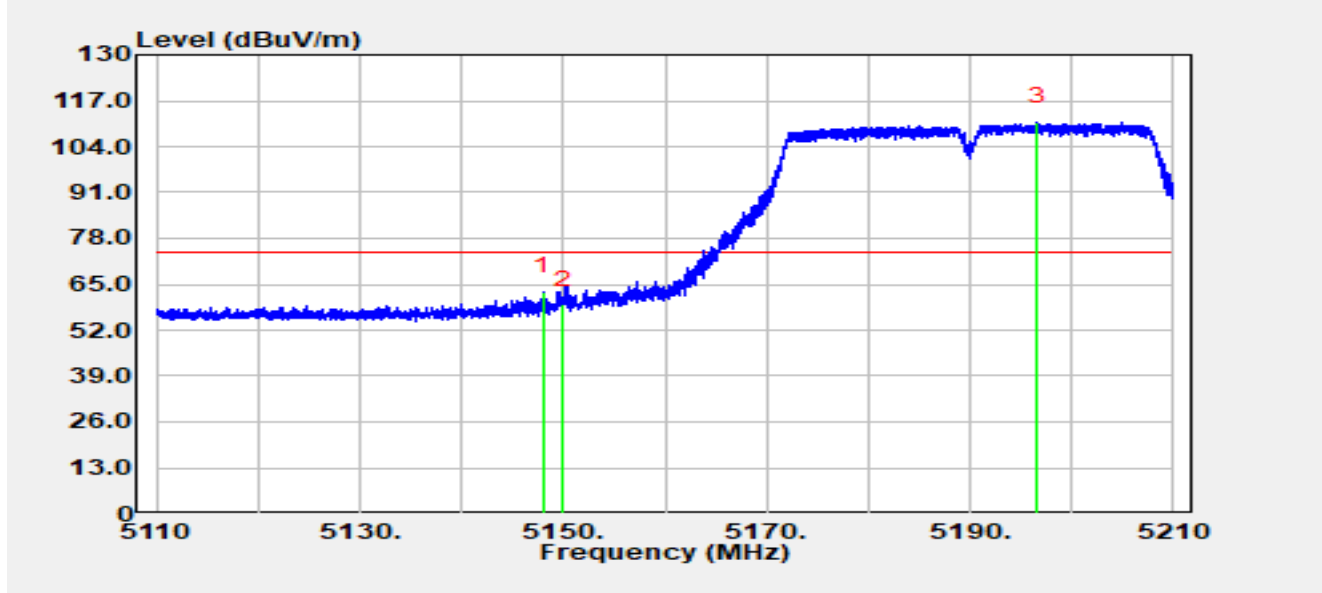


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5148.06         | 42.42          | 20.42      | 62.84                | -11.16      | 74.00          | Peak     |
| 2  |      | 5150.00         | 38.89          | 20.43      | 59.32                | -14.68      | 74.00          | Peak     |
| 3  |      | 5196.57         | 90.59          | 20.31      | 110.90               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5190 MHz |               |            |

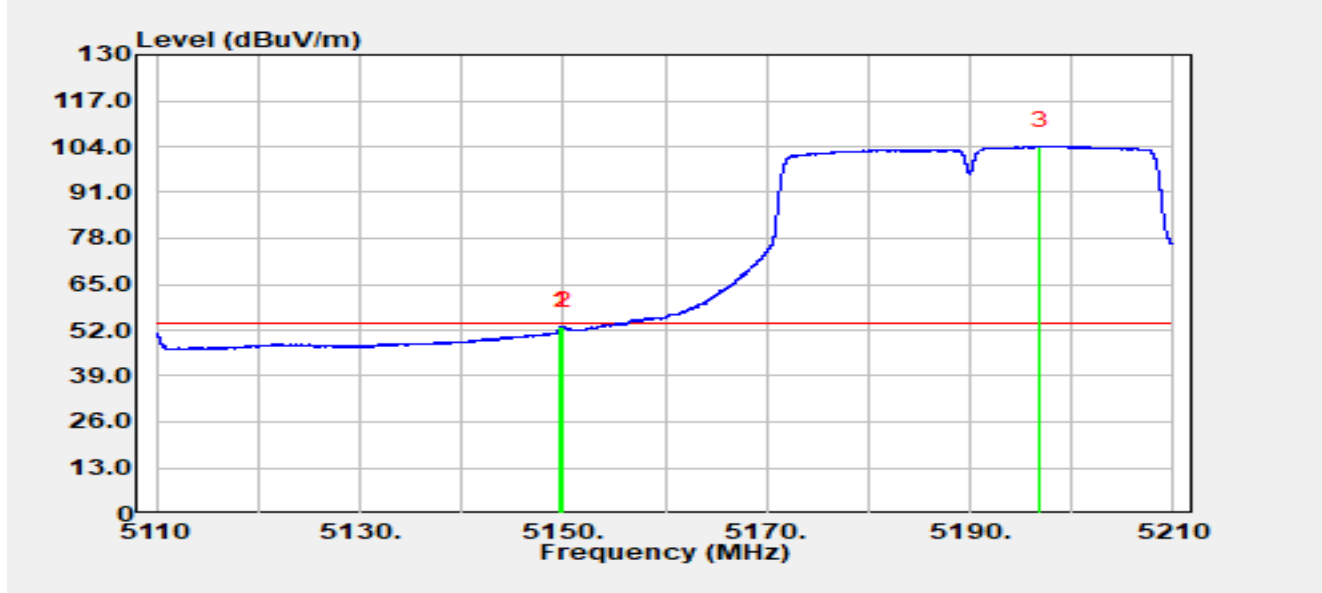


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5149.77         | 32.74          | 20.43      | 53.17                | -0.83       | 54.00          | Average  |
| 2  |      | 5150.00         | 32.63          | 20.43      | 53.06                | -0.94       | 54.00          | Average  |
| 3  |      | 5196.87         | 83.70          | 20.31      | 104.01               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5755 MHz |               |            |

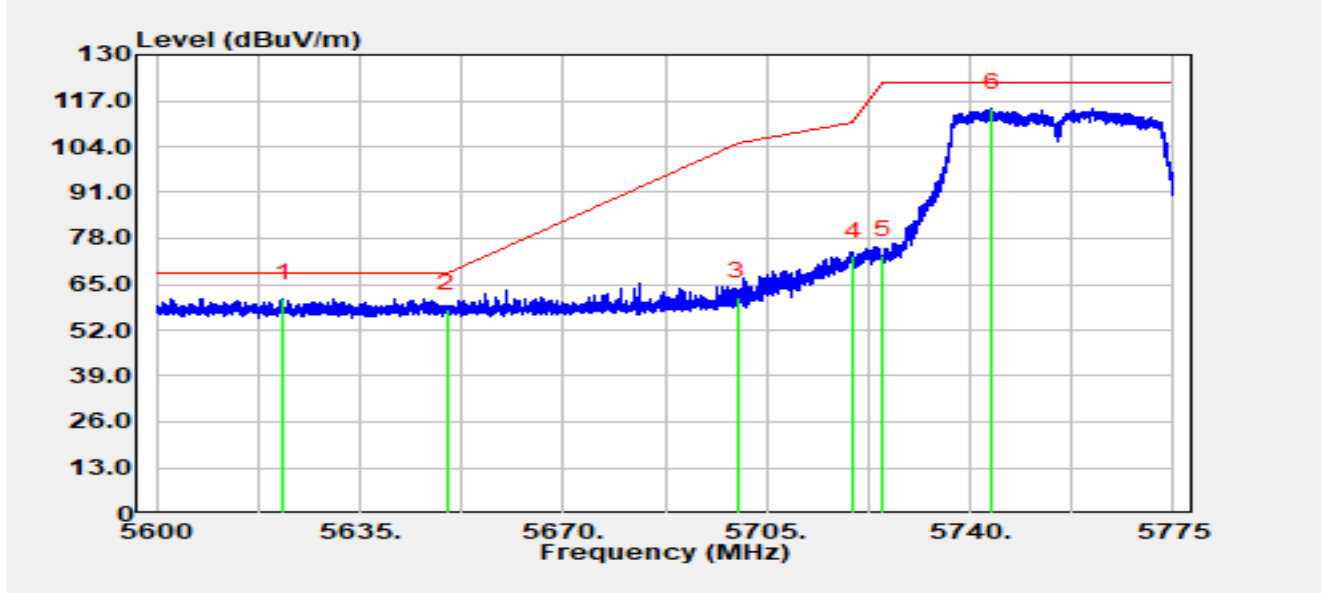


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5621.88         | 40.38          | 20.63      | 61.01                | -7.19       | 68.20          | Peak     |
| 2  |      | 5650.00         | 37.53          | 20.55      | 58.08                | -10.12      | 68.20          | Peak     |
| 3  |      | 5700.00         | 40.69          | 20.77      | 61.46                | -43.74      | 105.20         | Peak     |
| 4  |      | 5720.00         | 52.35          | 20.72      | 73.07                | -37.73      | 110.80         | Peak     |
| 5  |      | 5725.00         | 52.63          | 20.70      | 73.34                | -48.86      | 122.20         | Peak     |
| 6  |      | 5743.78         | 94.28          | 20.66      | 114.94               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5755 MHz |               |            |

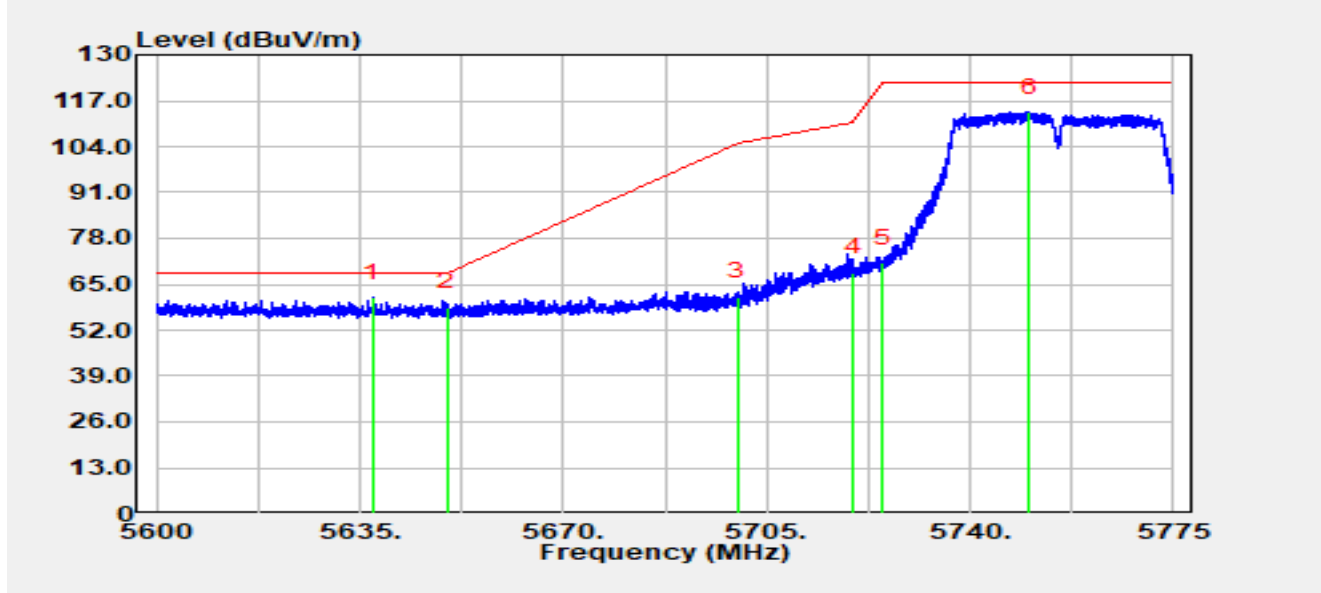


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5637.21         | 40.69          | 20.57      | 61.26                | -6.94       | 68.20          | Peak     |
| 2  |      | 5650.00         | 37.95          | 20.55      | 58.50                | -9.70       | 68.20          | Peak     |
| 3  |      | 5700.00         | 40.76          | 20.77      | 61.53                | -43.67      | 105.20         | Peak     |
| 4  |      | 5720.00         | 47.49          | 20.72      | 68.21                | -42.59      | 110.80         | Peak     |
| 5  |      | 5725.00         | 50.25          | 20.70      | 70.95                | -51.25      | 122.20         | Peak     |
| 6  |      | 5750.10         | 93.12          | 20.68      | 113.80               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5795 MHz |               |            |

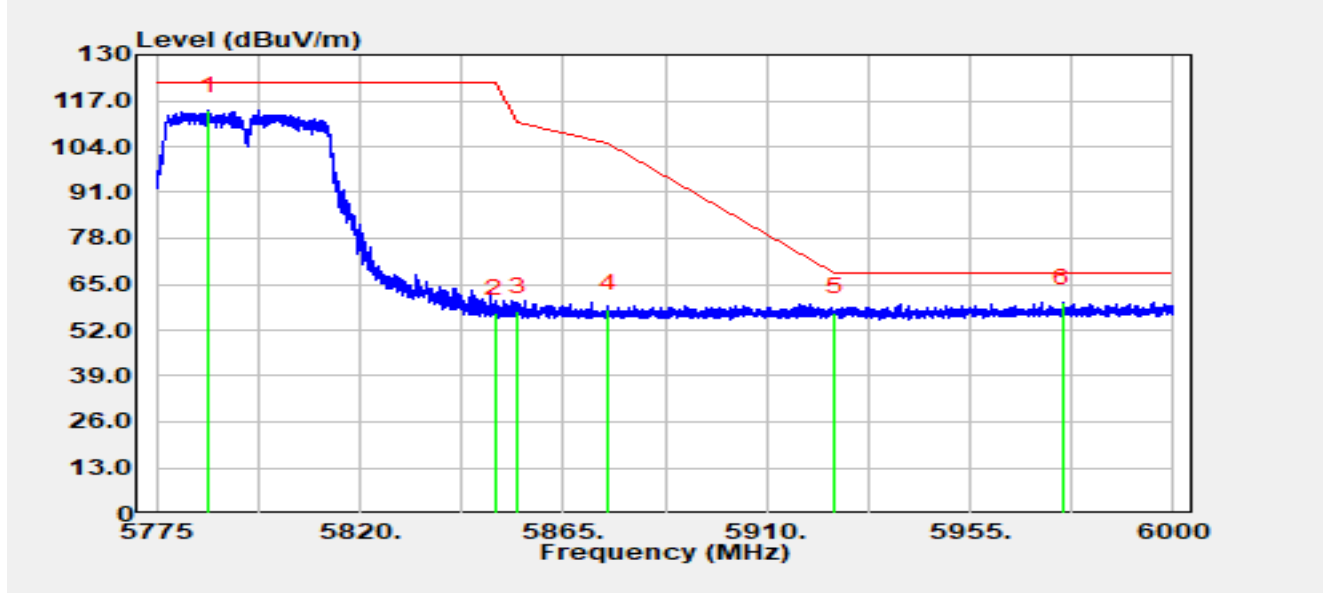


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5786.50         | 93.18          | 20.99      | 114.17               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 35.75          | 20.95      | 56.70                | -65.50      | 122.20         | Peak     |
| 3  |      | 5855.00         | 36.27          | 20.98      | 57.24                | -53.56      | 110.80         | Peak     |
| 4  |      | 5875.00         | 36.83          | 21.14      | 57.97                | -47.23      | 105.20         | Peak     |
| 5  |      | 5925.00         | 35.71          | 21.21      | 56.92                | -11.28      | 68.20          | Peak     |
| 6  | *    | 5975.48         | 38.39          | 21.42      | 59.81                | -8.39       | 68.20          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT40 at 5795 MHz |               |            |

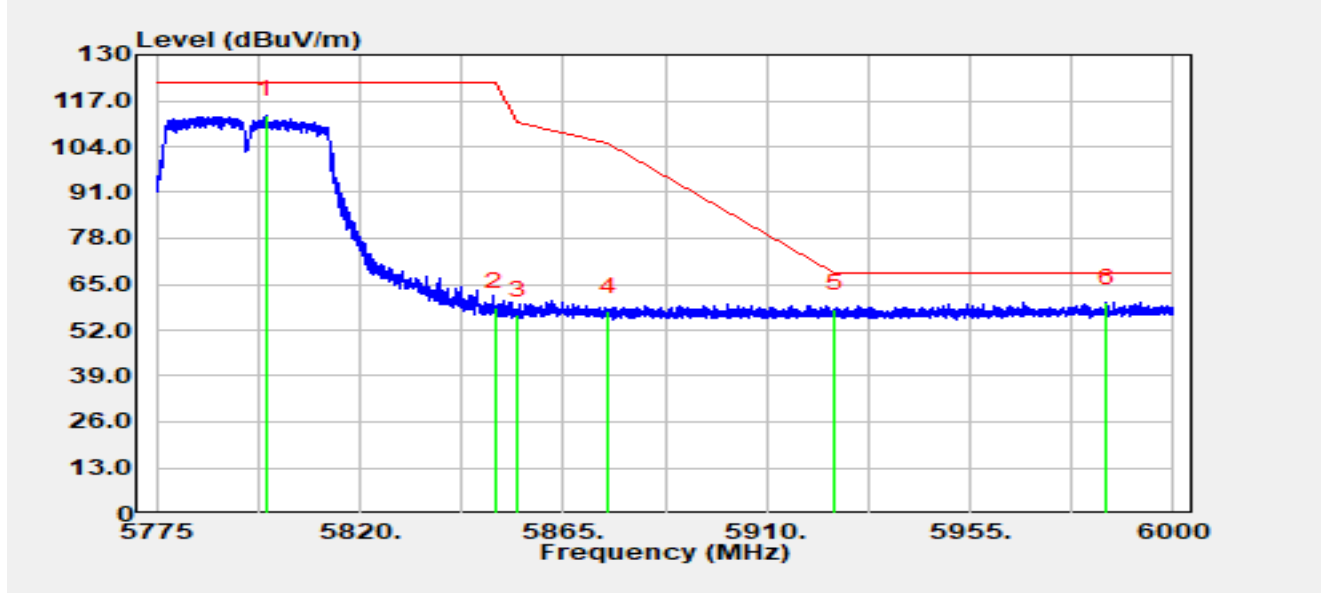


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5799.12         | 91.86          | 21.07      | 112.93               | N/A         | N/A            | Peak     |
| 2  |      | 5850.00         | 37.67          | 20.95      | 58.62                | -63.58      | 122.20         | Peak     |
| 3  |      | 5855.00         | 35.22          | 20.98      | 56.19                | -54.61      | 110.80         | Peak     |
| 4  |      | 5875.00         | 36.15          | 21.14      | 57.30                | -47.90      | 105.20         | Peak     |
| 5  |      | 5925.00         | 36.83          | 21.21      | 58.04                | -10.16      | 68.20          | Peak     |
| 6  | *    | 5985.26         | 38.25          | 21.47      | 59.72                | -8.48       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5210 MHz |               |            |

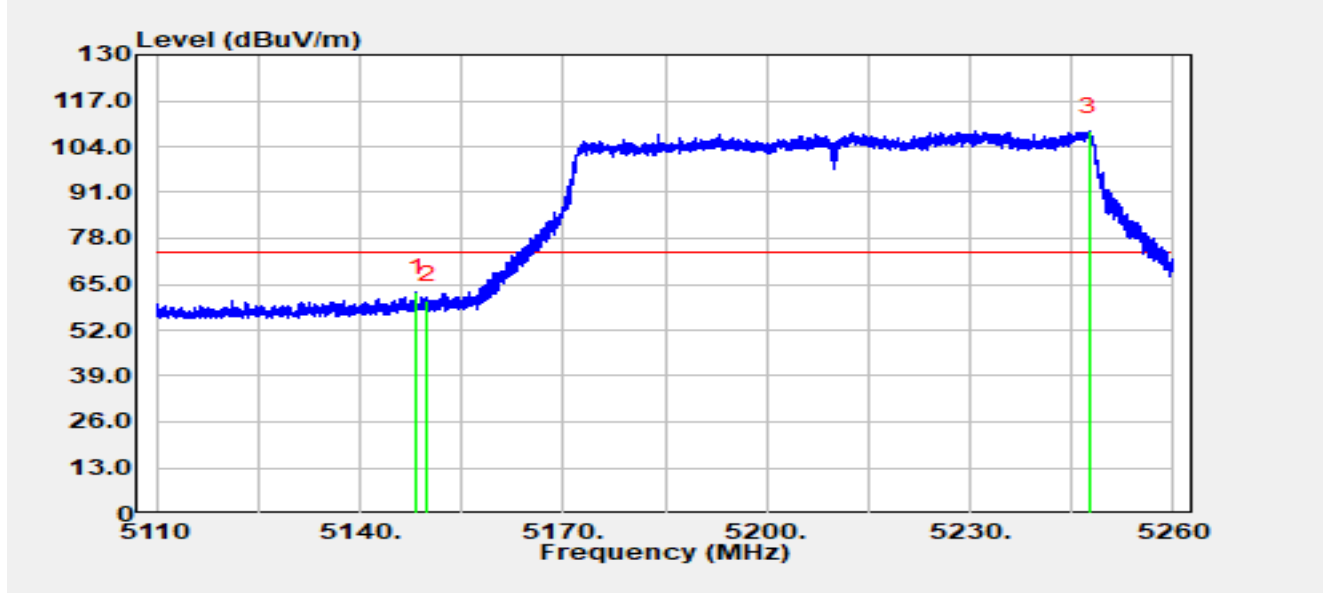


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5148.36         | 42.32          | 20.43      | 62.74                | -11.26      | 74.00          | Peak     |
| 2  |      | 5150.00         | 40.13          | 20.43      | 60.56                | -13.44      | 74.00          | Peak     |
| 3  |      | 5247.52         | 88.21          | 20.04      | 108.25               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5210 MHz |               |            |

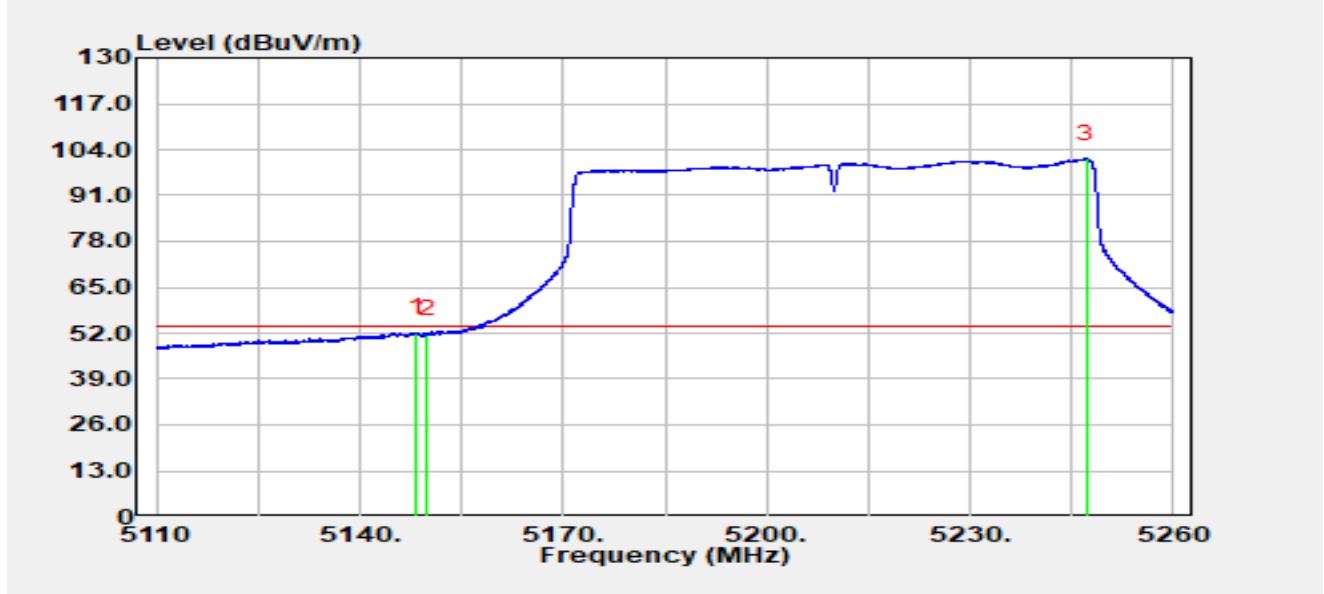


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5148.28         | 31.62          | 20.43      | 52.04                | -1.96       | 54.00          | Average  |
| 2  |      | 5150.00         | 31.14          | 20.43      | 51.57                | -2.43       | 54.00          | Average  |
| 3  |      | 5247.12         | 81.28          | 20.04      | 101.32               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5210 MHz |               |            |

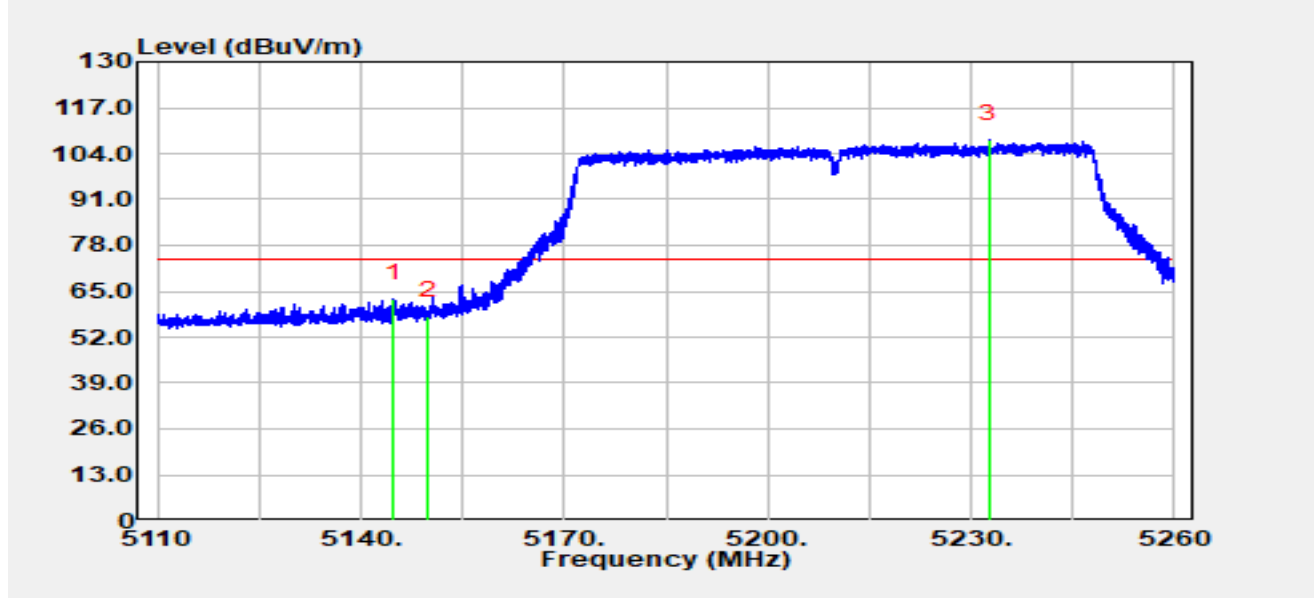


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5144.76         | 42.42          | 20.41      | 62.83                | -11.17      | 74.00          | Peak     |
| 2  |      | 5150.00         | 37.65          | 20.43      | 58.08                | -15.92      | 74.00          | Peak     |
| 3  |      | 5232.66         | 87.88          | 20.11      | 107.99               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5G_RE (3 m)                        | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5210 MHz |               |            |

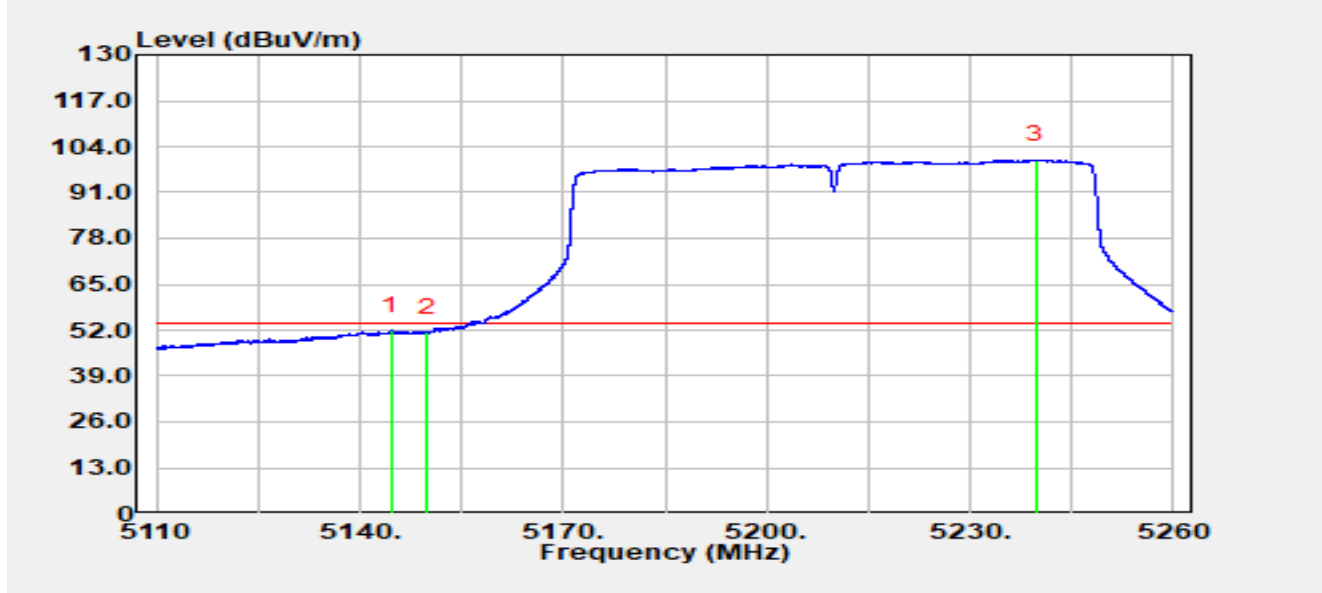


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5144.68         | 31.43          | 20.41      | 51.84                | -2.16       | 54.00          | Average  |
| 2  |      | 5150.00         | 30.95          | 20.43      | 51.38                | -2.62       | 54.00          | Average  |
| 3  |      | 5239.71         | 80.23          | 20.07      | 100.30               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5775 MHz |               |            |

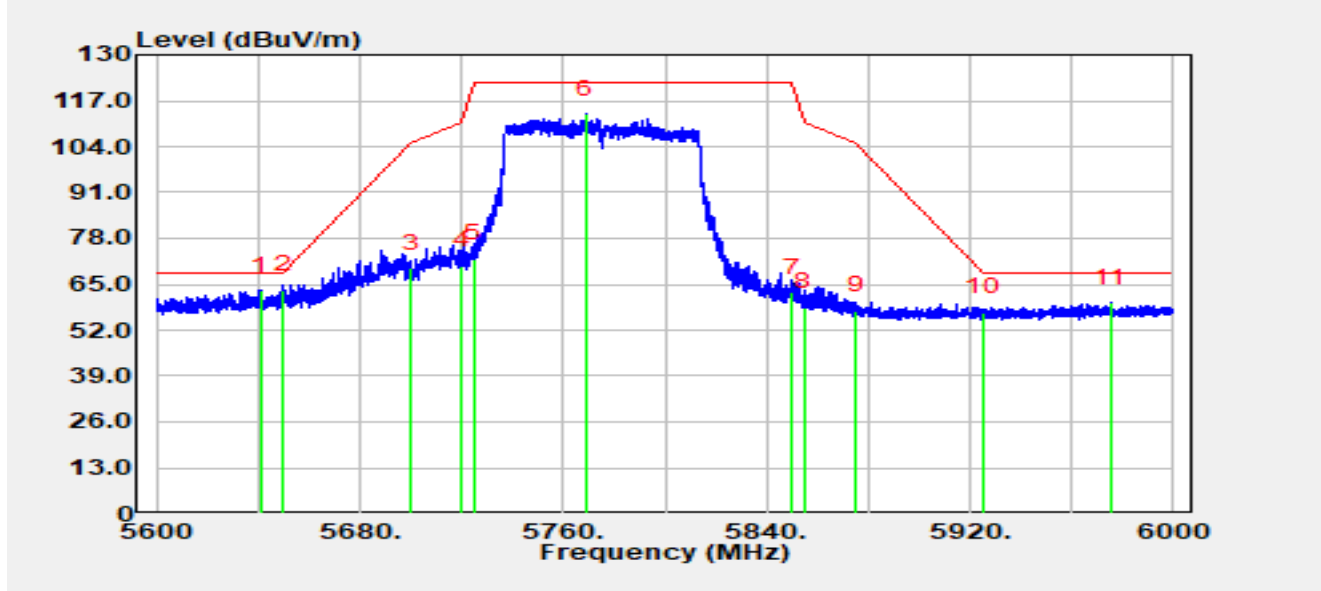


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 5641.16         | 42.67          | 20.57      | 63.24                | -4.96       | 68.20          | Peak     |
| 2  | *    | 5650.00         | 42.80          | 20.55      | 63.35                | -4.85       | 68.20          | Peak     |
| 3  |      | 5700.00         | 48.78          | 20.77      | 69.55                | -35.65      | 105.20         | Peak     |
| 4  |      | 5720.00         | 49.56          | 20.72      | 70.28                | -40.52      | 110.80         | Peak     |
| 5  |      | 5725.00         | 51.49          | 20.70      | 72.19                | -50.01      | 122.20         | Peak     |
| 6  |      | 5769.08         | 92.23          | 20.88      | 113.11               | N/A         | N/A            | Peak     |
| 7  |      | 5850.00         | 41.63          | 20.95      | 62.58                | -59.62      | 122.20         | Peak     |
| 8  |      | 5855.00         | 37.52          | 20.98      | 58.50                | -52.30      | 110.80         | Peak     |
| 9  |      | 5875.00         | 36.36          | 21.14      | 57.51                | -47.69      | 105.20         | Peak     |
| 10 |      | 5925.00         | 35.80          | 21.21      | 57.01                | -11.19      | 68.20          | Peak     |
| 11 |      | 5975.16         | 38.19          | 21.42      | 59.61                | -8.59       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|              |                                        |               |            |
|--------------|----------------------------------------|---------------|------------|
| Site         | WZ-AC1                                 | Test Date     | 2025-12-26 |
| Temperature  | 19.7 °C                                | Humidity      | 29.8%      |
| Limit        | FCC_5.8G_RE (3 m)                      | Test Engineer | Ajin Fan   |
| Test Voltage | AC 120 V/60 Hz                         | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11ac-VHT80 at 5775 MHz |               |            |

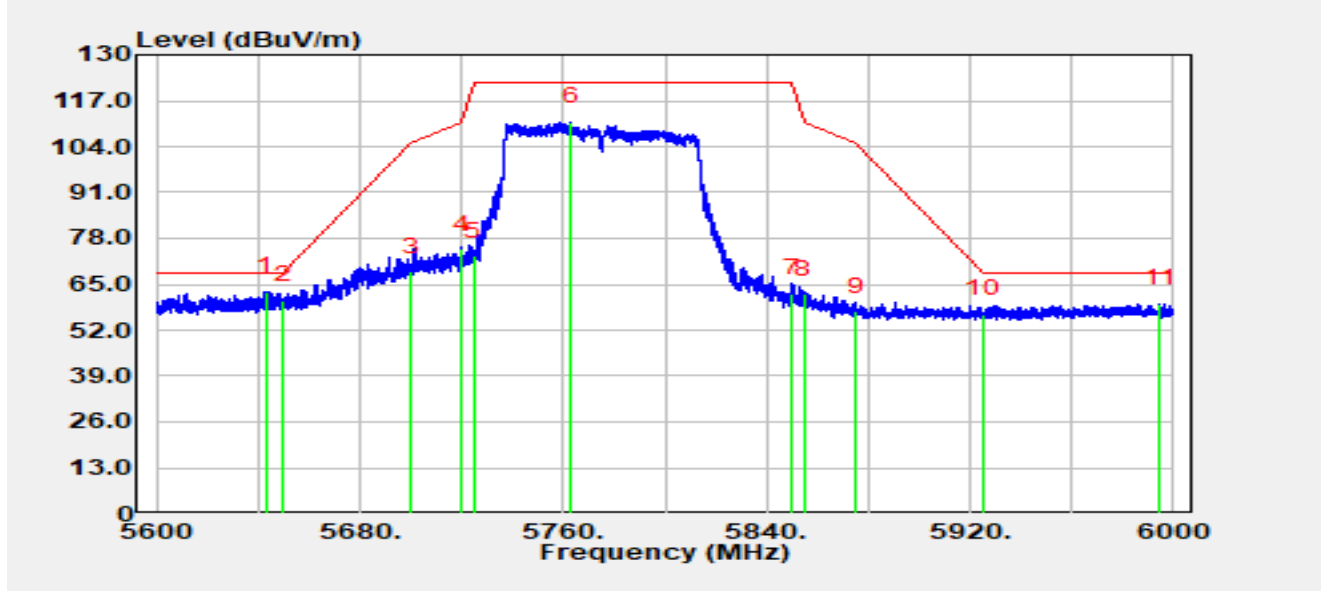


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5642.92         | 42.46          | 20.56      | 63.02                | -5.18       | 68.20          | Peak     |
| 2  |      | 5650.00         | 39.92          | 20.55      | 60.47                | -7.73       | 68.20          | Peak     |
| 3  |      | 5700.00         | 47.77          | 20.77      | 68.54                | -36.66      | 105.20         | Peak     |
| 4  |      | 5720.00         | 54.20          | 20.72      | 74.91                | -35.89      | 110.80         | Peak     |
| 5  |      | 5725.00         | 52.30          | 20.70      | 73.00                | -49.20      | 122.20         | Peak     |
| 6  |      | 5763.12         | 90.13          | 20.84      | 110.97               | N/A         | N/A            | Peak     |
| 7  |      | 5850.00         | 41.38          | 20.95      | 62.33                | -59.87      | 122.20         | Peak     |
| 8  |      | 5855.00         | 41.14          | 20.98      | 62.12                | -48.68      | 110.80         | Peak     |
| 9  |      | 5875.00         | 36.24          | 21.14      | 57.39                | -47.81      | 105.20         | Peak     |
| 10 |      | 5925.00         | 35.28          | 21.21      | 56.49                | -11.71      | 68.20          | Peak     |
| 11 |      | 5994.68         | 37.93          | 21.50      | 59.42                | -8.78       | 68.20          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### A.9 AC Conducted Emissions Test Result

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-SR2                          | Test Date     | 2025-12-30 |
| Temperature  | 19.5 °C                         | Humidity      | 41.2%      |
| Limit        | FCC Part 15.207_CE_Mains        | Test Engineer | Linda Wei  |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Line       |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

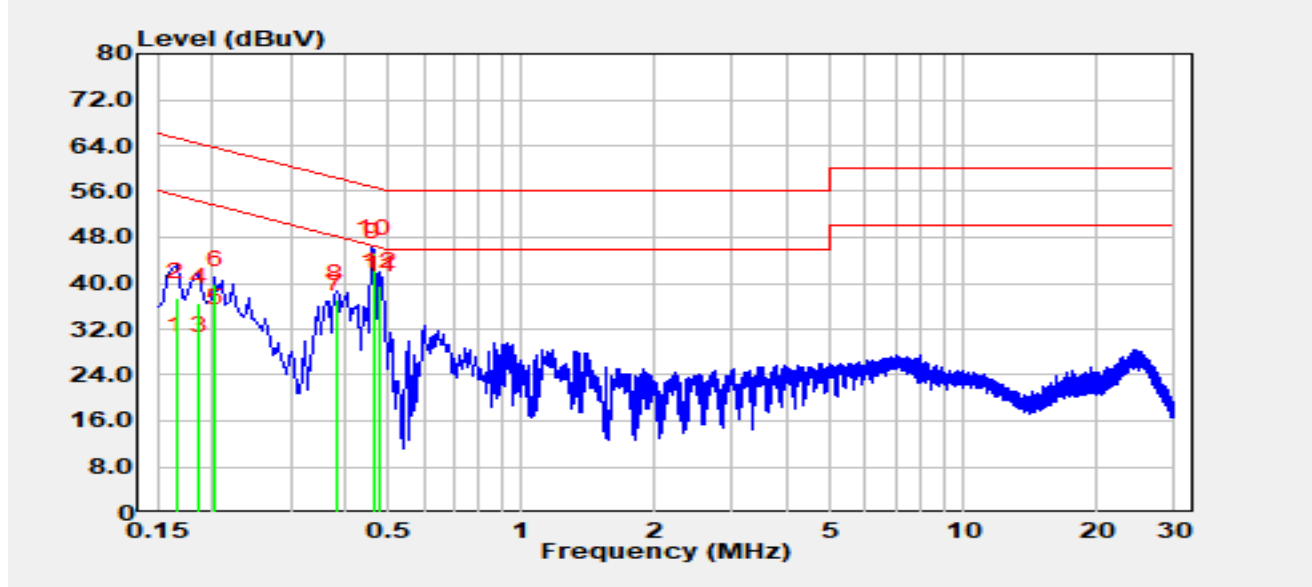


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB) | Measurement (dBμV) | Margin (dB) | Limit (dBμV) | Detector |
|----|------|-----------------|----------------|----------|--------------------|-------------|--------------|----------|
| 1  |      | 0.17            | 18.40          | 9.90     | 28.30              | -26.85      | 55.16        | Average  |
| 2  |      | 0.17            | 27.60          | 9.90     | 37.50              | -27.65      | 65.16        | QP       |
| 3  |      | 0.19            | 18.40          | 9.90     | 28.30              | -25.91      | 54.21        | Average  |
| 4  |      | 0.19            | 26.70          | 9.90     | 36.60              | -27.61      | 64.21        | QP       |
| 5  |      | 0.20            | 23.10          | 9.91     | 33.01              | -20.52      | 53.53        | Average  |
| 6  |      | 0.20            | 29.80          | 9.91     | 39.71              | -23.82      | 63.53        | QP       |
| 7  |      | 0.38            | 25.60          | 9.94     | 35.54              | -12.69      | 48.24        | Average  |
| 8  |      | 0.38            | 27.20          | 9.94     | 37.14              | -21.09      | 58.24        | QP       |
| 9  | *    | 0.46            | 34.60          | 9.96     | 44.56              | -2.06       | 46.62        | Average  |
| 10 |      | 0.46            | 35.20          | 9.96     | 45.16              | -11.46      | 56.62        | QP       |
| 11 |      | 0.48            | 28.80          | 9.96     | 38.76              | -7.61       | 46.37        | Average  |
| 12 |      | 0.48            | 29.50          | 9.96     | 39.46              | -16.91      | 56.37        | QP       |

Notes:

- "\*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WZ-SR2                          | Test Date     | 2025-12-30 |
| Temperature  | 19.5 °C                         | Humidity      | 41.2%      |
| Limit        | FCC Part 15.207_CE_Mains        | Test Engineer | Linda Wei  |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Neutral    |
| Test Mode    | Transmit by 802.11a at 5180 MHz |               |            |

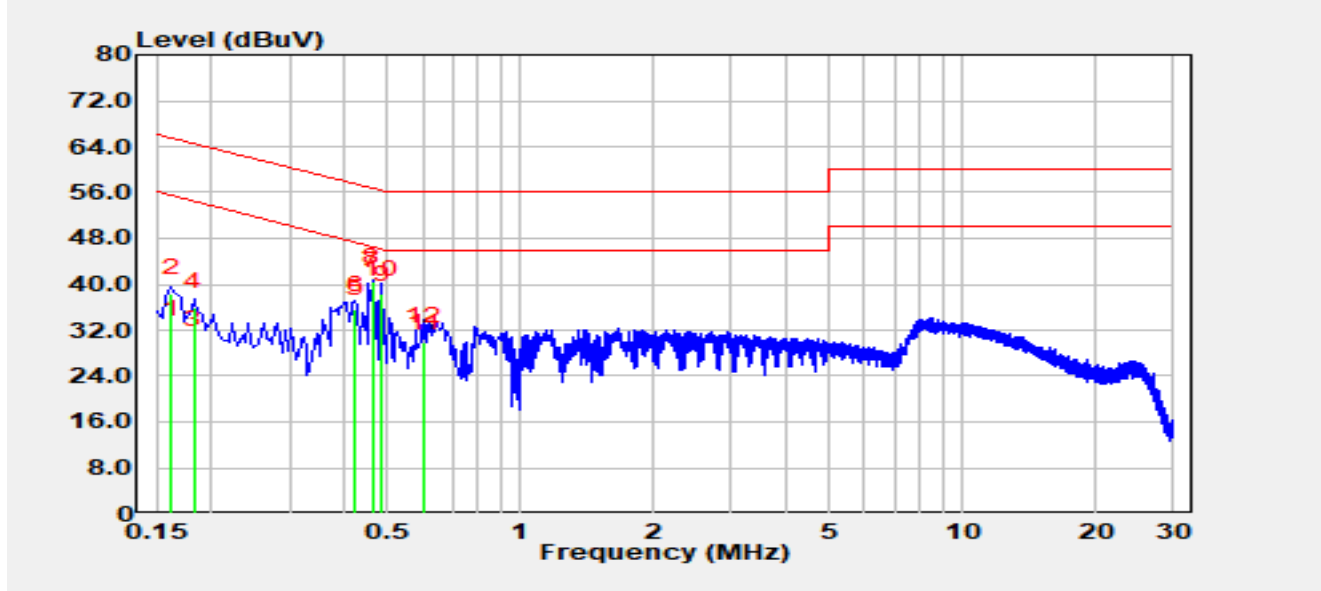

| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB) | Measurement (dBμV) | Margin (dB) | Limit (dBμV) | Detector |
|----|------|-----------------|----------------|----------|--------------------|-------------|--------------|----------|
| 1  |      | 0.16            | 21.20          | 9.94     | 31.14              | -24.22      | 55.36        | Average  |
| 2  |      | 0.16            | 28.40          | 9.94     | 38.34              | -27.02      | 65.36        | QP       |
| 3  |      | 0.18            | 19.50          | 9.93     | 29.43              | -24.96      | 54.39        | Average  |
| 4  |      | 0.18            | 26.10          | 9.93     | 36.03              | -28.36      | 64.39        | QP       |
| 5  |      | 0.42            | 24.80          | 9.97     | 34.77              | -12.64      | 47.41        | Average  |
| 6  |      | 0.42            | 25.60          | 9.97     | 35.57              | -21.84      | 57.41        | QP       |
| 7  | *    | 0.46            | 29.60          | 9.99     | 39.59              | -7.03       | 46.62        | Average  |
| 8  |      | 0.46            | 30.40          | 9.99     | 40.39              | -16.23      | 56.62        | QP       |
| 9  |      | 0.48            | 27.30          | 9.99     | 37.29              | -8.98       | 46.27        | Average  |
| 10 |      | 0.48            | 28.20          | 9.99     | 38.19              | -18.08      | 56.27        | QP       |
| 11 |      | 0.61            | 18.80          | 10.01    | 28.81              | -17.19      | 46.00        | Average  |
| 12 |      | 0.61            | 20.00          | 10.01    | 30.01              | -25.99      | 56.00        | QP       |

Notes:

- "\*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

## **Appendix B - Test Setup Photograph**

Refer to "R25S1033129-UT" file.

## Appendix C - EUT Photograph

Refer to "R25S1033129-UE" file.

\_\_\_\_\_ The End \_\_\_\_\_