

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

Note : Transmit frequency is ignore ,mark →
30M-1G--Horizontal-TX

Test result

Project Number: Test

Test Time: 2024-08-12_11.33.16

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A


Work Addition: TX

Temp.(oC): 23.1

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-01#01

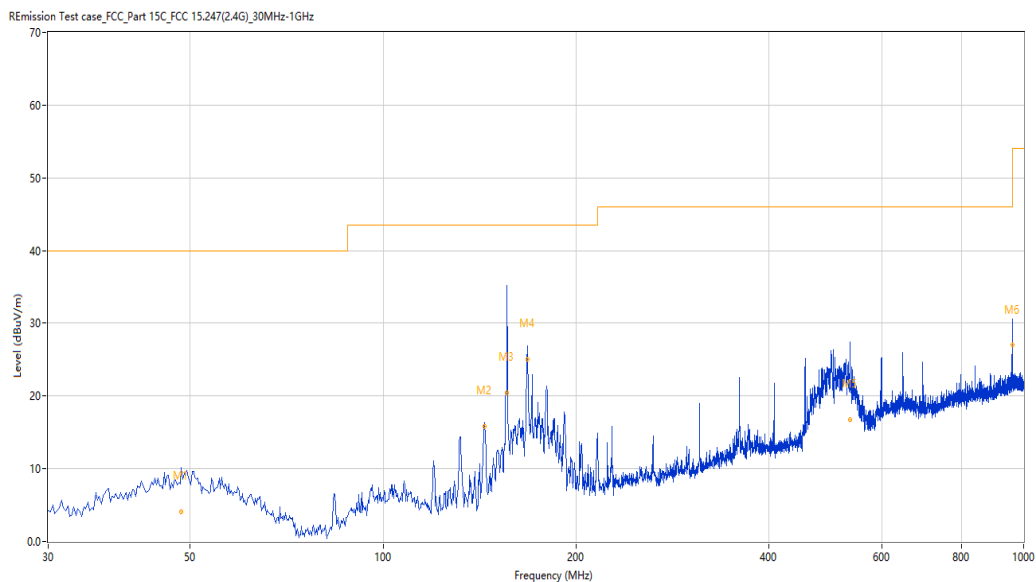

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	48.405	13.29	-24.72	40.0	26.71	Peak	295.60	134	Horizontal	Pass
1*	48.405	4.04	-24.72	40.0	35.96	QP	295.60	134	Horizontal	Pass
2	144.204	32.53	-30.20	43.5	10.97	Peak	59.10	133	Horizontal	Pass
2*	144.204	15.83	-30.20	43.5	27.67	QP	59.10	133	Horizontal	Pass
3	155.831	37.27	-29.92	43.5	6.23	Peak	54.60	130	Horizontal	Pass
3*	155.831	20.37	-29.92	43.5	23.13	QP	54.60	130	Horizontal	Pass
4	167.999	30.66	-29.38	43.5	12.84	Peak	49.60	102	Horizontal	Pass
4*	167.999	25.04	-29.38	43.5	18.46	QP	49.60	102	Horizontal	Pass
5	535.882	24.98	-18.17	46.0	21.02	Peak	96.80	101	Horizontal	Pass
5*	535.882	16.76	-18.17	46.0	29.24	QP	96.80	101	Horizontal	Pass
6	959.658	32.05	-10.48	46.0	13.95	Peak	290.40	178	Horizontal	Pass
6*	959.658	26.96	-10.48	46.0	19.04	QP	290.40	178	Horizontal	Pass

Vertical-TX

Test result

Project Number: Test

Test Time: 2024-08-12_11.21.46

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

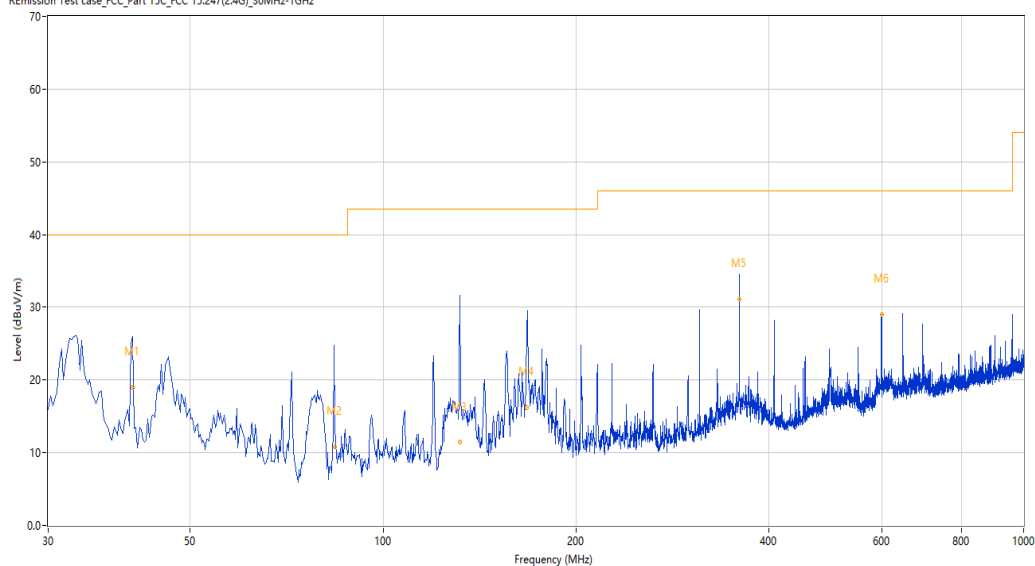

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	40.680	19.05	-25.63	40.0	20.95	Peak	354.10	106	Vertical	Pass
1*	40.680	19.02	-25.63	40.0	20.98	QP	354.10	106	Vertical	Pass
2	83.960	27.08	-30.53	40.0	12.92	Peak	360.00	185	Vertical	Pass
2*	83.960	10.84	-30.53	40.0	29.16	QP	360.00	185	Vertical	Pass
3	131.837	26.34	-29.61	43.5	17.16	Peak	320.10	134	Vertical	Pass
3*	131.837	11.43	-29.61	43.5	32.07	QP	320.10	134	Vertical	Pass
4	167.784	29.56	-29.38	43.5	13.94	Peak	227.60	270	Vertical	Pass
4*	167.784	16.15	-29.38	43.5	27.35	QP	227.60	270	Vertical	Pass
5	359.999	34.30	-22.49	46.0	11.70	Peak	167.20	177	Vertical	Pass
5*	359.999	31.10	-22.49	46.0	14.90	QP	167.20	177	Vertical	Pass
6	599.999	32.02	-15.87	46.0	13.98	Peak	97.30	185	Vertical	Pass
6*	599.999	29.06	-15.87	46.0	16.94	QP	97.30	185	Vertical	Pass

1-18G
2404MHz-Horizontal-TX

Test result

Project Number: Test

Test Time: 2024-08-09_17.39.50

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-01#01

REmission Test case FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

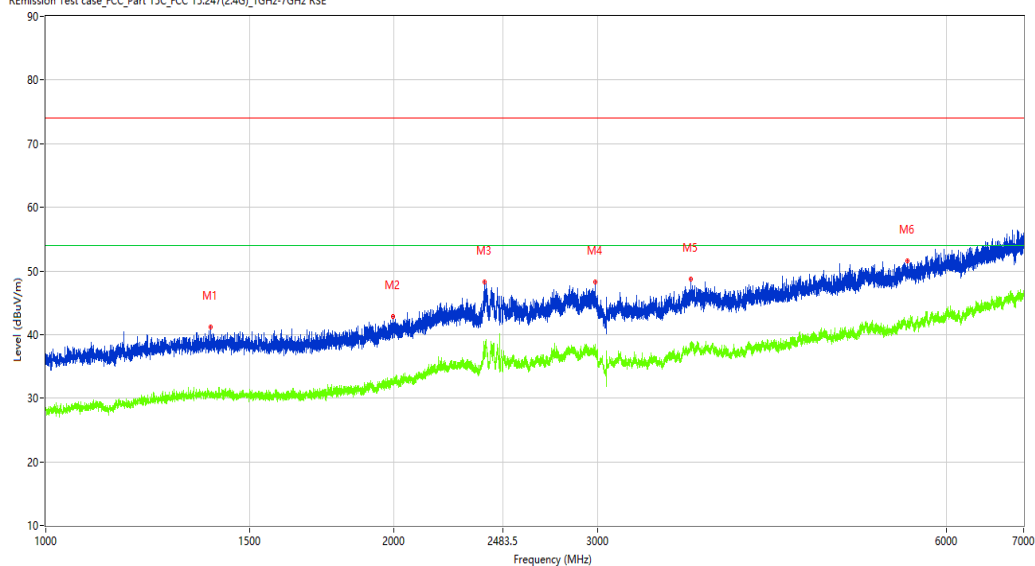

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1389.250	41.23	-12.76	74.0	32.77	Peak	0.00	100	Horizontal	Pass
1**	1389.250	30.06	-12.76	54.0	23.94	AV	0.00	100	Horizontal	Pass
2	1995.500	42.87	-10.98	74.0	31.13	Peak	223.90	100	Horizontal	Pass
2**	1995.500	32.50	-10.98	54.0	21.50	AV	223.90	100	Horizontal	Pass
3	2392.750	48.28	-4.47	74.0	25.72	Peak	88.30	100	Horizontal	Pass
3**	2392.750	38.29	-4.47	54.0	15.71	AV	88.30	100	Horizontal	Pass
4	2984.250	48.21	-3.61	74.0	25.79	Peak	88.30	100	Horizontal	Pass
4**	2984.250	38.43	-3.61	54.0	15.57	AV	88.30	100	Horizontal	Pass
5	3608.500	48.65	-2.66	74.0	25.35	Peak	156.10	100	Horizontal	Pass
5**	3608.500	37.82	-2.66	54.0	16.18	AV	156.10	100	Horizontal	Pass
6	5550.000	51.56	0.36	74.0	22.44	Peak	0.00	100	Horizontal	Pass
6**	5550.000	41.62	0.36	54.0	12.38	AV	0.00	100	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2024-08-09_16.32.19

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

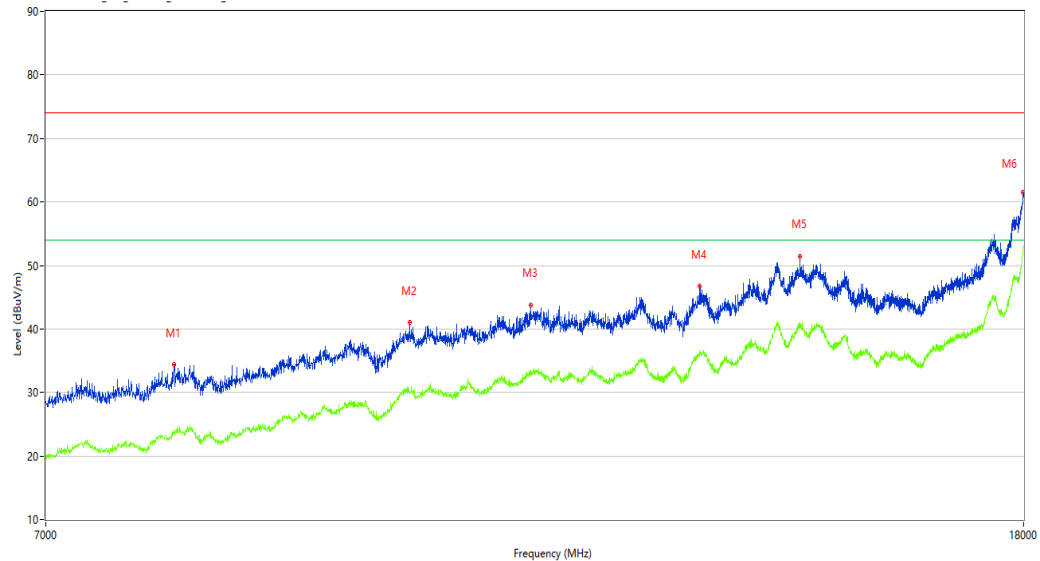

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7924.000	34.39	2.43	74.0	39.61	Peak	0.00	100	Horizontal	Pass
1**	7924.000	23.55	2.43	54.0	30.45	AV	0.00	100	Horizontal	Pass
2	9945.250	40.98	8.79	74.0	33.02	Peak	330.10	100	Horizontal	Pass
2**	9945.250	29.86	8.79	54.0	24.14	AV	330.10	100	Horizontal	Pass
3	11180.000	43.81	10.24	74.0	30.19	Peak	57.10	100	Horizontal	Pass
3**	11180.000	33.57	10.24	54.0	20.43	AV	57.10	100	Horizontal	Pass
4	13162.750	46.74	13.13	74.0	27.26	Peak	330.10	100	Horizontal	Pass
4**	13162.750	35.82	13.13	54.0	18.18	AV	330.10	100	Horizontal	Pass
5	14502.000	51.49	16.79	74.0	22.51	Peak	0.00	100	Horizontal	Pass
5**	14502.000	41.07	16.79	54.0	12.93	AV	0.00	100	Horizontal	Pass
6	17991.750	61.56	29.49	74.0	12.44	Peak	240.00	100	Horizontal	Pass
6**	17991.750	52.55	29.49	54.0	1.45	AV	240.00	100	Horizontal	Pass

2404MHz-Vertical-TX

Test result

Project Number: Test

Test Time: 2024-08-09_17.18.56

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 23.1

Hum.: 46%RH

Test Engineer: SDC


Test Standard: FCC Part 15.247

Work Addition: TX

Load: Full load

Remark: DR-RF01-E24060051-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

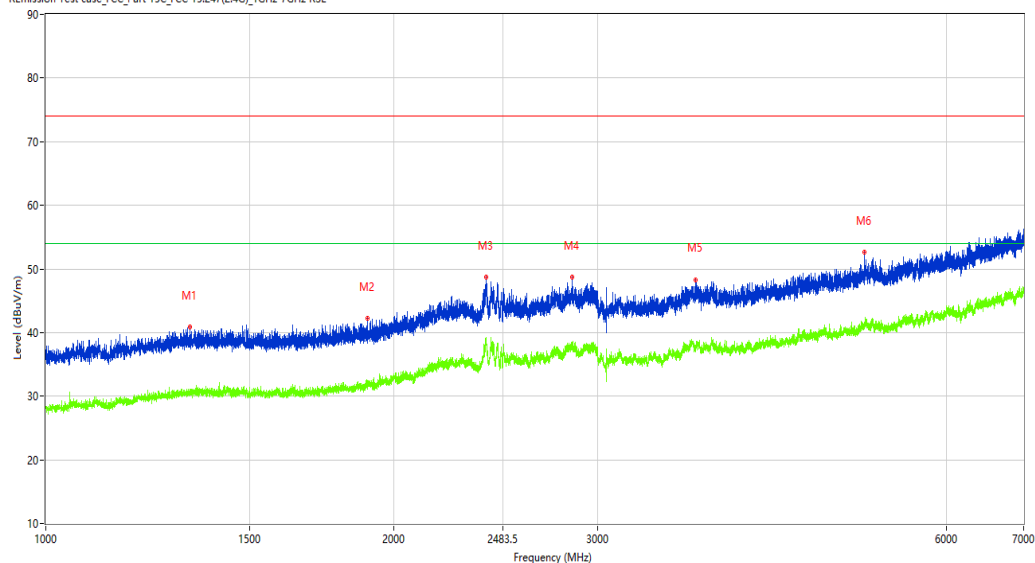

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.750	40.83	-12.93	74.0	33.17	Peak	271.90	100	Vertical	Pass
1**	1332.750	30.83	-12.93	54.0	23.17	AV	271.90	100	Vertical	Pass
2	1896.500	42.18	-11.78	74.0	31.82	Peak	223.30	100	Vertical	Pass
2**	1896.500	31.84	-11.78	54.0	22.16	AV	223.30	100	Vertical	Pass
3	2401.750	48.71	-4.70	74.0	25.29	Peak	264.10	100	Vertical	Pass
3**	2401.750	38.38	-4.70	54.0	15.62	AV	264.10	100	Vertical	Pass
4	2848.750	48.68	-4.27	74.0	25.32	Peak	360.00	100	Vertical	Pass
4**	2848.750	37.65	-4.27	54.0	16.35	AV	360.00	100	Vertical	Pass
5	3641.000	48.34	-2.18	74.0	25.66	Peak	270.50	100	Vertical	Pass
5**	3641.000	38.08	-2.18	54.0	15.92	AV	270.50	100	Vertical	Pass
6	5102.500	52.66	0.38	74.0	21.34	Peak	351.70	100	Vertical	Pass
6**	5102.500	41.05	0.38	54.0	12.95	AV	351.70	100	Vertical	Pass

Test result

Project Number: Test

Test Time: 2024-08-09_16.13.13

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX

Temp.(oC): 23.1

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-01#01

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8650.000	34.73	3.82	74.0	39.27	Peak	45.40	100	Vertical	Pass
1**	8650.000	25.13	3.82	54.0	28.87	AV	45.40	100	Vertical	Pass
2	9813.250	38.64	7.43	74.0	35.36	Peak	84.50	100	Vertical	Pass
2**	9813.250	28.94	7.43	54.0	25.06	AV	84.50	100	Vertical	Pass
3	11136.000	42.72	9.85	74.0	31.28	Peak	84.50	100	Vertical	Pass
3**	11136.000	32.74	9.85	54.0	21.26	AV	84.50	100	Vertical	Pass
4	12480.750	45.38	11.57	74.0	28.62	Peak	325.30	100	Vertical	Pass
4**	12480.750	34.89	11.57	54.0	19.11	AV	325.30	100	Vertical	Pass
5	14752.250	50.92	17.84	74.0	23.08	Peak	123.70	100	Vertical	Pass
5**	14752.250	40.87	17.84	54.0	13.13	AV	123.70	100	Vertical	Pass
6	17876.251	58.54	23.86	74.0	15.46	Peak	325.30	100	Vertical	Pass
6**	17876.251	47.51	23.86	54.0	6.49	AV	325.30	100	Vertical	Pass

2442MHz-Horizontal-TX

Test result

Project Number: Test

Test Time: 2024-08-09_17.34.44

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 23.1

Hum.: 46%RH

Test Engineer: SDC


Test Standard: FCC Part 15.247

Work Addition: TX

Load: Full load

Remark: DR-RF01-E24060051-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

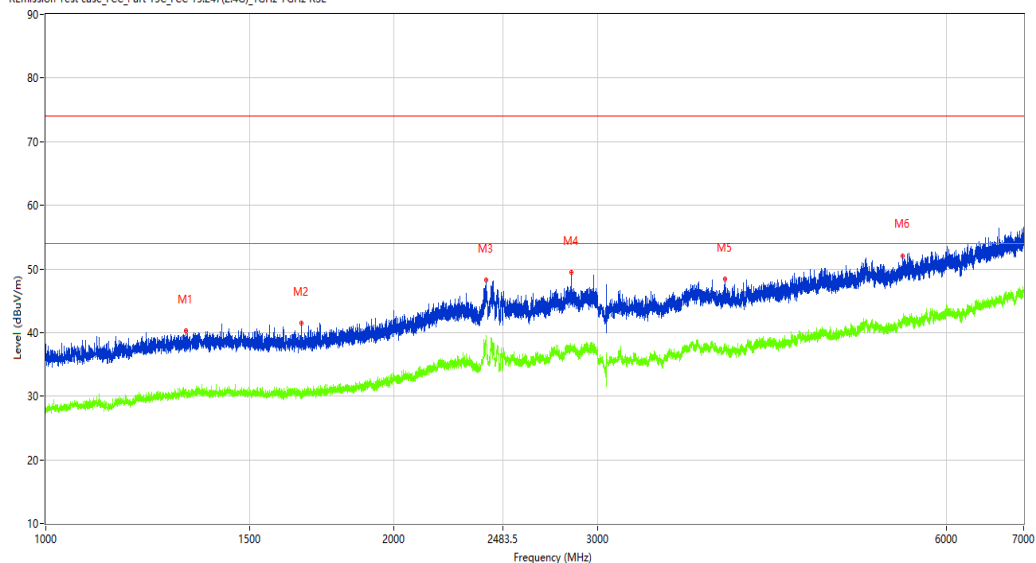

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1321.250	40.21	-13.01	74.0	33.79	Peak	39.00	100	Horizontal	Pass
1**	1321.250	30.07	-13.01	54.0	23.93	AV	39.00	100	Horizontal	Pass
2	1662.500	41.51	-12.89	74.0	32.49	Peak	193.90	100	Horizontal	Pass
2**	1662.500	30.51	-12.89	54.0	23.49	AV	193.90	100	Horizontal	Pass
3	2401.250	48.20	-4.69	74.0	25.80	Peak	146.10	100	Horizontal	Pass
3**	2401.250	38.98	-4.69	54.0	15.02	AV	146.10	100	Horizontal	Pass
4	2846.500	49.44	-4.28	74.0	24.56	Peak	324.20	100	Horizontal	Pass
4**	2846.500	37.12	-4.28	54.0	16.88	AV	324.20	100	Horizontal	Pass
5	3865.500	48.38	-2.97	74.0	25.62	Peak	254.60	100	Horizontal	Pass
5**	3865.500	38.27	-2.97	54.0	15.73	AV	254.60	100	Horizontal	Pass
6	5504.000	52.09	0.57	74.0	21.91	Peak	183.90	100	Horizontal	Pass
6**	5504.000	41.92	0.57	54.0	12.08	AV	183.90	100	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2024-08-09_16.24.03

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

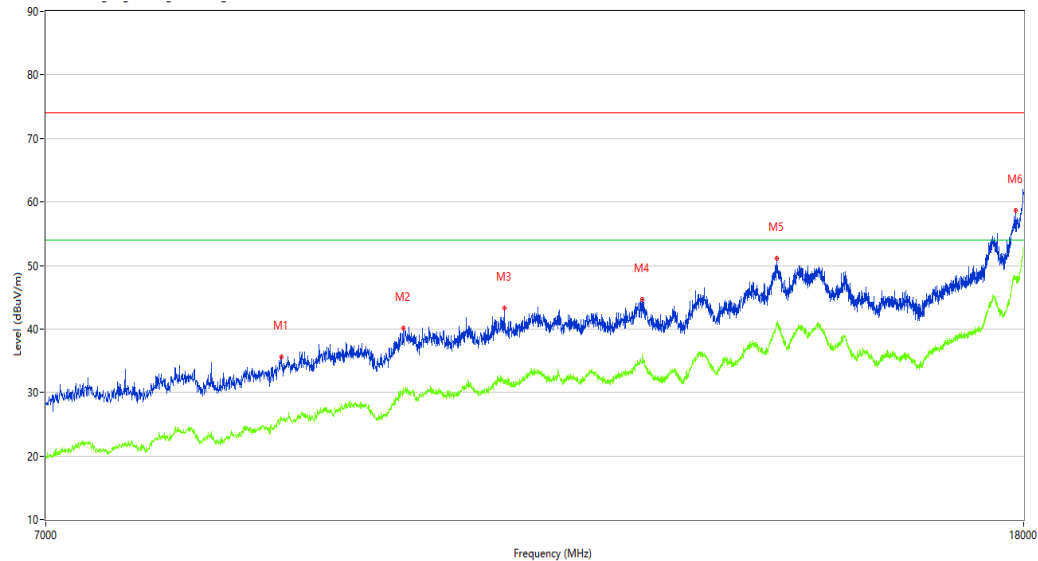

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8787.500	35.63	4.06	74.0	38.37	Peak	148.80	100	Horizontal	Pass
1**	8787.500	25.82	4.06	54.0	28.18	AV	148.80	100	Horizontal	Pass
2	9887.500	40.20	8.55	74.0	33.80	Peak	0.00	100	Horizontal	Pass
2**	9887.500	29.92	8.55	54.0	24.08	AV	0.00	100	Horizontal	Pass
3	10899.500	43.26	10.20	74.0	30.74	Peak	272.70	100	Horizontal	Pass
3**	10899.500	31.96	10.20	54.0	22.04	AV	272.70	100	Horizontal	Pass
4	12455.999	44.65	11.90	74.0	29.35	Peak	111.90	100	Horizontal	Pass
4**	12455.999	35.99	11.90	54.0	18.01	AV	111.90	100	Horizontal	Pass
5	14177.500	51.13	18.32	74.0	22.87	Peak	179.20	100	Horizontal	Pass
5**	14177.500	40.63	18.32	54.0	13.37	AV	179.20	100	Horizontal	Pass
6	17859.750	58.69	23.63	74.0	15.31	Peak	79.40	100	Horizontal	Pass
6**	17859.750	48.09	23.63	54.0	5.91	AV	79.40	100	Horizontal	Pass

2442MHz-Vertical-TX

Test result

Project Number: Test

Test Time: 2024-08-09_17.22.40

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 23.1

Hum.: 46%RH

Test Engineer: SDC


Test Standard: FCC Part 15.247

Work Addition: TX

Load: Full load

Remark: DR-RF01-E24060051-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

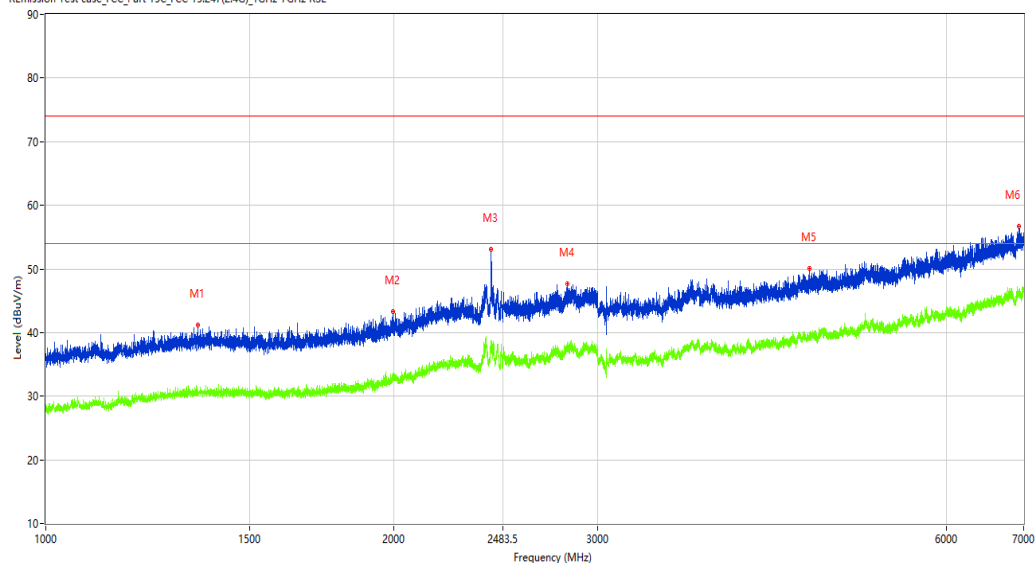

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1352.750	41.18	-12.72	74.0	32.82	Peak	106.00	100	Vertical	Pass
1**	1352.750	30.71	-12.72	54.0	23.29	AV	106.00	100	Vertical	Pass
2	1994.000	43.29	-11.01	74.0	30.71	Peak	128.10	100	Vertical	Pass
2**	1994.000	33.59	-11.01	54.0	20.41	AV	128.10	100	Vertical	Pass
3	2426.000	53.02	-5.18	74.0	20.98	Peak	208.30	100	Vertical	Pass
3**	2426.000	38.78	-5.18	54.0	15.22	AV	208.30	100	Vertical	Pass
4	2824.000	47.60	-4.68	74.0	26.40	Peak	121.40	100	Vertical	Pass
4**	2824.000	37.40	-4.68	54.0	16.60	AV	121.40	100	Vertical	Pass
5	4568.000	50.06	-1.48	74.0	23.94	Peak	198.30	100	Vertical	Pass
5**	4568.000	39.14	-1.48	54.0	14.86	AV	198.30	100	Vertical	Pass
6	6935.500	56.67	4.20	74.0	17.33	Peak	141.60	100	Vertical	Pass
6**	6935.500	46.46	4.20	54.0	7.54	AV	141.60	100	Vertical	Pass

Test result

Project Number: Test

Test Time: 2024-08-09_16.17.36

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX

Temp.(oC): 23.1

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8501.500	34.79	2.91	74.0	39.21	Peak	312.00	100	Vertical	Pass
1**	8501.500	24.59	2.91	54.0	29.41	AV	312.00	100	Vertical	Pass
2	9403.500	38.39	6.71	74.0	35.61	Peak	57.70	100	Vertical	Pass
2**	9403.500	28.18	6.71	54.0	25.82	AV	57.70	100	Vertical	Pass
3	10855.500	41.54	10.20	74.0	32.46	Peak	89.20	100	Vertical	Pass
3**	10855.500	32.32	10.20	54.0	21.68	AV	89.20	100	Vertical	Pass
4	12445.000	44.86	11.87	74.0	29.14	Peak	89.20	100	Vertical	Pass
4**	12445.000	34.86	11.87	54.0	19.14	AV	89.20	100	Vertical	Pass
5	14502.000	50.21	16.79	74.0	23.79	Peak	25.60	100	Vertical	Pass
5**	14502.000	40.38	16.79	54.0	13.62	AV	25.60	100	Vertical	Pass
6	17502.251	54.60	21.43	74.0	19.40	Peak	350.50	100	Vertical	Pass
6**	17502.251	44.91	21.43	54.0	9.09	AV	350.50	100	Vertical	Pass

2480MHz-Horizontal-TX

Test result

Project Number: Test

Test Time: 2024-08-09_17.31.16

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 23.1

Hum.: 46%RH

Test Engineer: SDC


Test Standard: FCC Part 15.247

Work Addition: TX

Load: Full load

Remark: DR-RF01-E24060051-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

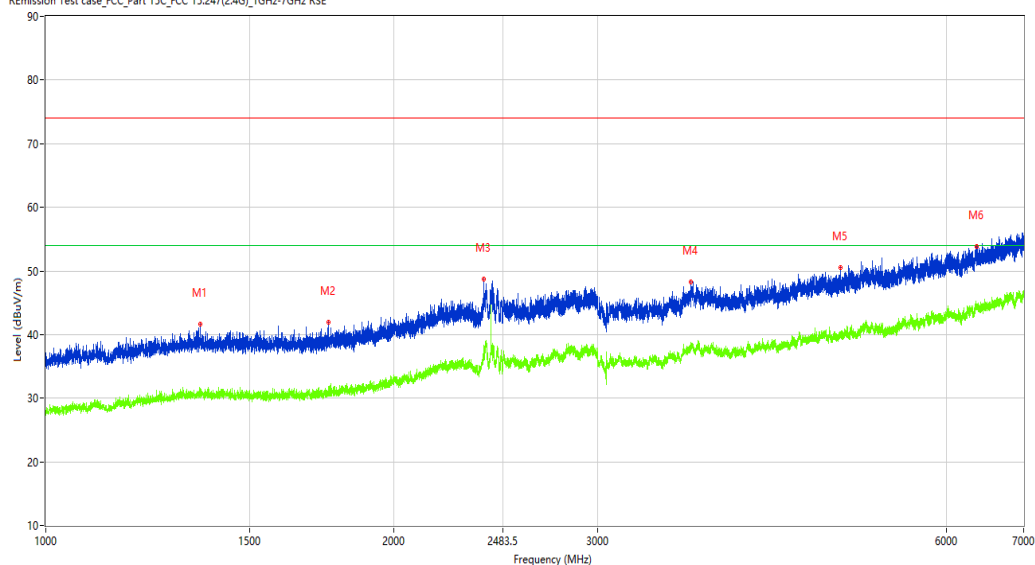

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1360.250	41.65	-12.60	74.0	32.35	Peak	212.50	100	Horizontal	Pass
1**	1360.250	31.10	-12.60	54.0	22.90	AV	212.50	100	Horizontal	Pass
2	1755.750	41.92	-12.39	74.0	32.08	Peak	220.00	100	Horizontal	Pass
2**	1755.750	31.62	-12.39	54.0	22.38	AV	220.00	100	Horizontal	Pass
3	2392.000	48.68	-4.45	74.0	25.32	Peak	150.80	100	Horizontal	Pass
3**	2392.000	38.04	-4.45	54.0	15.96	AV	150.80	100	Horizontal	Pass
4	3609.500	48.23	-2.64	74.0	25.77	Peak	45.50	100	Horizontal	Pass
4**	3609.500	37.64	-2.64	54.0	16.36	AV	45.50	100	Horizontal	Pass
5	4861.500	50.49	-0.87	74.0	23.51	Peak	212.40	100	Horizontal	Pass
5**	4861.500	39.76	-0.87	54.0	14.24	AV	212.40	100	Horizontal	Pass
6	6374.000	53.88	2.60	74.0	20.12	Peak	0.00	100	Horizontal	Pass
6**	6374.000	44.45	2.60	54.0	9.55	AV	0.00	100	Horizontal	Pass

Test result

Project Number: Test

Test Time: 2024-08-09_16.22.06

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

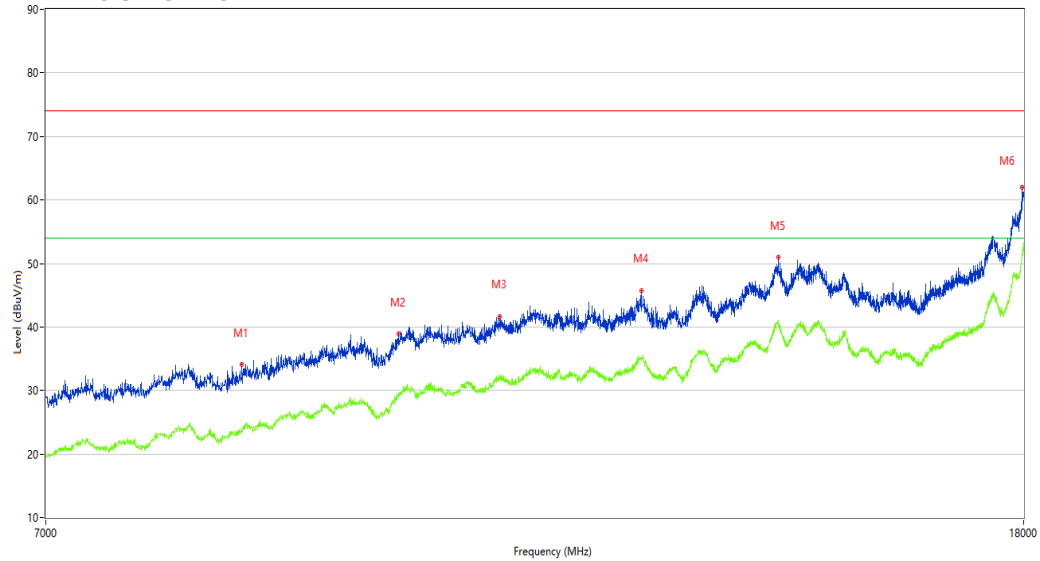

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8457.500	34.09	2.81	74.0	39.91	Peak	120.30	100	Horizontal	Pass
1**	8457.500	24.19	2.81	54.0	29.81	AV	120.30	100	Horizontal	Pass
2	9838.000	38.96	7.79	74.0	35.04	Peak	56.90	100	Horizontal	Pass
2**	9838.000	29.55	7.79	54.0	24.45	AV	56.90	100	Horizontal	Pass
3	10855.500	41.69	10.20	74.0	32.31	Peak	135.20	100	Horizontal	Pass
3**	10855.500	32.40	10.20	54.0	21.60	AV	135.20	100	Horizontal	Pass
4	12439.500	45.76	11.86	74.0	28.24	Peak	305.10	100	Horizontal	Pass
4**	12439.500	35.17	11.86	54.0	18.83	AV	305.10	100	Horizontal	Pass
5	14199.500	50.97	18.42	74.0	23.03	Peak	273.00	100	Horizontal	Pass
5**	14199.500	41.04	18.42	54.0	12.96	AV	273.00	100	Horizontal	Pass
6	17975.251	61.94	28.42	74.0	12.06	Peak	359.40	100	Horizontal	Pass
6**	17975.251	51.10	28.42	54.0	2.90	AV	359.40	100	Horizontal	Pass

2480MHz-Vertical-TX

Test result

Project Number: Test

Test Time: 2024-08-09_17.26.23

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 23.1

Hum.: 46%RH

Test Engineer: SDC


Test Standard: FCC Part 15.247

Work Addition: TX

Load: Full load

Remark: DR-RF01-E24060051-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

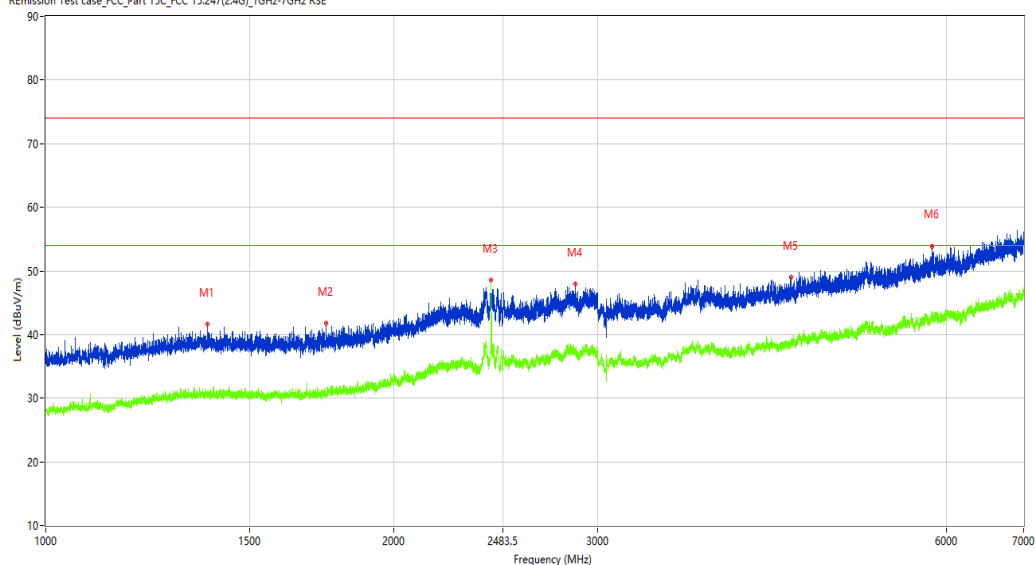

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1379.500	41.62	-12.80	74.0	32.38	Peak	227.40	100	Vertical	Pass
1**	1379.500	30.96	-12.80	54.0	23.04	AV	227.40	100	Vertical	Pass
2	1746.250	41.81	-12.61	74.0	32.19	Peak	29.50	100	Vertical	Pass
2**	1746.250	30.74	-12.61	54.0	23.26	AV	29.50	100	Vertical	Pass
3	2425.750	48.54	-5.18	74.0	25.46	Peak	302.90	100	Vertical	Pass
3**	2425.750	47.33	-5.18	54.0	6.67	AV	302.90	100	Vertical	Pass
4	2866.500	47.89	-4.15	74.0	26.11	Peak	227.40	100	Vertical	Pass
4**	2866.500	37.93	-4.15	54.0	16.07	AV	227.40	100	Vertical	Pass
5	4407.000	49.00	-2.08	74.0	25.00	Peak	51.40	100	Vertical	Pass
5**	4407.000	39.35	-2.08	54.0	14.65	AV	51.40	100	Vertical	Pass
6	5834.500	53.91	1.37	74.0	20.09	Peak	0.00	100	Vertical	Pass
6**	5834.500	43.20	1.37	54.0	10.80	AV	0.00	100	Vertical	Pass

Test result

Project Number: Test

Test Time: 2024-08-09_16.19.49

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX


Temp.(oC): 23.1

Load: Full load

Hum.: 46%RH

Remark: DR-RF01-E24060051-01#01

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

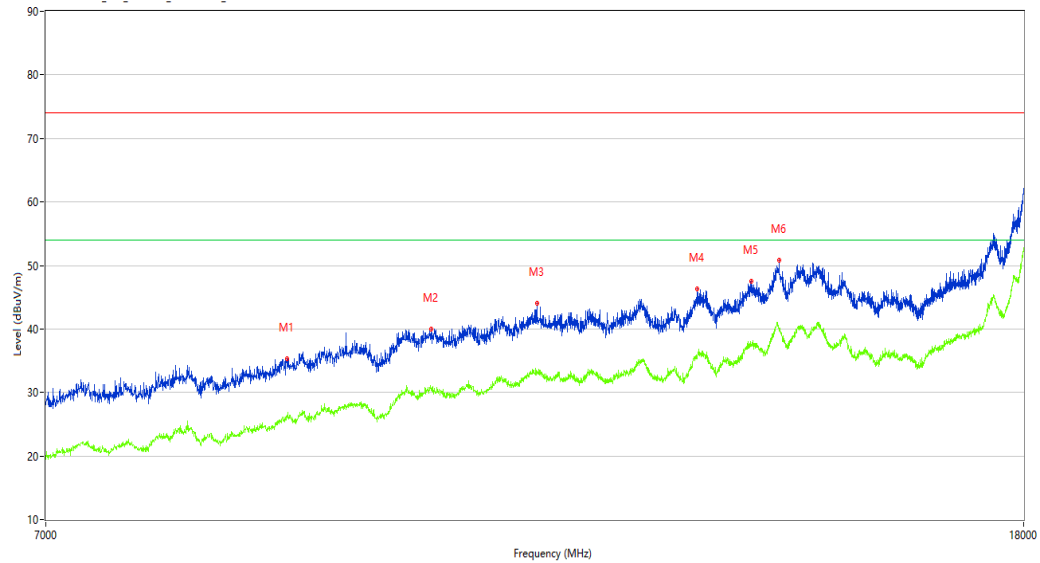

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8834.250	35.31	4.36	74.0	38.69	Peak	31.40	100	Vertical	Pass
1**	8834.250	26.07	4.36	54.0	27.93	AV	31.40	100	Vertical	Pass
2	10159.750	39.95	8.33	74.0	34.05	Peak	193.20	100	Vertical	Pass
2**	10159.750	30.52	8.33	54.0	23.48	AV	193.20	100	Vertical	Pass
3	11248.750	44.05	11.03	74.0	29.95	Peak	239.80	100	Vertical	Pass
3**	11248.750	33.33	11.03	54.0	20.67	AV	239.80	100	Vertical	Pass
4	13135.250	46.31	13.06	74.0	27.69	Peak	334.20	100	Vertical	Pass
4**	13135.250	35.60	13.06	54.0	18.40	AV	334.20	100	Vertical	Pass
5	13842.000	47.52	14.10	74.0	26.48	Peak	162.80	100	Vertical	Pass
5**	13842.000	37.40	14.10	54.0	16.60	AV	162.80	100	Vertical	Pass
6	14215.999	50.76	18.08	74.0	23.24	Peak	31.40	100	Vertical	Pass
6**	14215.999	39.93	18.08	54.0	14.07	AV	31.40	100	Vertical	Pass

Bandedge-2404MHz- Horizontal –TX

Test result

Project Number: Test

Test Time: 2024-08-12_09:55:50

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 23.6

Hum.: 44%RH

Test Engineer: SDC


Test Standard: FCC Part 15.247

Work Addition: TX

Load: Full load

Remark: DR-RF01-E24060051-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) bandedge 2400

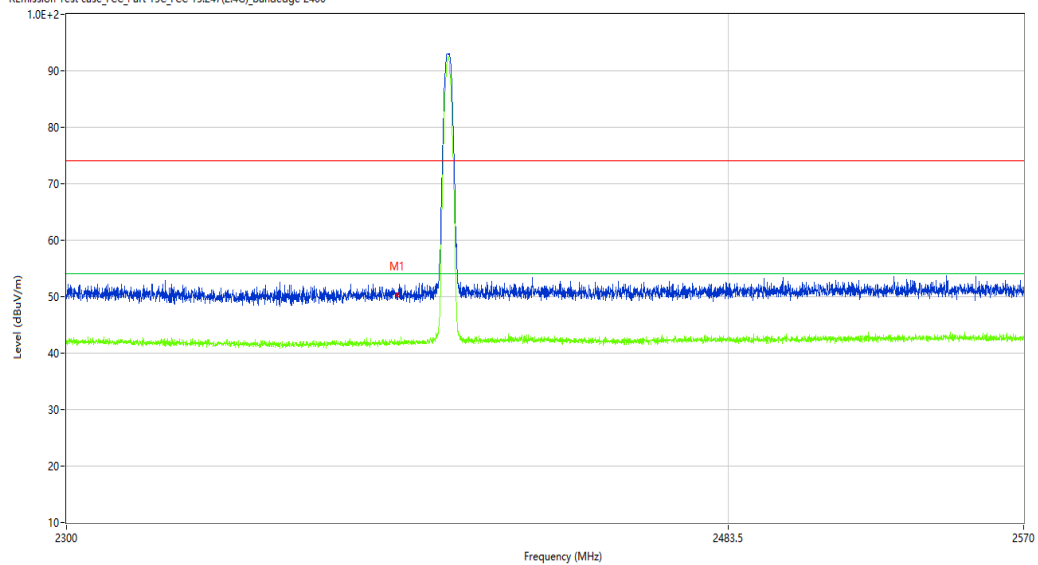

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.38	-10.27	74.0	23.62	Peak	125.08	100	Horizontal	Pass
1**	2390.000	42.01	-10.27	54.0	11.99	AV	125.08	100	Horizontal	Pass

Bandedge-2404MHz- Vertical -TX

Test result

Project Number: Test

Test Time: 2024-08-12_10.08.12

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 23.6

Hum.: 44%RH

Test Engineer: SDC


Test Standard: FCC Part 15.247

Work Addition: TX

Load: Full load

Remark: DR-RF01-E24060051-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) bandedge 2400

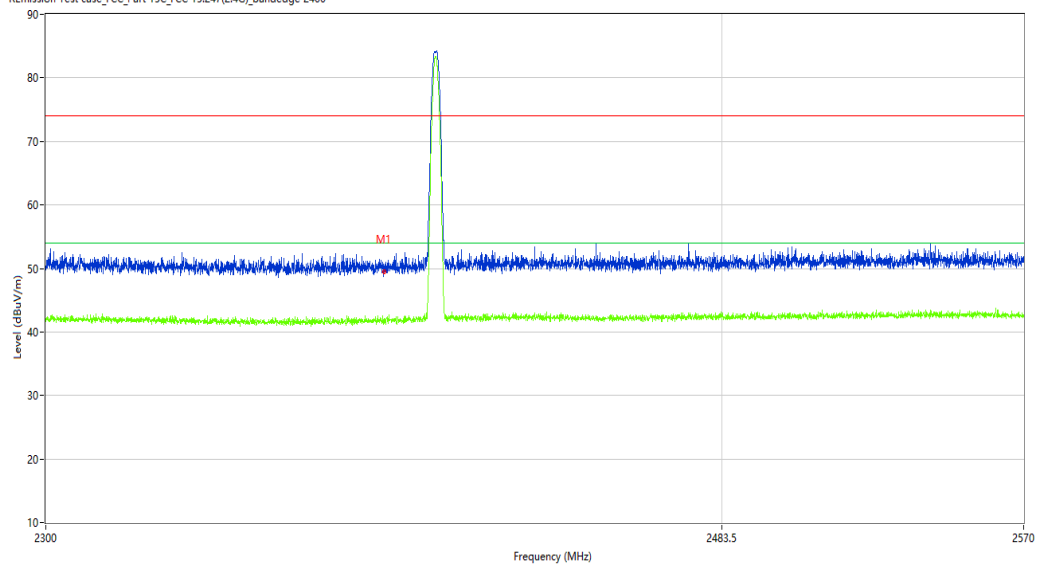

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	49.54	-10.27	74.0	24.46	Peak	180.44	100	Vertical	Pass
1**	2390.000	41.62	-10.27	54.0	12.38	AV	180.44	100	Vertical	Pass

Bandedge-2480MHz- Horizontal –TX

Test result

Project Number: Test

Test Time: 2024-08-12_09.58.23

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 23.6

Hum.: 44%RH

Test Engineer: SDC


Test Standard: FCC Part 15.247

Work Addition: TX

Load: Full load

Remark: DR-RF01-E24060051-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) bandedge 2400

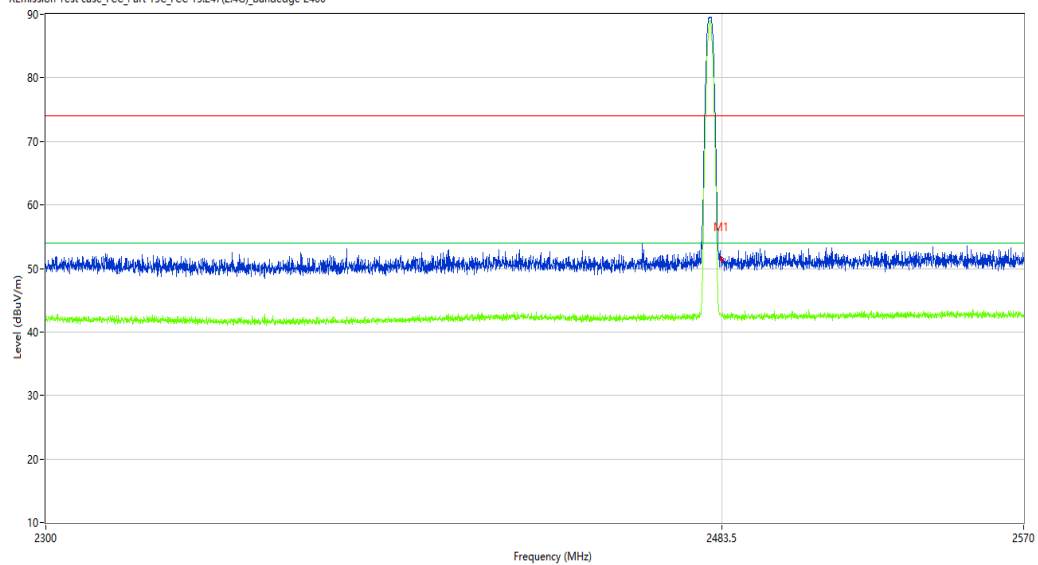

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.34	-9.82	74.0	22.66	Peak	25.77	100	Horizontal	Pass
1**	2483.500	42.55	-9.82	54.0	11.45	AV	25.77	100	Horizontal	Pass

Bandedge-2480MHz- Vertical –TX

Test result

Project Number: Test

Test Time: 2024-08-12_10.53.43

EUT Name: N.A

Test Engineer: SDC

Manufacturer: N.A

Test Standard: FCC Part 15.247

Model: N.A

Work Addition: TX


Temp.(oC): 23.6

Load: Full load

Hum.: 44%RH

Remark: DR-RF01-E24060051-01#01

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G) bandedge 2400

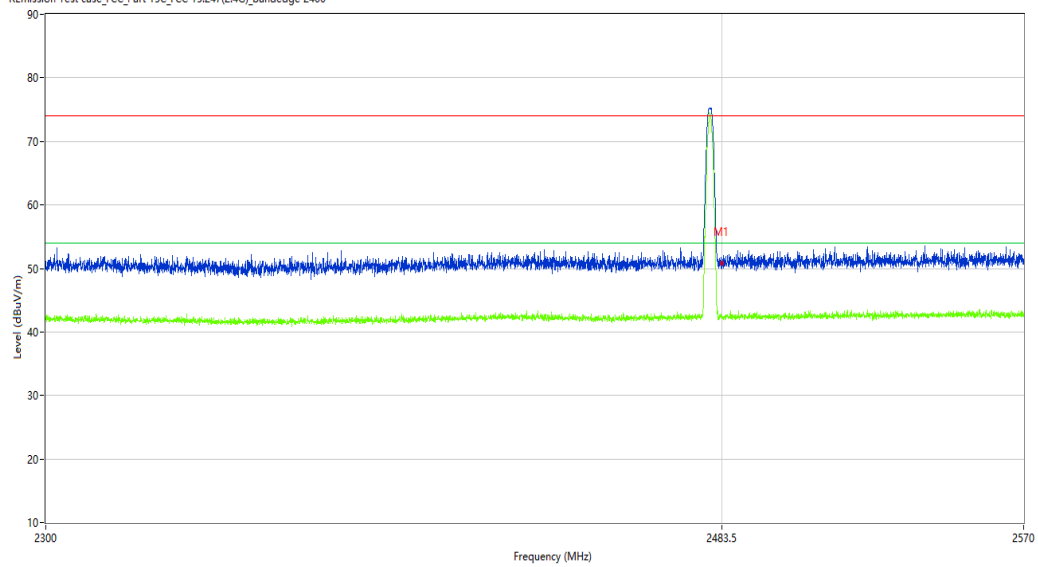

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	50.95	-9.82	74.0	23.05	Peak	171.48	100	Vertical	Pass
1**	2483.500	42.30	-9.82	54.0	11.70	AV	171.48	100	Vertical	Pass