






USER GUIDE




QUICK START GUIDE


BUTTON OVERVIEW

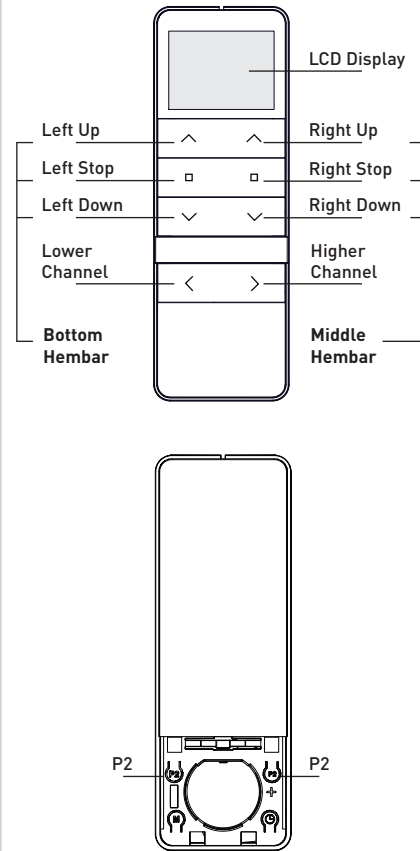

REPLACE BATTERY

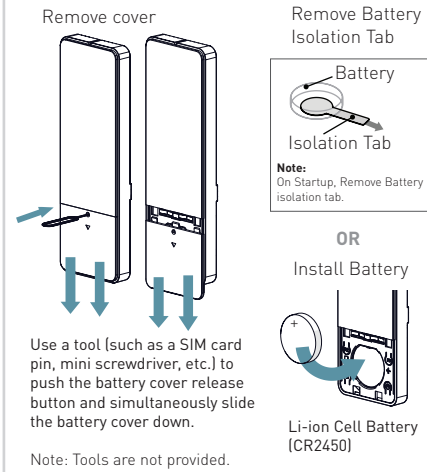


WALL MOUNTING

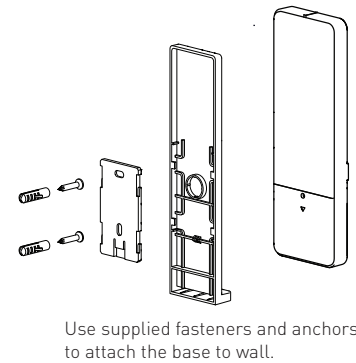

HIDE UNUSED CHANNELS


Hold both channel buttons "<" and ">" until 'C' appears on the screen.



Select the number of channels using the channel buttons "<" or ">".



Press **STOP** button to confirm, remote will display 'o' to confirm selection.



SELECTING A CHANNEL

STEP 1



Press left and right arrow; to scroll through channels as required.

STEP 2

READY FOR CONTROL

Now while the channel is active follow the control instructions.



If no button is pressed within 4 seconds, the channel selection will automatically be confirmed.



GROUP CONTROL

Channel "0" is pre-set to control ALL shades paired to your Multi-channel remote.




CONTROLLING A SHADE

CONTROL SHADE UP OR DOWN



While the channel is displayed press **▲** (Up) or **▼** (Down) to move shade accordingly

STOPPING THE SHADE




Press the corresponding **STOP** button to stop the hembar at any point.

Press and hold Left **STOP** for **2 seconds** to send shade to favorite position (if set).


DISABLE LIMIT SETTING

This mode is intended to be used after all shade programming is completed. User Mode will prevent accidental or unintended changing of limits.

Press & Hold the **Left STOP** button for **15 seconds** to lock/unlock the remote. The screen will display the U for Unlock or L for Lock.



Press **P2** button while L or U are displayed to confirm. The screen will confirm selection by displaying 'o'.



SET A FAVORITE POSITION


Repeating these steps after changing a favorite position will delete it.

Move Hembar to desired position by pressing **▲** (Up) or **▼** (Down) on the remote.



Move shade to desired position by adjusting hembar positions by pressing the corresponding **▲** (Up) and **▼** (Down) buttons on the remote.

STEP 1. Press P2 on controller



STEP 2. Press Left STOP on controller



STEP 3. Press Left STOP on controller




CREATE CUSTOM GROUPS

It is possible to copy one channel to another channel to create custom groups




Select the channel you want to transfer

STEP 1. Press P2 on existing controller



STEP 2. Press P2 again on existing controller




Step 3 to be completed within 4 seconds of Step 2



Select the channel on the new controller

STEP 3. Press P2 on new controller



ADVANCED PROGRAMMING

USER GUIDE

REV		DRAWN BY		PROJECT	DATE
1.0		QSG created		PV	PCR-26006 30 APR 2026

57mm

155mm

TBDU

QUICK START GUIDE

L

M2

M1

R

M2

M1

!

WARNING: Important safety instructions to be read before

Incorrect use can lead to serious injury and will void manufacturer's liability and warranty. It is important for the safety of persons to follow the enclosed instructions.

• Before using the device, read the online instruction manual carefully to understand its proper use and maintenance.

• Do not expose to water, moisture, humid and damp environments or extreme temperatures.

• Do not allow children to play with this device. Persons with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, should not be allowed to use this product.

• Installation and programming to be performed by a suitably qualified installer.

• Before installation, remove unnecessary cords and disable equipment not needed for powered operation.

• Use of modification outside the scope of this instruction manual will void warranty.

• Ensure the power cable and aerial is clear and protected from moving parts.

• Cable routed through walls should be properly isolated.

• For use with motorized shading devices.

• Frequently inspect for improper operation.

• Do not use If the power cable or connector is damaged,

• Do not use if repair or adjustment is necessary.

• Keep clear when shade is in operation.

For manuals, app downloads and additional resources, scan the QR code.

Learn more at:
automateshades.com/automate-controller-support/

FCC & ICES Statement

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Cauton: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : 1) L'appareil ne doit pas produire de brouillage; 2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off - and on, the user is encouraged to try to correct the interference by one or more of the following measures:

• Reorient or relocate the receiving antenna.

• Increase the separation between the equipment and receiver.

• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

• Consult the dealer or an experienced radio/TV technician for help.

FCC ID: 2AGGZ003B9ACA61

IC: 21769-003B9ACA61

Do not dispose of in general

FC

CAN ICES-3 (B)/NMB-3(B)

ROLLEASE ACMEDA®	DRAWN BY:	P. VITALE	DRAWN DATE:	30 APR 2026		TITLE: CBG TDBU END CAP			
	APPROVED BY:	PRODUCT MANAGER	PROJECT LEAD	COMPLIANCE ENGINEER		PART NUMBER: MT01-3101-069XXX_QUICKSTARTGUIDE			
	PROPRIETARY & CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ROLLEASE ACMEDA. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ROLLEASE ACMEDA IS PROHIBITED.					DRAWING NUMBER: MT01-3101-069XXX_QUICKSTARTGUIDE			SIZE: A4
						© COPYRIGHT 2026	DO NOT SCALE	DIMENSIONS IN MILLIMETERS	DWG 1 OF 1

	DRAWN BY:	P. VITALE	DRAWN DATE:	30 APR 2026	TITLE: CBG TDBU END CAP				
	APPROVED BY:	PRODUCT MANAGER	PROJECT LEAD	COMPLIANCE ENGINEER	PART NUMBER: MT01-3101-069XXX_QUICKSTARTGUIDE				
	PROPRIETARY & CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ROLLEASE ACMEDA. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ROLLEASE ACMEDA IS PROHIBITED.				DRAWING NUMBER: MT01-3101-069XXX_QUICKSTARTGUIDE			SIZE: A4	
	 COPYRIGHT 2026		DO NOT SCALE		DIMENSIONS IN MILLIMETERS		DWG 1 OF 1	REV. 1.0	