

**Guide**  
Ver.01

# BLE\_WiFi Gateway iGS01S User Guide

iGS01S is a bridge to connect the local BLE devices, sensors, or beacons to the internet by the WiFi. Through an easy web UI interface, one can configure the internet connection to a general cloud server, like TCP, HTTP(S), or MQTT. Management through the cloud to the BLE devices becomes simple through iGS01S. This guide is to help the user to figure out how to operate and configure the iGS01S.

## Contents

[Contents](#)

[Overview](#)

[Inside the box](#)

[WiFi](#)

[BLE](#)

[Input and Output](#)

[Multi-function button](#)

[WPS](#)

[Reset to Default](#)

[Firmware Upgrade](#)

[LEDs](#)

[Create Connection](#)

[Web User Interface](#)

[Wi-Fi](#)

[Simple AP](#)

[Station](#)

[Network](#)

[AP Client Setting](#)

[AP Server Setting](#)

[Applications](#)

[M2M TCP Server](#)

[M2M TCP Client](#)

[HTTP Client](#)

[Request Interval](#)

[Throttle Control](#)

[MQTT Client](#)

[MQTTS](#)

[Advanced](#)

[BLE Filter](#)

[RSSI](#)

[Payload Whitelist](#)

[Device Key/Certification Update](#)

[System](#)


[NTP setting](#)

[Revision History](#)



## Overview

The iGS01S gateway reads beacons(like iBeacon or Eddystone), customized tags, or BLE sensors and sends the information to the local TCP server or internet HTTP or MQTT server. User can configure the transmit period and server information through a simple web UI. Below is the typical application diagram of iGS01S.

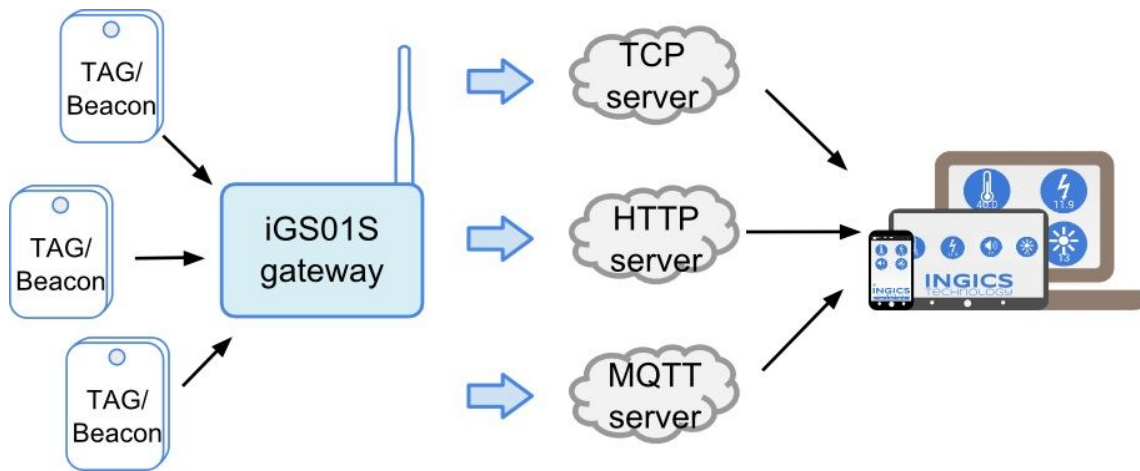

## Inside the box



There are one iGS01S unit, one 1M USB cable, and one 2dBi dipole antenna included in one full shipping package. iGS01S is powered by a standard micro-USB cable, rated at 5V&500mA. You can power this device with a standard smartphone charger or the USB port of any host device that can support 500mA or above.

## WiFi

For WiFi connection, it provides two modes -- Access Point mode(AP mode) and Station mode. In AP mode, it acts as a simple AP supporting DHCP. The main purpose of this mode is for configuration. In Station mode, it is a client device keeps trying to join to the AP in your home or office. After joining the AP,

the gateway can bridge your BLE devices to the local TCP server of cloud server for management.

## BLE

BLE is normally in listening mode. It collects the messages advertised by other BLE devices. These messages are then transferred to WiFi and sent to the cloud server configured by the user. The packet format sent to the cloud server as below:

```
$<report type>,<tag id>,<gateway id>,<rssi>,<raw packet content>,*<unix epoch timestamp>\r\n
```

examples:

```
$GPRP,CCB97E7361A4,CB412F0C8EDC,-49,1309696773206D65736820233220285445535429020106
```

```
$GPRP,E5A706E3923A,CB412F0C8EDC,-87,0201041AFF590002150112233445566778899AABBCCDDEEFF0000100C3BB
```

\*Note:

When NTP is enabled, a timestamp field is added to the packet. Check System section for the NTP setting.

|                        |                                                                     |
|------------------------|---------------------------------------------------------------------|
| <report type>          | GPRP: general purpose report .<br>SRRP: active scan response report |
| <tag id>               | MAC address or ID of tag/beacon                                     |
| <gateway id>           | MAC address of gateway's BLE                                        |
| <rssi>                 | RSSI of tag/beacon                                                  |
| <raw packet content>   | Raw packet received by the gateway                                  |
| <unix epoch timestamp> | Optional timestamp when NTP is enabled                              |

## Input and Output

### Multi-function button

One multi-function button is on one side of the iGS01S as the figure showed.



It is used to act WPS, reset to default settings, and OTA (over-the-air FW upgrade). Below is how it functions.

| Function                  | Mode    | Trigger Condition                                  |
|---------------------------|---------|----------------------------------------------------|
| WPS                       | Station | short press for over 1sec and release              |
| Reset to default settings | Any     | long press for over 5 sec                          |
| OTA                       | Boot up | press then power on, keep pressing till LEDs flash |

## WPS

iGS01S support WPS to connect to your Access Point. First press the WPS button on your Access Point, when it ready, then press the WPS button on the iGS01S device( the WPS button need to be pressed for over 1 sec) to join it.

## Reset to Default

In case you need to go back to the original settings, keep pressing the reset/default button in your device for over 5 secs no matter in which mode the device is. The WiFi LED will be turned off and when you release the button, the iGS01S will reboot to its default settings(AP mode).

## Firmware Upgrade

Check [AP002\\_iGS01\\_Firmware\\_Upgrade](#) for details.

## LEDs

There are two LEDs to indicate current status like the right figure. The upper one is BLE LED and the lower one is WiFi LED. Below is their behaviors.

|          | On                                                                                    | Flash                                                                                       |
|----------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| BLE LED  | find tag/beacon in range                                                              | BLE transmission happening                                                                  |
| WiFi LED | AP mode: AP is ready for connect<br>Station mode: connect to assigned AP successfully | WiFi transmission happening<br><br>The device quickly blinking while joining AP during boot |



## Create Connection



iGS01S is in Access Point(AP) mode defaultly. If you have no idea what mode currently it is in, please press the multi-function button to reset it to the default state. In AP mode, you could scan and connect it with the WiFi of your NB/PC/Mac/Tablet/Smartphone. It's name is just like above figure with part of the mac address. The default key to connect with it is “**12345678**”. You can change it later when you get into the web UI.

After connection, enter IP address **192.168.10.1** in your browser. The default account/password are both “**admin**”. You can change the password later. In web UI, any change need to be saved first. After all changes made, click reboot to make the changes effective. When In Station mode, the IP address of the iGS01S is assigned by the the other AP. To get into the web UI, you have to find the assigned IP address. The following sections describe details of the web UI.

## Web User Interface

### Wi-Fi

iGS01S can work in Simple AP mode and Station mode. These modes and the related settings can be managed in this page.

#### Simple AP

**SSID:** The default name is BLE-WiFi plus the last digits of the mac address. It's configurable by user.

**Security Protocol:** Open, WPA TKIP, WPA AES, WPA2 TKIP, WPA2 AES are supported. WPA2 AES is recommended.

**Security Key:** 8-63 characters can be input

**Channel:** 1~11(ch12 and ch13 could be

A screenshot of the web user interface for configuring Wi-Fi settings. At the top is a navigation bar with tabs: BLE-WIFI, Wi-Fi (selected), Network, Applications, System, and Reboot. Below the tabs, the page is titled "Wi-Fi". There is a "Wi-Fi Mode" dropdown menu set to "Simple AP". Under the "AP Server Setting" section, there are four fields: "SSID" with the value "BLE-WIFI\_86\_27", "Security protocol" with a dropdown set to "WPA2 AES", "Security key" with the value "12345678", and "Channel" with a dropdown set to "6". At the bottom right of the form are two buttons: "Save" (blue) and "Cancel" (light blue).

supported by request)

## Station

**Scan:** Click it to scan available APs.

**Site Survey:** The scan result is listed here and user can choose the correct AP from the list. The WiFi channel of the AP is also listed.

**SSID:** No manual input required. It is automatically filled once user choose an AP from the scan list.

**Security Protocol:** Basically it is automatically detected and selected after choosing an AP from the scan list. But in case the AP setting is in WEP open or WEP shared, user has to confirm it by himself.

**Security Key:** Type the one assigned in your AP.

## Network

### AP Client Setting

This setting is mainly for Station mode. Normally DHCP client is enabled to join a WiFi AP w/ DHCP. If one wants to manually assign an IP address for iGS01S, the DHCP client should be disabled. Once disabled, user should assign the IP, Netmask, Gateway, and/or DNS server.

### AP Server Setting

This setting is for AP mode. The default IP address of iGS01S in AP mode is 192.168.10.1 and the netmask is 255.255.255.0. In case the user want to change the IP address in AP mode, just set the IP and Netmask here. The corresponding DHCP client address will be changed too. For example, if the DHCP server IP address is changed to 192.168.0.1, the DHCP clients associated to iGS01S AP will be 192.168.0.X.

## Applications

### M2M TCP Server

iGS01S is a TCP server with fixed IP address 192.168.10.1. The default port is 8080 and user can also assign the port.

### M2M TCP Client

If there is already a TCP server, one can set iGS01S as a TCP client to communicate with the server. Enter the address and port number of the TCP server to connect them.

### HTTP Client

Another connection in application is through setting iGS01S as a HTTP client. In this scenario, one has to assign the HTTP host address and port number. Also the url path is necessary to bring the BLE data to the HTTP server through the gateway.

The screenshot shows the 'Applications' tab in the iGS01S configuration interface. The 'Application' dropdown is set to 'M2M'. The 'Connection Type' dropdown is set to 'TCP Server'. The 'Server Port' text box contains the value '8080'. There are 'Save' and 'Cancel' buttons at the bottom.

The screenshot shows the 'Applications' tab in the iGS01S configuration interface. The 'Application' dropdown is set to 'M2M'. The 'Connection Type' dropdown is set to 'TCP Client'. The 'Client Destination Host/IP' text box contains the value '192.168.1.1'. The 'Client Destination Port' text box contains the value '8080'. There are 'Save' and 'Cancel' buttons at the bottom.

The screenshot shows the 'Applications' tab in the iGS01S configuration interface. The 'Application' dropdown is set to 'HTTP Client'. The 'Host/IP' text box contains the value 'api.example.com'. The 'Port' text box contains the value '80'. The 'Force HTTPS' checkbox is unchecked. The 'URL Path' text box contains the value '/api/post/endpoint'. The 'Keep-Alive' checkbox is checked. The 'Username' text box contains the value 'optional username'. The 'Password' text box contains the value 'optional password'. The 'Extra Header' text box contains the value 'optional extra header'. The 'Extra Header Value' text box contains the value 'optional extra header value'. The 'Request Interval (in secs)' text box contains the value '0'. The 'Throttle Control (filter out redundant records)' checkbox is unchecked. There are 'Save' and 'Cancel' buttons at the bottom.

Some HTTP servers may need username and password. The others may need extra header and value.

## Force HTTPS

Check it to use HTTPS. No matter which port is used, it will be HTTPS

## Keep-Alive

Check it to enable http keepalive which will improve network throughput.

## Request Interval

One can also assign the request interval to upload the data to the HTTP server. This is useful and it can reduce the HTTP connections. When the interval is set as 0, the data will be sent immediately. When it is set as a non-zero value in second, the data will be sent whenever the buffer is full or the time interval is reached.

## Throttle Control

If user select to enable throttle control, iGS01S will keep the last record for each TAG/Beacon ID in the given interval(request interval). In this way, one can reduce the upload connections to the HTTP server.

## MQTT Client

MQTT server is supported by the iGS01S. In this scenario, one has to assign the MQTT host address and port number. Also the publish topic need to be assigned. Client ID is defaultly assigned as the gateway name with part of MAC address, user can change it as well. If Client ID is not set, system will generate a random number for it. Username and password are optional.

## MQTTS

User can enable MQTTS support. User can also enable RootCA/Use Certificate based on

The screenshot displays the 'Applications' tab in the iGS01S configuration interface. The 'MQTT Client' application is selected. The configuration fields are as follows:

- Application: MQTT Client (dropdown)
- Host/IP: api.example.com
- Port: 1883
- Publish Topic: publish\_out
- Client ID: BLE-WIFI\_D3\_11
- Username: username
- Password: password
- MQTTS: Disable (dropdown)
- Root CA: No Root CA (dropdown)
- Use Certificate: Disable (dropdown)
- Request Interval (in secs): 0
- Throttle Control (filter out redundant records): ☐

At the bottom, there are 'Save' and 'Cancel' buttons.

the server requirement. For example, to enable AWS-IOT, the user has to enable MQTTS/ROOT CA/ Use Certificate options and upload certificate and private key in advanced page.

Request Interval and Throttle Control, please refer to HTTP client.

## Advanced

There are several features in this page can help user to deal with the incoming BLE packet.

### BLE Filter

User can set BLE filter to filter out the unwanted BLE information. There are two kind of filters. One is by BLE RSSI value and the other is by pattern/mask combination.

#### RSSI

If the bar is pulled right to -50dBm, only the BLE tag/beacon with RSSI larger than or equal to -50dBm(say -45dBm) will be sent out to the server.

#### Payload Whitelist

Two sets of payload mask are provided for filtering the unwanted beacon. Set pattern/mask fields to configure the whitelist.

If payload & mask != pattern & mask, the entry will be filtered out.

Some examples are provided in *AP007\_iGS01\_payload\_filter*.

### Device Key/Certification Update

User can upload certification and key here.

This is used by MQTTS. AWS-IOT users must upload the certificate and private key here to publish data to AWS-IOT.

BLE-WIFI Wi-Fi Network Applications **Advanced** System Reboot

BLE Filter

RSSI  -100 dBm

Payload Pattern

Payload Mask

Payload Pattern 2

Payload Mask 2

Save Cancel

Device Key/Certificate Update

選擇檔案 未選擇任何檔案

Upload Certificate

Certificate Clear Certificate

選擇檔案 未選擇任何檔案

Key Upload Key Clear Key

## System

Firmware and device information, including MAC address and IP address in station mode are shown here. The web UI password can also be changed here(the username is fixed as “admin”).

### NTP setting

User can enable the NTP to add the timestamp information in the BLE package format as stated in page. 3. User has to set the time server and the update period of the NTP. Remember to save the setting and reboot to make the setting effective.

The screenshot displays the 'System' tab of the web UI. At the top, a navigation bar includes links for BLE-WIFI, Wi-Fi, Network, Applications, Advanced, System (selected), and Reboot. The main content area shows the following information:

- Firmware Revision: IGS01S-v0.9.2
- MAC: B0:38:29:42:D3:11
- BLE MAC: FD10E6AD93D5
- Station IP: 0.0.0.0

Below this information is a 'Change Password' section with two input fields for 'Current Password' and 'New Password', and a 'Change Password' button. Further down is the 'NTP Setting' section, which includes:

- 'Enable NTP' set to 'Enable' (via a dropdown menu).
- 'Time Server' set to 'pool.ntp.org' (via an input field).
- 'Update Period' set to '1 day' (via a dropdown menu).

At the bottom of the NTP settings are 'Save NTP Setting' and 'Cancel' buttons. A 'Logout' button is located at the very bottom of the page.

## Revision History

| DATE         | REVISION | CHANGES         |
|--------------|----------|-----------------|
| Apr 16, 2018 | 01       | Initial release |

## Statement

### Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures: . Reorient or relocate the receiving antenna. . Increase the separation between the equipment and receiver. . Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. . Consult the dealer or an experienced radio/TV technician for help.

**FCC Caution:** To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example - use only shielded interface cables when connecting to computer or peripheral devices).

**FCC Radiation Exposure Statement** This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

### Industry Canada Statement

This device complies with Industry Canada licence-exempt RSS standard. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

### IC Radiation Exposure Statement

This equipment complies with IC RSS-102 radiation exposure limit set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

Cet équipement est conforme aux CNR-102 d'Industrie Canada. Cet équipement doit être installé et utilisé avec une distance minimale de 20 centimètres entre le radiateur et votre corps. Cet émetteur ne doit pas être co-localisées ou opérant en conjonction avec autre antenne ou émetteur. Les antennes utilisées pour cet émetteur doivent être installés et fournir une distance de séparation d'au moins 20 centimètre de toute personne et doit pas être co-située ni fonctionner en conjonction avec une autre antenne ou émetteur.

### NCC 警語

#### 第十二條

經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

#### 第十四條

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前項合法通信，指依電信法規定作業之無線電通信。

低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

電磁波曝露量MPE標準值1mW/cm<sup>2</sup>，送測產品實測值 0.0103mW/cm<sup>2</sup>。

## iGS01S Specification

### BLE to WiFi Beacon Gateway

iGS01S is a BLE to WiFi gateway and bridge. The gateway reads iBeacon and Eddystone like beacon or customized Tag( w/ sensor) format and sends to local TCP server or internet HTTP/MQTT server. User can configure the transmit period and server information through a simple web UI.



### Features

- Size: 55mmx41mmx18mm(antenna not included)
- Input: 5V, 500mA, micro-USB
- Operating temperature: -20°C to 60°C
- Low power consumption, 80mA typical working current
- Over-The-Air software upgrade
- Reads multiple BLE devices in the same time
- Support TCP/HTTP(s)/MQTT(s) server

#### BLE

- Bluetooth Smart( BLE) is based on INGICS nBLE822
- Bluetooth with on board PCB antenna
- Bi-direction: Reads message advertised from BLE devices and/or advertise command to BLE devices(not standard, by request)
- 30M range in open space


#### WiFi

- Support 802.11b/g/n(single stream)
- 2.4GHz frequency band
- Transmit power:
  - +17dBm @802.11b
  - +13dBm @802.11g
  - +11dBm @802.11n
- WiFi data rate up to 72.2Mbps
- WiFi with 2dBi dipole Antenna
- Web based UI for configuration
- Connect to Cloud server or local server
- 100M range in open space

### Applications


- iBeacon/Eddystone/tag receiver for location tracking
- BLE sensor reader for sensor network
- Building automation
- Health and wellness monitoring
- Cycling, biking
- Security
- Location tracking
- Access management
- Advertisement
- Industrial automation

### Block Diagram

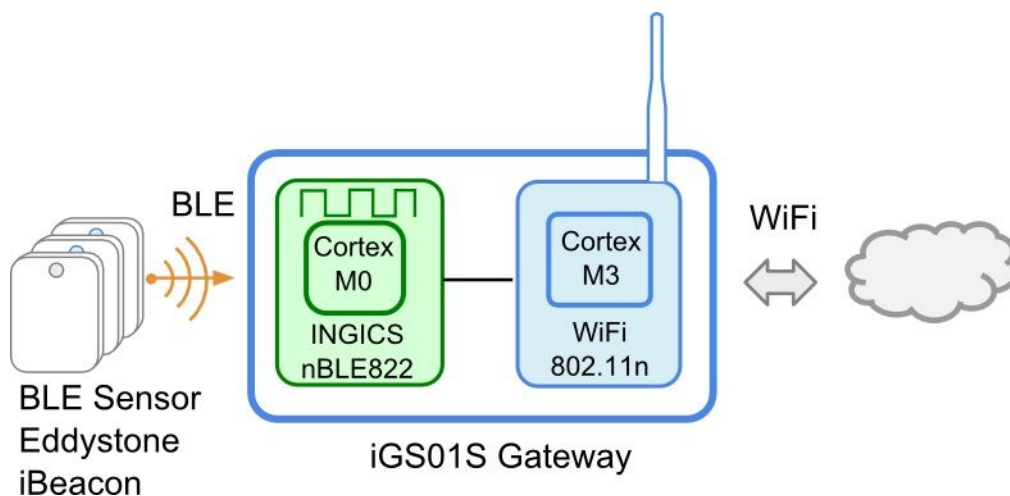


## Typical Applications

### 1. Collecting BLE sensor data and sending to cloud server

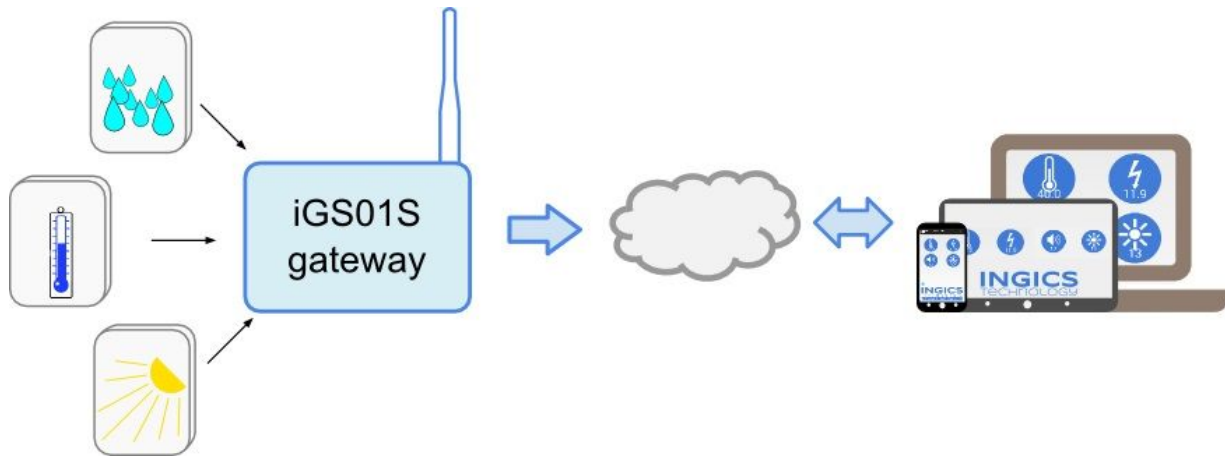

### 2. Location Tracking with different kinds of server in the internet or cloud

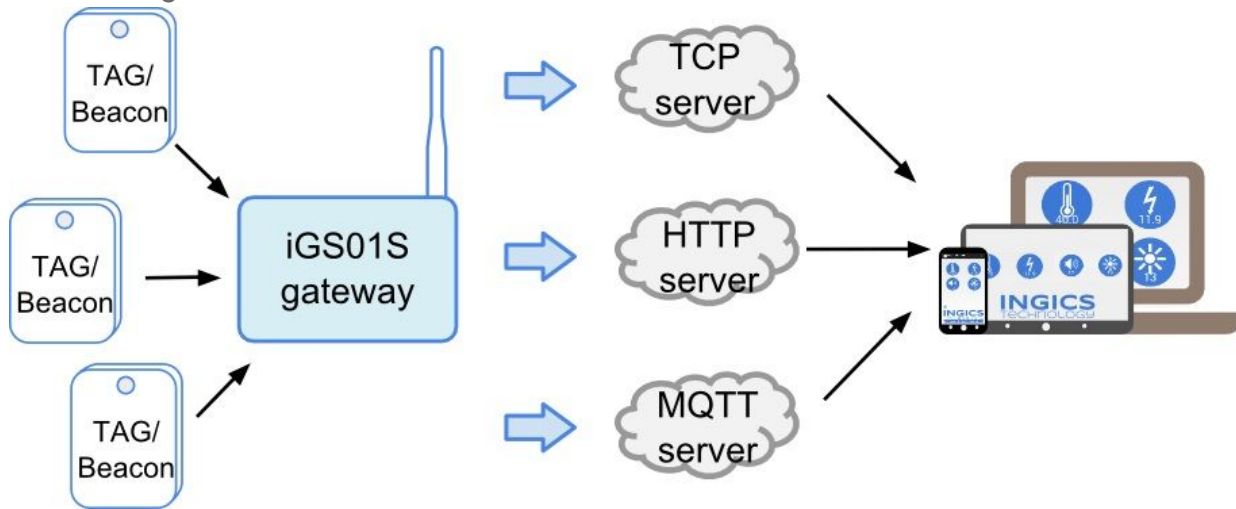

## Specification

### Absolute Maximum Rating

|                     |                     |
|---------------------|---------------------|
| Supply Power        | Max. +5.5 Volt      |
| Storage Temperature | -40° to 85° Celsius |
| Voltage Ripple      | +/-5%               |

### Recommendable Operation Condition

|                       |                                            |
|-----------------------|--------------------------------------------|
| Operating Temperature | -20° to 60° Celsius                        |
| Humidity              | Max 95%, Non condensing, relative humidity |
| VDD                   | +5 Volt +/- 5%                             |

## Current Consumption

|                                                 |                                |
|-------------------------------------------------|--------------------------------|
| Working mode<br>(reads BLE and sends to server) | Max.: 436 mA<br>Average: 83 mA |
|-------------------------------------------------|--------------------------------|

## WiFi RF Specification

|                                            |                                                                                                                         |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Wireless                                   | IEEE 802.11b/g/n(single stream)                                                                                         |
| Network modes                              | infrastructure, Ad-Hoc                                                                                                  |
| Data rate                                  | IEEE 802.11b, 1-11Mbps<br>IEEE 802.11g, 6-54Mbps<br>IEEE 802.11n(2.4GHz), 7.2-72.2 Mbps                                 |
| Frequency band                             | 2.400 – 2.484 GHz                                                                                                       |
| Number of selectable Sub channels          | 14 channels ( only use 11 channels be default)                                                                          |
| Channel Bandwidth                          | 20MHz( no support to 40MHz)                                                                                             |
| Modulation                                 | OFDM, DSSS (Direct Sequence Spread Spectrum), DBPSK, DQPSK, CCK , 16QAM, 64QAM                                          |
| Maximum receive input level                | - 10dBm (with PER < 8%@11 Mbps)<br>- 20dBm (with PER < 10%@54 Mbps)<br>- 20dBm (with PER < 10%@MCS7)                    |
| Minimum receive input level                | - 87dBm (typ. with PER < 8%@11 Mbps)<br>- 70dBm (typ. with PER < 10%@54 Mbps)<br>- 70dBm (typ. with PER < 10%@MCS7)     |
| Transmit Power<br>(including antenna gain) | 17dBm (typical), 18dBm(max.)@ 802.11b<br>14dBm (typical), 15dBm(max.)@ 802.11g<br>13dBm (typical), 14dBm(max.)@ 802.11n |
| Carrier Frequency Accuracy                 | +/- 20ppm (crystal: 26MHz +/-10ppm in 25°C)                                                                             |
| Antenna                                    | 2dBi dipole antenna                                                                                                     |
| Range                                      | up to 100M meters( in open area)                                                                                        |
| Security                                   | WPA/WPA2                                                                                                                |

## BLE RF Specification

|                                               |                                                        |
|-----------------------------------------------|--------------------------------------------------------|
| Transmit Power                                | Max.: 4dBm                                             |
| RF Power Accuracy                             | +/- 4 dB                                               |
| Receiver Sensibility                          | -96 dBm @250kbps, 0.1% BER<br>-90 dBm @1Mbps, 0.1 %BER |
| Maximum Received Signal Strength at <0.1% PER | 0dBm                                                   |
| Frequency Deviation                           | +250 kHz @BLE                                          |

|         |                      |
|---------|----------------------|
| Antenna | on board PCB antenna |
| Range   | 30M in open space    |

## Dimension


|                           |                                             |
|---------------------------|---------------------------------------------|
| Dimensions L x W x H (mm) | 55 x 41 x 18 (not including dipole antenna) |
|---------------------------|---------------------------------------------|

## Packing

Each iGS01S has it's accessory including a dipole antenna and micro-USB cable.



Two packing boxes(size: 11cmX5.5cmx6.5cm) contains 5 units of iGS01S and accessories.

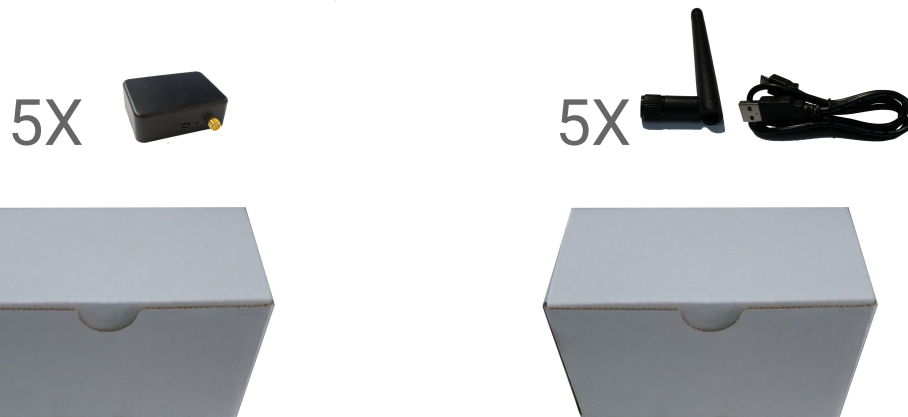

## Revision History

| DATE         | REVISION | CHANGES         |
|--------------|----------|-----------------|
| Apr 16, 2018 | 01       | Initial release |

## Statement

### Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures: . Reorient or relocate the receiving antenna. . Increase the separation between the equipment and receiver. . Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. . Consult the dealer or an experienced radio/TV technician for help.

**FCC Caution:** To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example - use only shielded interface cables when connecting to computer or peripheral devices).

**FCC Radiation Exposure Statement** This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

### Industry Canada Statement

This device complies with Industry Canada licence-exempt RSS standard. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

### IC Radiation Exposure Statement

This equipment complies with IC RSS-102 radiation exposure limit set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

Cet équipement est conforme aux CNR-102 d'Industrie Canada. Cet équipement doit être installé et utilisé avec une distance minimale de 20 centimètres entre le radiateur et votre corps. Cet émetteur ne doit pas être co-localisées ou opérant en conjonction avec autre antenne ou émetteur. Les antennes utilisées pour cet émetteur doivent être installés et fournir une distance de séparation d'au moins 20 centimètre de toute personne et doit pas être co-située ni fonctionner en conjonction avec une autre antenne ou émetteur.

### NCC 警語

#### 第十二條

經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

#### 第十四條

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前項合法通信，指依電信法規定作業之無線電通信。

低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾

電磁波曝露量MPE標準值1mW/cm<sup>2</sup>，送測產品實測值 0.0106mW/cm<sup>2</sup>。