TEST REPORT

Product Name	:	Keilton LED controller
Brand Mark	:	Keilton
Model No.	:	CS107S
FCC ID	:	2A26YCS107S
Report Number	:	BLA-EMC-202211-A8502
Date of Sample Receipt	:	2022/11/30
Date of Test	:	2022/12/4 to 2022/12/14
Date of Issue	:	2022/12/15
Test Standard	:	47 CFR Part 15, Subpart C 15.247
Test Result	:	Pass

Prepared for:

Shenzhen LiteTrace Technologies Co., Ltd
F5, Bld 1, Hongtu Industry Park, Hezhou, Hangcheng, Baoan District, Shenzhen China

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by: charlie

Review by: Sweels

Approved by: Blue.Zheng

Date: 2022/12/15

BlueAsia of Technical Services(Shenzhen) Co., Ltd. BLA

REPORT REVISE RECORD

Version No.	Date	Description
00	2022/12/15	Original

BlueAsia

TABLE OF CONTENTS

1 TEST SUMMARY **5**

2 GENERAL INFORMATION **6**

3 GENERAL DESCRIPTION OF E.U.T. **6**

4 TEST ENVIRONMENT **7**

5 TEST MODE **7**

6 MEASUREMENT UNCERTAINTY **7**

7 DESCRIPTION OF SUPPORT UNIT **8**

8 LABORATORY LOCATION **8**

9 TEST INSTRUMENTS LIST **9**

10 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ) **11**

10.1 LIMITS 11
10.2 BLOCK DIAGRAM OF TEST SETUP 11
10.3 PROCEDURE 11
10.4 TEST DATA 13

11 CONDUCTED BAND EDGES MEASUREMENT **15**

11.1 LIMITS 15
11.2 BLOCK DIAGRAM OF TEST SETUP 15
11.3 TEST DATA 16

12 RADIATED SPURIOUS EMISSIONS **17**

12.1 LIMITS 17
12.2 BLOCK DIAGRAM OF TEST SETUP 18
12.3 PROCEDURE 18
12.4 TEST DATA 20

13 ANTENNA REQUIREMENT **28**

13.1 CONCLUSION 28

14 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS **29**

14.1 LIMITS 29
14.2 BLOCK DIAGRAM OF TEST SETUP 30
14.3 PROCEDURE 30
14.4 TEST DATA 32

BlueAsia

15 CONDUCTED SPURIOUS EMISSIONS 36

15.1 LIMITS 36

15.2 BLOCK DIAGRAM OF TEST SETUP 36

15.3 TEST DATA 37

16 POWER SPECTRUM DENSITY 38

16.1 LIMITS 38

16.2 BLOCK DIAGRAM OF TEST SETUP 38

16.3 TEST DATA 38

17 CONDUCTED PEAK OUTPUT POWER 39

17.1 LIMITS 39

17.2 BLOCK DIAGRAM OF TEST SETUP 39

17.3 TEST DATA 40

18 MINIMUM 6DB BANDWIDTH 41

18.1 LIMITS 41

18.2 BLOCK DIAGRAM OF TEST SETUP 41

18.3 TEST DATA 41

19 APPENDIX 42

19.1 MAXIMUM CONDUCTED OUTPUT POWER 42

19.2 -6DB BANDWIDTH 46

19.3 OCCUPIED CHANNEL BANDWIDTH 50

19.4 BAND EDGE 58

19.5 CONDUCTED RF SPURIOUS EMISSION 63

APPENDIX A: PHOTOGRAPHS OF TEST SETUP 70

APPENDIX B: PHOTOGRAPHS OF EUT 72

BlueAsia

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass

BlueAsia

2 GENERAL INFORMATION

Applicant	Shenzhen LiteTrace Technologies Co., Ltd
Address	F5, Bld 1, Hongtu Industry Park, Hezhou, Hangcheng, Baoan District, Shenzhen China
Manufacturer	Shenzhen LiteTrace Technologies Co., Ltd
Address	F5, Bld 1, Hongtu Industry Park, Hezhou, Hangcheng, Baoan District, Shenzhen China
Factory	N/A
Address	N/A
Product Name	Keilton LED controller
Test Model No.	CS107S

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	1.0
Software Version	1.0

Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Data Rata	1Mbps; 2Mbps
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	PCB Antenna
Antenna Gain:	2dBi(Provided by the customer)

BlueAsia

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25℃	DC3.3V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode
Remark:Only the data of the worst mode would be recorded in this report.For Radiated emission，1Mbps and 2Mbps mode all have been tested，only worse case 1Mbps mode is reported.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Unwanted Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Unwanted Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

BlueAsia

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

BlueAsia

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Chamber 2	SKET	966	N/A	2021/07/20	2024/07/19
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
Receiver	R&S	ESPI7	101477	2022/07/16	2023/07/15
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2022/07/16	2023/07/15
Amplifier	SKET	PA-000318G-45	N/A	2022/09/13	2023/09/12
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2022/07/14	2023/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2022/07/16	2023/07/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

BlueAsia

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2022/09/14	2023/09/13
LISN	R&S	ENV216	3560.6550.15	2022/09/14	2023/09/13
LISN	AT	AT166-2	AKK1806000003	2022/09/14	2023/09/13
ISN	TESEQ	ISNT8-cat6	53580	2022/09/14	2023/09/13
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2022/08/17	2023/08/16
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2022/08/17	2023/08/16
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of RF Conducted Test					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Spectrum	KEYSIGHT	N9030A	MY52350152	2022/07/01	2023/06/30
Spectrum	KEYSIGHT	N9010A	MY54330814	2022/07/01	2023/06/30
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2023/06/30
Signal Generator	Agilent	N5181A	MY46240904	2022/08/02	2023/08/01
Signal Generator	R&S	CMW500	132429	2022/09/07	2023/09/06
BluetoothTester	Anritsu	MT8852B	06262047872	2022/09/07	2023/09/06
Power probe	DARE	RPR3006W	14I00889SN042	2022/09/07	2023/09/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2022/09/14	2023/09/13
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2022/09/14	2023/09/13
Audio Analyzer	Audioprecision	N/A	ATSI-41094	2022/7/1	2023/6/30
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A

BlueAsia

10 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

10.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		

10.2 BLOCK DIAGRAM OF TEST SETUP

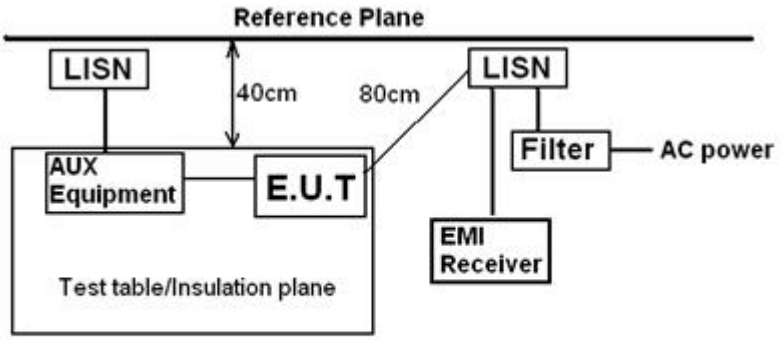

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedence Stabilization Network
Test table height=0.8m

10.3 PROCEDURE

1) The mains terminal disturbance voltage test was conducted in a shielded room.
2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

10.4 TEST DATA

[TestMode: TX]; [Line: Nutral];[Power:AC120V/60Hz]

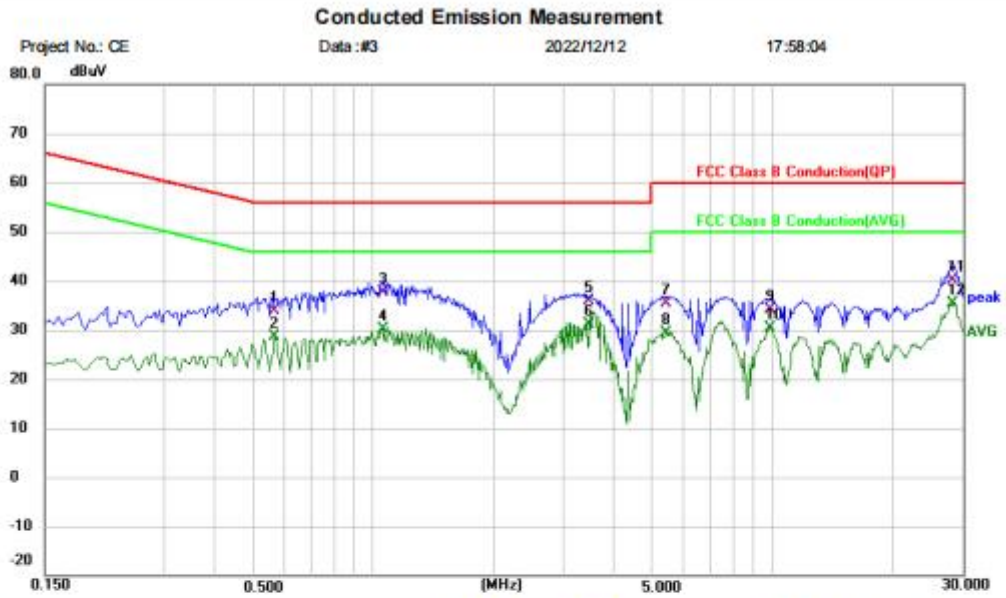

Site
Phase: N
Temperature: (C)
Limit: FCC Class B Conduction(QP)
Power:
Humidity: %RH
EUT: Keilton LED controller
M/N: WP1017S AC120V 60Hz
Mode: TX mode
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.5660	23.95	10.04	33.99	56.00	-22.01	QP	
2		0.5660	18.64	10.04	28.68	46.00	-17.32	AVG	
3		1.0580	27.73	10.02	37.75	56.00	-18.25	QP	
4		1.0580	20.09	10.02	30.11	46.00	-15.89	AVG	
5		3.4660	25.86	9.96	35.82	56.00	-20.18	QP	
6		3.4660	21.24	9.96	31.20	46.00	-14.80	AVG	
7		5.4020	25.49	9.82	35.31	60.00	-24.69	QP	
8		5.4020	19.54	9.82	29.36	50.00	-20.64	AVG	
9		9.8660	24.17	9.95	34.12	60.00	-25.88	QP	
10		9.8660	20.45	9.95	30.40	50.00	-19.60	AVG	
11		28.3220	30.19	9.96	40.15	60.00	-19.85	QP	
12	*	28.3220	25.42	9.96	35.38	50.00	-14.62	AVG	

Test Result: Pass

[TestMode: TX]; [Line: Line];[Power:AC120V/60Hz]

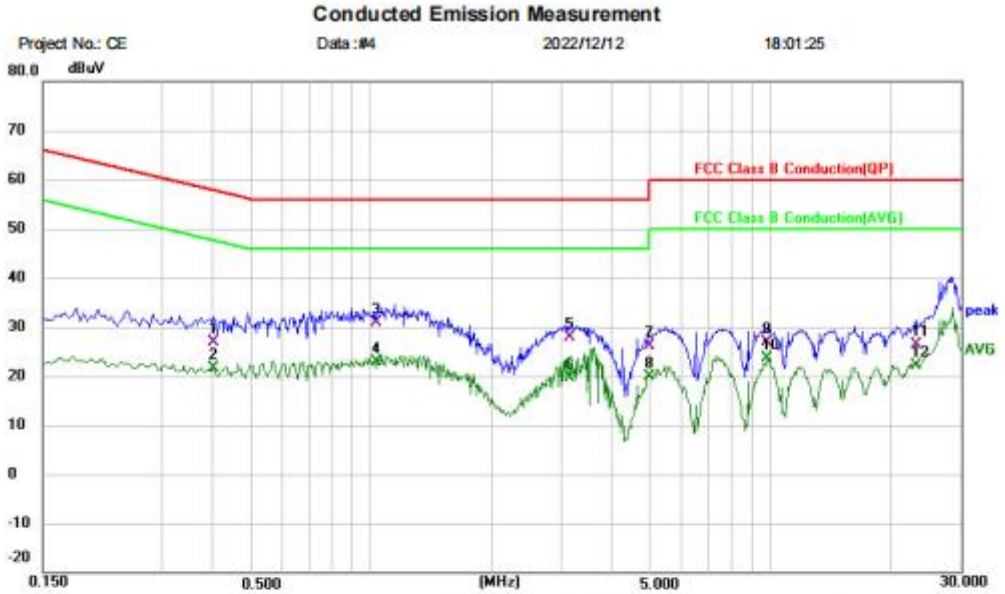

Site
Phase: L1
Temperature: (C)
Limit: FCC Class B Conduction(QP)
Power:
Humidity: %RH
EUT: Keilton LED controller
M/N: WP1017S AC120V 60Hz
Mode: TX mode
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.4020	16.75	10.07	26.82	57.81	-30.99	QP	
2		0.4020	11.53	10.07	21.60	47.81	-26.21	AVG	
3		1.0339	20.72	10.12	30.84	56.00	-25.16	QP	
4	*	1.0339	12.72	10.12	22.84	46.00	-23.16	AVG	
5		3.1420	17.73	10.21	27.94	56.00	-28.06	QP	
6		3.1420	9.36	10.21	19.57	46.00	-26.43	AVG	
7		4.9860	16.00	10.01	26.01	56.00	-29.99	QP	
8		4.9860	9.87	10.01	19.88	46.00	-26.12	AVG	
9		9.8340	16.77	10.15	26.92	60.00	-33.08	QP	
10		9.8340	13.36	10.15	23.51	50.00	-26.49	AVG	
11		23.2139	16.27	10.03	26.30	60.00	-33.70	QP	
12		23.2139	12.03	10.03	22.06	50.00	-27.94	AVG	

Test Result: Pass

11 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

11.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

11.2 BLOCK DIAGRAM OF TEST SETUP

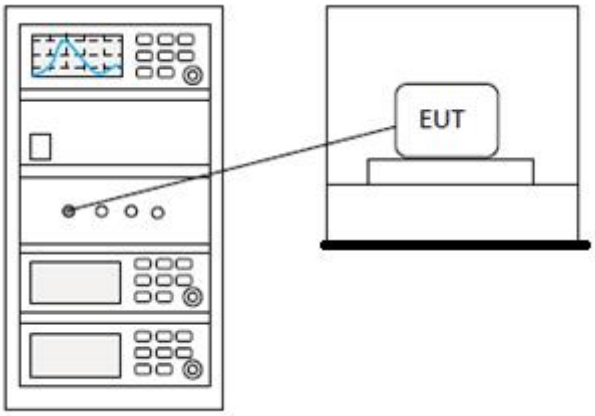

11.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

12 RADIATED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

12.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3
Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.		

BlueAsia

12.2 BLOCK DIAGRAM OF TEST SETUP

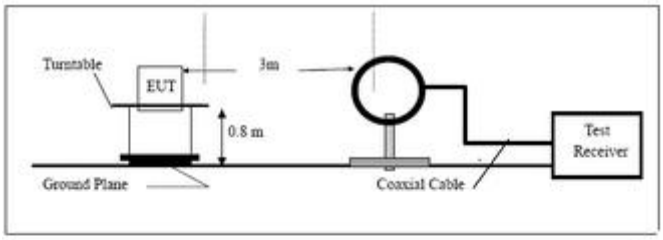

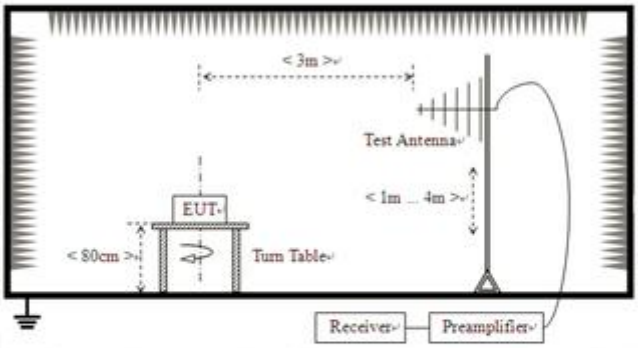

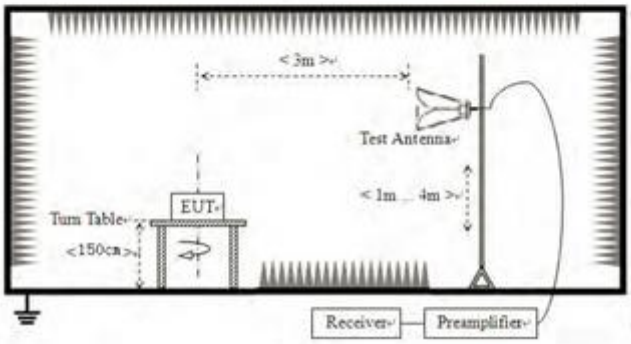

12.3 PROCEDURE

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
j. Repeat above procedures until all frequencies measured was complete.

Remark:
1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.fundamental frequency is blocked by filter, and only spurious emission is shown.
4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

12.4 TEST DATA

Below 1GHz

[TestMode: TX]; [Polarity: Horizontal]

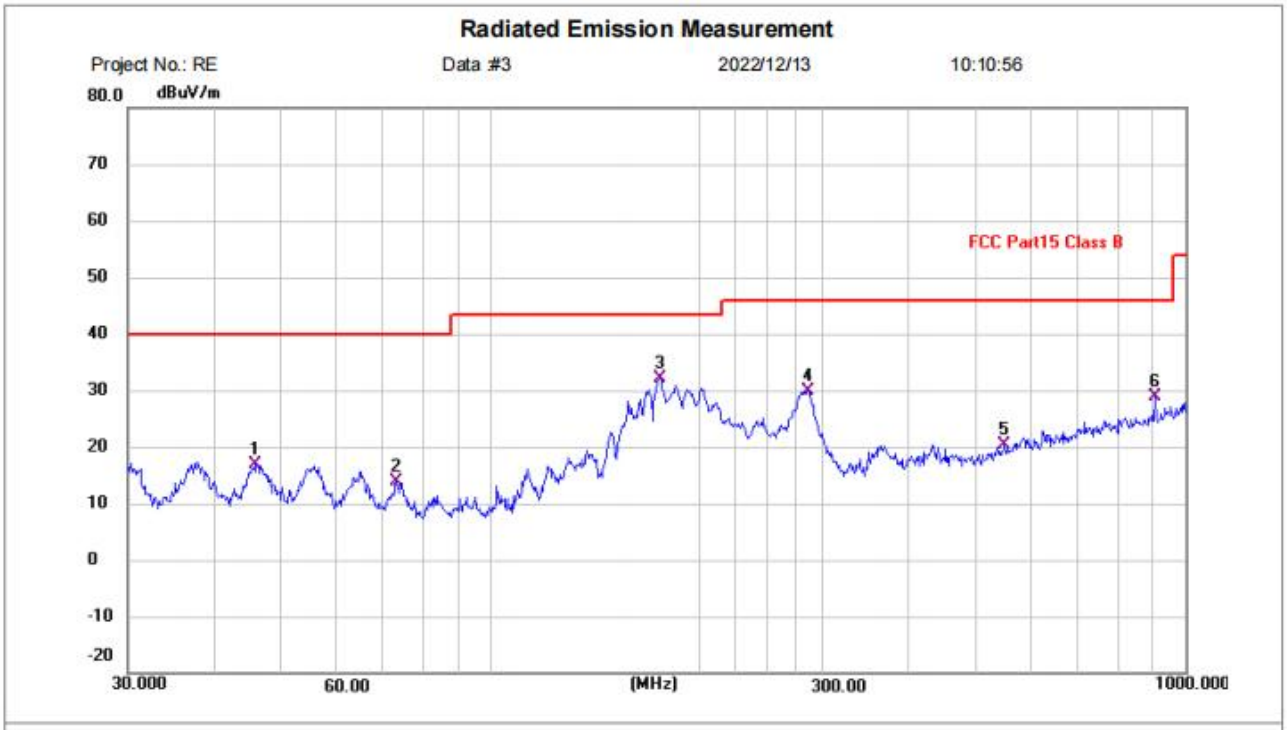

Site
Limit: FCC Part15 Class B
EUT: Keilton LED controller
M/N: CS107S AC120-277V 60Hz
Mode: TX mode
Note:

Polarization: *Horizontal*
Power:

Temperature: (C)
Humidity: %RH

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	46.0162	23.46	-6.51	16.95	40.00	-23.05	QP	P	
2	73.1025	23.36	-9.49	13.87	40.00	-26.13	QP	P	
3 *	175.0367	38.89	-6.81	32.08	43.50	-11.42	QP	P	
4	285.9777	36.50	-6.55	29.95	46.00	-16.05	QP	P	
5	549.0193	20.32	0.06	20.38	46.00	-25.62	QP	P	
6	903.3093	23.07	5.85	28.92	46.00	-17.08	QP	P	

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

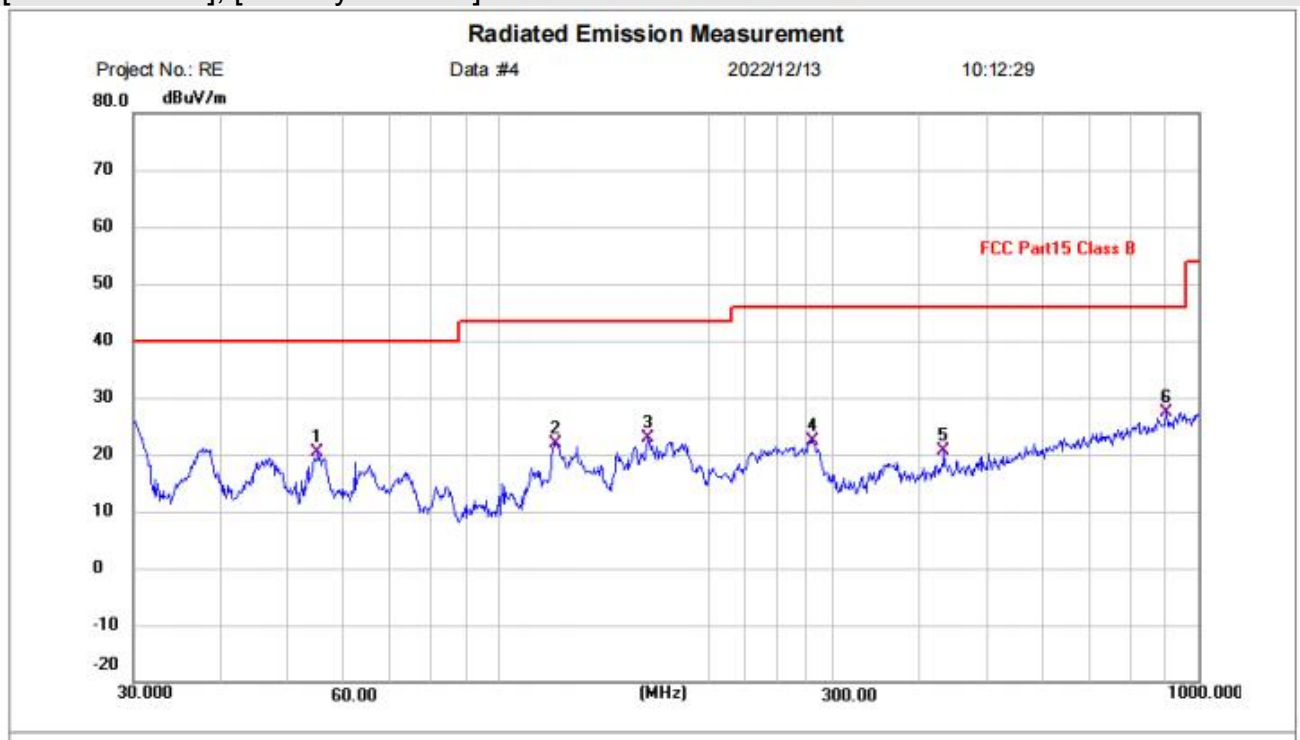

Site
Limit: FCC Part15 Class B
EUT: Keilton LED controller
M/N: CS107S AC120-277V 60Hz
Mode: TX mode
Note:

Polarization: *Vertical*
Power:

Temperature: (C)
Humidity: %RH

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	55.0274	26.77	-6.42	20.35	40.00	-19.65	QP	P	
2	120.6991	29.64	-7.70	21.94	43.50	-21.56	QP	P	
3	163.1818	29.04	-6.24	22.80	43.50	-20.70	QP	P	
4	281.0075	29.20	-6.81	22.39	46.00	-23.61	QP	P	
5	432.5457	23.03	-2.42	20.61	46.00	-25.39	QP	P	
6 *	900.1474	21.65	5.72	27.37	46.00	-18.63	QP	P	

Test Result: Pass

Above 1GHz:

[TestMode: TX low channel]; [Polarity: Horizontal]

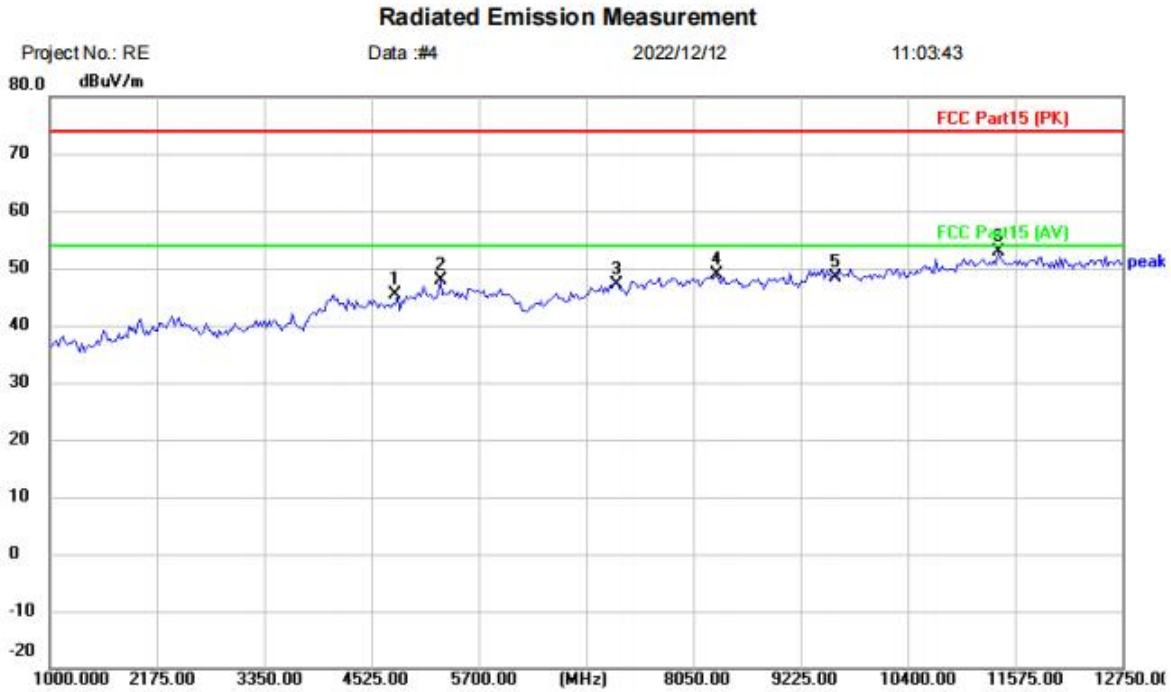

Site
Limit: FCC Part15 (PK)
EUT: keilton LED controller
M/N: CS107S AC120-277V 60Hz
Mode: BLE1M TX-L
Note:

Polarization: *Horizontal*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	41.26	4.05	45.31	74.00	-28.69	peak	
2		5277.000	41.71	6.19	47.90	74.00	-26.10	peak	
3		7206.000	39.29	7.93	47.22	74.00	-26.78	peak	
4		8308.500	39.89	9.04	48.93	74.00	-25.07	peak	
5		9608.000	37.57	10.90	48.47	74.00	-25.53	peak	
6	*	11387.000	39.20	13.63	52.83	74.00	-21.17	peak	

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

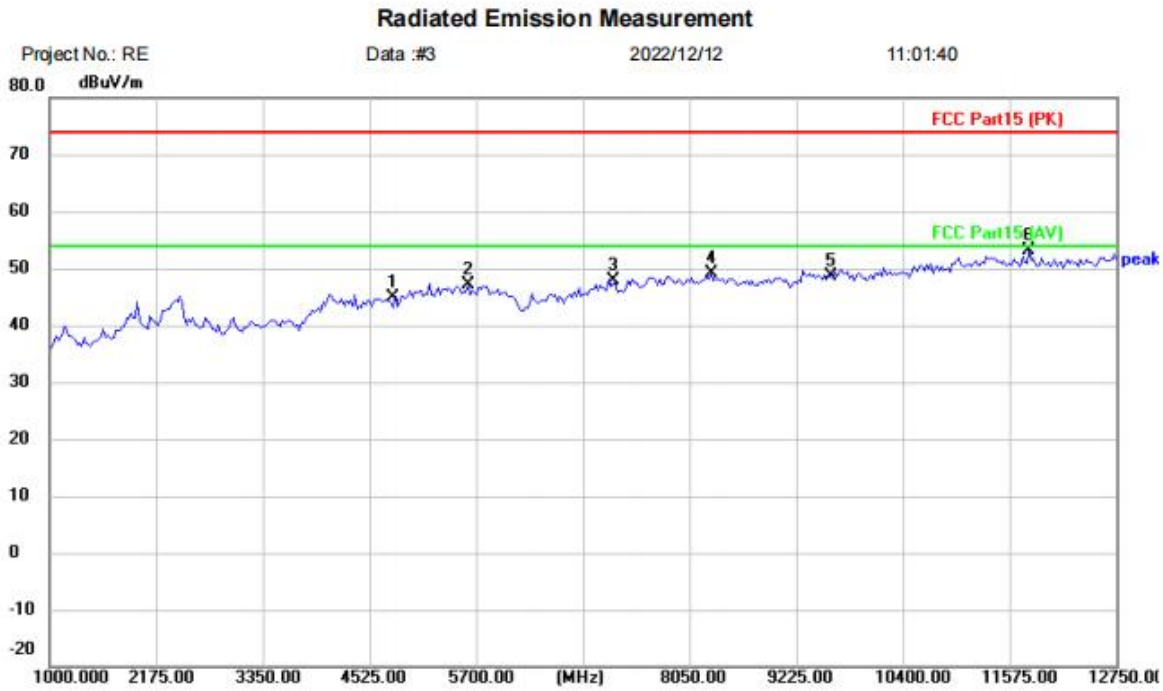

Site
Polarization: *Vertical*
Temperature: (C)
Limit: FCC Part15 (PK)
Power:
Humidity: %RH
EUT: keilton LED controller
M/N: CS107S AC120-277V 60Hz
Mode: BLE1M TX-L
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	40.95	4.05	45.00	74.00	-29.00	peak	
2		5606.000	40.51	6.70	47.21	74.00	-26.79	peak	
3		7206.000	39.97	7.93	47.90	74.00	-26.10	peak	
4		8285.000	40.02	9.03	49.05	74.00	-24.95	peak	
5		9608.000	37.68	10.90	48.58	74.00	-25.42	peak	
6	*	11786.500	39.29	13.81	53.10	74.00	-20.90	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

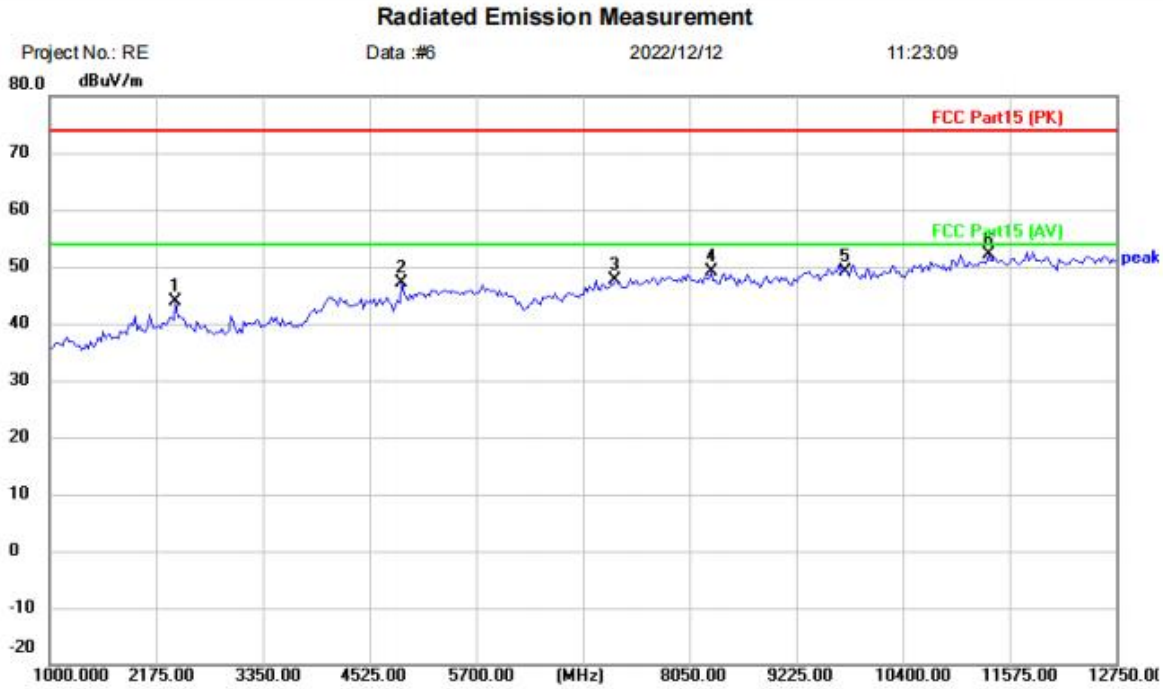

Site
Limit: FCC Part15 (PK)
EUT: keilton LED controller
M/N: CS107S AC120-277V 60Hz
Mode: BLE1M TX-M
Note:

Polarization: *Horizontal*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		2386.500	44.87	-1.11	43.76	74.00	-30.24	peak	
2		4877.500	42.66	4.35	47.01	74.00	-26.99	peak	
3		7236.000	39.56	8.00	47.56	74.00	-26.44	peak	
4		8285.000	40.19	9.03	49.22	74.00	-24.78	peak	
5		9768.000	37.89	11.31	49.20	74.00	-24.80	peak	
6	*	11340.000	38.63	13.60	52.23	74.00	-21.77	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

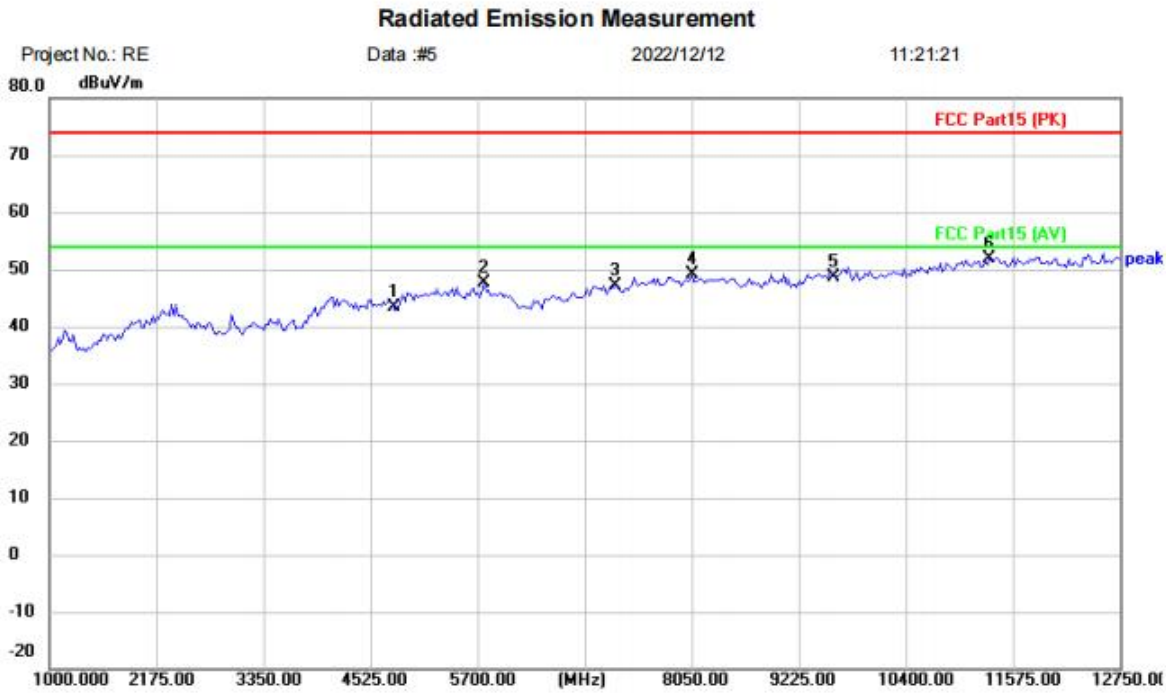

Site
Limit: FCC Part15 (PK)
EUT: keilton LED controller
M/N: CS107S AC120-277V 60Hz
Mode: BLE1M TX-M
Note:

Polarization: *Vertical*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	39.37	4.05	43.42	74.00	-30.58	peak	
2		5770.500	40.79	6.78	47.57	74.00	-26.43	peak	
3		7206.000	39.08	7.93	47.01	74.00	-26.99	peak	
4		8050.000	40.10	8.93	49.03	74.00	-24.97	peak	
5		9608.000	37.77	10.90	48.67	74.00	-25.33	peak	
6	*	11316.500	38.17	13.59	51.76	74.00	-22.24	peak	

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Horizontal]

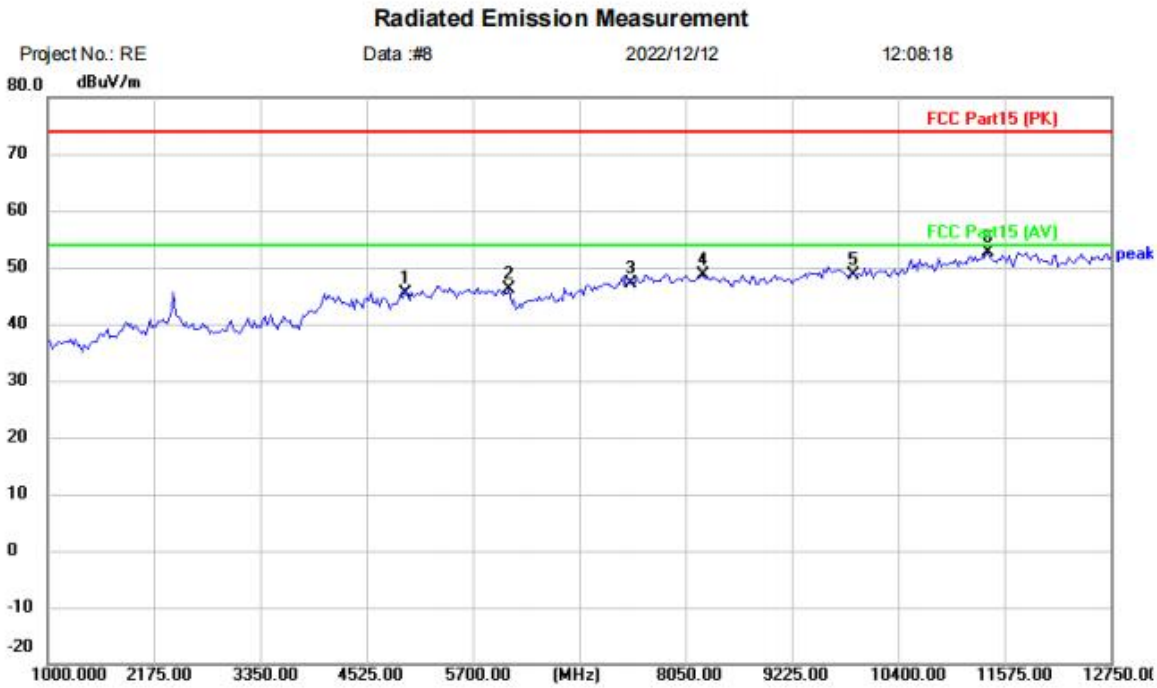

Site
Limit: FCC Part15 (PK)
EUT: keilton LED controller
M/N: CS107S AC120-277V 60Hz
Mode: BLE1M TX-H
Note:

Polarization: *Horizontal*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	40.02	5.42	45.44	74.00	-28.56	peak	
2		6099.500	41.85	4.31	46.16	74.00	-27.84	peak	
3		7440.000	38.72	8.48	47.20	74.00	-26.80	peak	
4		8238.000	39.56	9.00	48.56	74.00	-25.44	peak	
5		9920.000	36.87	11.69	48.56	74.00	-25.44	peak	
6	*	11387.000	38.99	13.63	52.62	74.00	-21.38	peak	

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Vertical]

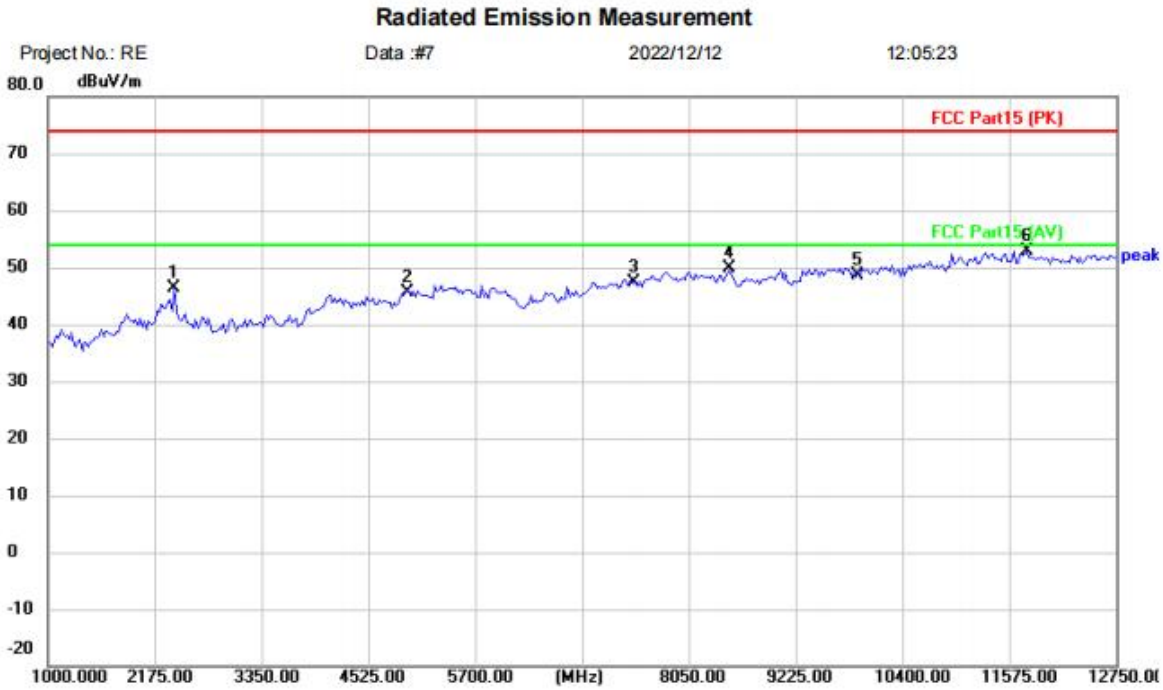

Site
Limit: FCC Part15 (PK)
EUT: keilton LED controller
M/N: CS107S AC120-277V 60Hz
Mode: BLE1M TX-H
Note:

Polarization: *Vertical*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		2386.500	47.56	-1.11	46.45	74.00	-27.55	peak	
2		4960.000	40.15	5.42	45.57	74.00	-28.43	peak	
3		7440.000	38.87	8.48	47.35	74.00	-26.65	peak	
4		8496.500	40.64	9.12	49.76	74.00	-24.24	peak	
5		9920.000	36.84	11.69	48.53	74.00	-25.47	peak	
6	*	11763.000	39.13	13.80	52.93	74.00	-21.07	peak	

Test Result: Pass

13 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A

13.1 CONCLUSION

Standard Requirement:
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.

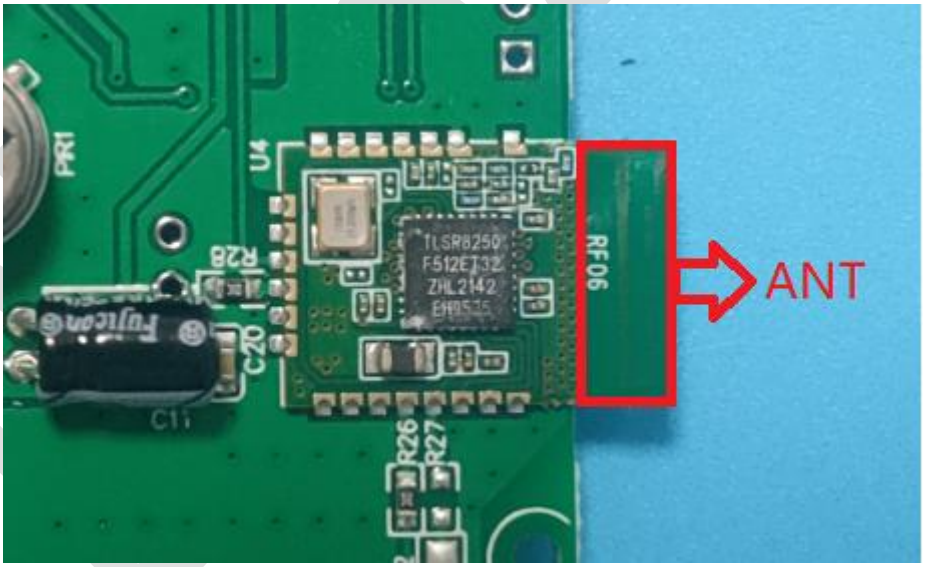

14 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

14.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

BlueAsia

14.2 BLOCK DIAGRAM OF TEST SETUP

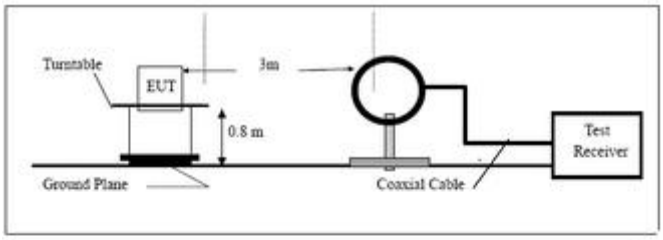

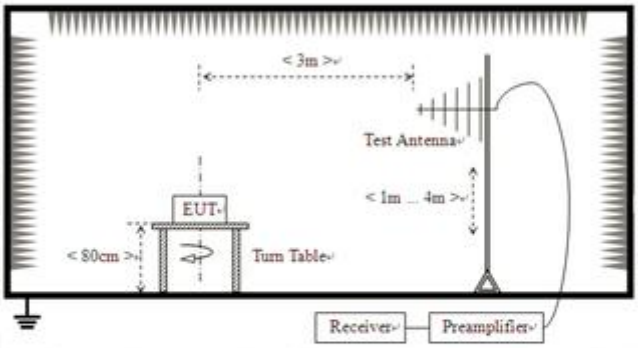

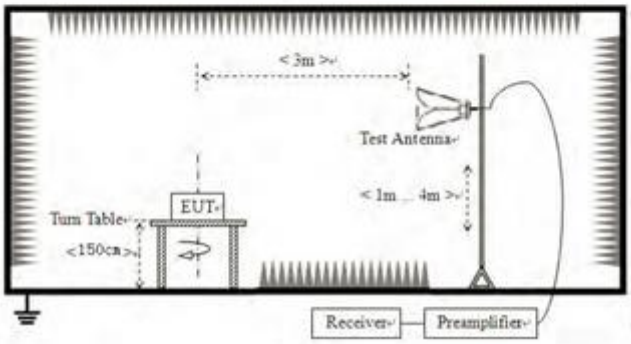

14.3 PROCEDURE

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
j. Repeat above procedures until all frequencies measured was complete.
Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

14.4 TEST DATA

[TestMode: TX low channel]; [Polarity: Horizontal]

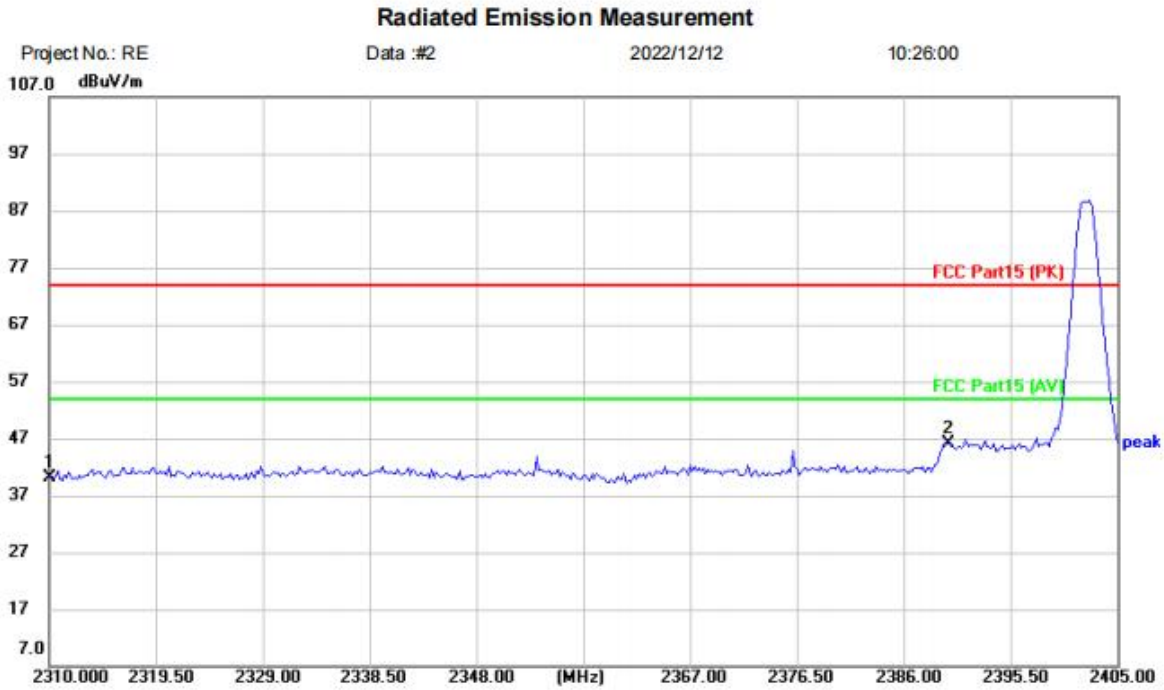

Site
Limit: FCC Part15 (PK)
EUT: keilton LED controller
M/N: WP1017S AC120-277V 60Hz
Mode: BLE1M TX-L
Note:

Polarization: *Horizontal*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		2310.000	44.52	-4.27	40.25	74.00	-33.75	peak	
2	*	2390.000	49.93	-3.82	46.11	74.00	-27.89	peak	

Test Result: Pass

[TestMode:TX low channel]; [Polarity: Vertical]

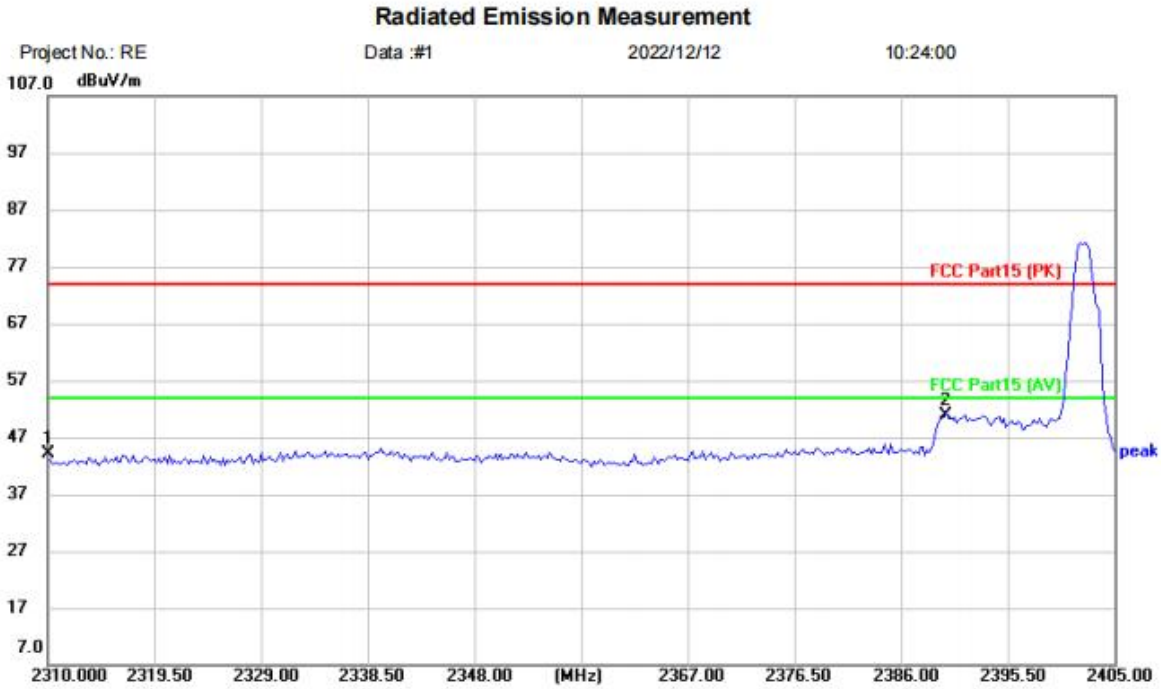

Site
Limit: FCC Part15 (PK)
EUT: keilton LED controller
M/N: WP1017S AC120-277V 60Hz
Mode: BLE1M TX-L
Note:

Polarization: *Vertical*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		2310.000	48.34	-4.27	44.07	74.00	-29.93	peak	
2	*	2390.000	54.65	-3.82	50.83	74.00	-23.17	peak	

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Horizontal]

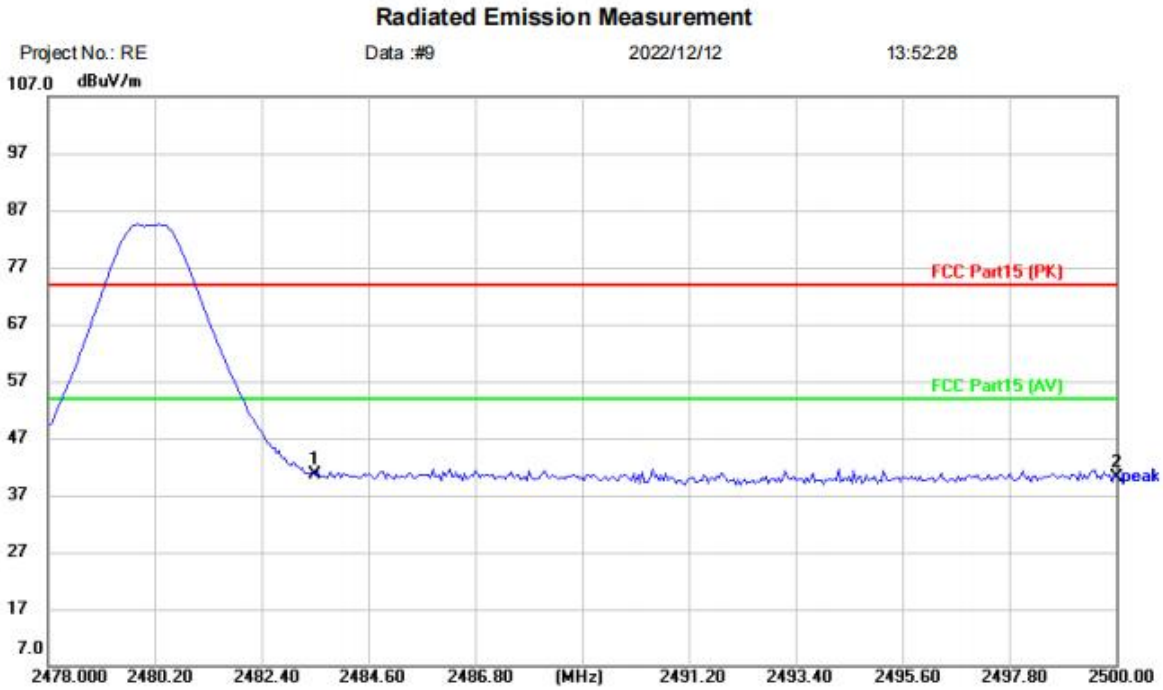

Site
Polarization: *Horizontal*
Temperature: (C)
Limit: FCC Part15 (PK)
Power:
Humidity: %RH
EUT: keilton LED controller
M/N: WP1017S AC120-277V 60Hz
Mode: BLE1M TX-H
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	44.69	-3.96	40.73	74.00	-33.27	peak	
2		2500.000	44.22	-4.00	40.22	74.00	-33.78	peak	

Test Result: Pass

[TestMode:TX High channel]; [Polarity: Vertical]

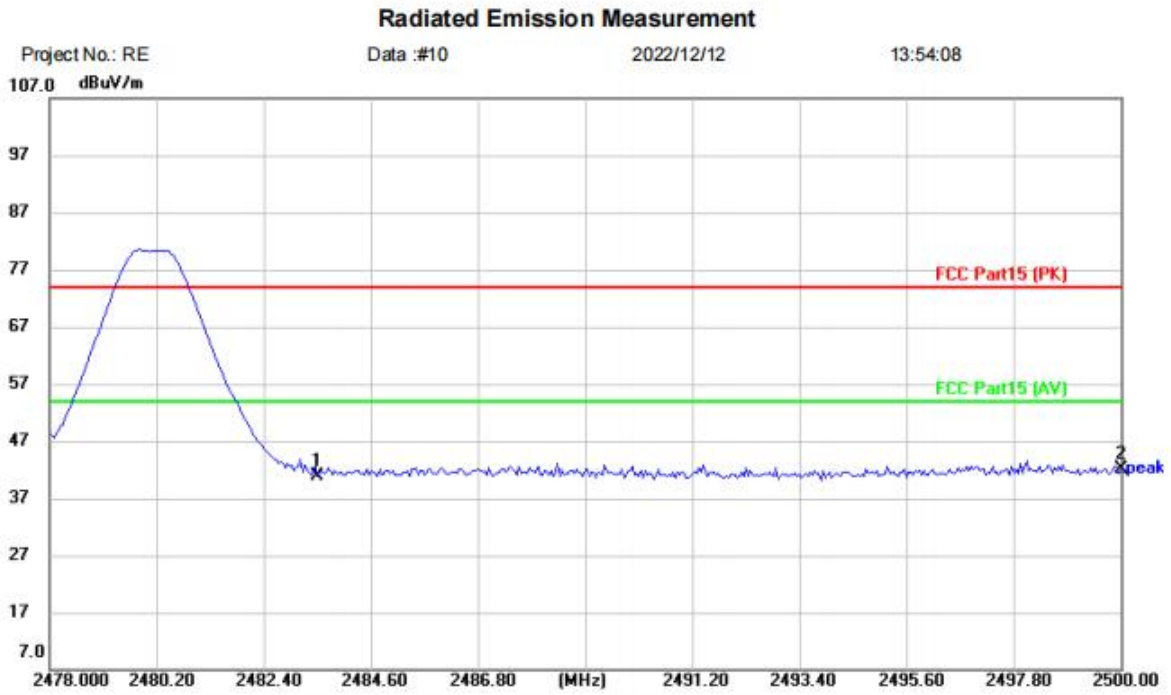

Site
Polarization: *Vertical*
Temperature: (C)
Limit: FCC Part15 (PK)
Power:
Humidity: %RH
EUT: keilton LED controller
M/N: WP1017S AC120-277V 60Hz
Mode: BLE1M TX-H
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		2483.500	44.85	-3.96	40.89	74.00	-33.11	peak	
2	*	2500.000	46.15	-4.00	42.15	74.00	-31.85	peak	

Test Result: Pass

15 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

15.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

15.2 BLOCK DIAGRAM OF TEST SETUP

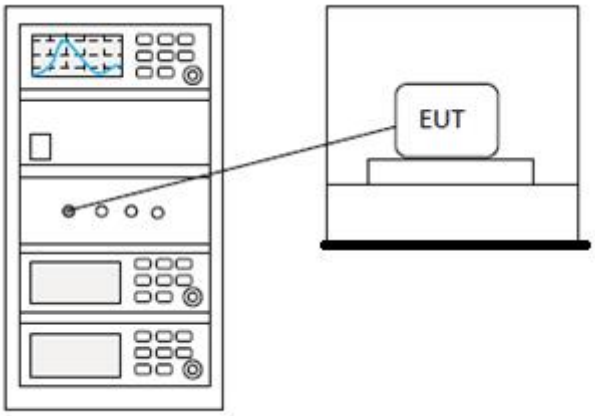

15.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

16 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

16.1 LIMITS

Limit:	≤8dBm in any 3 kHz band during any time interval of continuous transmission

16.2 BLOCK DIAGRAM OF TEST SETUP

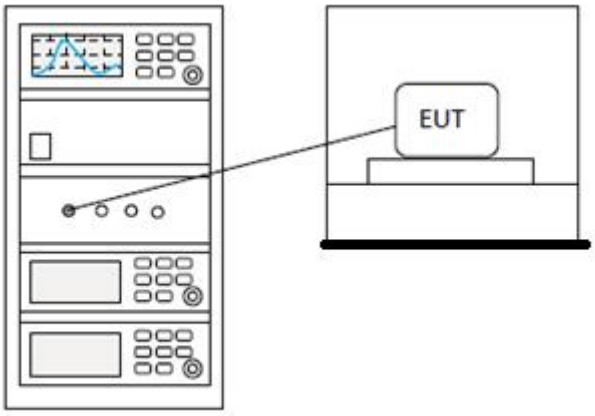

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

17 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

17.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥50 hopping channels
	0.25 for 25≤ hopping channels <50
	1 for digital modulation
2400-2483.5	1 for ≥75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

17.2 BLOCK DIAGRAM OF TEST SETUP

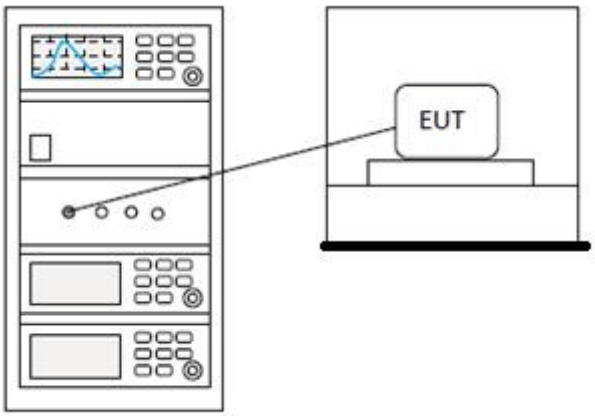

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

18 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

18.1 LIMITS

Limit:	≥500 kHz

18.2 BLOCK DIAGRAM OF TEST SETUP

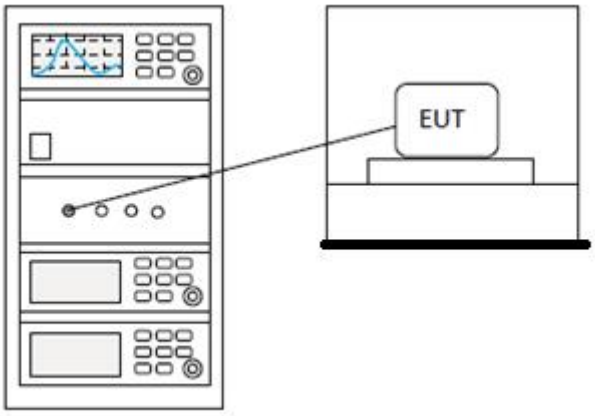

18.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

19 APPENDIX

Appendix1

19.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-0.483	30	Pass
NVNT	BLE 1M	2442	Ant1	-0.75	30	Pass
NVNT	BLE 1M	2480	Ant1	-2.995	30	Pass
NVNT	BLE 2M	2402	Ant1	-0.467	30	Pass
NVNT	BLE 2M	2442	Ant1	-0.734	30	Pass
NVNT	BLE 2M	2480	Ant1	-2.943	30	Pass

Power NVNT BLE 1M 2402MHz Ant1

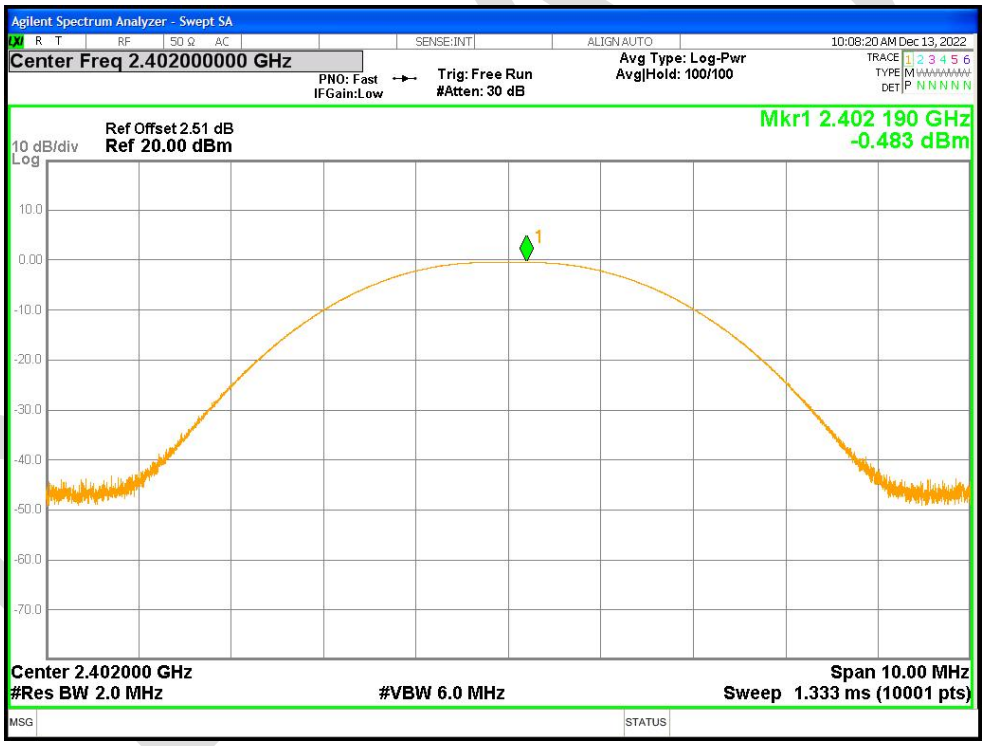

Power NVNT BLE 1M 2442MHz Ant1

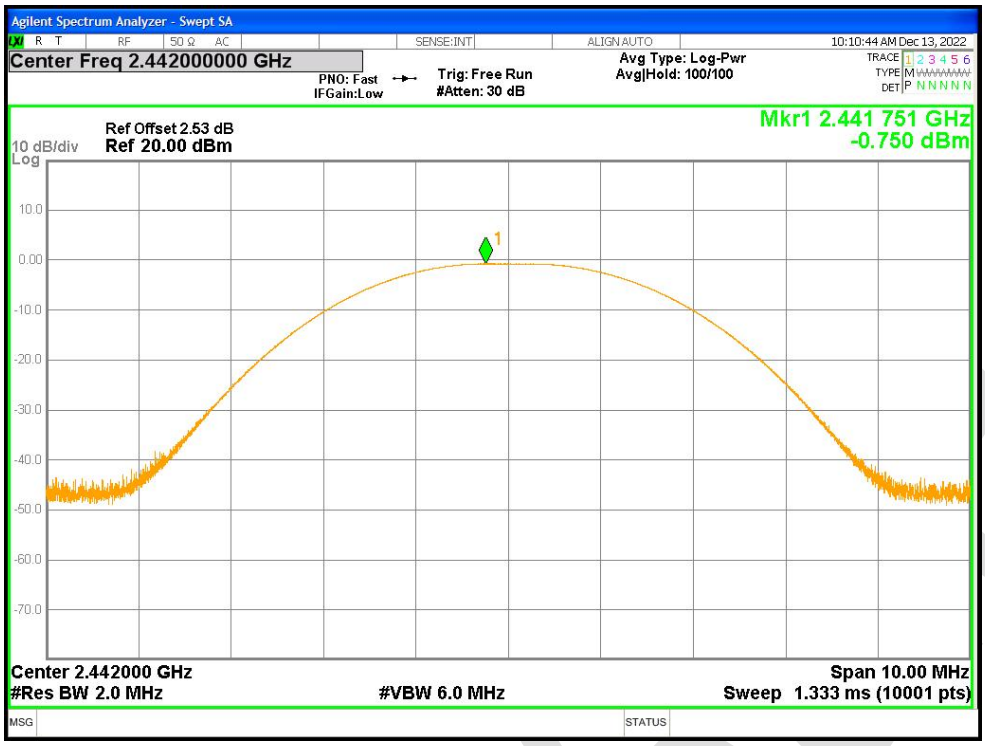

Power NVNT BLE 1M 2480MHz Ant1

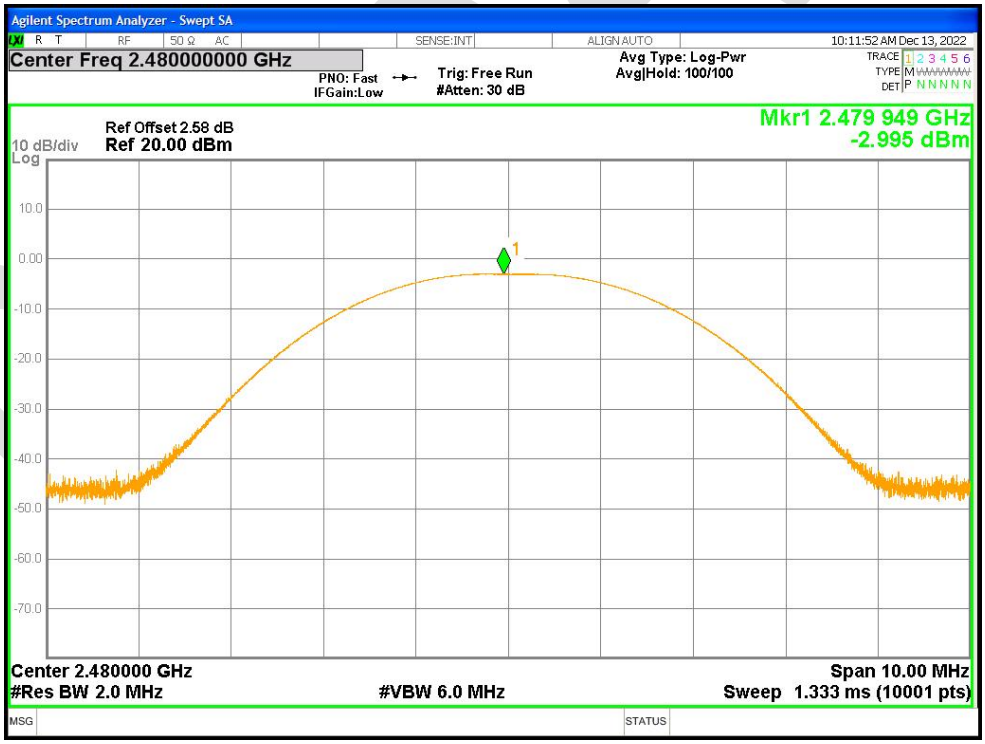

Power NVNT BLE 2M 2402MHz Ant1

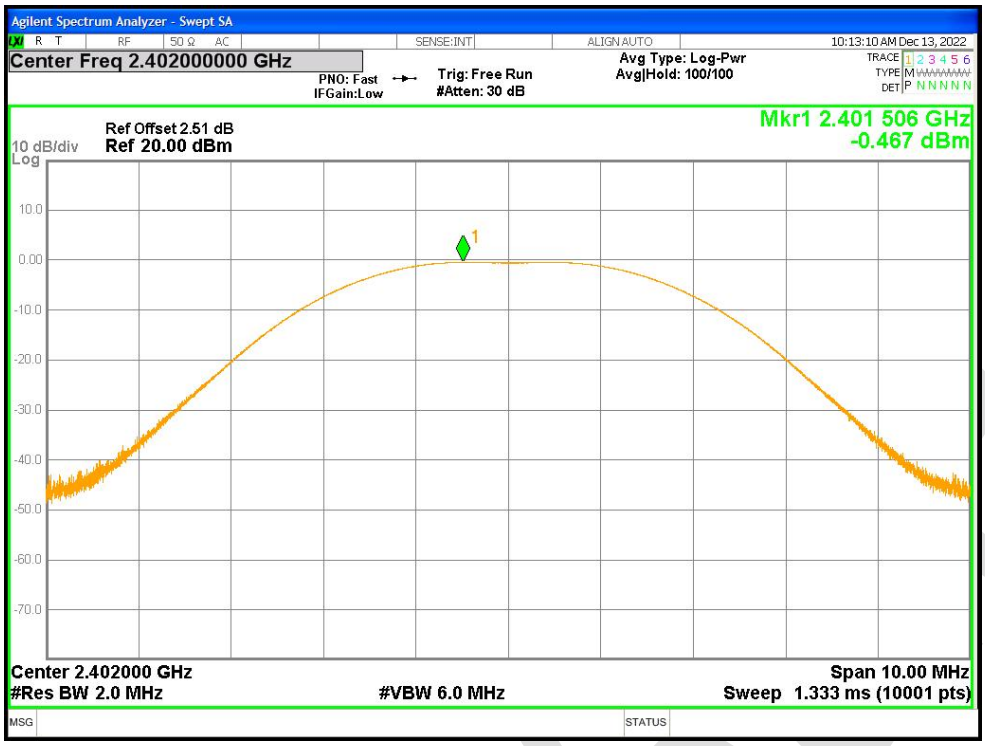

Power NVNT BLE 2M 2442MHz Ant1

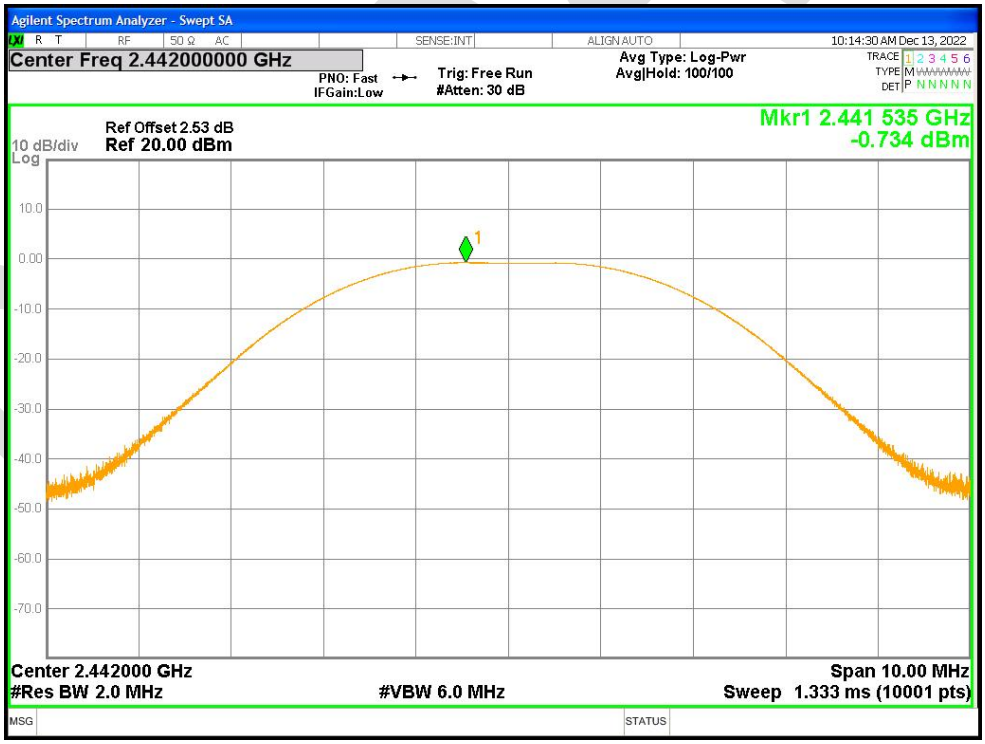

Power NVNT BLE 2M 2480MHz Ant1

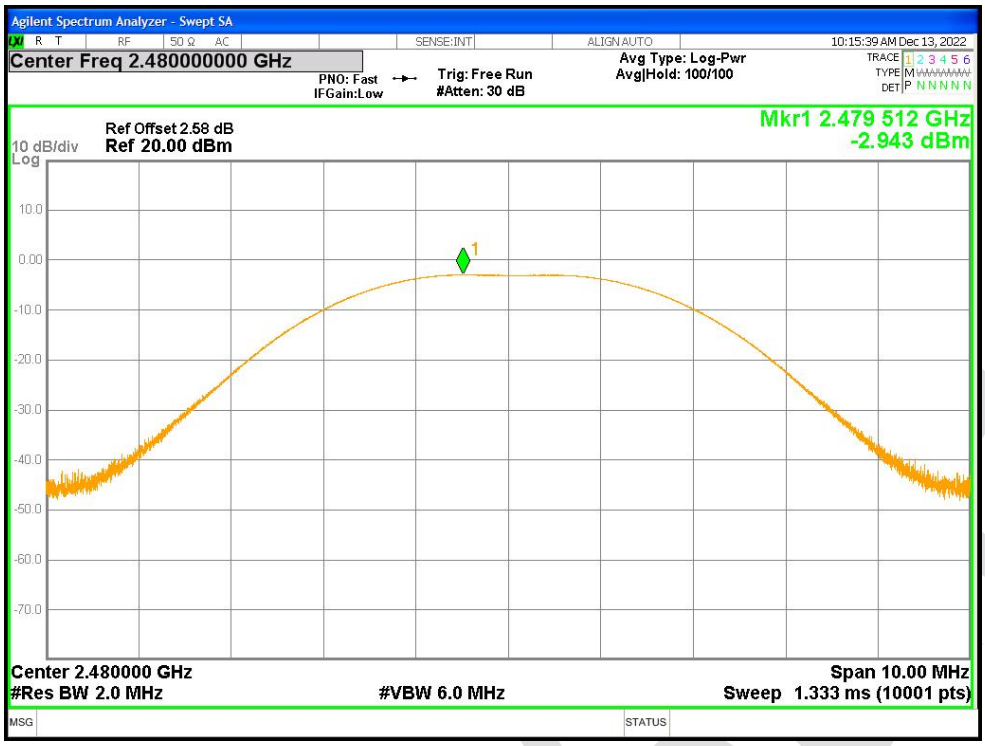
Agilent Spectrum Analyzer - Swept SA
Center Freq 2.480000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 30 dB
Avg Type: Log-Pwr
Avg|Hold: 100/100
10:15:39 AM Dec 13, 2022
Ref Offset 2.58 dB
10 dB/div
Ref 20.00 dBm
Log
Mkr1 2.479 512 GHz
-2.943 dBm
Center 2.480000 GHz
#Res BW 2.0 MHz
#VBW 6.0 MHz
Span 10.00 MHz
Sweep 1.333 ms (10001 pts)

19.2 -6DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.686	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.666	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.677	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.331	0.5	Pass
NVNT	BLE 2M	2442	Ant1	1.385	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.312	0.5	Pass

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

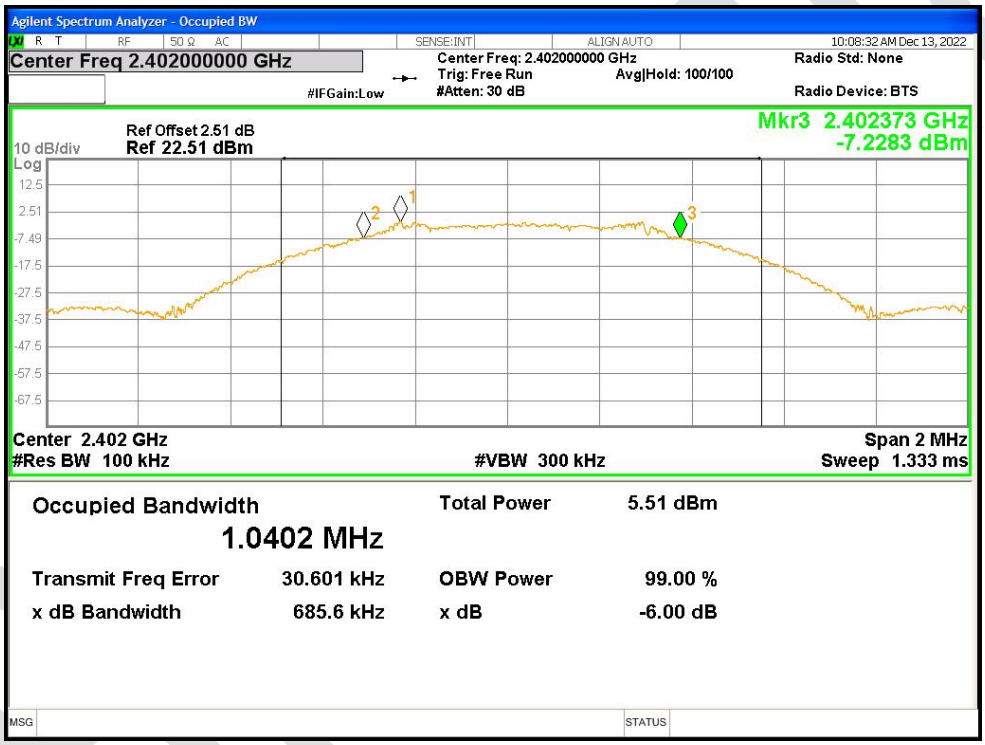

-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

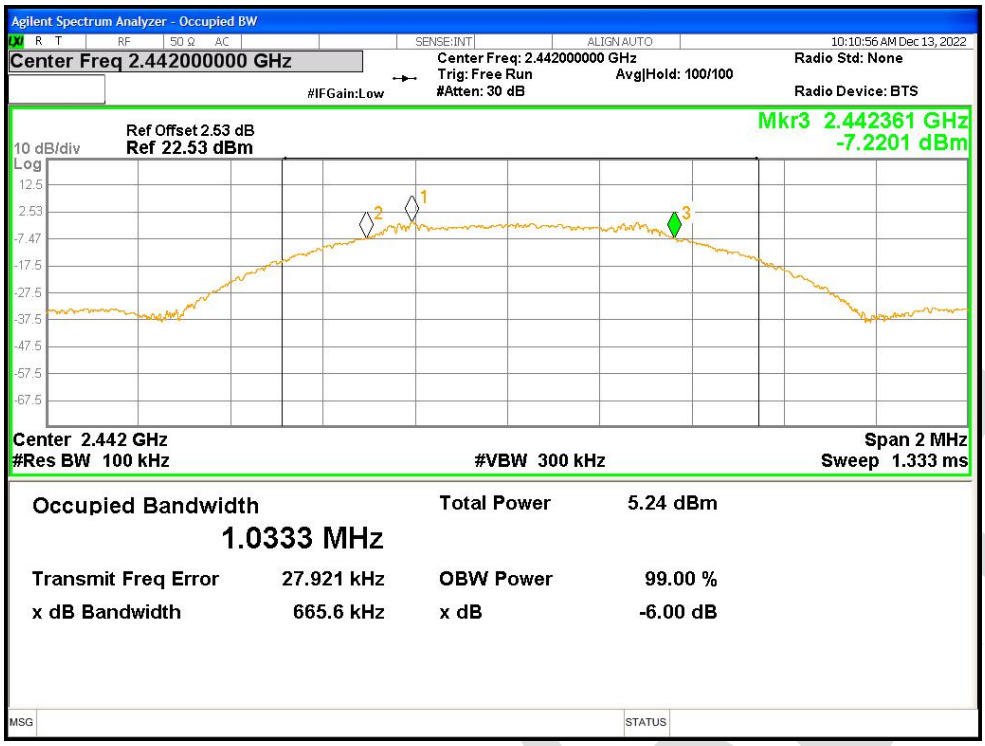

-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

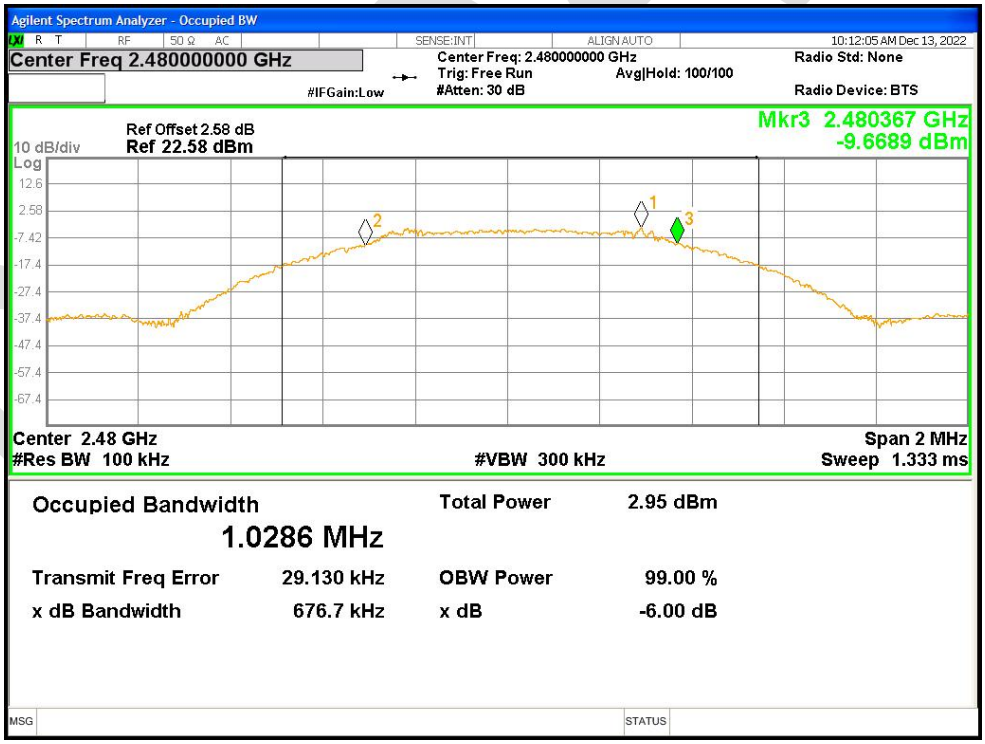

-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

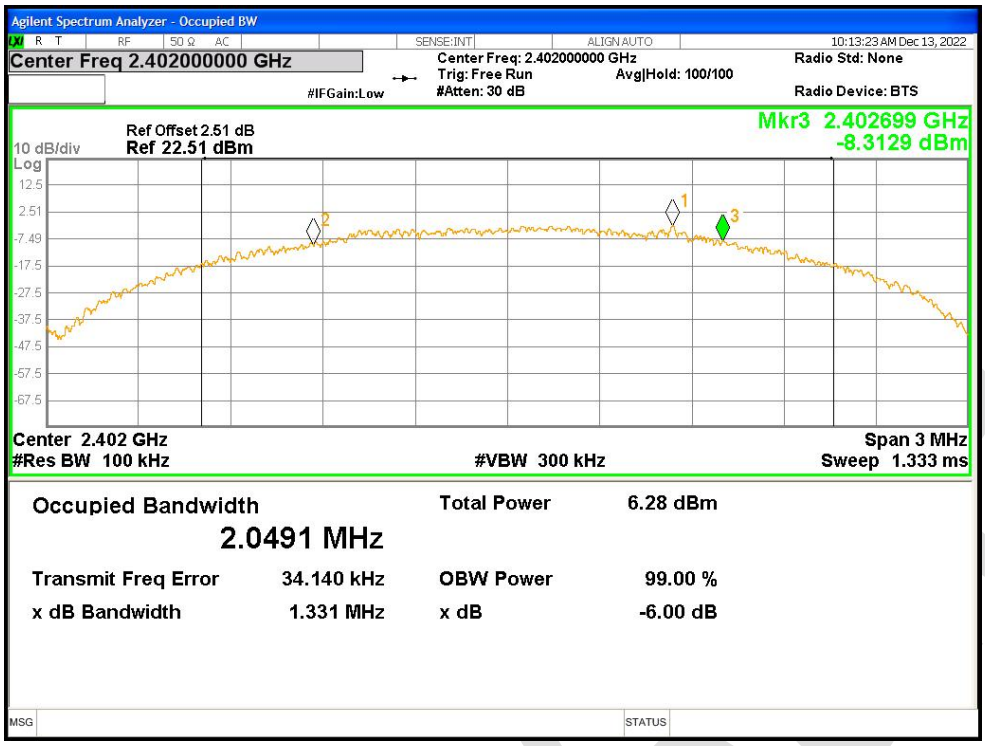

-6dB Bandwidth NVNT BLE 2M 2442MHz Ant1

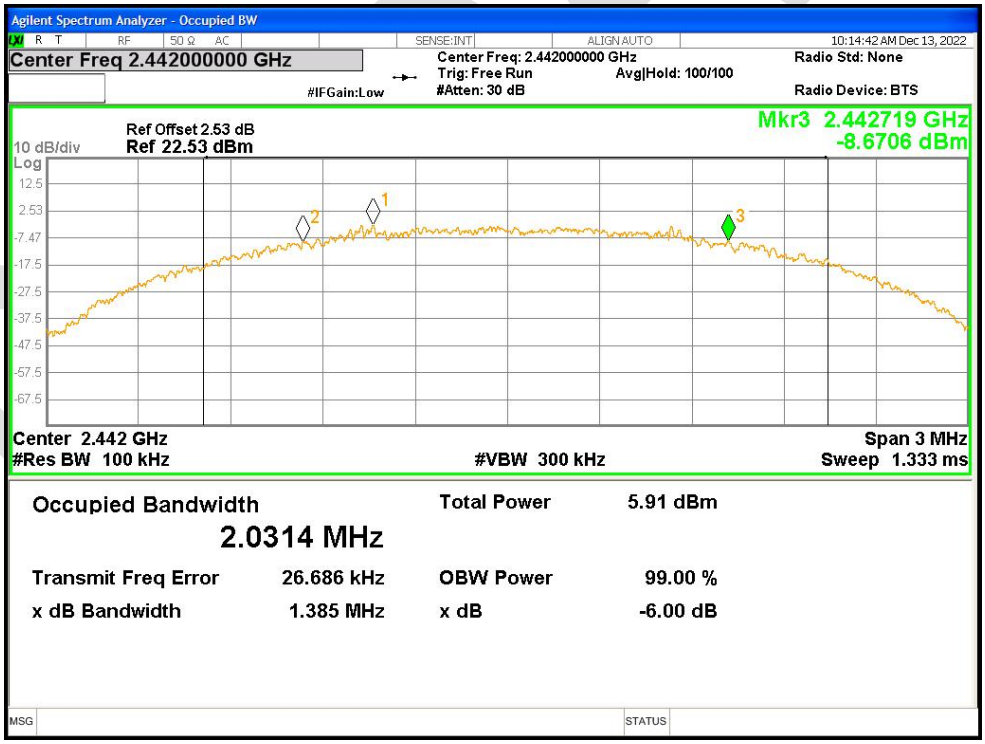

-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

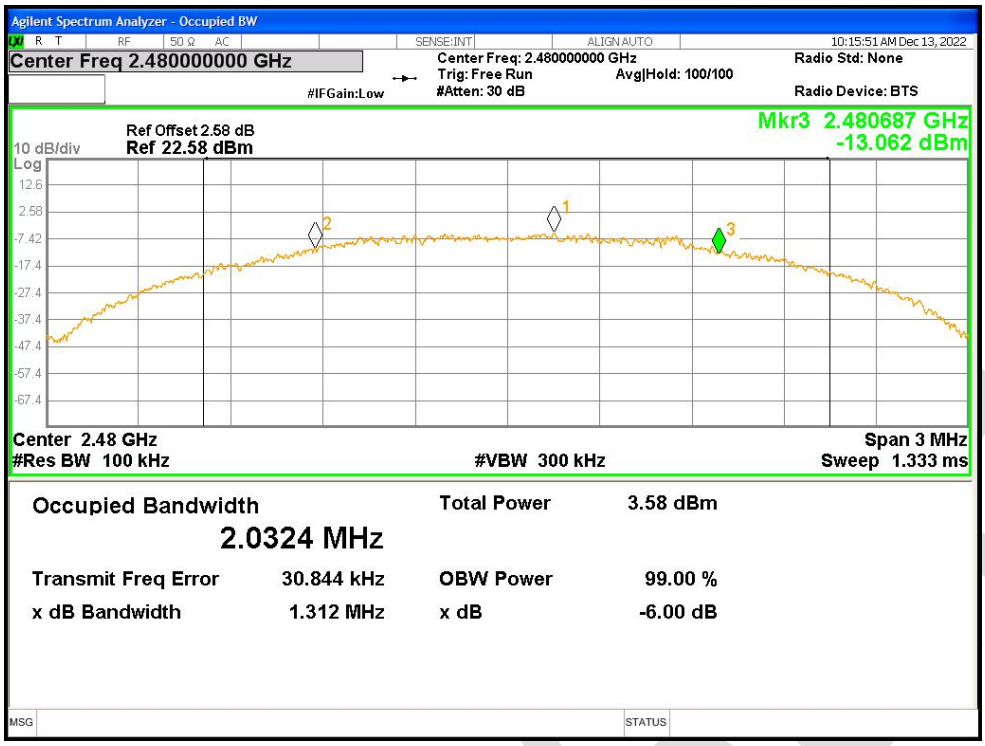
Agilent Spectrum Analyzer - Occupied BW
Center Freq 2.480000000 GHz
Center Freq: 2.480000000 GHz
Trig: Free Run
#Atten: 30 dB
Avg|Hold: 100/100
#IFGain:Low
Radio Std: None
Radio Device: BTS
10:15:51 AM Dec 13, 2022
Ref Offset 2.58 dB
10 dB/div
Ref 22.58 dBm
Log
Mkr3 2.480687 GHz
-13.062 dBm
Center 2.48 GHz
#Res BW 100 kHz
#VBW 300 kHz
Span 3 MHz
Sweep 1.333 ms
Occupied Bandwidth
2.0324 MHz
Total Power 3.58 dBm
Transmit Freq Error 30.844 kHz
OBW Power 99.00 %
x dB Bandwidth 1.312 MHz
x dB -6.00 dB
MSG
STATUS

19.3 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.0399
NVNT	BLE 1M	2442	Ant1	1.0281
NVNT	BLE 1M	2480	Ant1	1.0211
NVNT	BLE 2M	2402	Ant1	2.0263
NVNT	BLE 2M	2442	Ant1	2.0336
NVNT	BLE 2M	2480	Ant1	2.0300

OBW NVNT BLE 1M 2402MHz Ant1

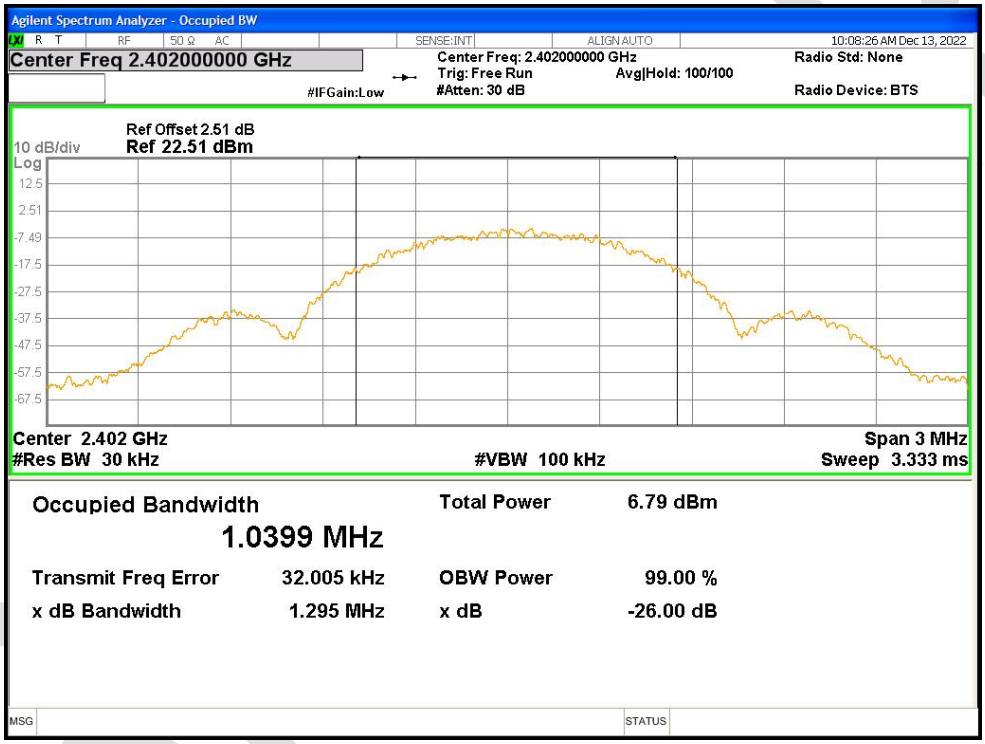

OBW NVNT BLE 1M 2442MHz Ant1

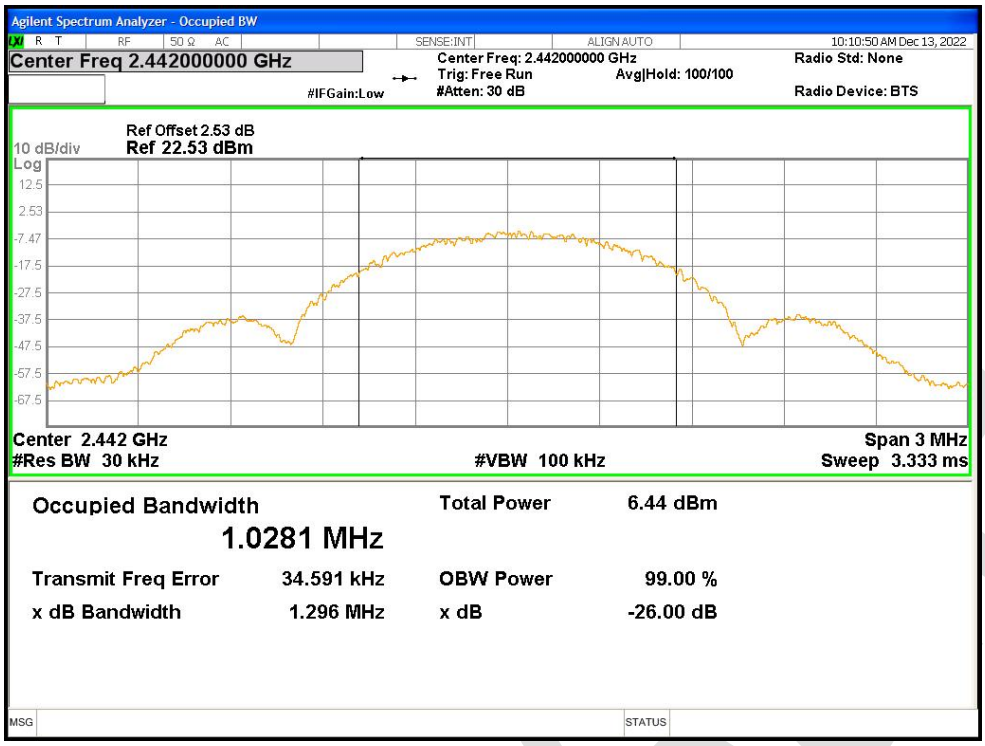

OBW NVNT BLE 1M 2480MHz Ant1

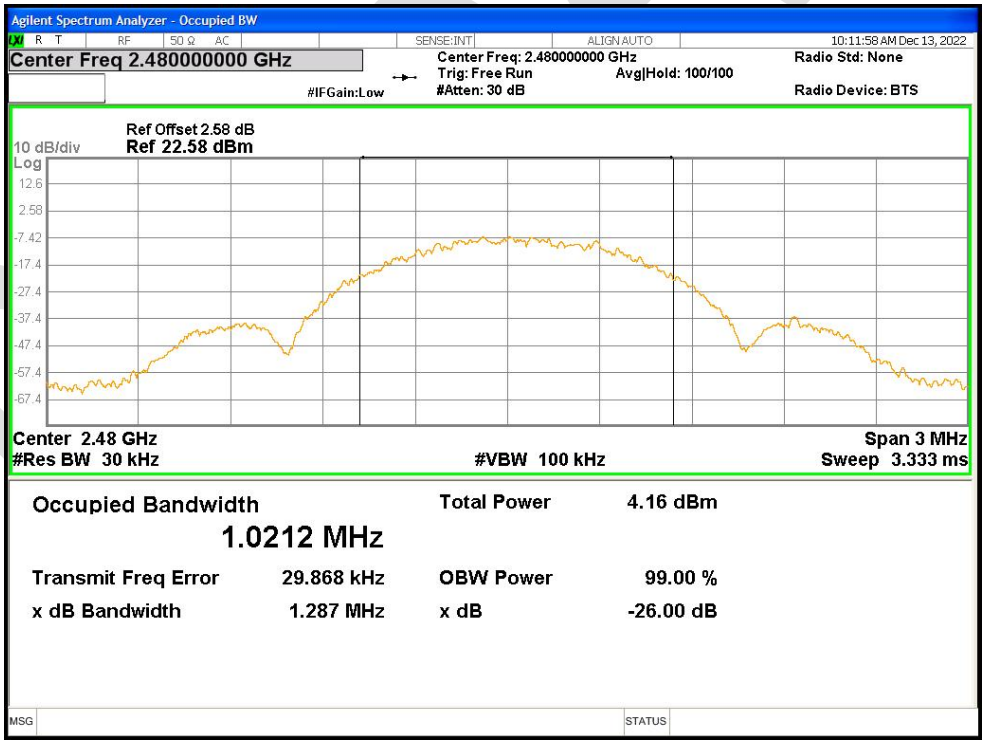

OBW NVNT BLE 2M 2402MHz Ant1

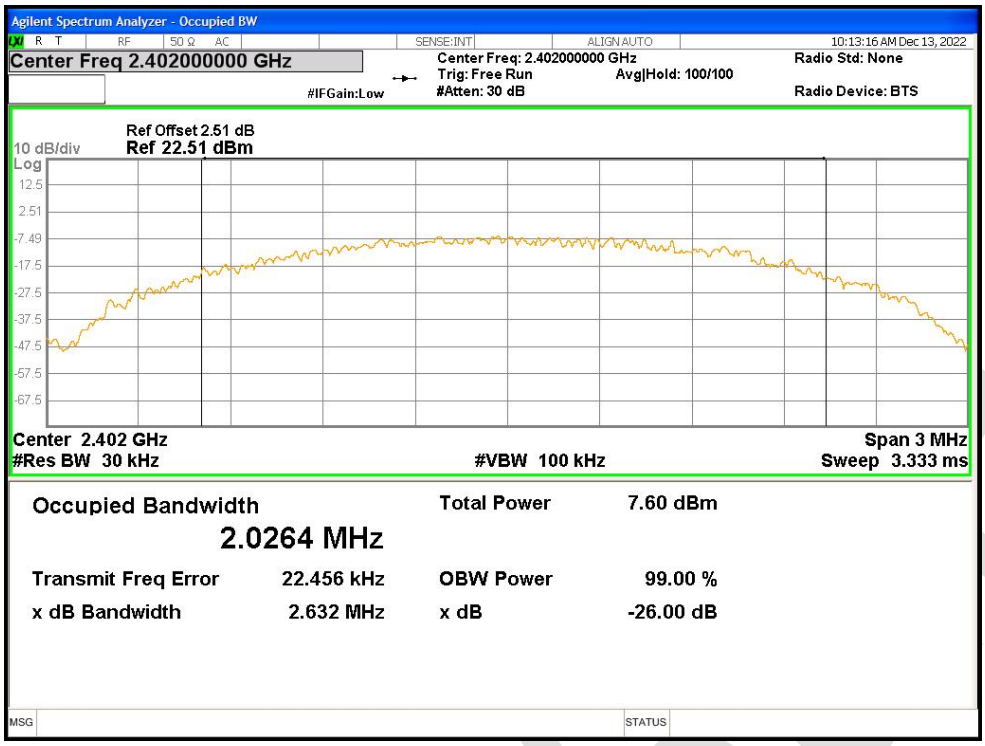

OBW NVNT BLE 2M 2442MHz Ant1

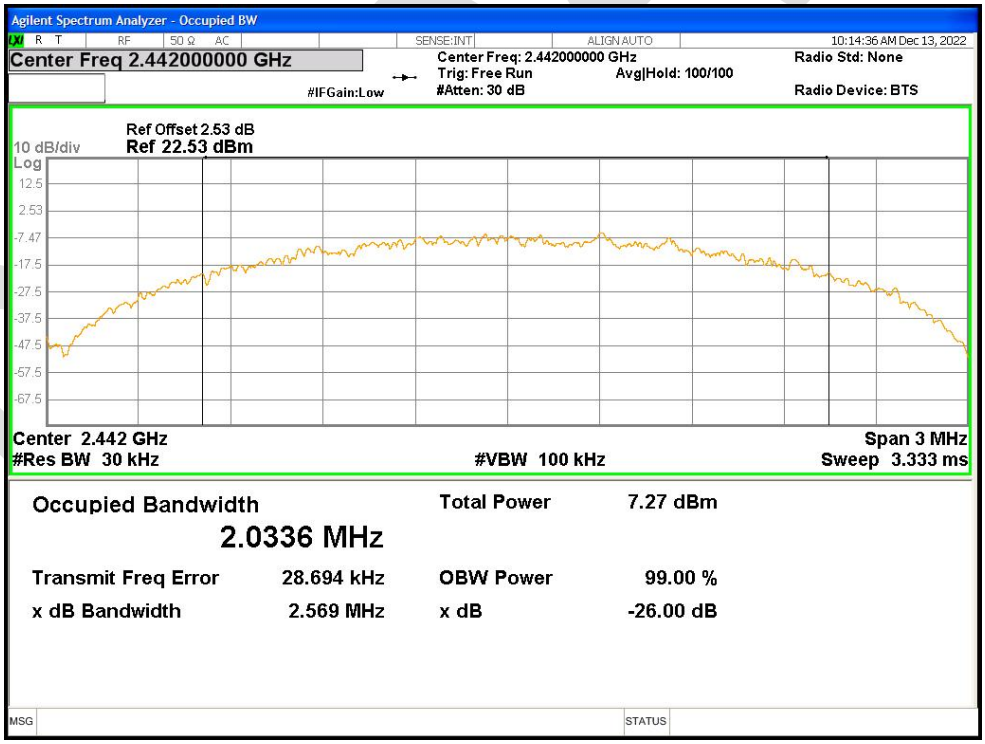

OBW NVNT BLE 2M 2480MHz Ant1

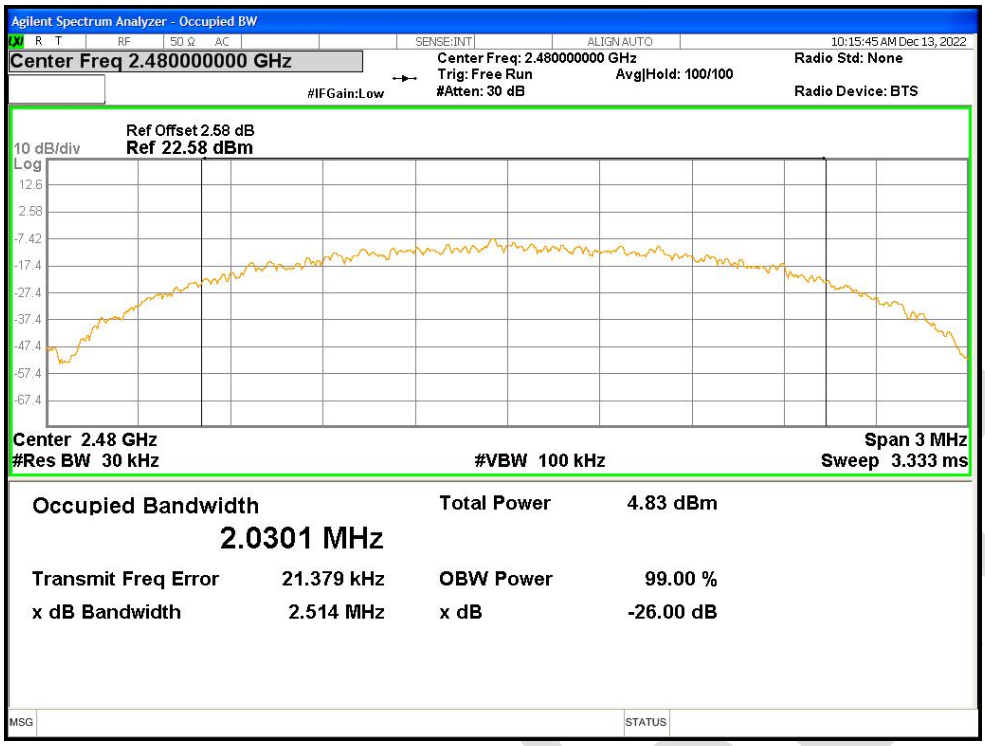
Agilent Spectrum Analyzer - Occupied BW
Center Freq 2.480000000 GHz
Center Freq: 2.480000000 GHz
Trig: Free Run
Avg|Hold: 100/100
#Atten: 30 dB
#IFGain:Low
Radio Std: None
Radio Device: BTS
10:15:45 AM Dec 13, 2022
Ref Offset 2.58 dB
10 dB/div
Ref 22.58 dBm
Log
12.6
2.58
-7.42
-17.4
-27.4
-37.4
-47.4
-57.4
-67.4
Center 2.48 GHz
#Res BW 30 kHz
#VBW 100 kHz
Span 3 MHz
Sweep 3.333 ms
Occupied Bandwidth
2.0301 MHz
Total Power 4.83 dBm
Transmit Freq Error 21.379 kHz
OBW Power 99.00 %
x dB Bandwidth 2.514 MHz
x dB -26.00 dB
MSG
STATUS

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-1.38	8	Pass
NVNT	BLE 1M	2442	Ant1	-0.892	8	Pass
NVNT	BLE 1M	2480	Ant1	-4.834	8	Pass
NVNT	BLE 2M	2402	Ant1	-2.788	8	Pass
NVNT	BLE 2M	2442	Ant1	-2.491	8	Pass
NVNT	BLE 2M	2480	Ant1	-5.156	8	Pass

PSD NVNT BLE 1M 2402MHz Ant1

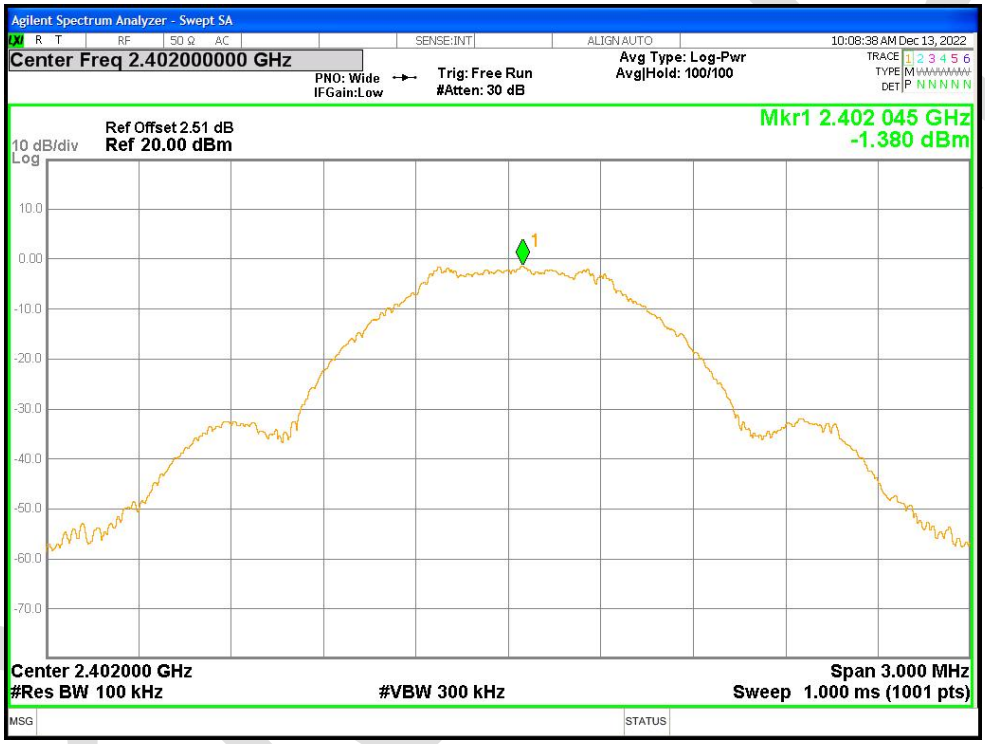

PSD NVNT BLE 1M 2442MHz Ant1

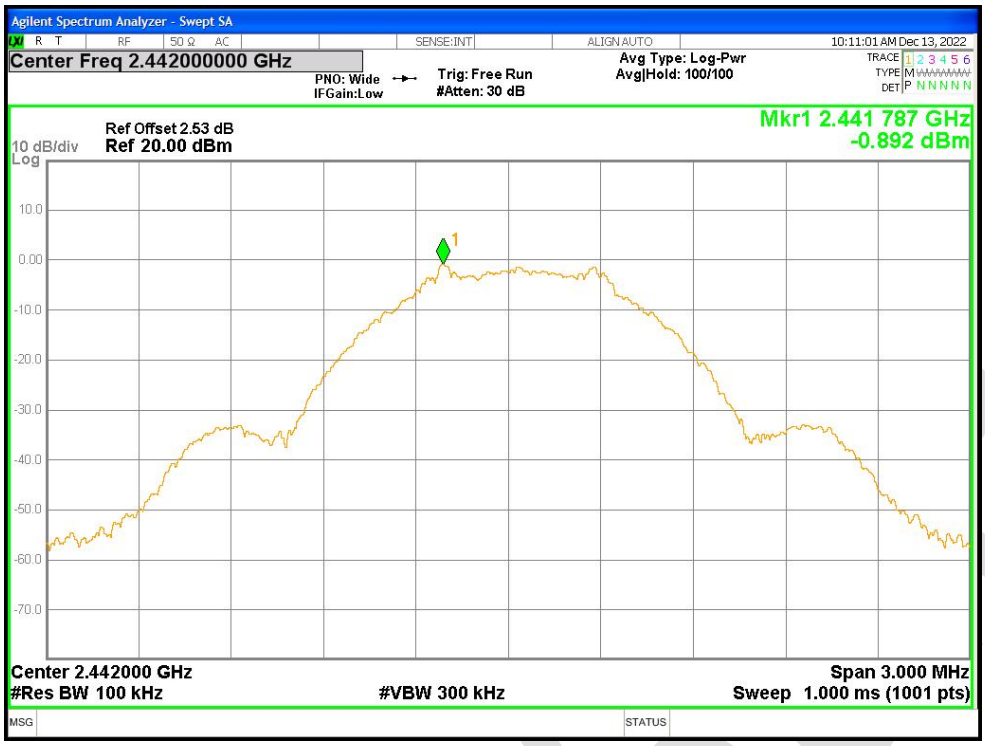

PSD NVNT BLE 1M 2480MHz Ant1

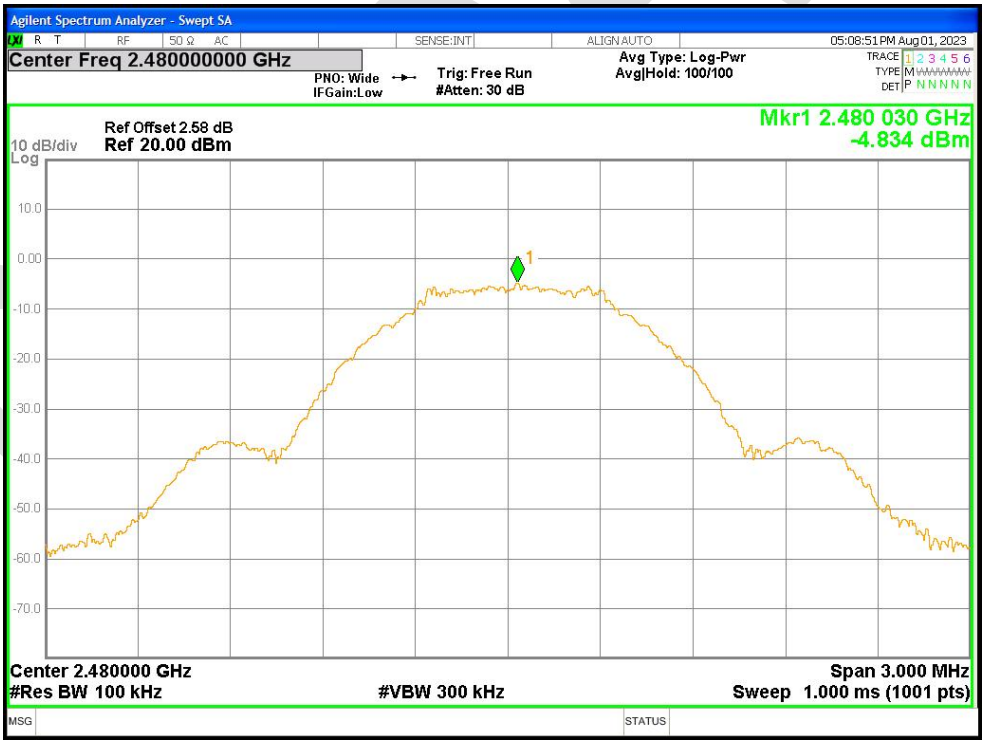

PSD NVNT BLE 2M 2402MHz Ant1

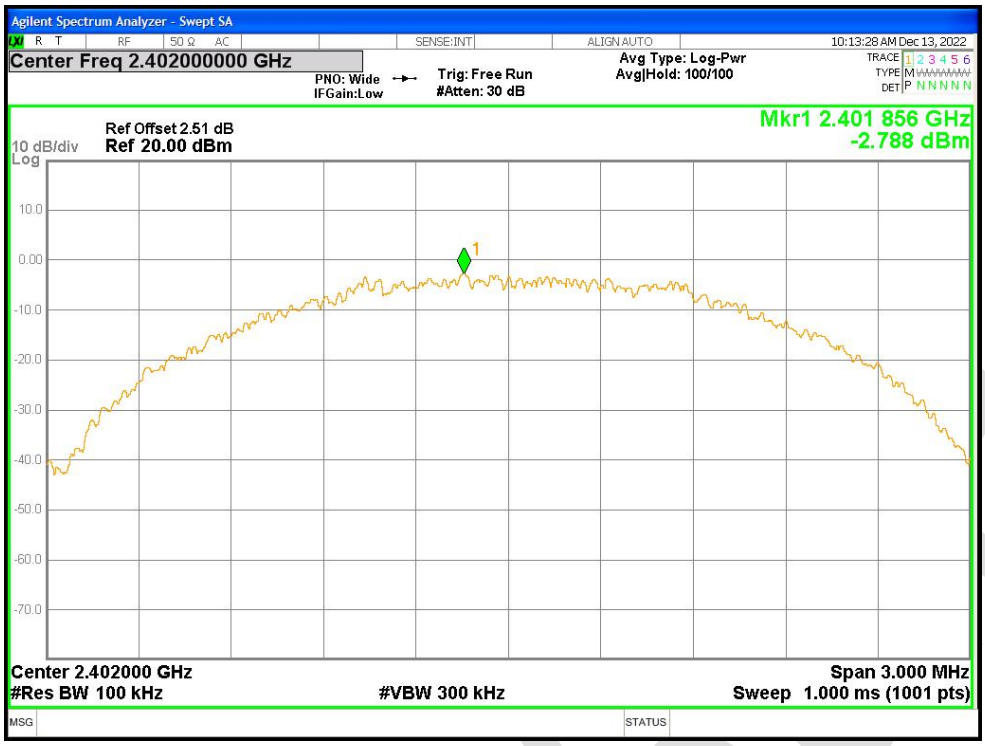

PSD NVNT BLE 2M 2442MHz Ant1

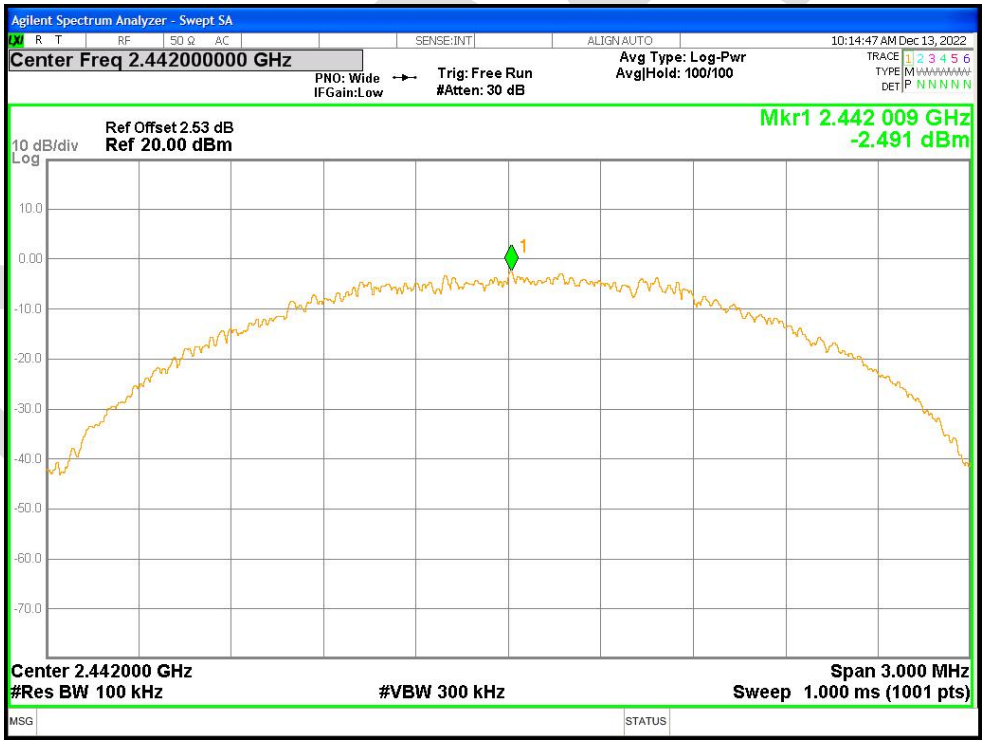

PSD NVNT BLE 2M 2480MHz Ant1

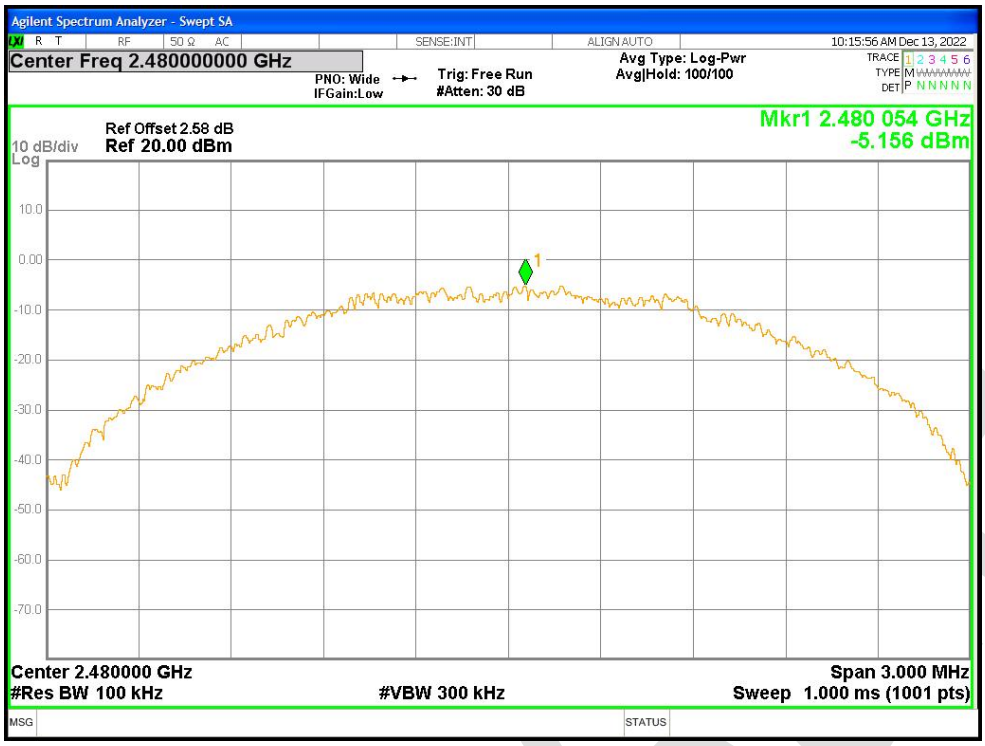
Agilent Spectrum Analyzer - Swept SA
Center Freq 2.480000000 GHz
PNO: Wide
IFGain:Low
Trig: Free Run
#Atten: 30 dB
Avg Type: Log-Pwr
Avg|Hold: 100/100
10:15:56 AM Dec 13, 2022
Ref Offset 2.58 dB
10 dB/div
Ref 20.00 dBm
Log
Mkr1 2.480 054 GHz
-5.156 dBm
Center 2.480000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Span 3.000 MHz
Sweep 1.000 ms (1001 pts)

19.4 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-54.36	-30	Pass
NVNT	BLE 1M	2480	Ant1	-51.78	-30	Pass
NVNT	BLE 2M	2402	Ant1	-52.26	-30	Pass
NVNT	BLE 2M	2480	Ant1	-49.61	-30	Pass

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

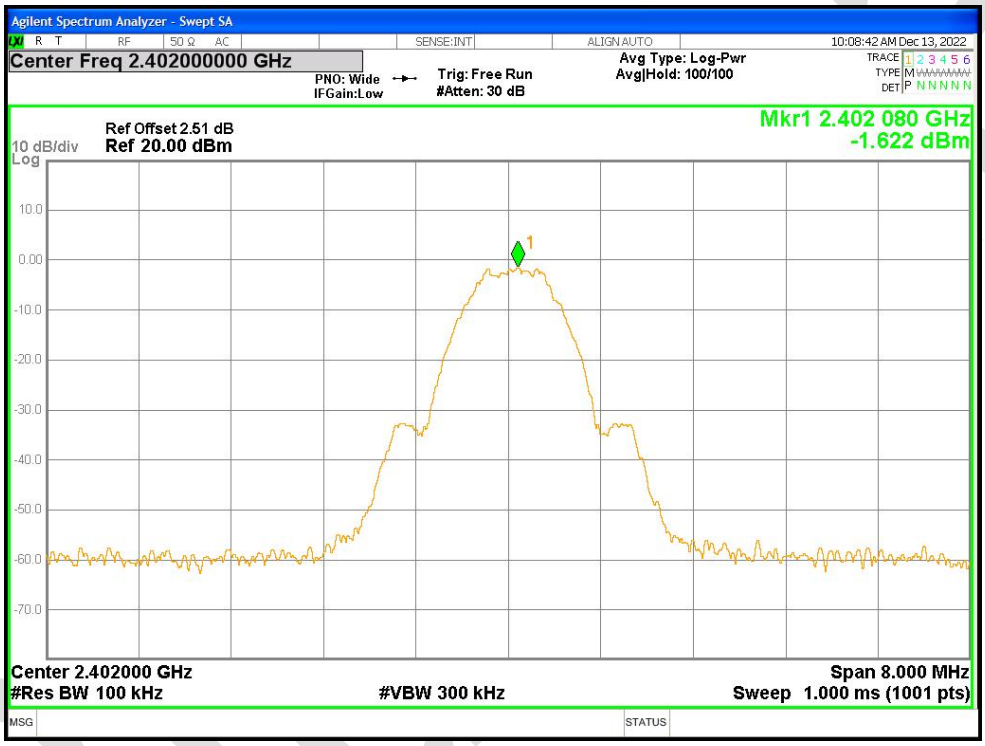

Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

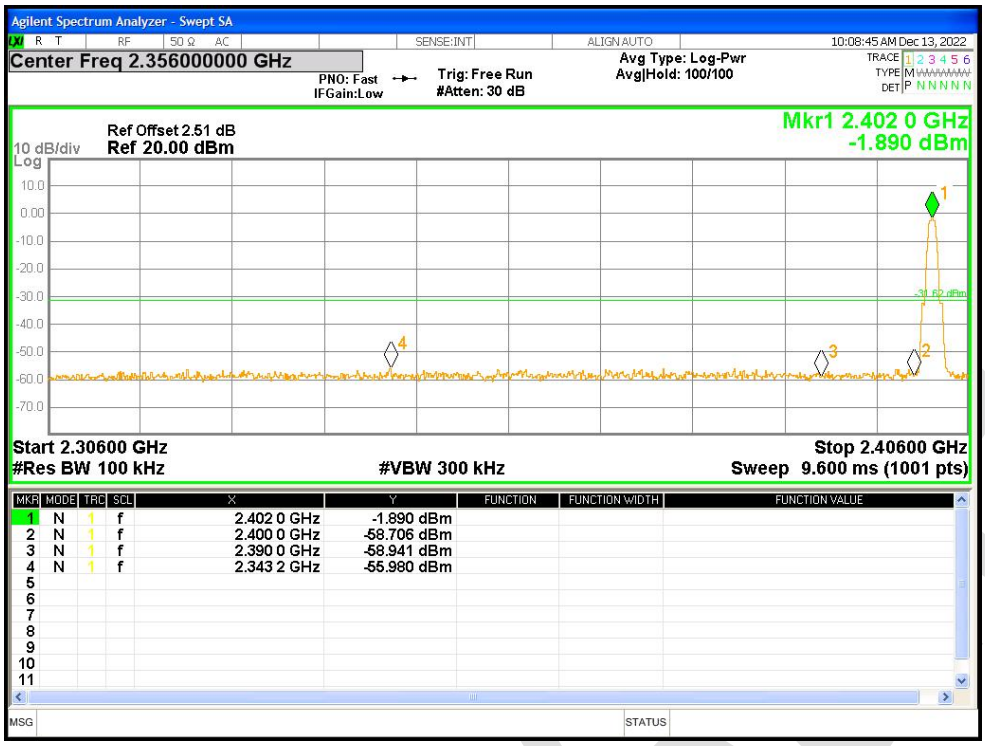

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

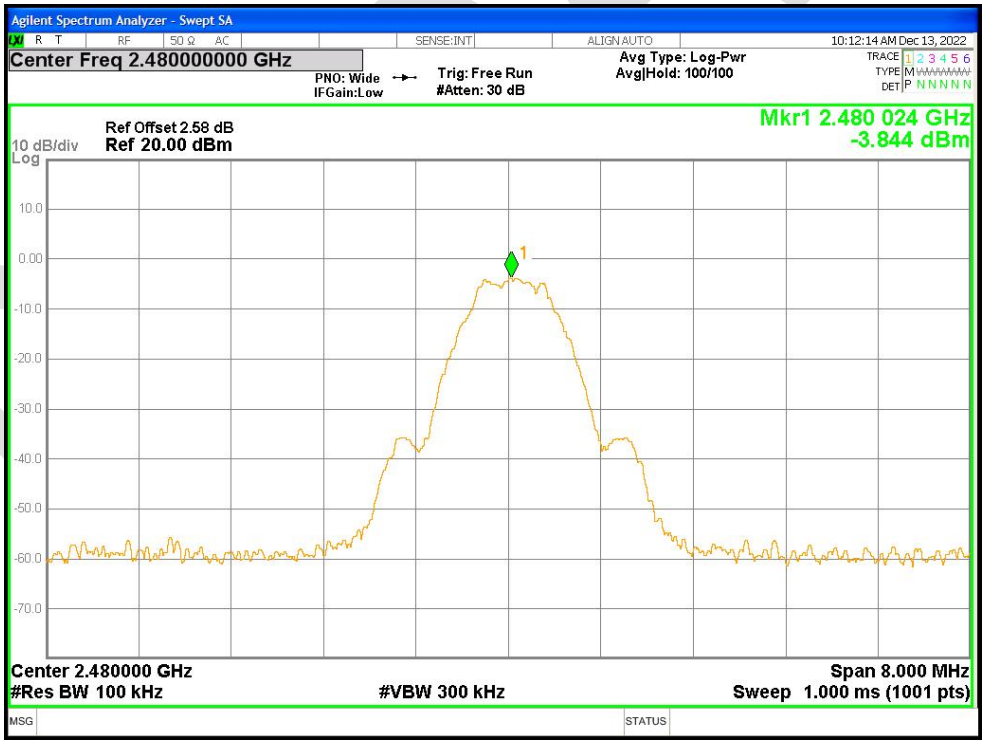

Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

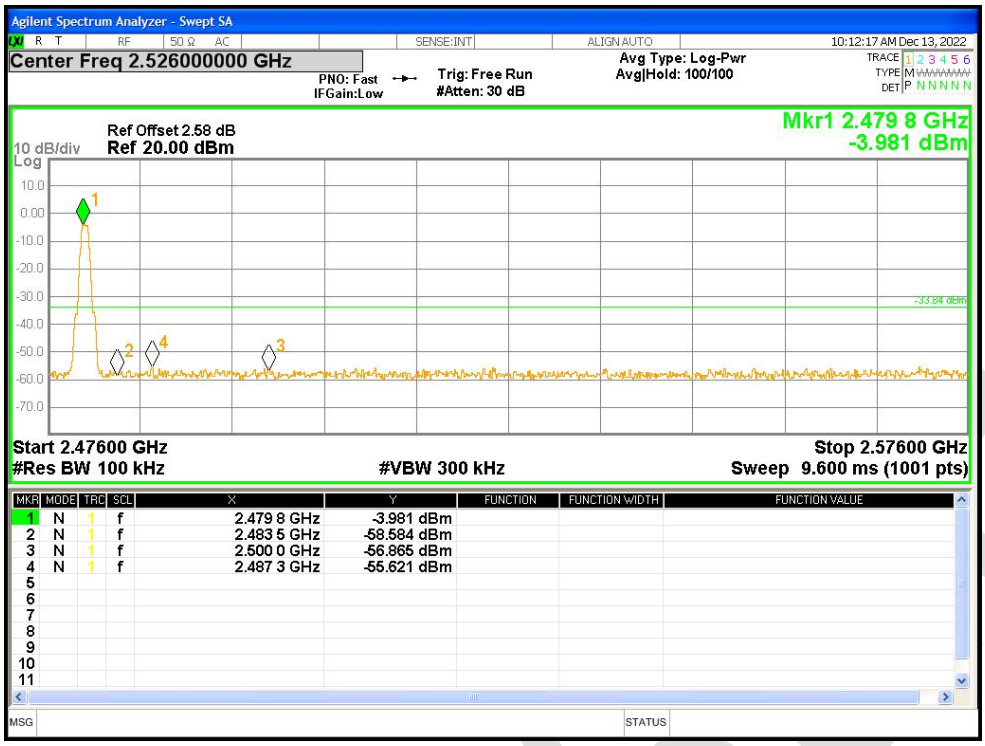

Band Edge NVNT BLE 2M 2402MHz Ant1 Ref

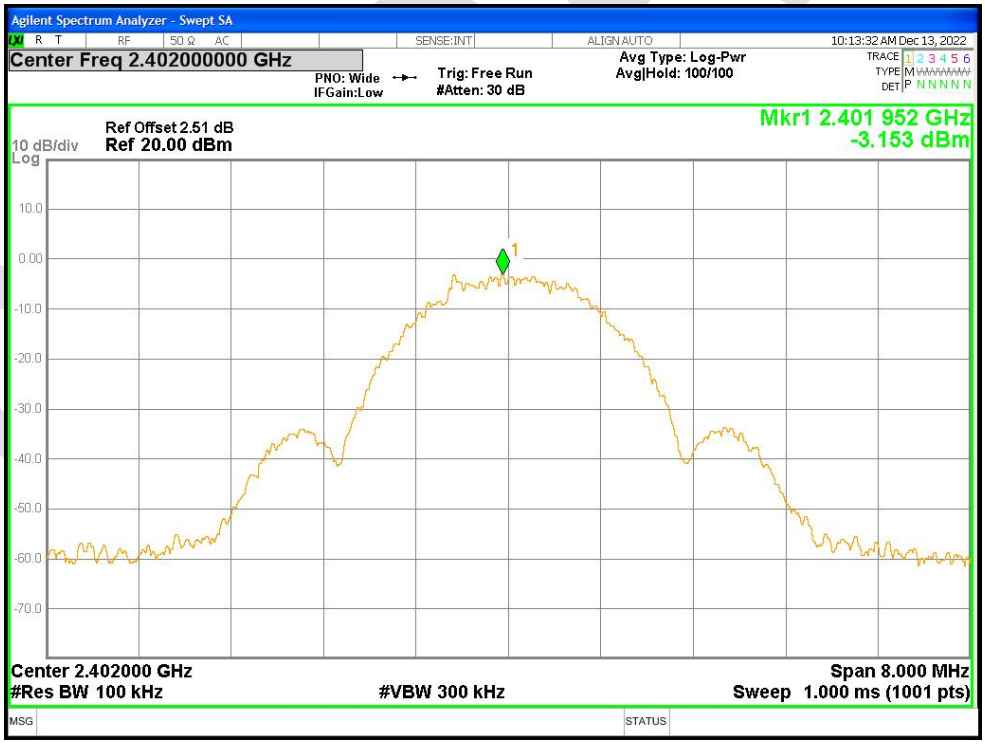

Band Edge NVNT BLE 2M 2402MHz Ant1 Emission