NVLAP TESTING
NVLAP LAB CODE 600341-0

BACL Bay Area Compliance Labs Corp.

TEST REPORT

Applicant: **TAG Sports and Outdoor LLC**

Address: **1421 Research Park Drive Suite 2A, Lawrence, KS, United States**

Product Name: **TAG One Sports Radar**

FCC ID: **2BNPA-TAGONEG1**

Standard(s): **47 CFR Part 15, Subpart C(15.247)**
ANSI C63.10-2020
KDB 558074 D01 15.247 Meas Guidance v05r02

Report Number: **2502Q09631E-RF-00A**

Report Date: **2025/4/3**

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Pedro Yun

Gavin Xu

Reviewed By: **Pedro Yun**
Title: **Project Engineer**

Approved By: **Gavin Xu**
Title: **RF Supervisor**

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China
Tel: +86-769-86858888
Fax: +86-769-86858891
www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★.This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY ····· 4
1. GENERAL INFORMATION ····· 5
1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST ····· 5
1.2 ACCESSORY INFORMATION ····· 5
1.3 ANTENNA INFORMATION DETAIL▲ ····· 5
1.4 EQUIPMENT MODIFICATIONS ····· 5
2. SUMMARY OF TEST RESULTS ····· 6
3. DESCRIPTION OF TEST CONFIGURATION ····· 7
3.1 OPERATION FREQUENCY DETAIL ····· 7
3.2 EUT OPERATION CONDITION ····· 7
3.3 SUPPORT EQUIPMENT LIST AND DETAILS ····· 7
3.4 SUPPORT CABLE LIST AND DETAILS ····· 7
3.5 BLOCK DIAGRAM OF TEST SETUP ····· 8
3.6 TEST FACILITY ····· 9
3.7 MEASUREMENT UNCERTAINTY ····· 9
4. REQUIREMENTS AND TEST PROCEDURES ····· 10
4.1 AC LINE CONDUCTED EMISSIONS ····· 10
4.1.1 Applicable Standard ····· 10
4.1.2 EUT Setup ····· 11
4.1.3 EMI Test Receiver Setup ····· 11
4.1.4 Test Procedure ····· 12
4.1.5 Corrected Result& Margin Calculation ····· 12
4.1.6 Test Result ····· 12
4.2 RADIATION SPURIOUS EMISSIONS ····· 13
4.2.1 Applicable Standard ····· 13
4.2.2 EUT Setup ····· 13
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup ····· 15
4.2.4 Test Procedure ····· 15
4.2.5 Corrected Result & Margin Calculation ····· 16
4.2.6 Test Result ····· 16
4.3 MINIMUM 6 dB BANDWIDTH ····· 17
4.3.1 Applicable Standard ····· 17
4.3.2 EUT Setup ····· 17
4.3.3 Test Procedure ····· 17
4.3.4 Test Result ····· 17
4.4 MAXIMUM CONDUCTED OUTPUT POWER ····· 18
4.4.1 Applicable Standard ····· 18
4.4.2 EUT Setup ····· 18
4.4.3 Test Procedure ····· 18
4.4.4 Test Result ····· 18
4.5 MAXIMUM POWER SPECTRAL DENSITY ····· 19

4.5.1 Applicable Standard 19
4.5.2 EUT Setup 19
4.5.3 Test Procedure 19
4.5.4 Test Result 19
4.6 100 kHz Bandwidth of Frequency Band Edge 20
4.6.1 Applicable Standard 20
4.6.2 EUT Setup 20
4.6.3 Test Procedure 20
4.6.4 Test Result 20
4.7 Duty Cycle 21
4.7.1 EUT Setup 21
4.7.2 Test Procedure 21
4.7.3 Judgment 21
4.8 Antenna Requirement 22
4.8.1 Applicable Standard 22
4.8.2 Judgment 22
5. TEST DATA AND RESULTS 23
5.1 AC Line Conducted Emissions 23
5.2 Radiation Spurious Emissions 26
5.3 6dB Emission Bandwidth 41
5.4 Maximum Conducted Output Power 43
5.5 Power Spectral Density 45
5.6 100 kHz Bandwidth of Frequency Band Edge 47
5.7 Duty Cycle 49
EXHIBIT A - EUT PHOTOGRAPHS 50
EXHIBIT B - TEST SETUP PHOTOGRAPHS 51
EXHIBIT C - RF EXPOSURE EVALUATION 52
Applicable Standard 52
Calculation formula: 52
Calculated Data: 52

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2502Q09631E-RF-00A	Original Report	2025/4/3

1. GENERAL INFORMATION

1.1 General Description Of Equipment under Test

EUT Name:	TAG One Sports Radar
EUT Model:	TAG One
Operation Frequency:	2402-2480 MHz
Maximum Peak Output Power (Conducted):	2.13dBm
Modulation Type:	GFSK
Rated Input Voltage:	DC 3.8V from battery or DC 5V from USB
Serial Number:	2YAI-1 (For RF Conducted test) 2YAI-2 (For Radiated Spurious Emission Above 1G test) 2YAI-4 (For AC Line Conducted Emissions and Radiated Spurious Emission Below 1G tests)
EUT Received Date:	2025/2/13
EUT Received Status:	Good

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.3 Antenna Information Detail▲

Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
ABRACON	Ceramic Chip	50	2400-2500MHz	2.3 dBi
The design of compliance with §15.203:				
☒ Unit uses a permanently attached antenna. ☐ Unit uses a unique coupling to the intentional radiator. ☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.				

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.205,§15.209,§15.247(d)	Radiated Spurious Emission	Compliant
FCC §15.247(a)(2)	6dB Emission Bandwidth	Compliant
FCC §15.247(b)(1)	Maximum Conducted Output Power	Compliant
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e)	Power Spectral Density	Compliant
FCC §15.203	Antenna Requirement	Compliant
§1.1310 & §2.1091	RF Exposure	Compliant
Note 1: For AC line conducted emissions, the maximum output power mode and channel was tested. Note 2: For Radiated Spurious Emissions 9kHz~1GHz and 18~25GHz, the maximum output power mode and channel was tested.		

3. DESCRIPTION OF TEST CONFIGURATION

3.1 Operation Frequency Detail

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	**2402**	20	2442
1	2404	…	…
…	…	…	…
…	…	…	…
…	…	38	2478
19	**2440**	39	**2480**

Note: The above frequencies in bold were performed the test.

3.2 EUT Operation Condition

The EUT was configured for testing in Engineering Mode, which was provided by the manufacturer. The EUT configuration as below:

EUT Exercise Software:	Direct Test Mode v2.4.1		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:			
Test Modes	Power Level Setting		
	Lowest Channel	Middle Channel	Highest Channel
BLE 1Mbps	3	3	3
BLE 2Mbps	3	3	3

3.3 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
HONOR	Adapter(USB)	ADS-12EA-0505010E	EA1320505

3.4 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	no	no	1.3	Adapter	EUT

3.5 Block Diagram of Test Setup

AC line conducted emissions:

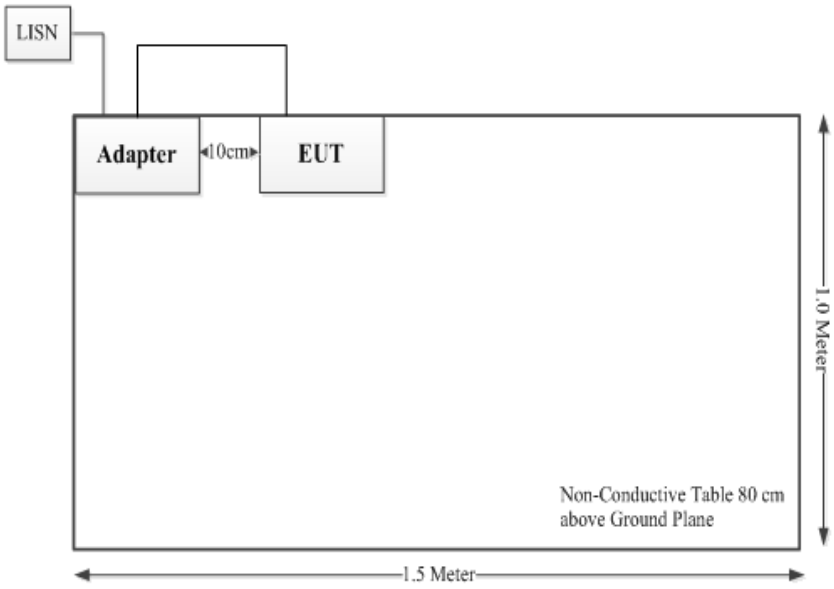

Spurious Emissions:

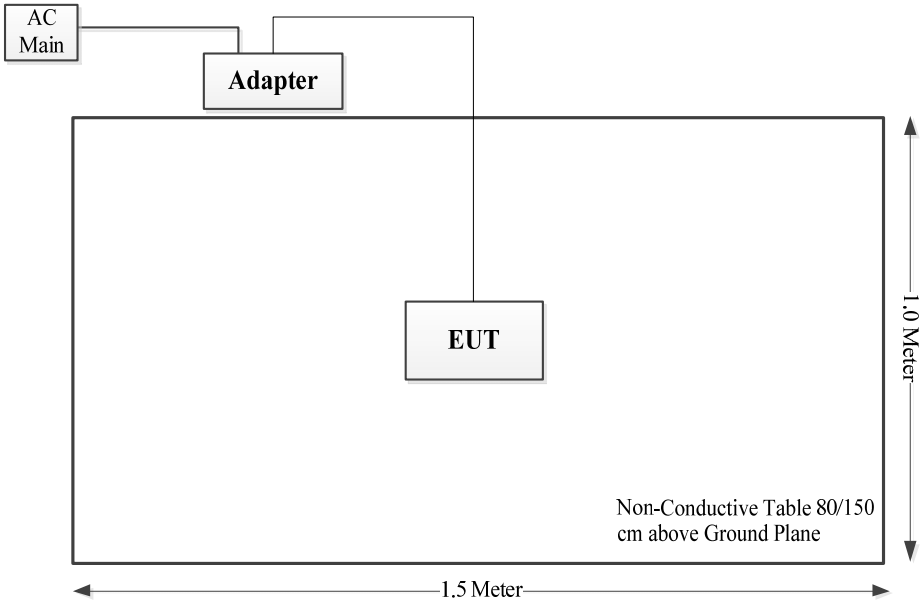

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB,200MHz~1GHz: 5.92 dB,1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz:5.47 dB, 26.5GHz~40GHz:5.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST PROCEDURES

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

	Conducted limit (dBµV)	
Frequency of emission (MHz)	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 µV within the frequency band 535-1705 kHz, as measured using a 50 µH/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221,§15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

4.1.2 EUT Setup

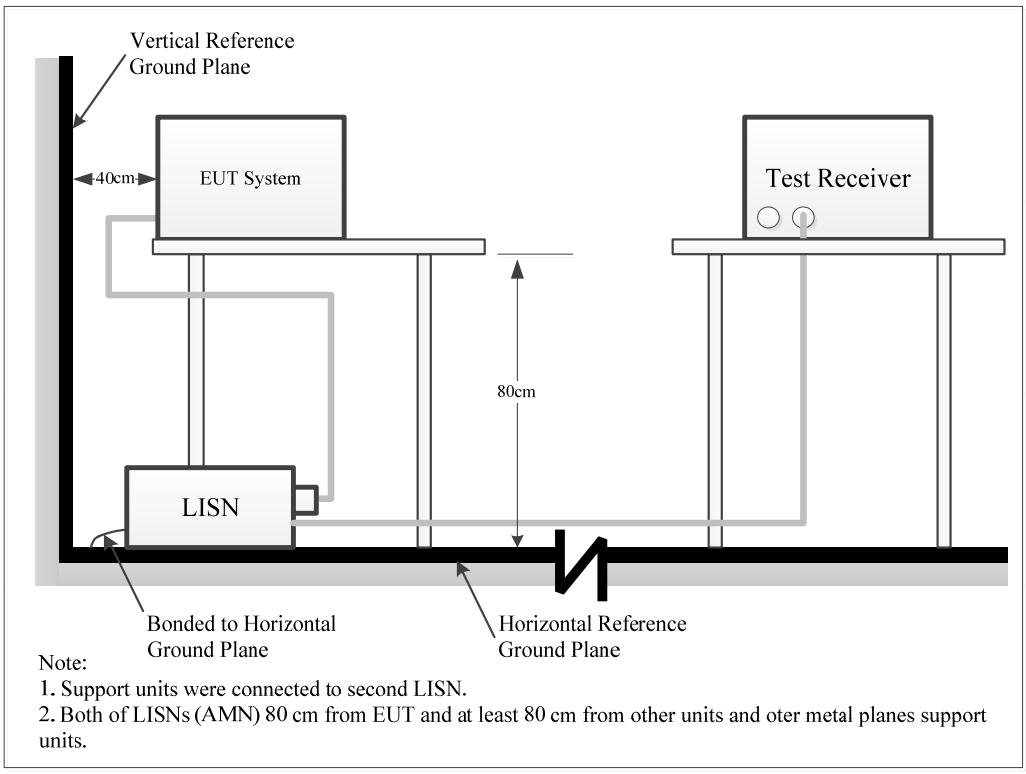

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground[protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Result& Margin Calculation

The basic equation is as follows:

Result = Reading + Factor
Factor=attenuation caused by cable loss + voltage division factor of AMN

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result

Please refer to section 5.1.

4.2 Radiation Spurious Emissions

4.2.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in§15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

4.2.2 EUT Setup

9kHz-30MHz:

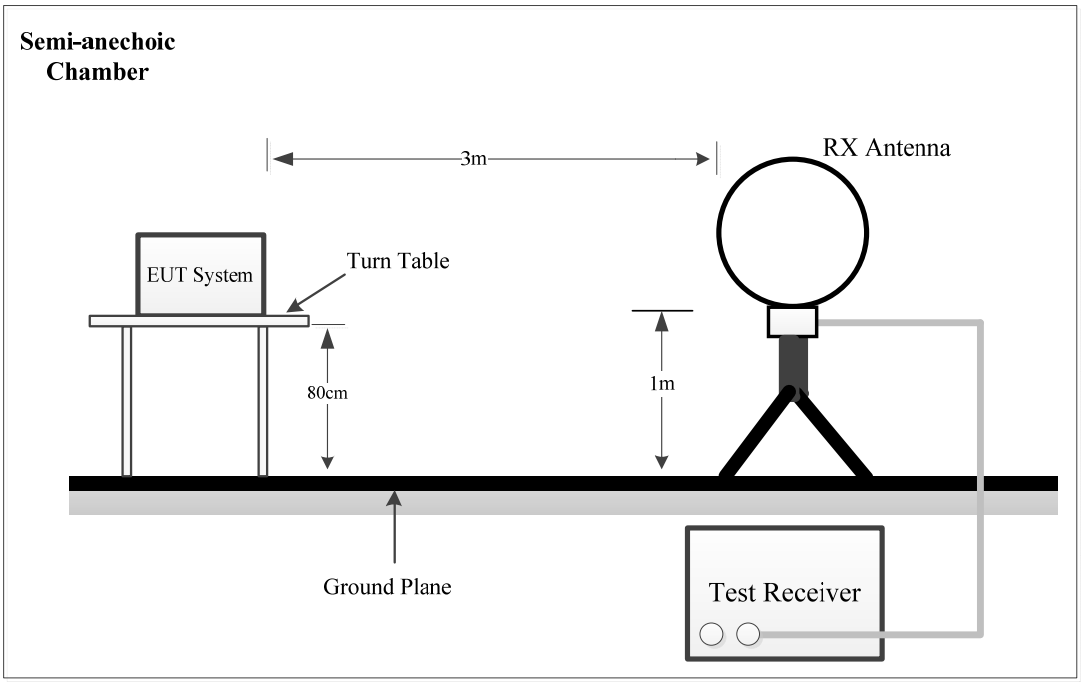

30MHz~1GHz:

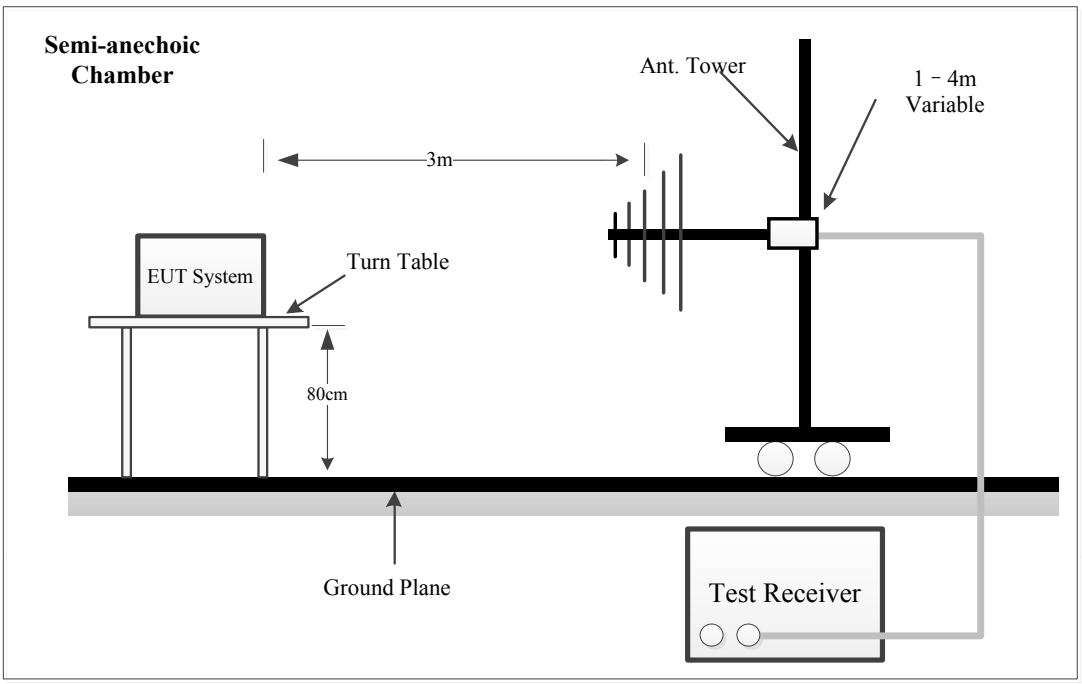

Above 1GHz:

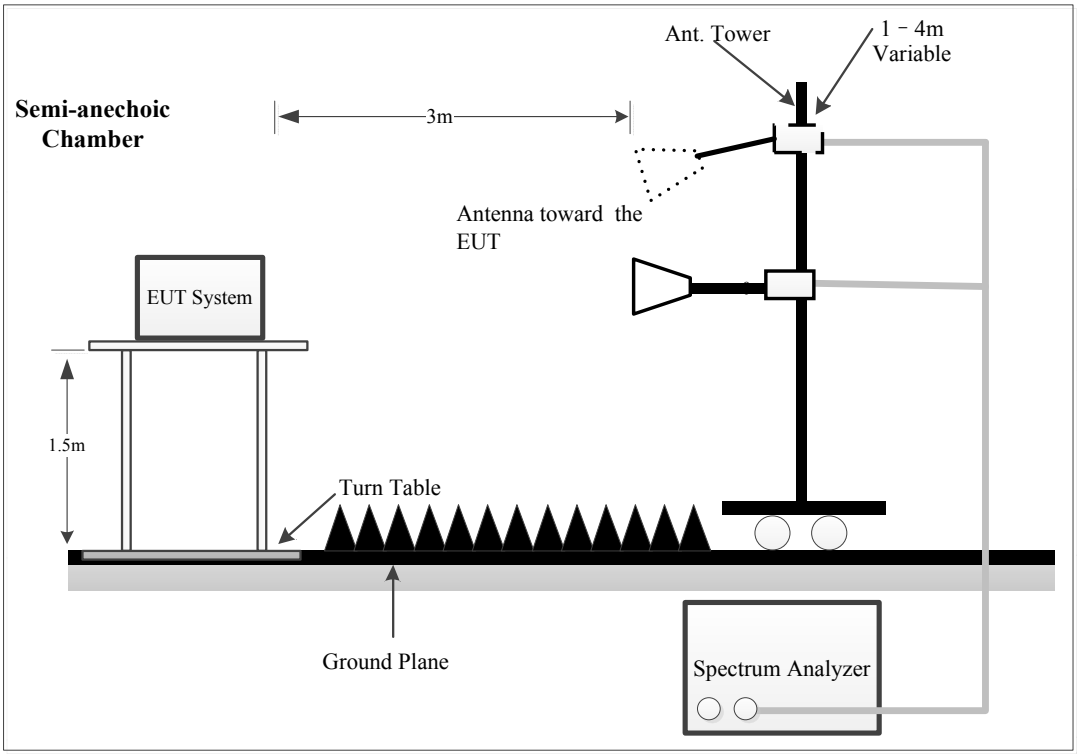

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9 kHz-150 kHz	QP/AV	300 Hz	1 kHz	200 Hz	QP/AV
150 kHz-30 MHz	QP/AV	10 kHz	30 kHz	9 kHz	QP/AV
30 MHz-1000 MHz	Peak	100 kHz	300 kHz	/	PK
	QP	/	/	120 kHz	QP

Above 1GHz:
Pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	Peak	Any	1MHz	3 MHz
Ave.	Peak	>98%	1MHz	5kHz
		<98%	1MHz	≥1/T, not less than 5kHz

Final measurement for emission identified during the pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	Peak	Any	1MHz	3 MHz
Ave.	Peak	>98%	1MHz	10 Hz
		<98%	1MHz	≥1/T

Note: T is minimum transmission duration

4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was required in Quasi-peak measurement for frequency range of 9 kHz-1 GHz except 9-90 kHz, 110-490 kHz, employing an average measurement, peak and Average measurement for frequencies above 1 GHz.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

4.2.5 Corrected Result & Margin Calculation

$E_{Log} = 20 \times \log_{10}(E_{Linear})$

E_{Linear} is the field strength of the emission, in μV/m
E_{Log} is the field strength of the emission, in dBμV/m

For 9kHz-30MHz test, test distance is 3m, extrapolation limit shall be calculated using Equation:

$E_{limit\text{-}measure} = E_{limit\text{-}Standard} + 40\times \log_{10} (d_{standard}/d_{measure})$

The basic equation is as follows:

Result = Reading + Factor
Factor= Antenna Factor + Cable Loss- Amplifier Gain

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.2.6 Test Result

Please refer to section 5.2.

4.3 Minimum 6 dB Bandwidth

4.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

4.3.2 EUT Setup

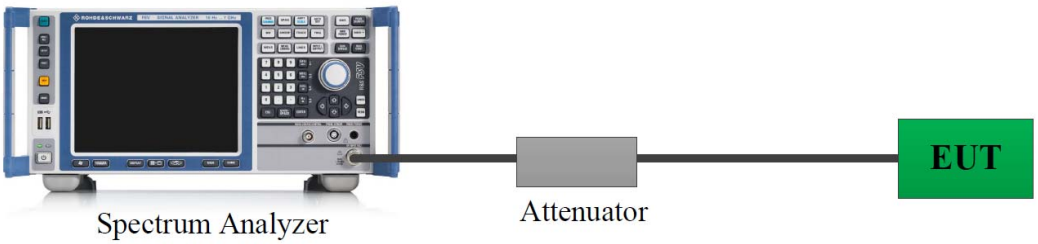

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.3.3 Test Procedure

According to ANSI C63.10-2020 Section 11.8

a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
b) Set the VBW ≥ [3 × RBW].
c) Detector = peak.
d) Trace mode = max-hold.
e) Sweep = No faster than coupled (auto) time.
f) Allow the trace to stabilize.
g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the "−6 dB down amplitude". If a marker is below this "−6 dB down amplitude" value, then it shall be as close as possible to this value.

4.3.4 Test Result

Please refer to section 5.3.

4.4 Maximum Conducted Output Power

4.4.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

4.4.2 EUT Setup

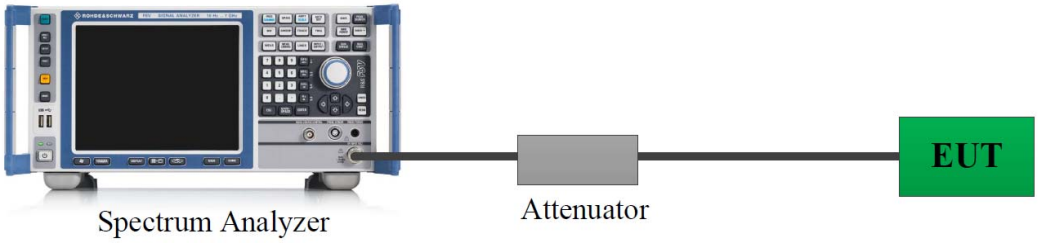

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.4.3 Test Procedure

According to ANSI C63.10-2020 Section 11.9.1.1

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:
a) Set the RBW ≥ DTS bandwidth.
b) Set VBW ≥ [3 × RBW].
c) Set span ≥ [3 × RBW].
d) Sweep time = No faster than coupled (auto) time.
e) Detector = peak.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use peak marker function to determine the peak amplitude level.

4.4.4 Test Result

Please refer to section 5.4.

4.5 Maximum power spectral density

4.5.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

4.5.2 EUT Setup

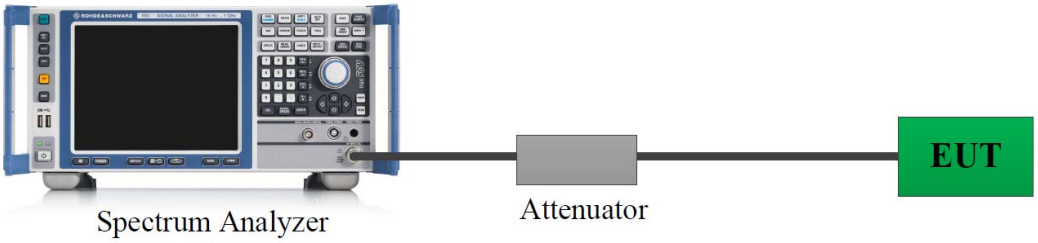

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.5.3 Test Procedure

According to ANSI C63.10-2020 Section 11.10.2

a) Set analyzer center frequency to DTS channel center frequency.
b) Set the span >1.5 times the DTS bandwidth.
c) Set the RBW to 3 kHz ≤ RBW ≤ 100 kHz.
d) Set the VBW ≥ [3 × RBW].
e) Detector = peak.
f) Sweep time = No faster than coupled (auto) time.
g) Trace mode = max hold.
h) Allow trace to fully stabilize.
i) Use the peak marker function to determine the maximum amplitude level within the RBW.
j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

4.5.4 Test Result

Please refer to section 5.5.

4.6 100 kHz Bandwidth of Frequency Band Edge

4.6.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in§15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

4.6.2 EUT Setup

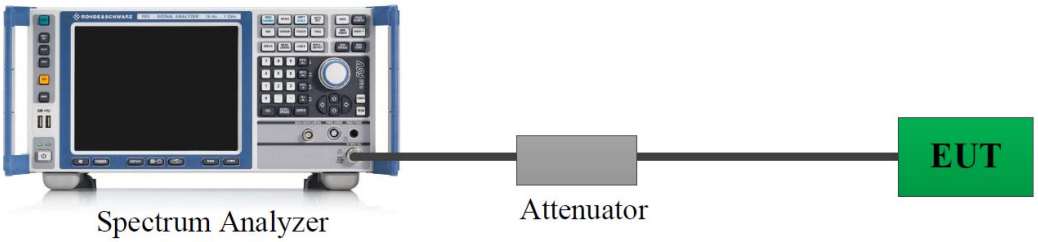

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.6.3 Test Procedure

According to ANSI C63.10-2020 Section 11.11

a) Set the center frequency and span to encompass frequency range to be measured.
b) Set the RBW = 100 kHz.
c) Set the VBW ≥ [3 × RBW].
d) Detector = peak.
e) Sweep time = No faster than coupled (auto) time.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use the peak marker function to determine the maximum amplitude level.
Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

4.6.4 Test Result

Please refer to section 5.6.

4.7 Duty Cycle

4.7.1 EUT Setup

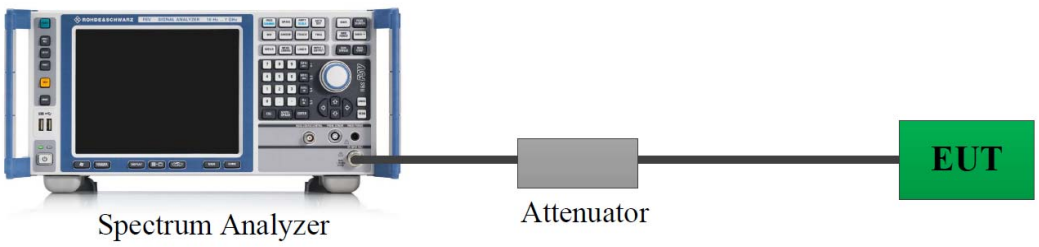

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.7.2 Test Procedure

According to ANSI C63.10-2020 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
1) Set the center frequency of the instrument to the center frequency of the transmission.
2) Set RBW ≥ OBW if possible; otherwise, set RBW to the largest available value.
3) Set VBW ≥ RBW. Set detector = peak or average.
4) The zero-span measurement method shall not be used unless both RBW and VBW are> 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if T ≤ 16.7 μs.)

4.7.3 Judgment

Report only, please refer to section 5.7.

4.8 Antenna Requirement

4.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or§15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.8.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.3.

5. TEST DATA AND RESULTS

5.1 AC Line Conducted Emissions

Serial Number:	2YAI-4	Test Date:	2025/03/31
Test Site:	CE	Test Mode:	Transmitting
Tester:	Yolo Fan	Test Result:	Pass

Environmental Conditions:

Temperature: (℃)	20.4	Relative Humidity: (%)	48	ATM Pressure: (kPa)	101.5

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2024/9/5	2025/9/4
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2024/9/5	2025/9/4
R&S	EMI Test Receiver	ESCI	101121	2024/9/5	2025/9/4
Audix	Test Software	E3	191218 V9	N/A	N/A

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Note: BLE 1M Low channel was tested.

Project No.: 2502Q09631E-RF
Port: Line
Test Mode: Transmitting
IF B/W 9KHz PK/AV

Serial No.: 2YAI-4
Tester: Yolo Fan

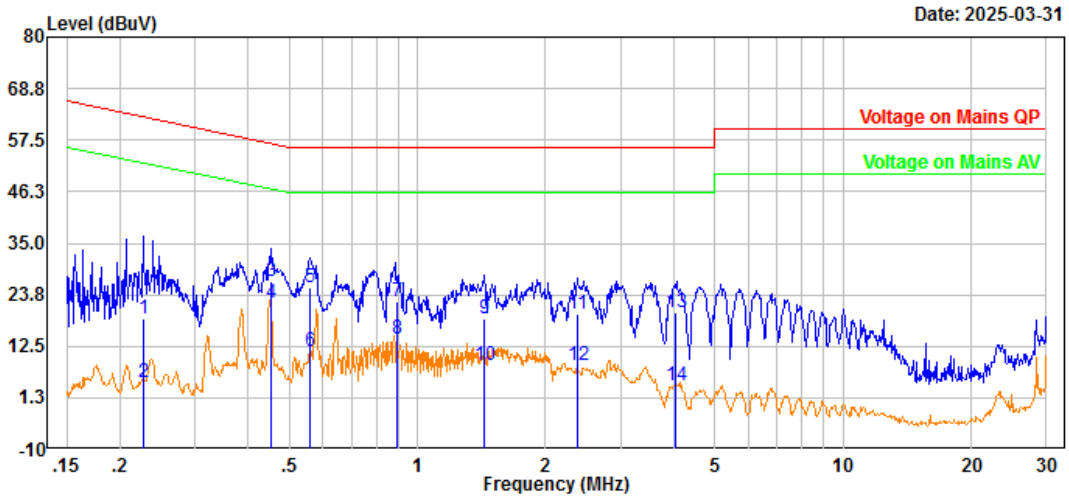

No.	Frequency (MHz)	Reading (dBµV)	Factor (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)	Measurement
1	0.23	7.83	10.84	18.67	62.53	43.86	QP
2	0.23	-6.12	10.84	4.72	52.53	47.81	Average
3	0.45	15.83	10.84	26.67	56.83	30.16	QP
4	0.45	11.21	10.84	22.05	46.83	24.78	Average
5	0.56	14.34	10.83	25.17	56.00	30.83	QP
6	0.56	0.53	10.83	11.36	46.00	34.64	Average
7	0.90	11.40	10.86	22.26	56.00	33.74	QP
8	0.90	3.40	10.86	14.26	46.00	31.74	Average
9	1.44	7.53	10.84	18.37	56.00	37.63	QP
10	1.44	-2.54	10.84	8.30	46.00	37.70	Average
11	2.37	8.57	10.81	19.38	56.00	36.62	QP
12	2.37	-2.37	10.81	8.44	46.00	37.56	Average
13	4.03	9.04	10.76	19.80	56.00	36.20	QP
14	4.03	-6.77	10.76	3.99	46.00	42.01	Average

Project No.: 2502Q09631E-RF
Port: neutral
Test Mode: Transmitting
IF B/W 9KHz PK/AV

Serial No.: 2YAI-4
Tester: Yolo Fan

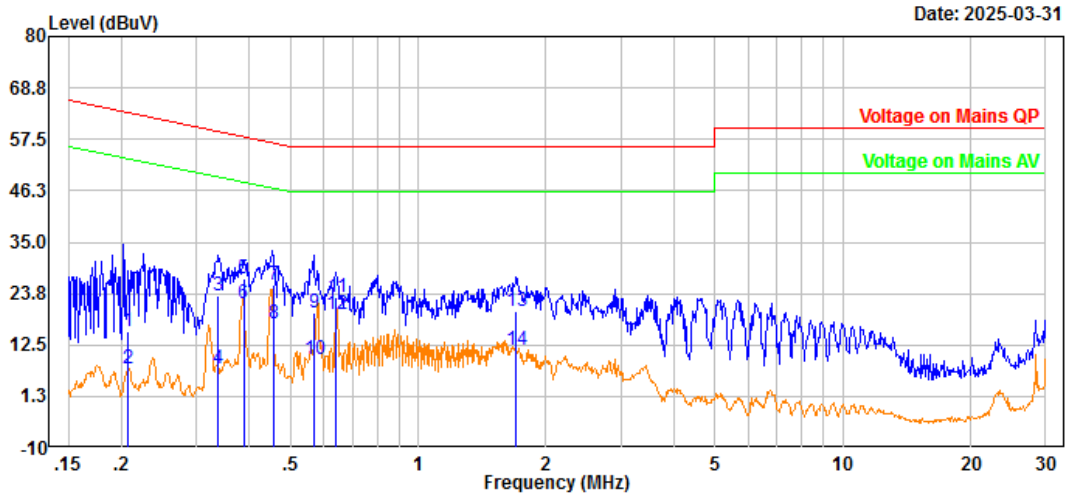

No.	Frequency (MHz)	Reading (dBµV)	Factor (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)	Measurement
1	0.21	4.77	10.85	15.62	63.31	47.69	QP
2	0.21	-3.68	10.85	7.17	53.31	46.14	Average
3	0.34	12.50	10.78	23.28	59.26	35.98	QP
4	0.34	-3.36	10.78	7.42	49.26	41.84	Average
5	0.39	16.39	10.78	27.17	58.11	30.94	QP
6	0.39	10.94	10.78	21.72	48.11	26.39	Average
7	0.46	14.82	10.75	25.57	56.76	31.19	QP
8	0.46	6.47	10.75	17.22	46.76	29.54	Average
9	0.57	8.86	10.73	19.59	56.00	36.41	QP
10	0.57	-1.30	10.73	9.43	46.00	36.57	Average
11	0.64	12.36	10.74	23.10	56.00	32.90	QP
12	0.64	8.33	10.74	19.07	46.00	26.93	Average
13	1.70	8.98	10.90	19.88	56.00	36.12	QP
14	1.70	0.59	10.90	11.49	46.00	34.51	Average

5.2 Radiation Spurious Emissions

1)9kHz - 1GHz

Serial Number:	2YAI-4	Test Date:	2025/3/4
Test Site:	Chamber10m	Test Mode:	Transmitting
Tester:	Zoo Zou	Test Result:	Pass

Environmental Conditions:					
Temperature: (℃)	25.3	Relative Humidity: (%)	62	ATM Pressure: (kPa)	100.3

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:
Please refer to the below table and plots.
After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to table and plots.

Note: BLE 1M Low channel was tested.

9kHz~30MHz

Three antenna orientations (parallel, perpendicular, and ground-parallel) was measured, the worst orientations was below:

Project No.: 2502Q09631E-RF
Polarization: Parallel
Test Mode: Transmitting
Note:
RBW:300Hz VBW:1kHz

Serial No.: 2YAI-4
Tester: Zoo Zou

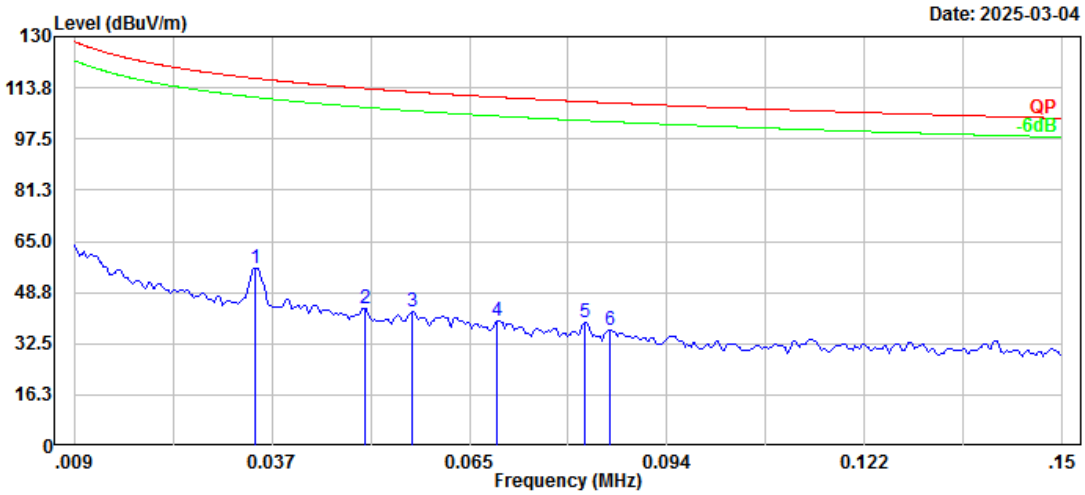

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.035	9.94	46.67	56.61	116.74	60.13	Peak
2	0.050	-0.18	43.97	43.79	113.55	69.76	Peak
3	0.057	-0.26	42.81	42.55	112.45	69.90	Peak
4	0.069	-0.95	40.70	39.75	110.78	71.03	Peak
5	0.082	0.75	38.61	39.36	109.35	69.99	Peak
6	0.085	-0.95	37.95	37.00	108.97	71.97	Peak

Project No.: 2502Q09631E-RF
Polarization: Parallel
Test Mode: Transmitting
Note:
RBW:10kHz VBW:30kHz

Serial No.: 2YAI-4
Tester: Zoo Zou

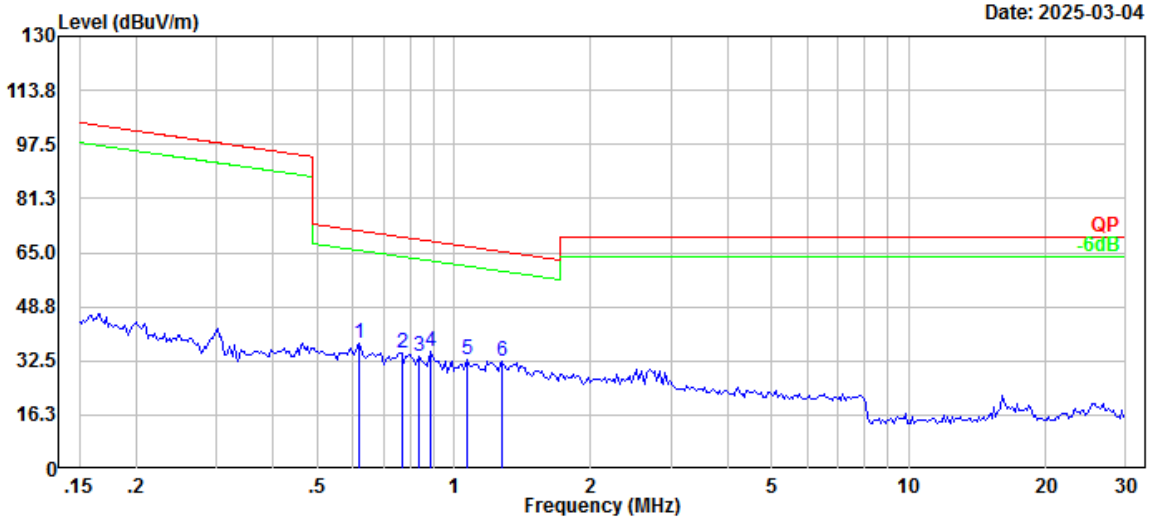

No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
1	0.621	15.49	22.25	37.74	71.71	33.97	Peak
2	0.767	13.92	20.86	34.78	69.83	35.05	Peak
3	0.835	14.23	19.86	34.09	69.07	34.98	Peak
4	0.890	16.33	18.77	35.10	68.51	33.41	Peak
5	1.065	16.36	16.27	32.63	66.91	34.28	Peak
6	1.276	16.96	15.34	32.30	65.31	33.01	Peak

30MHz-1GHz

Project No.: 2502Q09631E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note:
RBW:100kHz VBW:300kHz

Serial No.: 2YAI-4
Tester: Zoo Zou

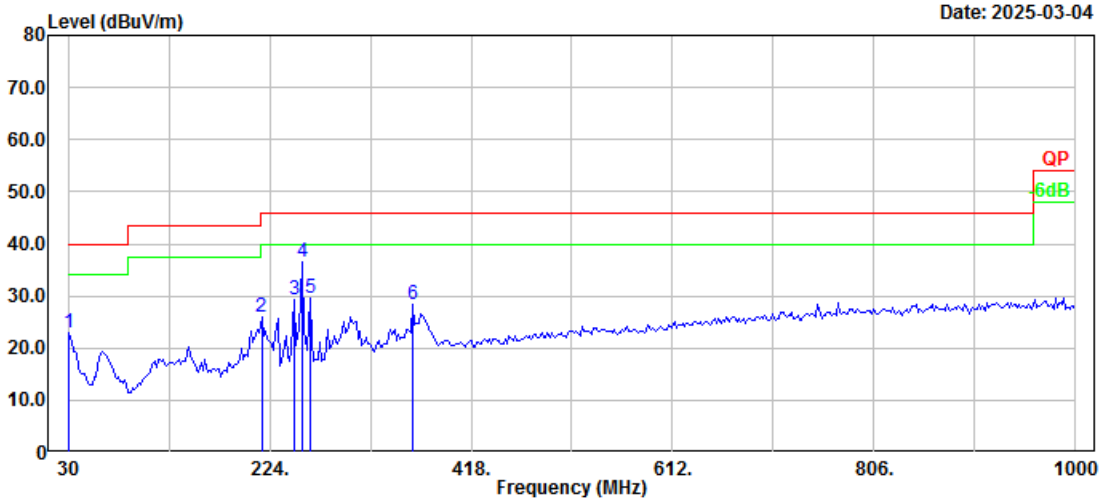

No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
1	30.00	26.85	-3.80	23.05	40.00	16.95	Peak
2	216.24	38.53	-12.52	26.01	46.00	19.99	Peak
3	247.28	40.68	-11.52	29.16	46.00	16.84	Peak
4	255.04	47.76	-11.27	36.49	46.00	9.51	Peak
5	262.80	40.46	-10.83	29.63	46.00	16.37	Peak
6	361.74	36.72	-8.30	28.42	46.00	17.58	Peak

Project No.: 2502Q09631E-RF
Serial No.: 2YAI-4
Polarization: Vertical
Tester: Zoo Zou
Test Mode: Transmitting
Note:
RBW:100kHz VBW:300kHz

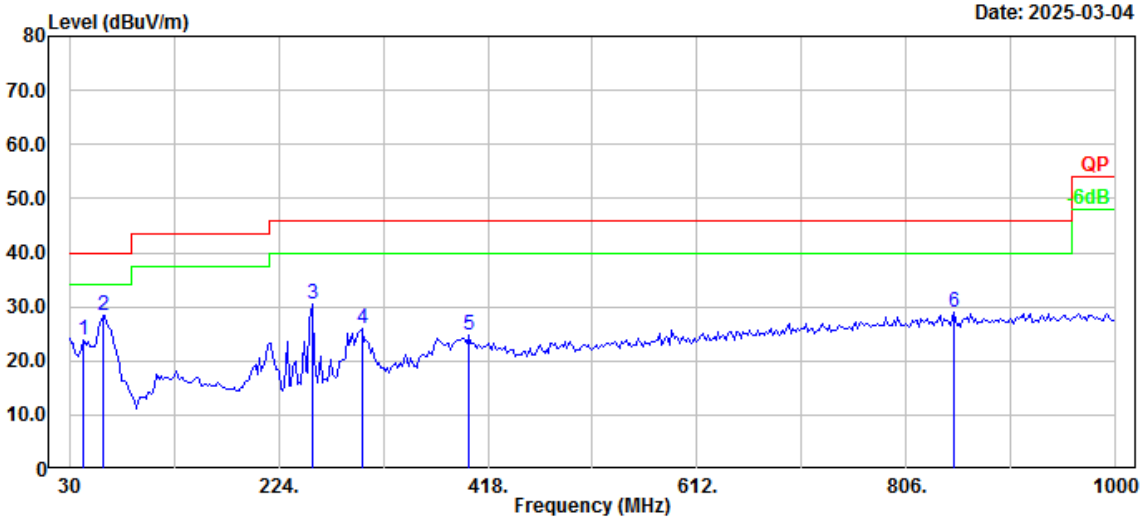

No.	Frequency (MHz)	Reading (dBµV)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
1	43.58	36.67	-12.88	23.79	40.00	16.21	Peak
2	61.04	45.07	-16.62	28.45	40.00	11.55	Peak
3	255.04	41.62	-11.27	30.35	46.00	15.65	Peak
4	301.60	35.46	-9.48	25.98	46.00	20.02	Peak
5	400.54	31.66	-6.96	24.70	46.00	21.30	Peak
6	850.62	28.15	0.89	29.04	46.00	16.96	Peak

2) 1-25GHz:

Serial Number:	2YAI-2	Test Date:	2025/3/19
Test Site:	Chamber B	Test Mode:	Transmitting
Tester:	Leo Xiao	Test Result:	Pass

Environmental Conditions:					
Temperature: (℃)	20.8	Relative Humidity: (%)	39	ATM Pressure: (kPa)	102

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2024/11/17	2025/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2024/12/9	2025/12/8
AH	Preamplifier	PAM-0118P	469	2024/4/15	2025/4/14
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
R&S	Spectrum Analyzer	FSV40	101589	2024/9/5	2025/9/4
Audix	Test Software	E3	191218 V9	N/A	N/A
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2024/8/27	2025/8/26

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Please refer to the below table and plots.
After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to table and plots.

1-18GHz:

BLE 1M_ Low Channel, Horizontal

Project No.: 2502Q09631E-RF Serial No.: 2YAI-2
Polarization: Horizontal Tester: Leo Xiao
Test Mode: Transmitting
Note: BLE 1M low channel 2402MHz
Peak:RBW:1MHz,VBW:3MHz

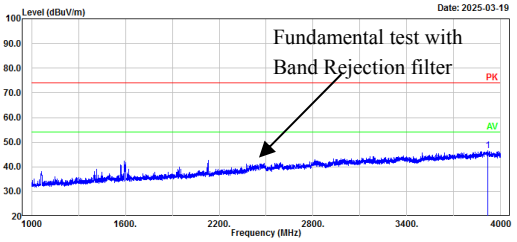

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	3915.40	50.37	-3.72	46.65	74.00	27.35	Peak

BLE 1M_ Low Channel, Vertical

Project No.: 2502Q09631E-RF Serial No.: 2YAI-2
Polarization: Vertical Tester: Leo Xiao
Test Mode: Transmitting
Note: BLE 1M low channel 2402MHz
Peak:RBW:1MHz,VBW:3MHz

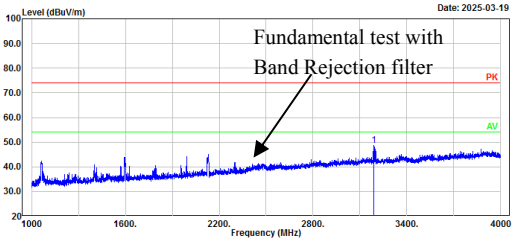

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	3187.00	54.79	-5.97	48.82	74.00	25.18	Peak

Project No.: 2502Q09631E-RF Serial No.: 2YAI-2
Polarization: Horizontal Tester: Leo Xiao
Test Mode: Transmitting
Note: BLE 1M low channel 2402MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

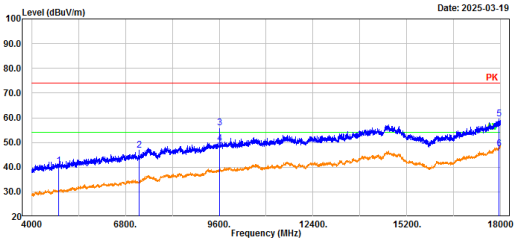

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	4804.00	49.21	-8.62	40.59	74.00	33.41	Peak
2	7206.00	50.69	-3.81	46.88	74.00	27.12	Peak
3	9608.00	54.71	1.18	55.89	74.00	18.11	Peak
4	9608.00	48.26	1.18	49.44	54.00	4.56	Average
5	17941.20	48.46	11.03	59.49	74.00	14.51	Peak
6	17941.20	36.39	11.03	47.42	54.00	6.58	Average

Project No.: 2502Q09631E-RF Serial No.: 2YAI-2
Polarization: Vertical Tester: Leo Xiao
Test Mode: Transmitting
Note: BLE 1M low channel 2402MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	4804.00	50.58	-8.62	41.96	74.00	32.04	Peak
2	7206.00	52.40	-3.81	48.59	74.00	25.41	Peak
3	9608.00	54.88	1.18	56.06	74.00	17.94	Peak
4	9608.00	48.33	1.18	49.51	54.00	4.49	Average
5	17837.60	48.26	10.38	58.64	74.00	15.36	Peak
6	17837.60	36.36	10.38	46.74	54.00	7.26	Average

BLE 1M_ Middle Channel, Horizontal

Project No.: 2502Q09631E-RF Serial No.: 2YAI-2
Polarization: Horizontal Tester: Leo Xiao
Test Mode: Transmitting
Note: BLE 1M middle channel 2440MHz
Peak:RBW:1MHz,VBW:3MHz



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	3934.60	50.85	-3.73	47.12	74.00	26.88	Peak

BLE 1M_ Middle Channel, Vertical

Project No.: 2502Q09631E-RF Serial No.: 2YAI-2
Polarization: Vertical Tester: Leo Xiao
Test Mode: Transmitting
Note: BLE 1M middle channel 2440MHz
Peak:RBW:1MHz,VBW:3MHz



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	3190.60	53.59	-5.92	47.67	74.00	26.33	Peak

Project No.: 2502Q09631E-RF Serial No.: 2YAI-2
Polarization: Horizontal Tester: Leo Xiao
Test Mode: Transmitting
Note: BLE 1M middle channel 2440MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

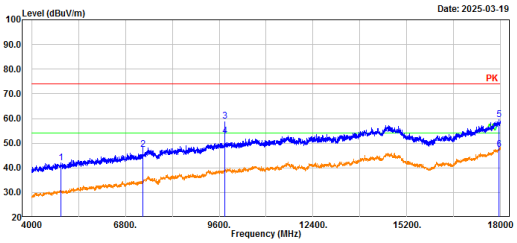

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	4880.00	50.42	-8.48	41.94	74.00	32.06	Peak
2	7320.00	50.57	-3.21	47.36	74.00	26.64	Peak
3	9760.00	57.52	1.46	58.98	74.00	15.02	Peak
4	9760.00	51.36	1.46	52.82	54.00	1.18	Average
5	17938.40	48.67	11.01	59.68	74.00	14.32	Peak
6	17938.40	36.31	11.01	47.32	54.00	6.68	Average

Project No.: 2502Q09631E-RF Serial No.: 2YAI-2
Polarization: Vertical Tester: Leo Xiao
Test Mode: Transmitting
Note: BLE 1M middle channel 2440MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	4880.00	50.81	-8.48	42.33	74.00	31.67	Peak
2	7320.00	53.40	-3.21	50.19	74.00	23.81	Peak
3	9760.00	58.19	1.46	59.65	74.00	14.35	Peak
4	9760.00	51.95	1.46	53.41	54.00	0.59	Average
5	17994.40	47.82	11.37	59.19	74.00	14.81	Peak
6	17994.40	36.47	11.37	47.84	54.00	6.16	Average

BLE 1M_ High Channel, Horizontal

Project No.: 2502Q09631E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 1M high channel 2480MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2YAI-2
Tester: Leo Xiao



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	3891.40	51.20	-3.72	47.48	74.00	26.52	Peak

BLE 1M_ High Channel, Vertical

Project No.: 2502Q09631E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 1M high channel 2480MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2YAI-2
Tester: Leo Xiao



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	3200.20	54.95	-5.77	49.18	74.00	24.82	Peak

Project No.: 2502Q09631E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 1M high channel 2480MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2YAI-2
Tester: Leo Xiao

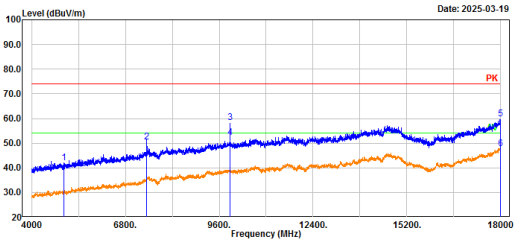

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	4960.00	50.40	-8.48	41.92	74.00	32.08	Peak
2	7440.00	52.97	-2.62	50.35	74.00	23.65	Peak
3	9920.00	56.64	1.62	58.26	74.00	15.74	Peak
4	9920.00	50.79	1.62	52.41	54.00	1.59	Average
5	17999.00	48.49	11.38	59.87	74.00	14.13	Peak
6	17999.00	36.43	11.38	47.81	54.00	6.19	Average

Project No.: 2502Q09631E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 1M high channel 2480MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2YAI-2
Tester: Leo Xiao



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	4960.00	54.28	-8.48	45.80	74.00	28.20	Peak
2	7440.00	52.87	-2.62	50.25	74.00	23.75	Peak
3	9920.00	57.92	1.62	59.54	74.00	14.46	Peak
4	9920.00	51.51	1.62	53.13	54.00	0.87	Average
5	17986.00	47.30	11.32	58.62	74.00	15.38	Peak
6	17986.00	36.33	11.32	47.65	54.00	6.35	Average

BLE 2M_ Low Channel, Horizontal

Project No.: 2502Q09631E-RF Serial No.: 2YAI-2
Polarization: Horizontal Tester: Leo Xiao
Test Mode: Transmitting
Note: BLE 2M low channel 2402MHz
Peak:RBW:1MHz,VBW:3MHz



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	3892.60	50.26	-3.69	46.57	74.00	27.43	Peak

BLE 2M_ Low Channel, Vertical

Project No.: 2502Q09631E-RF Serial No.: 2YAI-2
Polarization: Vertical Tester: Leo Xiao
Test Mode: Transmitting
Note: BLE 2M low channel 2402MHz
Peak:RBW:1MHz,VBW:3MHz



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	3191.20	53.87	-5.90	47.97	74.00	26.03	Peak

Project No.: 2502Q09631E-RF Serial No.: 2YAI-2
Polarization: Horizontal Tester: Leo Xiao
Test Mode: Transmitting
Note: BLE 2M low channel 2402MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

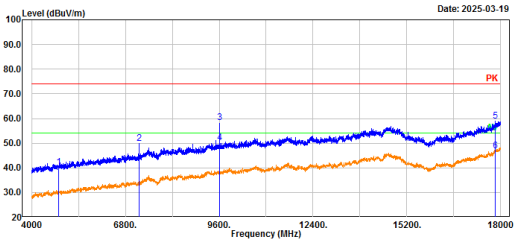

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	4804.00	48.83	-8.62	40.21	74.00	33.79	Peak
2	7206.00	53.72	-3.81	49.91	74.00	24.09	Peak
3	9608.00	57.28	1.18	58.46	74.00	15.54	Peak
4	9608.00	48.90	1.18	50.08	54.00	3.92	Average
5	17846.00	48.62	10.44	59.06	74.00	14.94	Peak
6	17846.00	36.38	10.44	46.82	54.00	7.18	Average

Project No.: 2502Q09631E-RF Serial No.: 2YAI-2
Polarization: Vertical Tester: Leo Xiao
Test Mode: Transmitting
Note: BLE 2M low channel 2402MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	4804.00	51.02	-8.62	42.40	74.00	31.60	Peak
2	7206.00	50.11	-3.81	46.30	74.00	27.70	Peak
3	9608.00	56.80	1.18	57.98	74.00	16.02	Peak
4	9608.00	48.38	1.18	49.56	54.00	4.44	Average
5	17893.60	48.24	10.70	58.94	74.00	15.06	Peak
6	17893.60	36.38	10.70	47.08	54.00	6.92	Average

BLE 2M_ Middle Channel, Horizontal

Project No.: 2502Q09631E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2M middle channel 2440MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2YAI-2
Tester: Leo Xiao



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	3816.40	51.22	-4.20	47.02	74.00	26.98	Peak

BLE 2M_ Middle Channel, Vertical

Project No.: 2502Q09631E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2M middle channel 2440MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2YAI-2
Tester: Leo Xiao



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	2132.20	58.17	-10.52	47.65	74.00	26.35	Peak

Project No.: 2502Q09631E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2M middle channel 2440MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2YAI-2
Tester: Leo Xiao

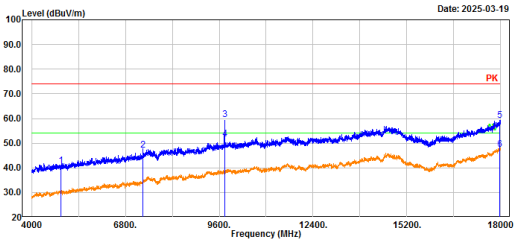

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	4880.00	49.43	-8.48	40.95	74.00	33.05	Peak
2	7320.00	50.30	-3.21	47.09	74.00	26.91	Peak
3	9760.00	58.05	1.46	59.51	74.00	14.49	Peak
4	9760.00	50.17	1.46	51.63	54.00	2.37	Average
5	17972.00	48.15	11.24	59.39	74.00	14.61	Peak
6	17972.00	36.26	11.24	47.50	54.00	6.50	Average

Project No.: 2502Q09631E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2M middle channel 2440MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2YAI-2
Tester: Leo Xiao



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	4880.00	51.35	-8.48	42.87	74.00	31.13	Peak
2	7320.00	49.56	-3.21	46.35	74.00	27.65	Peak
3	9760.00	57.72	1.46	59.18	74.00	14.82	Peak
4	9760.00	49.35	1.46	50.81	54.00	3.19	Average
5	17994.40	48.91	11.37	60.28	74.00	13.72	Peak
6	17994.40	36.29	11.37	47.66	54.00	6.34	Average

BLE 2M_ High Channel, Horizontal

Project No.: 2502Q09631E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2M high channel 2480MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2YAI-2
Tester: Leo Xiao



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	3890.20	50.65	-3.75	46.90	74.00	27.10	Peak

BLE 2M_ High Channel, Vertical

Project No.: 2502Q09631E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2M high channel 2480MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2YAI-2
Tester: Leo Xiao

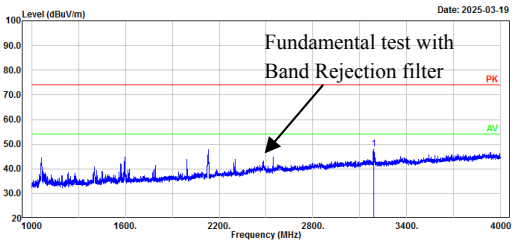

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	3187.60	53.92	-5.96	47.96	74.00	26.04	Peak

Project No.: 2502Q09631E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2M high channel 2480MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2YAI-2
Tester: Leo Xiao

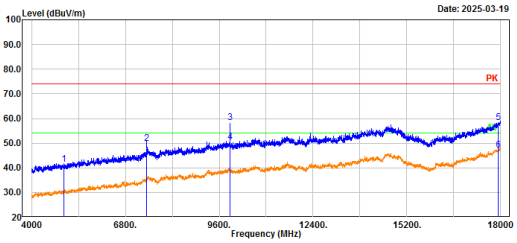

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	4960.00	49.79	-8.48	41.31	74.00	32.69	Peak
2	7440.00	52.39	-2.62	49.77	74.00	24.23	Peak
3	9920.00	56.79	1.62	58.41	74.00	15.59	Peak
4	9920.00	48.79	1.62	50.41	54.00	3.59	Average
5	17921.60	47.55	10.88	58.43	74.00	15.57	Peak
6	17921.60	36.35	10.88	47.23	54.00	6.77	Average

Project No.: 2502Q09631E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2M high channel 2480MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 2YAI-2
Tester: Leo Xiao

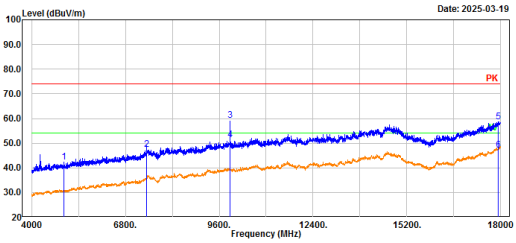

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	4960.00	50.80	-8.48	42.32	74.00	31.68	Peak
2	7440.00	50.23	-2.62	47.61	74.00	26.39	Peak
3	9920.00	57.69	1.62	59.31	74.00	14.69	Peak
4	9920.00	49.71	1.62	51.33	54.00	2.67	Average
5	17921.60	47.91	10.88	58.79	74.00	15.21	Peak
6	17921.60	36.24	10.88	47.12	54.00	6.88	Average

18-25GHz:

No Emission was detected in the range 18-25GHz, test was performed on the mode and channel which with the maximum power.

BLE 1M_ Low Channel, Horizontal	BLE 1M_ Low Channel, Vertical
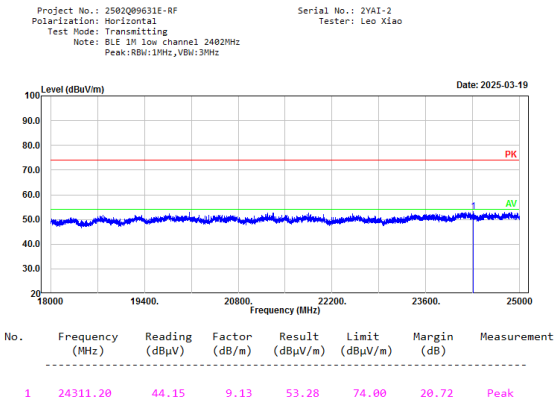 No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Measurement 1 24311.20 44.15 9.13 53.28 74.00 20.72 Peak	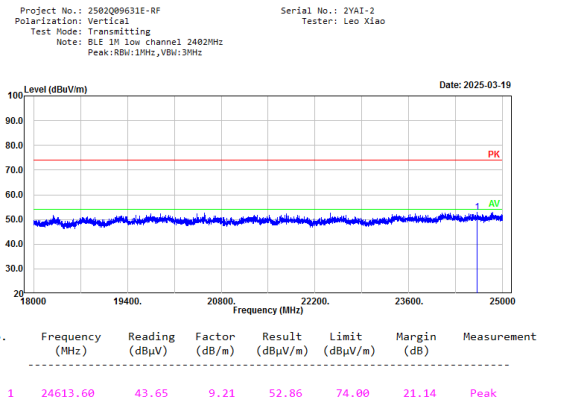 No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Measurement 1 24613.60 43.65 9.21 52.86 74.00 21.14 Peak

Bandedge:

BLE 1M_ Low Channel, Bandedge, Horizontal	BLE 1M_ Low Channel, Bandedge, Vertical
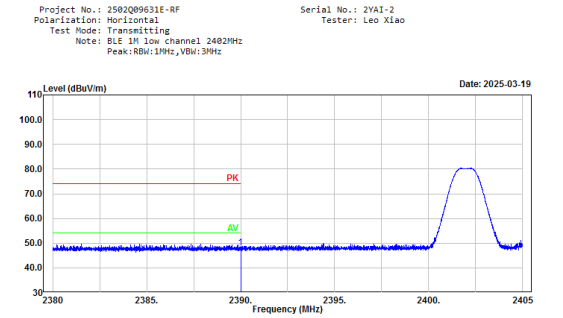	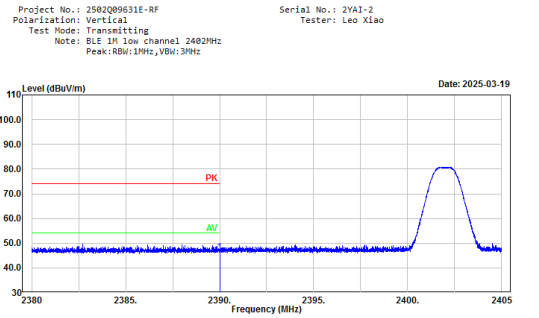
No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Measurement 1 2390.00 48.48 -0.49 47.99 74.00 26.01 Peak	No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Measurement 1 2390.00 46.92 -0.49 46.43 74.00 27.57 Peak
BLE 1M_ High Channel, Bandedge, Horizontal	**BLE 1M_ High Channel, Bandedge, Vertical**
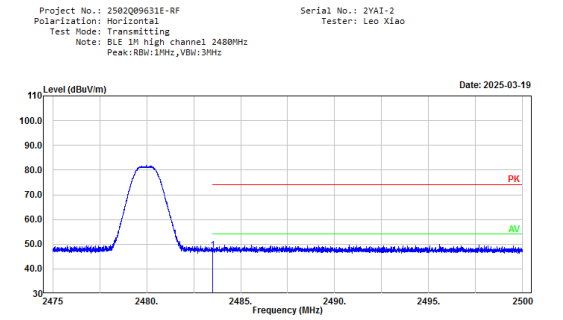	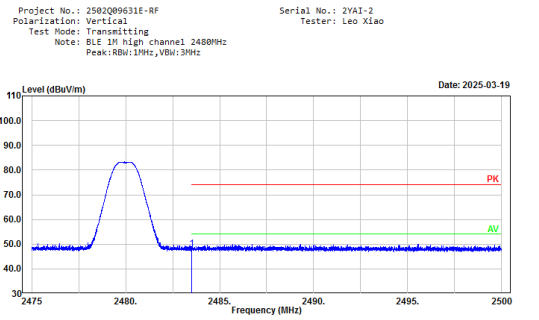
No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Measurement 1 2483.50 47.46 -0.05 47.41 74.00 26.59 Peak	No. Frequency (MHz) Reading (dBμV) Factor (dB/m) Result (dBμV/m) Limit (dBμV/m) Margin (dB) Measurement 1 2483.50 48.08 -0.05 48.03 74.00 25.97 Peak

BLE 2M_ Low Channel, Bandedge, Horizontal

Project No.: 2502Q09631E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2M low channel 2402MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2YAI-2
Tester: Leo Xiao

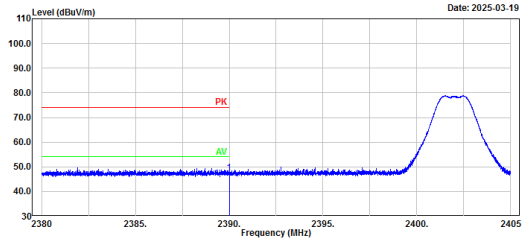

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	2390.00	47.99	-0.49	47.50	74.00	26.50	Peak

BLE 2M_ Low Channel, Bandedge, Vertical

Project No.: 2502Q09631E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2M low channel 2402MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2YAI-2
Tester: Leo Xiao

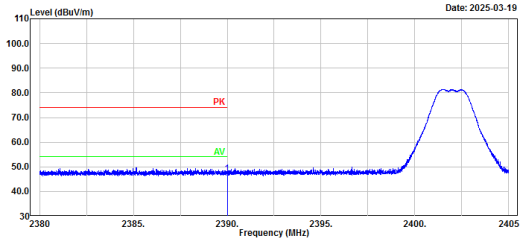

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	2390.00	47.57	-0.49	47.08	74.00	26.92	Peak

BLE 2M_ High Channel, Bandedge, Horizontal

Project No.: 2502Q09631E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2M high channel 2480MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2YAI-2
Tester: Leo Xiao

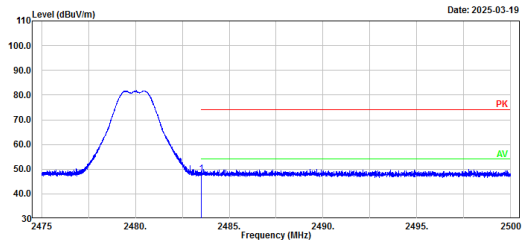

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	2483.50	48.20	-0.05	48.15	74.00	25.85	Peak

BLE 2M_ High Channel, Bandedge, Vertical

Project No.: 2502Q09631E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2M high channel 2480MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2YAI-2
Tester: Leo Xiao

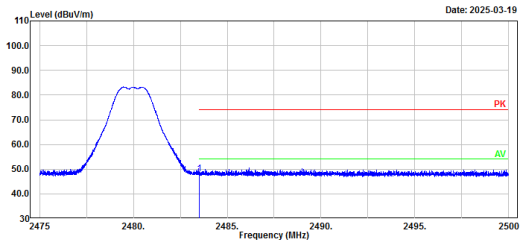

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement
1	2483.50	48.10	-0.05	48.05	74.00	25.95	Peak

5.3 6dB Emission Bandwidth

Test Information:

Serial No.:	2YAI-1	**Test Date:**	2025/02/26
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Tower Qing	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C)	24.8	**Relative Humidity: (%)**	49	**ATM Pressure: (kPa)**	101.9

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/06/13	2025/06/12
R&S	Spectrum Analyzer	FSV40	101461	2024/09/05	2025/09/04

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Channel	Result (MHz)	Limit (MHz)	Verdict
BLE 1Mbps Low	0.691	≥0.5	Pass
BLE 1Mbps Middle	0.688	≥0.5	Pass
BLE 1Mbps High	0.682	≥0.5	Pass
BLE 2Mbps Low	1.121	≥0.5	Pass
BLE 2Mbps Middle	1.126	≥0.5	Pass
BLE 2Mbps High	1.101	≥0.5	Pass

BLE_1M_Low_Channel

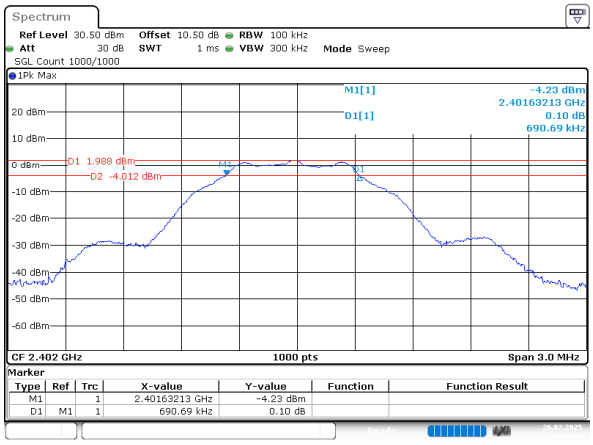

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:08:24

BLE_1M_Middle_Channel

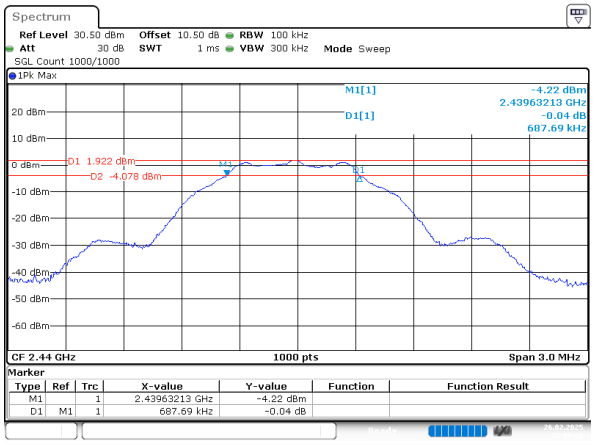

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:16:19

BLE_1M_High_Channel

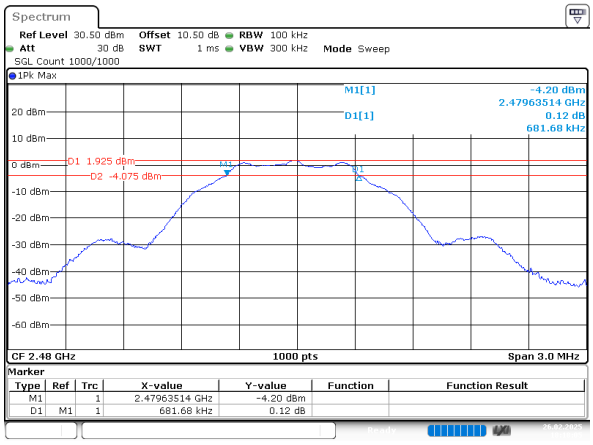

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:18:04

BLE_2M_Low_Channel

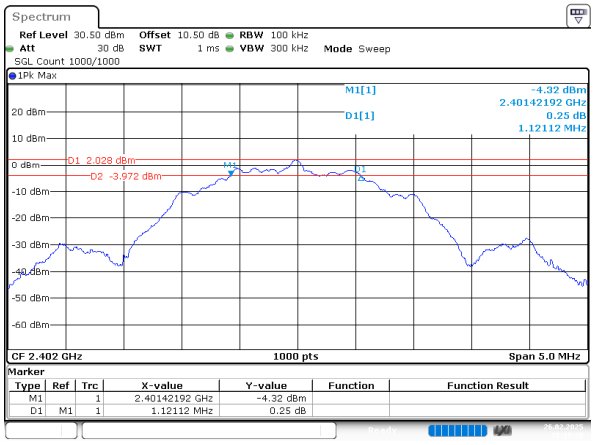

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:19:38

BLE_2M_Middle_Channel

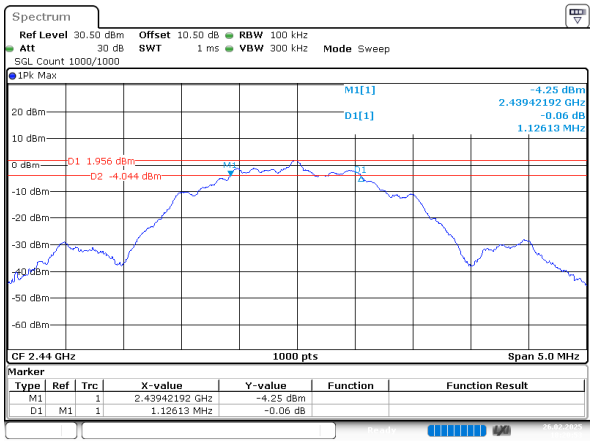

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:20:53

BLE_2M_High_Channel

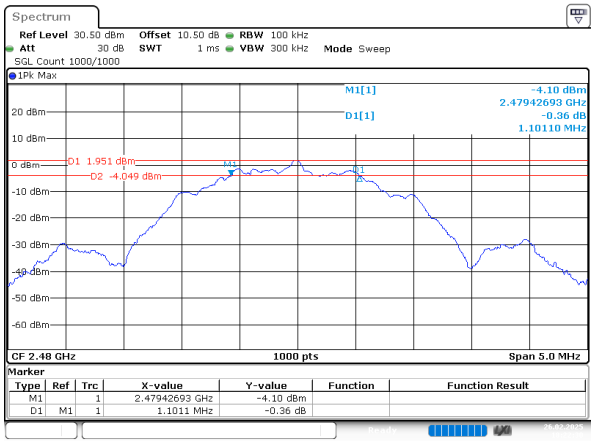

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:22:30

5.4 Maximum Conducted Output Power

Test Information:

Serial No.:	2YAI-1	**Test Date:**	2025/02/26
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Tower Qing	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C)	24.8	**Relative Humidity: (%)**	49	**ATM Pressure: (kPa)**	101.9

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/06/13	2025/06/12
R&S	Spectrum Analyzer	FSV40	101461	2024/09/05	2025/09/04

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Channel	Peak Output Power (dBm)	Limit (dBm)	Verdict
BLE 1Mbps Low	2.13	30.00	Pass
BLE 1Mbps Middle	2.07	30.00	Pass
BLE 1Mbps High	2.05	30.00	Pass
BLE 2Mbps Low	2.13	30.00	Pass
BLE 2Mbps Middle	2.09	30.00	Pass
BLE 2Mbps High	2.06	30.00	Pass

BLE_1M_Low_Channel

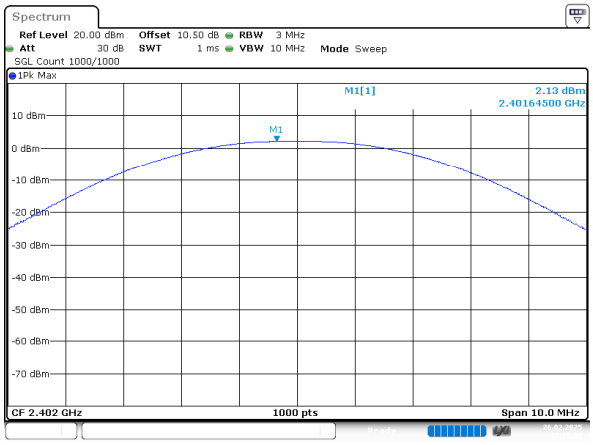

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:09:02

BLE_1M_Middle_Channel

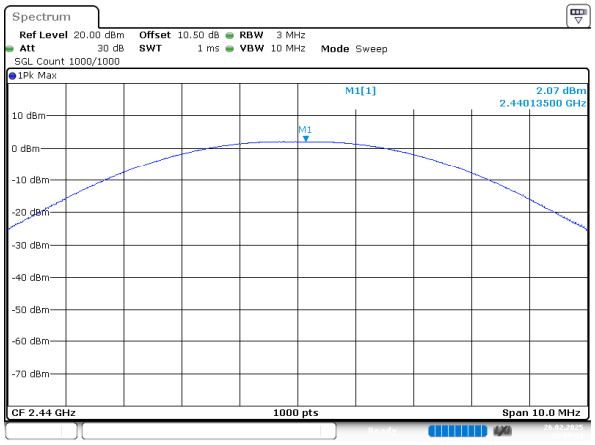

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:16:41

BLE_1M_High_Channel

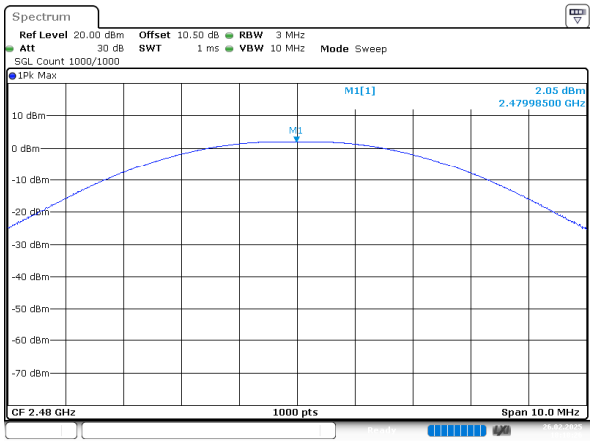

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:18:26

BLE_2M_Low_Channel

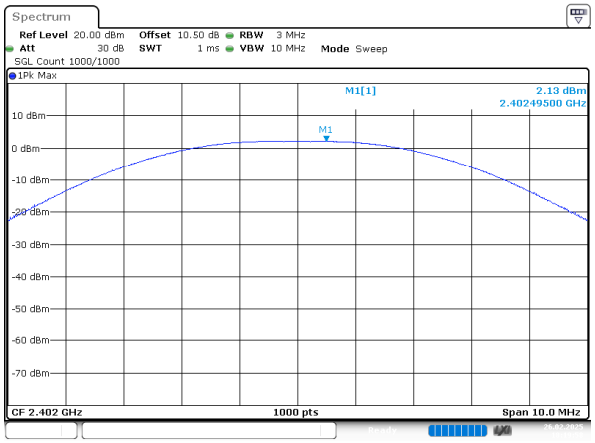

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:19:58

BLE_2M_Middle_Channel

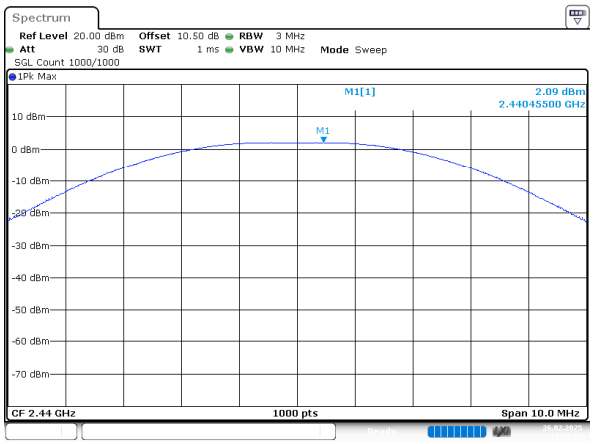

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:21:12

BLE_2M_High_Channel

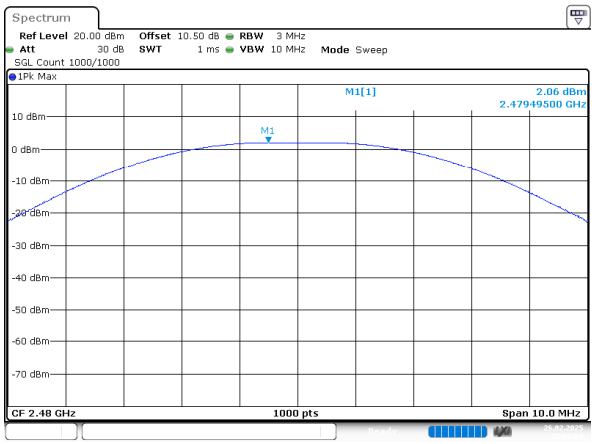

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:22:51

5.5 Power Spectral Density

Test Information:

Serial No.:	2YAI-1	**Test Date:**	2025/03/31
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Tower Qing	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C)	23	**Relative Humidity: (%)**	44	**ATM Pressure: (kPa)**	101.5

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/06/13	2025/06/12
R&S	Spectrum Analyzer	FSV40	101589	2024/09/05	2025/09/04

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Channel	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
BLE 1Mbps Low	-13.17	8	Pass
BLE 1Mbps Middle	-13.29	8	Pass
BLE 1Mbps High	-13.43	8	Pass
BLE 2Mbps Low	-14.66	8	Pass
BLE 2Mbps Middle	-14.87	8	Pass
BLE 2Mbps High	-14.90	8	Pass

BLE_1M_Low_Channel

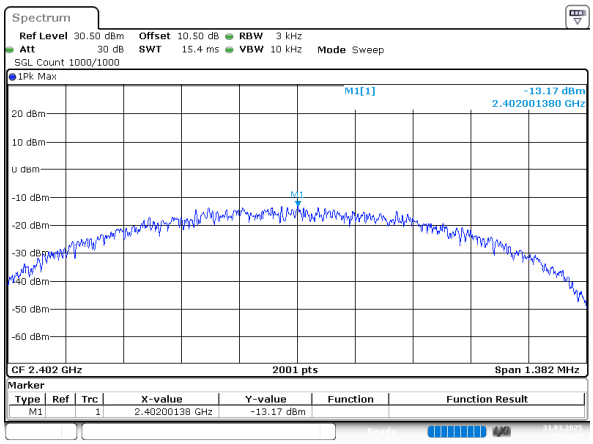

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 31.MAR.2025 17:54:22

BLE_1M_Middle_Channel

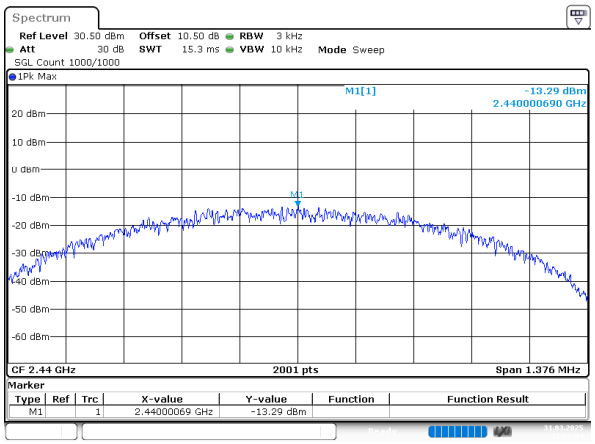

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 31.MAR.2025 17:55:04

BLE_1M_High_Channel

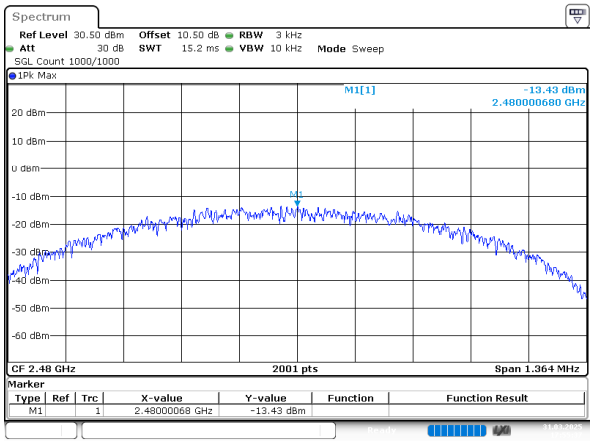

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 31.MAR.2025 17:55:37

BLE_2M_Low_Channel

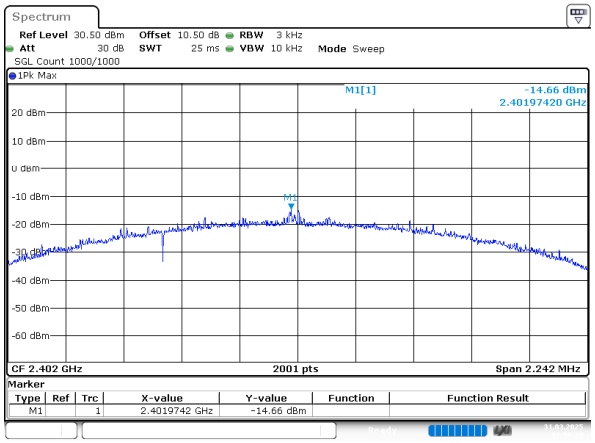

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 31.MAR.2025 17:56:29

BLE_2M_Middle_Channel

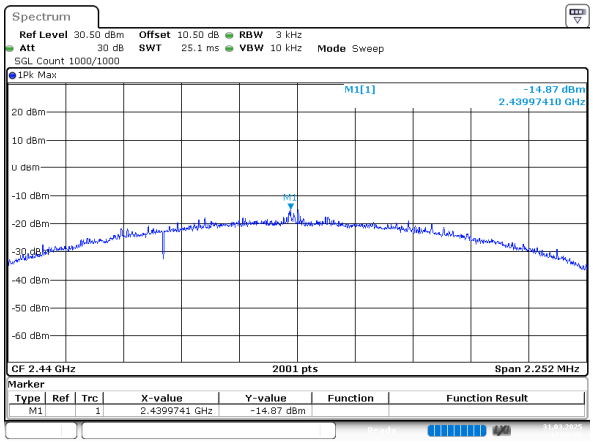

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 31.MAR.2025 17:58:26

BLE_2M_High_Channel

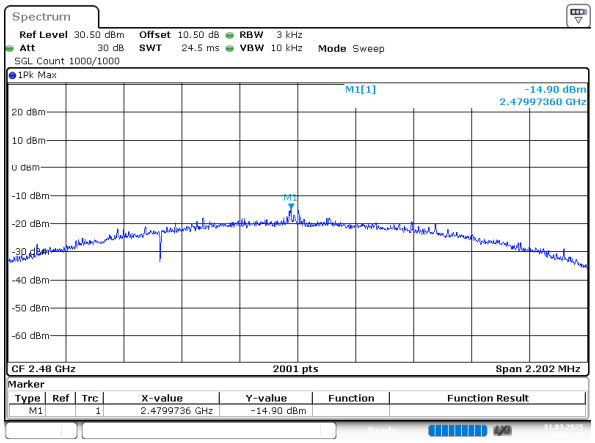

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 31.MAR.2025 18:02:11

5.6 100 kHz Bandwidth of Frequency Band Edge

Test Information:

Serial No.:	2YAI-1	**Test Date:**	2025/02/26
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Tower Qing	**Test Result:**	Pass

Environmental Conditions:

Temperature: (°C)	24.8	**Relative Humidity: (%)**	49	**ATM Pressure: (kPa)**	101.9

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/06/13	2025/06/12
R&S	Spectrum Analyzer	FSV40	101461	2024/09/05	2025/09/04

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

BLE_1M_Low_Channel

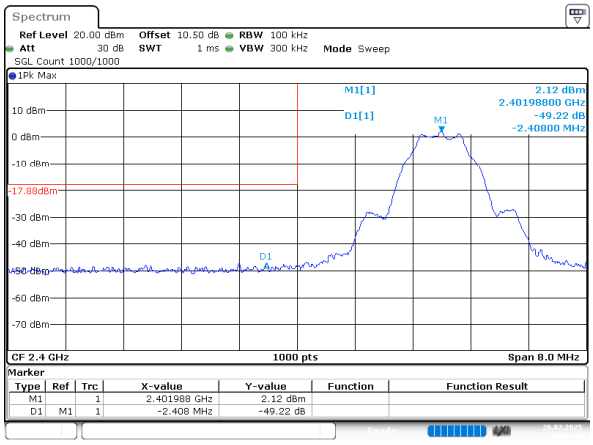

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:08:10

BLE_1M_High_Channel

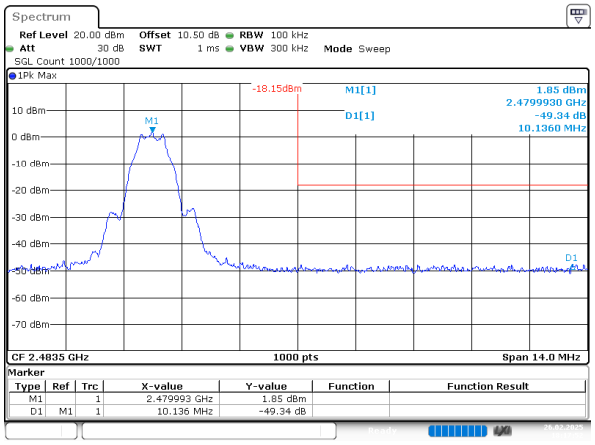

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:17:52

BLE_2M_Low_Channel

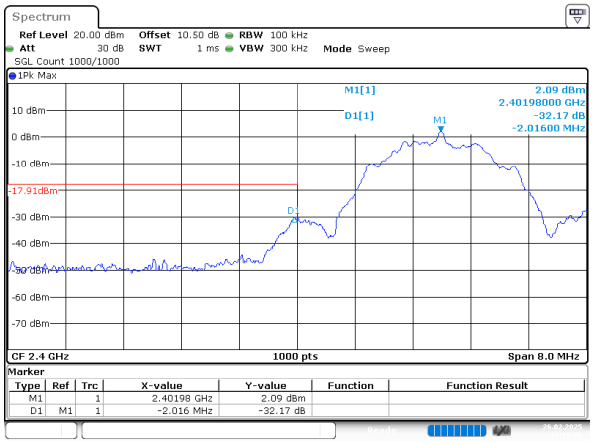

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:19:26

BLE_2M_High_Channel

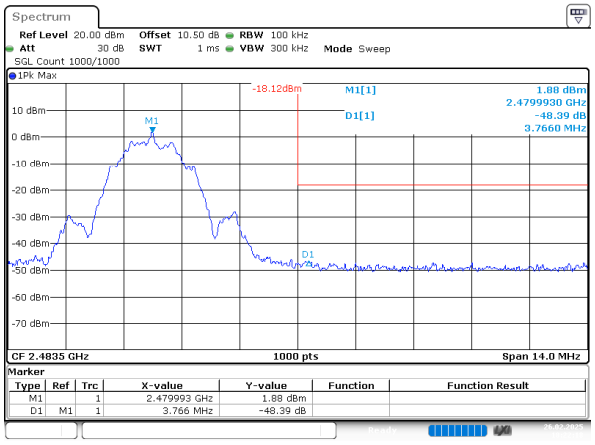

ProjectNo.:2502Q09631E-RF Tester:Tower Qing
Date: 26.FEB.2025 18:22:18

5.7 Duty Cycle

Test Information:

Serial No.:	2YAI-1	**Test Date:**	2025/02/26
Test Site:	RF	**Test Mode:**	Transmitting
Tester:	Tower Qing	**Test Result:**	N/A

Environmental Conditions:

Temperature: (°C)	24.8	**Relative Humidity: (%)**	49	**ATM Pressure: (kPa)**	101.9

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Coaxial Attenuator	10dB	F-08-EM512	2024/06/13	2025/06/12
R&S	Spectrum Analyzer	FSV40	101461	2024/09/05	2025/09/04

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Channel	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	1/Ton (Hz)	VBW Setting (kHz)
BLE 1Mbps Middle	0.386	0.626	61.66	2591	3
BLE 2Mbps Middle	0.204	0.625	32.64	4902	5

BLE_1M_Middle_Channel

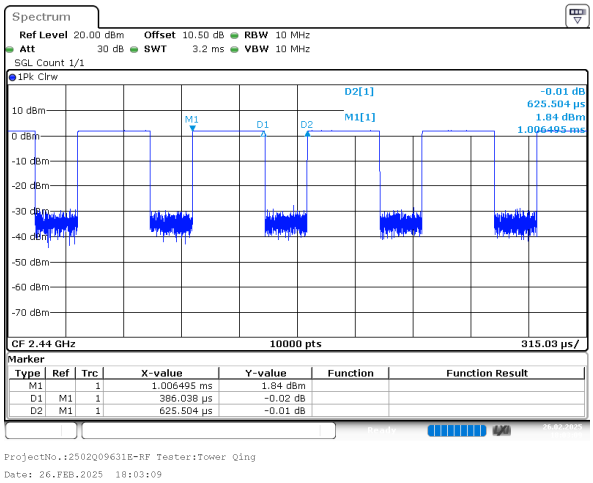

BLE_2M_Middle_Channel

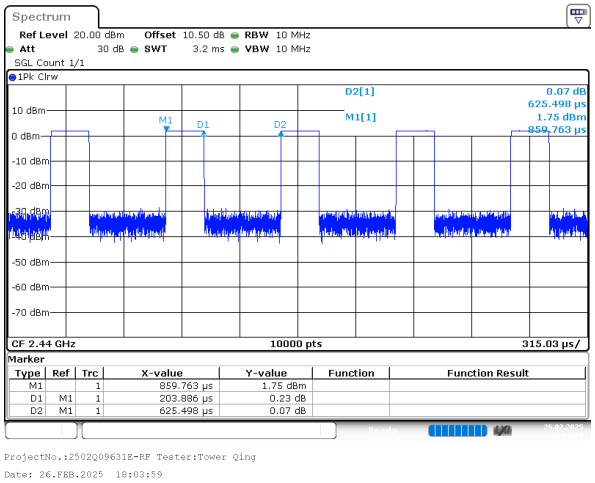

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2502Q09631E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2502Q09631E-RF-INP EUT INTERNAL PHOTOGRAPHS.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2502Q09631E-RF-00A-TSP TEST SETUP PHOTOGRAPHS.

EXHIBIT C - RF EXPOSURE EVALUATION

Applicable Standard

According to subpart §1.1310 systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	**Electric Field Strength (V/m)**	**Magnetic Field Strength (A/m)**	**Power Density (mW/cm^2)**	**Averaging Time (minutes)**
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit
$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm^2);
P = power input to the antenna (in appropriate units, e.g., mW);
G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;
R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \le 1$$

Calculated Data:

Operation Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance▲		Evaluation Distance (cm)	Power Density (mW/cm^2)	MPE Limit (mW/cm^2)
		(dBi)	(numeric)	(dBm)	(mW)			
BLE	2402-2480	2.3	1.70	2.5	1.78	20.00	0.001	1.0
24G Radar	24080.02-24170.02	14	25.12	3.0	2.0	20.00	0.010	1.0
For 24G Radar, Fundamental field strength is 111.98BµV/m @ 3m =16.78 dBm(47.64mW) EIRP. EIRP(dBm)=Field Strength of Fundamental(dBuV/m)-95.2 (dB). Conducted power=16.78-14dBm=2.78dBm. Conducted power(dBm)= EIRP(dBm)-Antenna Gain(dBi).								

Note:
The Conducted output power including Tune-up Tolerance provided by manufacturer▲.

Simultaneous transmission:

BLE and 24G Radar can transmit simultaneously:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

$S_{BLE}/S_{limit-BLE} + S_{24G\ Radar}/S_{limit-24G\ Radar}$

=0.001/1.0+0.01/1.0

=0.011

< 1.0

Result: Compliant. The devices meet FCC MPE at 20 cm distance.

******* END OF REPORT *******