intertek
Total Quality. Assured.

GUANGDONG PHNIX ECO-ERERGY SOLUTION LTD

TEST REPORT

SCOPE OF WORK
EMC TESTING–TL7002-WF

REPORT NUMBER
241128200GZU-002

ISSUE DATE	**[REVISED DATE]**
06-June-2025	[----------]

PAGES
39

DOCUMENT CONTROL NUMBER
FCC BT 4.0
© 2017 INTERTEK

Room101/301/401/102/202/302/
402/502/602/702/802, No. 7-2,
Caipin Road, Huangpu District,
Guangzhou, Guangdong, China
Telephone: +86 20 8213 9688
Facsimile: +86 20 3205 7538
www.intertek.com.cn

TEST REPORT

Applicant Name & Address	:	GUANGDONG PHNIX ECO-ERERGY SOLUTION LTD 3 Tianyuan Road, Dagang Town, Nansha, Guangzhou, Guangdong, China
Manufacturing Site	:	Same as applicant
Intertek Report No:		241128200GZU-002
FCC ID:		2BOGT-TL7002-WF

Test standards

47 CFR PART 15 Subpart C: 2023 section 15.247

Sample Description

Product	:	WIFI Module
Model No.	:	TL7002-WF
Electrical Rating	:	DC 3.0~3.6V
Serial No.	:	Not Labeled
Date Received	:	28 November 2024
Date Test Conducted	:	12 February 2024-12 March 2025

Prepared and Checked By

Ace Yao

Project Engineer

Approved By:

Dean Liu

Sr. Project Engineer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

CONTENT

TEST REPORT **1**

CONTENT **3**

1.0 TEST RESULT SUMMARY **4**

2.0 GENERAL DESCRIPTION **5**

2.1 PRODUCT DESCRIPTION 5
2.2 RELATED SUBMITTAL(S) GRANTS 5
2.3 TEST METHODOLOGY 6
2.4 TEST FACILITY 6

3.0 SYSTEM TEST CONFIGURATION **6**

3.1 JUSTIFICATION 6
3.2 EUT EXERCISING SOFTWARE 7
3.3 SPECIAL ACCESSORIES 7
3.4 MEASUREMENT UNCERTAINTY 8
3.5 EQUIPMENT MODIFICATION 8
3.6 SUPPORT EQUIPMENT LIST AND DESCRIPTION 8

4.0 MEASUREMENT RESULTS **10**

4.1 ANTENNA REQUIREMENT 10
4.2 6 DB BANDWIDTH (DTS BANDWIDTH) 11
4.3 MAXIMUM PEAK CONDUCTED OUTPUT POWER 15
4.4 PEAK POWER SPECTRAL DENSITY 20
4.5 OUT OF BAND CONDUCTED EMISSIONS 25
4.6 RADIATED EMISSIONS 30
4.7 BAND EDGES REQUIREMENT 41
4.8 CONDUCTED EMISSION TEST 45

5.0 TEST EQUIPMENT LIST **47**

TEST REPORT

1.0 TEST RESULT SUMMARY

Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
6 dB Bandwidth (DTS bandwidth)	FCC PART 15 C section 15.247 (a)(2)	ANSI C63.10: Clause 11.8	PASS
Maximum Peak Conducted Output Power	FCC PART 15 C section 15.247(b)(3)	ANSI C63.10: Clause 11.9.1.2	PASS
Peak Power Spectral Density	FCC PART 15 C section 15.247(e)	ANSI C63.10: Clause 11.10.2	PASS
Out of Band Conducted Emissions	FCC PART 15 C section 15.209 & 15.247(d)	ANSI C63.10: Clause 11.11	PASS
Radiated Emissions	FCC PART 15 C section 15.209 & 15.247(d)	ANSI C63.10: Clause 11.11, 11.12.1, 6.4, 6.5 and 6.6	PASS
Band Edges Measurement	FCC PART 15 C section 15.247 (d) & 15.205	ANSI C63.10: Clause 11.11 and 11.13	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	PASS

Remark:
N/A: not applicable. Refer to the relative section for the details.
EUT: In this whole report EUT means Equipment Under Test.
Tx: In this whole report Tx (or tx) means Transmitter.
Rx: In this whole report Rx (or rx) means Receiver.
RF: In this whole report RF means Radio Frequency.
ANSI C63.10: the detail version is ANSI C63.10:2013 in the whole report.

TEST REPORT

2.0 General Description

2.1 Product Description

Operating Frequency:	2402 MHz – 2480MHz
Type of Modulation:	GFSK
Number of Channels:	40 Channels
Channel Separation:	2 MHz
Antenna Type:	FPC antenna
Antenna Gain:	2.0 dBi
Speciality:	WIFI Module with BLE (Bluetooth Low Energy)
Power Supply:	DC 3.0~3.6V from load box & power source power source: 120V/60Hz

EUT modulation and data packet during test:

The EUT has been tested on the Modulation of GFSK with 1 Mbps & 2 Mbps data rate.

EUT channels and frequencies list:

Test frequencies are lowest channel 0: 2402 MHz, middle channel 19: 2440 MHz and highest channel 39: 2480 MHz.

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454	/	/
13	2428	27	2456	/	/

2.2 Related Submittal(s) Grants

This is an application for certification of WIFI Module which has 2.4GHz BLE function.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans and final tests were performed in the semi-anechoic chamber to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise.

2.4 Test Facility

All tests were performed at:
Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Room102/104, No 203, KeZhu Road, Science City, GETDD Guangzhou, China
Except Conducted Emissions was performed at:
Room101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road, Huangpu District, Guangzhou, Guangdong, China

A2LA Certificate Number 0078.10
Intertek Testing Services Shenzhen Ltd. Guangzhou Branch is accredited by A2LA and Listed in FCC website. FCC accredited test labs may perform both Certification testing under Parts 15 and 18 and Declaration of Conformity testing.

3.0 System Test Configuration

3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, AC power line was manipulated to produce worst case emissions. It was powered by AC 120V/60Hz supply.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. The spurious emissions more than 20 dB below the permissible value are not reported.

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

3.2 EUT Exercising Software

Description	Manufacturer	Model No.	SN/Version	Supplied by
For fixing frequency	--	EspRFTestTool	V3.6	Client

3.3 Special Accessories

No special accessories used.

TEST REPORT

3.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	20 dB Bandwidth	2.31%
	6dB Bandwidth	
	99% Bandwidth	
2	Carrier Frequencies Separated	2.31%
3	Dwell Time	1.19%
4	Maximum Peak Conducted Output Power	1.98 dB
5	Peak Power Spectral Density	1.98 dB
6	Out of Band Conducted Emissions	1.98 dB
7	Band edges measurement	1.98 dB
8	Radiated Emissions	3.64 dB (9 kHz-30 MHz)
		4.26 dB (30 MHz-1 GHz)
		4.96 dB (1 GHz-18 GHz)
		5.16 dB (18 GHz-40 GHz)
9	Conducted Emissions at Mains Terminals	2.23 dB
10	Temperature	0.81 °C
11	Humidity	1.73%
12	Time	1.19%

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.
Measurement uncertainty is calculated in accordance with ETSI TR 100 028-2001.
The measurement uncertainty is given with a confidence of 95%, k=2.

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance – Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value

3.5 Equipment Modification

Any modifications installed previous to testing by GUANGDONG PHNIX ECO-ERERGY SOLUTION LTD will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Guangzhou Branch.

3.6 Support Equipment List and Description

This product was tested with corresponding support equipment as below:
Cable

TEST REPORT

Description	Model No.	Connector type	Cable length/type	Supplied by
Antenna cable	RF-01	SMA	0.2 m(shielded)	Intertek

Support equipment

Description	Model No.	Rating	Supplied by
NoteBook	Latitude 5420	100-240VAC,50/60Hz	Intertek
Load box & power source	--	120V/60Hz	Client

Remark:
After the frequency was fixed, Notebook and Fix board were removed out of the Chamber before test.

TEST REPORT

4.0 Measurement Results

4.1 Antenna Requirement

Standard requirement:

15.203 requirement:

For intentional device. According to 15.203 an intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT Antenna

The antenna is an integral antenna and no consideration of replacement. The best case gain of the antenna is 2.0 dBi.

TEST REPORT

4.2 6 dB Bandwidth (DTS bandwidth)

Test Requirement:	FCC Part 15 C section 15.247 (a)(2)Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10: Clause 11.8
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

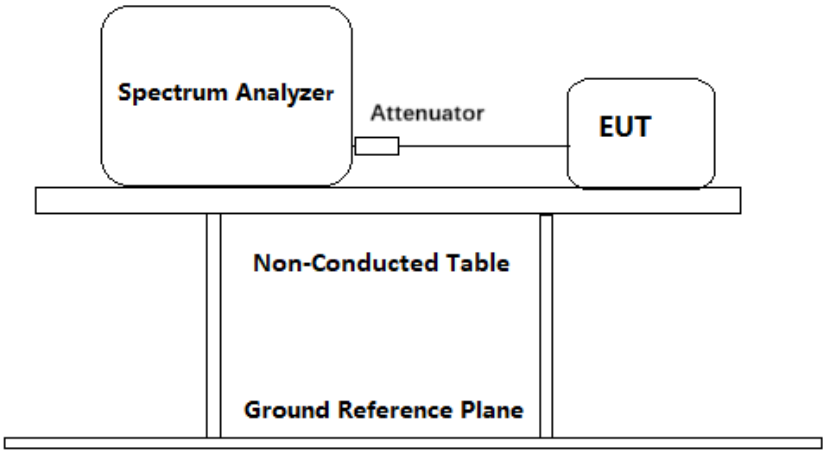

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (cable loss =1 dB, with a 10dB attenuator) from the antenna port to the spectrum.
2. Set the spectrum analyzer:
   a) Set RBW = 100 kHz
   b) Set the VBW⩾ [3 × RBW]
   c) Detector = peak.
   d) Trace mode = max hold.
   e) Sweep = auto couple
   f) Allow the trace to stabilize.
   g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
   h) Span=2*BW~5*BW
3. Repeat until all the test status is investigated.
4. Report the worst case.

TEST REPORT

Used Test Equipment List

Spectrum Analyzer. Refer to Clause 5 Test Equipment List for details.

1M

Channel No.	Frequency (MHz)	Measured 6dB bandwidth (kHz)	Limit (kHz)	Result
0	2402	665.7	≥500	Pass
19	2440	680.2		Pass
39	2480	706.2		Pass

2M

Channel No.	Frequency (MHz)	Measured 6dB bandwidth (kHz)	Limit (kHz)	Result
0	2402	1383.5	≥500	Pass
19	2440	1337.2		Pass
39	2480	1348.8		Pass

Test result: The unit does meet the FCC requirements.

Result plot as follows:

1M

Lowest Channel(2.402 GHz):

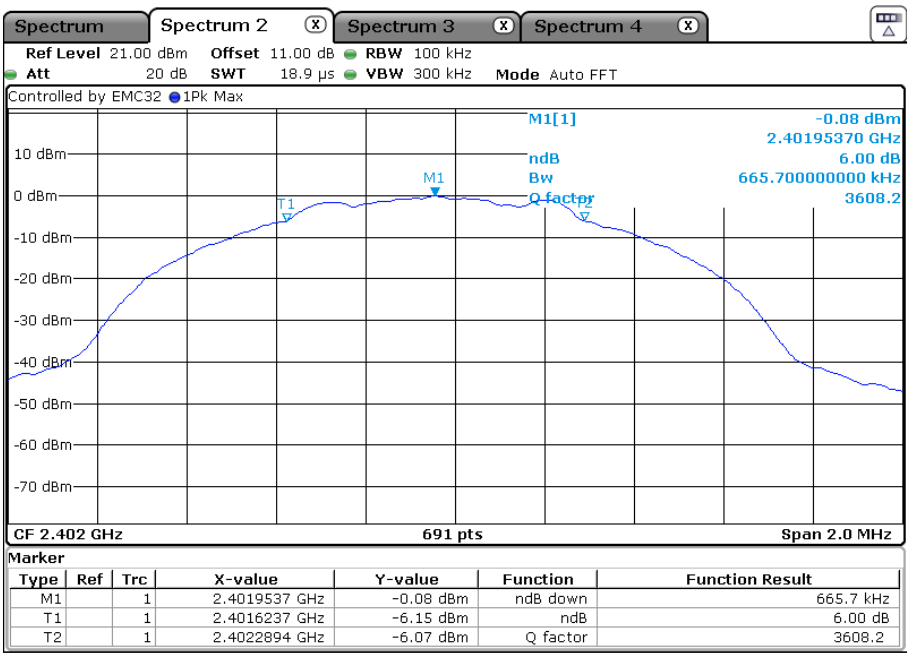

TEST REPORT

Middle Channel(2.440 GHz):

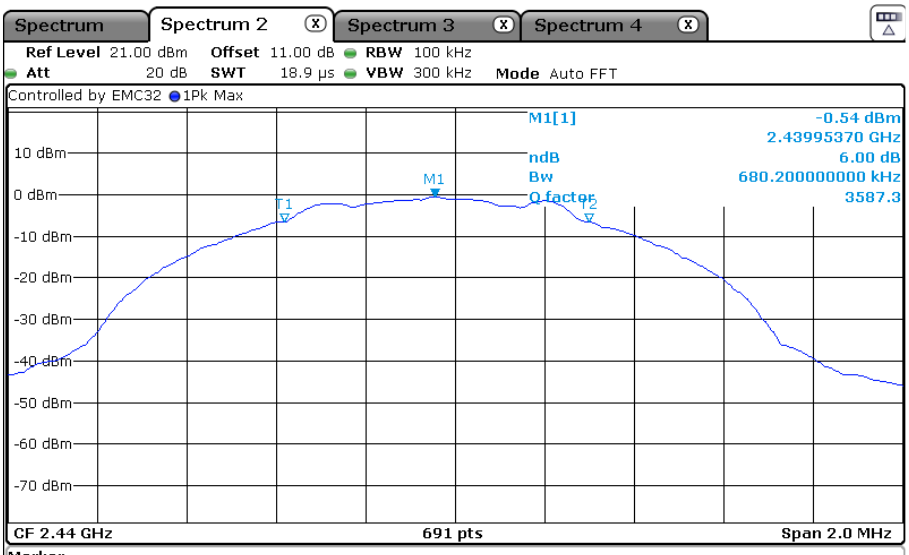

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.4399537 GHz	-0.54 dBm	ndB down	680.2 kHz
T1		1	2.4396179 GHz	-6.55 dBm	ndB	6.00 dB
T2		1	2.4402981 GHz	-6.52 dBm	Q factor	3587.3

Highest Channel(2.480 GHz):

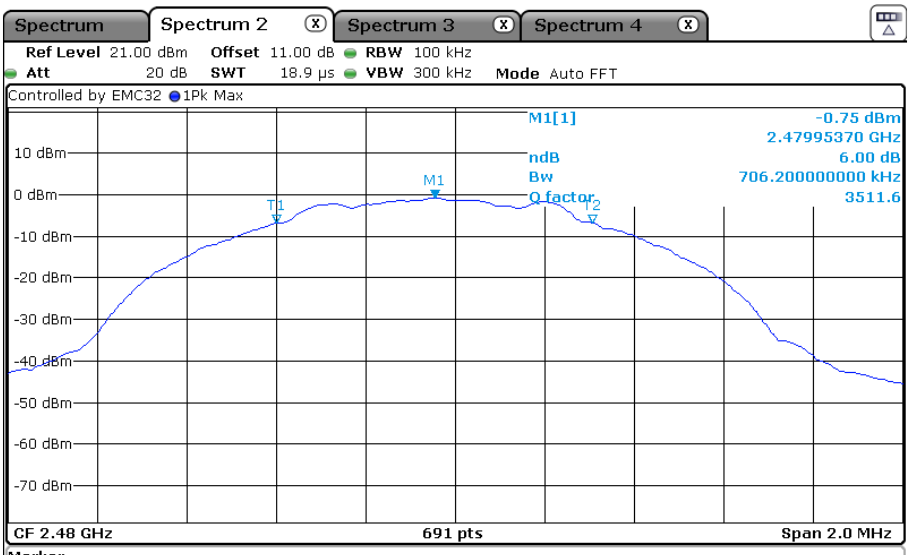

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.4799537 GHz	-0.75 dBm	ndB down	706.2 kHz
T1		1	2.4796006 GHz	-6.75 dBm	ndB	6.00 dB
T2		1	2.4803068 GHz	-6.80 dBm	Q factor	3511.6

TEST REPORT

2M

Lowest Channel(2.402 GHz):

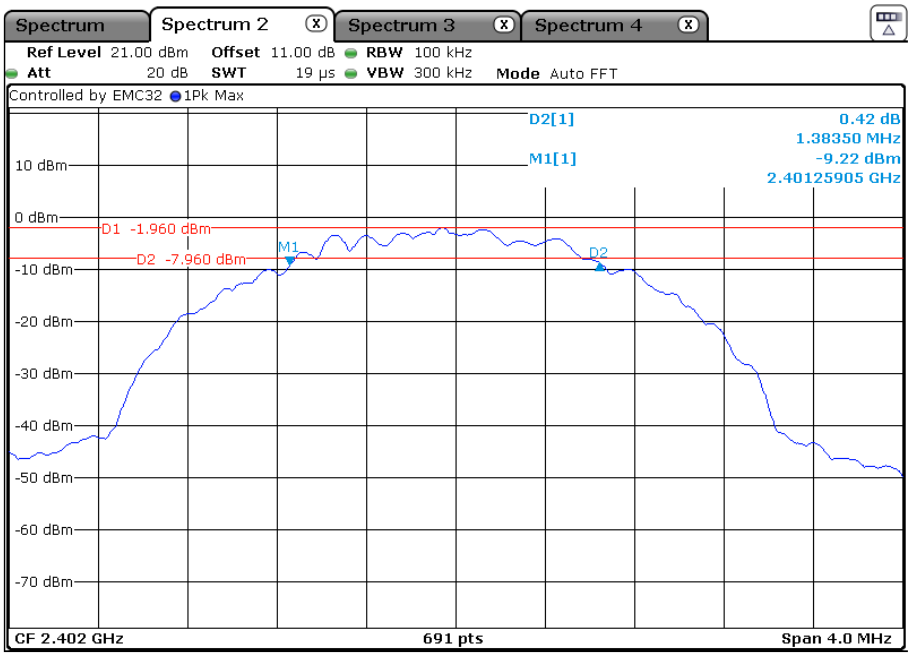

Middle Channel(2.440 GHz):

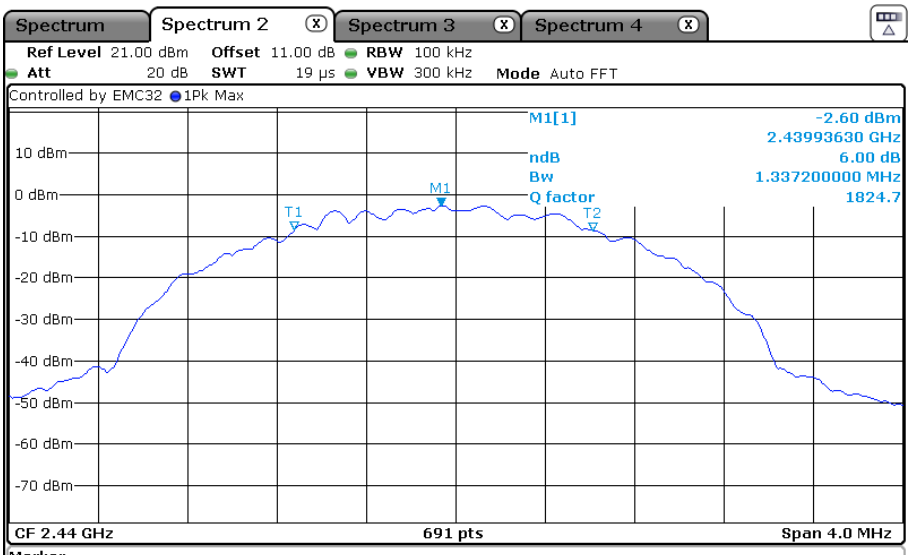

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.4399363 GHz	-2.60 dBm	ndB down	1.3372 MHz
T1		1	2.4392764 GHz	-8.53 dBm	ndB	6.00 dB
T2		1	2.4406136 GHz	-8.57 dBm	Q factor	1824.7

TEST REPORT

Highest Channel(2.480 GHz):

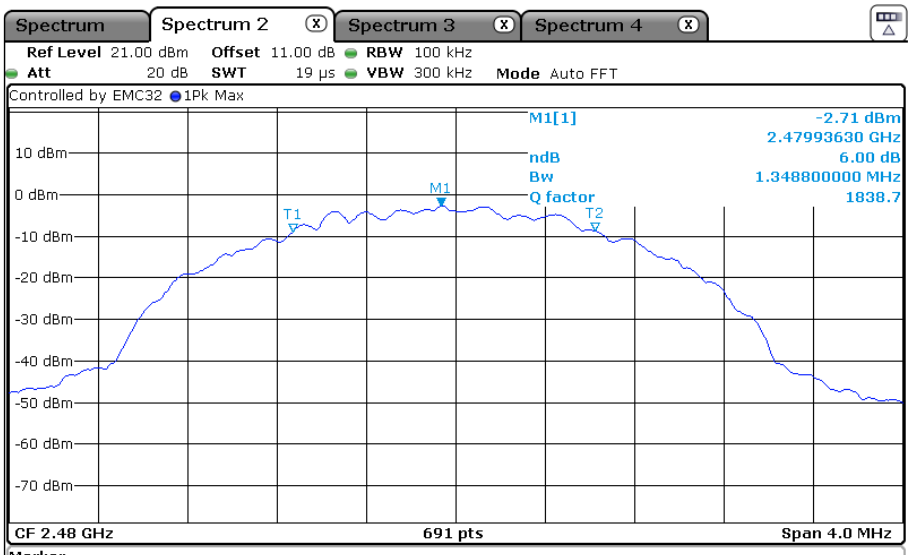

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.4799363 GHz	-2.71 dBm	ndB down	1.3488 MHz
T1		1	2.4792706 GHz	-8.87 dBm	ndB	6.00 dB
T2		1	2.4806194 GHz	-8.66 dBm	Q factor	1838.7

4.3 Maximum Peak Conducted Output Power

Test Requirement:	FCC Part 15 C section 15.247 (b)(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b) (1), (b) (2), and (b) (3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
Test Method:	ANSI C63.10: Clause 11.9.1.1(RBW ⩾ DTS bandwidth)
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	

TEST REPORT

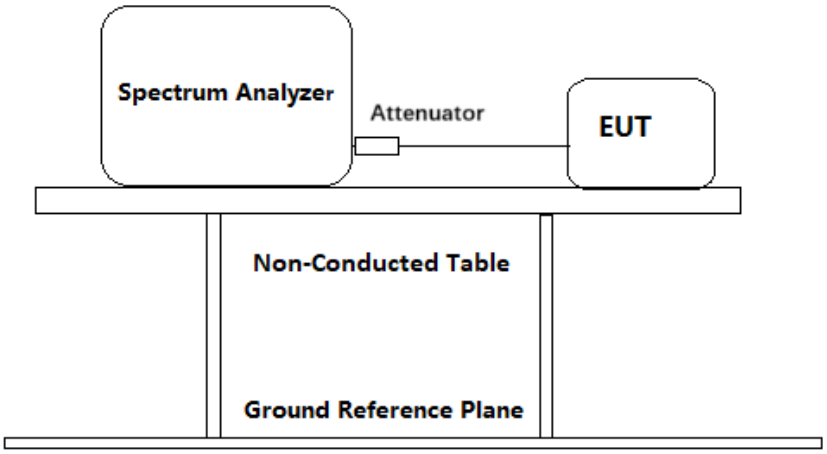

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (cable loss =1 dB, with a 10dB attenuator) from the antenna port to the spectrum.
2. Set the spectrum analyzer:
   a) Set the RBW = 3 MHz（RBW≥DTS bandwidth）.
   b) Set the VBW≥[3 × RBW].
   c) Set the span≥10 MHz[3 × RBW].
   d) Detector = peak.
   e) Sweep time = auto couple.
   f) Trace mode = max hold.
   g) Allow trace to fully stabilize.
   h) Use peak marker function to determine the peak amplitude level.
3. Repeat until all the test status is investigated.
4. Report the worst case.

Used Test Equipment List

Spectrum Analyzer. Refer to Clause 5 Test Equipment List for details.

Test result:

1M:

Channel No.	Frequency (MHz)	Measured channel Power (dBm)	Limit	Result
0	2402	1.64	1W (30 dBm)	Pass
19	2440	1.18		Pass
39	2480	0.96		Pass

TEST REPORT

2M:

Channel No.	Frequency (MHz)	Measured channel Power (dBm)	Limit	Result
0	2402	1.27	1W (30 dBm)	Pass
19	2440	0.88		Pass
39	2480	0.75		Pass

Remark: Level = Read Level + Cable Loss

Result plot as follows:

1M:

Lowest channel (2.402 GHz):

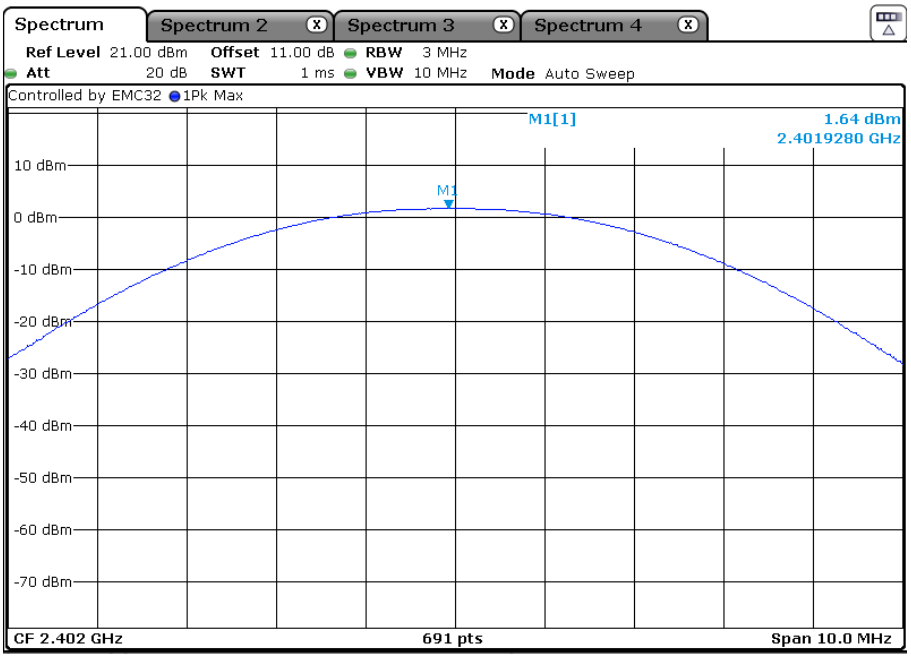

TEST REPORT

Middle Channel (2.440 GHz):

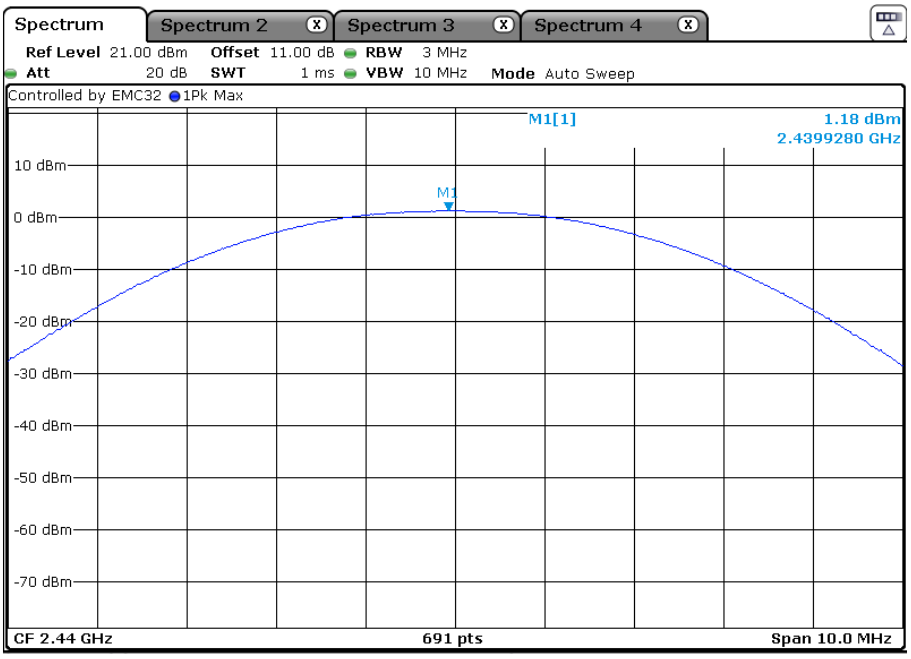

Highest Channel (2.480 GHz):

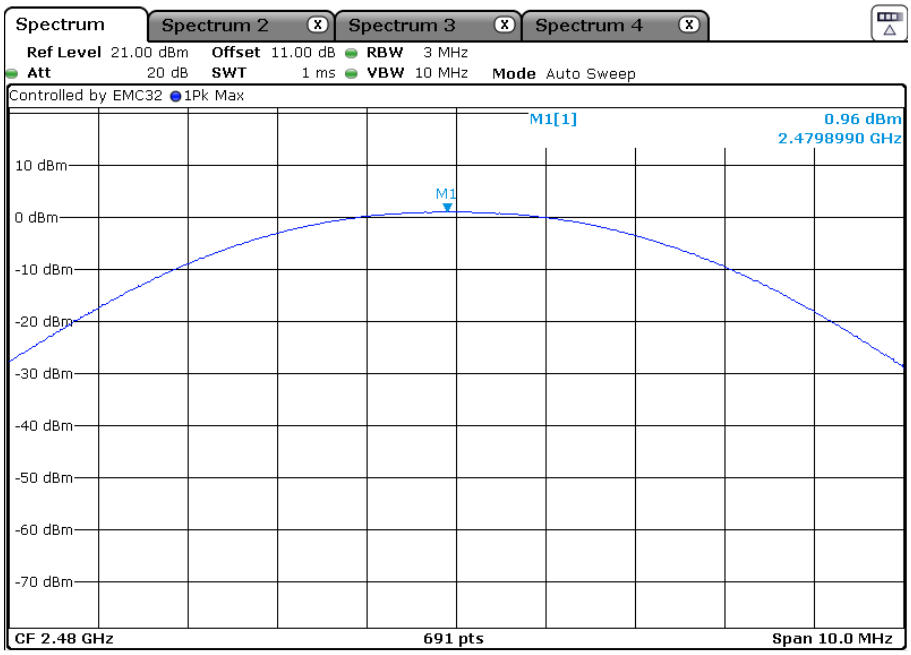

TEST REPORT

2M:

Lowest channel (2.402 GHz):

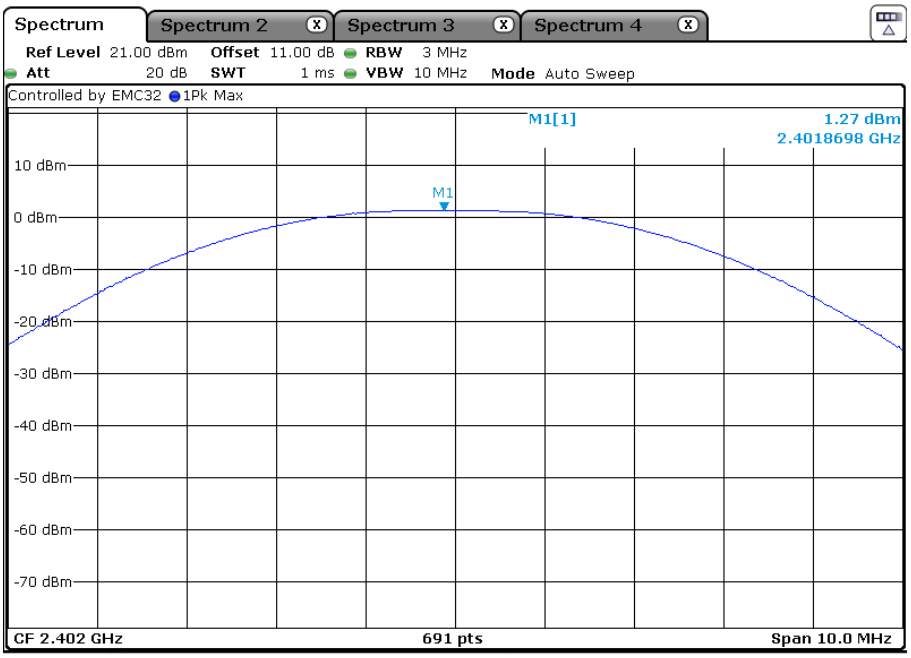

Middle Channel (2.440 GHz):

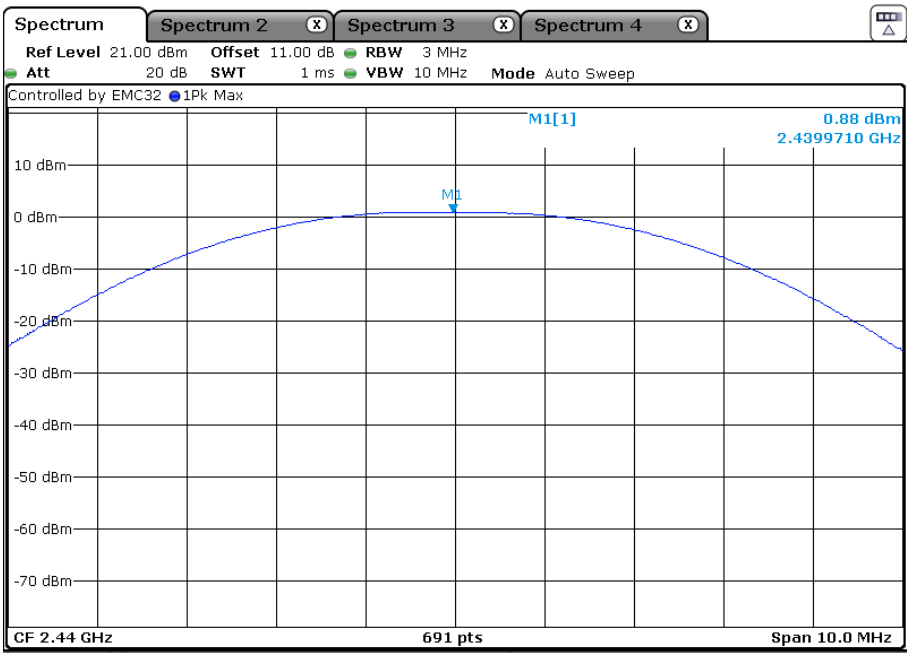

TEST REPORT

Highest Channel (2.480 GHz):

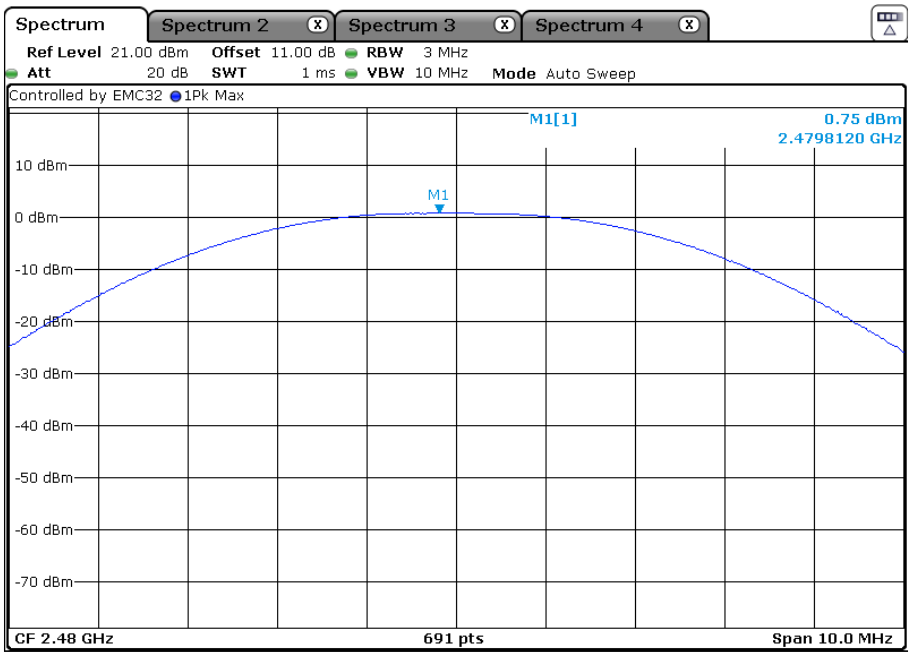

Test result: The unit does meet the FCC requirements.

4.4 Peak Power Spectral Density

Test Requirement:	FCC Part 15 C section 15.247 (e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10: Clause 11.10.2
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	

TEST REPORT

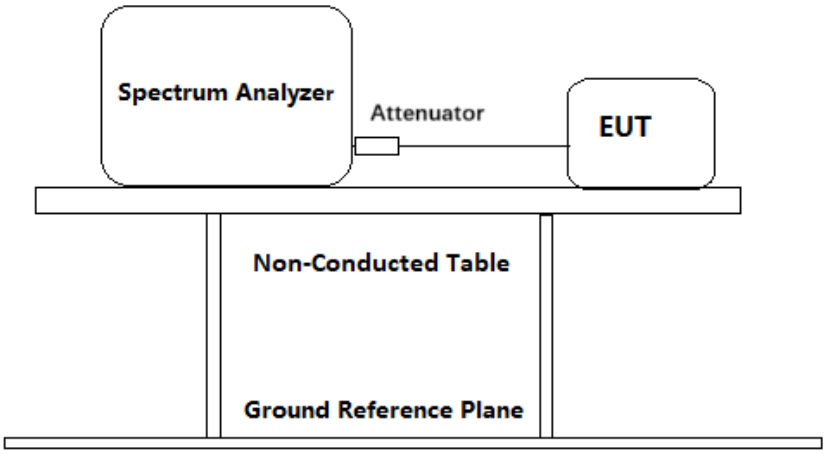

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable(cable loss =1 dB, with a 10dB attenuator) from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer:
   a) Set analyzer center frequency to DTS channel center frequency.
   b) Set the span= 1.5 × DTS bandwidth.
   c) Set the RBW to 3 kHz ⩽ RBW ⩽ 100 kHz.
   d) Set the VBW ⩾ [3 × RBW].
   e) Detector = peak.
   f) Sweep time = auto couple.
   g) Trace mode = max hold.
   h) Allow trace to fully stabilize.
   i) Use the peak marker function to determine the maximum amplitude level within the RBW.
   j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
3. Measure the Power Spectral Density of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worst case.

Used Test Equipment List

Spectrum Analyzer. Refer to Clause 5 Test Equipment List for details.

TEST REPORT

Test result:

1M:

Channel No.	Frequency (MHz)	Measured Peak Power Spectral Density (dBm/3 kHz)	Limit	Result
0	2402	-16.35	8 dBm/3kHz	Pass
19	2440	-15.33		Pass
39	2480	-15.45		Pass

2M:

Channel No.	Frequency (MHz)	Measured Peak Power Spectral Density (dBm/3 kHz)	Limit	Result
0	2402	-21.28	8 dBm/3kHz	Pass
19	2440	-20.32		Pass
39	2480	-20.62		Pass

Test result: Level = Read Level + Cable Loss.

Result plot as follows:

1M:

Lowest channel (2.402 GHz):

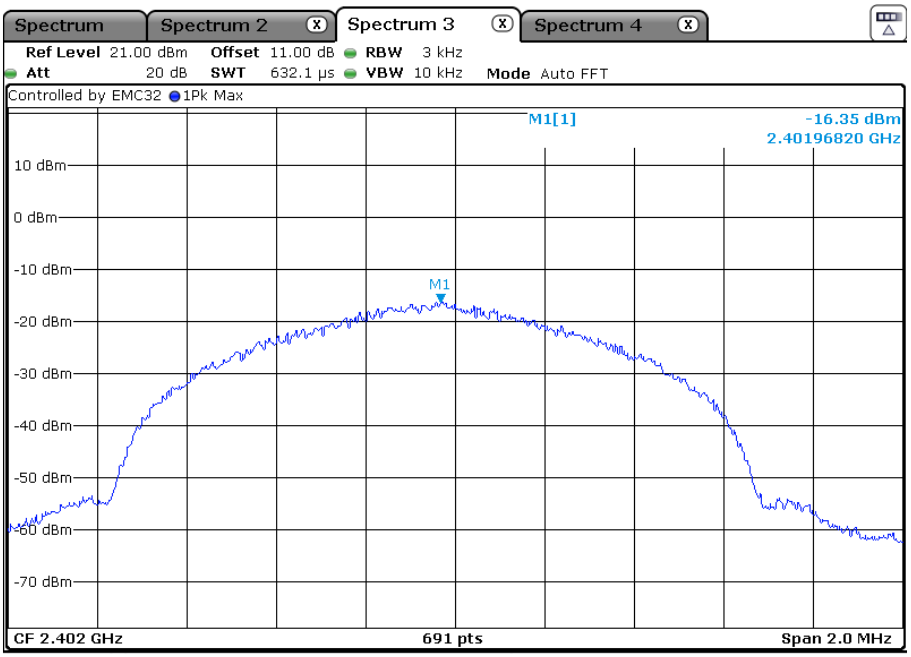

TEST REPORT

Middle Channel (2.440 GHz):

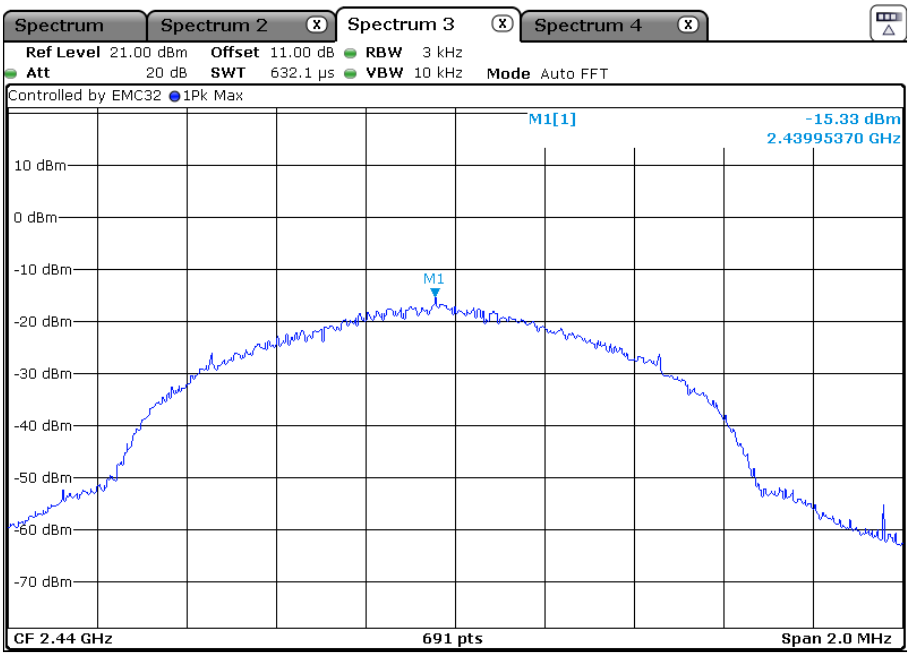

Highest Channel (2.480 GHz):

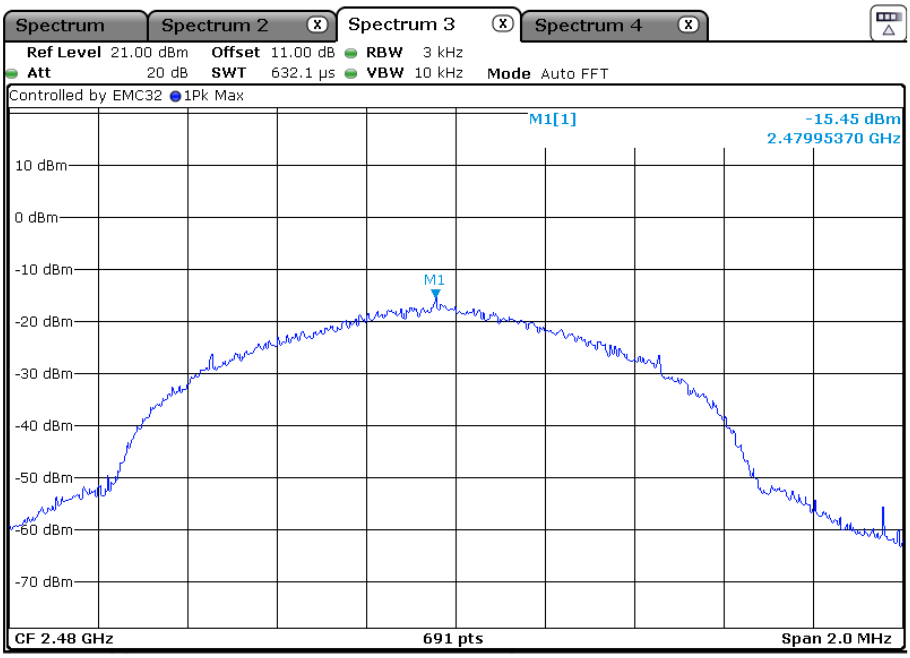

TEST REPORT

2M:

Lowest channel (2.402 GHz):

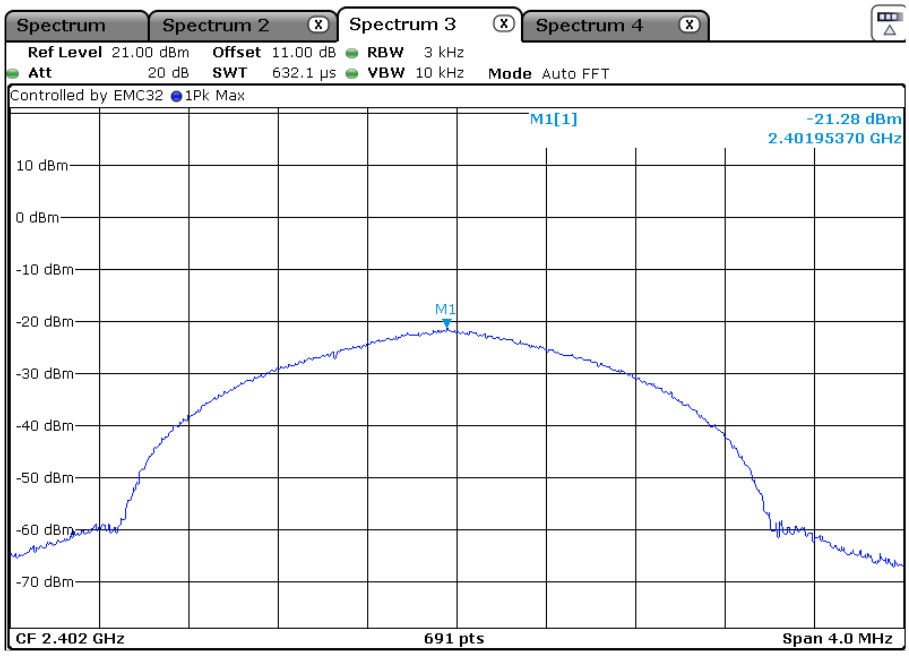

Middle Channel (2.440 GHz):

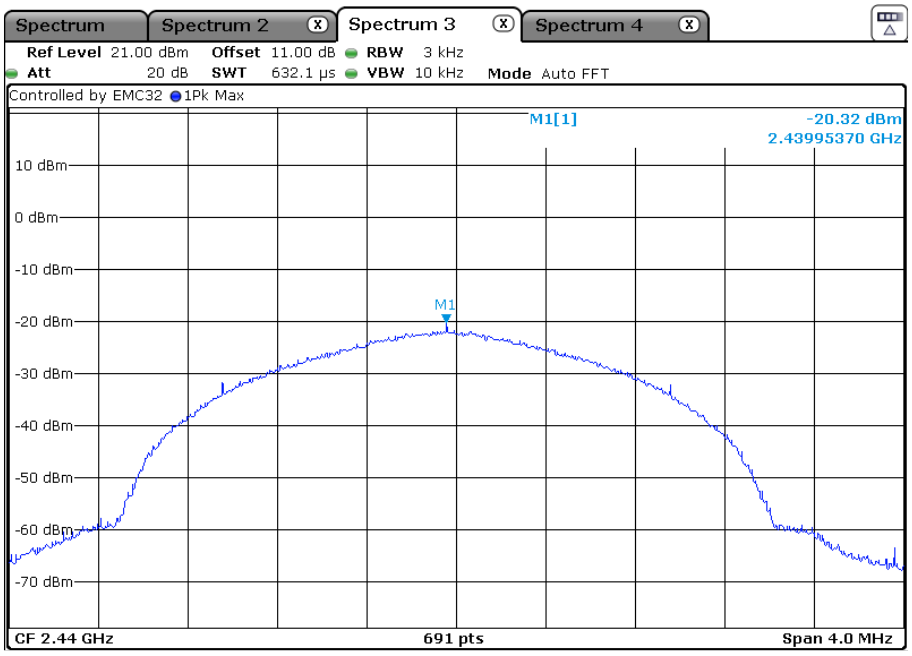

TEST REPORT

Highest Channel (2.480 GHz):

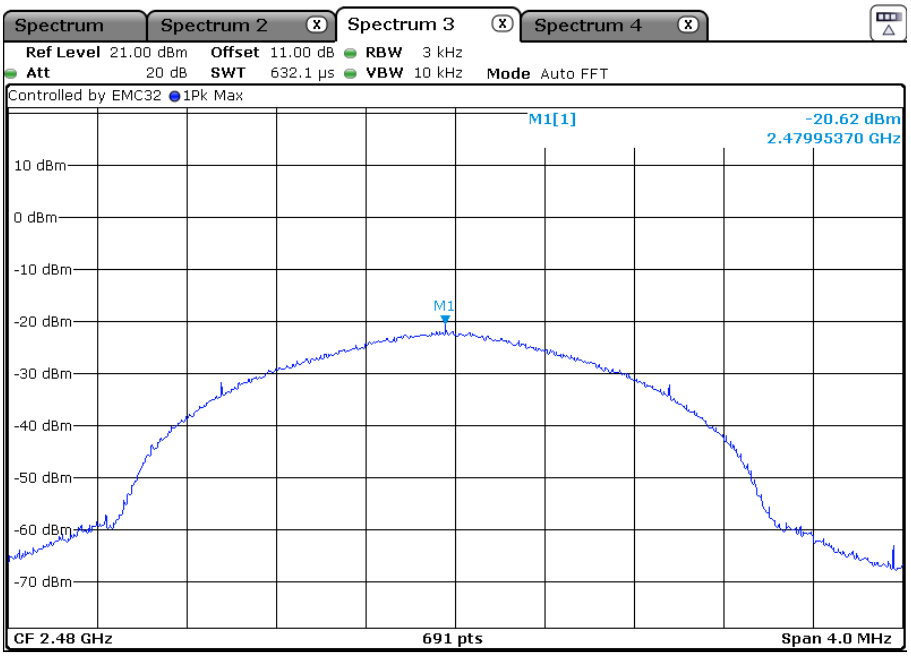

4.5 Out of Band Conducted Emissions

Test Requirement:	FCC Part 15 C section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.
Test Method:	ANSI C63.10: Clause 11.11
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	

TEST REPORT

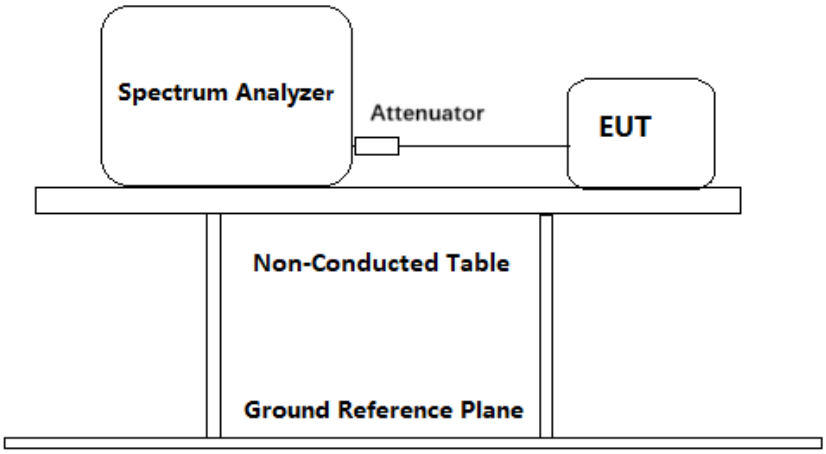

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable (cable loss =1 dB, with a 10dB attenuator) from the antenna port to the spectrum analyzer or power meter.
2. Establish a reference level by using the following procedure:
   a) Set instrument center frequency to DTS channel center frequency.
   b) Set the span to ≥ 1.5 × DTS bandwidth.
   c) Set the RBW = 100 kHz.
   d) Set the VBW ≥ [3 × RBW].
   e) Detector = peak.
   f) Sweep time = auto couple.
   g) Trace mode = max hold.
   h) Allow trace to fully stabilize.
   i) Use the peak marker function to determine the maximum PSD level.
   Note that the channel found to contain the maximum PSD level can be used to establish the reference level
3. Emission level measurement
   a) Set the center frequency and span to encompass frequency range to be measured.
   b) Set the RBW = 100 kHz.
   c) Set the VBW ≥ [3 × RBW].
   d) Detector = peak.
   e) Sweep time = auto couple.
   f) Trace mode = max hold.
   g) Allow trace to fully stabilize.
   h) Use the peak marker function to determine the maximum amplitude level.
4. Measure the Conducted unwanted Emissions of the test frequency with special test status.
5. Repeat until all the test status is investigated.
6. Report the worst case.

Used Test Equipment List

Spectrum Analyzer. Refer to Clause 5 Test Equipment List for details.

TEST REPORT

Result plot as follows:

1M:

Lowest channel (2.402 GHz):

9 kHz to 25 GHz:

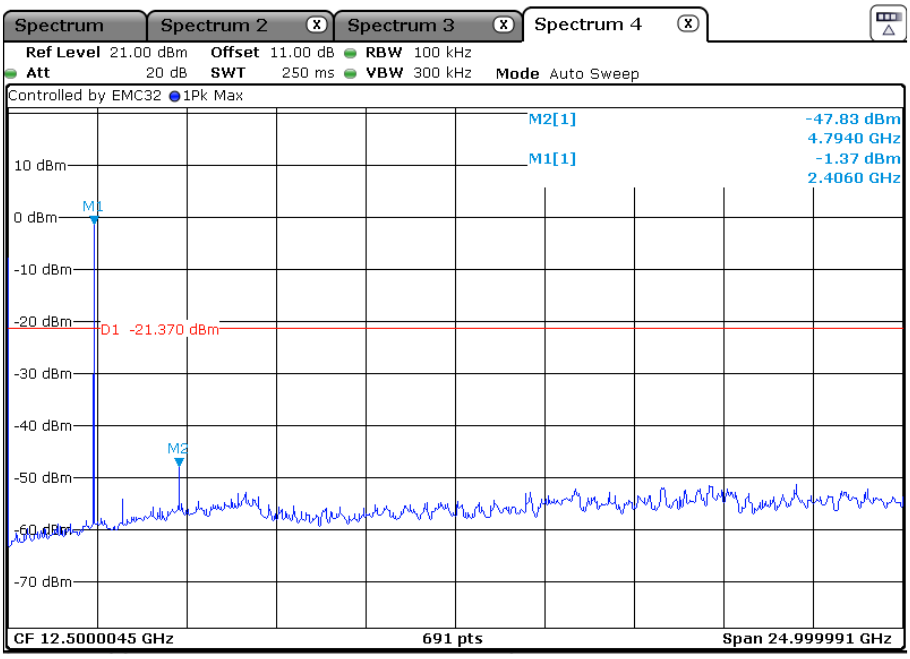

Middle Channel (2.440 GHz):

9 kHz to 25 GHz:

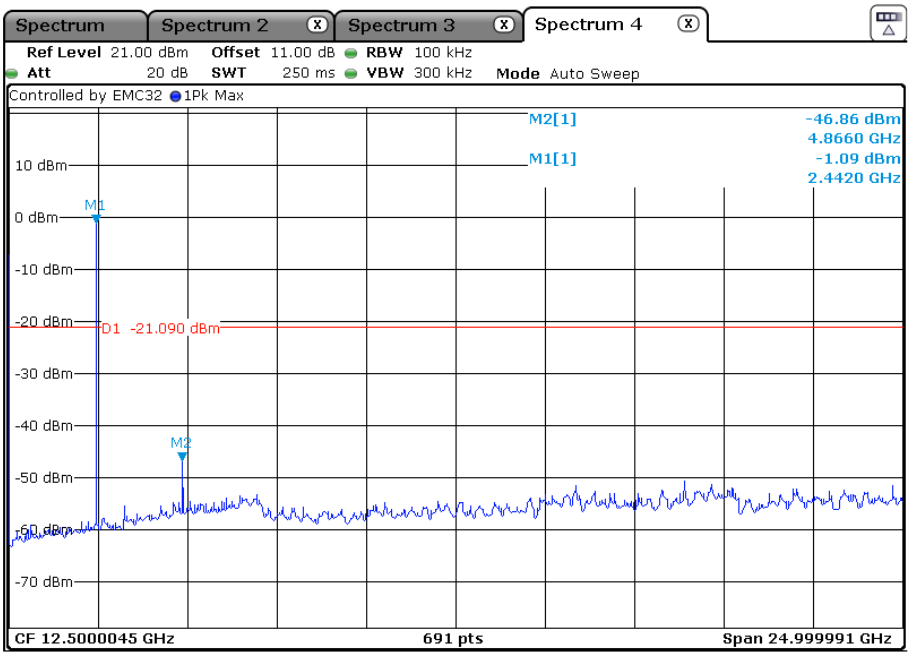

TEST REPORT

Highest Channel (2.480 GHz):

9 kHz to 25 GHz:

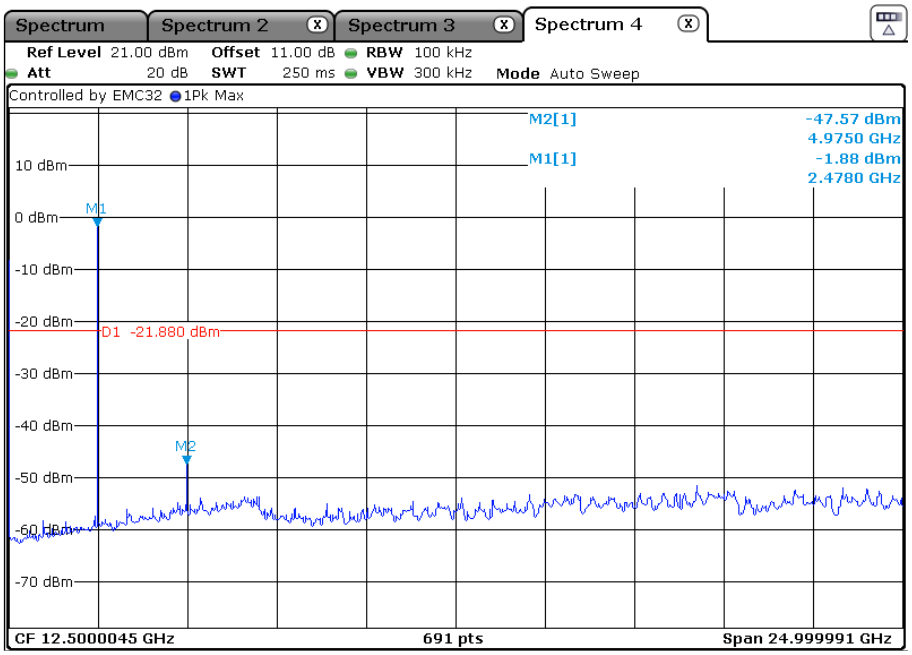

2M:

Lowest channel (2.402 GHz):

9 kHz to 25 GHz:

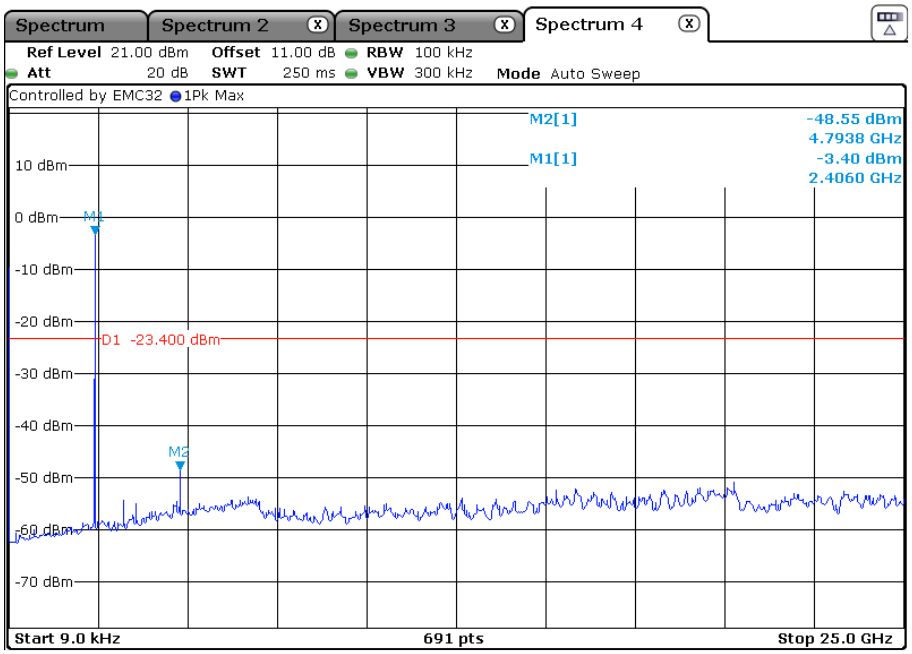

TEST REPORT

Middle Channel (2.440 GHz):

9 kHz to 25 GHz:

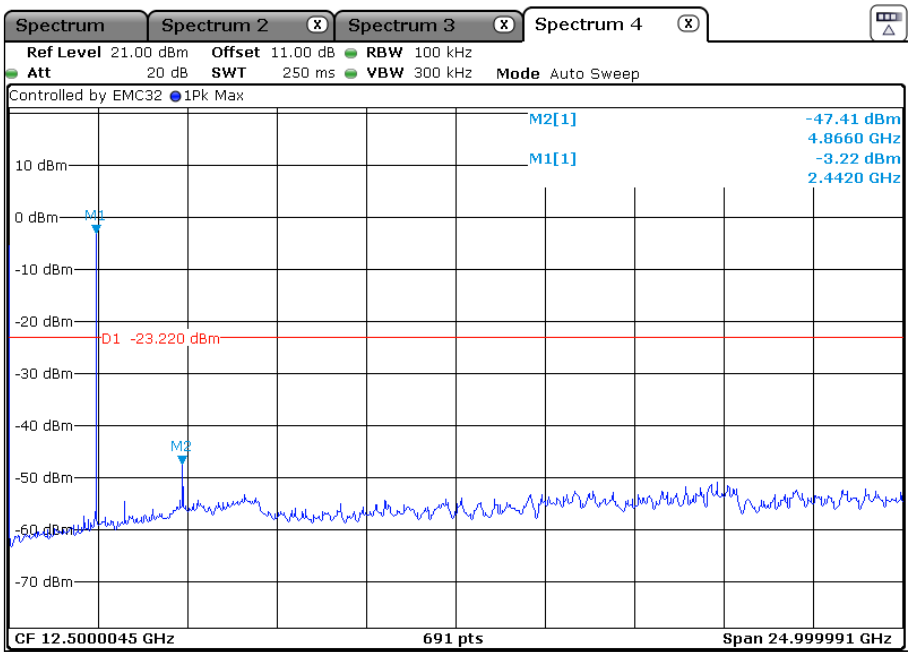

Highest Channel (2.480 GHz):

9 kHz to 25 GHz:

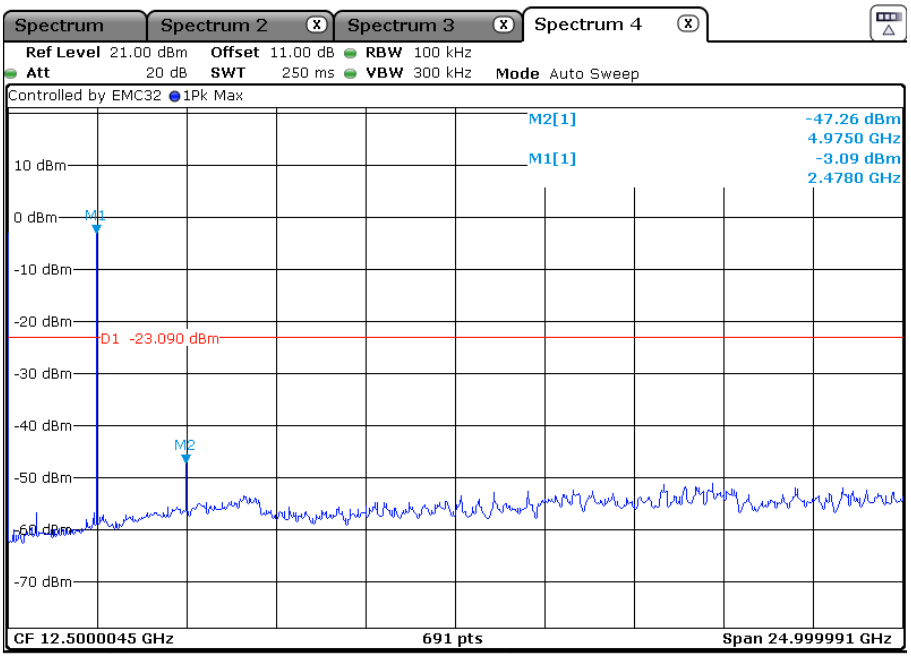

TEST REPORT

4.6 Radiated Emissions

Test Requirement:	FCC Part 15 C section 15.247 section 15.247: (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).
Test Method:	ANSI C63.10: Clause 11.11, 11.12.1, 6.4, 6.5 and 6.6
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Limit:	40.0 dBμV/m between 30MHz & 88MHz; 43.5 dBμV/m between 88MHz & 216MHz; 46.0 dBμV/m between 216MHz & 960MHz; 54.0 dBμV/m above 960MHz.
Detector:	For Peak and Quasi-Peak value: RBW = 1 MHz for f ≥ 1 GHz, 200 Hz for 9 kHz to 150 kHz 9 kHz for 150 kHz to 30 MHz 120 kHz for 30 MHz to 1GHz VBW ≥ RBW Sweep = auto Detector function = peak for f ≥ 1 GHz, QP for f < 1 GHz Trace = max hold For AV value: RBW = 1 MHz for f ≥ 1 GHz, 100 kHz for f < 1 GHz VBW=10 Hz

TEST REPORT

Sweep = auto
Trace = max hold

Field Strength Calculation:

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below:
FS = RA + AF + CF - AG + PD + AV
FS = RA + Correct Factor + AV

Where:
FS = Field Strength in dBµV/m
RA = Receiver Amplitude (including preamplifier) in dBµV
AF = Antenna Factor in dB
CF = Cable Attenuation Factor in dB
AG = Amplifier Gain in dB
PD = Pulse Desensitization in dB
AV = Average Factor in –dB
Correct Factor = AF + CF – AG + PD

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:
FS = RA + AF + CF - AG + PD + AV
Assume a receiver reading of 62.0 dBµV is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dBµV/m.
RA = 62.0 dBµV
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB
PD = 0 dB
AV = -10 dB
Correct Factor = 7.4 + 1.6 – 29.0 + 0 = -20 dB
FS = 62 + (-20) + (-10) = 32 dBµV/m

Section 15.205 Restricted bands of operation.
(a) Except as shown in paragraph (d) of this section. Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz

TEST REPORT

0.090 - 0.110 10.495 - 0.505 2.1735 - 2.1905 4.125 - 4.128 4.17725 - 4.17775 4.20725 - 4.20775 6.215 - 6.218 6.26775 - 6.26825 6.31175 - 6.31225 8.291 - 8.294 8.362 - 8.366 8.37625 - 8.38675 8.41425 - 8.41475 12.29 - 12.293 12.51975 - 12.52025 12.57675 - 12.57725 13.36 - 13.41	16.42 - 16.423 16.69475 - 16.69525 16.80425 - 16.80475 25.5 - 25.67 37.5 - 38.25 73 - 74.6 74.8 - 75.2 108 - 121.94 123 - 138 149.9 - 150.05 156.52475 - 156.52525 156.7 - 156.9 162.0125 - 167.17 167.72 - 173.2 240 - 285 322 - 335.4	399.9 - 410 608 - 614 960 - 1240 1300 - 1427 1435 - 1626.5 1645.5 - 1646.5 1660 - 1710 1718.8 - 1722.2 2200 - 2300 2310 - 2390 2483.5 - 2500 2655 - 2900 3260 - 3267 3332 - 3339 3345.8 - 3358 3600 - 4400	4.5 - 5.15 5.35 - 5.46 7.25 - 7.75 8.025 - 8.5 9.0 - 9.2 9.3 - 9.5 10.6 - 12.7 13.25 - 13.4 14.47 - 14.5 15.35 - 16.2 17.7 - 21.4 22.01 - 23.12 23.6 - 24.0 31.2 - 31.8 36.43 - 36.5

Test Configuration:

1) 9 kHz to 30 MHz emissions:

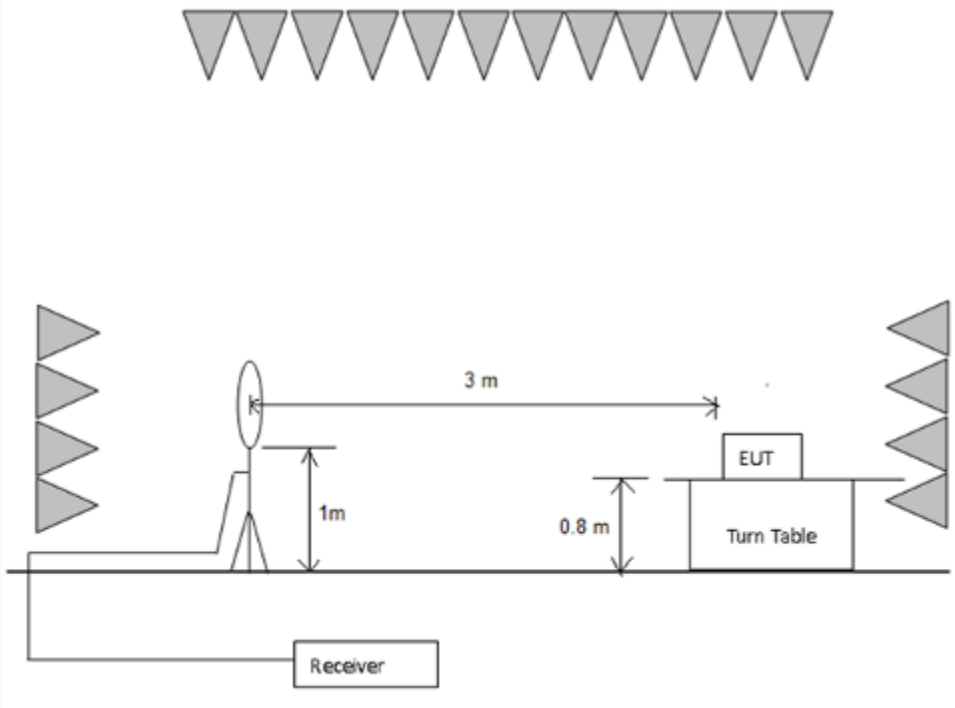

2) 30 MHz to 1 GHz emissions:

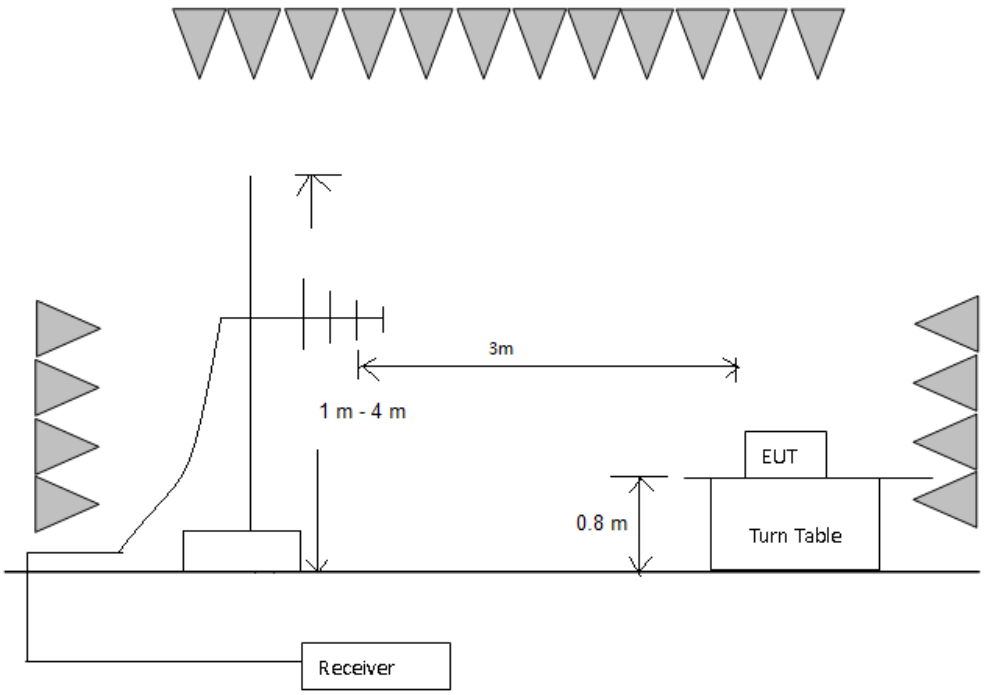

3) 1 GHz to 40 GHz emissions:

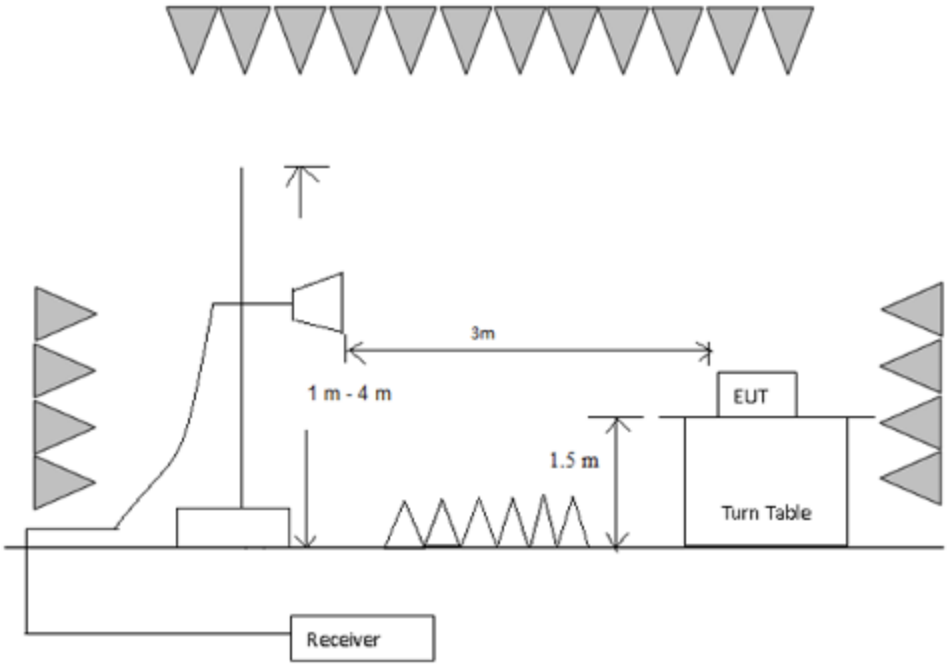

Test Procedure:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2010 was used to perform radiated emission test above 1 GHz.

The receiver was scanned from 9 kHz to 25 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional

TEST REPORT

radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

Used Test Equipment List:
3m Semi-Anechoic Chamber, EMI Test Receiver (9 kHz~7 GHz), Signal and Spectrum Analyzer (10 Hz~40 GHz), Loop antenna (9 kHz-30 MHz). TRILOG Super Broadband test Antenna(30 MHz-3 GHz）(RX), Bouble-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)(RX) and High Frequency Antenna & preamplifier(18 GHz~26.5 GHz) (RX). Refer to Clause 5 Test Equipment List for details.

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement
The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Spurious Emissions. Quasi-Peak Measurement

Pre-scan all modes, worst case as below

1Mbps data rate Test at Channel 1 (2.402 GHz) in transmitting status

Vertical:

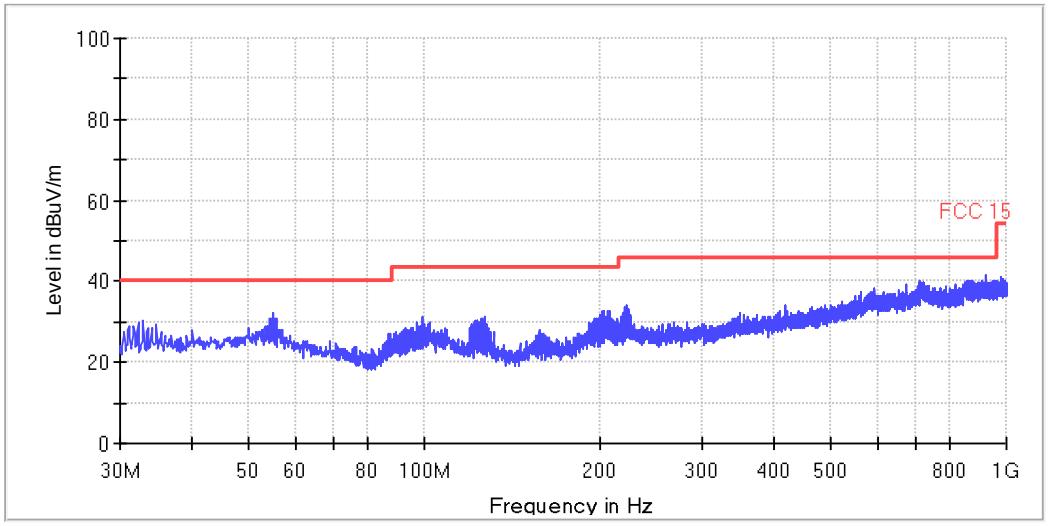

All emission levels are more than 6dB below the limit.

TEST REPORT

Horizontal:

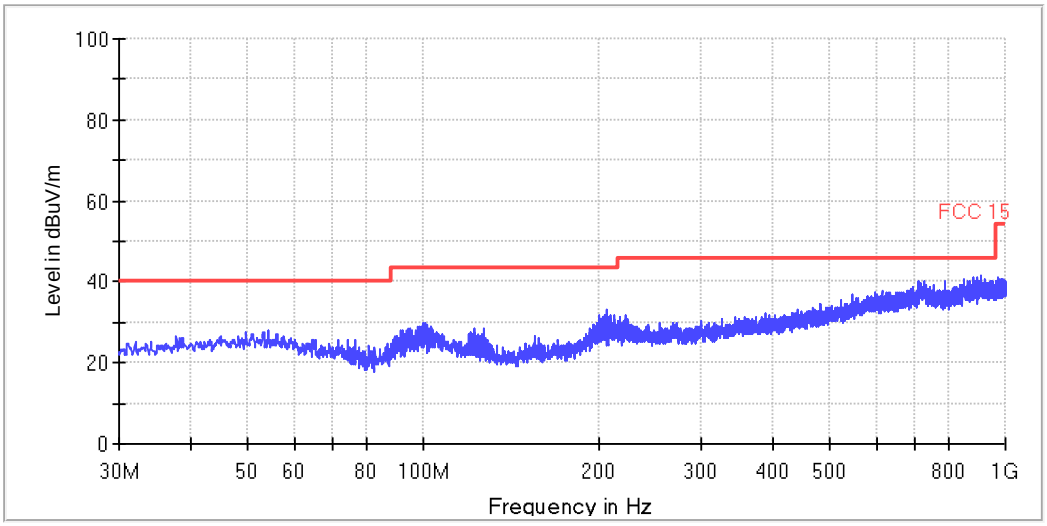

All emission levels are more than 6dB below the limit.

1~25 GHz Radiated Emissions. Peak & Average Measurement

1M:

Test at Channel 0 (2.402 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Correct Factor	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
9608.4	42.5	6.9	49.4	74	H
9064.4	40.5	6.3	46.8	74	V

Remark:
When Peak emission level was below AV limit, the AV emission level did not be recorded.

Test at Channel 19 (2.440 GHz) in transmitting status

Frequency (MHz)	Reading Level (dBμV)	Correct Factor	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
9759.3	39.7	7.1	46.8	74	H
7604.5	41.3	4.2	45.5	74	V

TEST REPORT

Remark:
When Peak emission level was below AV limit, the AV emission level did not be recorded.

Test at Channel 39 (2.480 GHz) in transmitting status

Frequency (MHz)	Reading Level (dBμV)	Correct Factor	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
9920.8	39.8	7.3	47.1	74	H
9920.8	41.7	7.3	49.0	74	V

Remark:
When Peak emission level was below AV limit, the AV emission level did not be recorded.

2M:

Test at Channel 0 (2.402 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dBμV)	Correct Factor	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
9608.4	40.6	6.9	47.5	74	H
9901.6	39.1	7.3	46.4	74	V

Remark:
When Peak emission level was below AV limit, the AV emission level did not be recorded.

Test at Channel 19 (2.440 GHz) in transmitting status

Frequency (MHz)	Reading Level (dBμV)	Correct Factor	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
9759.3	40.3	7.1	47.4	74	H
9759.3	40.9	7.1	48.0	74	V

Remark:
When Peak emission level was below AV limit, the AV emission level did not be recorded.

Test at Channel 39 (2.480 GHz) in transmitting status

Frequency (MHz)	Reading Level (dBμV)	Correct Factor	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
9920.8	41.7	7.3	49.0	74	H
9920.8	39.3	7.3	46.6	74	V

Remark:
When Peak emission level was below AV limit, the AV emission level did not be recorded.

TEST REPORT

Band Edges Emission

1M:

Test at Channel 0 (2.402 GHz) in transmitting status

Horizontal

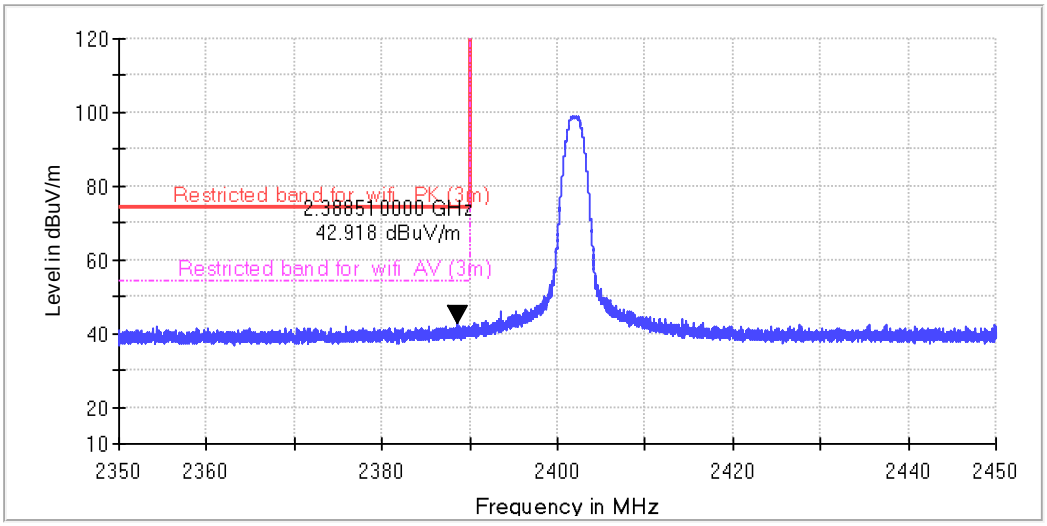

Vertical

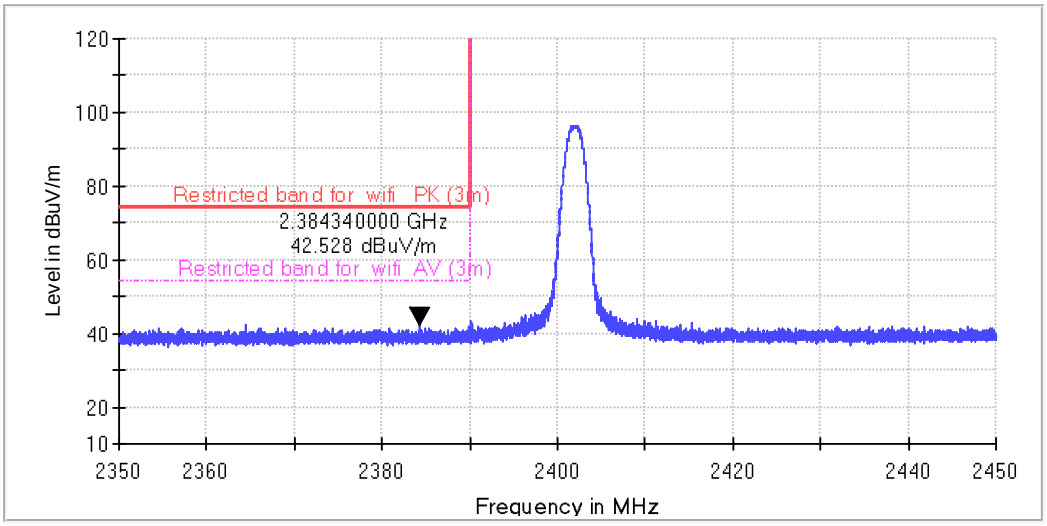

PK Measurement:

Frequency	Reading Level	Correction factors	Emission Level	Limit	Antenna polarization
(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	
2388.5	50.6	-7.7	42.9	74	H
2384.3	50.3	-7.8	42.5	74	V

TEST REPORT

Remark: When Peak emission level was below AV limit, the AV emission level did not be recorded.

Test at Channel 39 (2.480 GHz) in transmitting status

Horizontal

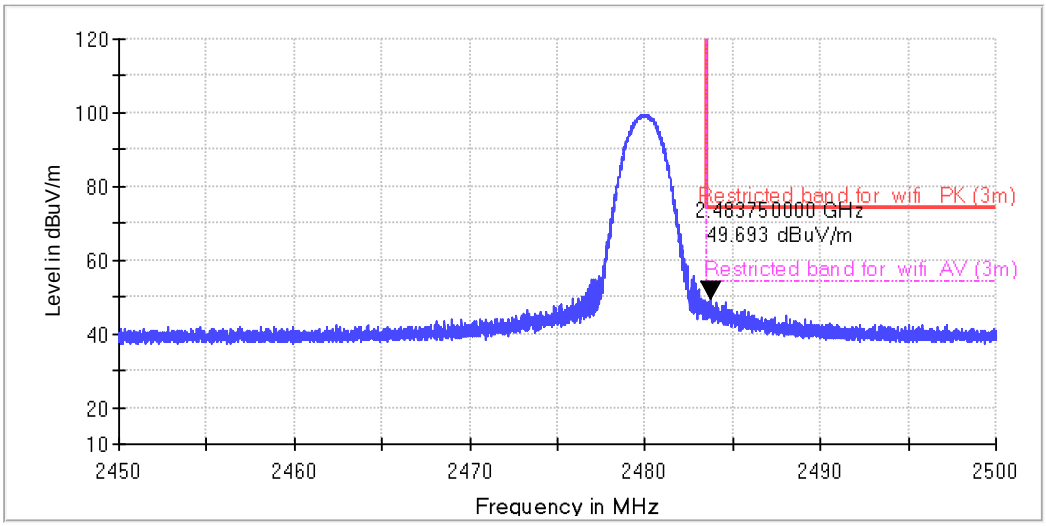

Vertical

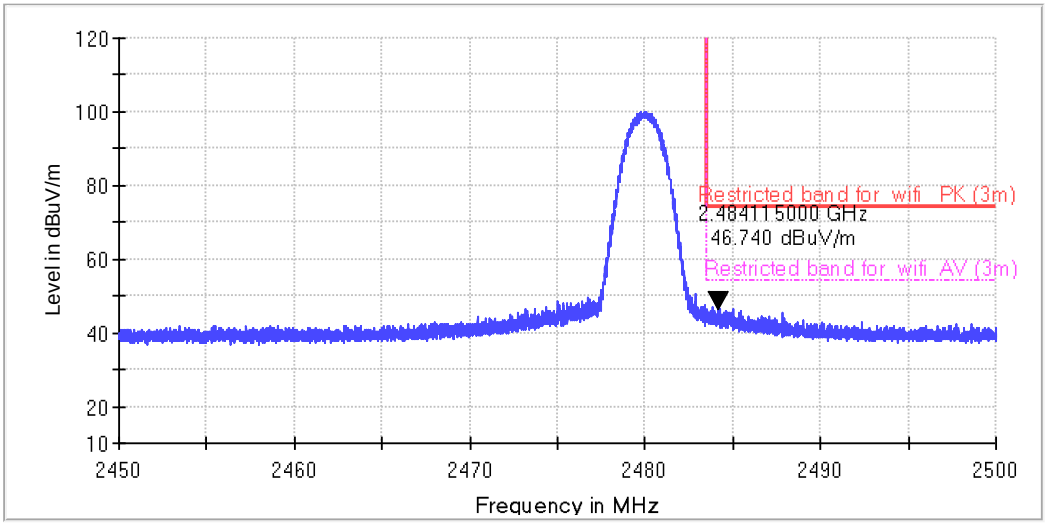

PK Measurement:

Frequency	Reading Level	Correction factors	Emission Level	Limit	Antenna polarization
(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	
2483.8	57.1	-7.4	49.7	74	H
2484.1	54.1	-7.4	46.7	74	V

TEST REPORT

Remark: When Peak emission level was below AV limit, the AV emission level did not be recorded.

2M:

Test at Channel 0 (2.402 GHz) in transmitting status

Horizontal

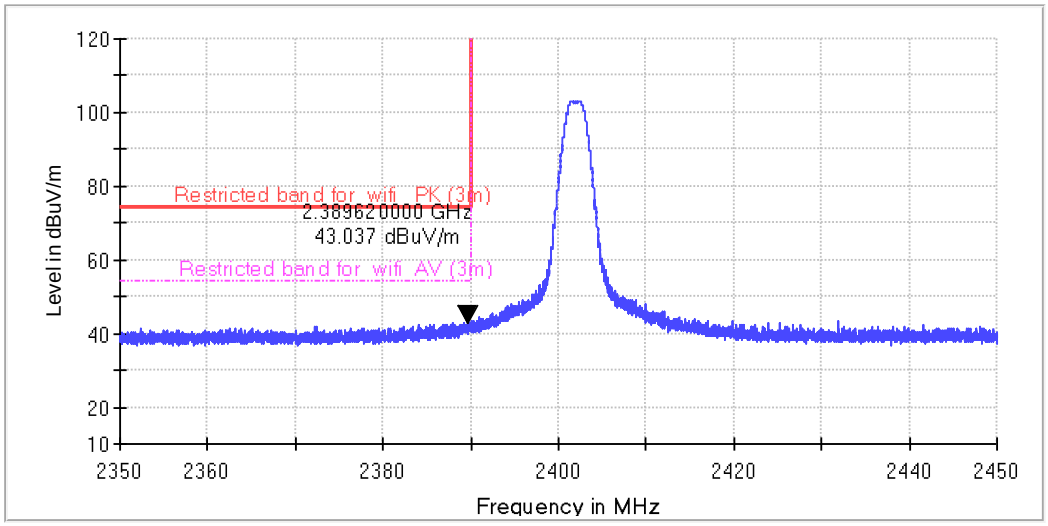

Vertical

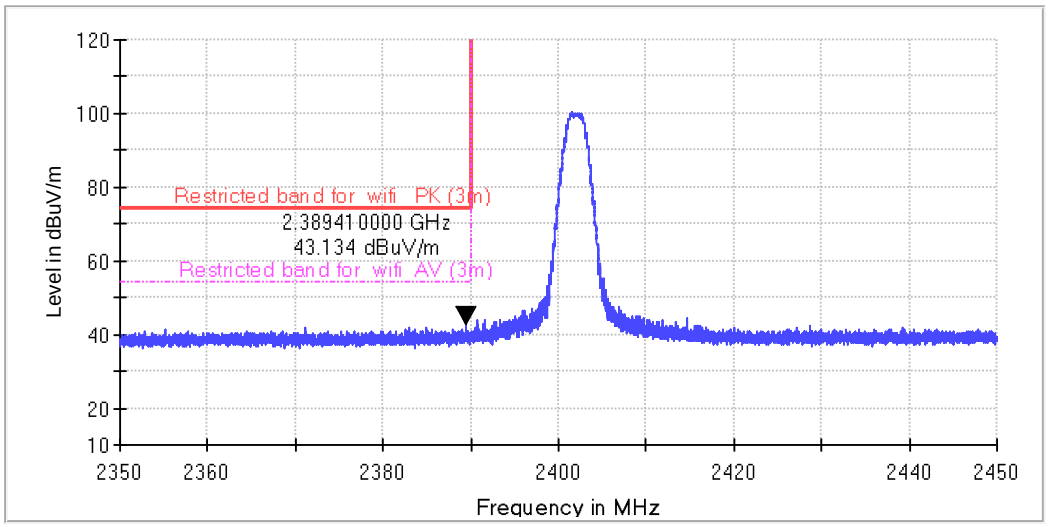

PK Measurement:

Frequency	Reading Level	Correction factors	Emission Level	Limit	Antenna polarization
(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	
2389.6	50.7	-7.7	43.0	74	H
2389.4	50.8	-7.7	43.1	74	V

TEST REPORT

Remark: When Peak emission level was below AV limit, the AV emission level did not be recorded.

Test at Channel 39 (2.480 GHz) in transmitting status

Horizontal

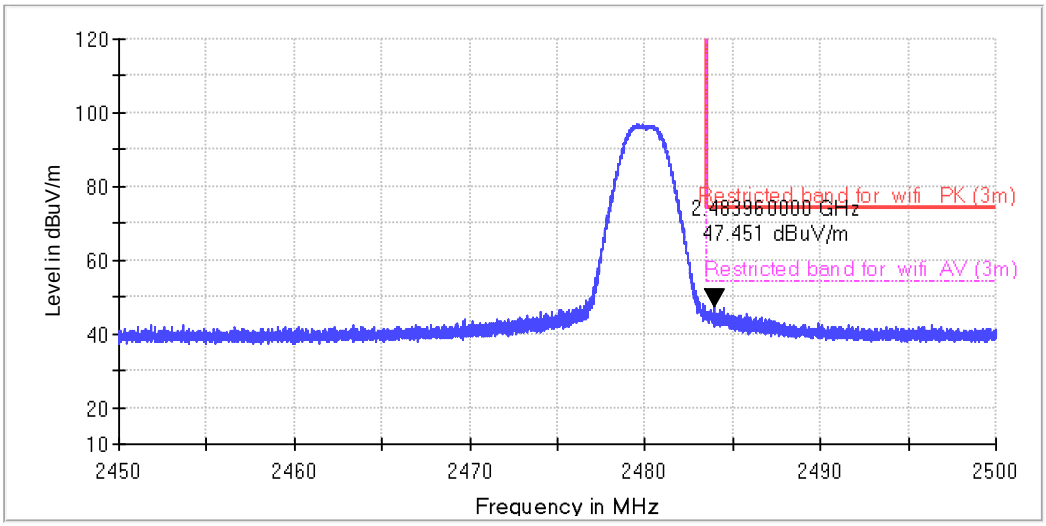

Vertical

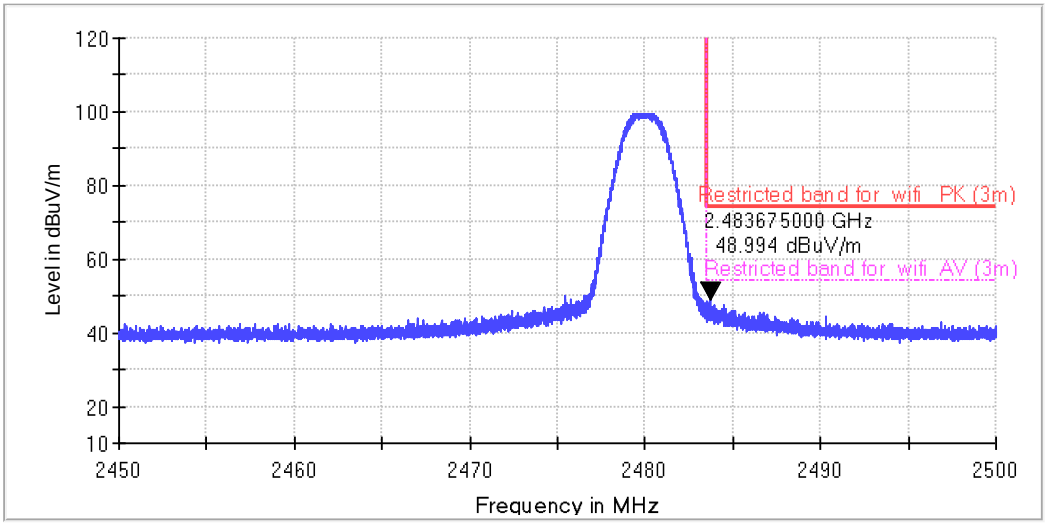

PK Measurement:

Frequency	Reading Level	Correction factors	Emission Level	Limit	Antenna polarization
(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	
2384.0	55.3	-7.8	47.5	74	H
2483.7	56.4	-7.4	49.0	74	V

TEST REPORT

Remark: When Peak emission level was below AV limit, the AV emission level did not be recorded.

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Loss –Preamplifier Factor.

No other emission level which is attenuated less than 20dB below the limit.

4.7 Band Edges Requirement

Test Requirement:	FCC Part 15 C section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.
Frequency Band:	2400 MHz to 2483.5 MHz
Test Method:	ANSI C63.10: Clause 11.11 and 11.13
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	For Band Edges Emission in Radiated mode, Please refer to clause 4.6

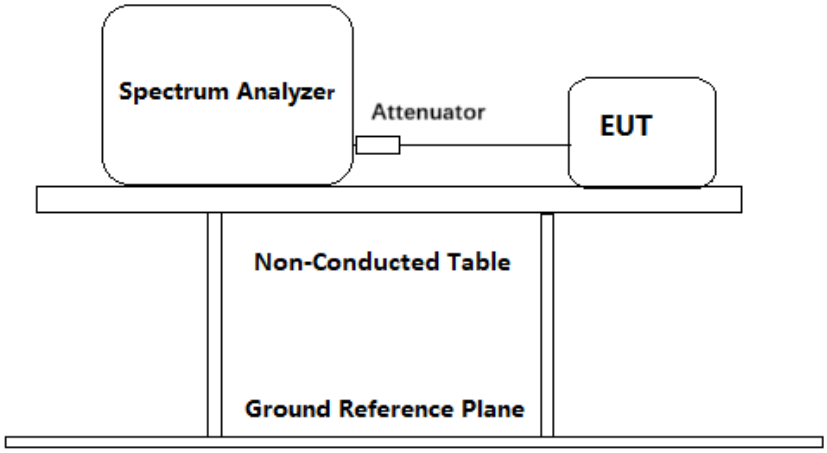

TEST REPORT

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
   a) Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).
   b) Set the center frequency and span to encompass frequency range to be measured.
   c) RBW = 100 kHz.
   d) VBW ≥ [3 × RBW].
   e) Detector = peak.
   f) Sweep time = auto.
   g) Trace mode = max hold.
   h) Allow sweep to continue until the trace stabilizes (required measurement time may increase for low-duty-cycle applications).
   i) For radiated Band-edge emissions within a restricted band and within 2 MHz of an authorized band edge, integration method is considered.
2. Repeat until all the test status is investigated.
3. Report the worst case.

Used Test Equipment List:
3m Semi-Anechoic Chamber, EMI Test Receiver (9 kHz~7 GHz), Signal and Spectrum Analyzer (10 Hz~40 GHz), Loop antenna (9 kHz-30 MHz). TRILOG Super Broadband test Antenna(30 MHz-3 GHz）(RX), Bouble-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)(RX) and High Frequency Antenna & preamplifier(18 GHz~26.5 GHz) (RX). Refer to Clause 5 Test Equipment List for details.

Test result with plots as follows:

The band edges was measured and recorded Result:

The Lower Edges attenuated more than 20dB.

The Upper Edges attenuated more than 20dB.

1M:

Channel 0: 2.402 GHz

TEST REPORT

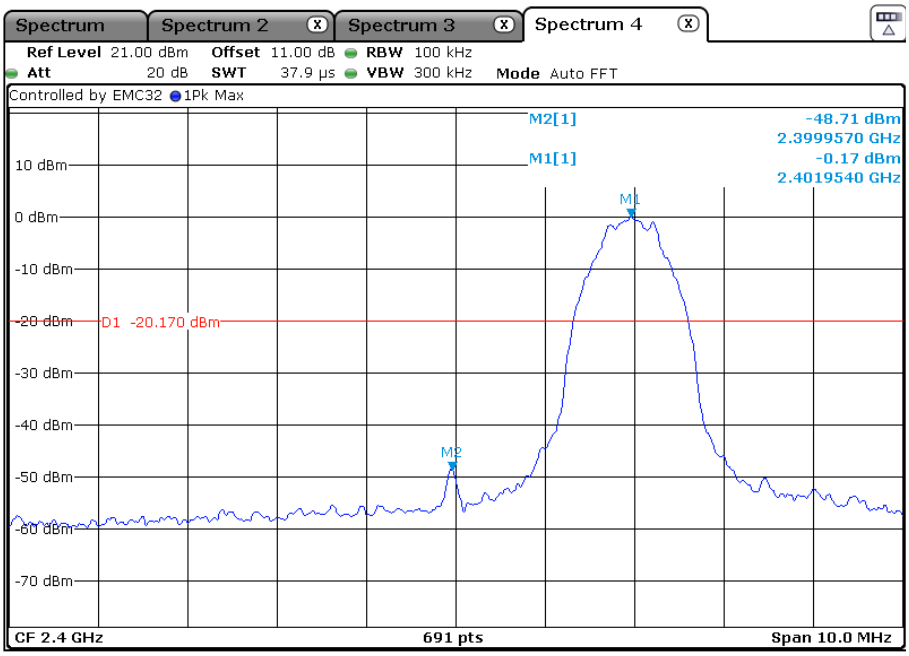

Channel 39: 2.480 GHz

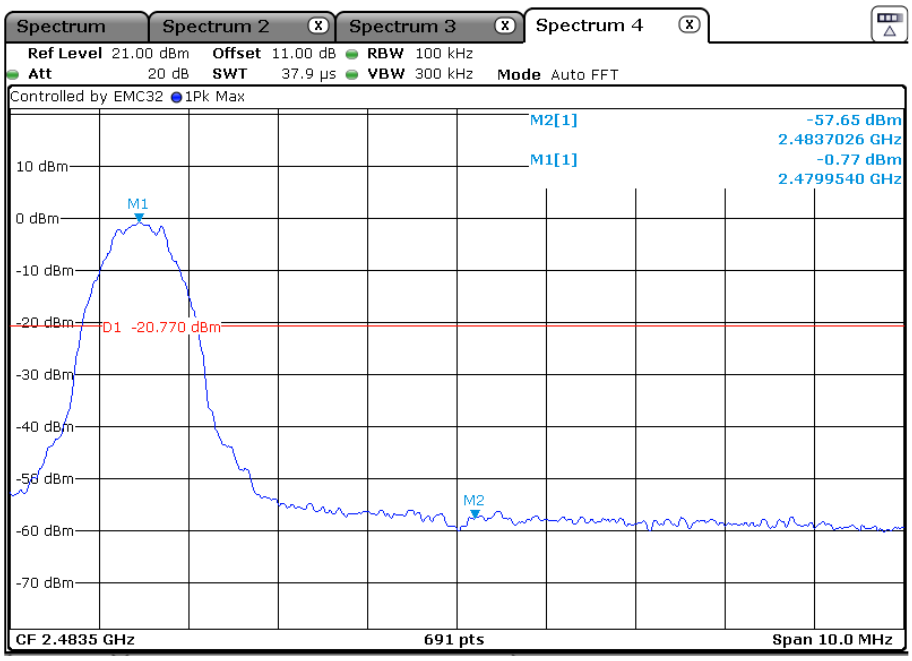

TEST REPORT

2M:

Channel 0: 2.402 GHz

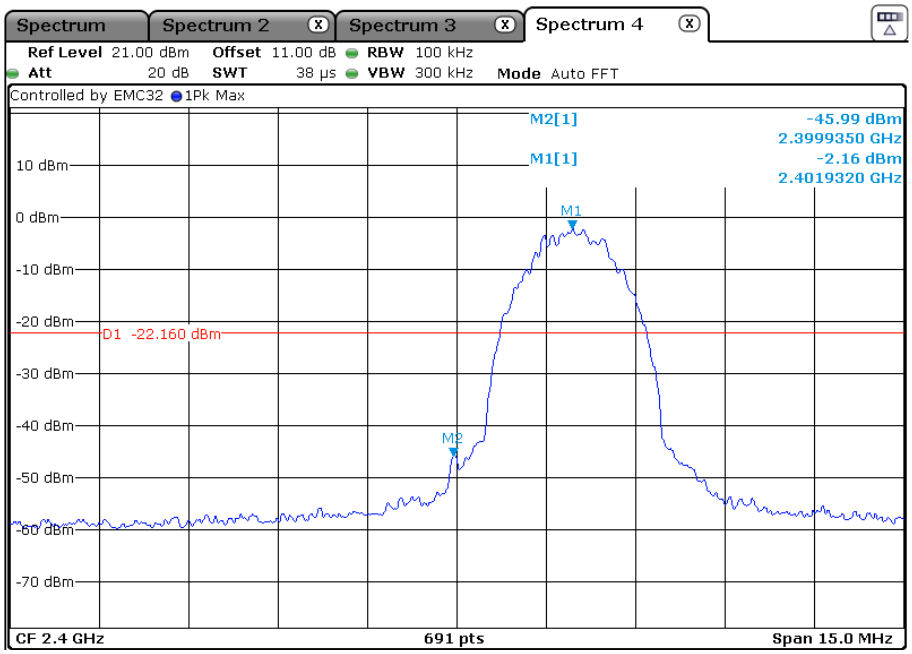

Channel 39: 2.480 GHz

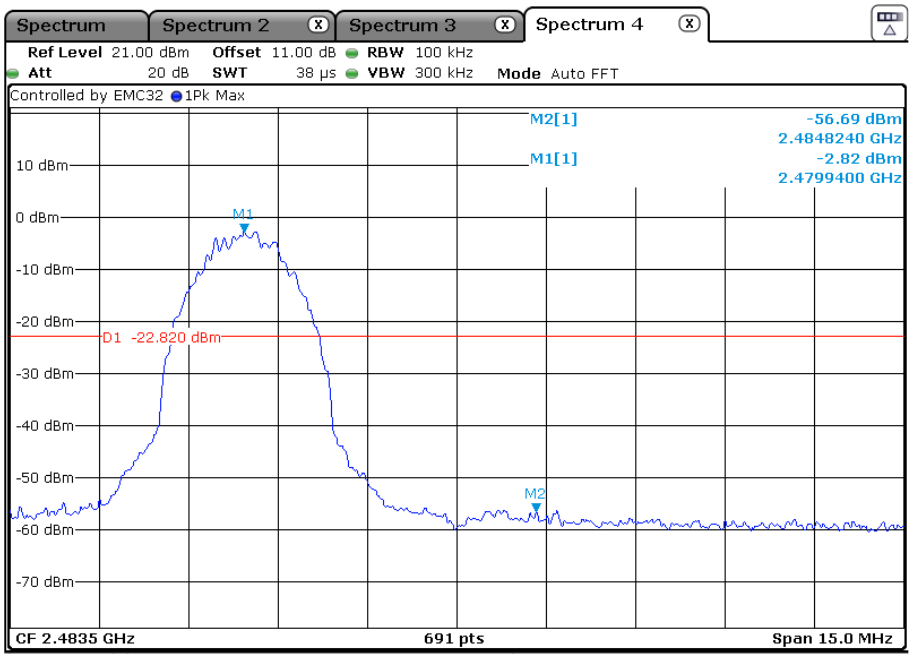

TEST REPORT

4.8 Conducted Emission Test

Test Configuration:

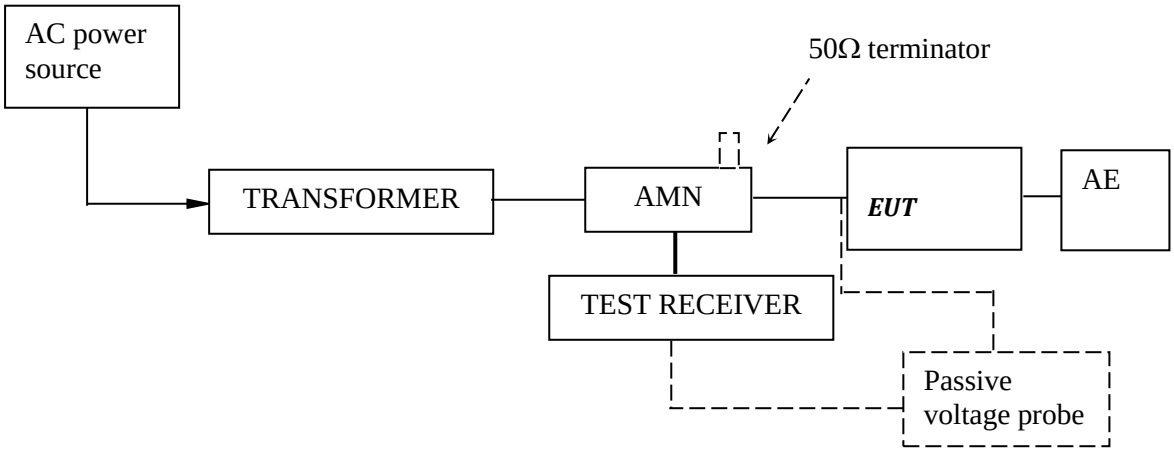

Test Setup and Procedure:
Test was performed according to ANSI C63.10 Clause 6.2. The EUT was set to achieve the maximum emission level. The mains terminal disturbance voltage was measured with the EUT in a shielded room. The EUT was connected to AC power source through an Artificial Mains Network which provides a 50Ω linear impedance Artificial hand is used if appropriate (for handheld apparatus). The load/control terminal disturbance voltage was measured with passive voltage probe if appropriate.

The table-top EUT was placed on a 0.8m high non-metallic table above earthed ground plane (Ground Reference Plane).And for floor standing EUT, was placed on a 0.1m high non-metallic supported on GRP. The EUT keeps a distance of at least 0.8m from any other of the metallic surface. The Artificial Mains Network is situated at a distance of 0.8m from the EUT.

During the test, mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m

The bandwidth of test receiver was set at 9 kHz. The frequency range from 150 kHz to 30MHz was checked.

Test Data and Curve

At main terminal: Pass

TEST REPORT

Tested Wire: Live Operation Mode: transmitting

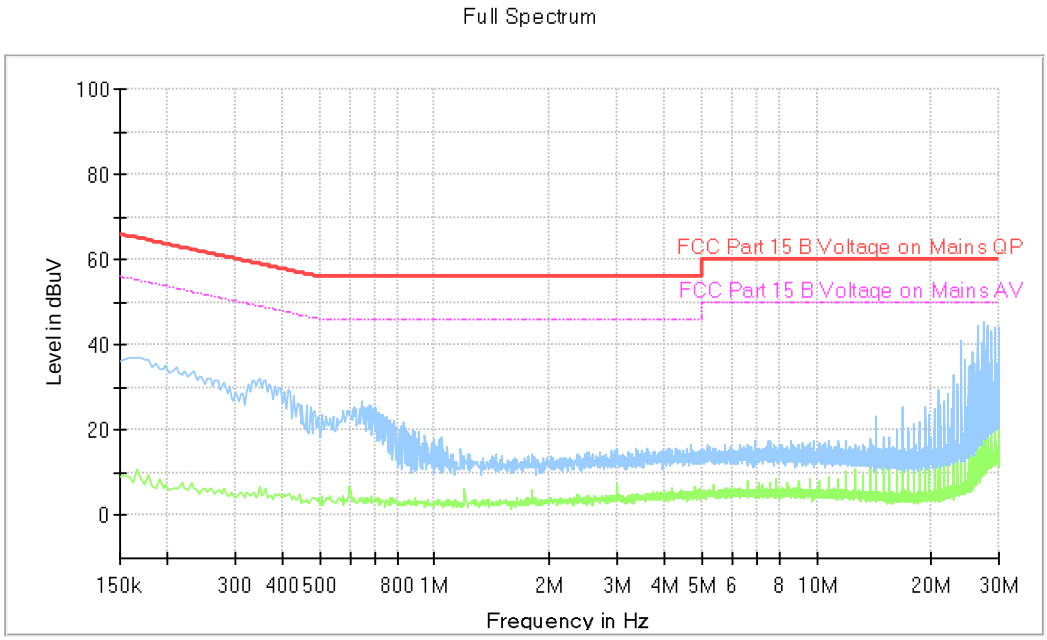

All emission levels are more than 10 dB below the limit.

Tested Wire: Neutral Operation Mode: transmitting

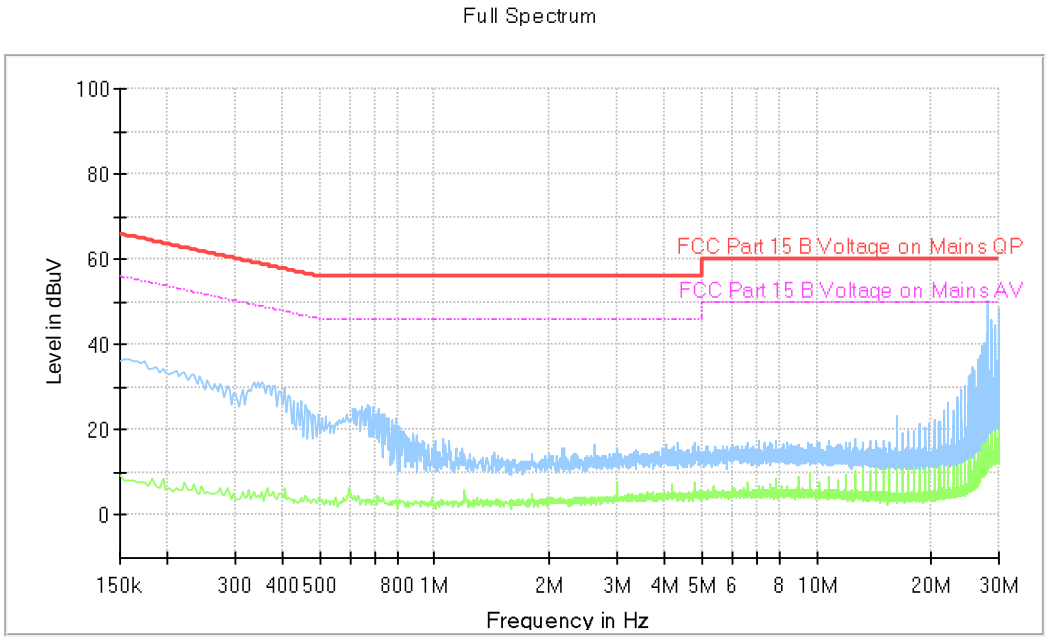

All emission levels are more than 10 dB below the limit.

TEST REPORT

5.0 Test Equipment List

Radiated Emission/Radio					
Equipment No.	Equipment	Model	Manufacturer	Cal. Due date (YYYY-MM-DD)	Calibration Interval
EM030-04	3m Semi-Anechoic Chamber	9×6×6 m^3	ETS·LINDGREN	2025-04-09	1Y
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S	2025-11-10	1Y
EM031-03	Signal and Spectrum Analyzer (10 Hz~40 GHz)	R&S FSV40	R&S	2025-11-10	1Y
EM011-04	Loop antenna (9 kHz-30 MHz)	HFH2-Z2	R&S	2025-07-07	1Y
EM033-01	TRILOG Super Broadband test Antenna(30 MHz-3 GHz）(RX)	VULB 9163	SCHWARZBECK	2025-12-08	1Y
EM033-02	Bouble-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)(RX)	R&S HF907	R&S	2025-07-02	1Y
EM033-03	High Frequency Antenna & preamplifier(18 GHz~26.5 GHz) (RX)	R&S SCU-26	R&S	2025-04-22	1Y
EM033-04	High Frequency Antenna & preamplifier (26 GHz-40 GHz)	R&S SCU-40	R&S	2025-04-22	1Y
EM031-02-01	Coaxial cable(9 kHz-1 GHz)	N/A	R&S	2025-04-09	1Y
EM033-02-02	Coaxial cable(1 GHz-18 GHz)	N/A	R&S	2025-04-09	1Y
EM033-04-02	Coaxial cable(18 GHz~40 GHz)	N/A	R&S	2025-04-25	1Y
EM031-01	Signal Generator (9 kHz~6 GHz)	SMB100A	R&S	2025-10-28	1Y
EM040-01	Band Reject/Notch Filter	WRHFV	Wainwright	N/A	1Y
EM040-02	Band Reject/Notch Filter	WRCGV	Wainwright	N/A	1Y
EM040-03	Band Reject/Notch Filter	WRCGV	Wainwright	N/A	1Y
EM022-03	2.45 GHz Filter	BRM50702	Micro-Tronics	2025-05-15	1Y
SA016-29	Climatic Test Chamber	MHU-80L	JIANQIAO	2026-01-05	1Y
EM046-05	Power meter	NPR6A	R&S	2025-04-22	1Y
EM046-06	Power meter	NPR6A	R&S	2025-05-09	1Y
EM031-04-01	EMC32	V10.01.00	R&S	N/A	N/A
EM045-01-10	10dB Attenuator	N/A	R&S	2025-12-24	1Y

Conducted Disturbance-Mains Terminal(2)					
Equipment No.	Equipment	Model	Manufacturer	Cal. Due date (DD-MM-YYYY)	Calibration Interval
EM031-04	EMI receiver	ESR3	R&S	05/01/2026	1Y
EM006-06	LISN	ENV216	R&S	01/09/2025	1Y
SA047-111	Digital Temperature-Humidity Recorder	RS210	YIJIE	20/10/2025	1Y
EM004-03	EMC shield Room	8m×4m×3m	Zhongyu	05/01/2026	1Y
EM031-04-01	EMC32	V10.01.00	R&S	N/A	N/A

**********End of the test report**********