

EXHIBIT A- RADIATED SPURIOUS EMISSION DATA

30M-1G

WIFI2.4G-B- Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_16.06.57

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

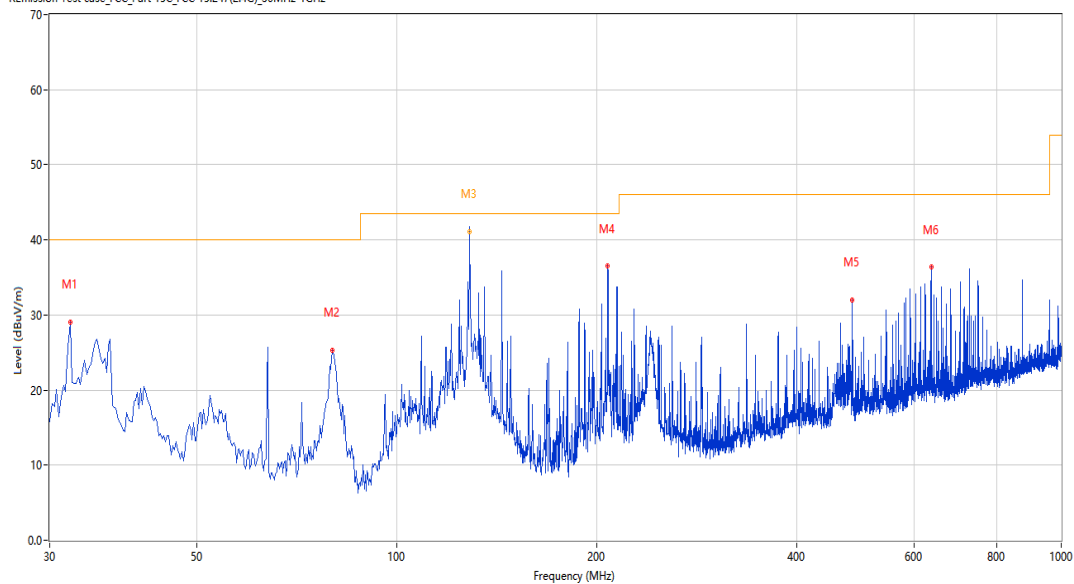

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	32.182	29.06	-27.49	40.0	10.94	Peak	333.70	100	Horizontal	Pass
2	79.943	25.30	-30.27	40.0	14.70	Peak	133.20	100	Horizontal	Pass
3	128.697	44.69	-27.99	43.5	-1.19	Peak	133.20	146	Horizontal	N/A
3*	128.697	41.06	-27.99	43.5	2.44	QP	133.20	146	Horizontal	Pass
4	207.708	36.52	-24.91	43.5	6.98	Peak	177.20	100	Horizontal	Pass
5	485.059	31.92	-17.64	46.0	14.08	Peak	119.90	100	Horizontal	Pass
6	637.068	36.35	-12.80	46.0	9.65	Peak	86.80	100	Horizontal	Pass

WIFI2.4G-B-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_16.11.40

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

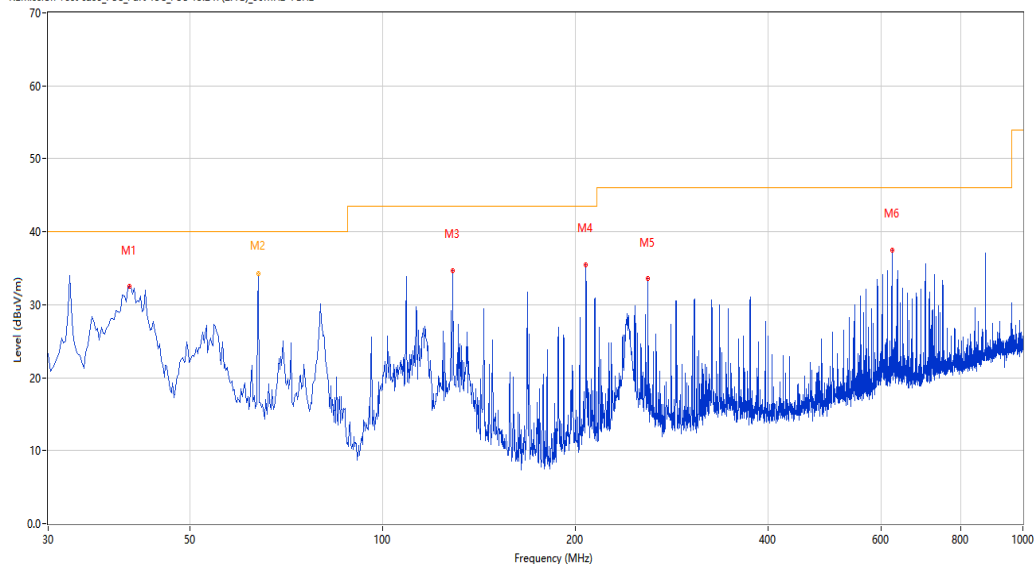

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	40.182	32.57	-24.92	40.0	7.43	Peak	338.00	100	Vertical	Pass
2	63.999	35.54	-25.99	40.0	4.46	Peak	59.10	100	Vertical	Pass
2*	63.999	34.27	-25.99	40.0	5.73	QP	59.10	100	Vertical	Pass
3	128.673	34.69	-27.99	43.5	8.81	Peak	3.10	100	Vertical	Pass
4	207.708	35.53	-24.91	43.5	7.97	Peak	314.20	100	Vertical	Pass
5	259.590	33.54	-22.67	46.0	12.46	Peak	358.90	100	Vertical	Pass
6	624.946	37.54	-13.25	46.0	8.46	Peak	126.00	100	Vertical	Pass

1-18G

WIFI2.4G-B- Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_14.57.18

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1 °C

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

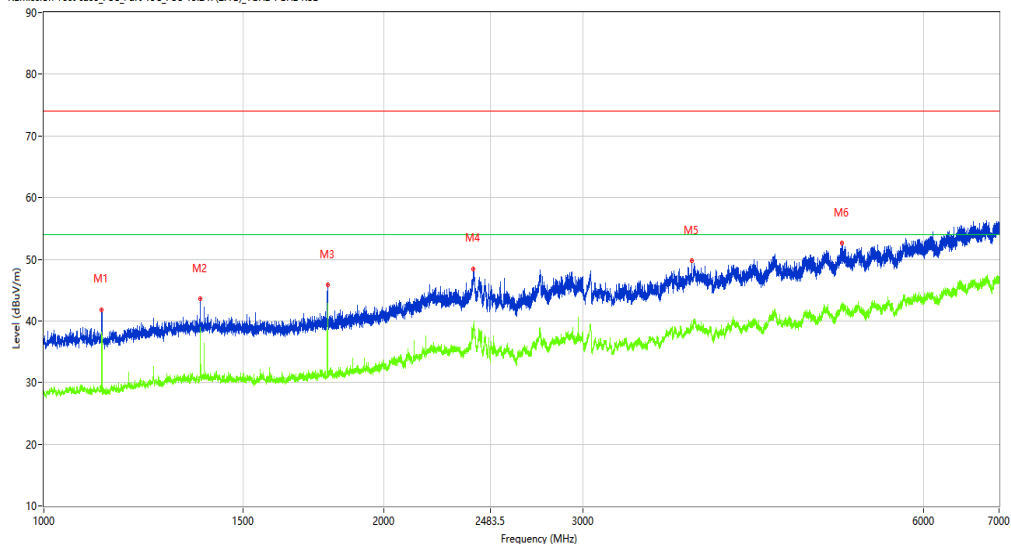

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.250	41.84	-15.15	74.0	32.16	Peak	16.40	150	Horizontal	Pass
1**	1125.250	38.21	-15.15	54.0	15.79	AV	16.40	150	Horizontal	Pass
2	1375.000	43.60	-13.49	74.0	30.40	Peak	19.70	150	Horizontal	Pass
2**	1375.000	38.10	-13.49	54.0	15.90	AV	19.70	150	Horizontal	Pass
3	1782.000	45.84	-12.89	74.0	28.16	Peak	197.80	150	Horizontal	Pass
3**	1782.000	42.00	-12.89	54.0	12.00	AV	197.80	150	Horizontal	Pass
4	2400.000	48.47	-4.78	74.0	25.53	Peak	337.60	150	Horizontal	Pass
4**	2400.000	38.96	-4.78	54.0	15.04	AV	337.60	150	Horizontal	Pass
5	3745.500	49.70	-2.38	74.0	24.30	Peak	158.20	150	Horizontal	Pass
5**	3745.500	39.04	-2.38	54.0	14.96	AV	158.20	150	Horizontal	Pass
6	5084.500	52.63	0.94	74.0	21.37	Peak	257.50	150	Horizontal	Pass
6**	5084.500	42.73	0.94	54.0	11.27	AV	257.50	150	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_15.52.15

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

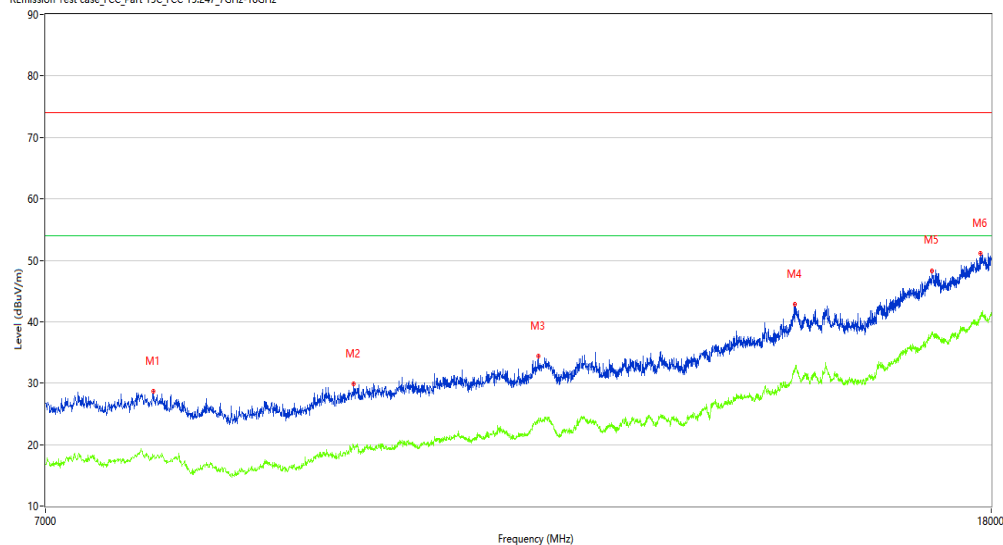

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7797.500	28.63	0.72	74.0	45.37	Peak	40.40	100	Horizontal	Pass
1**	7797.500	18.01	0.72	54.0	35.99	AV	40.40	100	Horizontal	Pass
2	9524.500	29.89	2.66	74.0	44.11	Peak	149.80	100	Horizontal	Pass
2**	9524.500	19.74	2.66	54.0	34.26	AV	149.80	100	Horizontal	Pass
3	11452.250	34.43	4.88	74.0	39.57	Peak	360.00	100	Horizontal	Pass
3**	11452.250	24.35	4.88	54.0	29.65	AV	360.00	100	Horizontal	Pass
4	14799.000	42.91	11.46	74.0	31.09	Peak	249.90	100	Horizontal	Pass
4**	14799.000	32.52	11.46	54.0	21.48	AV	249.90	100	Horizontal	Pass
5	16968.750	48.34	14.74	74.0	25.66	Peak	249.90	100	Horizontal	Pass
5**	16968.750	38.11	14.74	54.0	15.89	AV	249.90	100	Horizontal	Pass
6	17810.250	51.14	18.09	74.0	22.86	Peak	295.00	100	Horizontal	Pass
6**	17810.250	40.44	18.09	54.0	13.56	AV	295.00	100	Horizontal	Pass

WIFI2.4G-B-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-11_16.56.48

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1°C

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

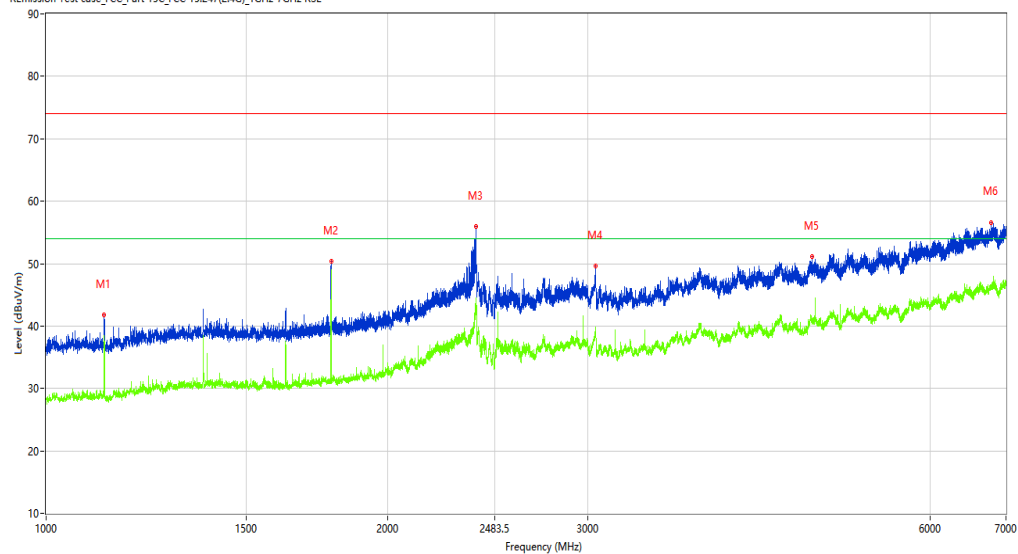

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.250	41.80	-15.15	74.0	32.20	Peak	277.60	100	Vertical	Pass
1**	1125.250	38.47	-15.15	54.0	15.53	AV	277.60	100	Vertical	Pass
2	1782.000	50.33	-12.89	74.0	23.67	Peak	269.40	100	Vertical	Pass
2**	1782.000	48.38	-12.89	54.0	5.62	AV	269.40	100	Vertical	Pass
3	2389.750	55.96	-6.71	74.0	18.04	Peak	294.70	100	Vertical	Pass
3**	2389.750	42.94	-6.71	54.0	11.06	AV	294.70	100	Vertical	Pass
4	3046.500	49.61	-2.25	74.0	24.39	Peak	139.50	100	Vertical	Pass
4**	3046.500	39.00	-2.25	54.0	15.00	AV	139.50	100	Vertical	Pass
5	4722.000	51.12	-0.54	74.0	22.88	Peak	259.50	100	Vertical	Pass
5**	4722.000	40.74	-0.54	54.0	13.26	AV	259.50	100	Vertical	Pass
6	6789.000	56.55	4.03	74.0	17.45	Peak	179.40	100	Vertical	Pass
6**	6789.000	46.58	4.03	54.0	7.42	AV	179.40	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_15.50.33

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

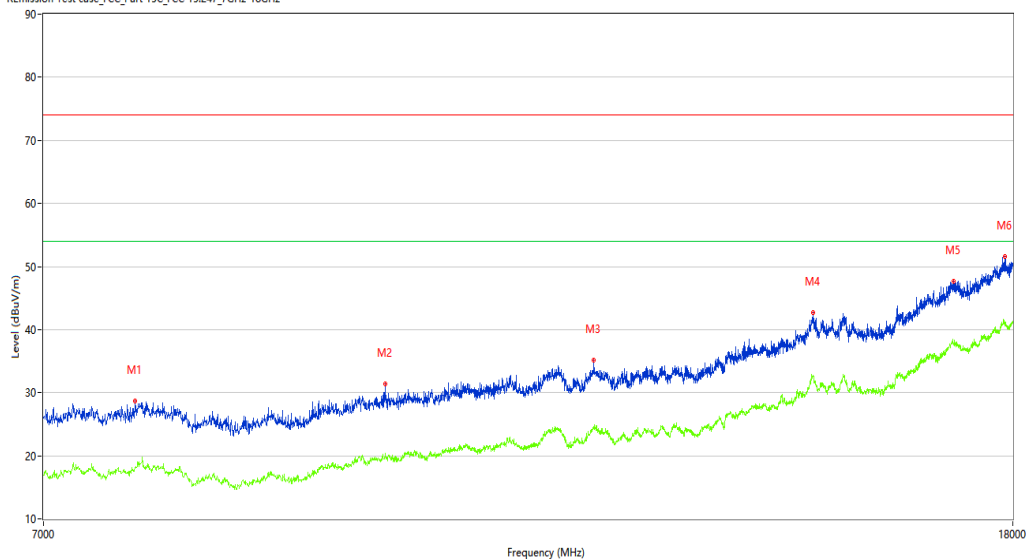

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7654.500	28.65	0.47	74.0	45.35	Peak	9.40	100	Vertical	Pass
1**	7654.500	18.02	0.47	54.0	35.98	AV	9.40	100	Vertical	Pass
2	9763.750	31.42	3.10	74.0	42.58	Peak	237.90	100	Vertical	Pass
2**	9763.750	19.84	3.10	54.0	34.16	AV	237.90	100	Vertical	Pass
3	11969.250	35.12	4.71	74.0	38.88	Peak	198.10	100	Vertical	Pass
3**	11969.250	24.47	4.71	54.0	29.53	AV	198.10	100	Vertical	Pass
4	14821.000	42.69	11.68	74.0	31.31	Peak	140.40	100	Vertical	Pass
4**	14821.000	32.78	11.68	54.0	21.22	AV	140.40	100	Vertical	Pass
5	16990.750	47.64	14.73	74.0	26.36	Peak	331.30	100	Vertical	Pass
5**	16990.750	37.69	14.73	54.0	16.31	AV	331.30	100	Vertical	Pass
6	17856.999	51.56	18.58	74.0	22.44	Peak	291.50	100	Vertical	Pass
6**	17856.999	40.68	18.58	54.0	13.32	AV	291.50	100	Vertical	Pass

WIFI2.4G-B-Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_15.11.55

EUT Name: N.A

Manufacturer: N.A

Model: Cyber1

Temp.(oC): 23.1℃

Hum.: 45%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110007-01#02

R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

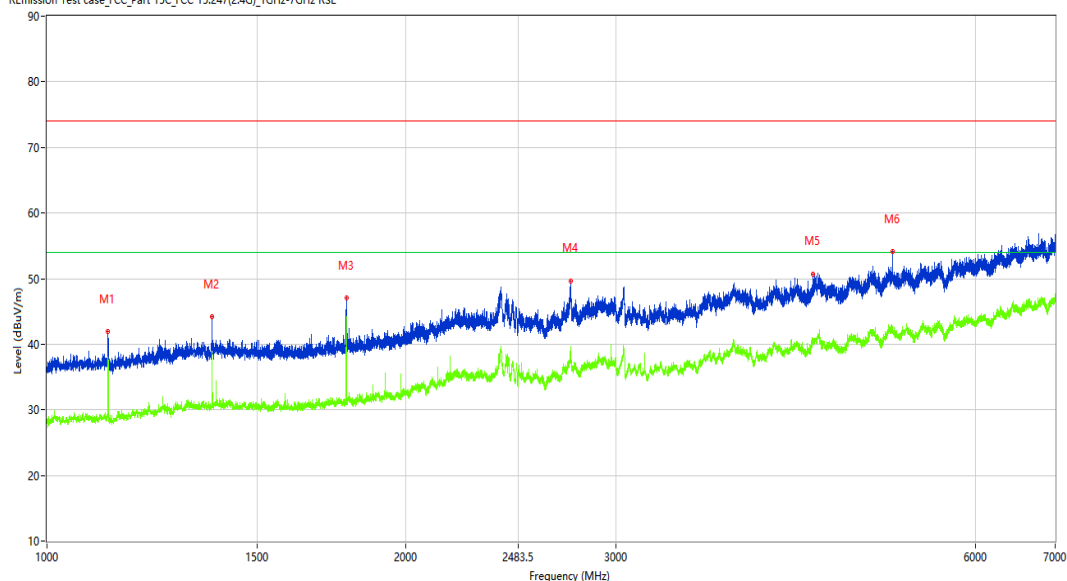

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.000	41.89	-15.14	74.0	32.11	Peak	19.00	150	Horizontal	Pass
1**	1125.000	37.27	-15.14	54.0	16.73	AV	19.00	150	Horizontal	Pass
2	1375.000	44.20	-13.49	74.0	29.80	Peak	19.00	150	Horizontal	Pass
2**	1375.000	38.44	-13.49	54.0	15.56	AV	19.00	150	Horizontal	Pass
3	1782.250	47.08	-12.90	74.0	26.92	Peak	129.50	150	Horizontal	Pass
3**	1782.250	44.15	-12.90	54.0	9.85	AV	129.50	150	Horizontal	Pass
4	2747.500	49.67	-6.02	74.0	24.33	Peak	284.70	150	Horizontal	Pass
4**	2747.500	39.28	-6.02	54.0	14.72	AV	284.70	150	Horizontal	Pass
5	4384.500	50.62	-1.85	74.0	23.38	Peak	105.60	150	Horizontal	Pass
5**	4384.500	40.07	-1.85	54.0	13.93	AV	105.60	150	Horizontal	Pass
6	5112.000	54.18	0.42	74.0	19.82	Peak	125.70	150	Horizontal	Pass
6**	5112.000	42.29	0.42	54.0	11.71	AV	125.70	150	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_16.02.01

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX

Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7841.500	28.43	0.92	74.0	45.57	Peak	126.90	100	Horizontal	Pass
1**	7841.500	18.02	0.92	54.0	35.98	AV	126.90	100	Horizontal	Pass
2	9832.500	31.21	3.08	74.0	42.79	Peak	325.20	100	Horizontal	Pass
2**	9832.500	19.72	3.08	54.0	34.28	AV	325.20	100	Horizontal	Pass
3	11991.250	34.73	4.49	74.0	39.27	Peak	202.00	100	Horizontal	Pass
3**	11991.250	24.03	4.49	54.0	29.97	AV	202.00	100	Horizontal	Pass
4	14807.250	42.11	11.78	74.0	31.89	Peak	359.60	100	Horizontal	Pass
4**	14807.250	33.02	11.78	54.0	20.98	AV	359.60	100	Horizontal	Pass
5	16935.750	47.61	14.33	74.0	26.39	Peak	0.40	100	Horizontal	Pass
5**	16935.750	37.45	14.33	54.0	16.55	AV	0.40	100	Horizontal	Pass
6	17675.500	51.05	17.10	74.0	22.95	Peak	360.00	100	Horizontal	Pass
6**	17675.500	39.89	17.10	54.0	14.11	AV	360.00	100	Horizontal	Pass

WIFI2.4G-B-Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-11_17.11.48

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

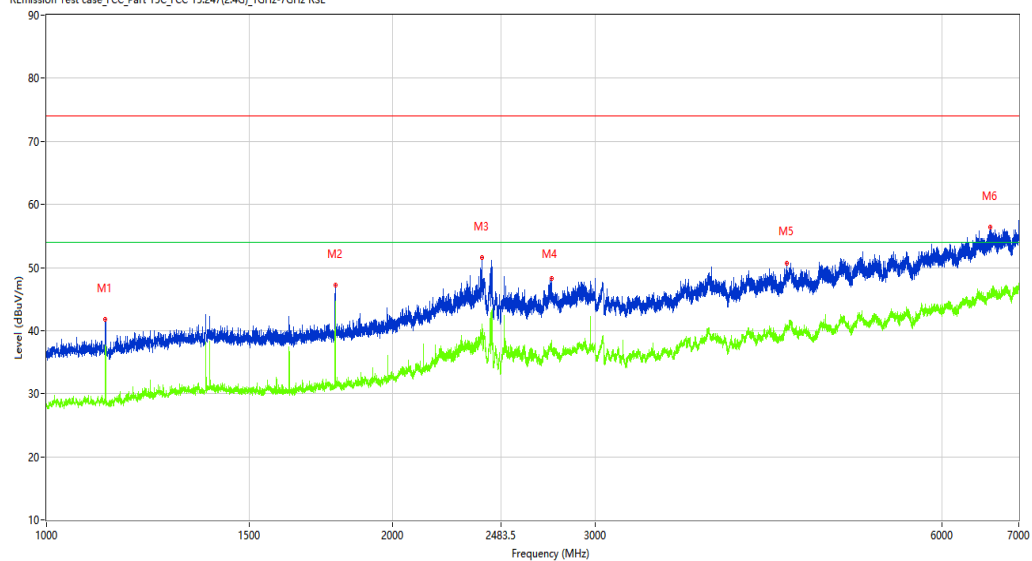

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1124.750	41.78	-15.14	74.0	32.22	Peak	278.80	100	Vertical	Pass
1**	1124.750	35.21	-15.14	54.0	18.79	AV	278.80	100	Vertical	Pass
2	1782.000	47.19	-12.89	74.0	26.81	Peak	298.50	100	Vertical	Pass
2**	1782.000	44.58	-12.89	54.0	9.42	AV	298.50	100	Vertical	Pass
3	2391.500	51.57	-5.51	74.0	22.43	Peak	278.80	100	Vertical	Pass
3**	2391.500	40.32	-5.51	54.0	13.68	AV	278.80	100	Vertical	Pass
4	2746.750	48.27	-6.06	74.0	25.73	Peak	262.40	100	Vertical	Pass
4**	2746.750	38.44	-6.06	54.0	15.56	AV	262.40	100	Vertical	Pass
5	4398.500	50.75	-1.59	74.0	23.25	Peak	104.10	100	Vertical	Pass
5**	4398.500	40.12	-1.59	54.0	13.88	AV	104.10	100	Vertical	Pass
6	6611.000	56.34	3.61	74.0	17.66	Peak	51.20	100	Vertical	Pass
6**	6611.000	45.68	3.61	54.0	8.32	AV	51.20	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_15.35.22

EUT Name: N.A

Manufacturer: N.A

Model: Cyber1

Temp.(oC): 23.1℃

Hum.: 45%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz

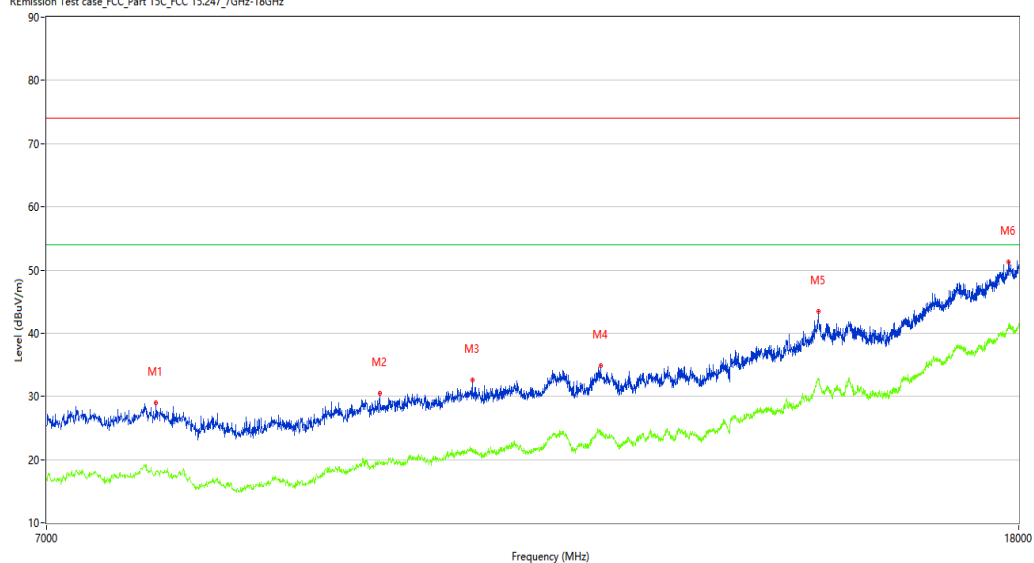

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7786.500	29.01	0.37	74.0	44.99	Peak	196.10	100	Vertical	Pass
1**	7786.500	17.85	0.37	54.0	36.15	AV	196.10	100	Vertical	Pass
2	9673.000	30.43	2.39	74.0	43.57	Peak	77.00	100	Vertical	Pass
2**	9673.000	19.59	2.39	54.0	34.41	AV	77.00	100	Vertical	Pass
3	10586.000	32.62	3.86	74.0	41.38	Peak	169.30	100	Vertical	Pass
3**	10586.000	21.27	3.86	54.0	32.73	AV	169.30	100	Vertical	Pass
4	11994.000	34.81	4.43	74.0	39.19	Peak	275.80	100	Vertical	Pass
4**	11994.000	24.01	4.43	54.0	29.99	AV	275.80	100	Vertical	Pass
5	14815.500	43.39	11.92	74.0	30.61	Peak	253.80	100	Vertical	Pass
5**	14815.500	32.65	11.92	54.0	21.35	AV	253.80	100	Vertical	Pass
6	17818.499	51.32	18.29	74.0	22.68	Peak	2.00	100	Vertical	Pass
6**	17818.499	40.70	18.29	54.0	13.30	AV	2.00	100	Vertical	Pass

WIFI2.4G-B-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_15.29.47

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

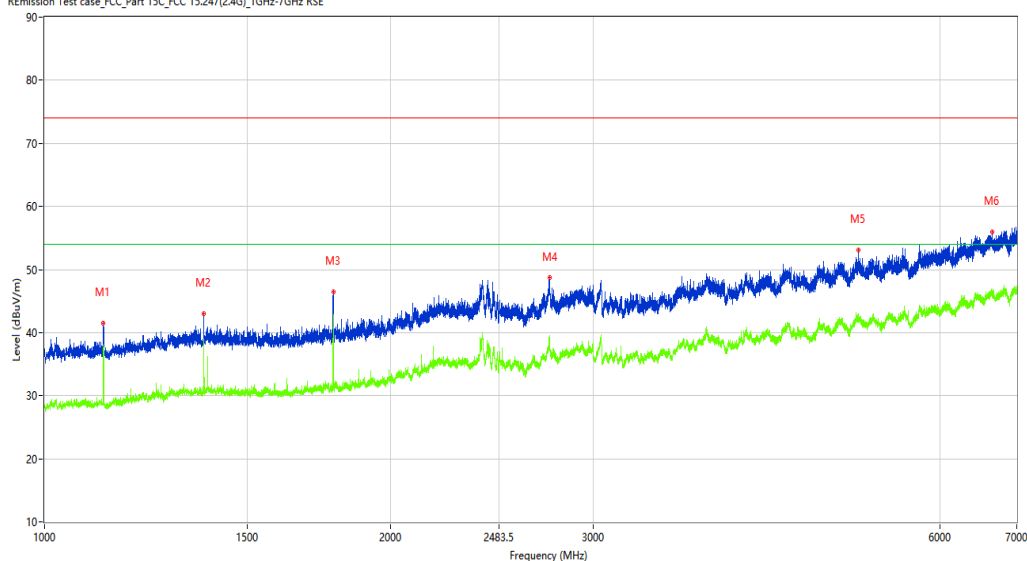

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.000	41.51	-15.14	74.0	32.49	Peak	15.30	150	Horizontal	Pass
1**	1125.000	37.28	-15.14	54.0	16.72	AV	15.30	150	Horizontal	Pass
2	1374.500	42.98	-13.49	74.0	31.02	Peak	32.30	150	Horizontal	Pass
2**	1374.500	33.90	-13.49	54.0	20.10	AV	32.30	150	Horizontal	Pass
3	1781.750	46.42	-12.90	74.0	27.58	Peak	91.60	150	Horizontal	Pass
3**	1781.750	40.69	-12.90	54.0	13.31	AV	91.60	150	Horizontal	Pass
4	2746.500	48.71	-6.07	74.0	25.29	Peak	155.40	150	Horizontal	Pass
4**	2746.500	38.98	-6.07	54.0	15.02	AV	155.40	150	Horizontal	Pass
5	5097.500	53.06	0.83	74.0	20.94	Peak	1.70	150	Horizontal	Pass
5**	5097.500	42.30	0.83	54.0	11.70	AV	1.70	150	Horizontal	Pass
6	6661.000	55.98	3.96	74.0	18.02	Peak	92.50	150	Horizontal	Pass
6**	6661.000	46.60	3.96	54.0	7.40	AV	92.50	150	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_16.24.09

EUT Name: N.A

Manufacturer: N.A

Model: Cyber1

Temp.(oC): 23.1℃

Hum.: 45%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz

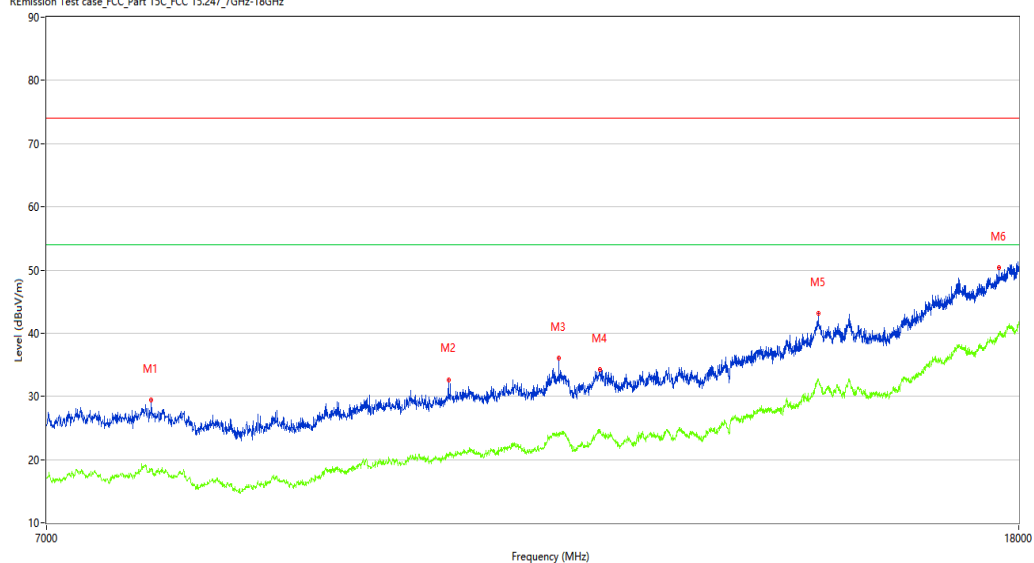

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7750.750	29.37	0.47	74.0	44.63	Peak	39.50	100	Horizontal	Pass
1**	7750.750	18.38	0.47	54.0	35.62	AV	39.50	100	Horizontal	Pass
2	10343.999	32.65	3.61	74.0	41.35	Peak	347.70	100	Horizontal	Pass
2**	10343.999	20.56	3.61	54.0	33.44	AV	347.70	100	Horizontal	Pass
3	11512.750	36.00	4.53	74.0	38.00	Peak	109.90	100	Horizontal	Pass
3**	11512.750	24.17	4.53	54.0	29.83	AV	109.90	100	Horizontal	Pass
4	11980.250	34.18	4.54	74.0	39.82	Peak	332.80	100	Horizontal	Pass
4**	11980.250	24.18	4.54	54.0	29.82	AV	332.80	100	Horizontal	Pass
5	14818.250	43.21	11.76	74.0	30.79	Peak	194.30	100	Horizontal	Pass
5**	14818.250	32.68	11.76	54.0	21.32	AV	194.30	100	Horizontal	Pass
6	17653.500	50.37	16.89	74.0	23.63	Peak	109.90	100	Horizontal	Pass
6**	17653.500	39.72	16.89	54.0	14.28	AV	109.90	100	Horizontal	Pass

WIFI2.4G-B-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-11_16.50.35

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

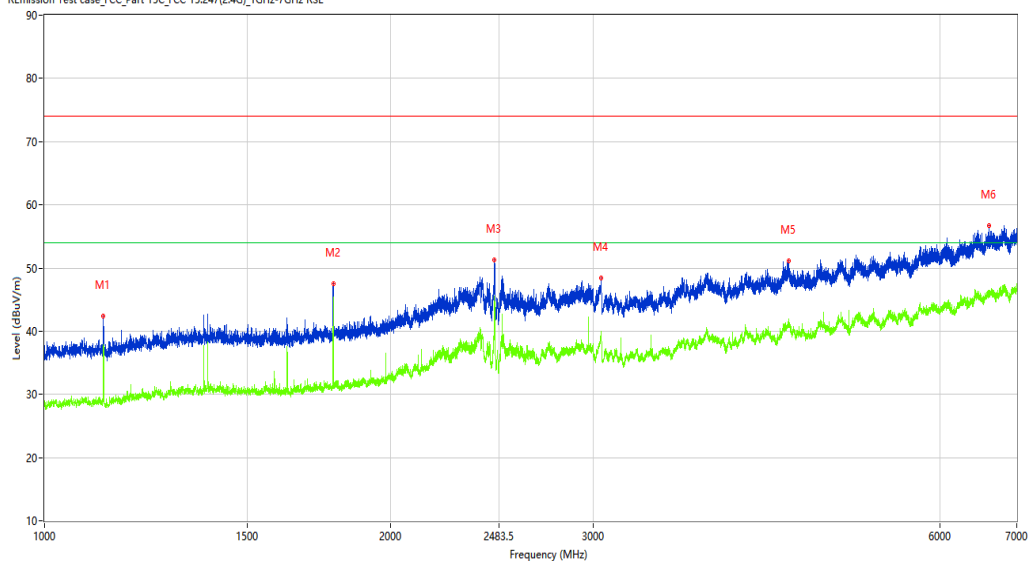

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.000	42.35	-15.14	74.0	31.65	Peak	287.60	100	Vertical	Pass
1**	1125.000	37.32	-15.14	54.0	16.68	AV	287.60	100	Vertical	Pass
2	1781.750	47.48	-12.90	74.0	26.52	Peak	282.10	100	Vertical	Pass
2**	1781.750	42.54	-12.90	54.0	11.46	AV	282.10	100	Vertical	Pass
3	2459.250	51.30	-6.62	74.0	22.70	Peak	301.80	100	Vertical	Pass
3**	2459.250	45.55	-6.62	54.0	8.45	AV	301.80	100	Vertical	Pass
4	3046.000	48.44	-2.34	74.0	25.56	Peak	122.60	100	Vertical	Pass
4**	3046.000	39.46	-2.34	54.0	14.54	AV	122.60	100	Vertical	Pass
5	4433.000	51.08	-1.48	74.0	22.92	Peak	204.90	100	Vertical	Pass
5**	4433.000	41.38	-1.48	54.0	12.62	AV	204.90	100	Vertical	Pass
6	6619.000	56.76	3.64	74.0	17.24	Peak	100.30	100	Vertical	Pass
6**	6619.000	45.45	3.64	54.0	8.55	AV	100.30	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_15.14.45

EUT Name: N.A

Manufacturer: N.A

Model: Cyber1

Temp.(oC): 23.1℃

Hum.: 45%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

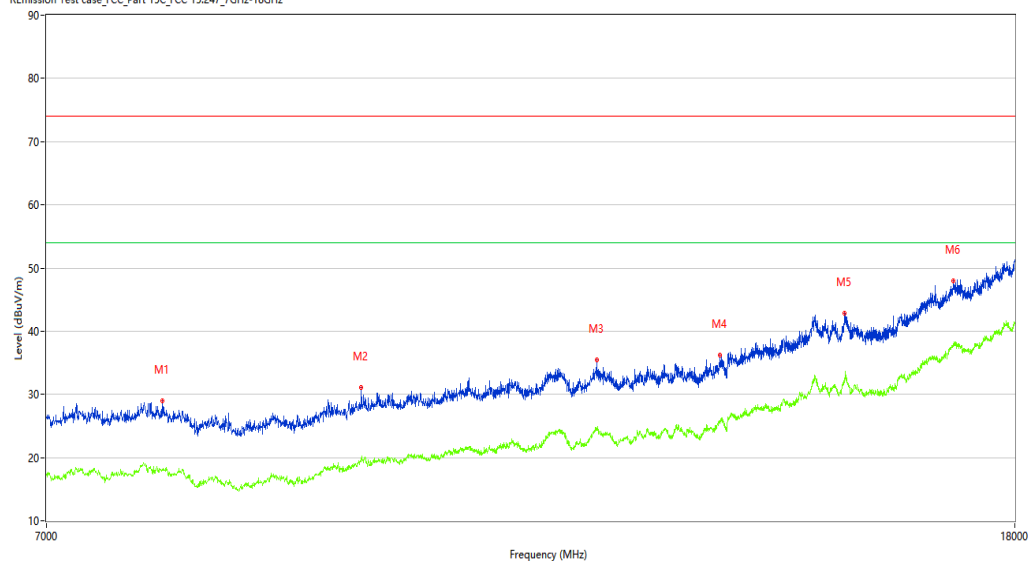

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7836.000	28.95	0.91	74.0	45.05	Peak	360.00	100	Vertical	Pass
1**	7836.000	18.04	0.91	54.0	35.96	AV	360.00	100	Vertical	Pass
2	9513.500	31.02	2.76	74.0	42.98	Peak	1.90	100	Vertical	Pass
2**	9513.500	19.79	2.76	54.0	34.21	AV	1.90	100	Vertical	Pass
3	11972.000	35.44	4.64	74.0	38.56	Peak	0.90	100	Vertical	Pass
3**	11972.000	24.57	4.64	54.0	29.43	AV	0.90	100	Vertical	Pass
4	13498.250	36.23	7.10	74.0	37.77	Peak	222.00	100	Vertical	Pass
4**	13498.250	25.41	7.10	54.0	28.59	AV	222.00	100	Vertical	Pass
5	15250.000	42.80	10.53	74.0	31.20	Peak	102.80	100	Vertical	Pass
5**	15250.000	32.28	10.53	54.0	21.72	AV	102.80	100	Vertical	Pass
6	16952.250	47.94	14.52	74.0	26.06	Peak	239.80	100	Vertical	Pass
6**	16952.250	37.96	14.52	54.0	16.04	AV	239.80	100	Vertical	Pass

WIFI2.4G-G-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_15.01.14

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

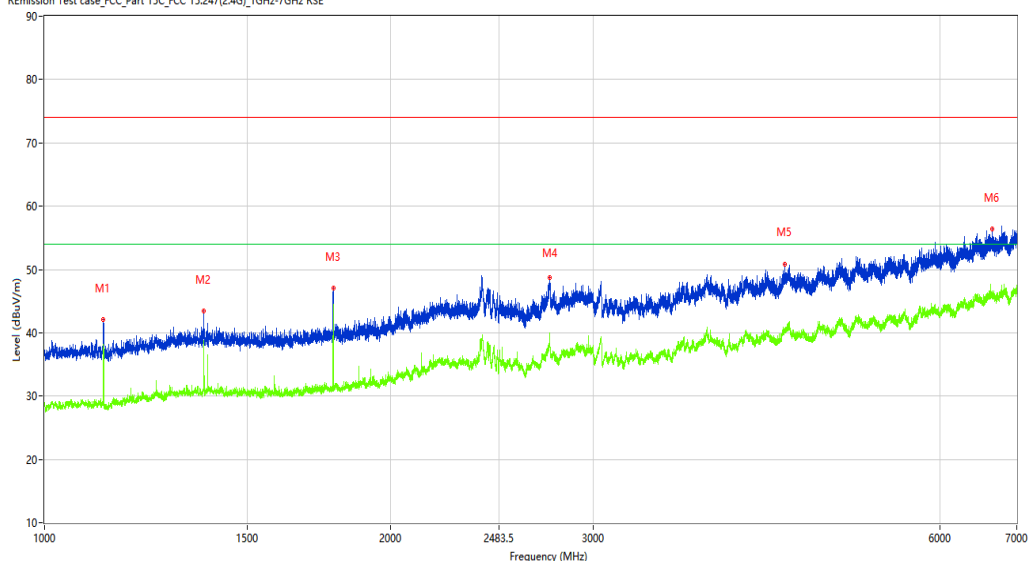

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.250	42.04	-15.15	74.0	31.96	Peak	360.00	150	Horizontal	Pass
1**	1125.250	38.25	-15.15	54.0	15.75	AV	360.00	150	Horizontal	Pass
2	1375.250	43.48	-13.49	74.0	30.52	Peak	21.20	150	Horizontal	Pass
2**	1375.250	38.81	-13.49	54.0	15.19	AV	21.20	150	Horizontal	Pass
3	1782.250	47.05	-12.90	74.0	26.95	Peak	133.00	150	Horizontal	Pass
3**	1782.250	44.53	-12.90	54.0	9.47	AV	133.00	150	Horizontal	Pass
4	2746.750	48.75	-6.06	74.0	25.25	Peak	358.60	150	Horizontal	Pass
4**	2746.750	38.81	-6.06	54.0	15.19	AV	358.60	150	Horizontal	Pass
5	4402.000	50.75	-1.47	74.0	23.25	Peak	345.90	150	Horizontal	Pass
5**	4402.000	40.28	-1.47	54.0	13.72	AV	345.90	150	Horizontal	Pass
6	6662.500	56.42	3.87	74.0	17.58	Peak	323.60	150	Horizontal	Pass
6**	6662.500	45.52	3.87	54.0	8.48	AV	323.60	150	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_15.54.36

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz

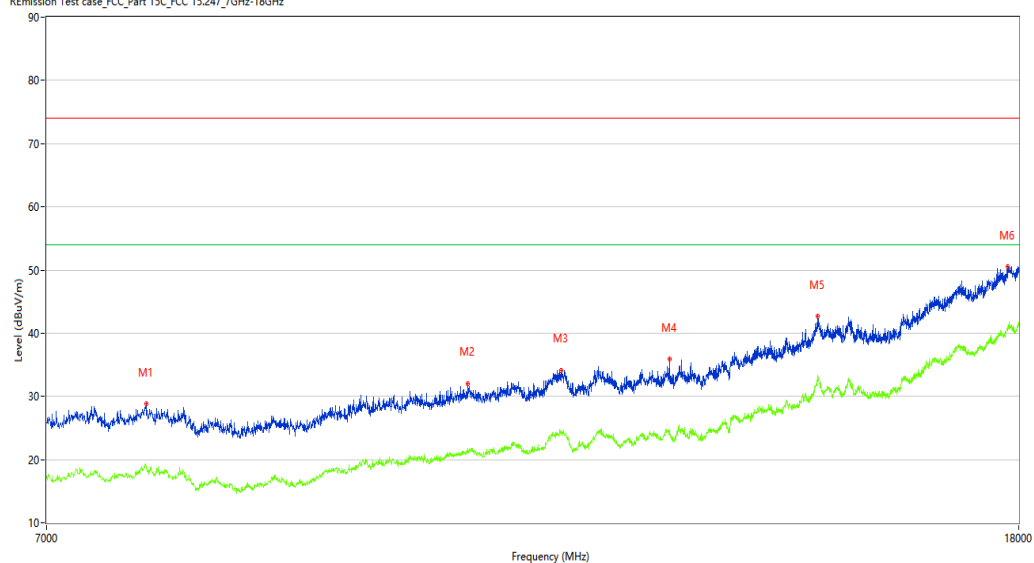

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7712.250	28.79	0.55	74.0	45.21	Peak	78.20	100	Horizontal	Pass
1**	7712.250	18.47	0.55	54.0	35.53	AV	78.20	100	Horizontal	Pass
2	10539.250	32.05	3.97	74.0	41.95	Peak	25.70	100	Horizontal	Pass
2**	10539.250	21.69	3.97	54.0	32.31	AV	25.70	100	Horizontal	Pass
3	11540.250	34.17	4.80	74.0	39.83	Peak	323.80	100	Horizontal	Pass
3**	11540.250	24.22	4.80	54.0	29.78	AV	323.80	100	Horizontal	Pass
4	12819.000	35.90	5.63	74.0	38.10	Peak	178.70	100	Horizontal	Pass
4**	12819.000	24.12	5.63	54.0	29.88	AV	178.70	100	Horizontal	Pass
5	14804.500	42.63	11.83	74.0	31.37	Peak	267.30	100	Horizontal	Pass
5**	14804.500	32.62	11.83	54.0	21.38	AV	267.30	100	Horizontal	Pass
6	17804.751	50.47	17.94	74.0	23.53	Peak	126.20	100	Horizontal	Pass
6**	17804.751	40.38	17.94	54.0	13.62	AV	126.20	100	Horizontal	Pass

WIFI2.4G-G-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-11_17.02.57

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

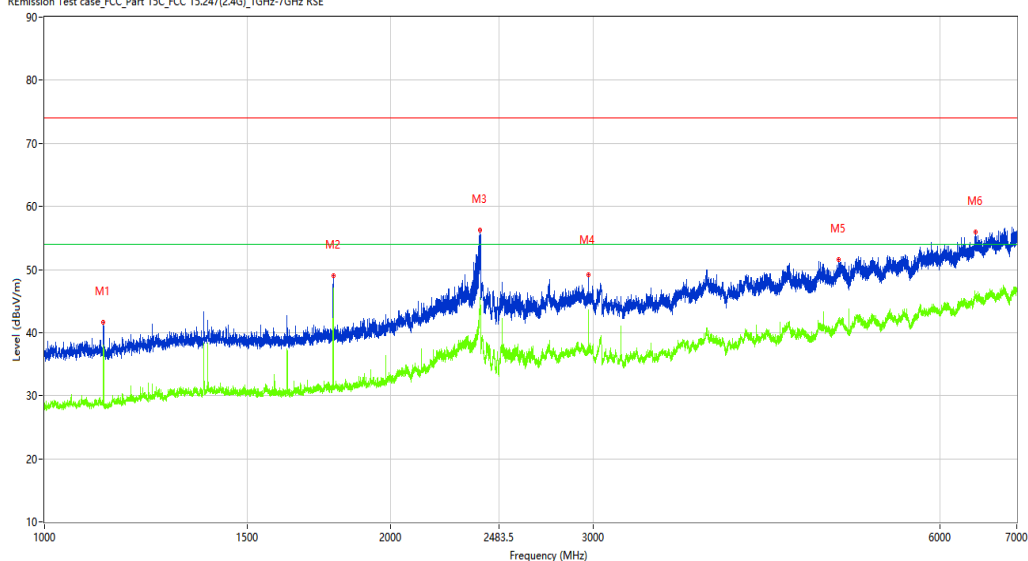

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.000	41.61	-15.14	74.0	32.39	Peak	277.60	100	Vertical	Pass
1**	1125.000	37.20	-15.14	54.0	16.80	AV	277.60	100	Vertical	Pass
2	1782.250	49.02	-12.90	74.0	24.98	Peak	55.50	100	Vertical	Pass
2**	1782.250	47.13	-12.90	54.0	6.87	AV	55.50	100	Vertical	Pass
3	2391.500	56.21	-5.51	74.0	17.79	Peak	279.80	100	Vertical	Pass
3**	2391.500	45.55	-5.51	54.0	8.45	AV	279.80	100	Vertical	Pass
4	2970.000	49.14	-4.44	74.0	24.86	Peak	313.80	100	Vertical	Pass
4**	2970.000	42.88	-4.44	54.0	11.12	AV	313.80	100	Vertical	Pass
5	4901.500	51.58	-0.05	74.0	22.42	Peak	116.40	100	Vertical	Pass
5**	4901.500	41.72	-0.05	54.0	12.28	AV	116.40	100	Vertical	Pass
6	6442.000	55.96	3.17	74.0	18.04	Peak	47.90	100	Vertical	Pass
6**	6442.000	45.40	3.17	54.0	8.60	AV	47.90	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_15.45.05

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX

Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7838.750	28.74	0.94	74.0	45.26	Peak	287.50	100	Vertical	Pass
1**	7838.750	18.20	0.94	54.0	35.80	AV	287.50	100	Vertical	Pass
2	9546.500	30.41	2.90	74.0	43.59	Peak	186.30	100	Vertical	Pass
2**	9546.500	19.79	2.90	54.0	34.21	AV	186.30	100	Vertical	Pass
3	11441.250	34.23	4.85	74.0	39.77	Peak	349.30	100	Vertical	Pass
3**	11441.250	23.85	4.85	54.0	30.15	AV	349.30	100	Vertical	Pass
4	12799.750	36.39	5.87	74.0	37.61	Peak	0.00	100	Vertical	Pass
4**	12799.750	24.35	5.87	54.0	29.65	AV	0.00	100	Vertical	Pass
5	14810.000	42.36	11.98	74.0	31.64	Peak	274.50	100	Vertical	Pass
5**	14810.000	33.51	11.98	54.0	20.49	AV	274.50	100	Vertical	Pass
6	17810.250	50.79	18.09	74.0	23.21	Peak	278.90	100	Vertical	Pass
6**	17810.250	40.88	18.09	54.0	13.12	AV	278.90	100	Vertical	Pass

WIFI2.4G-G-Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_15.14.08

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

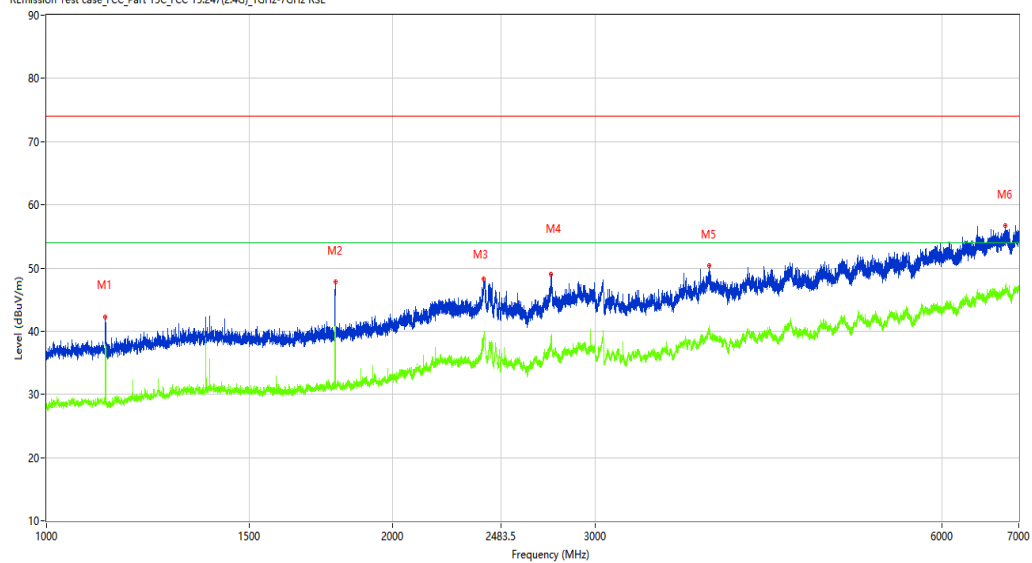

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.250	42.29	-15.15	74.0	31.71	Peak	35.70	150	Horizontal	Pass
1**	1125.250	37.86	-15.15	54.0	16.14	AV	35.70	150	Horizontal	Pass
2	1782.000	47.78	-12.89	74.0	26.22	Peak	75.80	150	Horizontal	Pass
2**	1782.000	44.68	-12.89	54.0	9.32	AV	75.80	150	Horizontal	Pass
3	2399.750	48.24	-4.78	74.0	25.76	Peak	357.00	150	Horizontal	Pass
3**	2399.750	38.79	-4.78	54.0	15.21	AV	357.00	150	Horizontal	Pass
4	2745.500	48.95	-6.12	74.0	25.05	Peak	95.90	150	Horizontal	Pass
4**	2745.500	38.23	-6.12	54.0	15.77	AV	95.90	150	Horizontal	Pass
5	3768.500	50.33	-2.43	74.0	23.67	Peak	357.10	150	Horizontal	Pass
5**	3768.500	40.39	-2.43	54.0	13.61	AV	357.10	150	Horizontal	Pass
6	6818.500	56.65	4.32	74.0	17.35	Peak	203.00	150	Horizontal	Pass
6**	6818.500	46.37	4.32	54.0	7.63	AV	203.00	150	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_16.05.34

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

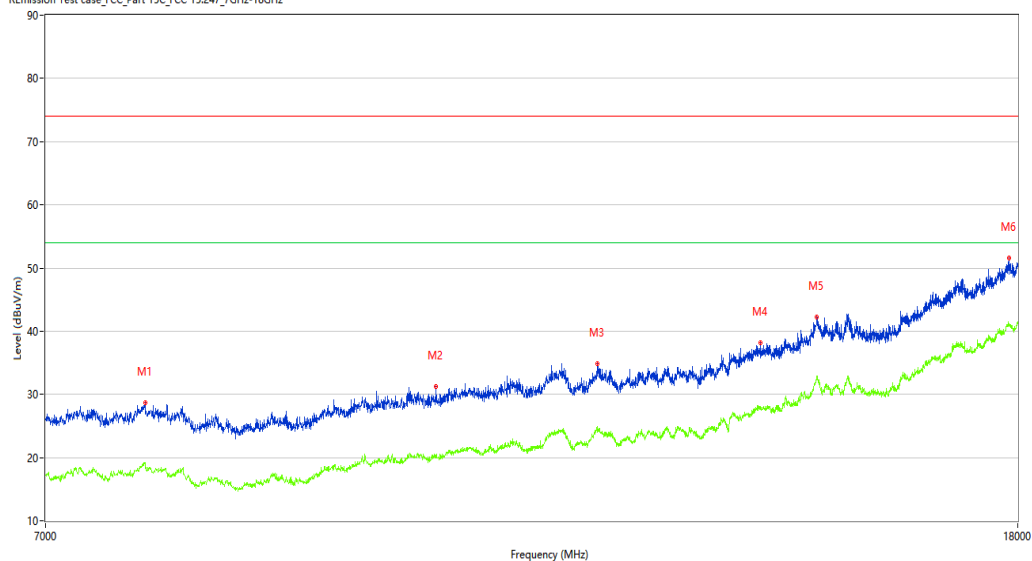

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7709.500	28.67	0.82	74.0	45.33	Peak	279.20	100	Horizontal	Pass
1**	7709.500	19.18	0.82	54.0	34.82	AV	279.20	100	Horizontal	Pass
2	10231.250	31.28	3.09	74.0	42.72	Peak	209.10	100	Horizontal	Pass
2**	10231.250	19.87	3.09	54.0	34.13	AV	209.10	100	Horizontal	Pass
3	11961.000	34.80	4.84	74.0	39.20	Peak	279.20	100	Horizontal	Pass
3**	11961.000	24.08	4.84	54.0	29.92	AV	279.20	100	Horizontal	Pass
4	14015.250	38.19	7.91	74.0	35.81	Peak	353.20	100	Horizontal	Pass
4**	14015.250	27.63	7.91	54.0	26.37	AV	353.20	100	Horizontal	Pass
5	14807.250	42.24	11.78	74.0	31.76	Peak	0.70	100	Horizontal	Pass
5**	14807.250	32.28	11.78	54.0	21.72	AV	0.70	100	Horizontal	Pass
6	17848.750	51.51	18.72	74.0	22.49	Peak	16.50	100	Horizontal	Pass
6**	17848.750	41.18	18.72	54.0	12.82	AV	16.50	100	Horizontal	Pass

WIFI2.4G-G-Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-11_17.14.38

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

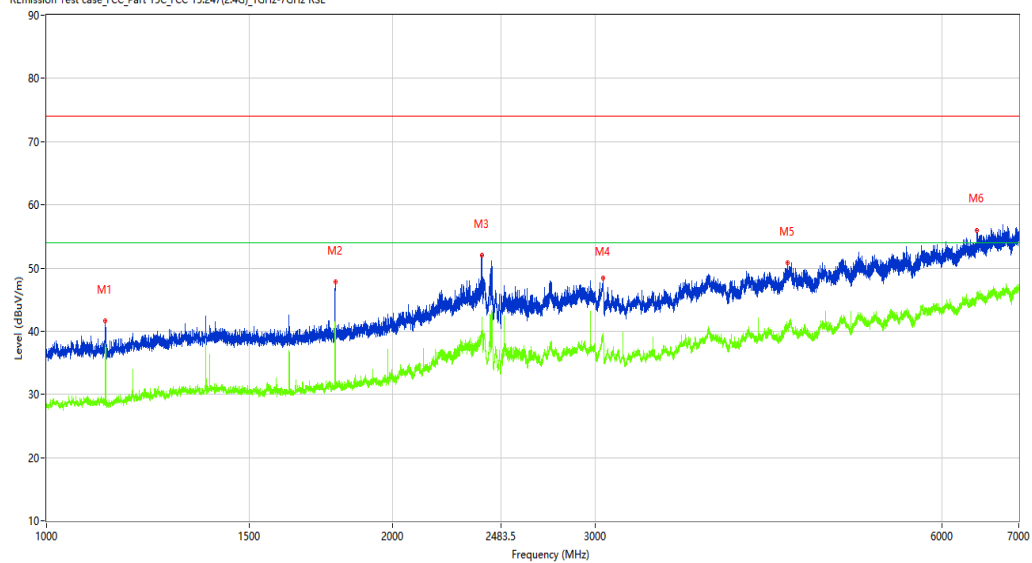

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1124.750	41.59	-15.14	74.0	32.41	Peak	286.60	100	Vertical	Pass
1**	1124.750	35.25	-15.14	54.0	18.75	AV	286.60	100	Vertical	Pass
2	1782.000	47.83	-12.89	74.0	26.17	Peak	278.40	100	Vertical	Pass
2**	1782.000	45.04	-12.89	54.0	8.96	AV	278.40	100	Vertical	Pass
3	2390.750	52.05	-6.37	74.0	21.95	Peak	295.20	100	Vertical	Pass
3**	2390.750	39.61	-6.37	54.0	14.39	AV	295.20	100	Vertical	Pass
4	3046.500	48.42	-2.25	74.0	25.58	Peak	0.00	100	Vertical	Pass
4**	3046.500	39.13	-2.25	54.0	14.87	AV	0.00	100	Vertical	Pass
5	4404.000	50.79	-1.44	74.0	23.21	Peak	316.90	100	Vertical	Pass
5**	4404.000	40.67	-1.44	54.0	13.33	AV	316.90	100	Vertical	Pass
6	6441.000	55.98	3.21	74.0	18.02	Peak	343.30	100	Vertical	Pass
6**	6441.000	45.76	3.21	54.0	8.24	AV	343.30	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_15.33.22

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz

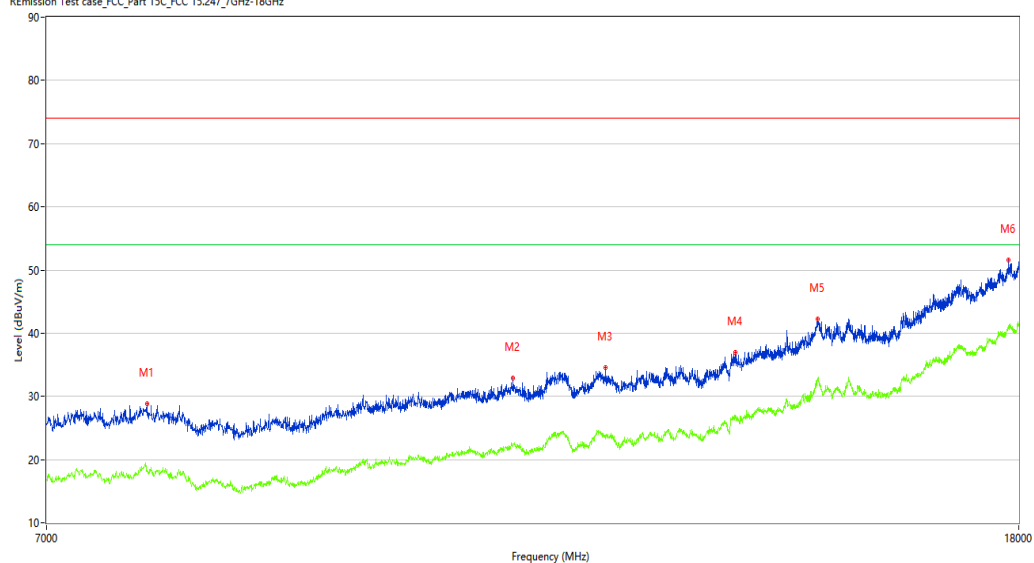

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7717.750	28.76	0.19	74.0	45.24	Peak	307.40	100	Vertical	Pass
1**	7717.750	18.21	0.19	54.0	35.79	AV	307.40	100	Vertical	Pass
2	11012.250	32.95	4.13	74.0	41.05	Peak	163.70	100	Vertical	Pass
2**	11012.250	22.21	4.13	54.0	31.79	AV	163.70	100	Vertical	Pass
3	12051.750	34.54	4.25	74.0	39.46	Peak	329.30	100	Vertical	Pass
3**	12051.750	23.62	4.25	54.0	30.38	AV	329.30	100	Vertical	Pass
4	13666.000	36.90	7.31	74.0	37.10	Peak	357.30	100	Vertical	Pass
4**	13666.000	27.01	7.31	54.0	26.99	AV	357.30	100	Vertical	Pass
5	14810.000	42.19	11.98	74.0	31.81	Peak	231.50	100	Vertical	Pass
5**	14810.000	32.85	11.98	54.0	21.15	AV	231.50	100	Vertical	Pass
6	17826.750	51.60	18.38	74.0	22.40	Peak	333.40	100	Vertical	Pass
6**	17826.750	40.98	18.38	54.0	13.02	AV	333.40	100	Vertical	Pass

WIFI2.4G-G-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_15.34.06

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

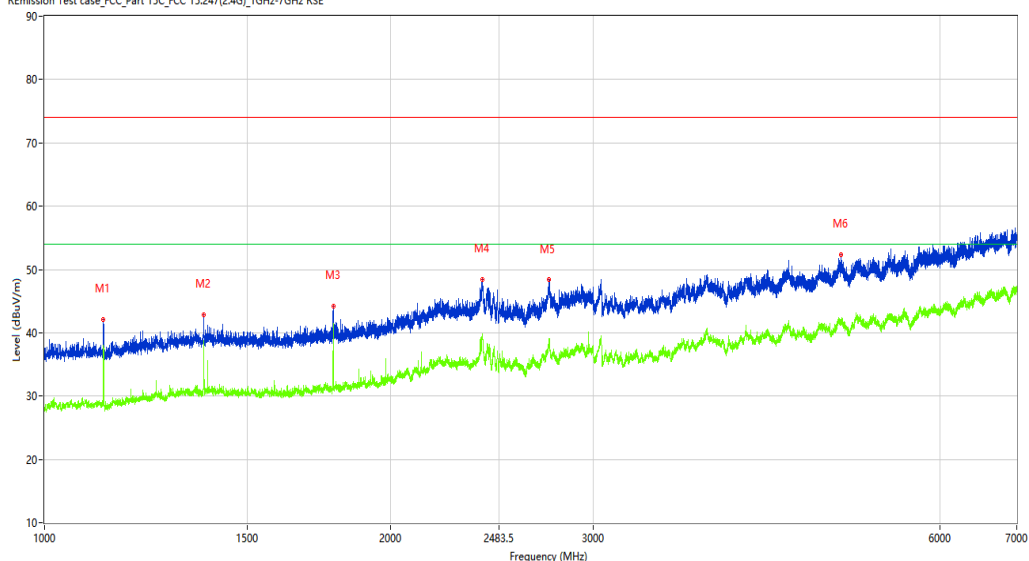

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1124.750	42.08	-15.14	74.0	31.92	Peak	13.80	150	Horizontal	Pass
1**	1124.750	35.69	-15.14	54.0	18.31	AV	13.80	150	Horizontal	Pass
2	1375.000	42.84	-13.49	74.0	31.16	Peak	22.00	150	Horizontal	Pass
2**	1375.000	38.11	-13.49	54.0	15.89	AV	22.00	150	Horizontal	Pass
3	1782.000	44.18	-12.89	74.0	29.82	Peak	94.40	150	Horizontal	Pass
3**	1782.000	40.87	-12.89	54.0	13.13	AV	94.40	150	Horizontal	Pass
4	2401.000	48.42	-4.78	74.0	25.58	Peak	258.00	150	Horizontal	Pass
4**	2401.000	39.06	-4.78	54.0	14.94	AV	258.00	150	Horizontal	Pass
5	2746.000	48.35	-6.09	74.0	25.65	Peak	193.40	150	Horizontal	Pass
5**	2746.000	38.07	-6.09	54.0	15.93	AV	193.40	150	Horizontal	Pass
6	4926.000	52.33	-0.07	74.0	21.67	Peak	254.10	150	Horizontal	Pass
6**	4926.000	41.41	-0.07	54.0	12.59	AV	254.10	150	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_16.27.49

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

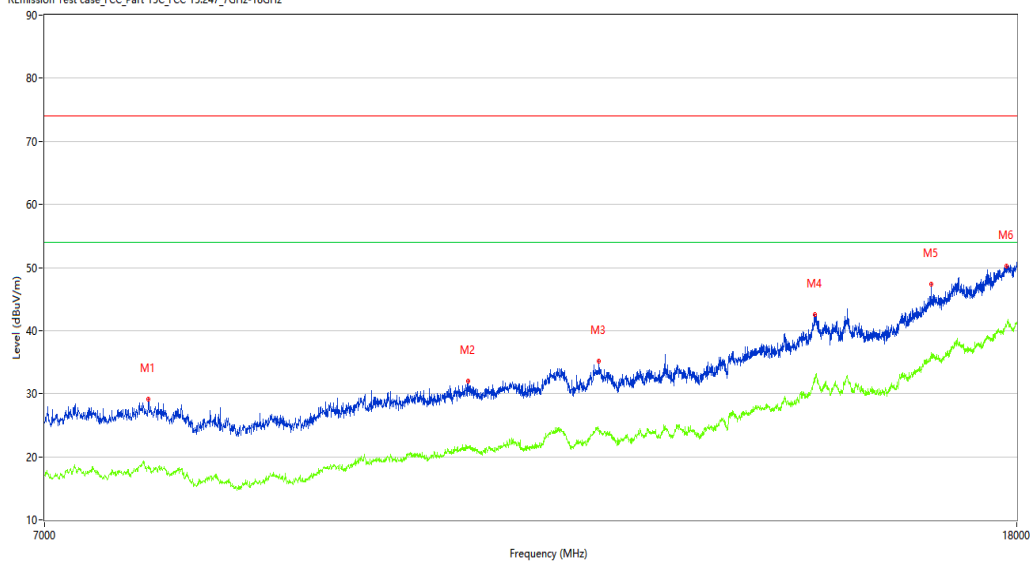

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7742.500	29.12	0.41	74.0	44.88	Peak	64.80	100	Horizontal	Pass
1**	7742.500	18.57	0.41	54.0	35.43	AV	64.80	100	Horizontal	Pass
2	10566.750	31.93	4.05	74.0	42.07	Peak	192.00	100	Horizontal	Pass
2**	10566.750	21.46	4.05	54.0	32.54	AV	192.00	100	Horizontal	Pass
3	11996.750	35.15	4.35	74.0	38.85	Peak	6.80	100	Horizontal	Pass
3**	11996.750	24.09	4.35	54.0	29.91	AV	6.80	100	Horizontal	Pass
4	14790.750	42.51	11.13	74.0	31.49	Peak	265.70	100	Horizontal	Pass
4**	14790.750	31.88	11.13	54.0	22.12	AV	265.70	100	Horizontal	Pass
5	16561.750	47.34	11.87	74.0	26.66	Peak	353.10	100	Horizontal	Pass
5**	16561.750	35.73	11.87	54.0	18.27	AV	353.10	100	Horizontal	Pass
6	17815.751	50.23	18.25	74.0	23.77	Peak	252.70	100	Horizontal	Pass
6**	17815.751	40.61	18.25	54.0	13.39	AV	252.70	100	Horizontal	Pass

WIFI2.4G-G-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-11_17:34:55

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

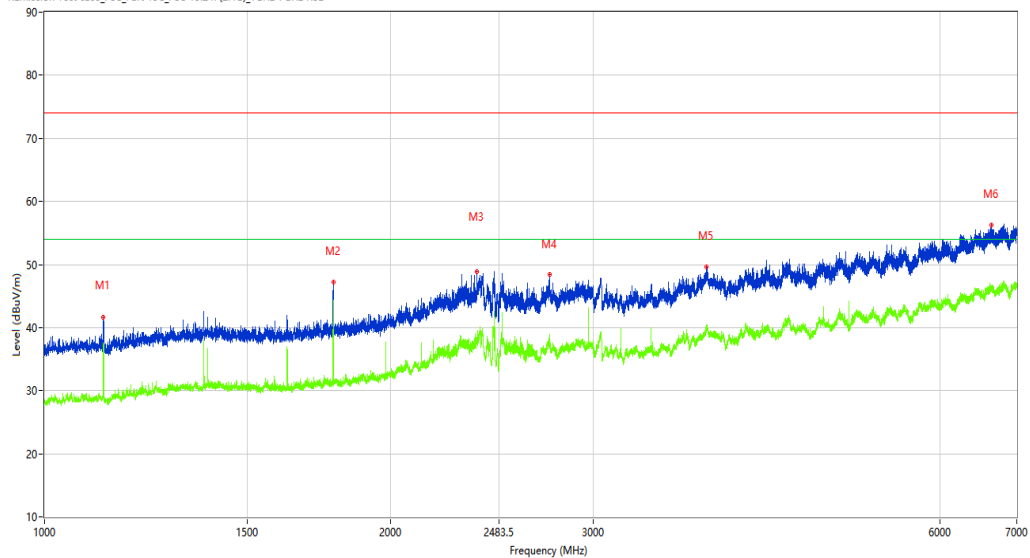

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.000	41.71	-15.14	74.0	32.29	Peak	281.40	100	Vertical	Pass
1**	1125.000	37.08	-15.14	54.0	16.92	AV	281.40	100	Vertical	Pass
2	1782.000	47.20	-12.89	74.0	26.80	Peak	28.40	100	Vertical	Pass
2**	1782.000	43.70	-12.89	54.0	10.30	AV	28.40	100	Vertical	Pass
3	2376.000	48.82	-8.21	74.0	25.18	Peak	293.00	100	Vertical	Pass
3**	2376.000	38.01	-8.21	54.0	15.99	AV	293.00	100	Vertical	Pass
4	2746.500	48.35	-6.07	74.0	25.65	Peak	14.20	100	Vertical	Pass
4**	2746.500	38.84	-6.07	54.0	15.16	AV	14.20	100	Vertical	Pass
5	3763.000	49.61	-2.36	74.0	24.39	Peak	46.40	100	Vertical	Pass
5**	3763.000	39.62	-2.36	54.0	14.38	AV	46.40	100	Vertical	Pass
6	6657.500	56.18	3.99	74.0	17.82	Peak	33.00	100	Vertical	Pass
6**	6657.500	46.27	3.99	54.0	7.73	AV	33.00	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_15.12.25

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX

Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7684.750	28.39	0.76	74.0	45.61	Peak	135.50	100	Vertical	Pass
1**	7684.750	18.96	0.76	54.0	35.04	AV	135.50	100	Vertical	Pass
2	9337.500	28.91	1.52	74.0	45.09	Peak	218.50	100	Vertical	Pass
2**	9337.500	18.51	1.52	54.0	35.49	AV	218.50	100	Vertical	Pass
3	10610.750	31.99	3.61	74.0	42.01	Peak	64.70	100	Vertical	Pass
3**	10610.750	21.00	3.61	54.0	33.00	AV	64.70	100	Vertical	Pass
4	11559.500	34.91	4.92	74.0	39.09	Peak	358.10	100	Vertical	Pass
4**	11559.500	24.04	4.92	54.0	29.96	AV	358.10	100	Vertical	Pass
5	14810.000	43.09	11.98	74.0	30.91	Peak	99.70	100	Vertical	Pass
5**	14810.000	32.63	11.98	54.0	21.37	AV	99.70	100	Vertical	Pass
6	17862.500	51.86	18.46	74.0	22.14	Peak	47.60	100	Vertical	Pass
6**	17862.500	40.96	18.46	54.0	13.04	AV	47.60	100	Vertical	Pass

WIFI2.4G-N20-Low channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_15.03.45

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

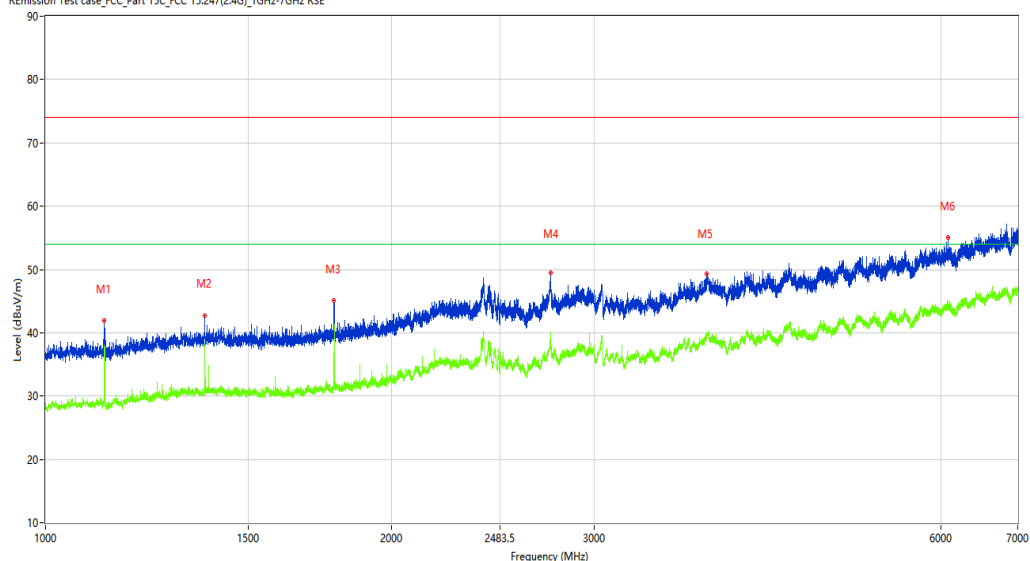

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1124.750	41.88	-15.14	74.0	32.12	Peak	0.80	150	Horizontal	Pass
1**	1124.750	35.46	-15.14	54.0	18.54	AV	0.80	150	Horizontal	Pass
2	1375.250	42.75	-13.49	74.0	31.25	Peak	11.20	150	Horizontal	Pass
2**	1375.250	38.40	-13.49	54.0	15.60	AV	11.20	150	Horizontal	Pass
3	1781.500	45.07	-12.90	74.0	28.93	Peak	4.00	150	Horizontal	Pass
3**	1781.500	35.41	-12.90	54.0	18.59	AV	4.00	150	Horizontal	Pass
4	2747.000	49.45	-6.04	74.0	24.55	Peak	70.20	150	Horizontal	Pass
4**	2747.000	39.53	-6.04	54.0	14.47	AV	70.20	150	Horizontal	Pass
5	3757.000	49.35	-2.39	74.0	24.65	Peak	242.50	150	Horizontal	Pass
5**	3757.000	39.86	-2.39	54.0	14.14	AV	242.50	150	Horizontal	Pass
6	6085.000	55.02	2.14	74.0	18.98	Peak	309.10	150	Horizontal	Pass
6**	6085.000	43.75	2.14	54.0	10.25	AV	309.10	150	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_15.56.02

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX

Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7723.250	29.68	0.06	74.0	44.32	Peak	46.60	100	Horizontal	Pass
1**	7723.250	18.17	0.06	54.0	35.83	AV	46.60	100	Horizontal	Pass
2	10470.500	31.61	3.59	74.0	42.39	Peak	82.30	100	Horizontal	Pass
2**	10470.500	20.57	3.59	54.0	33.43	AV	82.30	100	Horizontal	Pass
3	11567.750	34.70	4.96	74.0	39.30	Peak	1.00	100	Horizontal	Pass
3**	11567.750	23.99	4.96	54.0	30.01	AV	1.00	100	Horizontal	Pass
4	14804.500	42.97	11.83	74.0	31.03	Peak	20.20	100	Horizontal	Pass
4**	14804.500	32.60	11.83	54.0	21.40	AV	20.20	100	Horizontal	Pass
5	16990.750	49.49	14.73	74.0	24.51	Peak	46.60	100	Horizontal	Pass
5**	16990.750	38.18	14.73	54.0	15.82	AV	46.60	100	Horizontal	Pass
6	17837.750	52.15	18.50	74.0	21.85	Peak	73.00	100	Horizontal	Pass
6**	17837.750	41.57	18.50	54.0	12.43	AV	73.00	100	Horizontal	Pass

WIFI2.4G-N20-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-11_17.06.44

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

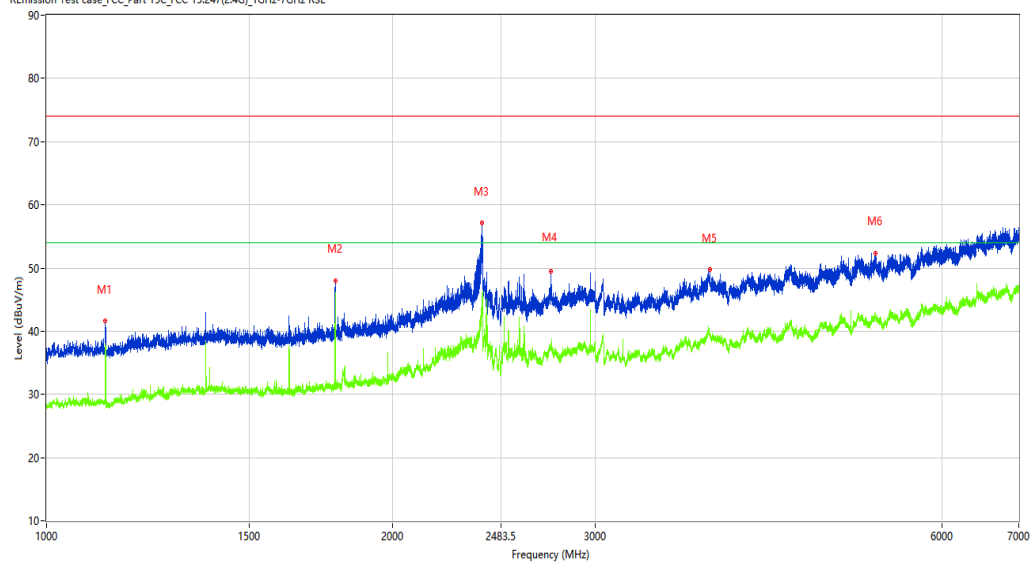

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.000	41.68	-15.14	74.0	32.32	Peak	233.30	100	Vertical	Pass
1**	1125.000	37.20	-15.14	54.0	16.80	AV	233.30	100	Vertical	Pass
2	1781.750	48.01	-12.90	74.0	25.99	Peak	261.60	100	Vertical	Pass
2**	1781.750	42.87	-12.90	54.0	11.13	AV	261.60	100	Vertical	Pass
3	2390.500	57.11	-6.46	74.0	16.89	Peak	293.20	100	Vertical	Pass
3**	2390.500	42.96	-6.46	54.0	11.04	AV	293.20	100	Vertical	Pass
4	2743.500	49.45	-6.18	74.0	24.55	Peak	284.70	100	Vertical	Pass
4**	2743.500	37.40	-6.18	54.0	16.60	AV	284.70	100	Vertical	Pass
5	3774.000	49.74	-2.52	74.0	24.26	Peak	315.00	100	Vertical	Pass
5**	3774.000	39.62	-2.52	54.0	14.38	AV	315.00	100	Vertical	Pass
6	5255.000	52.39	0.32	74.0	21.61	Peak	47.50	100	Vertical	Pass
6**	5255.000	42.54	0.32	54.0	11.46	AV	47.50	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_15.40.10

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

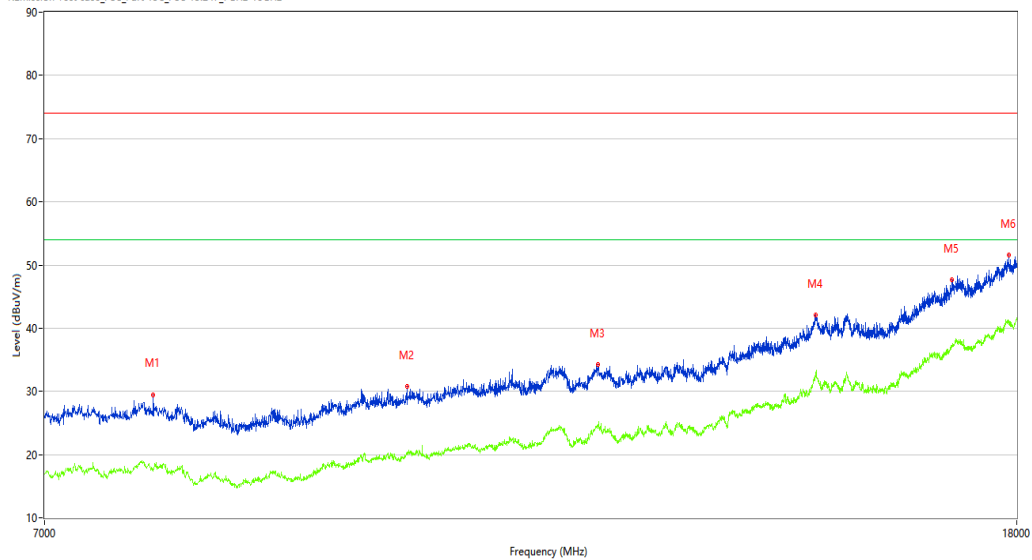

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7778.250	29.49	-0.05	74.0	44.51	Peak	129.50	100	Vertical	Pass
1**	7778.250	17.37	-0.05	54.0	36.63	AV	129.50	100	Vertical	Pass
2	9953.500	30.73	3.41	74.0	43.27	Peak	230.40	100	Vertical	Pass
2**	9953.500	20.03	3.41	54.0	33.97	AV	230.40	100	Vertical	Pass
3	11983.000	34.25	4.66	74.0	39.75	Peak	296.70	100	Vertical	Pass
3**	11983.000	24.51	4.66	54.0	29.49	AV	296.70	100	Vertical	Pass
4	14810.000	42.02	11.98	74.0	31.98	Peak	216.90	100	Vertical	Pass
4**	14810.000	32.90	11.98	54.0	21.10	AV	216.90	100	Vertical	Pass
5	16905.500	47.70	14.18	74.0	26.30	Peak	279.20	100	Vertical	Pass
5**	16905.500	37.33	14.18	54.0	16.67	AV	279.20	100	Vertical	Pass
6	17859.750	51.56	18.55	74.0	22.44	Peak	349.90	100	Vertical	Pass
6**	17859.750	40.91	18.55	54.0	13.09	AV	349.90	100	Vertical	Pass

WIFI2.4G-N20-Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_15.20.11

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

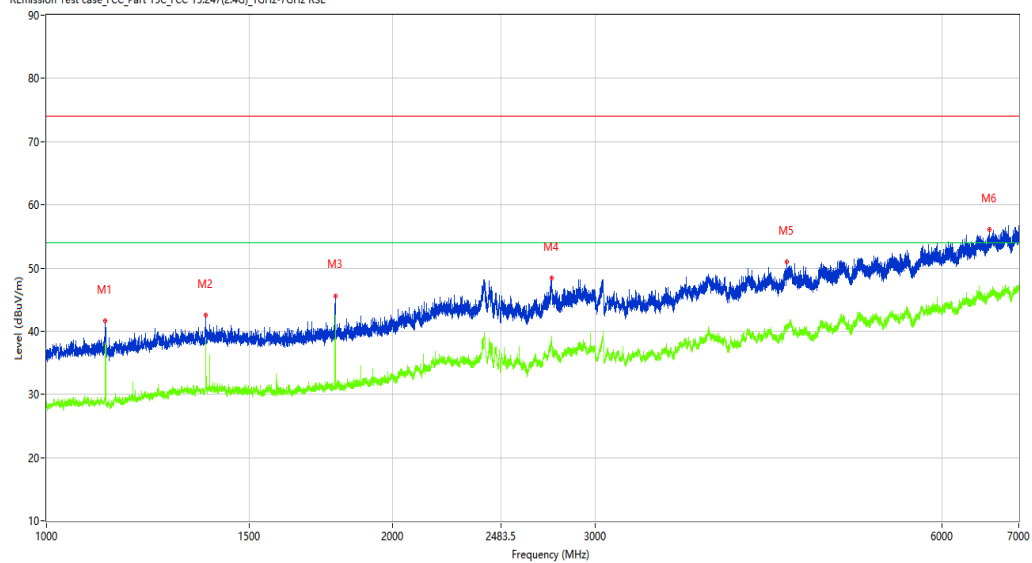

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1124.750	41.57	-15.14	74.0	32.43	Peak	11.20	150	Horizontal	Pass
1**	1124.750	35.47	-15.14	54.0	18.53	AV	11.20	150	Horizontal	Pass
2	1375.000	42.53	-13.49	74.0	31.47	Peak	152.50	150	Horizontal	Pass
2**	1375.000	38.26	-13.49	54.0	15.74	AV	152.50	150	Horizontal	Pass
3	1782.250	45.60	-12.90	74.0	28.40	Peak	196.00	150	Horizontal	Pass
3**	1782.250	42.49	-12.90	54.0	11.51	AV	196.00	150	Horizontal	Pass
4	2746.250	48.38	-6.08	74.0	25.62	Peak	8.20	150	Horizontal	Pass
4**	2746.250	37.97	-6.08	54.0	16.03	AV	8.20	150	Horizontal	Pass
5	4399.000	50.90	-1.57	74.0	23.10	Peak	41.50	150	Horizontal	Pass
5**	4399.000	40.59	-1.57	54.0	13.41	AV	41.50	150	Horizontal	Pass
6	6597.000	56.10	3.36	74.0	17.90	Peak	251.40	150	Horizontal	Pass
6**	6597.000	45.50	3.36	54.0	8.50	AV	251.40	150	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_16.11.02

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX

Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7247.500	28.86	-0.28	74.0	45.14	Peak	233.40	100	Horizontal	Pass
1**	7247.500	18.43	-0.28	54.0	35.57	AV	233.40	100	Horizontal	Pass
2	10440.250	31.22	3.63	74.0	42.78	Peak	0.40	100	Horizontal	Pass
2**	10440.250	21.42	3.63	54.0	32.58	AV	0.40	100	Horizontal	Pass
3	11551.250	34.92	4.90	74.0	39.08	Peak	131.70	100	Horizontal	Pass
3**	11551.250	24.39	4.90	54.0	29.61	AV	131.70	100	Horizontal	Pass
4	14804.500	43.82	11.83	74.0	30.18	Peak	126.90	100	Horizontal	Pass
4**	14804.500	32.62	11.83	54.0	21.38	AV	126.90	100	Horizontal	Pass
5	16999.000	48.33	14.69	74.0	25.67	Peak	68.90	100	Horizontal	Pass
5**	16999.000	37.86	14.69	54.0	16.14	AV	68.90	100	Horizontal	Pass
6	17824.000	51.22	18.38	74.0	22.78	Peak	335.70	100	Horizontal	Pass
6**	17824.000	40.90	18.38	54.0	13.10	AV	335.70	100	Horizontal	Pass

WIFI2.4G-N20-Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-11_17.23.13

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

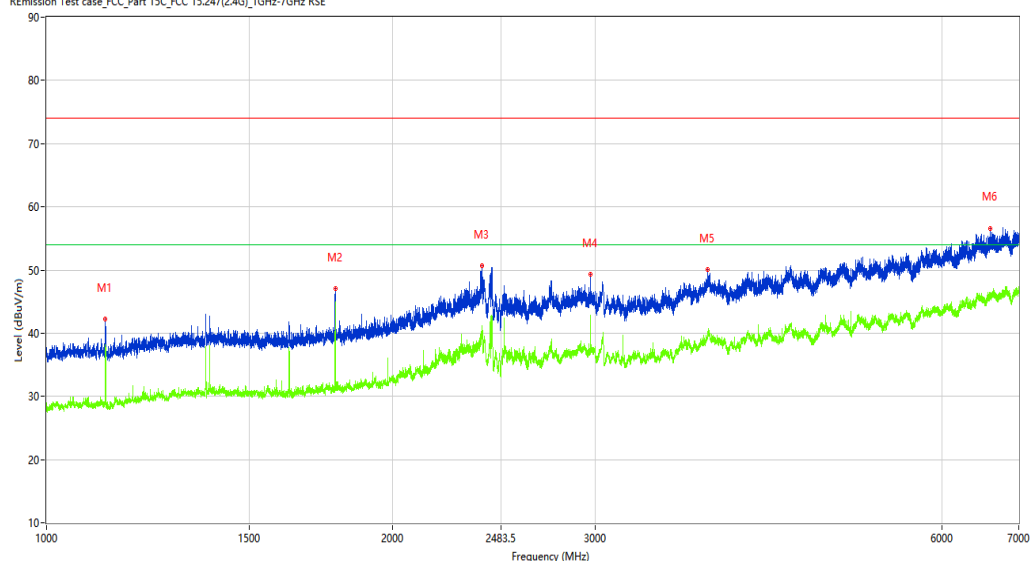

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.000	42.24	-15.14	74.0	31.76	Peak	283.30	100	Vertical	Pass
1**	1125.000	37.04	-15.14	54.0	16.96	AV	283.30	100	Vertical	Pass
2	1782.000	47.08	-12.89	74.0	26.92	Peak	174.30	100	Vertical	Pass
2**	1782.000	43.99	-12.89	54.0	10.01	AV	174.30	100	Vertical	Pass
3	2392.000	50.70	-4.72	74.0	23.30	Peak	303.00	100	Vertical	Pass
3**	2392.000	41.15	-4.72	54.0	12.85	AV	303.00	100	Vertical	Pass
4	2970.250	49.35	-4.45	74.0	24.65	Peak	325.70	100	Vertical	Pass
4**	2970.250	42.92	-4.45	54.0	11.08	AV	325.70	100	Vertical	Pass
5	3757.500	50.02	-2.38	74.0	23.98	Peak	10.70	100	Vertical	Pass
5**	3757.500	39.67	-2.38	54.0	14.33	AV	10.70	100	Vertical	Pass
6	6607.500	56.49	3.48	74.0	17.51	Peak	126.80	100	Vertical	Pass
6**	6607.500	45.74	3.48	54.0	8.26	AV	126.80	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_15.28.30

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

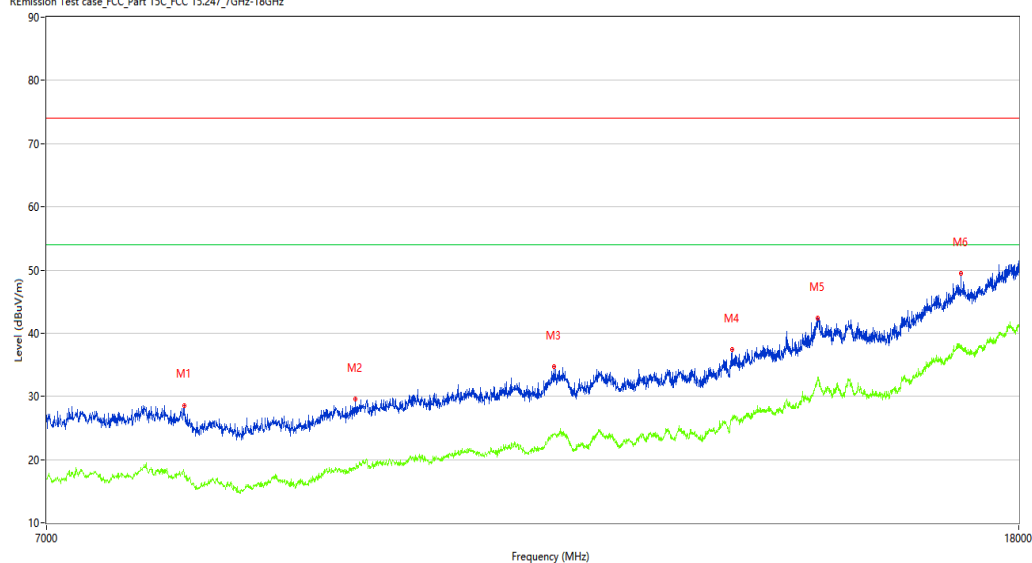

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	8001.000	28.60	1.17	74.0	45.40	Peak	60.00	100	Vertical	Pass
1**	8001.000	17.85	1.17	54.0	36.15	AV	60.00	100	Vertical	Pass
2	9447.500	29.54	1.53	74.0	44.46	Peak	3.20	100	Vertical	Pass
2**	9447.500	18.41	1.53	54.0	35.59	AV	3.20	100	Vertical	Pass
3	11457.750	34.70	4.67	74.0	39.30	Peak	300.40	100	Vertical	Pass
3**	11457.750	23.94	4.67	54.0	30.06	AV	300.40	100	Vertical	Pass
4	13624.750	37.36	6.54	74.0	36.64	Peak	278.10	100	Vertical	Pass
4**	13624.750	26.74	6.54	54.0	27.26	AV	278.10	100	Vertical	Pass
5	14804.500	42.35	11.83	74.0	31.65	Peak	73.40	100	Vertical	Pass
5**	14804.500	32.62	11.83	54.0	21.38	AV	73.40	100	Vertical	Pass
6	17018.250	49.46	14.62	74.0	24.54	Peak	50.70	100	Vertical	Pass
6**	17018.250	37.57	14.62	54.0	16.43	AV	50.70	100	Vertical	Pass

WIFI2.4G-N20-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_15.39.44

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

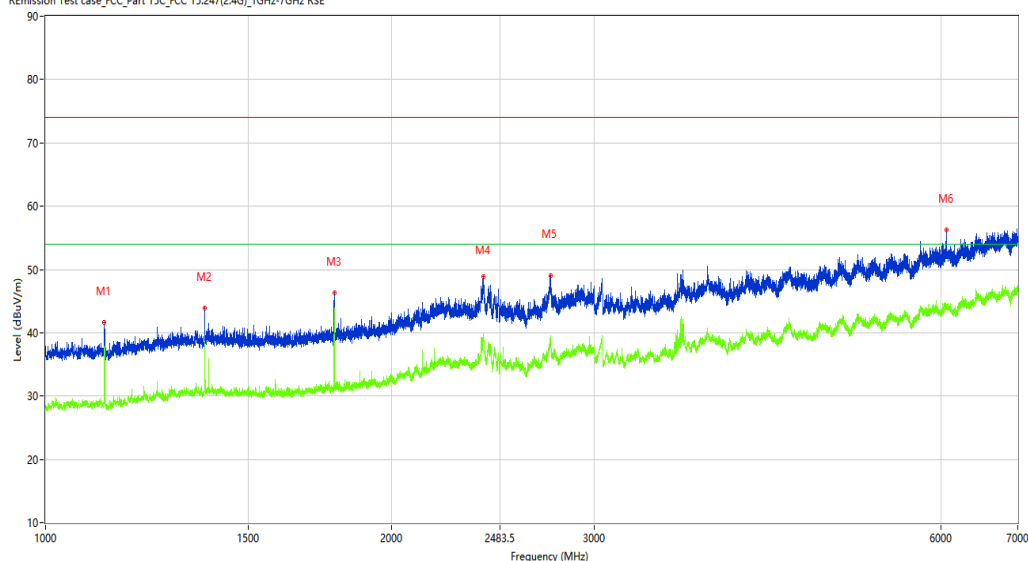

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.250	41.66	-15.15	74.0	32.34	Peak	11.20	150	Horizontal	Pass
1**	1125.250	37.93	-15.15	54.0	16.07	AV	11.20	150	Horizontal	Pass
2	1374.750	43.94	-13.49	74.0	30.06	Peak	27.90	150	Horizontal	Pass
2**	1374.750	36.69	-13.49	54.0	17.31	AV	27.90	150	Horizontal	Pass
3	1782.250	46.34	-12.90	74.0	27.66	Peak	128.90	150	Horizontal	Pass
3**	1782.250	43.91	-12.90	54.0	10.09	AV	128.90	150	Horizontal	Pass
4	2402.500	48.88	-4.78	74.0	25.12	Peak	289.40	150	Horizontal	Pass
4**	2402.500	39.69	-4.78	54.0	14.31	AV	289.40	150	Horizontal	Pass
5	2747.500	49.06	-6.02	74.0	24.94	Peak	2.00	150	Horizontal	Pass
5**	2747.500	38.82	-6.02	54.0	15.18	AV	2.00	150	Horizontal	Pass
6	6067.500	56.18	2.14	74.0	17.82	Peak	329.90	150	Horizontal	Pass
6**	6067.500	44.25	2.14	54.0	9.75	AV	329.90	150	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_16.29.45

EUT Name: N.A

Manufacturer: N.A

Model: Cyber1

Temp.(oC): 23.1℃

Hum.: 45%

Test Engineer: CJY

Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7324.500	29.29	-0.11	74.0	44.71	Peak	60.30	100	Horizontal	Pass
1**	7324.500	17.81	-0.11	54.0	36.19	AV	60.30	100	Horizontal	Pass
2	7753.500	28.86	0.35	74.0	45.14	Peak	60.30	100	Horizontal	Pass
2**	7753.500	18.03	0.35	54.0	35.97	AV	60.30	100	Horizontal	Pass
3	10393.500	31.84	3.38	74.0	42.16	Peak	202.50	100	Horizontal	Pass
3**	10393.500	20.61	3.38	54.0	33.39	AV	202.50	100	Horizontal	Pass
4	12093.000	34.76	4.52	74.0	39.24	Peak	360.00	100	Horizontal	Pass
4**	12093.000	23.53	4.52	54.0	30.47	AV	360.00	100	Horizontal	Pass
5	14801.750	43.65	11.54	74.0	30.35	Peak	47.30	100	Horizontal	Pass
5**	14801.750	32.61	11.54	54.0	21.39	AV	47.30	100	Horizontal	Pass
6	17832.249	51.62	18.61	74.0	22.38	Peak	105.00	100	Horizontal	Pass
6**	17832.249	41.34	18.61	54.0	12.66	AV	105.00	100	Horizontal	Pass

WIFI2.4G-N20-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-11_17:31.28

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

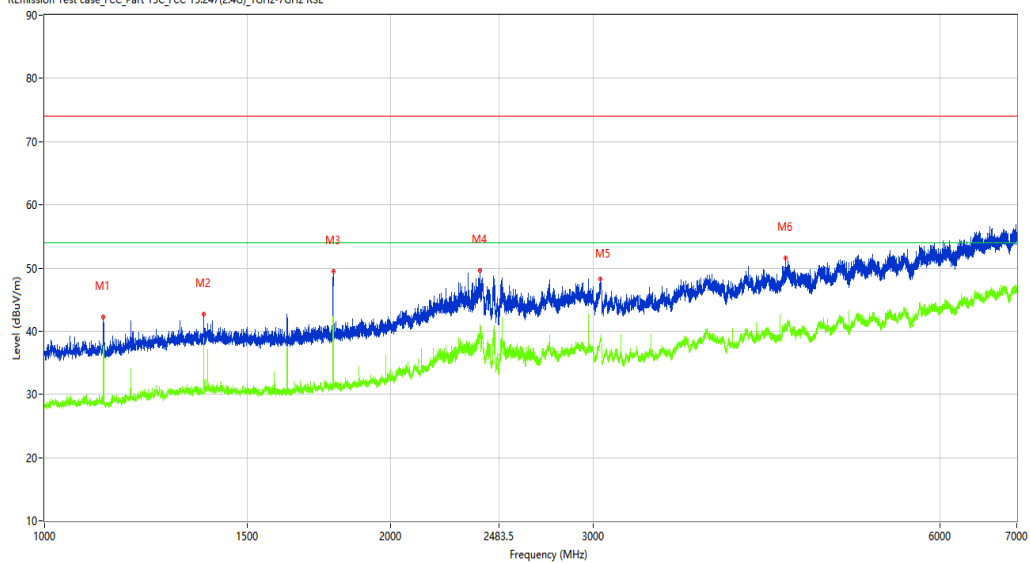

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.000	42.22	-15.14	74.0	31.78	Peak	280.70	100	Vertical	Pass
1**	1125.000	37.01	-15.14	54.0	16.99	AV	280.70	100	Vertical	Pass
2	1375.000	42.64	-13.49	74.0	31.36	Peak	280.70	100	Vertical	Pass
2**	1375.000	37.84	-13.49	54.0	16.16	AV	280.70	100	Vertical	Pass
3	1782.250	49.46	-12.90	74.0	24.54	Peak	55.10	100	Vertical	Pass
3**	1782.250	47.06	-12.90	54.0	6.94	AV	55.10	100	Vertical	Pass
4	2392.000	49.65	-4.72	74.0	24.35	Peak	300.40	100	Vertical	Pass
4**	2392.000	40.30	-4.72	54.0	13.70	AV	300.40	100	Vertical	Pass
5	3042.500	48.25	-2.94	74.0	25.75	Peak	158.20	100	Vertical	Pass
5**	3042.500	38.72	-2.94	54.0	15.28	AV	158.20	100	Vertical	Pass
6	4405.500	51.55	-1.42	74.0	22.45	Peak	105.70	100	Vertical	Pass
6**	4405.500	41.26	-1.42	54.0	12.74	AV	105.70	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_15.08.29

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247.7GHz-18GHz

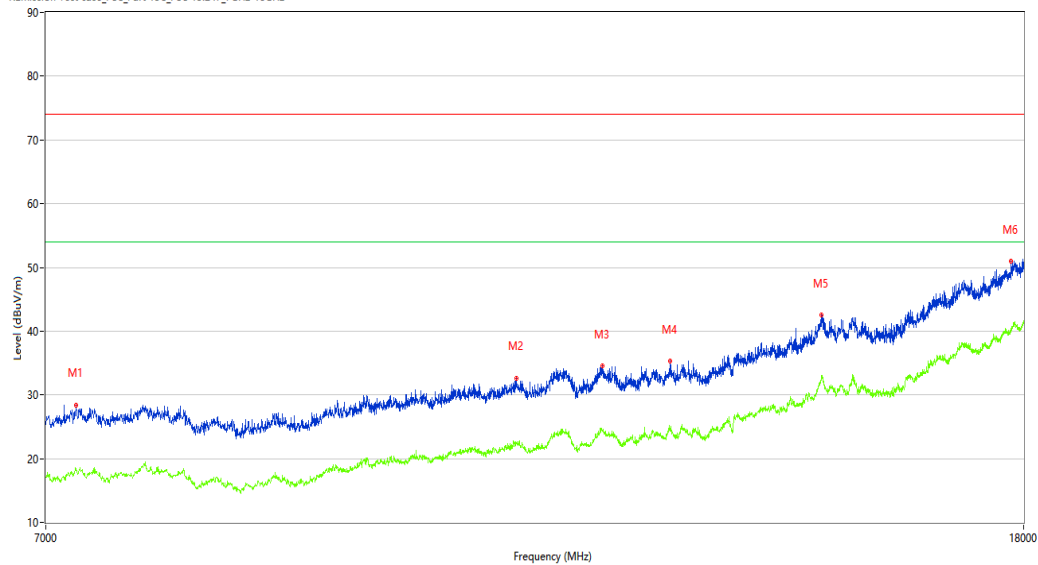

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7206.250	28.45	0.01	74.0	45.55	Peak	356.60	100	Vertical	Pass
1**	7206.250	18.16	0.01	54.0	35.84	AV	356.60	100	Vertical	Pass
2	11031.500	32.64	4.52	74.0	41.36	Peak	79.40	100	Vertical	Pass
2**	11031.500	22.42	4.52	54.0	31.58	AV	79.40	100	Vertical	Pass
3	11980.250	34.58	4.54	74.0	39.42	Peak	322.80	100	Vertical	Pass
3**	11980.250	24.45	4.54	54.0	29.55	AV	322.80	100	Vertical	Pass
4	12797.000	35.28	5.88	74.0	38.72	Peak	300.40	100	Vertical	Pass
4**	12797.000	24.78	5.88	54.0	29.22	AV	300.40	100	Vertical	Pass
5	14804.500	42.58	11.83	74.0	31.42	Peak	70.50	100	Vertical	Pass
5**	14804.500	32.98	11.83	54.0	21.02	AV	70.50	100	Vertical	Pass
6	17785.500	50.93	17.50	74.0	23.07	Peak	237.90	100	Vertical	Pass
6**	17785.500	40.40	17.50	54.0	13.60	AV	237.90	100	Vertical	Pass

WIFI2.4G-N40-Low channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_16.52.33

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

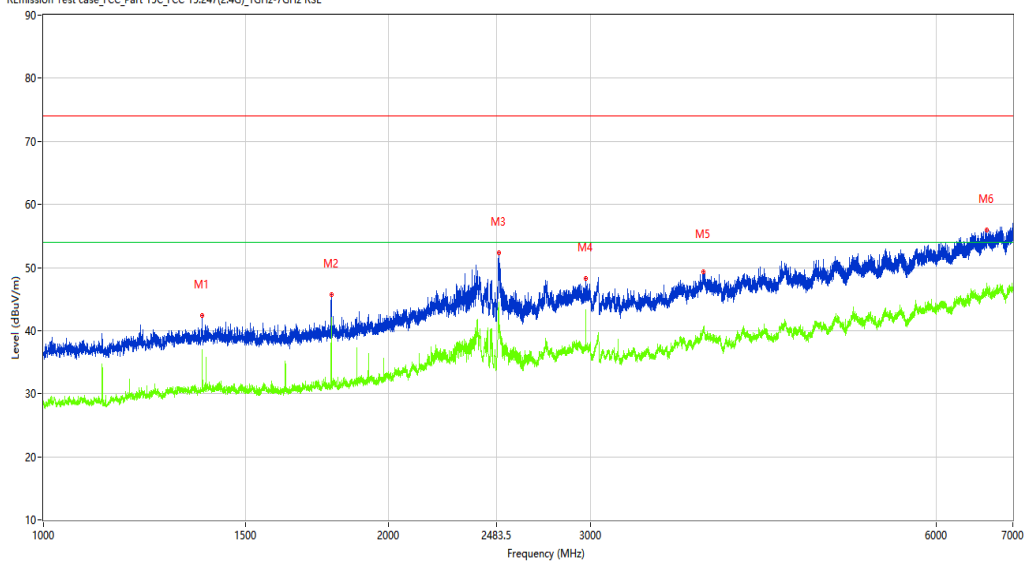

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1375.250	42.39	-13.49	74.0	31.61	Peak	43.20	100	Vertical	Pass
1**	1375.250	37.04	-13.49	54.0	16.96	AV	43.20	100	Vertical	Pass
2	1782.250	45.64	-12.90	74.0	28.36	Peak	316.20	100	Vertical	Pass
2**	1782.250	42.12	-12.90	54.0	11.88	AV	316.20	100	Vertical	Pass
3	2494.500	52.28	-7.30	74.0	21.72	Peak	135.80	100	Vertical	Pass
3**	2494.500	43.18	-7.30	54.0	10.82	AV	135.80	100	Vertical	Pass
4	2969.750	48.19	-4.45	74.0	25.81	Peak	139.20	100	Vertical	Pass
4**	2969.750	41.09	-4.45	54.0	12.91	AV	139.20	100	Vertical	Pass
5	3763.500	49.38	-2.37	74.0	24.62	Peak	360.10	100	Vertical	Pass
5**	3763.500	40.24	-2.37	54.0	13.76	AV	360.10	100	Vertical	Pass
6	6648.000	55.92	3.99	74.0	18.08	Peak	154.60	100	Vertical	Pass
6**	6648.000	46.30	3.99	54.0	7.70	AV	154.60	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_15.38.11

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

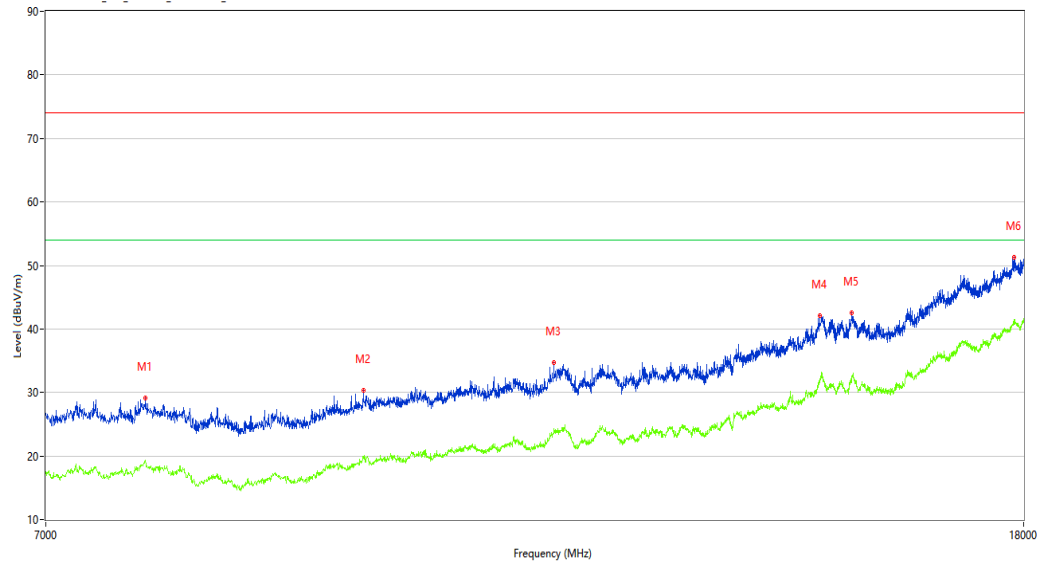

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7706.750	29.07	0.97	74.0	44.93	Peak	232.30	100	Vertical	Pass
1**	7706.750	19.05	0.97	54.0	34.95	AV	232.30	100	Vertical	Pass
2	9510.750	30.28	2.54	74.0	43.72	Peak	346.90	100	Vertical	Pass
2**	9510.750	19.61	2.54	54.0	34.39	AV	346.90	100	Vertical	Pass
3	11433.000	34.72	4.77	74.0	39.28	Peak	191.70	100	Vertical	Pass
3**	11433.000	23.69	4.77	54.0	30.31	AV	191.70	100	Vertical	Pass
4	14785.250	42.16	10.97	74.0	31.84	Peak	355.20	100	Vertical	Pass
4**	14785.250	31.50	10.97	54.0	22.50	AV	355.20	100	Vertical	Pass
5	15244.500	42.54	10.11	74.0	31.46	Peak	33.20	100	Vertical	Pass
5**	15244.500	31.61	10.11	54.0	22.39	AV	33.20	100	Vertical	Pass
6	17832.249	51.24	18.61	74.0	22.76	Peak	214.40	100	Vertical	Pass
6**	17832.249	41.23	18.61	54.0	12.77	AV	214.40	100	Vertical	Pass

WIFI2.4G-N40-Middle channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_15.22.45

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

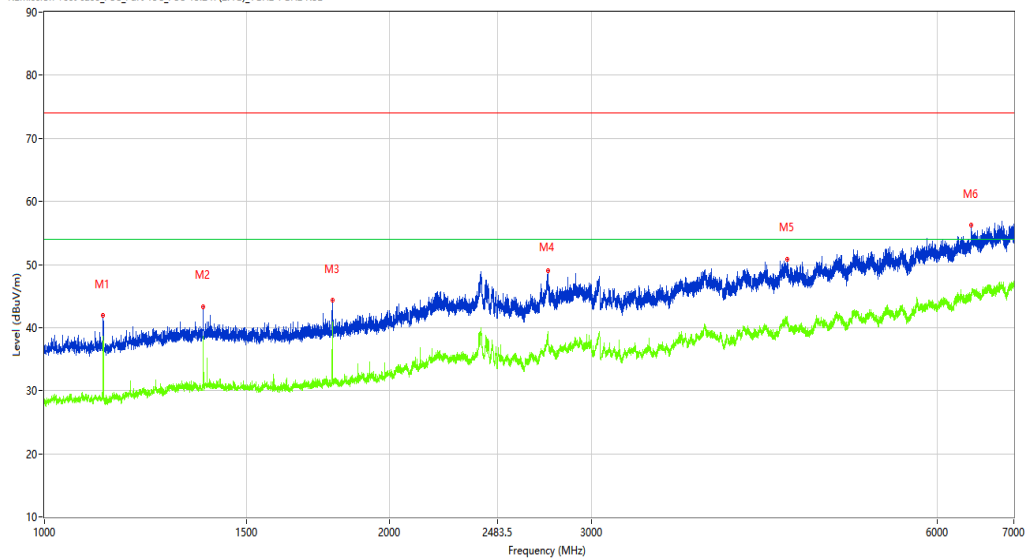

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1125.000	41.94	-15.14	74.0	32.06	Peak	17.20	150	Horizontal	Pass
1**	1125.000	37.09	-15.14	54.0	16.91	AV	17.20	150	Horizontal	Pass
2	1375.000	43.36	-13.49	74.0	30.64	Peak	22.70	150	Horizontal	Pass
2**	1375.000	38.03	-13.49	54.0	15.97	AV	22.70	150	Horizontal	Pass
3	1782.000	44.28	-12.89	74.0	29.72	Peak	118.20	150	Horizontal	Pass
3**	1782.000	39.75	-12.89	54.0	14.25	AV	118.20	150	Horizontal	Pass
4	2747.000	48.98	-6.04	74.0	25.02	Peak	53.60	150	Horizontal	Pass
4**	2747.000	39.29	-6.04	54.0	14.71	AV	53.60	150	Horizontal	Pass
5	4439.500	50.88	-1.58	74.0	23.12	Peak	35.30	150	Horizontal	Pass
5**	4439.500	41.13	-1.58	54.0	12.87	AV	35.30	150	Horizontal	Pass
6	6429.500	56.20	2.93	74.0	17.80	Peak	290.10	150	Horizontal	Pass
6**	6429.500	45.16	2.93	54.0	8.84	AV	290.10	150	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_16.13.47

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX

Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7698.500	28.85	0.98	74.0	45.15	Peak	112.80	100	Horizontal	Pass
1**	7698.500	18.92	0.98	54.0	35.08	AV	112.80	100	Horizontal	Pass
2	9546.500	30.00	2.90	74.0	44.00	Peak	99.70	100	Horizontal	Pass
2**	9546.500	20.03	2.90	54.0	33.97	AV	99.70	100	Horizontal	Pass
3	11411.000	35.04	4.75	74.0	38.96	Peak	0.80	100	Horizontal	Pass
3**	11411.000	23.43	4.75	54.0	30.57	AV	0.80	100	Horizontal	Pass
4	13710.000	37.01	6.98	74.0	36.99	Peak	95.30	100	Horizontal	Pass
4**	13710.000	26.17	6.98	54.0	27.83	AV	95.30	100	Horizontal	Pass
5	14804.500	43.54	11.83	74.0	30.46	Peak	268.30	100	Horizontal	Pass
5**	14804.500	32.67	11.83	54.0	21.33	AV	268.30	100	Horizontal	Pass
6	17810.250	51.06	18.09	74.0	22.94	Peak	360.00	100	Horizontal	Pass
6**	17810.250	40.43	18.09	54.0	13.57	AV	360.00	100	Horizontal	Pass

WIFI2.4G-N40-Middle channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_16.48.50

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

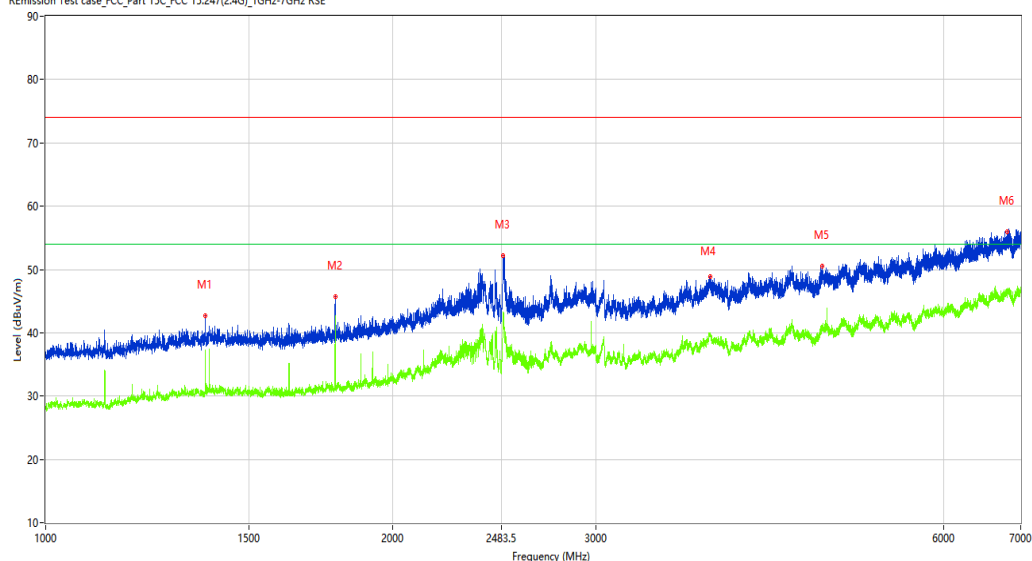

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1375.000	42.63	-13.49	74.0	31.37	Peak	47.30	100	Vertical	Pass
1**	1375.000	36.82	-13.49	54.0	17.18	AV	47.30	100	Vertical	Pass
2	1782.000	45.70	-12.89	74.0	28.30	Peak	153.00	100	Vertical	Pass
2**	1782.000	41.90	-12.89	54.0	12.10	AV	153.00	100	Vertical	Pass
3	2491.250	52.18	-7.25	74.0	21.82	Peak	127.30	100	Vertical	Pass
3**	2491.250	43.25	-7.25	54.0	10.75	AV	127.30	100	Vertical	Pass
4	3767.000	48.91	-2.41	74.0	25.09	Peak	337.70	100	Vertical	Pass
4**	3767.000	39.08	-2.41	54.0	14.92	AV	337.70	100	Vertical	Pass
5	4711.500	50.47	-0.54	74.0	23.53	Peak	357.10	100	Vertical	Pass
5**	4711.500	40.47	-0.54	54.0	13.53	AV	357.10	100	Vertical	Pass
6	6819.000	55.97	4.30	74.0	18.03	Peak	333.60	100	Vertical	Pass
6**	6819.000	46.03	4.30	54.0	7.97	AV	333.60	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_15.23.57

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

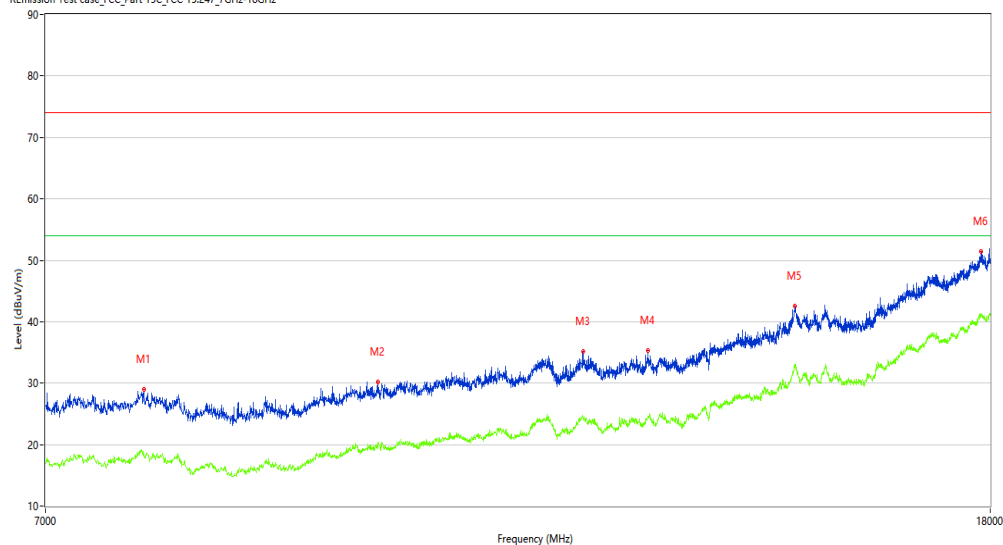

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7723.250	29.00	0.06	74.0	45.00	Peak	327.70	100	Vertical	Pass
1**	7723.250	18.32	0.06	54.0	35.68	AV	327.70	100	Vertical	Pass
2	9761.000	30.16	3.04	74.0	43.84	Peak	173.20	100	Vertical	Pass
2**	9761.000	20.47	3.04	54.0	33.53	AV	173.20	100	Vertical	Pass
3	11983.000	35.18	4.66	74.0	38.82	Peak	332.20	100	Vertical	Pass
3**	11983.000	24.01	4.66	54.0	29.99	AV	332.20	100	Vertical	Pass
4	12783.250	35.27	5.82	74.0	38.73	Peak	150.90	100	Vertical	Pass
4**	12783.250	24.47	5.82	54.0	29.53	AV	150.90	100	Vertical	Pass
5	14801.750	42.61	11.54	74.0	31.39	Peak	318.80	100	Vertical	Pass
5**	14801.750	32.64	11.54	54.0	21.36	AV	318.80	100	Vertical	Pass
6	17840.501	51.40	18.45	74.0	22.60	Peak	271.10	100	Vertical	Pass
6**	17840.501	40.67	18.45	54.0	13.33	AV	271.10	100	Vertical	Pass

WIFI2.4G-N40-High channel-Horizontal-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_16.36.06

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

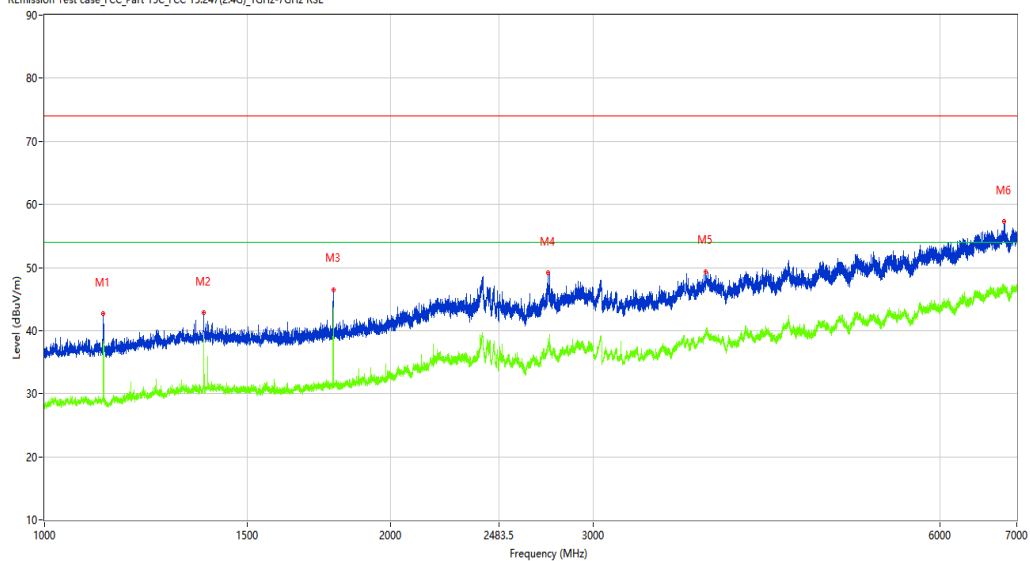

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1124.750	42.62	-15.14	74.0	31.38	Peak	13.80	100	Horizontal	Pass
1**	1124.750	35.51	-15.14	54.0	18.49	AV	13.80	100	Horizontal	Pass
2	1374.500	42.85	-13.49	74.0	31.15	Peak	22.40	100	Horizontal	Pass
2**	1374.500	33.62	-13.49	54.0	20.38	AV	22.40	100	Horizontal	Pass
3	1782.250	46.51	-12.90	74.0	27.49	Peak	81.20	100	Horizontal	Pass
3**	1782.250	43.58	-12.90	54.0	10.42	AV	81.20	100	Horizontal	Pass
4	2739.250	49.15	-6.24	74.0	24.85	Peak	326.00	100	Horizontal	Pass
4**	2739.250	38.41	-6.24	54.0	15.59	AV	326.00	100	Horizontal	Pass
5	3755.000	49.37	-2.43	74.0	24.63	Peak	188.50	100	Horizontal	Pass
5**	3755.000	39.41	-2.43	54.0	14.59	AV	188.50	100	Horizontal	Pass
6	6830.000	57.27	4.24	74.0	16.73	Peak	168.10	100	Horizontal	Pass
6**	6830.000	47.06	4.24	54.0	6.94	AV	168.10	100	Horizontal	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_16.16.36

EUT Name: N.A

Manufacturer: N.A

Model: Cyber1

Temp.(oC): 23.1℃

Hum.: 45%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

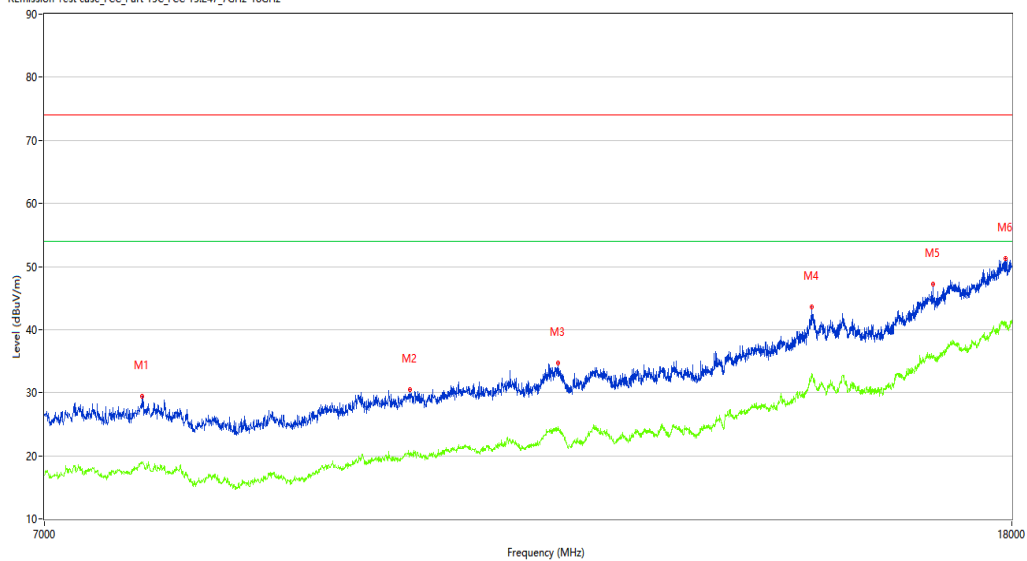

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7701.250	29.46	1.03	74.0	44.54	Peak	351.80	100	Horizontal	Pass
1**	7701.250	18.85	1.03	54.0	35.15	AV	351.80	100	Horizontal	Pass
2	10003.000	30.49	2.93	74.0	43.51	Peak	249.10	100	Horizontal	Pass
2**	10003.000	20.19	2.93	54.0	33.81	AV	249.10	100	Horizontal	Pass
3	11554.000	34.66	4.95	74.0	39.34	Peak	200.40	100	Horizontal	Pass
3**	11554.000	24.65	4.95	54.0	29.35	AV	200.40	100	Horizontal	Pass
4	14804.500	43.54	11.83	74.0	30.46	Peak	293.40	100	Horizontal	Pass
4**	14804.500	32.55	11.83	54.0	21.45	AV	293.40	100	Horizontal	Pass
5	16666.250	47.27	12.45	74.0	26.73	Peak	80.60	100	Horizontal	Pass
5**	16666.250	35.90	12.45	54.0	18.10	AV	80.60	100	Horizontal	Pass
6	17892.749	51.28	18.11	74.0	22.72	Peak	357.60	100	Horizontal	Pass
6**	17892.749	40.57	18.11	54.0	13.43	AV	357.60	100	Horizontal	Pass

WIFI2.4G-N40-High channel-Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_16.44.23

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz RSE

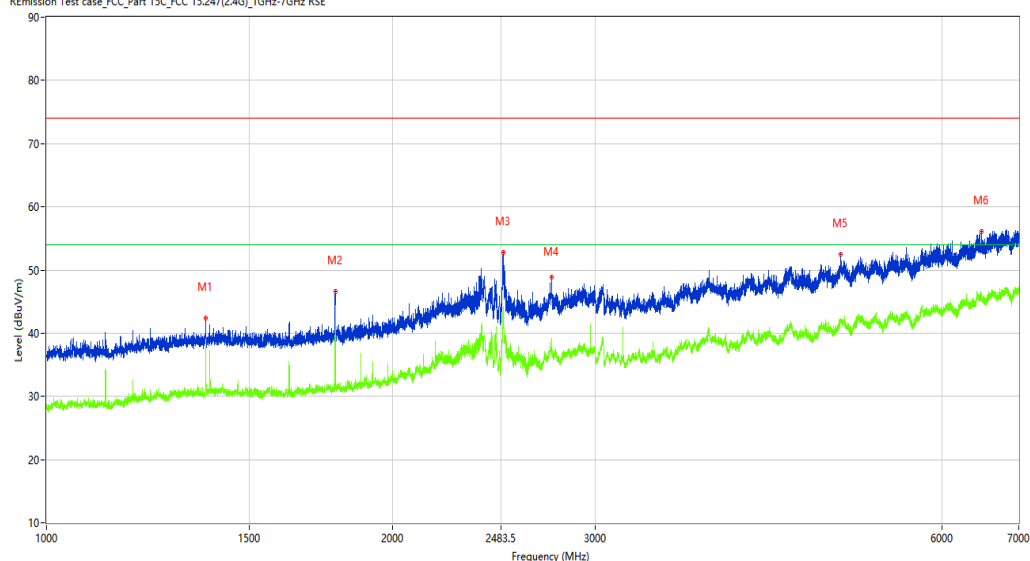

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1375.000	42.41	-13.49	74.0	31.59	Peak	45.40	100	Vertical	Pass
1**	1375.000	36.51	-13.49	54.0	17.49	AV	45.40	100	Vertical	Pass
2	1782.000	46.63	-12.89	74.0	27.37	Peak	291.00	100	Vertical	Pass
2**	1782.000	43.82	-12.89	54.0	10.18	AV	291.00	100	Vertical	Pass
3	2493.250	52.83	-7.31	74.0	21.17	Peak	123.50	100	Vertical	Pass
3**	2493.250	43.54	-7.31	54.0	10.46	AV	123.50	100	Vertical	Pass
4	2748.000	48.90	-5.99	74.0	25.10	Peak	242.60	100	Vertical	Pass
4**	2748.000	39.21	-5.99	54.0	14.79	AV	242.60	100	Vertical	Pass
5	4901.000	52.50	-0.06	74.0	21.50	Peak	137.20	100	Vertical	Pass
5**	4901.000	41.78	-0.06	54.0	12.22	AV	137.20	100	Vertical	Pass
6	6495.000	56.04	3.11	74.0	17.96	Peak	3.70	100	Vertical	Pass
6**	6495.000	45.39	3.11	54.0	8.61	AV	3.70	100	Vertical	Pass

Test result

Project Number: Certification

Test Time: 2025-12-11_15.16.46

EUT Name: N.A

Manufacturer: N.A

Model: Cyber1

Temp.(oC): 23.1℃

Hum.: 45%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

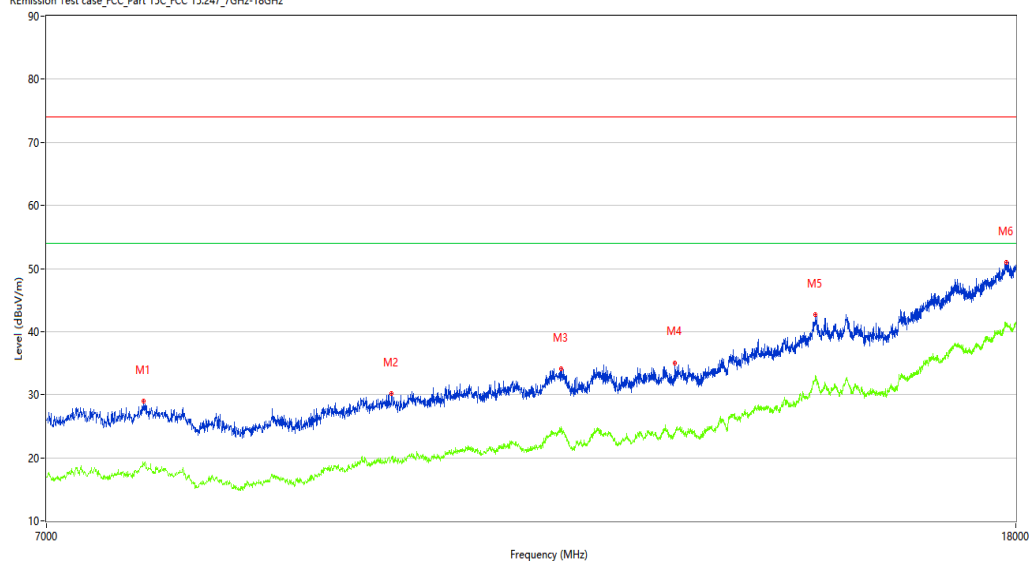

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7695.750	28.96	0.97	74.0	45.04	Peak	128.60	100	Vertical	Pass
1**	7695.750	18.88	0.97	54.0	35.12	AV	128.60	100	Vertical	Pass
2	9799.500	30.16	3.29	74.0	43.84	Peak	106.30	100	Vertical	Pass
2**	9799.500	19.99	3.29	54.0	34.01	AV	106.30	100	Vertical	Pass
3	11562.250	34.13	4.97	74.0	39.87	Peak	358.00	100	Vertical	Pass
3**	11562.250	24.31	4.97	54.0	29.69	AV	358.00	100	Vertical	Pass
4	12915.250	35.07	5.51	74.0	38.93	Peak	270.50	100	Vertical	Pass
4**	12915.250	24.01	5.51	54.0	29.99	AV	270.50	100	Vertical	Pass
5	14804.500	42.72	11.83	74.0	31.28	Peak	93.30	100	Vertical	Pass
5**	14804.500	32.58	11.83	54.0	21.42	AV	93.30	100	Vertical	Pass
6	17835.000	50.92	18.63	74.0	23.08	Peak	40.70	100	Vertical	Pass
6**	17835.000	41.37	18.63	54.0	12.63	AV	40.70	100	Vertical	Pass

WIFI2.4G-Bandedge -B-Low channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2025-12-12_14.41.55

EUT Name: N.A

Manufacturer: N.A

Model: Cyber1

Temp.(oC): 23.1°C

Hum.: 45%


Test Engineer: CJY

Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110007-01#02

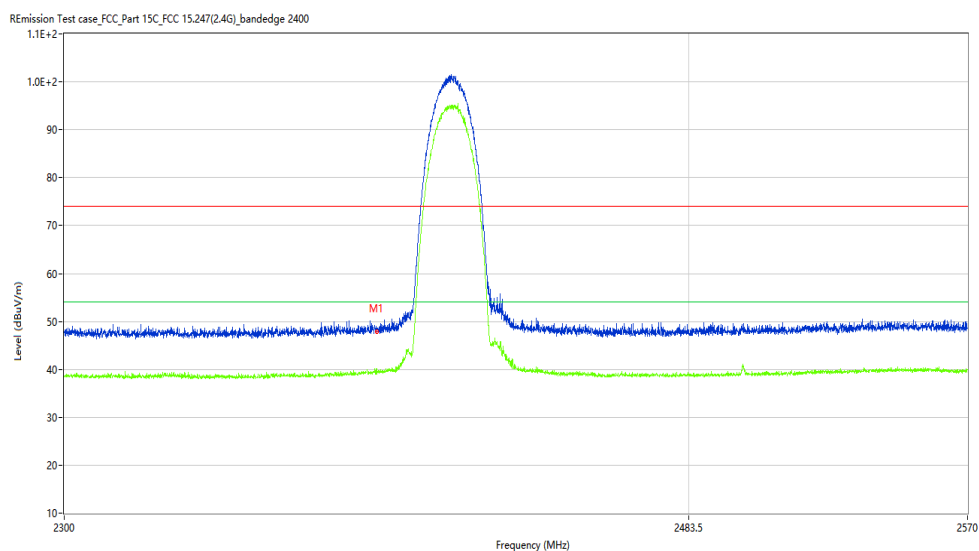

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	47.76	-10.58	74.0	26.24	Peak	262.70	150	H	Pass
1**	2390.000	39.57	-10.58	54.0	14.43	AV	262.70	150	H	Pass

WIFI2.4G-Bandedge -B-Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2025-12-12_17.44.34

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(Z4G)_bandedge 2400

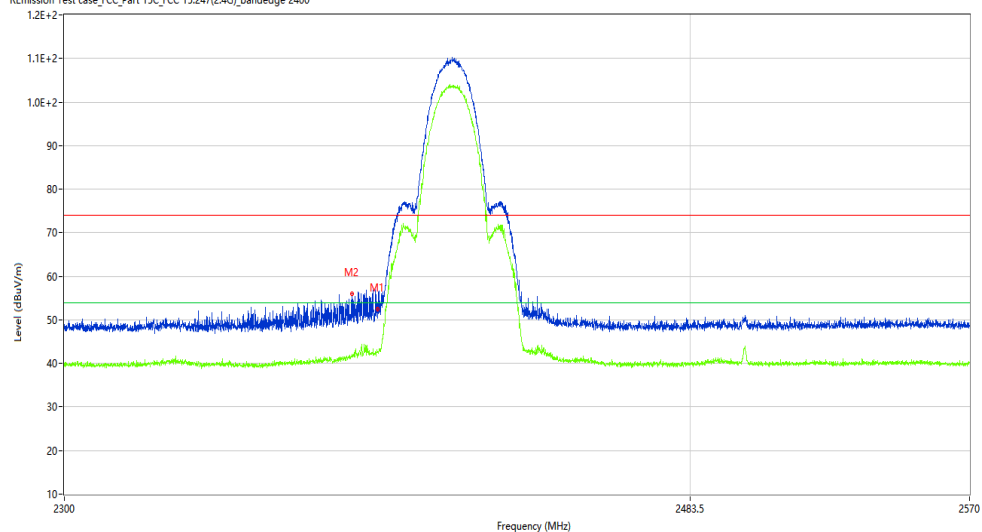

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	52.74	-10.58	74.0	21.26	Peak	170.90	100	Vertical	Pass
1**	2390.000	42.73	-10.58	54.0	11.27	AV	170.90	100	Vertical	Pass
2	2382.687	55.96	-10.64	74.0	18.04	Peak	159.00	100	Vertical	Pass
2**	2382.687	41.40	-10.64	54.0	12.60	AV	159.00	100	Vertical	Pass

WIFI2.4G-Bandedge -B-High channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2025-12-12_14.46.06

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1°C

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

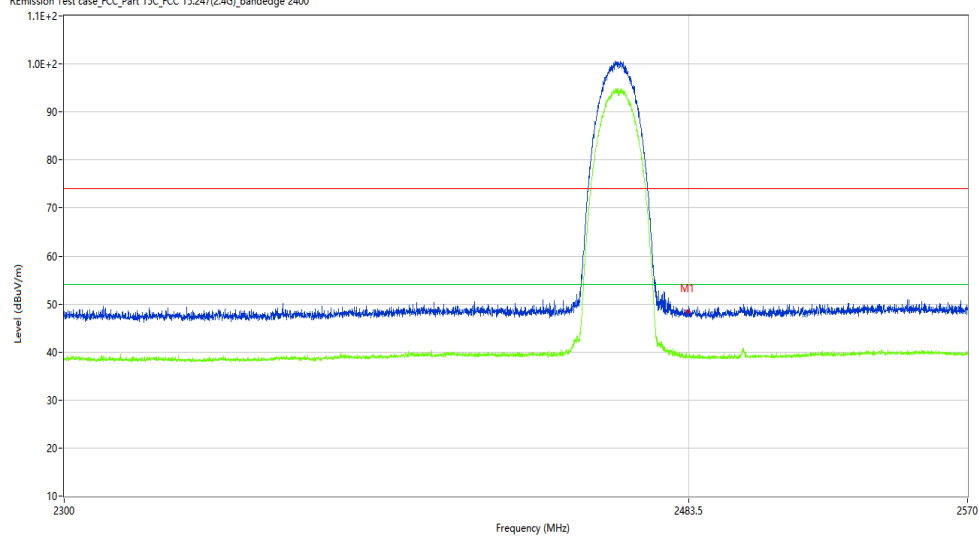

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	48.54	-10.56	74.0	25.46	Peak	199.39	150	H	Pass
1**	2483.500	39.21	-10.56	54.0	14.79	AV	199.39	150	H	Pass

WIFI2.4G-Bandedge -B-High channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-11_16.46.52

EUT Name: N.A

Manufacturer: N.A

Model: Cyber1

Temp.(oC): 23.1℃

Hum.: 45%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

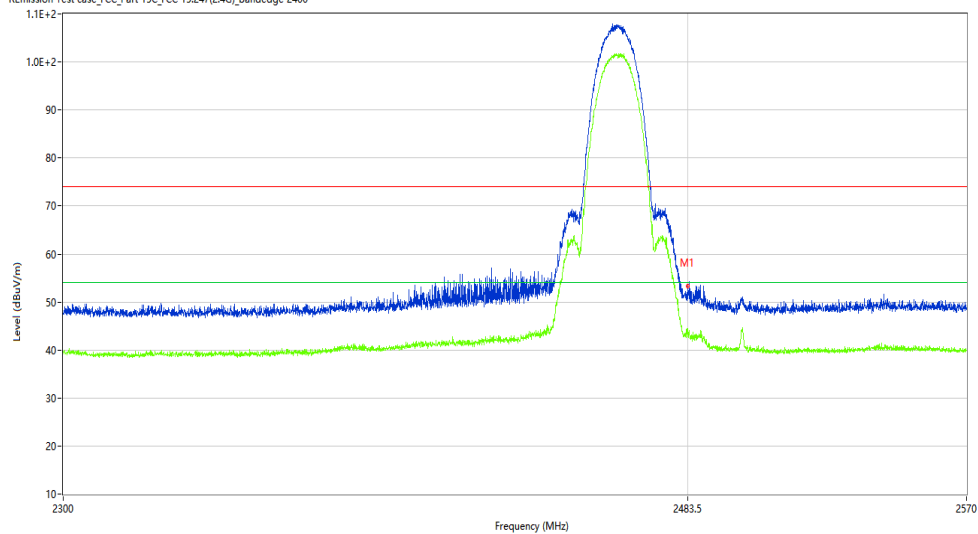

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.04	-10.56	74.0	20.96	Peak	197.86	100	V	Pass
1**	2483.500	43.48	-10.56	54.0	10.52	AV	197.86	100	V	Pass

WIFI2.4G-Bandedge -G-Low channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2025-12-12_14.36.02

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

RfEmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

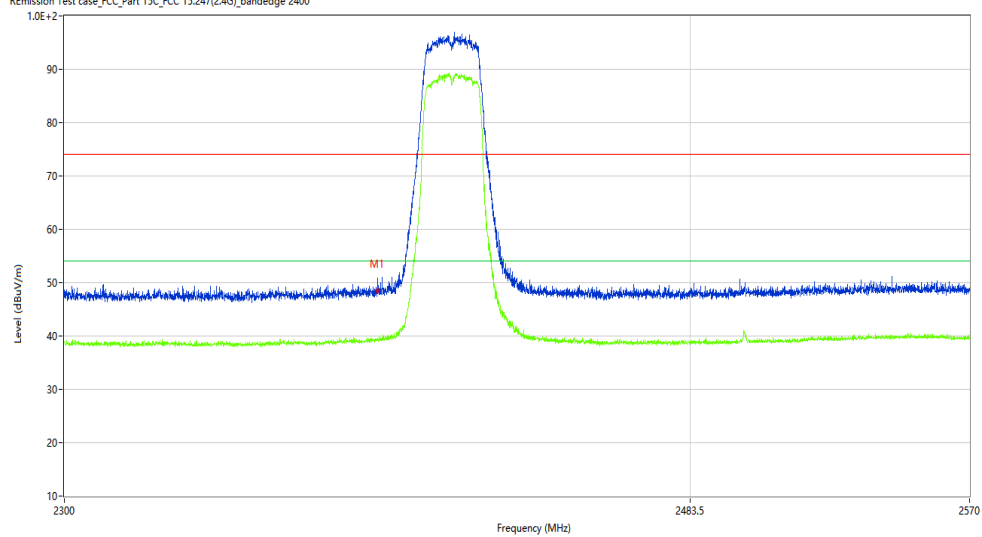

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.33	-10.58	74.0	25.67	Peak	120.91	150	H	Pass
1**	2390.000	39.52	-10.58	54.0	14.48	AV	120.91	150	H	Pass

WIFI2.4G-Bandedge -G-Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2025-12-11_17:55:48

EUT Name: N.A

Manufacturer: N.A

Model: Cyber1

Temp.(oC): 23.1℃

Hum.: 45%

Test Engineer: CJY


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

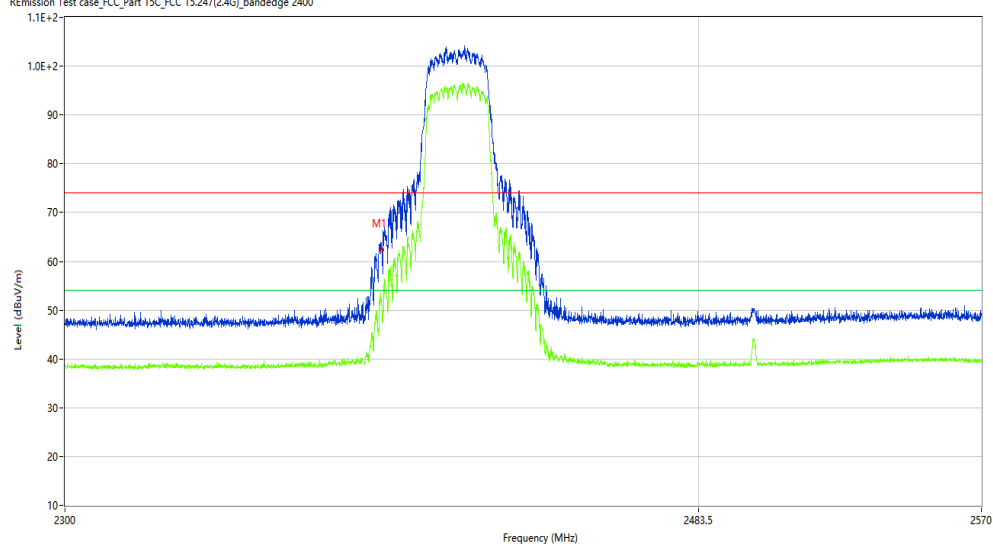

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	62.05	-10.58	74.0	11.95	Peak	301.50	100	V	Pass
1**	2390.000	50.21	-10.58	54.0	3.79	AV	301.50	100	V	Pass

WIFI2.4G-Bandedge -G-High channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2025-12-12_14.33.12

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

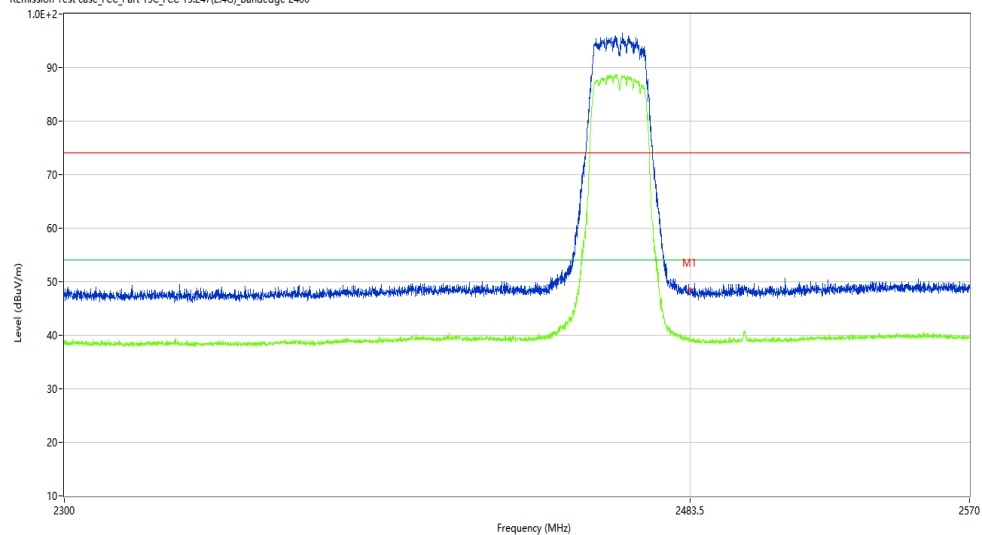

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	48.51	-10.56	74.0	25.49	Peak	148.06	150	H	Pass
1**	2483.500	39.17	-10.56	54.0	14.83	AV	148.06	150	H	Pass

WIFI2.4G-Bandedge -G-High channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_14.22.12

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

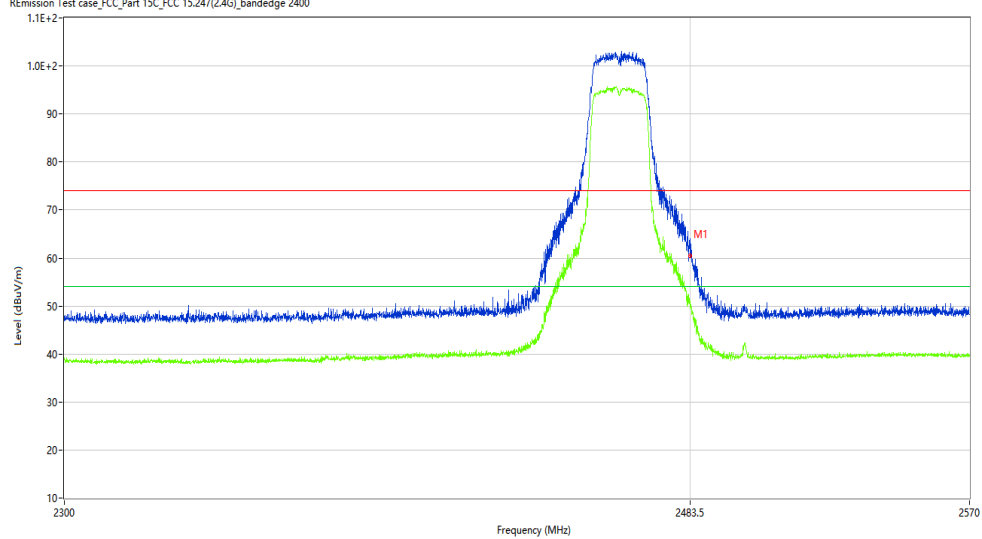

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	60.51	-10.56	74.0	13.49	Peak	119.20	150	V	Pass
1**	2483.500	49.67	-10.56	54.0	4.33	AV	119.20	150	V	Pass

WIFI2.4G-Bandedge -N20-Low channel- Horizontal –TX

Test result

Project Number: Certification

Test Time: 2025-12-12_14.50.59

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

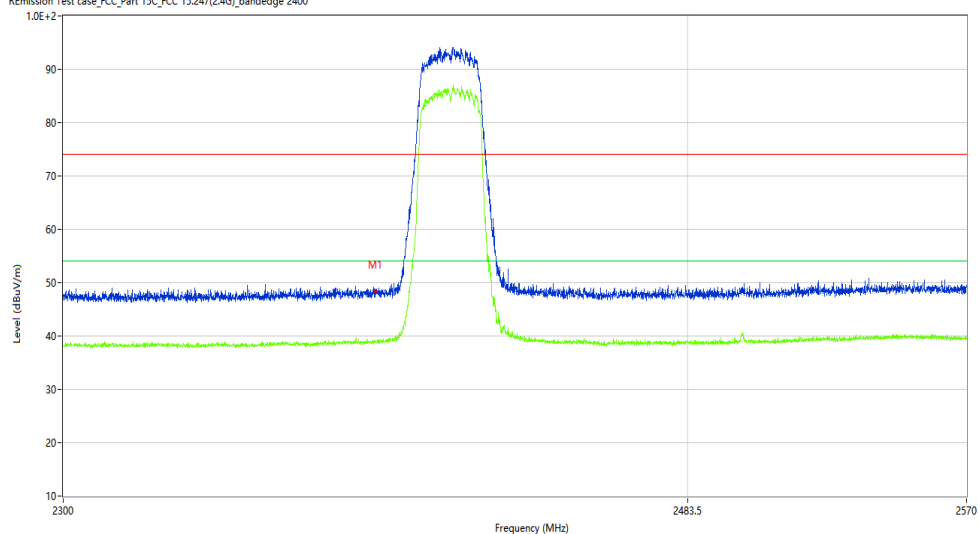

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.19	-10.58	74.0	25.81	Peak	99.36	150	H	Pass
1**	2390.000	38.94	-10.58	54.0	15.06	AV	99.36	150	H	Pass

WIFI2.4G-Bandedge -N20-Low channel- Vertical -TX

Test result

Project Number: Certification

Test Time: 2025-12-12_14.14.52

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

R/Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

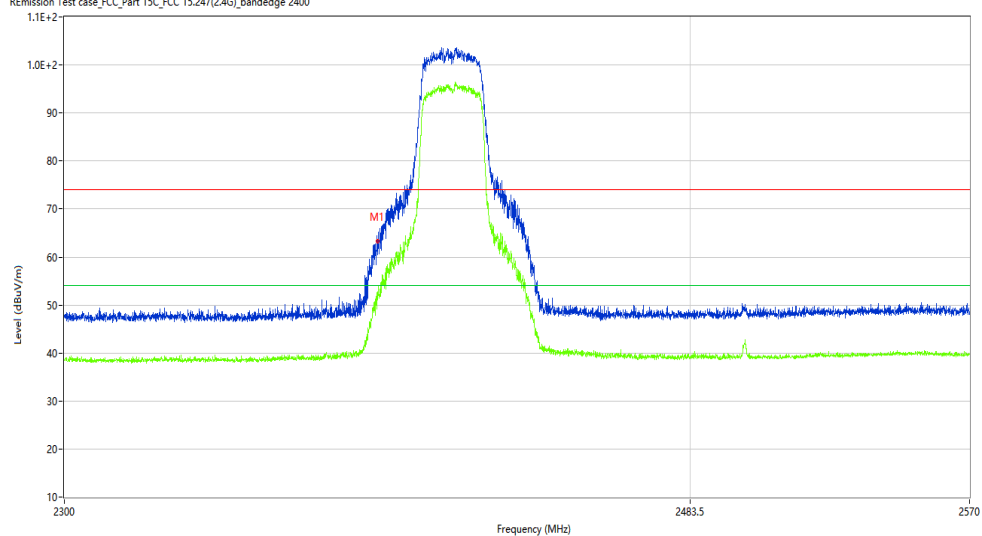

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	62.97	-10.58	74.0	11.03	Peak	168.50	150	V	Pass
1**	2390.000	52.71	-10.58	54.0	1.29	AV	168.50	150	V	Pass

WIFI2.4G-Bandedge -N20-High channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2025-12-12_14.53.56

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

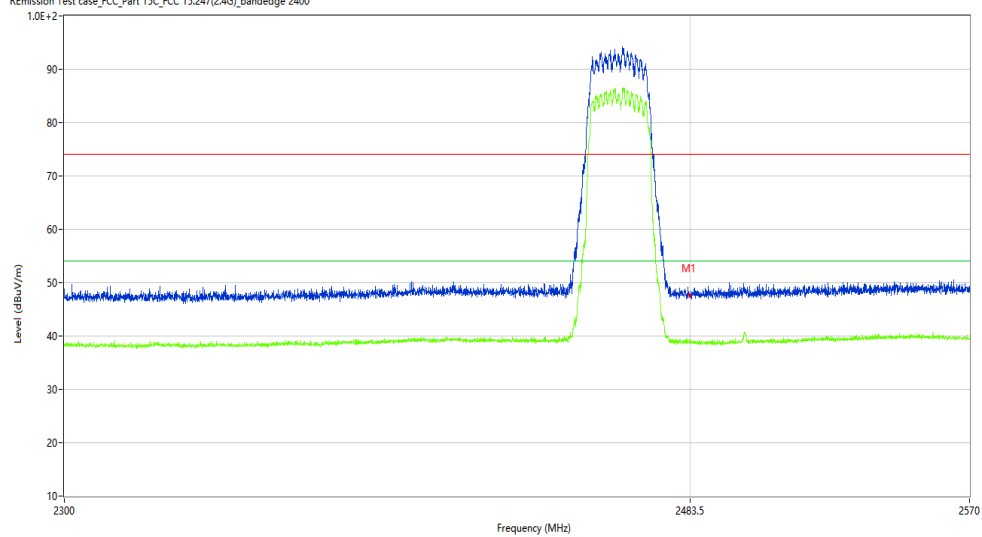

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	47.65	-10.56	74.0	26.35	Peak	266.89	150	H	Pass
1**	2483.500	38.92	-10.56	54.0	15.08	AV	266.89	150	H	Pass

WIFI2.4G-Bandedge -N20-High channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-11_17.42.45

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

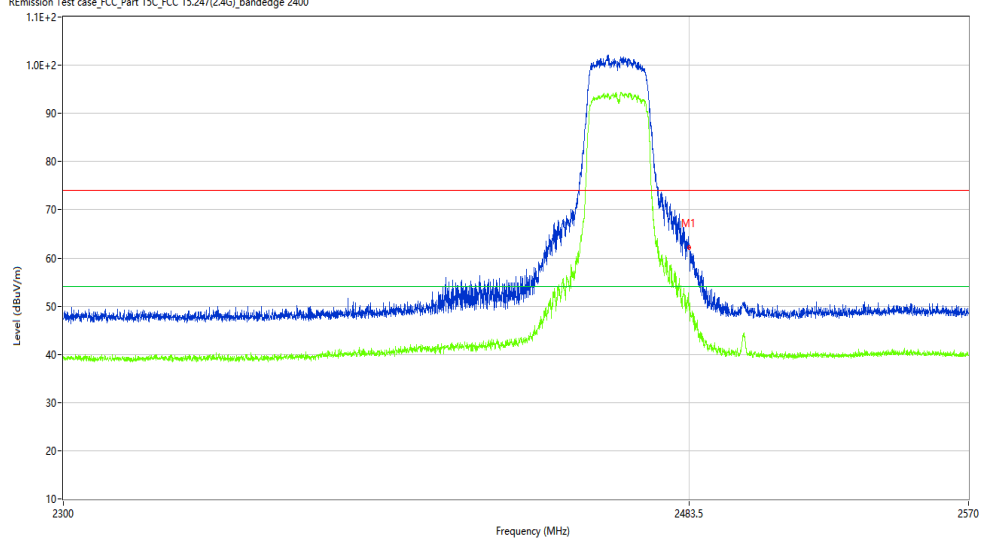

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	62.20	-10.56	74.0	11.80	Peak	282.64	100	V	Pass
1**	2483.500	49.37	-10.56	54.0	4.63	AV	282.64	100	V	Pass

WIFI2.4G-Bandedge -N40-Low channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2025-12-12_17.29.52

EUT Name: N.A

Manufacturer: N.A

Model: Cyber1

Temp.(oC): 23.1℃

Hum.: 45%


Test Engineer: CJY

Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E25110007-01#02

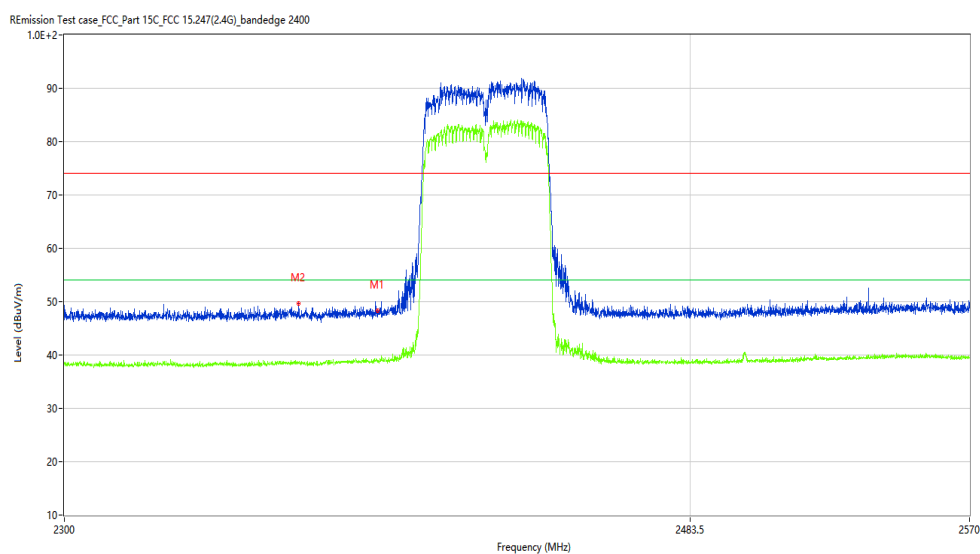

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	48.09	-10.58	74.0	25.91	Peak	268.44	100	Horizontal	Pass
1**	2390.000	38.89	-10.58	54.0	15.11	AV	268.44	100	Horizontal	Pass
2	2367.095	49.64	-10.77	74.0	24.36	Peak	132.30	100	Horizontal	Pass
2**	2367.095	38.70	-10.77	54.0	15.30	AV	132.30	100	Horizontal	Pass

WiFi2.4G-Bandedge –N40-Low channel- Vertical –TX

Test result

Project Number: Certification

Test Time: 2025-12-12_17.23.06

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

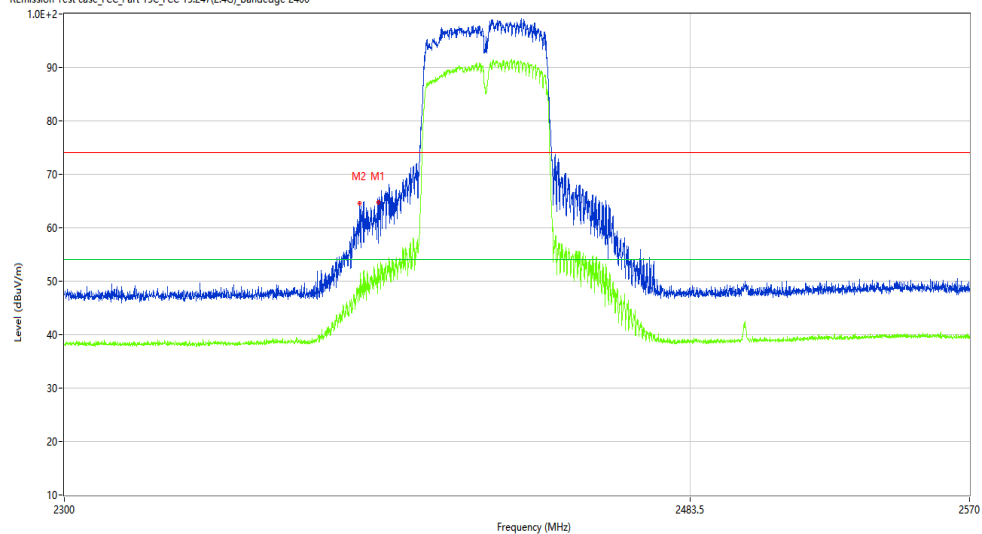

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	64.33	-10.58	74.0	9.67	Peak	113.76	100	Vertical	Pass
1**	2390.000	49.47	-10.58	54.0	4.53	AV	113.76	100	Vertical	Pass
2	2384.847	64.50	-10.69	74.0	9.50	Peak	112.40	100	Vertical	Pass
2**	2384.847	46.37	-10.69	54.0	7.63	AV	112.40	100	Vertical	Pass

WIFI2.4G-Bandedge –N40-High channel- Horizontal -TX

Test result

Project Number: Certification

Test Time: 2025-12-12_17.35.15

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX


Temp.(oC): 23.1℃

Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

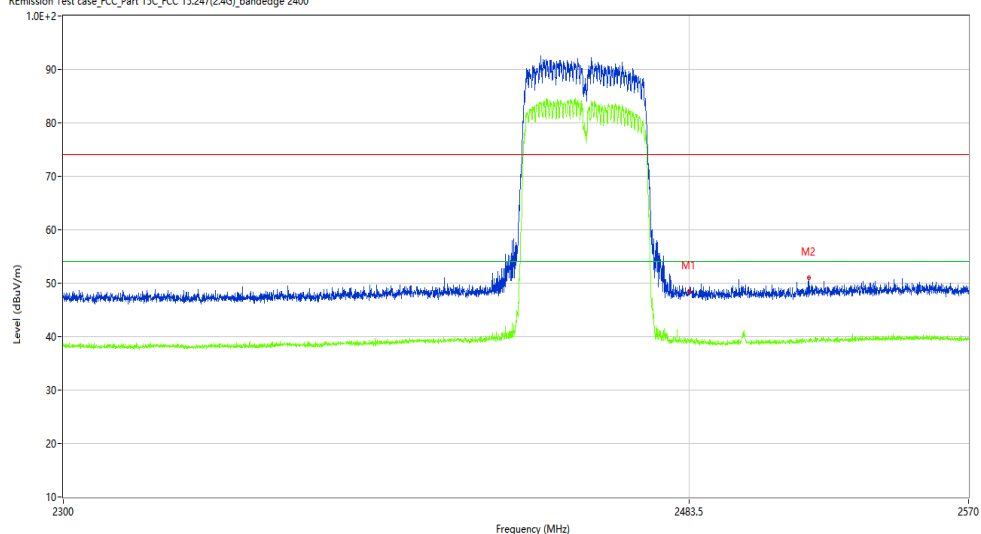

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	48.22	-10.56	74.0	25.78	Peak	173.35	100	Horizontal	Pass
1**	2483.500	38.90	-10.56	54.0	15.10	AV	173.35	100	Horizontal	Pass
2	2520.252	51.07	-10.20	74.0	22.93	Peak	64.40	100	Horizontal	Pass
2**	2520.252	39.55	-10.20	54.0	14.45	AV	64.40	100	Horizontal	Pass

WIFI2.4G-Bandedge –N40-High channel- Vertical-TX

Test result

Project Number: Certification

Test Time: 2025-12-12_17.09.53

EUT Name: N.A

Test Engineer: CJY

Manufacturer: N.A

Test Standard: FCC

Model: Cyber1

Work Addition: TX

Temp.(oC): 23.1℃


Load: Full load

Hum.: 45%

Remark: DR-RSE01-E25110007-01#02

Temp.(oC) 20

RfEmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

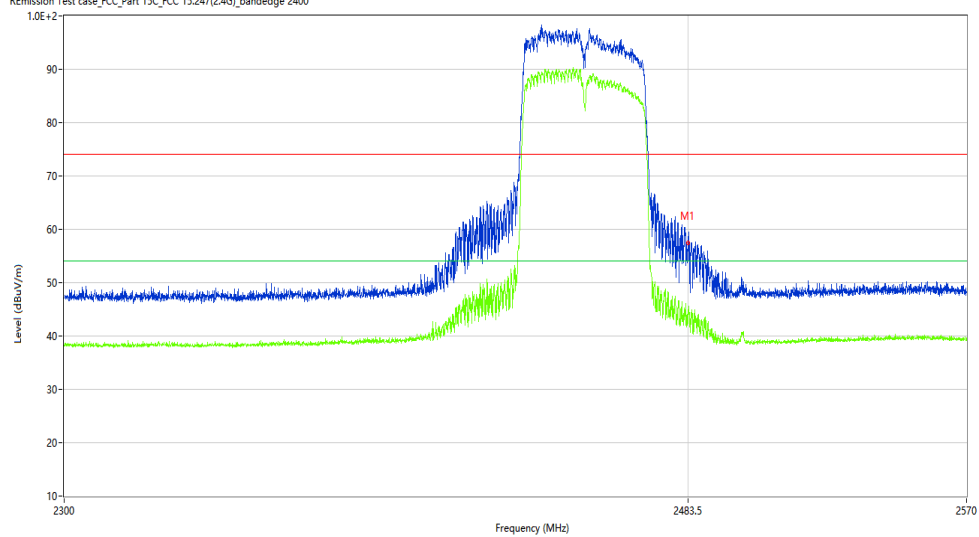

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.49	-10.56	74.0	16.51	Peak	119.80	100	Vertical	Pass
1**	2483.500	44.60	-10.56	54.0	9.40	AV	119.80	100	Vertical	Pass