RF Test Report

For

Applicant name:	**Powerscale Corporation**
Address:	48 E 6th St, Paterson, NJ 07524 USA
EUT name:	Humidifier
Brand name:	POWERSCALE
Model number:	MF6
Series model number:	MF2, MF3, MF4, MF5
FCC ID:	2BRSP-MF6

Issued By

Company name:	**BTF Testing Lab (Shenzhen) Co., Ltd.**
Address:	Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Report number:	BTF251117R00102
Test standards:	FCC CFR Title 47 Part 15 Subpart C (§ 15.247)
Test conclusion:	Pass
Date of sample receipt:	2025/11/4
Test date:	2025/11/4~2025/11/14
Date of issue:	2025/11/17

Prepared by: Chris Liu

Chris Liu /Project engineer

Approved by: Ryan CJ /EMC manager

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue date	Revisions content
R_V0	2025/11/17	Original

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

Table of Contents

1 Introduction 4
1.1 Laboratory Location 4
1.2 Laboratory Facility 4
1.3 Announcement 4
2 Product Information 5
2.1 Application Information 5
2.2 Manufacturer Information 5
2.3 Factory Information 5
2.4 General Description of Equipment under Test (EUT) 5
2.5 Technical Information 5
2.6 Channel List 6
3 Test Information 7
3.1 Test Standards 7
3.2 Summary of Test 7
3.3 Uncertainty of Test 7
3.4 Additions to, deviations, or exclusions from the method 8
3.5 Test Auxiliary Equipment 8
3.6 Test Equipment List 8
4 Test Configuration 10
4.1 Environment Condition 10
4.2 Test mode 10
4.3 Test Channel of EUT 10
4.4 Test software 10
4.5 Test procedure 11
4.6 Test Setup Block 12
5 Technical requirements specification 14
5.1 Antenna Requirement 14
5.2 AC Power Line Conducted Emission 14
5.2.1 Test Data: 14
5.3 Emissions in Restricted Frequency Bands 17
5.3.1 Test Data: 17
5.4 Emissions in Non-restricted Frequency Bands(below 1GHz) 19
5.4.1 Test Data: 19
5.5 Emissions in Non-restricted Frequency Bands(above 1GHz) 22
5.5.1 Test Data: 22
5.6 Duty Cycle 24
5.6.1 Test Data: 24
5.7 Occupied Bandwidth 25
5.7.1 Test Data: 25
5.8 Maximum Conducted Output Power 26
5.8.1 Test Data: 26
5.9 Power Spectral Density 27
5.9.1 Test Data: 27
5.10 Emissions in non-restricted frequency bands 28
5.10.1 Test Data: 28
6 Test Setup Photos 29
7 EUT Constructional Details (EUT Photos) 29

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

1 Introduction

1.1 Laboratory Location

Test location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Description:	All measurement facilities used to collect the measurement data are located at Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Phone number:	+86-0755-23146130
Fax number:	+86-0755-23146130

1.2 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1409**
  BTF Testing Lab (Shenzhen) Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The test firm Registration No. is 695374.
- **CNAS - Registration No.: CNAS L17568**
  BTF Testing Lab (Shenzhen) Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L17568.
- **A2LA - Registration No.: 6660.01**
  BTF Testing Lab (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

1.3 Announcement

(1) The test report reference to the report template version v0.
(2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
(3) The test report is invalid if there is any evidence and/or falsification.
(4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
(5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
(6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.
(7) All entrusted information in this report is provided by the client and has been confirmed through consultation with the client; The testing items for this report have been discussed and confirmed with the client, and our company is only responsible for the content reflected in the report.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdon g, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

2 Product Information

2.1 Application Information

Company name:	Powerscale Corporation
Address:	48 E 6th St, Paterson, NJ 07524 USA

2.2 Manufacturer Information

Company name:	GUANGDONG FOREIGN TRADE IMP AND EXP CO LTD.
Address:	NO. 351 TIANHE ROAD, GUANGZHOU, CHINA

2.3 Factory Information

Company name:	GUANGDONG FOREIGN TRADE IMP AND EXP CO LTD.
Address:	NO. 351 TIANHE ROAD, GUANGZHOU, CHINA

2.4 General Description of Equipment under Test (EUT)

EUT name	Humidifier
Under test model name	MF6
Series model name	MF2, MF3, MF4, MF5
Description of model name differentiation	All models were same as internal structure and pcb layout, the difference is model name.
Hardware Version	/
Software Version	/
Rating:	Power Supply Model GF240005 Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 24V, 0.5A

2.5 Technical Information

Operation frequency:	2402MHz ~ 2480MHz
Channel number:	40
Equipment type:	Adaptive equipment
Modulation technology:	GFSK
Max. Conducted Power:	6.79 dBm
Antenna type:	PCB Antenna
Antenna gain:	2.54 dBi (declare by Applicant)
Antenna transmit mode:	SISO (1TX, 1RX)

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

2.6 Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
…	…	…	…	…	…	…	…
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz
Remark: Channel 0, 19 & 39 have been tested.							

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdon g, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

3 Test Information

3.1 Test Standards

Identity	Document Title
FCC CFR Title 47 Part 15 Subpart C (§15.247)	Intentional Radiators - Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10-2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of The FCC Rules

3.2 Summary of Test

Clauses	Test Items	Result
Part 15.203	Antenna requirement	PASS
47 CFR 15.207(a)	Conducted Emission at AC power line	PASS
47 CFR 15.247(b)(3)	Duty Cycle	PASS
47 CFR 15.247(a)(2)	Occupied Bandwidth	PASS
47 CFR 15.247(b)(3)	Maximum Conducted Output Power	PASS
47 CFR 15.247(e)	Power Spectral Density	PASS
47 CFR 15.247(d)	Emissions in non-restricted frequency bands	PASS
47 CFR 15.247(d)	Band edge emissions (Radiated)	PASS
47 CFR 15.247(d)	Emissions in restricted frequency bands (below 1GHz)	PASS
47 CFR 15.247(d)	Emissions in restricted frequency bands (above 1GHz)	PASS

Remark:

1. Pass: met the requirements.

2. N/A: not applicable.

3.3 Uncertainty of Test

Measurement	Value
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Supply voltages	±3 %
Time	±5 %
Conducted Emission for LISN (9kHz ~ 150kHz)	±2.97 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.45 dB
Radiated Emission (30MHz ~ 1000MHz)	±4.80 dB
Radiated Emission (1GHz ~ 18GHz)	±4.82 dB

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.4 Additions to, deviations, or exclusions from the method

None

3.5 Test Auxiliary Equipment

No.	Description	Manufacturer	Model	Serial Number	Certification
1	PC	HP	Zhan 66P	N/A	N/A
2	/	/	/	/	/

3.6 Test Equipment List

Radiated Emission Test					
Test Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI7	101032	2025/10/17	2026/10/16
Signal Analyzer	Rohde & Schwarz	FSQ40	100010	2025/10/17	2026/10/16
Log periodic antenna	Schwarzbeck	VULB 9168	01328	2025/10/18	2026/10/17
Preamplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9744	00246	2025/5/26	2026/5/25
BELOW-Cable	REBES Talent	9K1G	21101576	2025/8/23	2026/8/22
Horn Antenna	Schwarzbeck	BBHA9120D	2597	2025/10/18	2026/10/17
Preamplifier (1GHz ~ 18GHz)	Schwarzbeck	BBV9718D	00008	2025/5/26	2026/5/25
Preamplifier	TSTPASS	LNA10180G45	TS2215007	2025/5/26	2026/5/25
ABOVE-Cable	REBES Talent	1~18G	21101558	2025/8/23	2026/8/22
Horn Antenna	SCHWARZBECK	BBHA9170	1157	2025/10/18	2026/10/17
Low Noise Pre-amplifier	Sket	LNPA_1840G-50	SK2022032902	2025/10/17	2026/10/16
ABOVE-Cable2	REBES Talent	18~40G	21101686	2025/8/23	2026/8/22
ABOVE-Cable1	REBES Talent	18~40G	21101687	2025/8/23	2026/8/22
Test Software	Frad	EZ_EMC	Version: FA-03A2 RE+		

Conducted Emission Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI3	101422	2025/10/17	2026/10/16
V-LISN	Schwarzbeck	NSLK 8127	01073	2025/8/23	2026/8/22
Coaxial Switcher	Schwarzbeck	CX210	CX210	/	/
Pulse Limiter	Schwarzbeck	VTSD 9561-F	00953	/	/
LISN-Cable	REBES Talent	LISN9K30M	21101580	2025/8/23	2026/8/22
Test Software	Frad	EZ_EMC	Version: EMC-CON 3A1.1+		

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

Conducted test method					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Cell Site Test Set	HP	8921A	US35010158	2025/10/17	2026/10/16
Spectrum Analyzer	Keysight	N9020A	MY50410020	2025/10/17	2026/10/16
ESG Vector Signal Generator	Agilent	E4438C	MY45094854	2025/10/17	2026/10/16
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2025/10/17	2026/10/16
Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	161997	2025/10/17	2026/10/16
Programmable Constant Temperature And Humidity Test Chamber	ZZCKONG	ZZ-K02A	20210928007	2025/10/17	2026/10/16
DC Power Supply	Tongmen	etm-6050c	20211026123	2025/10/17	2026/10/16
RF Control Unit	Techy	TR1029-1	/	2025/10/17	2026/10/16
RF Sensor Unit	Techy	TR1029-2	/	2025/10/17	2026/10/16
RF shielding box	Yinuoxin Electronics	50*50*50 cm	N/A	2025/5/26	2026/5/25
Test Software	TST Pass	/	Version: 2.0		

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

4 Test Configuration

4.1 Environment Condition

Selected Values During Tests		
Temperature	Relative Humidity	Ambient Pressure
Normal: +15°C to +35°C Extreme: -30°C to +50°C	20% to 75%	86 kPa to 106 kPa

4.2 Test mode

(TM1)Transmitting mode:	Keep the EUT in continuously transmitting mode with modulation
We have verified the construction and function in typical operation. All the test items were carried out with the EUT in above test modes.	

Clauses	Test Items	Test mode
Part 15.203	Antenna requirement	TM1
47 CFR 15.207(a)	Conducted Emission at AC power line	TM1
47 CFR 15.247(b)(3)	Duty Cycle	TM1
47 CFR 15.247(a)(2)	Occupied Bandwidth	TM1
47 CFR 15.247(b)(3)	Maximum Conducted Output Power	TM1
47 CFR 15.247(e)	Power Spectral Density	TM1
47 CFR 15.247(d)	Emissions in non-restricted frequency bands	TM1
47 CFR 15.247(d)	Band edge emissions (Radiated)	TM1
47 CFR 15.247(d)	Emissions in restricted frequency bands (below 1GHz)	TM1

4.3 Test Channel of EUT

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	19	2440	39	2480

4.4 Test software

Test software:	Version:	Power Class:
UI_mptool	1V3	default

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

4.5 Test procedure

AC Power Line Conducted Emission
The EUT is connected to the power mains through a LISN which provides 50 Ω/50 μH of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.
1. Level= Read Level+ Cable Loss+ LISN Factor 2. Margin=Level-Limit=Reading+factor-Limit
Radiated test method
1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested，and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, recorded the test results. 4. The substitution antenna shall be used to replace the equipment under test. 5. The reference point of the substitution antenna shall coincide with the volume centre of the UUT when its antenna is internal. 6. Set the required test frequency for the signal generator, adjust the emission level, until the spectrum analyzer reading on the receiving link is consistent with the recorded value in step 3, and the recorded signal generator emission level. 7. Final results = S.G. output (dBm) + Antenna Gain(dB/dBi) – Cable Loss (dB). This report only reflects the final results.
1. Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor 2. Margin=Level-Limit=Reading+factor-Limit
Conducted test method
1. The Bluetooth LE antenna port of EUT was connected to the test port of the test system through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

4.6 Test Setup Block

1) Conducted emission measurement:

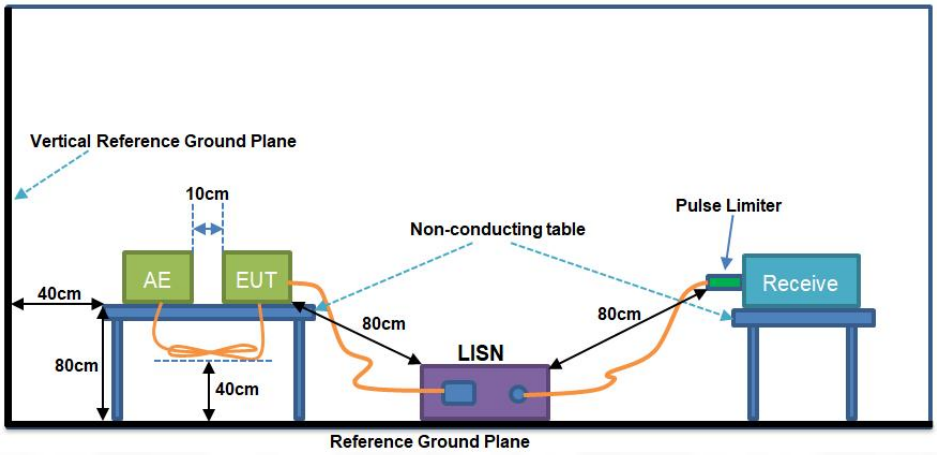

2) Conducted test method:

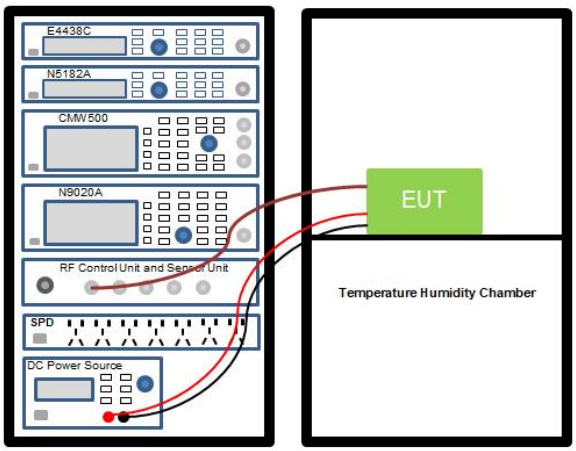

3) Radiated test method:

Below 1GHz

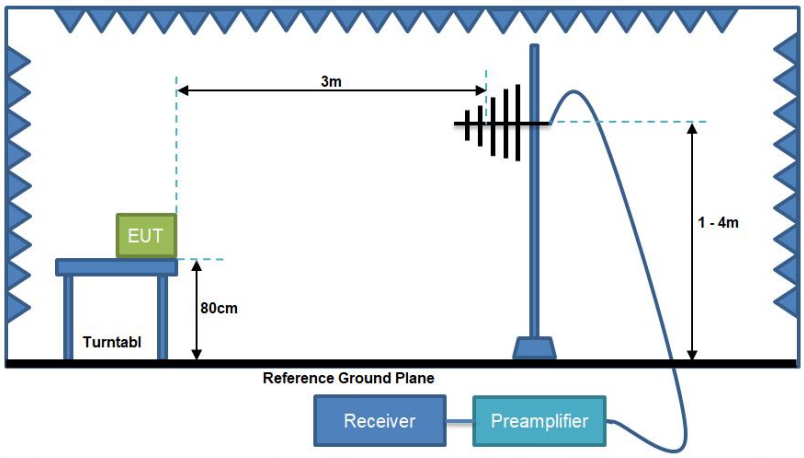

Above 1GHz

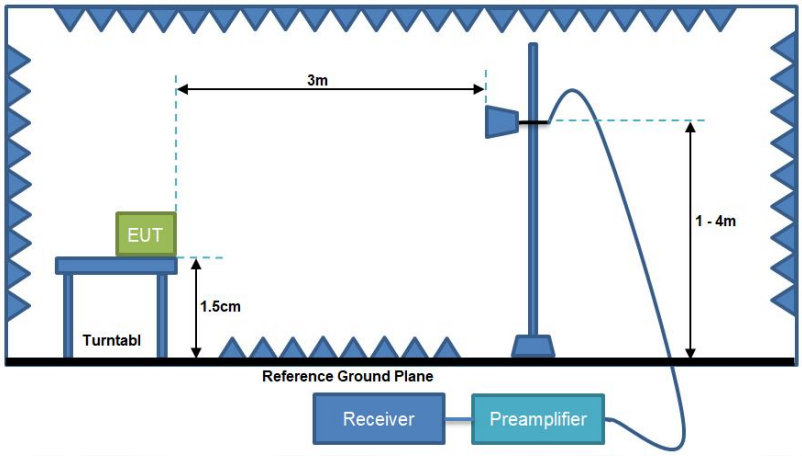

5 Technical requirements specification

5.1 Antenna Requirement

§15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

§15.247(b) (4) requirement:

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

E.U.T Antenna:	The Bluetooth antenna is a PCB antenna which permanently attached, and the best case gain of the antenna is 2.54 dBi. See product internal photos for details.

5.2 AC Power Line Conducted Emission

Test Requirement:	Except as shown in paragraphs (b)and (c)of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).
Test Method:	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices
Test Limit:	Frequency of emission (MHz) / Conducted limit (dBμV): Quasi-peak / Average 0.15-0.5: 66 to 56* / 56 to 46* 0.5-5: 56 / 46 5-30: 60 / 50 *Decreases with the logarithm of the frequency.
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5℃
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V 60Hz

5.2.1 Test Data:

Remark: The report only reflects the test data of worst mode.

Test phase: L phase

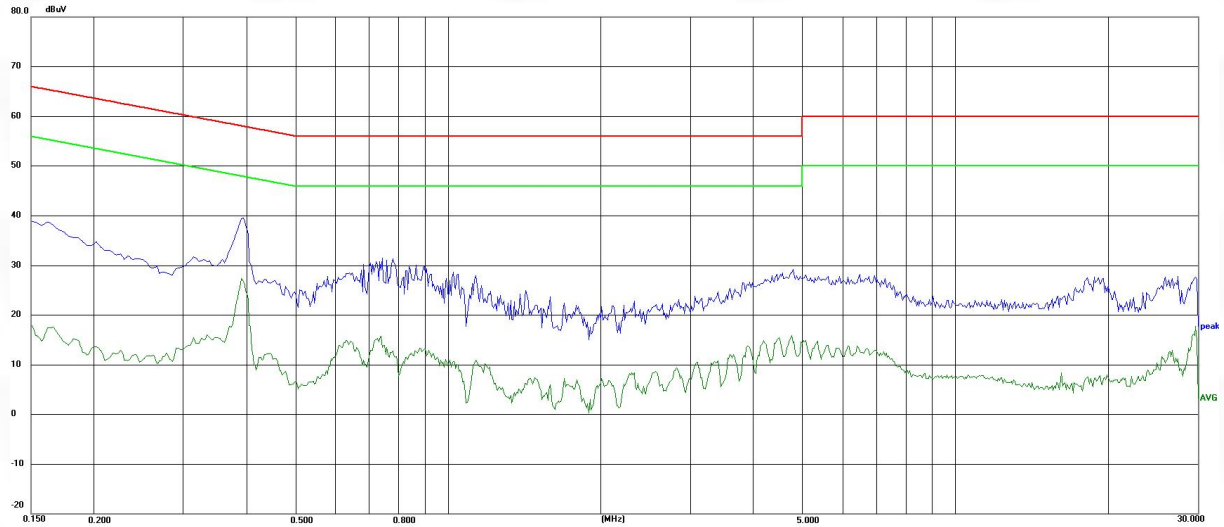

No.	Frequency (MHz)	QP Value (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Value (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Result	Line
1	0.390	39.59	58.07	-18.48	27.42	48.07	-20.65	Pass	Line 1
2	0.630	28.57	56.00	-27.43	14.88	46.00	-31.12	Pass	Line 1
3	0.738	31.51	56.00	-24.49	15.81	46.00	-30.19	Pass	Line 1
4	0.878	30.14	56.00	-25.86	13.30	46.00	-32.70	Pass	Line 1
5	4.494	28.56	56.00	-27.44	15.46	46.00	-30.54	Pass	Line 1
6	4.750	29.24	56.00	-26.76	15.84	46.00	-30.16	Pass	Line 1

Note:Margin=Level-Limit=Reading+factor-Limit

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

Test phase: N phase

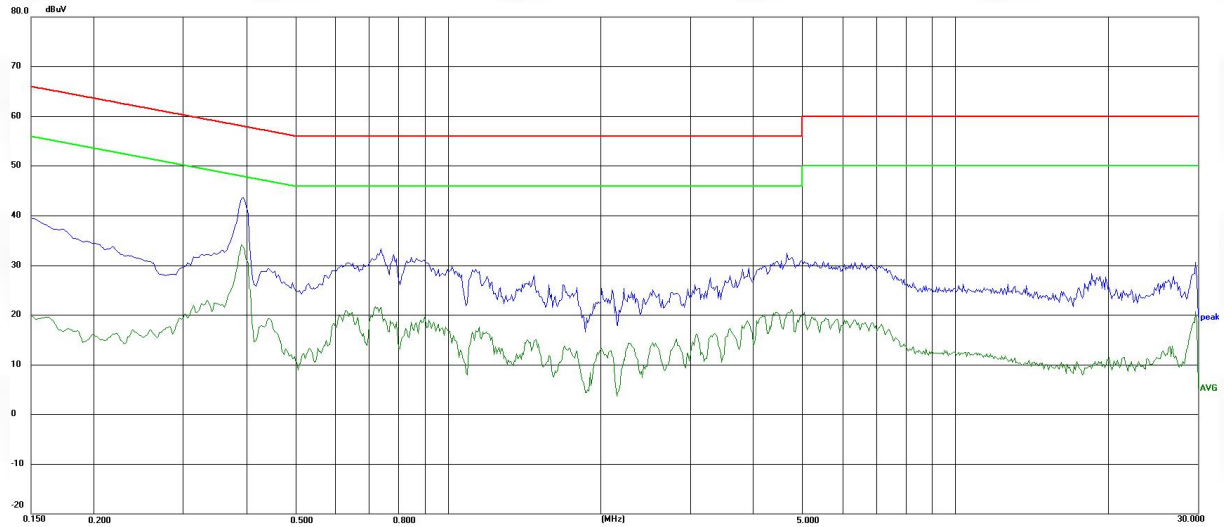

No.	Frequency (MHz)	QP Value (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Value (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Result	Line
1	0.334	32.66	59.35	-26.69	22.98	49.35	-26.37	Pass	Neutral
2	0.390	43.71	58.07	-14.36	34.23	48.07	-13.84	Pass	Neutral
3	0.630	30.52	56.00	-25.48	20.87	46.00	-25.13	Pass	Neutral
4	0.718	31.36	56.00	-24.64	21.67	46.00	-24.33	Pass	Neutral
5	0.898	31.12	56.00	-24.88	19.63	46.00	-26.37	Pass	Neutral
6	4.770	31.69	56.00	-24.31	21.20	46.00	-24.80	Pass	Neutral

Note:Margin=Level-Limit=Reading+factor-Limit

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

5.3 Emissions in Restricted Frequency Bands

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`
Test Method:	Radiated emissions tests
Test Limit:	Frequency (MHz) / Field strength (microvolts/meter) / Measurement distance (meters) 0.009-0.490 / 2400/F(kHz) / 300 0.490-1.705 / 24000/F(kHz) / 30 1.705-30.0 / 30 / 30 30-88 / 100 ** / 3 88-216 / 150 ** / 3 216-960 / 200 ** / 3 Above 960 / 500 / 3 ** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.
Procedure:	ANSI C63.10-2020 section 6.10.5.2
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5℃
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V/60Hz

5.3.1 Test Data:

Remark: The report only reflects the test data of worst mode.

Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2310.00	52.94	3.85	56.79	74.00	-17.21	Peak	Pass
2310.00	41.90	3.85	45.75	54.00	-8.25	AVG	Pass
2390.00	52.77	3.91	56.68	74.00	-17.32	Peak	Pass
2390.00	42.06	3.91	45.97	54.00	-8.03	AVG	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2310.00	50.87	3.85	54.72	74.00	-19.28	Peak	Pass
2310.00	40.74	3.85	44.59	54.00	-9.41	AVG	Pass
2390.00	52.44	3.91	56.35	74.00	-17.65	Peak	Pass

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

2390.00	41.37	3.91	45.28	54.00	-8.72	AVG	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2483.50	51.37	3.99	55.36	74.00	-18.64	Peak	Pass
2483.50	40.46	3.99	44.45	54.00	-9.55	AVG	Pass
2500.00	51.68	4.00	55.68	74.00	-18.32	Peak	Pass
2500.00	42.72	4.00	46.72	54.00	-7.28	AVG	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2483.50	52.93	3.99	56.92	74.00	-17.08	Peak	Pass
2483.50	42.18	3.99	46.17	54.00	-7.83	AVG	Pass
2500.00	50.89	4.00	54.89	74.00	-19.11	Peak	Pass
2500.00	42.68	4.00	46.68	54.00	-7.32	AVG	Pass

Note:Margin=Level-Limit=Reading+factor-Limit

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

5.4 Emissions in Non-restricted Frequency Bands(below 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`
Test Method:	Radiated emissions tests
Test Limit:	Frequency (MHz) / Field strength (microvolts/meter) / Measurement distance (meters) 0.009-0.490 / 2400/F(kHz) / 300 0.490-1.705 / 24000/F(kHz) / 30 1.705-30.0 / 30 / 30 30-88 / 100 ** / 3 88-216 / 150 ** / 3 216-960 / 200 ** / 3 Above 960 / 500 / 3 ** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.
Procedure:	ANSI C63.10-2020 section 6.6.4
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5℃
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V/60Hz

5.4.1 Test Data:

Remark: The report only reflects the test data of worst mode.

Test antenna polarization: Horizontal(30 MHz to 1 GHz)

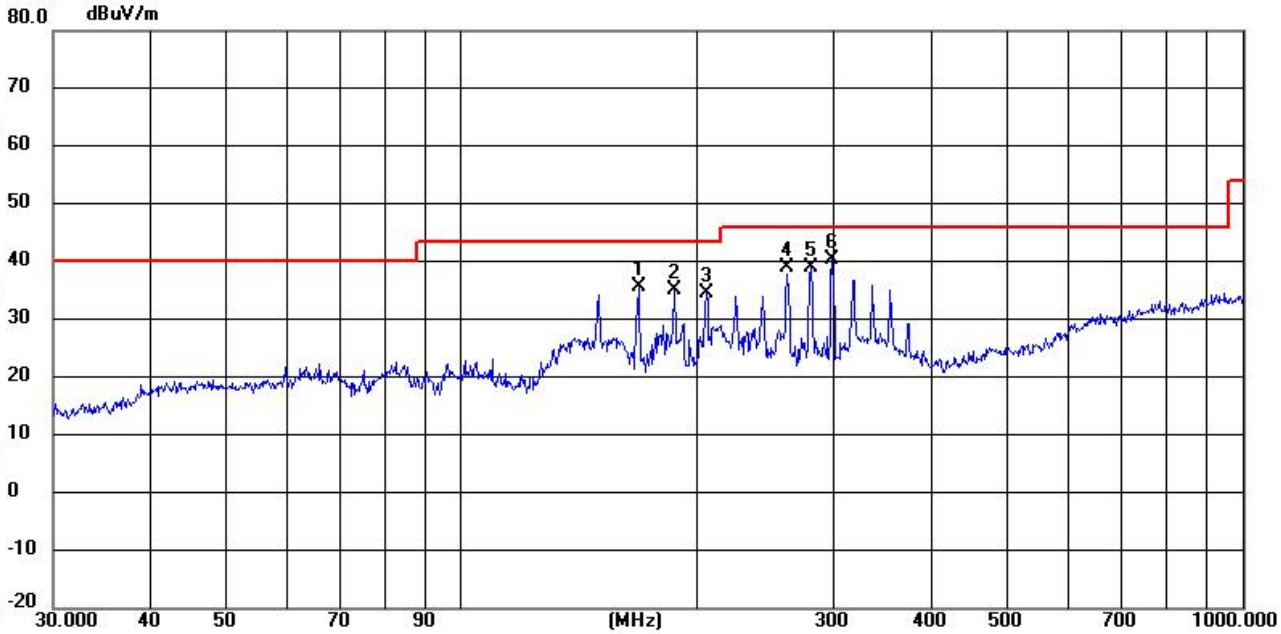

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	168.857	18.57	17.03	35.60	43.50	-7.90	QP	
2	187.671	17.00	18.06	35.06	43.50	-8.44	QP	
3	206.307	17.84	16.64	34.48	43.50	-9.02	QP	
4	261.631	22.75	16.16	38.91	46.00	-7.09	QP	
5	280.392	23.73	15.41	39.14	46.00	-6.86	QP	
6 *	299.054	25.96	14.38	40.34	46.00	-5.66	QP	

Note:Margin=Level-Limit=Reading+factor-Limit

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

Test antenna polarization: Vertical (30 MHz to 1 GHz)

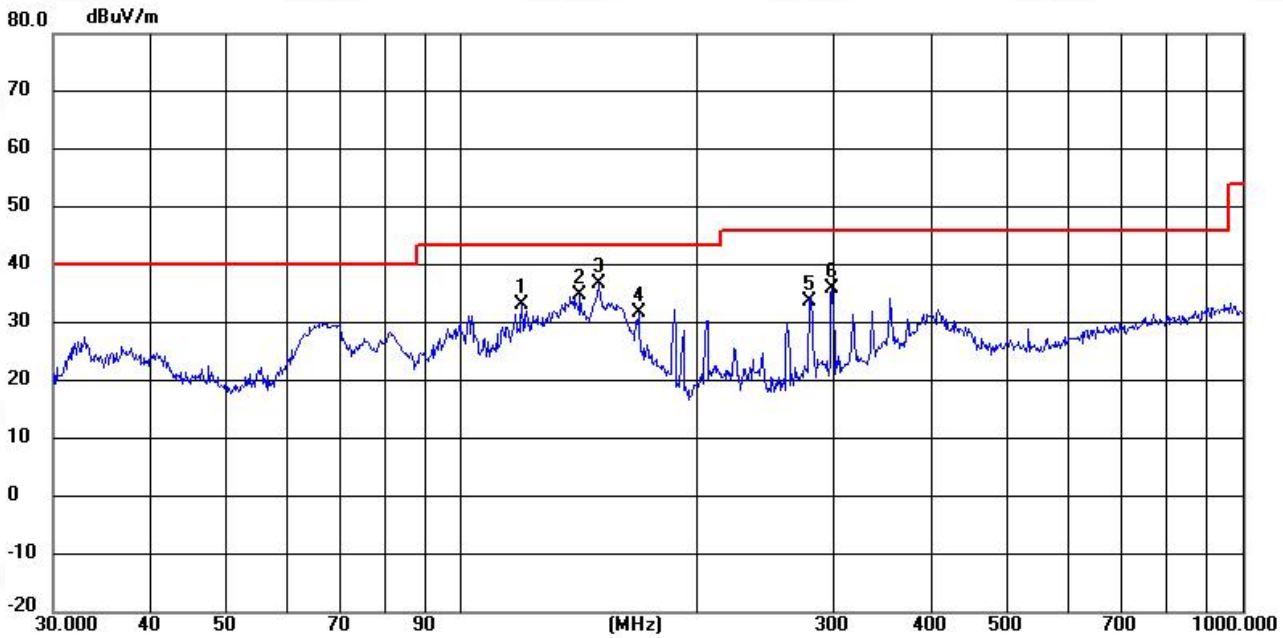

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	119.646	20.93	12.34	33.27	43.50	-10.23	QP	
2	142.262	19.56	15.30	34.86	43.50	-8.64	QP	
3 *	150.077	22.12	14.81	36.93	43.50	-6.57	QP	
4	168.857	17.77	14.03	31.80	43.50	-11.70	QP	
5	279.656	19.04	14.70	33.74	46.00	-12.26	QP	
6	299.053	20.86	15.05	35.91	46.00	-10.09	QP	

Note:Margin=Level-Limit=Reading+factor-Limit

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

5.5 Emissions in Non-restricted Frequency Bands(above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`
Test Method:	Radiated emissions tests
Test Limit:	Frequency (MHz) / Field strength (microvolts/meter) / Measurement distance (meters) 0.009-0.490 / 2400/F(kHz) / 300 0.490-1.705 / 24000/F(kHz) / 30 1.705-30.0 / 30 / 30 30-88 / 100 ** / 3 88-216 / 150 ** / 3 216-960 / 200 ** / 3 Above 960 / 500 / 3 ** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.
Procedure:	ANSI C63.10-2020 section 6.6.4
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5℃
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V/60Hz

5.5.1 Test Data:

Remark: The report only reflects the test data of worst mode.
Test frequency up to 25GHz and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.

Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4804.00	75.85	-48.89	26.96	74.00	-47.04	Peak	Pass
4804.00	66.12	-48.89	17.23	54.00	-36.77	AVG	Pass
7206.00	75.26	-47.02	28.24	74.00	-45.76	Peak	Pass
7206.00	70.64	-47.02	23.62	54.00	-30.38	AVG	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4804.00	75.37	-48.89	26.48	74.00	-47.52	Peak	Pass
4804.00	66.87	-48.89	17.98	54.00	-36.02	AVG	Pass
7206.00	78.86	-47.02	31.84	74.00	-42.16	Peak	Pass

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

7206.00	67.39	-47.02	20.37	54.00	-33.63	AVG	Pass
Test Channel: Middle channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4880.00	80.52	-48.84	31.68	74.00	-42.32	Peak	Pass
4880.00	70.13	-48.84	21.29	54.00	-32.71	AVG	Pass
7320.00	76.81	-46.88	29.93	74.00	-44.07	Peak	Pass
7320.00	66.66	-46.88	19.78	54.00	-34.22	AVG	Pass
Test Channel: Middle channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4880.00	75.59	-48.84	26.75	74.00	-47.25	Peak	Pass
4880.00	70.57	-48.84	21.73	54.00	-32.27	AVG	Pass
7320.00	80.17	-46.88	33.29	74.00	-40.71	Peak	Pass
7320.00	67.01	-46.88	20.13	54.00	-33.87	AVG	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4960.00	77.10	-48.79	28.31	74.00	-45.69	Peak	Pass
4960.00	67.65	-48.79	18.86	54.00	-35.14	AVG	Pass
7440.00	80.15	-46.74	33.41	74.00	-40.59	Peak	Pass
7440.00	68.69	-46.74	21.95	54.00	-32.05	AVG	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4960.00	79.23	-48.79	30.44	74.00	-43.56	Peak	Pass
4960.00	69.33	-48.79	20.54	54.00	-33.46	AVG	Pass
7440.00	78.75	-46.74	32.01	74.00	-41.99	Peak	Pass
7440.00	65.43	-46.74	18.69	54.00	-35.31	AVG	Pass

Note:Margin=Level-Limit=Reading+factor-Limit

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

5.6 Duty Cycle

Test Requirement:	All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.
Test Method:	ANSI C63.10-2020
Test Limit:	No limits, only for report use.
Procedure:	The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal: 1) Set the center frequency of the instrument to the center frequency of the transmission. 2) Set RBW ≥ OBW if possible; otherwise, set RBW to the largest available value. 3) Set VBW ≥ RBW. Set detector = peak or average. 4) The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if T ≤ 16.7us.)
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5℃
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V/60Hz

5.6.1 Test Data:

Please Refer to Appendix-BLE for Details

5.7 Occupied Bandwidth

Test Requirement:	Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	DTS bandwidth
Test Limit:	Section (a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Procedure:	a) Set RBW = 100 kHz. b) Set the VBW >= [3 × RBW]. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5℃
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V/60Hz

5.7.1 Test Data:

Please Refer to Appendix-BLE for Details

5.8 Maximum Conducted Output Power

Test Requirement:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	Maximum peak conducted output power
Test Limit:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Procedure:	ANSI C63.10-2020, section 11.9.1 Maximum peak conducted output power
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5℃
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V/60Hz

5.8.1 Test Data:

Please Refer to Appendix-BLE for Details

5.9 Power Spectral Density

Test Requirement:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	Maximum power spectral density level in the fundamental emission
Test Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5℃
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V/60Hz

5.9.1 Test Data:

Please Refer to Appendix-BLE for Details

5.10 Emissions in non-restricted frequency bands

Test Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	Emissions in nonrestricted frequency bands
Test Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Procedure:	ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3
Test Setup:	See section 4.6 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos
Operating Environment:	
Temperature:	22.5℃
Humidity:	46%RH
Atmospheric Pressure:	1010 hpa
Test voltage:	AC 120V/60Hz

5.10.1 Test Data:

Please Refer to Appendix-BLE for Details

6 Test Setup Photos

Please refer to the Appendix I Test Setup Photos

7 EUT Constructional Details (EUT Photos)

Please refer to the Appendix II External Photos &Appendix III External Photos

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdon g, China
Email: info@btf-lab.com Tel: +86-755-23146130 http://www.btf-lab.com

BTF Testing Lab (Shenzhen) Co., Ltd.

Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China

www.btf-lab.com

--END OF REPORT--