

TEST REPORT

FCC ID: 2BTDB-LPRCVR**Product: Smart Home Controller****Model: LEO-PRO-RCVR****Trade Mark: N/A****Report No.: WSCT-ANAB-R&E251100085A-15B****Issued Date: 09 December 2025****Issued for:****Flexfire LEDs, Inc.****3554 Business Park Dr. Suite F, Costa Mesa, CA 92626****Issued By:****World Standardization Certification & Testing Group(Shenzhen) Co.,Ltd.
Building A-B,Baoli'an Industrial Park,No.58 and 60,Tangtou Avenue, Shiyan
Street, Bao'an District, Shenzhen City, Guangdong Province, China****TEL: +86-755-26996192****FAX: +86-755-86376605**

Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1. Test Certification	3
2. GENERAL DESCRIPTION OF EUT	4
3. Test Result Summary	5
4. TEST METHODOLOGY	6
4.1. CONFIGURATION OF SYSTEM UNDER TEST	7
4.2. DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	8
5. MEASUREMENT INSTRUMENTS	9
6. Facilities and Accreditations	10
6.1. FACILITIES	10
6.2. ACCREDITATIONS	10
6.3. MEASUREMENT UNCERTAINTY	11
7. EMC EMISSION TEST	12
7.1. CONDUCTED EMISSION MEASUREMENT	12
7.2. RADIATED EMISSION MEASUREMENT	16
8. Test Setup Photographs	23

Report No.: WSCT-ANAB-R&E251100085A-15B Issued Date: 09 December 2025

1. Test Certification

Product: Smart Home Controller
Model No.: LEO-PRO-RCVR
Additional Model: N/A
Applicant: Flexfire LEDs, Inc.
3554 Business Park Dr. Suite F, Costa Mesa, CA 92626
Manufacturer: Flexfire LEDs, Inc.
3554 Business Park Dr. Suite F, Costa Mesa, CA 92626
Received date: 09 October 2025
Date of Test: 09 October 2025 to 11 November 2025
Applicable Standards: FCC CFR Title 47 Part 15 Subpart B

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen) Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Jiang Guanliang
(Jiang Guanliang)

Checked By: Qin Shuiquan
(Qin Shuiquan)

Approved By: Li Huaibi
(Li Huaibi)

Date: 09 December 2025

Report No.: WSCT-ANAB-R&E251100085A-15B Issued Date: 09 December 2025

2. GENERAL DESCRIPTION OF EUT

Product Name:	Smart Home Controller
Model :	LEO-PRO-RCVR
Trade Mark:	N/A
Hardware version:	B1
Operating Voltage:	OUTPUT: 3A x 5CH Max: 15A INPUT:12V-24VDC
Remark:	N/A.

Note: N/A stands for no applicable.

Report No.: WSCT-ANAB-R&E251100085A-15B Issued Date: 09 December 2025

3. Test Result Summary

Requirement	CFR 47 Section	Result
CONDUCTED EMISSION	§15.107	PASS
RADIATED EMISSION	§15.109	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.


4. TEST METHODOLOGY

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Work
Mode 1	Idle

4.1. CONFIGURATION OF SYSTEM UNDER TEST

Configuration Setup 1:

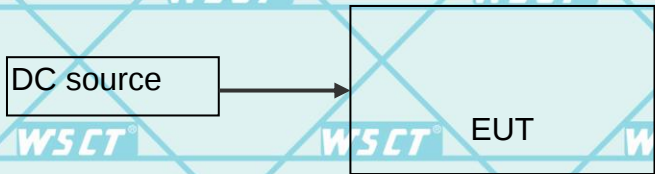

(EUT: RF Remote Control)

I/O Port of EUT			
I/O Port Type	Q'TY	Cable	Tested with
/	/	/	/

Report No.: WSCT-ANAB-R&E251100085A-15B Issued Date: 09 December 2025

4.2. DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	/	/	/	/	/

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 「Length」 column.

5. MEASUREMENT INSTRUMENTS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibrated	Calibrated until
Test software	--	EZ-EMC	CON-03A	--	--
ESCI Test Receiver	R&S	ESCI	100005	2025-11-03	2026-11-02
LISN	AFJ	LS16	16010222119	2025-11-03	2026-11-02
LISN(EUT)	Mestec	AN3016	04/10040	2025-11-03	2026-11-02
pre-amplifier	CDSI	PAP-1G18-38	--	2025-11-03	2026-11-02
System Controller	CT	SC100	-	2025-11-03	2026-11-02
Bi-log Antenna	Chase	CBL6111C	2576	2025-11-03	2026-11-02
Spectrum analyzer	R&S	FSU26	200409	2025-11-03	2026-11-02
Horn Antenna	SCHWARZBECK	9120D	1141	2025-11-03	2026-11-02
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	2025-11-03	2026-11-02
Pre Amplifier	H.P.	HP8447E	2945A02715	2025-11-03	2026-11-02
9*6*6 Anechoic	--	--	--	2025-11-03	2026-11-02

6. Facilities and Accreditations

6.1. Facilities

All measurement facilities used to collect the measurement data are located at **World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.**

Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyan Street, Bao'an District, Shenzhen City, Guangdong Province, China

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

ANAB - Certificate Number: AT-3951

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (ANAB). Certification Number: AT-3951

6.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1GHz)	$\pm 4.7\text{dB}$
5	All emissions, radiated(>1GHz)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2.0\%$

7. EMC EMISSION TEST

7.1. CONDUCTED EMISSION MEASUREMENT

7.1.1. POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

Report No.: WSCT-ANAB-R&E251100085A-15B Issued Date: 09 December 2025

TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

TEST SETUP

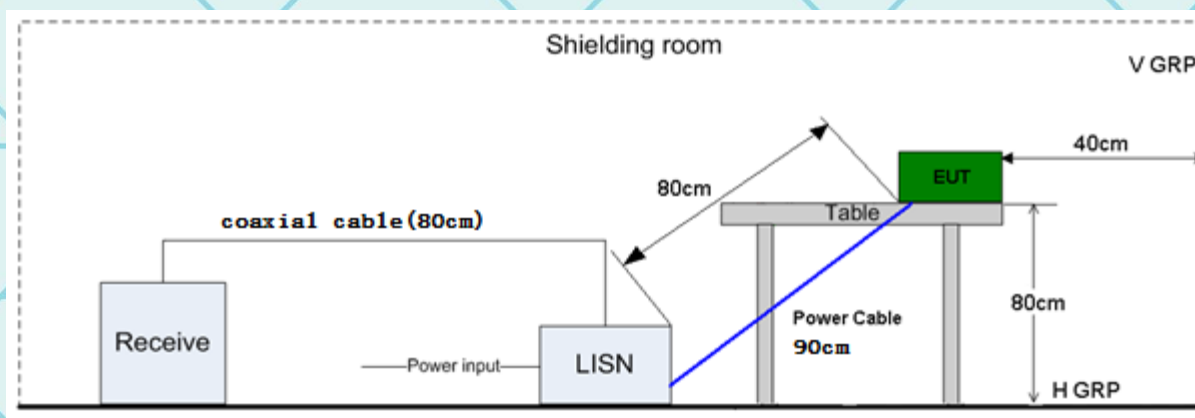


The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst. Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Report No.: WSCT-ANAB-R&E251100085A-15B Issued Date: 09 December 2025

Test Results

Please refer to following diagram for individual


Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

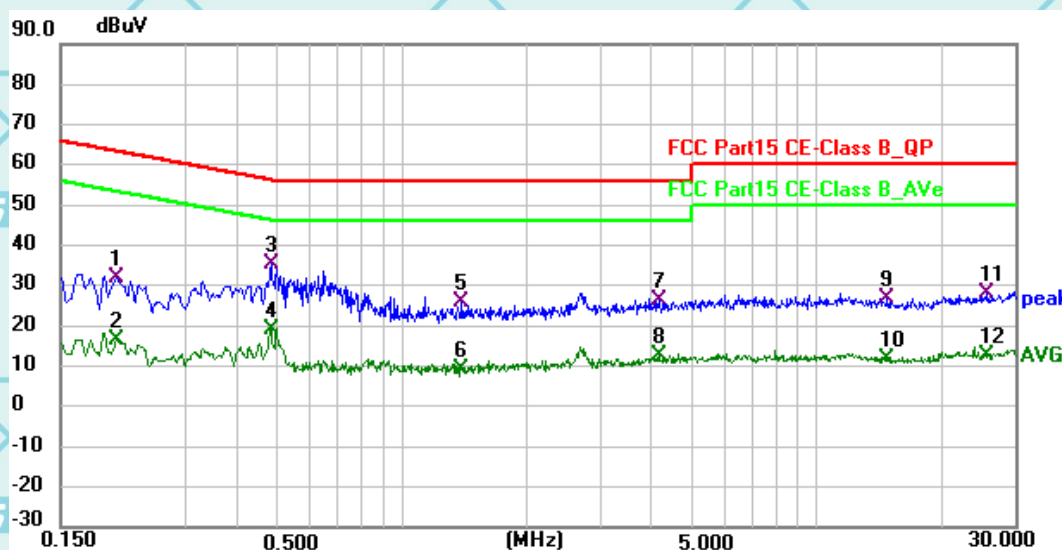

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2040	11.32	20.69	32.01	63.45	-31.44	QP
2	0.2040	-4.21	20.69	16.48	53.45	-36.97	AVG
3 *	0.4830	14.76	20.52	35.28	56.29	-21.01	QP
4	0.4830	-1.60	20.52	18.92	46.29	-27.37	AVG
5	1.3920	5.23	20.65	25.88	56.00	-30.12	QP
6	1.3920	-11.43	20.65	9.22	46.00	-36.78	AVG
7	4.1774	5.74	20.58	26.32	56.00	-29.68	QP
8	4.1774	-8.07	20.58	12.51	46.00	-33.49	AVG
9	14.7705	6.64	20.18	26.82	60.00	-33.18	QP
10	14.7705	-8.25	20.18	11.93	50.00	-38.07	AVG
11	25.8540	7.30	20.70	28.00	60.00	-32.00	QP
12	25.8540	-7.99	20.70	12.71	50.00	-37.29	AVG

Report No.: WSCT-ANAB-R&E251100085A-15B Issued Date: 09 December 2025

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

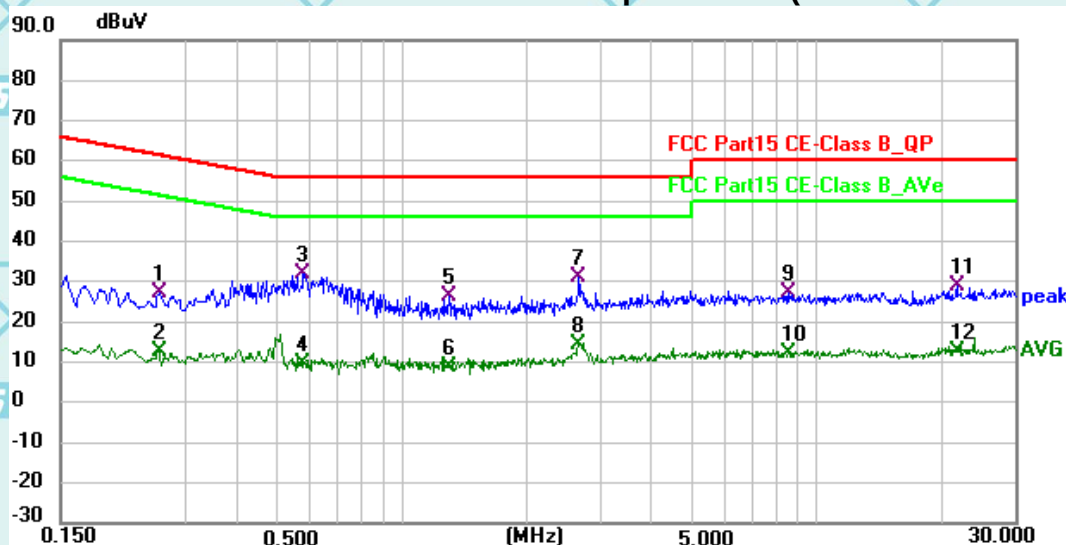

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2580	6.50	20.66	27.16	61.50	-34.34	QP
2	0.2580	-8.02	20.66	12.64	51.50	-38.86	AVG
3 *	0.5775	11.53	20.52	32.05	56.00	-23.95	QP
4	0.5775	-10.70	20.52	9.82	46.00	-36.18	AVG
5	1.3020	5.69	20.65	26.34	56.00	-29.66	QP
6	1.3020	-11.94	20.65	8.71	46.00	-37.29	AVG
7	2.6700	10.31	20.60	30.91	56.00	-25.09	QP
8	2.6700	-6.03	20.60	14.57	46.00	-31.43	AVG
9	8.5470	6.93	20.48	27.41	60.00	-32.59	QP
10	8.5470	-8.10	20.48	12.38	50.00	-37.62	AVG
11	21.8085	8.36	20.38	28.74	60.00	-31.26	QP
12	21.8085	-7.65	20.38	12.73	50.00	-37.27	AVG

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

7.2. RADIATED EMISSION MEASUREMENT

7.2.1. Radiated Emission Limits

The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

TEST SETUP

(A) Radiated Emission Test-Up Frequency 30MHz~1GHz

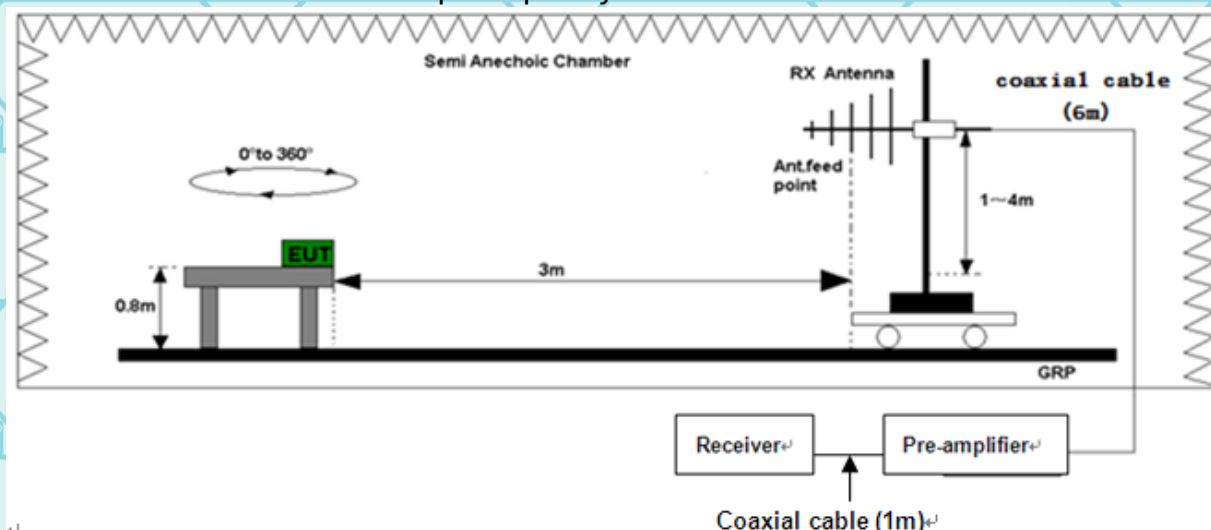

(B) Radiated Emission Test-Up Frequency Above 1GHz

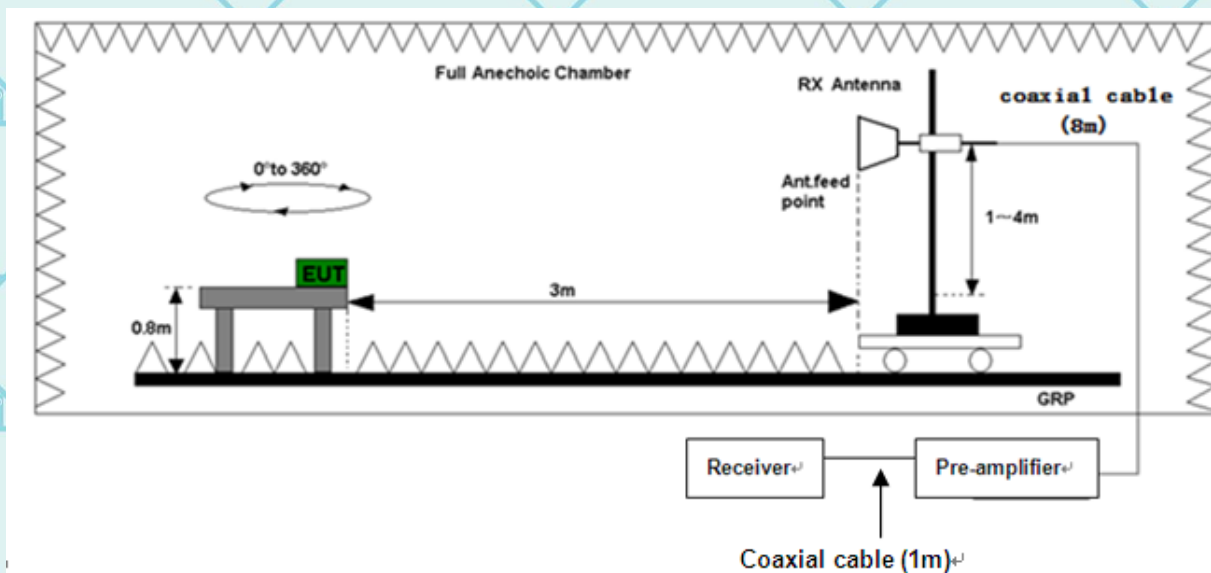

Report No.: WSCT-ANAB-R&E251100085A-15B Issued Date: 09 December 2025


7.2.2. Test Results

Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 1(the worst case)

Please refer to following diagram for individual

Below 1GHz


Horizontal:

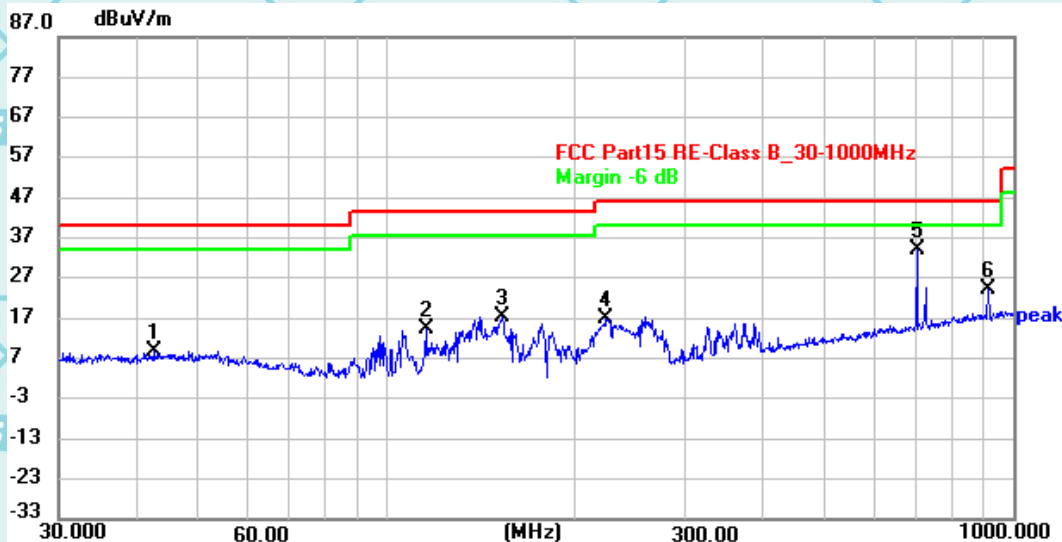

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.8622	27.61	-18.83	8.78	40.00	-31.22	peak
2	115.9287	36.11	-21.75	14.36	43.50	-29.14	peak
3	153.7385	36.95	-19.54	17.41	43.50	-26.09	peak
4	224.8147	40.24	-23.42	16.82	46.00	-29.18	peak
5 *	704.2261	46.05	-12.09	33.96	46.00	-12.04	peak
6	912.8620	33.89	-9.84	24.05	46.00	-21.95	peak

Report No.: WSCT-ANAB-R&E251100085A-15B Issued Date: 09 December 2025

Vertical:

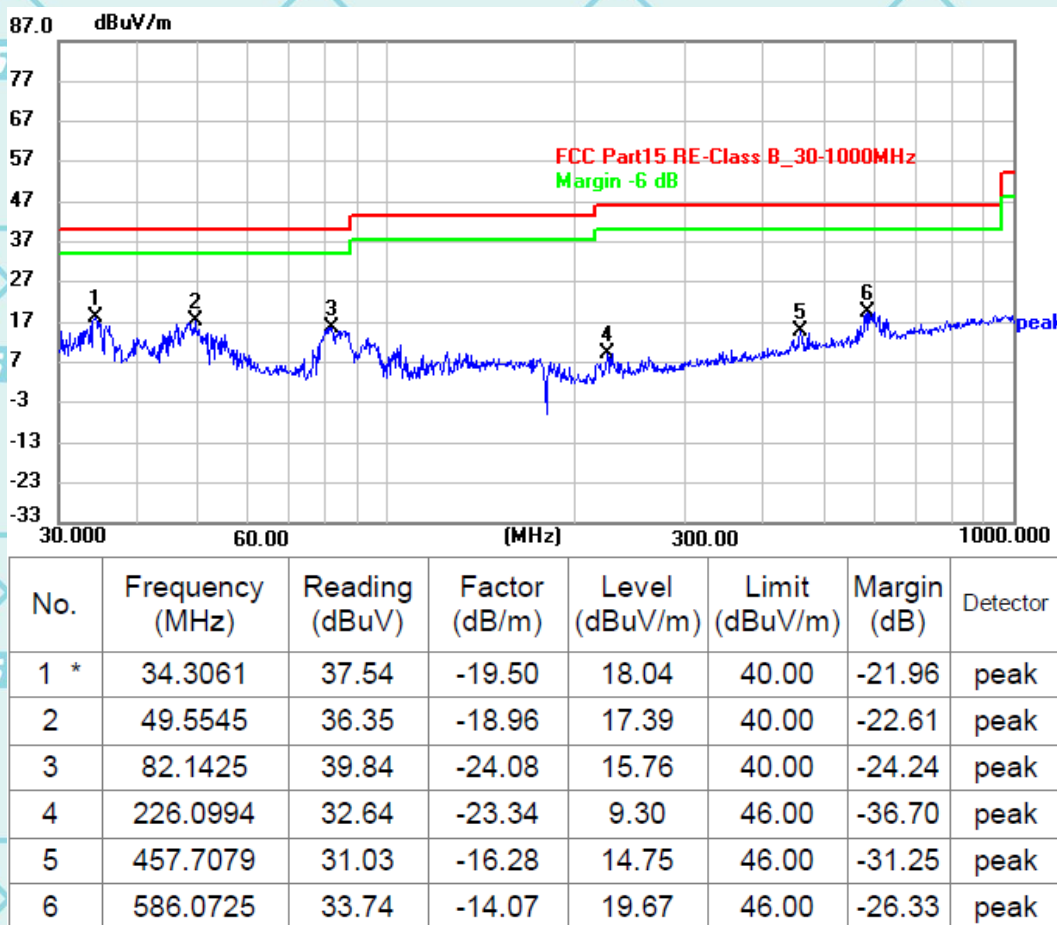

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)


Report No.: WSCT-ANAB-R&E251100085A-15B Issued Date: 09 December 2025

TEST RESULTS

Above 1GHz(1~26GHz) :(Mode 1—worst case)

Note: The spurious above 6G is noise only, do not show on the report.


Horizontal:

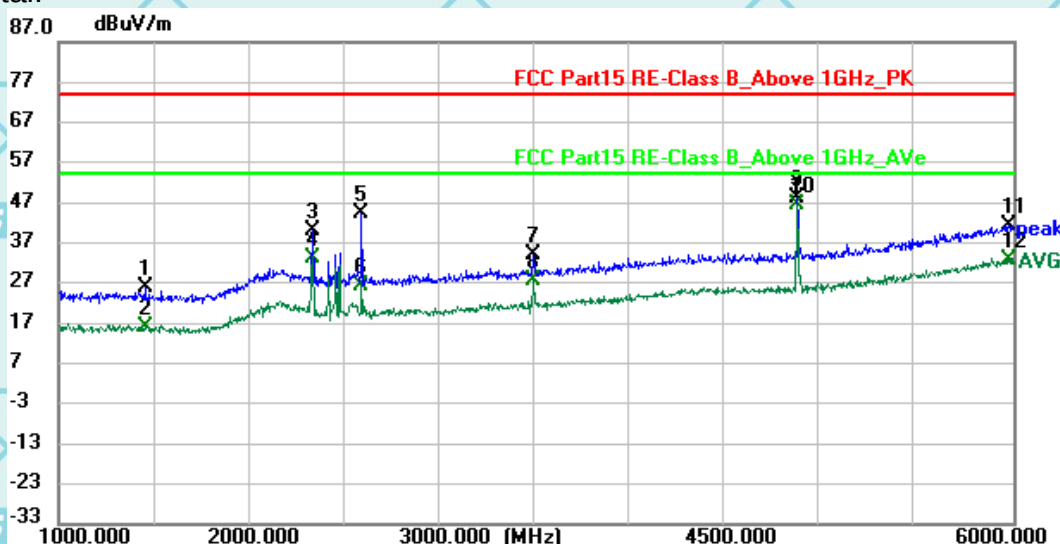

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1455.625	33.33	-7.42	25.91	74.00	-48.09	peak
2	1455.625	23.62	-7.42	16.20	54.00	-37.80	AVG
3	2336.875	43.52	-3.28	40.24	74.00	-33.76	peak
4	2336.875	36.65	-3.28	33.37	54.00	-20.63	AVG
5	2585.000	47.70	-3.38	44.32	74.00	-29.68	peak
6	2585.000	29.59	-3.38	26.21	54.00	-27.79	AVG
7	3490.000	35.12	-1.16	33.96	74.00	-40.04	peak
8	3490.000	28.74	-1.16	27.58	54.00	-26.42	AVG
9	4874.375	43.70	4.67	48.37	74.00	-25.63	peak
10 *	4874.375	41.83	4.67	46.50	54.00	-7.50	AVG
11	5980.000	31.57	9.68	41.25	74.00	-32.75	peak
12	5980.000	23.01	9.68	32.69	54.00	-21.31	AVG

Report No.: WSCT-ANAB-R&E251100085A-15B Issued Date: 09 December 2025

Vertical:

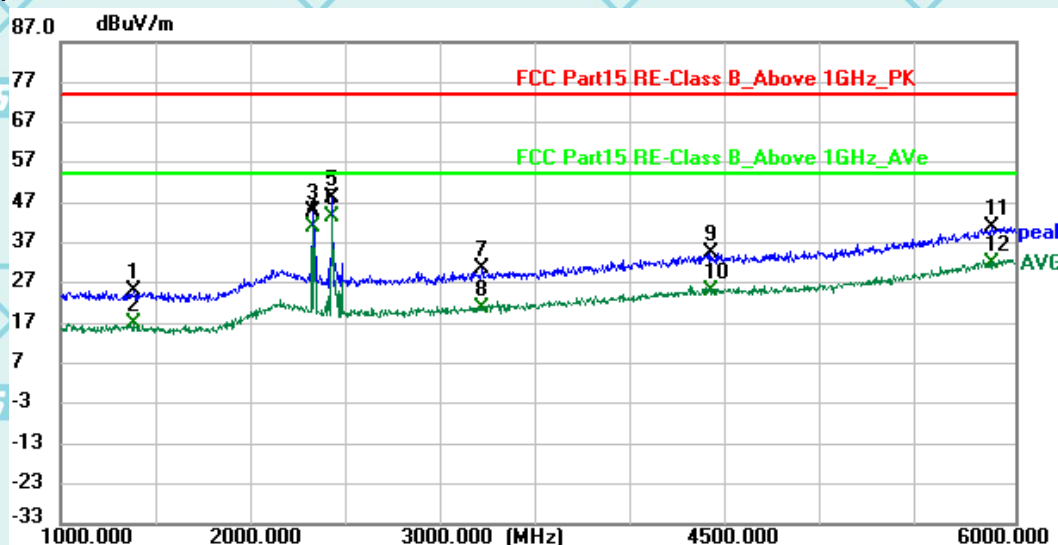

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1380.625	32.72	-7.51	25.21	74.00	-48.79	peak
2	1380.625	24.44	-7.51	16.93	54.00	-37.07	AVG
3	2321.875	47.73	-3.13	44.60	74.00	-29.40	peak
4	2321.875	44.09	-3.13	40.96	54.00	-13.04	AVG
5	2426.875	52.31	-3.96	48.35	74.00	-25.65	peak
6 *	2426.875	47.46	-3.96	43.50	54.00	-10.50	AVG
7	3215.000	32.59	-1.79	30.80	74.00	-43.20	peak
8	3215.000	22.56	-1.79	20.77	54.00	-33.23	AVG
9	4400.625	31.93	2.59	34.52	74.00	-39.48	peak
10	4400.625	22.62	2.59	25.21	54.00	-28.79	AVG
11	5883.750	31.69	9.03	40.72	74.00	-33.28	peak
12	5883.750	22.80	9.03	31.83	54.00	-22.17	AVG

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Freq. = Emission frequency in MHz

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

Report No.: WSCT-ANAB-R&E251100085A-15B Issued Date: 09 December 2025

8. Test Setup Photographs

Please refer to the attachment "Set Up Photos-15B" for relevant test setup photos

*******END OF REPORT*******