



RF TEST REPORT

Product Name: American Standard DC charging station

Model Number: CNAC-360KW/2-RGE-01, CNAC-***KW/2-*****-01

FCC ID: 2BTQB-36CNAC

Issued For : Real See (Suzhou) Intelligent Technology Co., Ltd
West of Building 8, Xinhong Industrial Park, No.9 Suhong
West Road, Suzhou Industrial Park, Suzhou City, Jiangsu
Province, China

Issued By : Shenzhen LGT Test Service Co., Ltd.
Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan
District, Shenzhen, Guangdong, China

Report Number: LGT25J106RF01

Sample Received Date: Oct. 20, 2025

Date of Test: Oct. 20, 2025 ~ Dec. 23, 2025

Date of Issue: Dec. 23, 2025

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: Real See (Suzhou) Intelligent Technology Co., Ltd
Address: West of Building 8, Xinhong Industrial Park, No.9 Suhong West Road,
Suzhou Industrial Park, Suzhou City, Jiangsu Province, China

Manufacturer: Real See (Suzhou) Intelligent Technology Co., Ltd
Address: West of Building 8, Xinhong Industrial Park, No.9 Suhong West Road,
Suzhou Industrial Park, Suzhou City, Jiangsu Province, China

Factory: Pozeen (Malaysia) Sdn Bhd
Address: 2A, Lrg Haji Abdul Manan 1A/KU8, Kawasan Perindustrian Meru
Selatan, 41050 Klang, Selangor

Product Name: American Standard DC charging station

Trademark: N/A

Model Number: CNAC-360KW/2-RGE-01, CNAC-***KW/2-*****-01

Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.225, Subpart C ANSI C63.10-2020	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents

1. SUMMARY OF TEST RESULTS	6
1.1 TEST LABORATORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.5 EQUIPMENTS LIST	11
3. EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.2 TEST PROCEDURE	13
3.3 TEST SETUP	13
3.4 EUT OPERATING CONDITIONS	13
3.5 TEST RESULTS	14
4. RADIATED EMISSION MEASUREMENT	18
4.1 RADIATED EMISSION LIMITS	18
4.2 TEST PROCEDURE	20
4.3 TEST SETUP	21
4.4 EUT OPERATING CONDITIONS	21
4.5 FIELD STRENGTH CALCULATION	22
4.6 TEST RESULTS	23
5. FREQUENCY TOLERANCE	26
5.1 LIMIT	26
5.2 TEST PROCEDURE	26
5.3 TEST SETUP	26
5.4 EUT OPERATION CONDITIONS	26
5.5 TEST RESULTS	27
6. 20DB BANDWIDTH	28
6.1 LIMIT	28
6.2 TEST PROCEDURE	28
6.3 TEST SETUP	28
6.4 EUT OPERATION CONDITIONS	28



6.5 TEST RESULTS	29
7. ANTENNA REQUIREMENT	30
7.1 STANDARD REQUIREMENT	30
7.2 EUT ANTENNA	30



Revision History

Rev.	Issue Date	Contents
00	Dec. 23, 2025	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.225, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.209 15.225(a)(b)(c)(d)	Radiated Emission	PASS	--
15.225(e)	Frequency Tolerance	PASS	--
15.203	Antenna Requirement	PASS	--
15.215	20dB Bandwidth	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020.
- (3) Pre-test all models, find the worst case is CNAC-360KW/2-RGE-01 with the max size and power. It was selected to perform all test items and recorded it in this report.



1.1 TEST LABORATORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate:	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	Occupied Channel Bandwidth	$\pm 0.46\%$
2	RF Output Power, Conducted	$\pm 0.71\text{dB}$
3	Power Spectral Density, Conducted	$\pm 1.57\text{dB}$
4	Unwanted Emission, Conducted	$\pm 0.63\text{dB}$
5	Conducted emission	$\pm 2.80\text{dB}$
6	All Emissions, Radiated (0.009-30MHz)	$\pm 2.16\text{dB}$
7	All Emissions, Radiated (30MHz-1GHz)	$\pm 4.61\text{dB}$
8	All Emissions, Radiated (1GHz-18GHz)	$\pm 5.49\text{dB}$

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	American Standard DC charging station	
Test Model Number:	CNAC-360KW/2-RGE-01	
Series Number:	CNAC-***KW/2-*****-01	
Model Difference:	All products belong to the same series, with the same design principle and PCB layout, only appearance, size and power are different. Where ***KW can be 60KW, 120KW, 180KW, 240KW, 300KW or 360KW, which represents product power. Where ***** can be two to six letters from R,G,W,B,E,P, which represents communication and payment methods, R for RFID, E for Ethernet, P for POS machine, G,W,B for other configurations or combined configurations.	
Product Description:	Operation Frequency:	13.56MHz
	Modulation Type:	FSK
	Antenna Designation:	Please see Note 2.
Rating:	Input: 480V AC/3P+PE, 60Hz, 465.1A Rated Power: 360kW Output: 200-1000V DC, 5-700A	
Hardware Version:	N/A	
Software Version:	N/A	
Connecting I/O Port(s):	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.



2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions
Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description
Mode 1	TX Mode

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Emission Test





2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.5 EQUIPMENTS LIST

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2026-03-02	2027-03-01
LISN	COM-POWER	LI-115	02032	2026-03-03	2027-03-02
LISN	SCHWARZBECK	NNLK 8122	00160	2026-03-03	2027-03-02
Transient Limiter	CYBERTEK	EM5010A	E225010004 9	2026-03-03	2027-03-02
Coaxial cables (9kHz-30MHz)	Juncoax	JMR600-N MNM-2M	N.A	2026-03-03	2027-03-02
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2026-03-05	2027-03-04
Testing Software	EMC-I_V1.5.0.16_SKET				

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2025.03.06	2026.03.05
Active loop Antenna	ETS	6502	00049544	2025.03.11	2028.03.10
Spectrum Analyzer	Keysight	N9010B	MY60242508	2025.03.05	2026.03.04
Signal Analyzer	R&S	FSV40-N	102245	2025.02.17	2026.02.16
Trilog Broadband Antenna (30M-1G)	SCHWARZBECK	VULB 9168	2705	2024.05.17	2027.05.16
Horn Antenna(1-18G)	SCHWARZBECK	3115	10SL0060	2025.03.10	2028.03.09
Horn Antenna(18-40G)	SCHWARZBECK	BBHA 9170	685	2023.10.23	2026.10.22
Pre-amplifier(30M-1G)	EMtrace	RP01A	02019	2025.03.06	2026.03.05
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2025.03.06	2026.03.05
Pre-amplifier(18-40G)	SCHWARZBECK	BBV 9721	9721-019	2025.10.20	2026.10.19
Coaxial cables (9kHz-1GHz)	Juncoax	JMR600-N MNM-8M	N.A	2025.03.06	2026.03.05
Coaxial cables (1GHz-18GHz)	TaiHe	UCD460B- NMSM-1M 9	N.A	2025.03.06	2026.03.05
Coaxial cables (18GHz-40GHz)	Junkosha Inc.	MWX241-0 5000KMSK MS	N.A	2025.03.08	2026.03.07
Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2025.07.30	2026.07.29
Antenna Tower	SAEMC	BK-4AT-BS -D	SK20210930 08	N.A	N.A
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Testing Software	EMC-I_V1.4.0.3_SKET				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- The EUT is $\leq 12\text{mm}$ from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

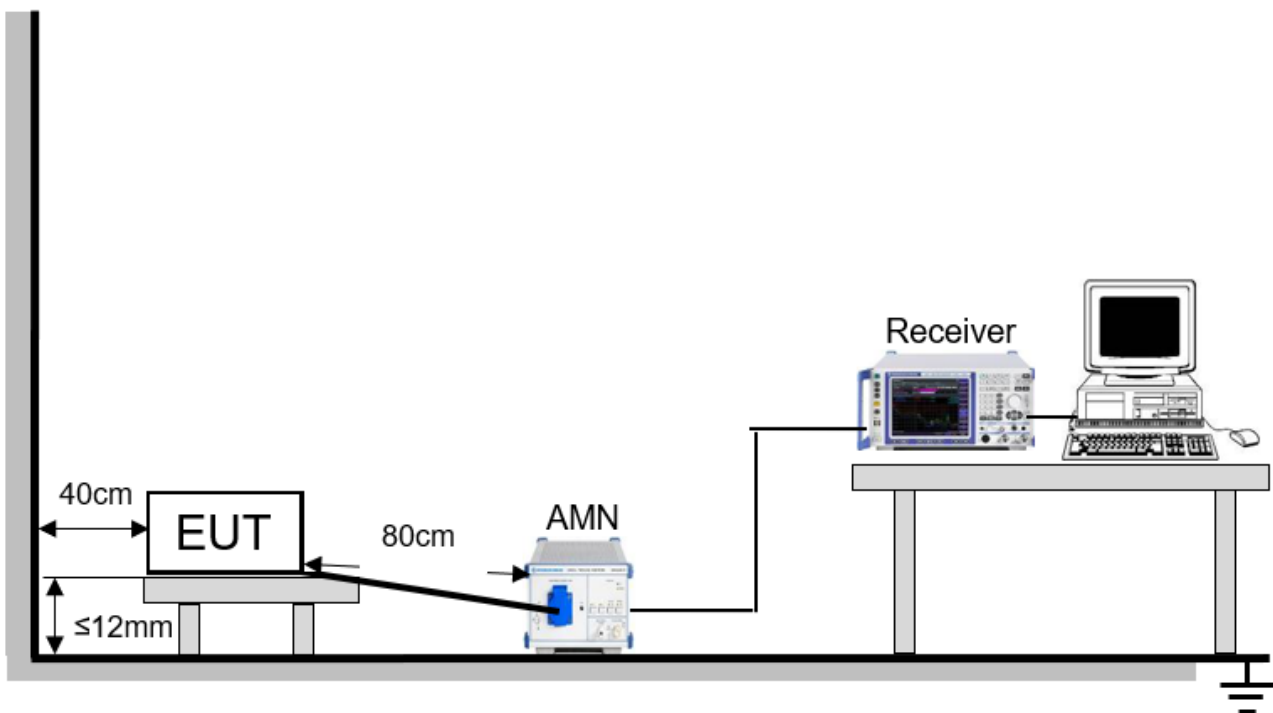


3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.5 TEST RESULTS


Project: LGT25J106	Test Engineer: Zijie Chen
EUT: American Standard DC charging station	Temperature: 25.5°C
M/N: CNAC-360KW/2-RGE-01	Humidity: 52%RH
Test Voltage: AC 480V/60Hz	Test Data: 2025-12-19
Test Mode: NFC TX	
Note:	

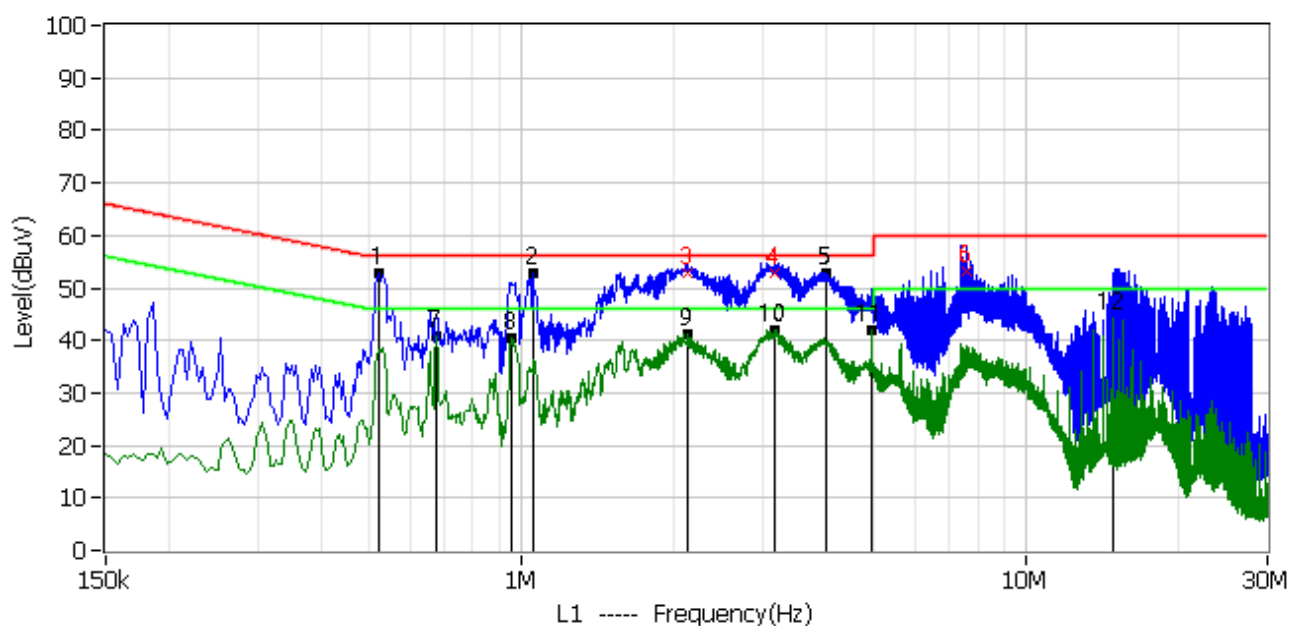

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.522	42.30	10.35	52.65	56.00	-3.35	QP	L1
2*	1.054	42.30	10.37	52.67	56.00	-3.33	QP	L1
3	2.138	42.04	10.60	52.64	56.00	-3.36	QP	L1
4	3.170	42.26	10.60	52.86	56.00	-3.14	QP	L1
5*	4.018	42.30	10.58	52.88	56.00	-3.12	QP	L1
6	7.610	42.56	10.60	53.16	60.00	-6.84	QP	L1
7*	0.678	30.37	10.35	40.72	46.00	-5.28	AV	L1
8*	0.954	30.15	10.36	40.51	46.00	-5.49	AV	L1
9*	2.134	30.81	10.55	41.36	46.00	-4.64	AV	L1
10*	3.174	31.43	10.57	42.00	46.00	-4.00	AV	L1
11*	4.922	31.20	10.59	41.79	46.00	-4.21	AV	L1
12*	14.866	33.56	10.79	44.35	50.00	-5.65	AV	L1




Project: LGT25J106	Test Engineer: Zijie Chen
EUT: American Standard DC charging station	Temperature: 25.5°C
M/N: CNAC-360KW/2-RGE-01	Humidity: 52%RH
Test Voltage: AC 480V/60Hz	Test Data: 2025-12-19
Test Mode: NFC TX	
Note:	

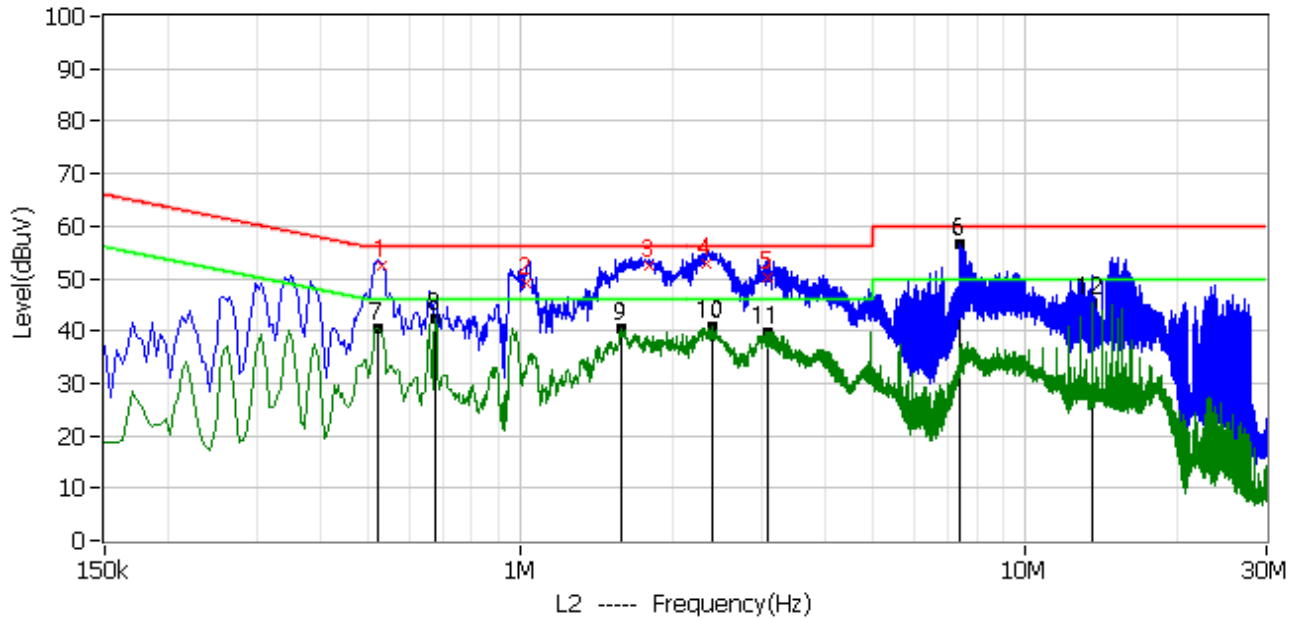

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Detector	Polar
1	0.530	42.08	10.30	52.38	56.00	-3.62	QP	L2
2	1.030	38.69	10.40	49.09	56.00	-6.91	QP	L2
3	1.794	41.90	10.50	52.40	56.00	-3.60	QP	L2
4	2.330	42.16	10.60	52.76	56.00	-3.24	QP	L2
5	3.082	39.54	10.60	50.14	56.00	-5.86	QP	L2
6*	7.426	45.88	10.62	56.50	60.00	-3.50	QP	L2
7*	0.522	30.16	10.35	40.51	46.00	-5.49	AV	L2
8*	0.678	31.87	10.35	42.22	46.00	-3.78	AV	L2
9*	1.578	29.83	10.47	40.30	46.00	-5.70	AV	L2
10*	2.390	30.16	10.56	40.72	46.00	-5.28	AV	L2
11*	3.074	29.31	10.56	39.87	46.00	-6.13	AV	L2
12*	13.514	34.54	10.66	45.20	50.00	-4.80	AV	L2




Project: LGT25J106	Test Engineer: Zijie Chen
EUT: American Standard DC charging station	Temperature: 25.5°C
M/N: CNAC-360KW/2-RGE-01	Humidity: 52%RH
Test Voltage: AC 480V/60Hz	Test Data: 2025-12-19
Test Mode: NFC TX	
Note:	

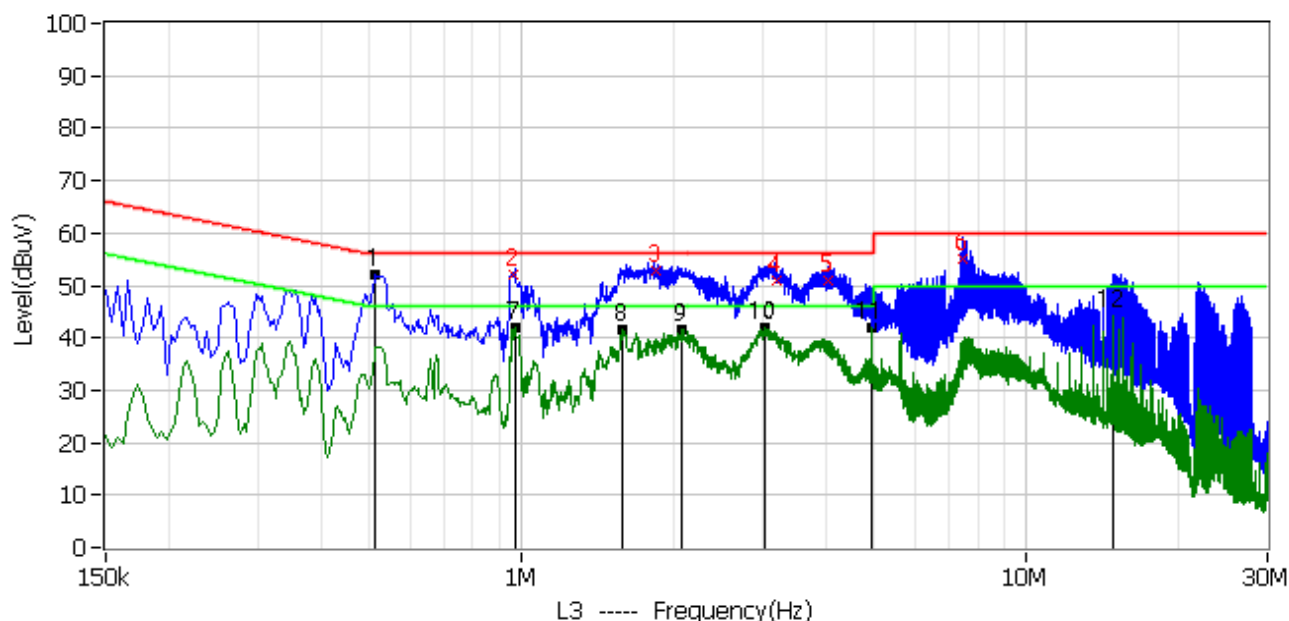

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.514	41.64	10.39	52.03	56.00	-3.97	QP	L3
2	0.966	41.72	10.50	52.22	56.00	-3.78	QP	L3
3	1.850	42.18	10.60	52.78	56.00	-3.22	QP	L3
4	3.186	40.37	10.60	50.97	56.00	-5.03	QP	L3
5	4.034	40.48	10.60	51.08	56.00	-4.92	QP	L3
6	7.490	44.58	10.60	55.18	60.00	-4.82	QP	L3
7*	0.970	31.54	10.46	42.00	46.00	-4.00	AV	L3
8*	1.582	31.01	10.57	41.58	46.00	-4.42	AV	L3
9*	2.078	30.93	10.65	41.58	46.00	-4.42	AV	L3
10*	3.022	31.16	10.63	41.79	46.00	-4.21	AV	L3
11*	4.922	31.20	10.59	41.79	46.00	-4.21	AV	L3
12*	14.862	33.37	10.77	44.14	50.00	-5.86	AV	L3



Project: LGT25J106	Test Engineer: Zijie Chen
EUT: American Standard DC charging station	Temperature: 25.5°C
M/N: CNAC-360KW/2-RGE-01	Humidity: 52%RH
Test Voltage: AC 480V/60Hz	Test Data: 2025-12-19
Test Mode: NFC TX	
Note:	

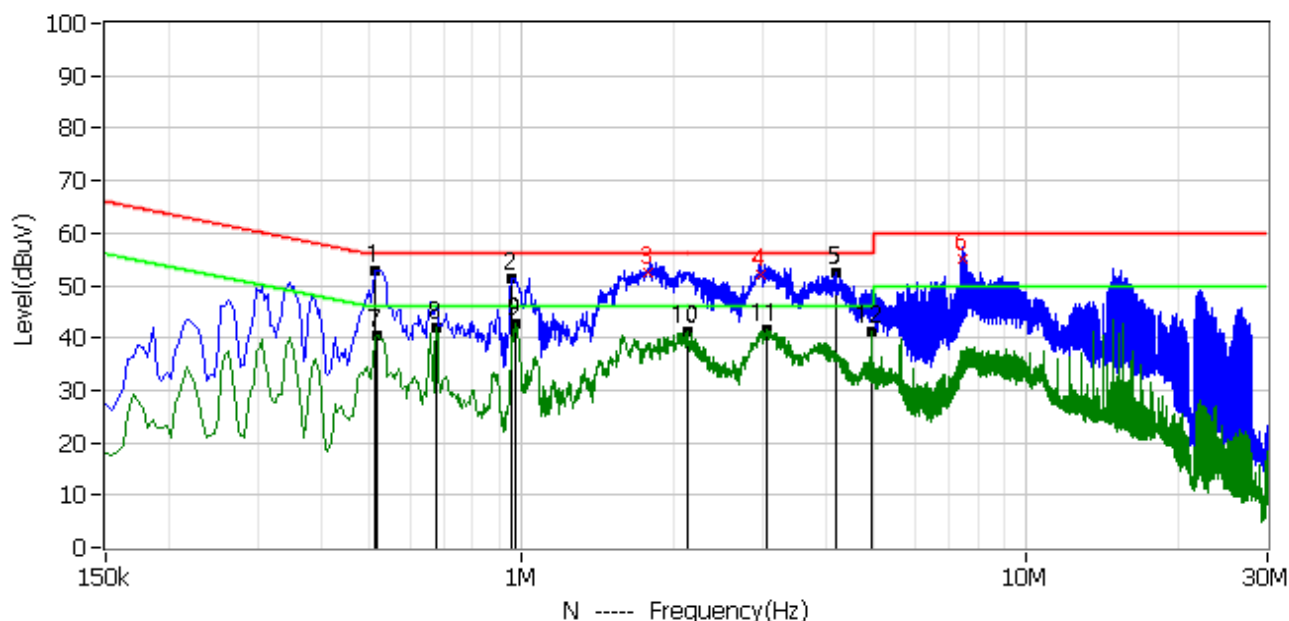

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.514	42.43	10.45	52.88	56.00	-3.12	QP	N
2*	0.954	40.96	10.46	51.42	56.00	-4.58	QP	N
3	1.778	42.01	10.60	52.61	56.00	-3.39	QP	N
4	2.970	41.28	10.70	51.98	56.00	-4.02	QP	N
5*	4.186	41.64	10.68	52.32	56.00	-3.68	QP	N
6	7.490	44.21	10.70	54.91	60.00	-5.09	QP	N
7*	0.518	30.06	10.45	40.51	46.00	-5.49	AV	N
8*	0.678	31.55	10.45	42.00	46.00	-4.00	AV	N
9*	0.970	32.29	10.46	42.75	46.00	-3.25	AV	N
10*	2.126	30.61	10.65	41.26	46.00	-4.74	AV	N
11*	3.054	30.75	10.66	41.41	46.00	-4.59	AV	N
12*	4.922	30.42	10.69	41.11	46.00	-4.89	AV	N



4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMITS

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

(Radiated Emission <30MHz (9KHz-30MHz, H-field)

According to FCC section 15.225, for <30MHz, Radiated emissions were measured according to ANSIC63.4. The EUT was set to transmit at the highest output power. The EUT was set 30 meter away from the measuring antenna. The loop antenna was positioned 1 meter above the ground from the center of the loop. The measuring bandwidth was set to 10KHz. (Note: During testing the receive antenna was rotated about its axis to maximize the emission from the EUT)

There was no detected Restricted bands and Radiated suprious emission below 30MHz. The 30m limit was converted to 3m Limit using square factor(x) as it was found by measurements as follows;

3 m Limit(dBuV/m) = $20\log(X)+40\log(30/3)= 20\log(15,848)+40\log(30/3) =124\text{dBuV}$

3 m Limit(dBuV/m) = $20\log(X)+40\log(30/3)= 20\log(334)+40\log(30/3) =90.47\text{dBuV}$

3 m Limit(dBuV/m) = $20\log(X)+40\log(30/3)= 20\log(106)+40\log(30/3) =80.506\text{dBuV}$

3 m Limit(dBuV/m) = $20\log(X)+40\log(30/3)= 20\log(30)+40\log(30/3) =69.54\text{dBuV}$

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

LIMITS OF RADIATED EMISSION MEASUREMENT (Frequency Range 9kHz-1000MHz)

Frequency range (KHz)	Frequency (KHz)	Field Strength@300m		Field Strength@3m
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
9 ~ 490	9	266.67	48.52	128.52
	150	16.00	24.08	104.08
	490	4.90	13.80	93.80

Frequency range (KHz)	Frequency (KHz)	Field Strength@30m		Field Strength@3m
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
490 ~ 1705	490	48.98	33.80	73.80
	1705	14.08	22.97	62.97

Frequency range (KHz)	Frequency (KHz)	Field Strength@30m		Field Strength@3m
		$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
1705 ~ 30000	1705	30.00	29.54	69.54
	30000	30.00	29.54	69.54



Frequency range (MHz)	Field Strength@30m		Field Strength@3m
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
13.110 ~ 13.410	106	40.5	80.5
13.410 ~ 13.553	334	50.5	90.5
13.553 ~13.567	15.848	84	124.0
13.567 ~ 13.710	334	50.5	90.5
13.710 ~14.010	106	40.5	80.5

NOTE:

- a) Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
b) In the emission tables above, the tighter limit applies at the Band edge.

Radiated Emission >30MHz (30MHz-1GHz, E-field)

According to FCC section 15.205, the field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



4.2 TEST PROCEDURE


- a. The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a ≤ 12 mm high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower. For the test Antenna
- b. In the frequency range of 9KHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- c. In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.
- f. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- h. For the actual test configuration, please refer to the related Item –EUT Test Photos.

NOTE:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.3 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

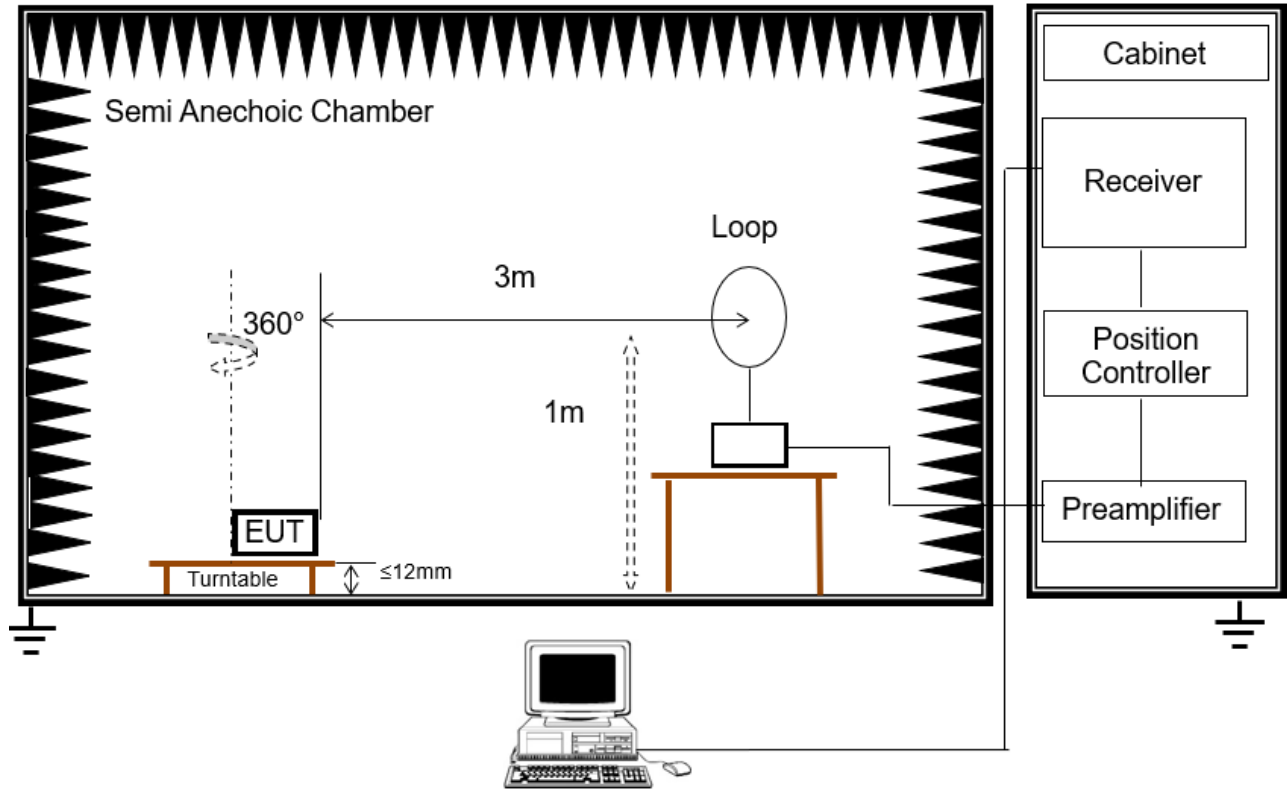

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

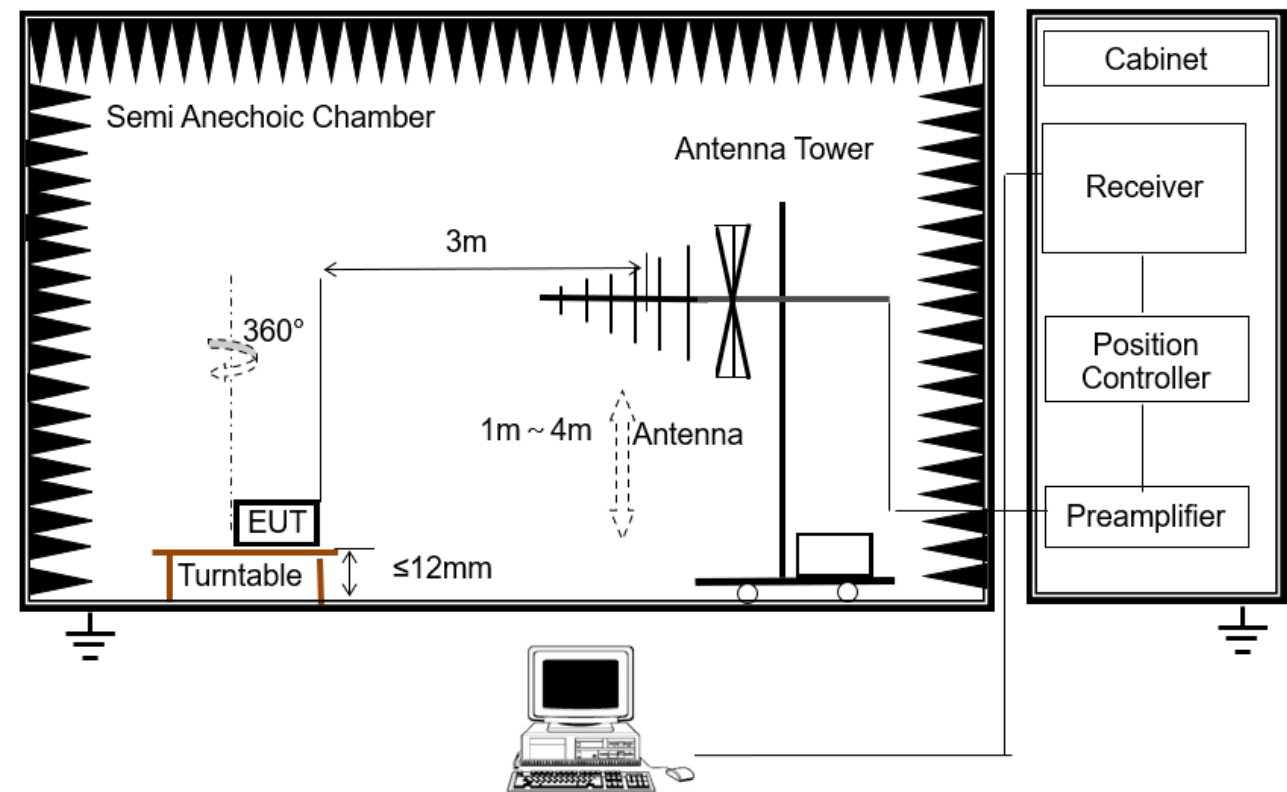

4.4 EUT OPERATING CONDITIONS

Please refer to section 3.4 of this report.



4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dB μ V/m)	(dB μ V/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$




4.6 TEST RESULTS

(Radiated Emission<30MHz (9KHz-30MHz, H-field))


Note 1: Both coaxial and coplanar have been tested, only shown the worst case data.

Note 2: Pre-test all different power models, only the worst case model CNAC-360KW/2-RGE-01 was reported in this report.

Project: LGT25J106	Test Engineer: Zijie Chen
EUT: American Standard DC charging station	Temperature: 22.8°C
M/N: CNAC-360KW/2-RGE-01	Humidity: 66%RH
Test Voltage: AC 480V/60Hz	Test Data: 2025-12-19
Test Mode: NFC TX	
Note:	

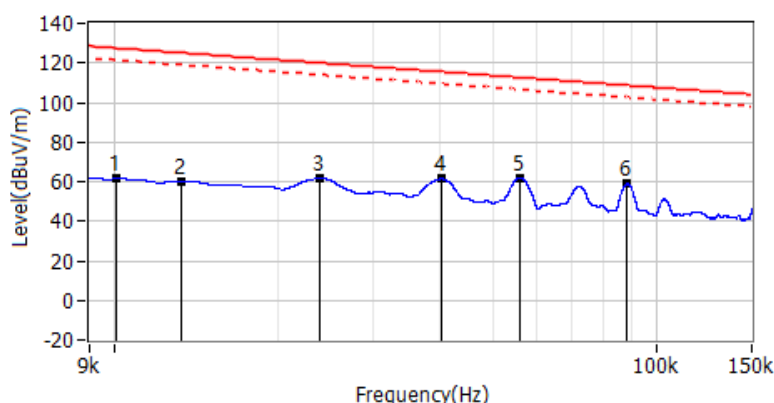


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector
1*	10.0751kHz	42.77	18.58	61.35	127.54	-66.19	PK
2*	13.3358kHz	43.16	17.25	60.41	125.10	-64.69	PK
3*	23.8579kHz	47.65	14.13	61.78	120.05	-58.27	PK
4*	40.1081kHz	48.64	12.76	61.40	115.54	-54.14	PK
5*	56.0059kHz	49.82	12.02	61.84	112.64	-50.80	PK
6*	88.1715kHz	46.86	12.02	58.88	108.70	-49.82	PK

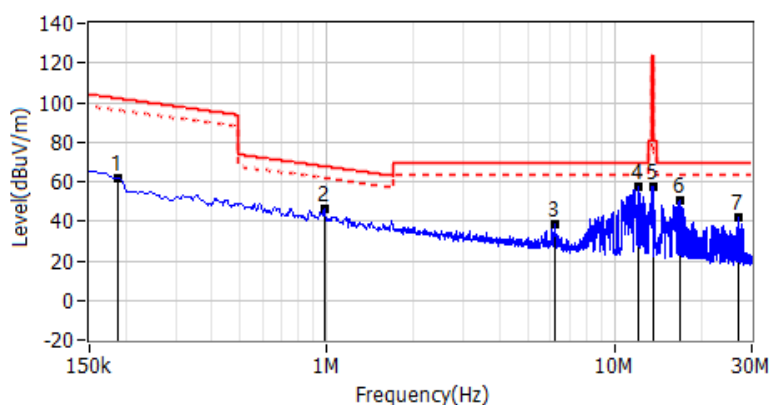

No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector
1*	187.3125kHz	49.47	12.03	61.50	102.15	-40.65	PK
2*	982.0688kHz	34.05	12.05	46.10	67.76	-21.66	PK
3*	6.2021MHz	26.35	12.15	38.50	69.54	-31.04	PK
4*	12.1049MHz	46.28	11.32	57.60	69.54	-11.94	PK
5*	13.5601MHz	46.33	11.34	57.67	124.00	-66.33	PK
6*	16.8473MHz	39.57	11.37	50.94	69.54	-18.60	PK
7*	27.1232MHz	32.13	10.01	42.14	69.54	-27.40	PK



Project: LGT25J106	Test Engineer: Zijie Chen
EUT: American Standard DC charging station	Temperature: 22.8°C
M/N: CNAC-360KW/2-RGE-01	Humidity: 66%RH
Test Voltage: AC 480V/60Hz	Test Data: 2025-12-19
Test Mode: NFC TX	
Note:	

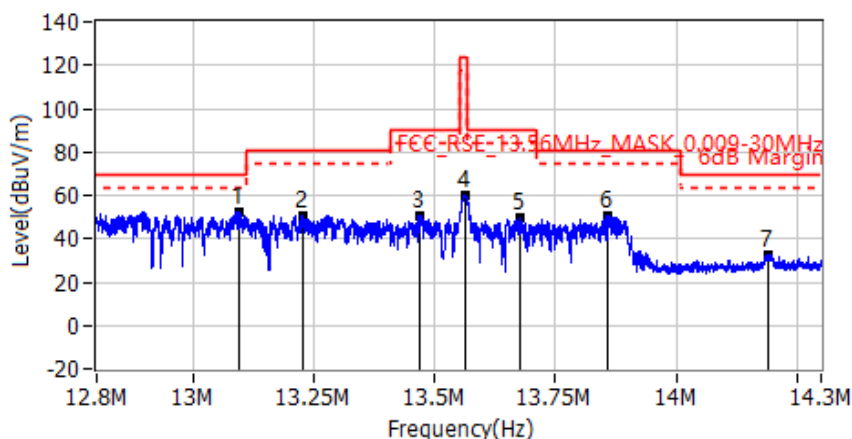


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector
1*	13.0951MHz	41.30	11.33	52.63	69.54	-16.91	PK
2*	13.2253MHz	39.40	11.33	50.73	80.50	-29.77	PK
3*	13.4683MHz	39.35	11.33	50.68	90.50	-39.82	PK
4*	13.5624MHz	48.67	11.34	60.01	124.00	-63.99	PK
5*	13.6769MHz	38.35	11.34	49.69	90.50	-40.81	PK
6*	13.8588MHz	39.33	11.34	50.67	80.50	-29.83	PK
7*	14.1890MHz	21.22	11.34	32.56	69.54	-36.98	PK




Between 30-1000MHz

Note: Pre-test all different power models, only the worst case model CNAC-360KW/2-RGE-01 was reported in this report.

Project: LGT25J106	Test Engineer: Zijie Chen
EUT: American Standard DC charging station	Temperature: 22.8°C
M/N: CNAC-360KW/2-RGE-01	Humidity: 66%RH
Test Voltage: AC 480V/60Hz	Test Data: 2025-12-19
Test Mode: NFC TX	
Note:	

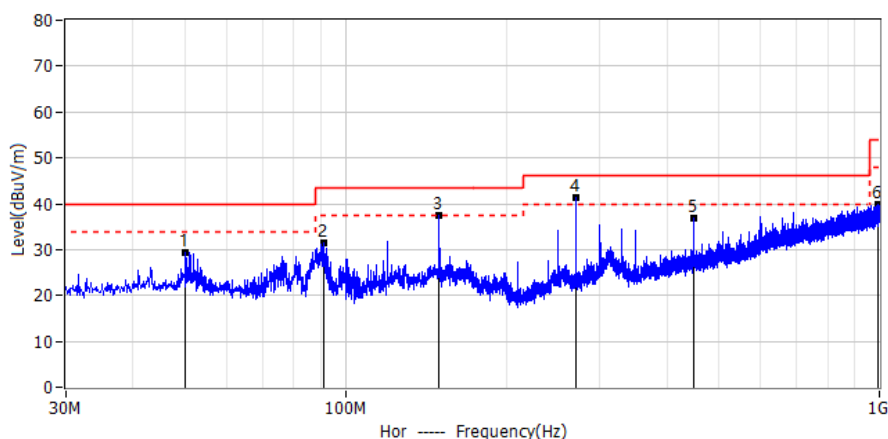

No.	Frequency MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	50.249	8.74	20.73	29.47	40.00	-10.53	QP	Hor
2*	91.231	14.73	16.65	31.38	43.50	-12.12	QP	Hor
3*	149.916	15.56	21.81	37.37	43.50	-6.13	QP	Hor
4*	269.954	20.63	20.58	41.21	46.00	-4.79	QP	Hor
5*	450.010	10.08	26.85	36.93	46.00	-9.07	QP	Hor
6*	993.695	4.71	35.04	39.75	54.00	-14.25	QP	Hor

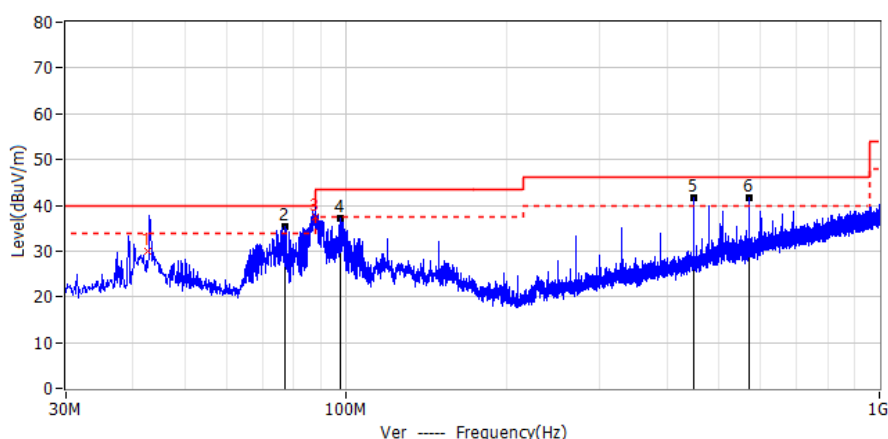

No.	Frequency MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1	42.657	9.06	21.00	30.06	40.00	-9.94	QP	Ver
2*	77.045	18.35	16.88	35.23	40.00	-4.77	QP	Ver
3	87.860	20.84	16.60	37.44	40.00	-2.56	QP	Ver
4*	98.021	19.76	17.25	37.01	43.50	-6.49	QP	Ver
5*	450.010	14.70	26.85	41.55	46.00	-4.45	QP	Ver
6*	570.048	13.10	28.66	41.76	46.00	-4.24	QP	Ver



5. FREQUENCY TOLERANCE


5.1 LIMIT

According to FCC section 15.225, the devices operating in the 13.553-13.567 MHz shall maintain the carrier frequency within 0.01% of the operating frequency over the temperature variation of -20°C to +50°C using an environmental chamber. The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

5.2 TEST PROCEDURE

According to FCC section 15.225(e), The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

5.3 TEST SETUP

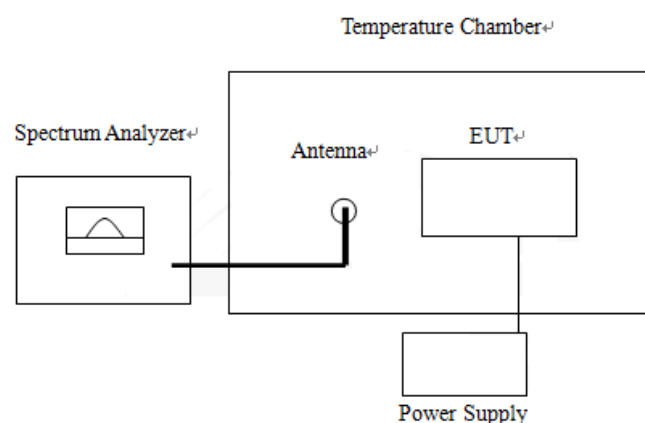

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading

5.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.



5.5 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	50%
Test Voltage:	AC 480V/60Hz	Test Mode:	TX Mode

13.56MHz

VOLTAGE(%)	Test Conditions		Frequency (Hz)	Deviation	Limit	Verdict
	Power (VDC)	Temperature (°C)				
100	480	+20°C(Ref)	13559513	-0.00359%	±0.01%	PASS
100		-20	13561544	0.01138%	±0.01%	
100		-10	13559487	-0.00379%	±0.01%	
100		0	13559313	-0.00507%	±0.01%	
100		10	13560765	0.00564%	±0.01%	
100		20	13561153	0.00851%	±0.01%	
100		25	13559365	-0.00468%	±0.01%	
100		30	13559145	-0.00631%	±0.01%	
100		40	13561076	0.00793%	±0.01%	
100		50	13560878	0.00647%	±0.01%	
85	408	20	13559784	-0.00159%	±0.01%	
115	552	20	13560013	0.00009%	±0.01%	



6. 20DB BANDWIDTH

6.1 LIMIT

According to FCC section 15.215©, the 20dB bandwidth should be contained within the frequency band designated in the rule section under which the EUT is operated, it was measured with a spectrum analyzer connected the EUT while the EUT is operating in transmission mode.

6.2 TEST PROCEDURE

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §13.553-13.567 MHz and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

1. Set RBW = 1 kHz.
2. Set the video American Standard DC charging stationwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 TEST SETUP



6.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.




6.5 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	50%
Test Voltage:	AC 480V/60Hz	Test Mode:	TX Mode

13.56MHz

Centre Frequency	Measurement		
	20dB Bandwidth	99% Bandwidth	Frequency Range
	(KHz)	(KHz)	
13.56MHz	2.778	2.358	13.553-13.567

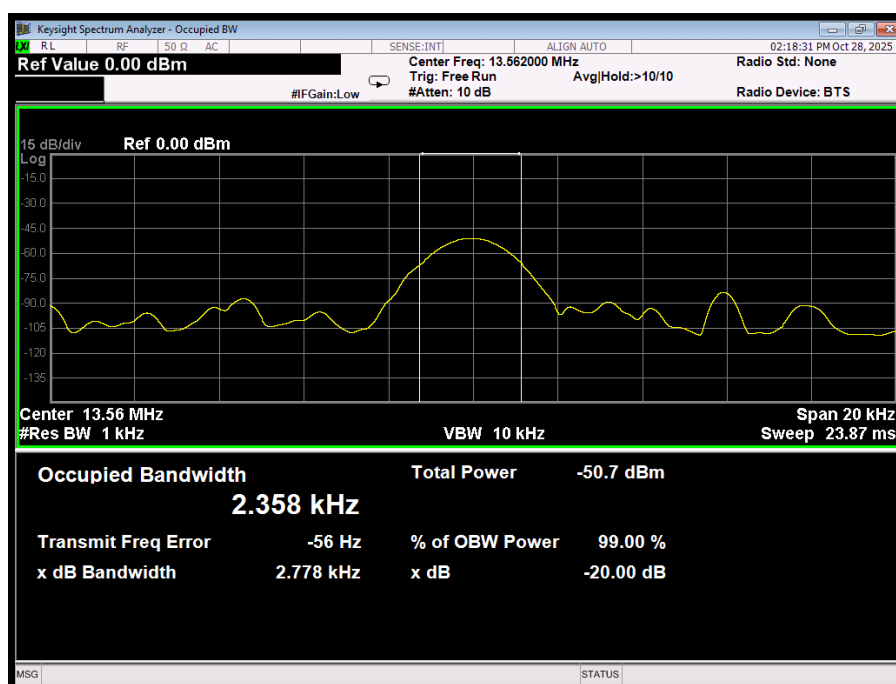

Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 1 kHz to perform the occupied bandwidth test.



7. ANTENNA REQUIREMENT

7.1 STANDARD REQUIREMENT

Part 15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2 EUT ANTENNA

The EUT antenna is coil Antenna. It comply with the standard requirement.

*****END OF THE REPORT*****