

Appendix A. Test Result of AC Power Line Conducted Emission

Owing to the battery operation of EUT, this test item is not performed.

Appendix B. Test Result of Emission Bandwidth

Channel No.	Frequency (MHz)	Measurement Level (Hz)	Required Limit (MHz)	Result
01	13.56	25.33	--	--

Channel 01

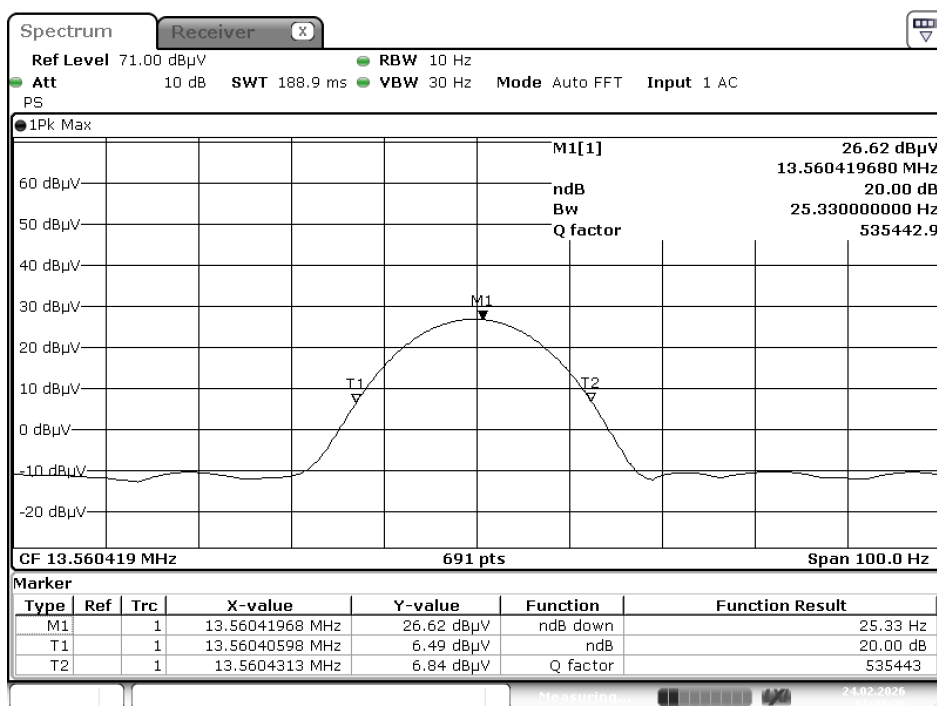

Date: 24.FEB.2026 17:47:21

Since the transmitter signal is CW-like it is impractical to use a RBW setting of 1 – 5% of the emission bandwidth since the emission bandwidth will be proportional to the RBW.


Appendix C. Test Result of Frequency Stability

Temperature (°C)	Voltage (V)	Observe Time	Declared Frequency (MHz)	Read Frequency (MHz)	Tolerance (%)	Limit (%)
20	12	start	13.56	13.56111	0.008186	± 0.01 %
		2mins	13.56	13.56111	0.008186	
		5mins	13.56	13.56111	0.008186	
		10mins	13.56	13.56111	0.008186	
20	13.8	start	13.56	13.56089	0.006563	± 0.01 %
		2mins	13.56	13.56089	0.006563	
		5mins	13.56	13.56089	0.006563	
		10mins	13.56	13.56089	0.006563	
20	10.5	start	13.56	13.56077	0.005678	± 0.01 %
		2mins	13.56	13.56077	0.005678	
		5mins	13.56	13.56077	0.005678	
		10mins	13.56	13.56077	0.005678	
50	12	start	13.56	13.55942	-0.004277	± 0.01 %
		2mins	13.56	13.55942	-0.004277	
		5mins	13.56	13.55942	-0.004277	
		10mins	13.56	13.55942	-0.004277	
40	12	start	13.56	13.55966	-0.002507	± 0.01 %
		2mins	13.56	13.55966	-0.002507	
		5mins	13.56	13.55966	-0.002507	
		10mins	13.56	13.55966	-0.002507	
30	12	start	13.56	13.55978	-0.001622	± 0.01 %
		2mins	13.56	13.55978	-0.001622	
		5mins	13.56	13.55978	-0.001622	
		10mins	13.56	13.55978	-0.001622	

10	12	start	13.56	13.56116	0.008555	± 0.01 %
		2mins	13.56	13.56116	0.008555	
		5mins	13.56	13.56116	0.008555	
		10mins	13.56	13.56116	0.008555	
0	12	start	13.56	13.56122	0.008997	± 0.01 %
		2mins	13.56	13.56122	0.008997	
		5mins	13.56	13.56122	0.008997	
		10mins	13.56	13.56122	0.008997	
-10	12	start	13.56	13.56120	0.008850	± 0.01 %
		2mins	13.56	13.56120	0.008850	
		5mins	13.56	13.56120	0.008850	
		10mins	13.56	13.56120	0.008850	
-20	12	start	13.56	13.56114	0.008407	± 0.01 %
		2mins	13.56	13.56114	0.008407	
		5mins	13.56	13.56114	0.008407	
		10mins	13.56	13.56114	0.008407	

Appendix D. Test Result of Field Strength of Fundamental Emissions and Spectrum Mask


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_13.56MHz_X
Test by :Nova

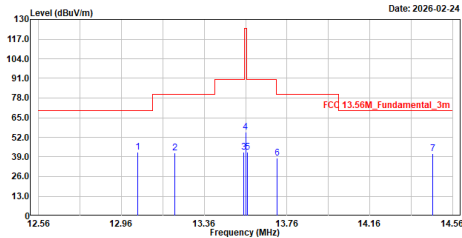

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	13.038	42.20	69.50	-27.30	20.70	21.50	QP
2	13.218	41.78	80.50	-38.72	20.30	21.48	QP
3	13.551	42.04	90.47	-48.43	20.60	21.44	QP
4	13.560	55.44	124.00	-68.56	34.00	21.44	QP
5	13.569	42.34	90.47	-48.13	20.90	21.44	QP
6	13.711	38.29	80.50	-42.21	16.86	21.43	QP
7	14.464	41.10	69.50	-28.40	19.65	21.45	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_13.56MHz_X
Test by :Nova

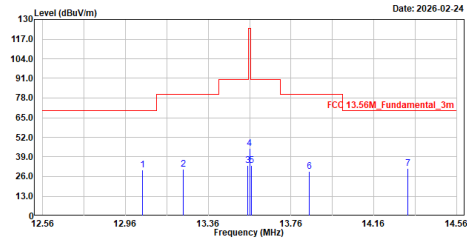


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	13.041	30.45	69.50	-39.05	8.95	21.50	QP
2	13.238	30.67	80.50	-49.83	9.19	21.48	QP
3	13.551	33.40	90.47	-57.07	11.96	21.44	QP
4	13.560	44.74	124.00	-79.26	23.30	21.44	QP
5	13.569	33.60	90.47	-56.87	12.16	21.44	QP
6	13.850	29.41	80.50	-51.09	7.99	21.42	QP
7	14.325	31.60	69.50	-37.90	10.17	21.43	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Appendix E. Test Result of Radiated Emission


Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_13.50MHz_below 30MHz
Test by :Nova

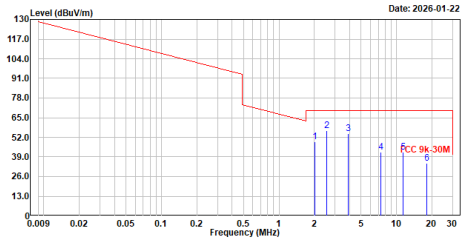

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2.024	49.28	69.50	-20.22	29.58	19.70	QP
2	2.558	56.30	69.50	-13.20	36.66	19.64	QP
3	3.890	54.42	69.50	-15.08	34.55	19.87	QP
4	7.390	42.08	69.50	-27.42	20.82	21.26	QP
5	11.310	42.30	69.50	-27.20	20.40	21.90	QP
6	18.064	35.06	69.50	-34.44	12.55	22.51	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,Vertical
mode :TX_13.50MHz_below 30MHz
Test by :Nova

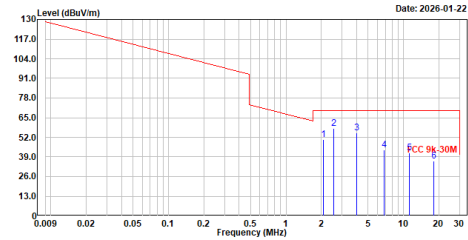

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2.075	50.74	69.50	-18.76	31.05	19.69	QP
2	2.537	57.81	69.50	-11.69	38.16	19.65	QP
3	3.980	54.93	69.50	-14.57	35.04	19.89	QP
4	6.802	43.56	69.50	-25.94	22.26	21.30	QP
5	11.250	41.61	69.50	-27.89	19.71	21.90	QP
6	18.211	36.16	69.50	-33.34	13.62	22.54	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_13.50MHz_above 30MHz
Test by :Nova

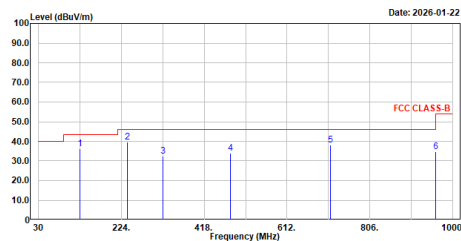

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	126.955	36.27	43.50	-7.23	48.80	-12.53	QP
2	238.511	39.52	46.00	-6.48	51.88	-12.36	QP
3	322.115	32.35	46.00	-13.65	42.04	-9.69	QP
4	479.723	33.84	46.00	-12.16	39.99	-6.15	QP
5	714.035	38.00	46.00	-8.00	39.94	-1.94	QP
6	960.048	34.63	54.00	-19.37	33.55	1.08	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_13.50MHz_above 30MHz
Test by :Nova

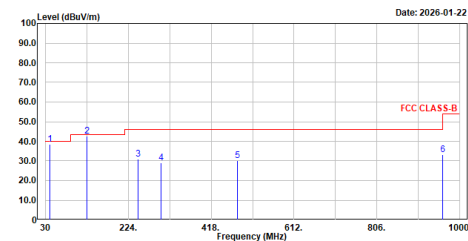

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	40.701	38.45	40.00	-1.55	48.89	-10.44	QP
2	127.555	42.66	43.50	-0.84	55.25	-12.59	QP
3	247.461	30.76	46.00	-15.24	42.86	-12.10	QP
4	299.864	29.10	46.00	-16.90	39.52	-10.42	QP
5	480.223	30.16	46.00	-15.84	36.30	-6.14	QP
6	960.048	33.36	54.00	-20.64	32.28	1.08	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line