

TEST REPORT

Applicant: GLOBAL INDUSTRIAL DISTRIBUTION, INC

Address: 11 Harbor Park Drive, Port Washington, NY 11050, United States

FCC ID: 2BYM4-B3781856

Product Name: Microwave Oven(HOUSEHOLD)

Model Number: E25PXP02-A9X

Standard(s): FCC PART 18
FCC MP-5:1986

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: 2603U19053E-EM-00


Date Of Issue: 2026/9/22

Reviewed By: Calvin Chen



Title: RF Test Supervisor

Approved By: Sun Zhong



Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

Room 101 & 201, Building 2, 256 Pingdong Road, Dalang Town, Dongguan City, Guangdong, China.

Tel: +86-769-83085888

www.ccttt.com.cn

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the Room 101 & 201, Building 2, 256 Pingdong Road, Dalang Town, Dongguan City, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION	6
1.2.1 EUT Operation Condition:	6
1.2.2 1.2.2 Support Equipment List and Details	6
1.2.3 1.2.3 Support Cable List and Details	6
1.2.4 Block Diagram of Test Setup	7
1.3 MEASUREMENT UNCERTAINTY	8
2. SUMMARY OF TEST RESULTS	9
3. REQUIREMENTS AND TEST PROCEDURES	10
3.1 AC LINE CONDUCTED EMISSIONS	10
3.1.1 EUT Setup	10
3.1.2 EMI Test Receiver Setup	10
3.1.3 Test Procedure	11
3.1.4 Corrected Amplitude & Margin Calculation	11
3.2 RADIATION SPURIOUS EMISSIONS	12
3.2.1 EUT Setup	12
3.2.2 EMI Test Receiver Setup	13
3.2.3 Test Procedure	14
3.2.4 Corrected Amplitude & Margin Calculation	14
3.3 RADIATION HAZARD MEASUREMENT	15
3.3.1 Applicable Standard	15
3.3.2 Test Procedure	15
1) Input Power	15
2) RF Output Power	15
3) Operating Frequency	16
4. TEST DATA AND RESULTS	17
4.1 AC LINE CONDUCTED EMISSIONS	17
4.2 RADIATION SPURIOUS EMISSIONS	20
4.2.1 9 kHz – 1 GHz	20
4.2.2 1 GHz – 25 GHz	29
4.3 RADIATION HAZARD MEASUREMENT	31
5. RF EXPOSURE EVALUATION	37
5.1 MAXIMUM PERMISSIBLE EXPOSURE (MPE)	37
5.1.1 Applicable Standard	37
5.1.2 Limits	37
5.1.3 Measurement	38
6. EUT PHOTOGRAPHS	39
7. TEST SETUP PHOTOGRAPHS	40

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2603U19053E-EM-00	Original Report	2026/9/22

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Microwave Oven(HOUSEHOLD)
EUT Model:	E25PXP02-A9X
Highest Operation Frequency:	2450MHz
Microwave Output Power:	900W
Input Power:	1350W
Sample Number:	3OQ3-1
EUT Received Date:	2026/6/25
EUT Received Status:	Good

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in maximum (continuous) RF output power, which was provided by the manufacturer. The loads consisted of water in a glass beaker in the amounts specified in the test procedure Test Model: M1: Operating
Equipment Modifications:	No
EUT Exercise Software:	No

1.2.2 1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	Load	Unknown	Unknown
Unknown	Glass Beaker	Unknown	Unknown

1.2.3 1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	No	No	2	EUT	Load

1.2.4 Block Diagram of Test Setup

Conducted emissions:

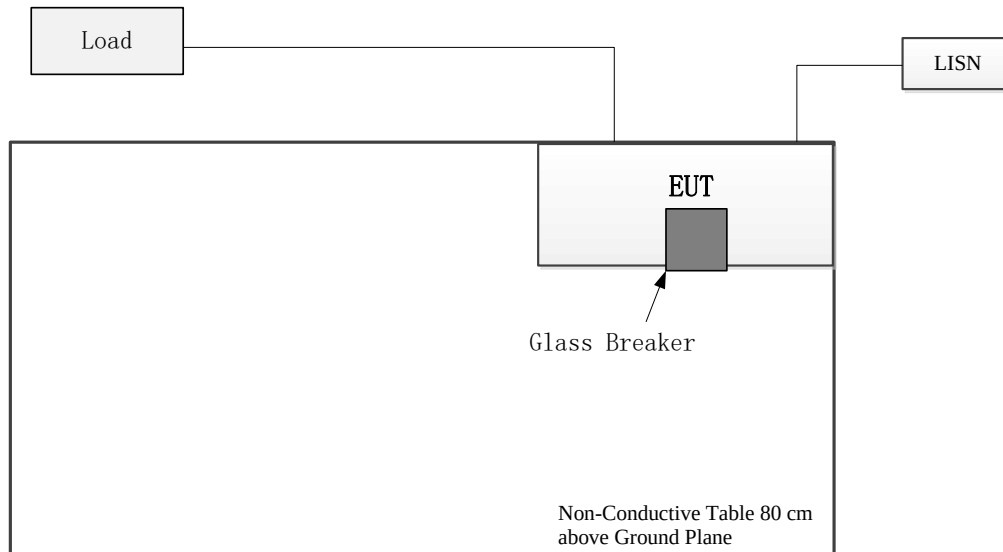

Radiated emissions:

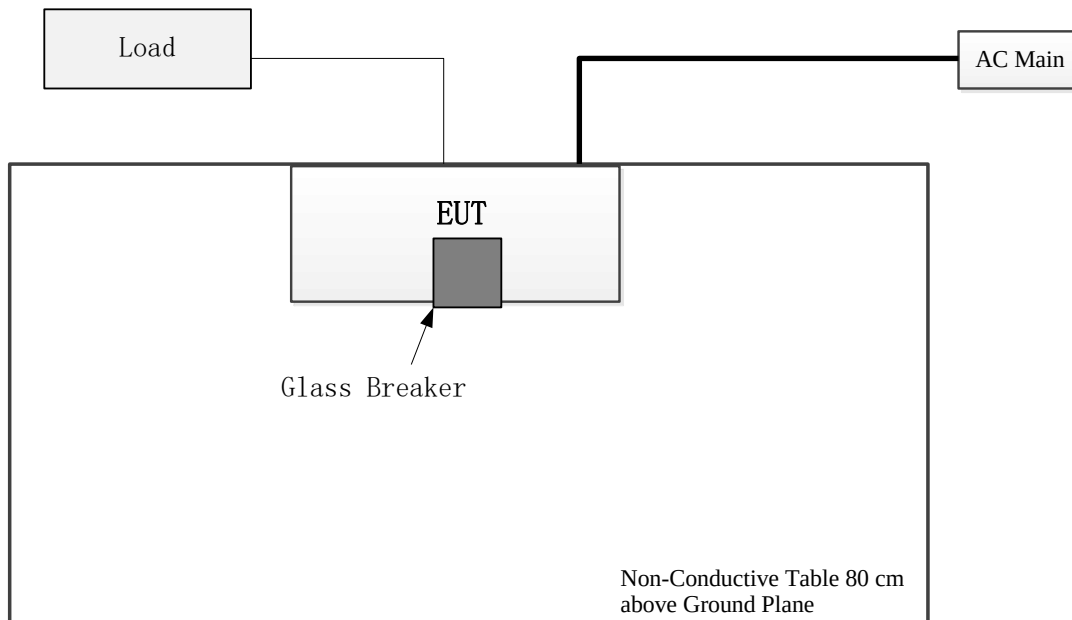

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	9k~30MHz: 4.12dB, 30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G:5.47 dB, 26.5G~40G:5.63 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)


2. SUMMARY OF TEST RESULTS

Standard Clause	Description of Test	Test Result
FCC §18.307	Conducted emissions	Compliant
FCC §18.305, §18.309	Radiated emissions	Compliant
FCC/OST MP-5 FCC §18.301	Radiation Hazard Measurement	Compliant
FCC §18.305	Field Strength	Compliant
FCC §18.313, §1.1310, §2.1091	Maximum Permissible Exposure	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 EUT Setup

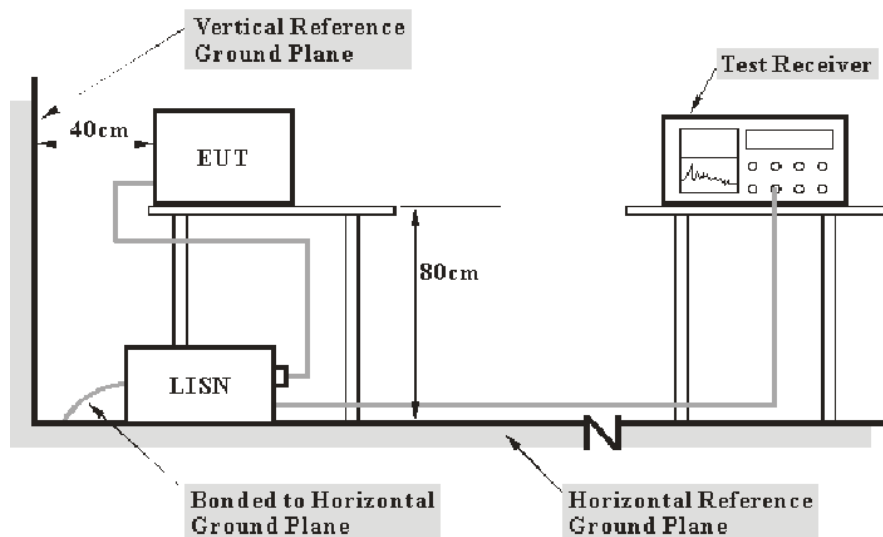

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per MP-5:1986 measurement procedure. The specification used was with the FCC Part 18.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.2 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.3 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT, the report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

All data was recorded in the Quasi-peak and average detection mode.

The report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

3.1.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN


The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.2 Radiation Spurious Emissions


3.2.1 EUT Setup

9kHz - 30MHz:

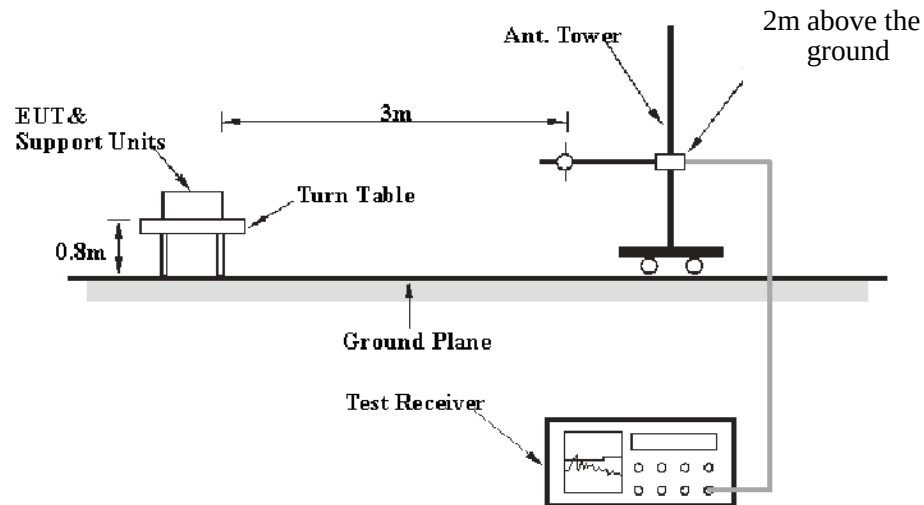

30MHz - 1GHz:

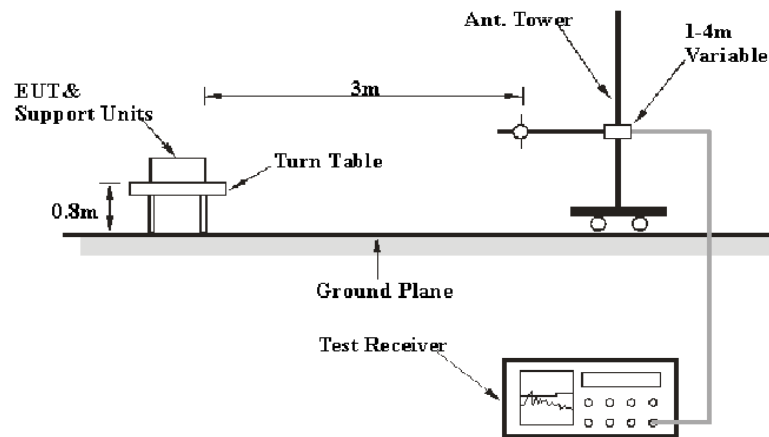

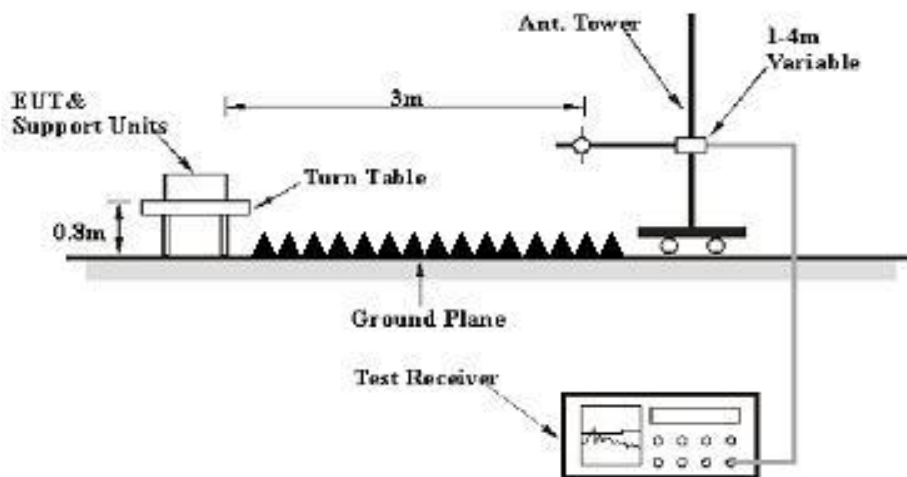Above 1GHz:

The radiated emission were performed in the 3 meters chamber test site, using the setup accordance with the FCC MP-5. The specification used was the FCC part 18 limits.

3.2.2 EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector	Measurement
9 kHz – 150 kHz	200 Hz	1 kHz	/	Peak	PK
	/	/	200 Hz	Quasi Peak/ Average	QP/AV
150 kHz – 30 MHz	9 kHz	30 kHz	/	Peak	PK
	/	/	9 kHz	Quasi Peak/ Average	QP/AV
30MHz – 1000 MHz	120 kHz	500 kHz	/	Peak	PK
	/	/	120kHz	Quasi Peak	QP

1GHz – 25GHz:

Pre-scan:

Measurement	RBW	Video B/W	Detector
PK	1MHz	3 MHz	Peak
AV	1MHz	5 kHz	Peak

Final measurement for emission identified during the pre-scan:

Measurement	RBW	Video B/W	Detector
PK	1MHz	3 MHz	Peak
AV	1MHz	10 Hz	Peak

If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

The spurious emissions which below the limit more than 20dB was not be recorded.

3.2.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 Radiation Hazard Measurement

3.3.1 Applicable Standard

FCC §18.301

3.3.2 Test Procedure

1) Input Power

Input power and current was measured using a power analyzer. A 1000 mL water load was placed in the center of the oven and the oven was operated at maximum output power. A 1000mL water load was chosen for its compatibility with the procedure commonly used by manufacturers to determine their input ratings.

Load for Microwave Ovens

For all measurements, the energy developed by the oven was absorbed by a dummy load consisting of a quantity of tap water in a beaker. If the oven was provided with a shelf or other utensil support, this support was in its initial normal position. For ovens rated at 1000 watts or less power output, the beaker contained quantities of water as listed in the following subparagraphs. For ovens rated at more than 1000 watts output, each quantity was increased by 50% for each 500watts or fraction thereof in excess of 1000 watts. Additional beakers were used if necessary.

- Load for power output measurement: 1000 milliliters of water in the beaker located in the center of the oven.
- Load for frequency measurement: 1000 milliliters of water in the beaker located in the center of the oven.
- Load for measurement of radiation on second and third harmonic: Two loads, one of 700 and the other of 300 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner.

2) RF Output Power

A cylindrical container of borosilicate glass is used for the test. It has a maximum thickness of 3 mm, an external diameter of approximately 190 mm and a height of approximately 90 mm. The mass of the container is determined.

At the start of the test, the oven and the empty container are at ambient temperature. Water having an initial temperature is used for the test. The water temperature is measured immediately before it is poured into the container.

A quantity of 1000 g $\pm$ 5 g of water is added to the container and its actual mass obtained. The container is then immediately placed in the centre of the oven shelf, which is in its lowest normal position. The oven is operated and the time for the water temperature to attain is measured. The oven is then switched off and the final water temperature is measured within 60 s.

3) Operating Frequency

Variation in Operating Frequency with Time

The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 1000mL water load was placed in the center of the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.

Variation in Operating Frequency with Line Voltage

The EUT was operated / warmed by at least 10 minutes of use with a 1000 mL water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Sample Number:	3OQ3-1	Test Date:	2026/6/27
Test Site:	CE	Test Mode:	M1
Tester:	Ella Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.3	Relative Humidity: (%)	56	ATM Pressure: (kPa)	99.8
----------------------	------	------------------------------	----	------------------------	------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101132	2025/9/26	2026/9/25
R&S	EMI Test Receiver	ESR3	103104	2026/5/8	2027/5/7
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2025/11/10	2026/11/9
Audix	Test Software	E3	190306 (V9)	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Project No.: 2603U19053E-EM


Tester: Ella Huang

Port: Line

Condition: RBW:9kHz

Test Mode: M1

Note:

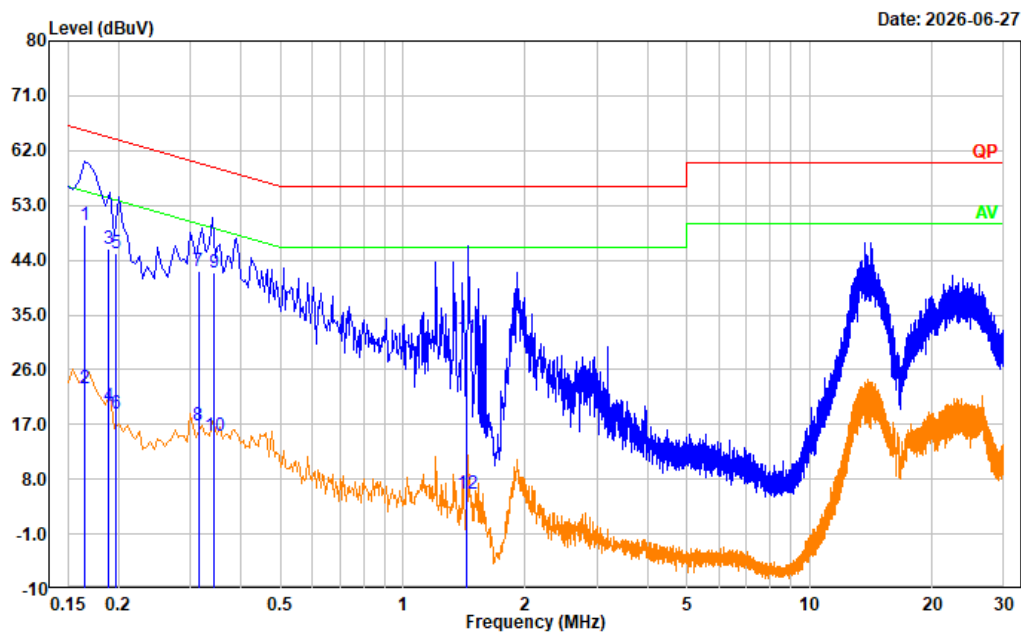

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.165	39.52	10.32	49.84	65.21	15.37	QP
2	0.165	12.55	10.32	22.87	55.21	32.34	Average
3	0.189	35.61	10.18	45.79	64.10	18.31	QP
4	0.189	9.82	10.18	20.00	54.10	34.10	Average
5	0.196	34.89	10.13	45.02	63.76	18.74	QP
6	0.196	8.72	10.13	18.85	53.76	34.91	Average
7	0.314	31.88	10.22	42.10	59.86	17.76	QP
8	0.314	6.69	10.22	16.91	49.86	32.95	Average
9	0.345	31.66	10.25	41.91	59.09	17.18	QP
10	0.345	4.95	10.25	15.20	49.09	33.89	Average
11	1.433	20.94	10.40	31.34	56.00	24.66	QP
12	1.433	-4.90	10.40	5.50	46.00	40.50	Average

Project No.: 2603U19053E-EM


Tester: Ella Huang

Port: neutral

Condition: RBW:9kHz

Test Mode: M1

Note:

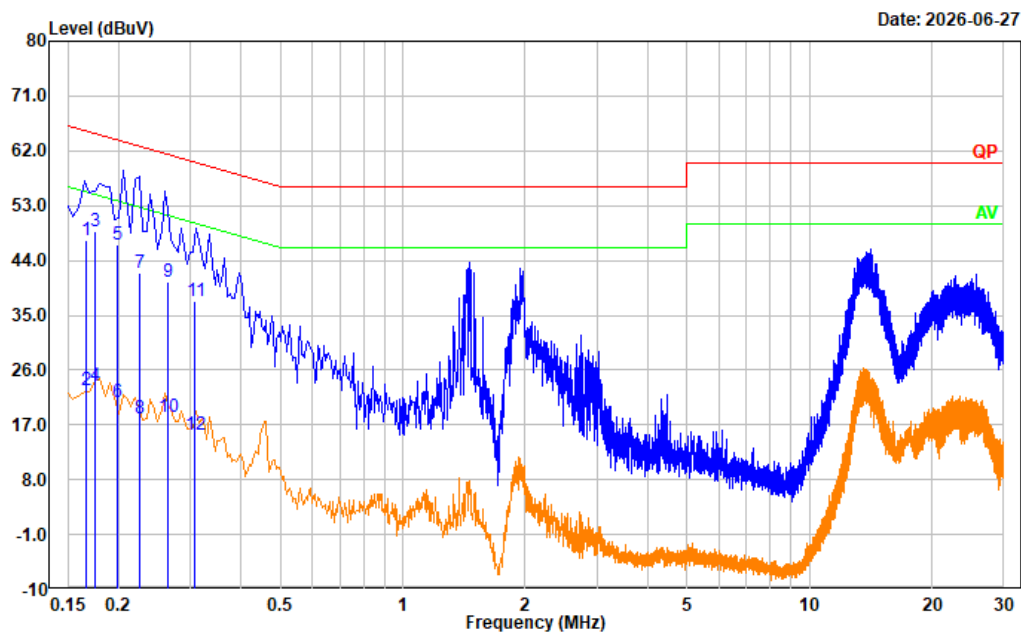

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.167	36.92	10.38	47.30	65.13	17.83	QP
2	0.167	12.22	10.38	22.60	55.13	32.53	Average
3	0.176	38.51	10.36	48.87	64.68	15.81	QP
4	0.176	13.03	10.36	23.39	54.68	31.29	Average
5	0.199	36.26	10.31	46.57	63.65	17.08	QP
6	0.199	10.48	10.31	20.79	53.65	32.86	Average
7	0.226	31.75	10.31	42.06	62.59	20.53	QP
8	0.226	7.75	10.31	18.06	52.59	34.53	Average
9	0.265	30.14	10.31	40.45	61.28	20.83	QP
10	0.265	8.06	10.31	18.37	51.28	32.91	Average
11	0.309	27.11	10.31	37.42	60.01	22.59	QP
12	0.309	4.99	10.31	15.30	50.01	34.71	Average

4.2 Radiation Spurious Emissions

4.2.1 9 kHz – 1 GHz

Sample Number:	3OQ3-1	Test Date:	2026/8/27
Test Site:	966-1	Test Mode:	M1
Tester:	Peter Rong	Test Result:	Pass

Environmental Conditions:


Temperature: (°C)	22.6	Relative Humidity: (%)	63	ATM Pressure: (kPa)	99.7
-------------------	------	------------------------	----	---------------------	------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2023/12/1	2026/11/30
GLOBAL	Loop Antenna	1313-1A	3110611	2026/1/29	2029/1/28
Daruikang	Coaxial Cable	BNC-JJ-RG58	C-0300-01	2025/11/10	2026/11/9
Daruikang	Coaxial Cable	BNC-JJ-RG58	C-0500-01	2025/11/10	2026/11/9
R&S	EMI Test Receiver	ESR3	102724	2026/2/27	2027/2/26
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0100-03	2025/11/10	2026/11/9
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0370-01	2025/11/10	2026/11/9
XQY	Coaxial Cable	XQY-CMR400UF-NJ-NJ-7M	24056379	2026/5/21	2027/5/20
Sonoma	Amplifier	310N	186165	2025/11/10	2026/11/9
Audix	Test Software	E3	191218 (V9)	N/A	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Project No.: 2603U19053E-EM
Tester: Peter Rong
Condition: RBW:0.2 kHz VBW:1 kHz
Polarization: Parallel
Note: M1 Operating

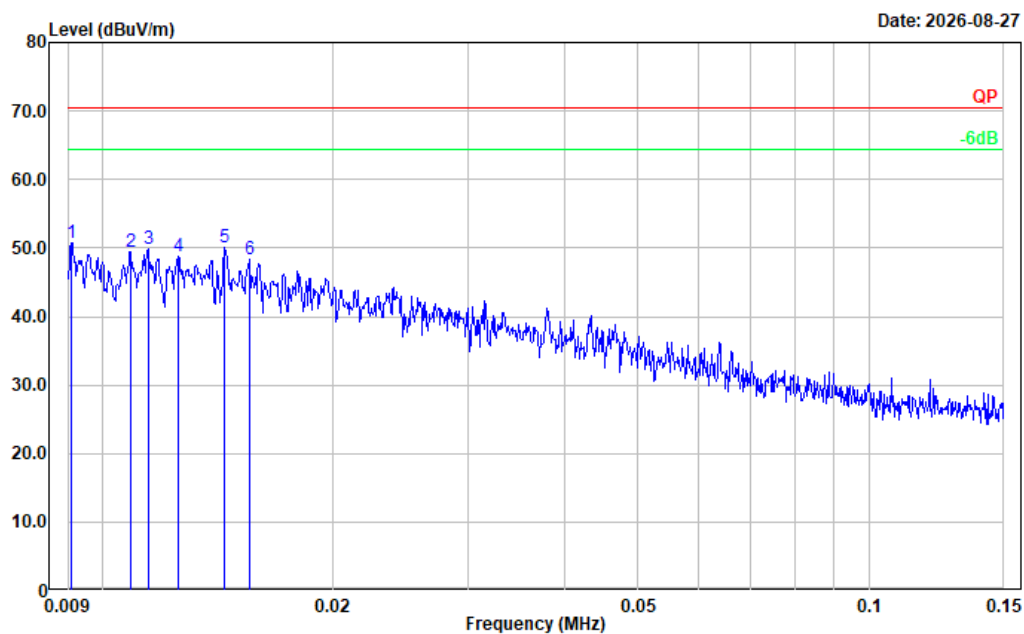


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.009	15.26	35.49	50.75	70.38	19.63	Peak
2	0.011	15.48	33.91	49.39	70.38	20.99	Peak
3	0.011	16.19	33.63	49.82	70.38	20.56	Peak
4	0.013	15.63	33.12	48.75	70.38	21.63	Peak
5	0.014	17.83	32.23	50.06	70.38	20.32	Peak
6	0.016	16.57	31.72	48.29	70.38	22.09	Peak

Project No.: 2603U19053E-EM
Tester: Peter Rong
Condition: RBW:0.2 kHz VBW:1 kHz
Polarization: Perpendicular
Note: M1 Operating

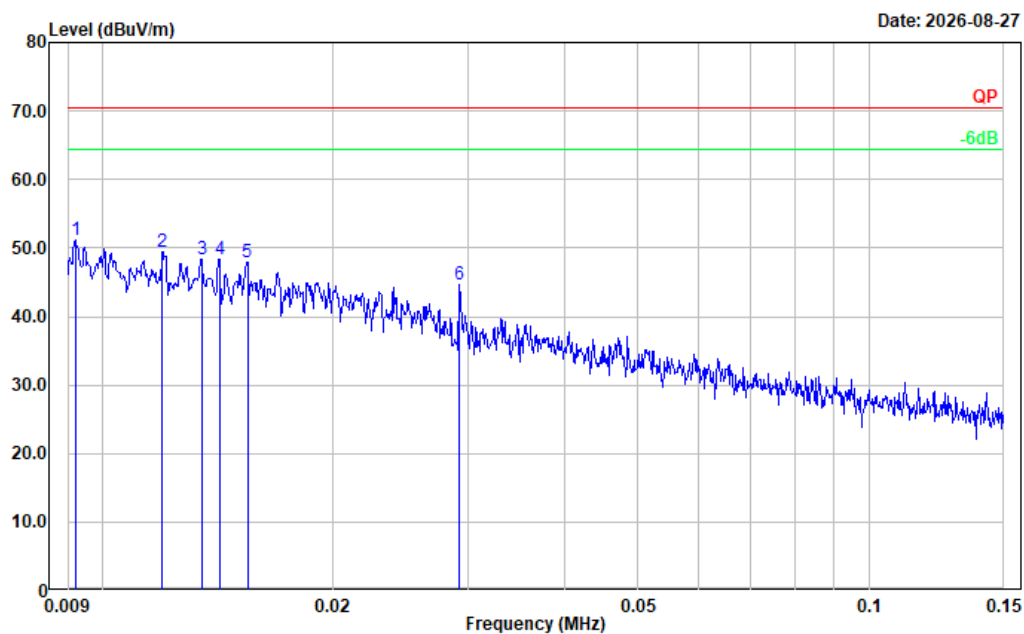


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.009	16.55	34.59	51.14	70.38	19.24	Peak
2	0.012	16.63	32.71	49.34	70.38	21.04	Peak
3	0.013	16.46	31.94	48.40	70.38	21.98	Peak
4	0.014	16.81	31.56	48.37	70.38	22.01	Peak
5	0.015	17.03	30.91	47.94	70.38	22.44	Peak
6	0.029	20.85	23.81	44.66	70.38	25.72	Peak

Project No.: 2603U19053E-EM
Tester: Peter Rong
Condition: RBW:0.2 kHz VBW:1 kHz
Polarization: Ground-Parallel
Note: M1 Operating

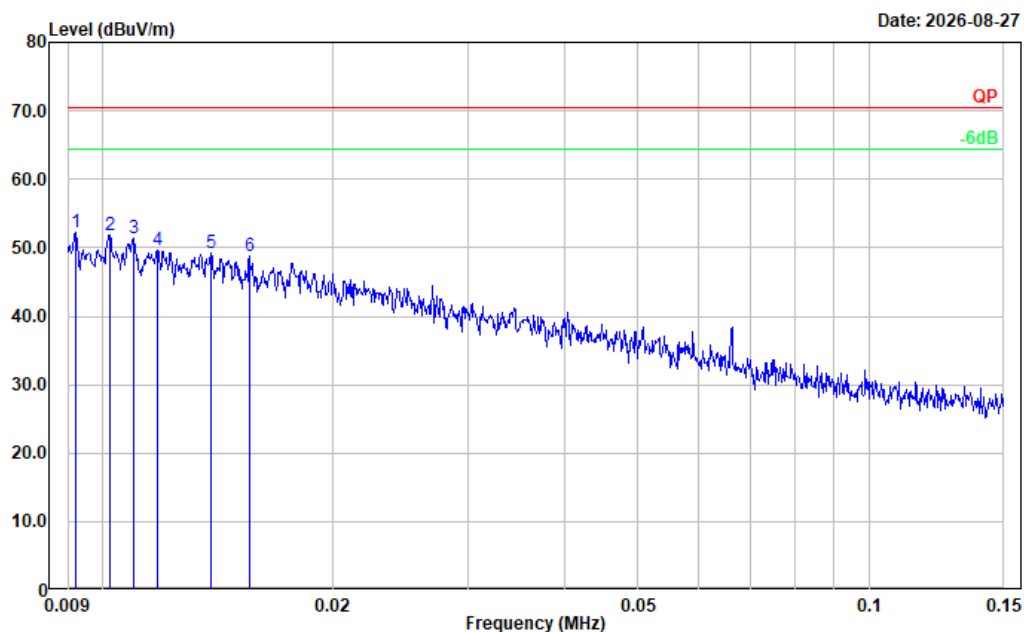


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.009	16.93	35.35	52.28	70.38	18.10	Peak
2	0.010	17.64	34.22	51.86	70.38	18.52	Peak
3	0.011	17.42	33.87	51.29	70.38	19.09	Peak
4	0.012	16.14	33.48	49.62	70.38	20.76	Peak
5	0.014	16.72	32.51	49.23	70.38	21.15	Peak
6	0.016	16.96	31.72	48.68	70.38	21.70	Peak

Project No.: 2603U19053E-EM
Tester: Peter Rong
Condition: RBW:9 kHz VBW:30 kHz
Polarization: Parallel
Note: M1 Operating

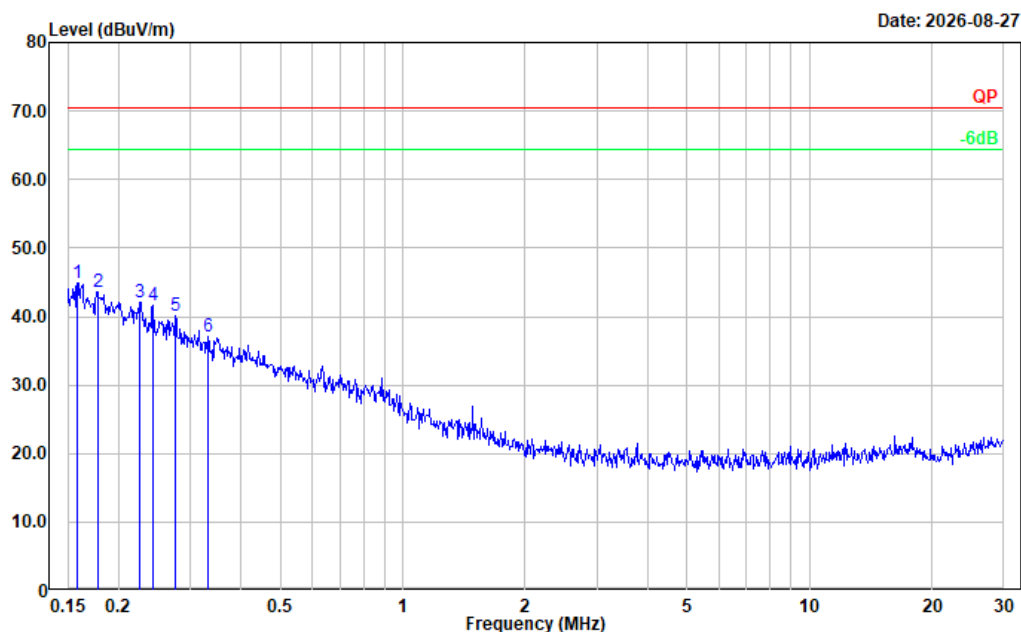


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.158	33.34	11.64	44.98	70.38	25.40	Peak
2	0.178	32.84	10.73	43.57	70.38	26.81	Peak
3	0.226	33.55	8.50	42.05	70.38	28.33	Peak
4	0.243	33.94	7.69	41.63	70.38	28.75	Peak
5	0.276	33.89	6.16	40.05	70.38	30.33	Peak
6	0.332	32.67	4.38	37.05	70.38	33.33	Peak

Project No.: 2603U19053E-EM
Tester: Peter Rong
Condition: RBW:9 kHz VBW:30 kHz
Polarization: Perpendicular
Note: M1 Operating

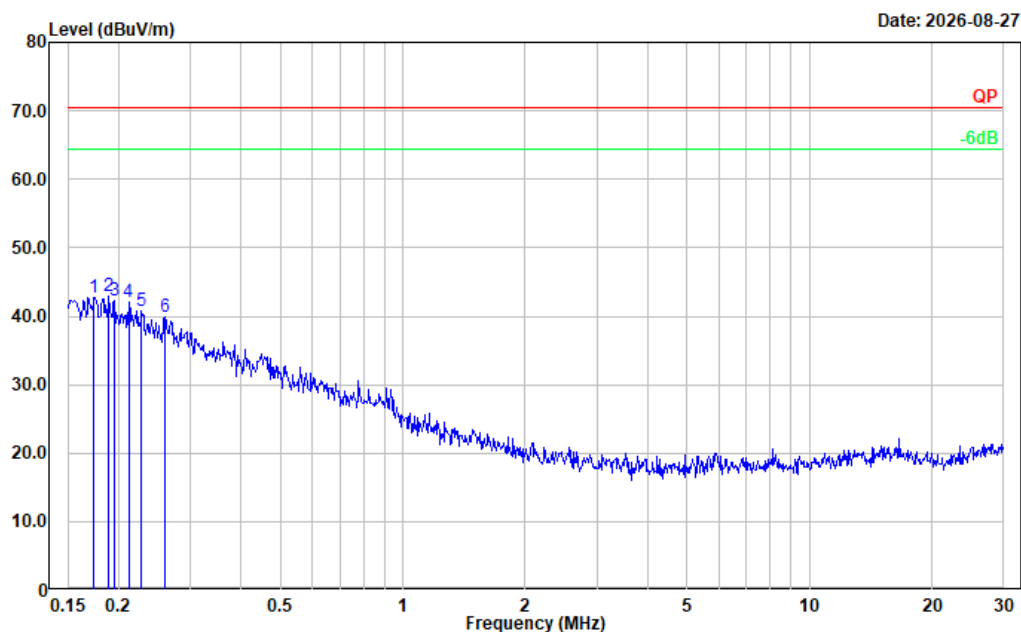


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.174	32.59	10.17	42.76	70.38	27.62	Peak
2	0.189	33.54	9.47	43.01	70.38	27.37	Peak
3	0.195	33.11	9.19	42.30	70.38	28.08	Peak
4	0.212	33.70	8.46	42.16	70.38	28.22	Peak
5	0.228	32.98	7.72	40.70	70.38	29.68	Peak
6	0.260	33.63	6.25	39.88	70.38	30.50	Peak

Project No.: 2603U19053E-EM
Tester: Peter Rong
Condition: RBW:9 kHz VBW:30 kHz
Polarization: Ground-Parallel
Note: M1 Operating

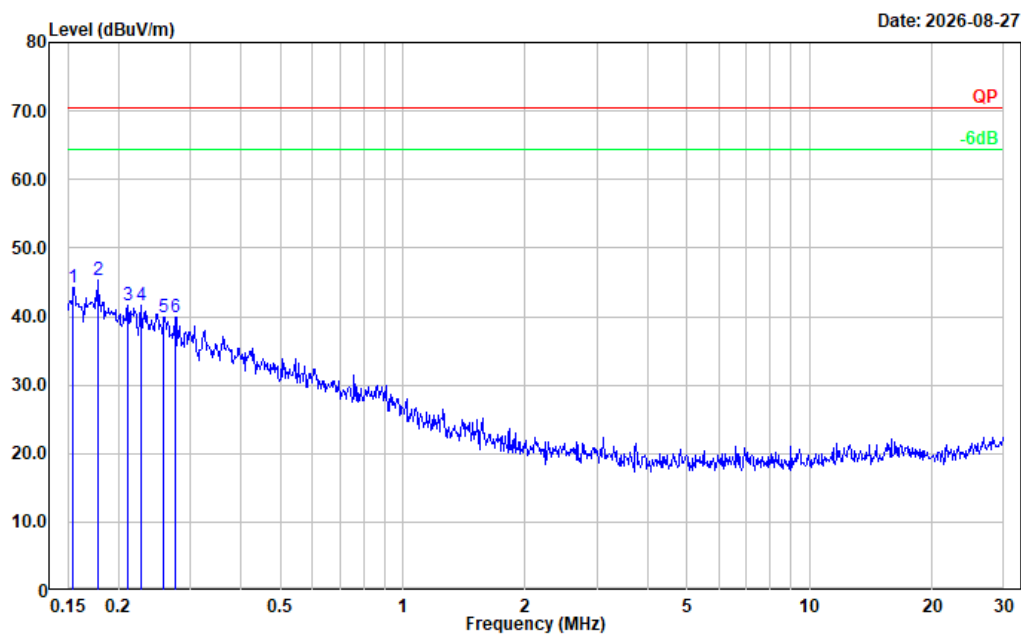


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.155	32.49	11.79	44.28	70.38	26.10	Peak
2	0.178	34.54	10.73	45.27	70.38	25.11	Peak
3	0.211	32.36	9.20	41.56	70.38	28.82	Peak
4	0.227	33.15	8.45	41.60	70.38	28.78	Peak
5	0.259	33.04	6.95	39.99	70.38	30.39	Peak
6	0.276	33.74	6.16	39.90	70.38	30.48	Peak

Project No.: 2603U19053E-EM
Tester: Peter Rong
Condition: RBW:120 kHz VBW:500 kHz
Polarization: horizontal
Note: M1 Operating

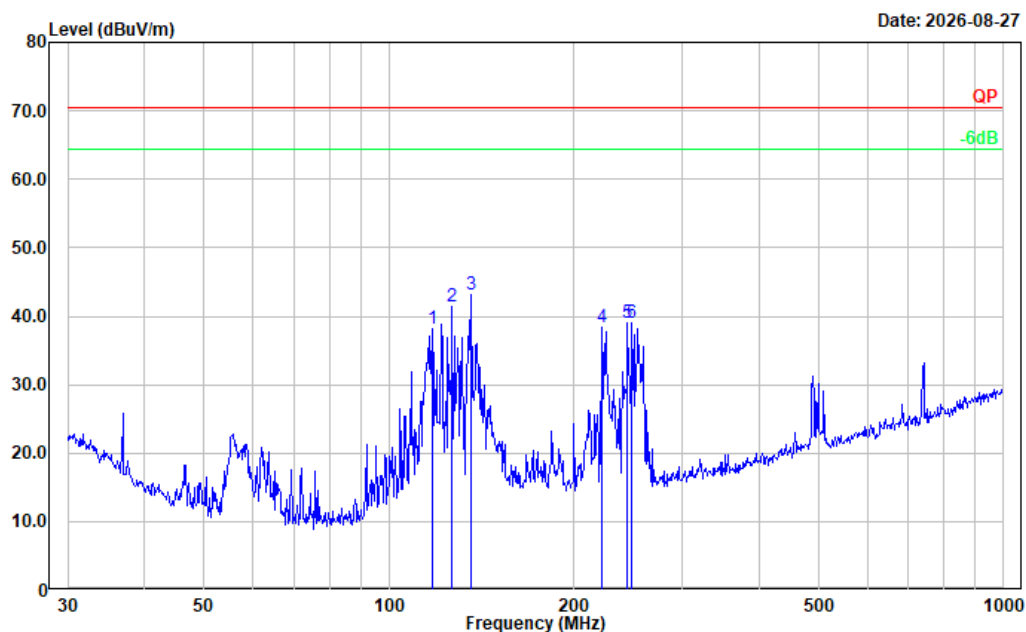

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	117.360	49.44	-11.39	38.05	70.38	32.33	Peak
2	126.772	52.34	-10.96	41.38	70.38	29.00	Peak
3	135.982	54.64	-11.49	43.15	70.38	27.23	Peak
4	222.170	51.84	-13.41	38.43	70.38	31.95	Peak
5	244.232	51.70	-12.63	39.07	70.38	31.31	Peak
6	248.552	51.84	-12.71	39.13	70.38	31.25	Peak

Project No.: 2603U19053E-EM
Tester: Peter Rong
Condition: RBW:120 kHz VBW:500 kHz
Polarization: vertical
Note: M1 Operating

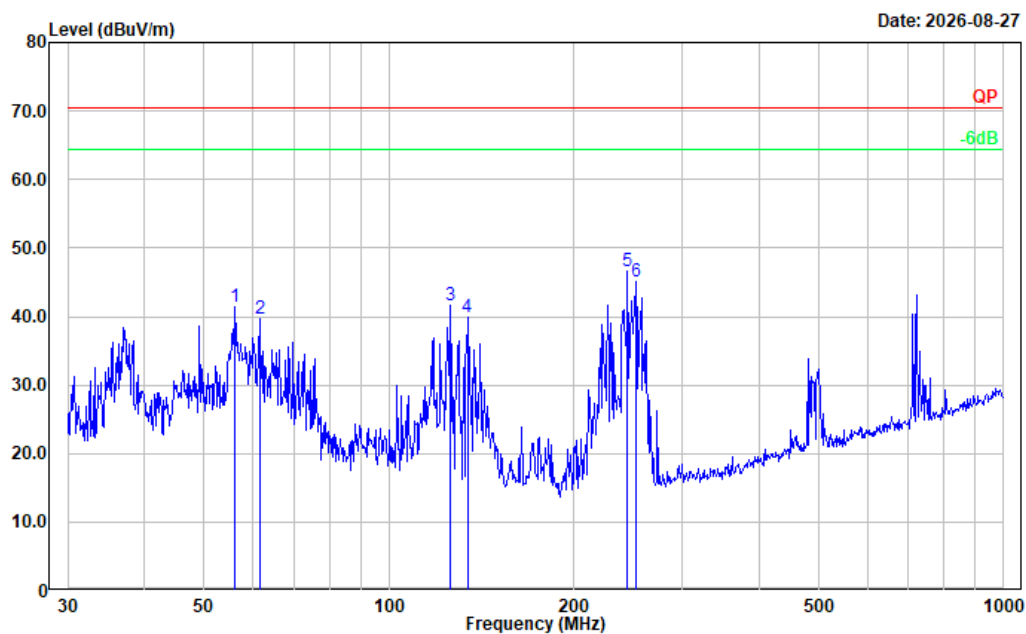

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	56.197	59.17	-17.71	41.46	70.38	28.92	Peak
2	61.562	57.33	-17.56	39.77	70.38	30.61	Peak
3	125.886	52.51	-10.96	41.55	70.38	28.83	Peak
4	134.088	51.37	-11.41	39.96	70.38	30.42	Peak
5	244.232	59.33	-12.63	46.70	70.38	23.68	Peak
6	252.063	57.80	-12.62	45.18	70.38	25.20	Peak

4.2.2 1 GHz – 25 GHz

Sample Number:	3OQ3-1	Test Date:	2026/8/25
Test Site:	966-2	Test Mode:	M1
Tester:	Peter Rong	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.8	Relative Humidity: (%)	61	ATM Pressure: (kPa)	99.5
----------------------	------	------------------------------	----	---------------------------	------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	9912-5985	2023/12/6	2026/12/5
R&S	Spectrum Analyzer	FSV40	101591	2026/2/27	2027/2/26
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2025/11/10	2026/11/9
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2025/11/10	2026/11/9
A.H	Pre-amplifier	PAM-0118P	628	2025/11/10	2026/11/9
Audix	Test Software	E3	191218 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2024/5/24	2027/5/23
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2025/11/10	2026/11/9
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2025/11/10	2026/11/9
Decentest	Multiplex Switch Test Control Set	DT7220SCU	DQ77925	2026/8/3	2027/8/2
Decentest	Filter Switch Unit	DT7220FSU	DQ77928	2026/8/3	2027/8/2

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
1000ml water							
2196.300	31.98	AV	H	30.66	62.64	70.38	7.74
2393.200	31.50	AV	V	31.66	63.16	70.38	7.22
2202.300	29.12	AV	H	30.66	59.78	70.38	10.60
2197.300	29.42	AV	V	30.66	60.08	70.38	10.30
700ml water							
4902.400	25.42	AV	H	38.24	63.66	70.38	6.72
4895.800	25.18	AV	V	38.23	63.41	70.38	6.97
7355.100	20.67	AV	H	43.05	63.72	70.38	6.66
7353.400	20.17	AV	V	43.04	63.21	70.38	7.17
300ml water							
4903.500	25.69	AV	H	38.24	63.93	70.38	6.45
4896.200	24.42	AV	V	38.23	62.65	70.38	7.73
7352.600	21.55	AV	H	43.04	64.59	70.38	5.79
7350.100	20.49	AV	V	43.05	63.54	70.38	6.84

4.3 Radiation Hazard Measurement

Sample Number:	3OQ3-1	Test Date:	2026/9/22
Test Site:	966-2	Test Mode:	Operation
Tester:	Peter Rong	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.7	Relative Humidity: (%)	59	ATM Pressure: (kPa)	100.7
----------------------	------	---------------------------	----	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	9912-5985	2023/12/6	2026/12/5
R&S	Spectrum Analyzer	FSV40	101591	2026/2/27	2027/2/26
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2025/11/10	2026/11/9
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2025/11/10	2026/11/9
A.H	Pre-amplifier	PAM-0118P	628	2025/11/10	2026/11/9
YOKOGAWA	Digital Power Meter	WT210	CR23142113	2026/8/3	2027/8/2
SPEAG	Thermohygrometer	DTM3000	3892	2026/3/29	2027/3/28
Dingxing	Electronic Balance	DSII-861	215219	2026/1/29	2027/1/28

*** Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

1) Input Power

Input Voltage (V _{AC})	Input Current (Amps)	Measured Input Power (Watts)	Rated Input Power (Watts)
116.7	11.9	1388.73	1350

☒ Based on the measured input power, the EUT was found to be operating within the intended specifications.

2) RF Output Power

m _w (g)	m _c (g)	T ₀ (°C)	T ₁ (°C)	T ₂ (°C)	t (s)
1000	260	22.7	27.7	35.6	40

RF Output Power = $(4.187 \times 1000 \times (35.6 - 22.7) + 0.55 \times 260 \times (35.6 - 22.7)) / 40 = 873.05 \text{ Watts}$

P is the microwave power output, in watts;

m_w is the mass of the water, in grams;

m_c is the mass of the container, in grams;

T₀ is the ambient temperature, in degrees Celsius;

T₁ is the initial temperature of the water, in degrees Celsius;

T₂ is the final temperature of the water, in degrees Celsius;

t is the heating time, in seconds, excluding the magnetron filament heating-up time.

☐ The measurement output power was found to be less than 500 watts. Therefore, in accordance with Section 18.305 of Subpart-C, the measured out-of-band emissions were compared to the limit of 25μV/meter at a 300-meter measurement distance.

☒ The measured output power was found to exceed 500 watts. Therefore, in accordance with Section 18.305 of Subpart-C, the measured out-of-band emissions were compared with the limit calculated as following:

$$\text{LFS} = 25 * \text{SQRT} (\text{Power Output}/500)$$

$$\text{LFS} = 25 * \text{SQRT} (873.05/500)$$

$$\text{LFS} = 33.04$$

Where: LFS is the maximum allowable field strength for out-of-band emissions in μV/meter at a 300-meter measurement distance. Power Output is the measured output power in watts.

LFS μV/m@300m	dBμV/m@300m	dBμV/m@3m
33.04	30.38	70.38

Note: Limit (dBμV/m@3m) = Limit (dBμV/m@300m) + 40(dB)


3) Operating Frequency

Variation in Operating Frequency with Time

Frequency at Start time (MHz)	Frequency at End time (MHz)
2463.18	2464.57

Refer to data pages for details of the variation in operating frequency with time measurement.


Start time:

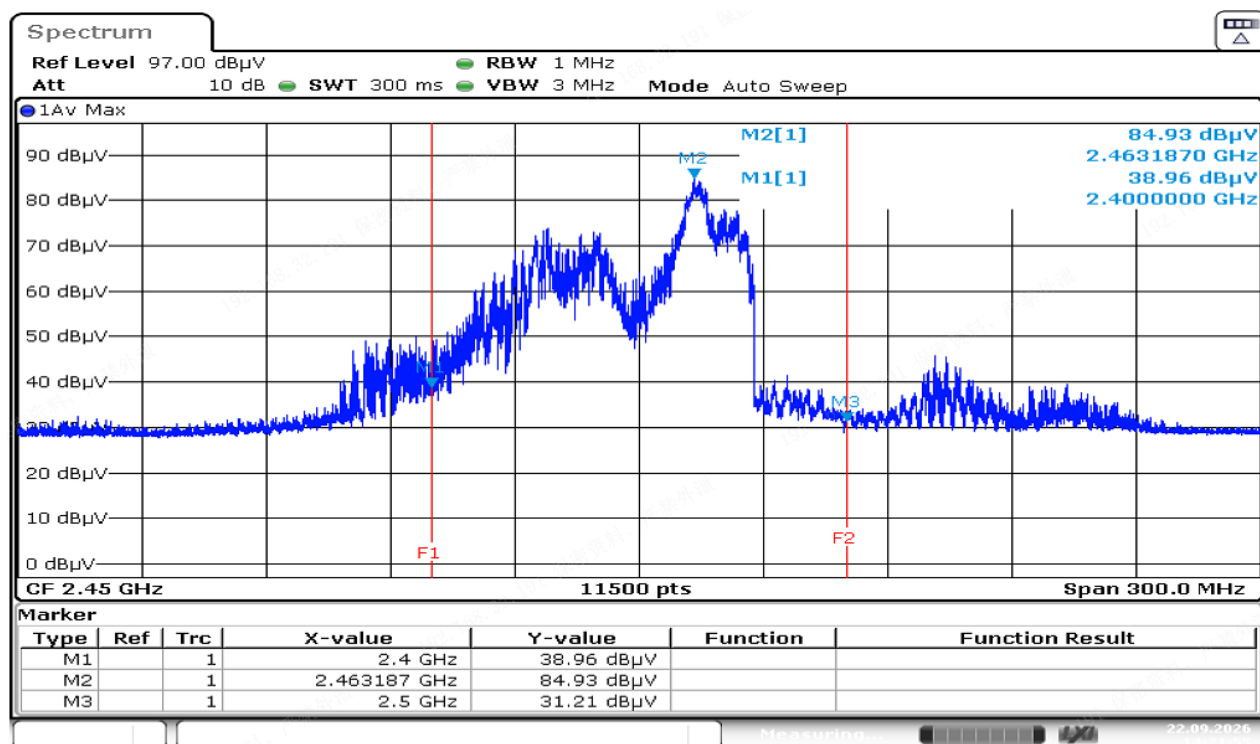

ProjectNo.:2603U19053E-EM Tester:Peter Rong

Date: 22.SEP.2026 14:21:56

End time:

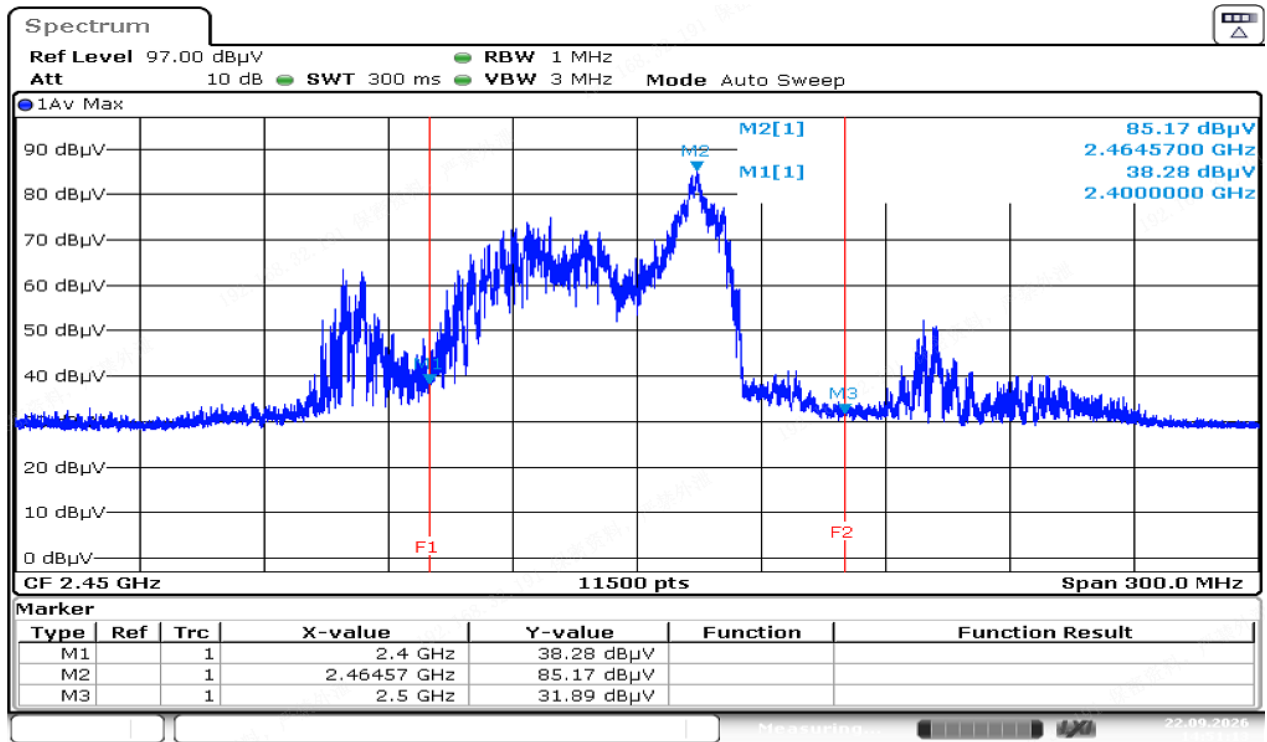

ProjectNo.:2603U19053E-EM Tester:Peter Rong

Date: 22.SEP.2026 14:51:13


Variation in Operating Frequency with Line Voltage

Line voltage varied from 96 V_{AC} to 150 V_{AC}.

(Low voltage) Frequency (MHz)	(High voltage) Frequency (MHz)
2463.03	2463.42


Please refer to following pages for details of the variation in operating frequency with line voltage measurement.

Low Voltage:

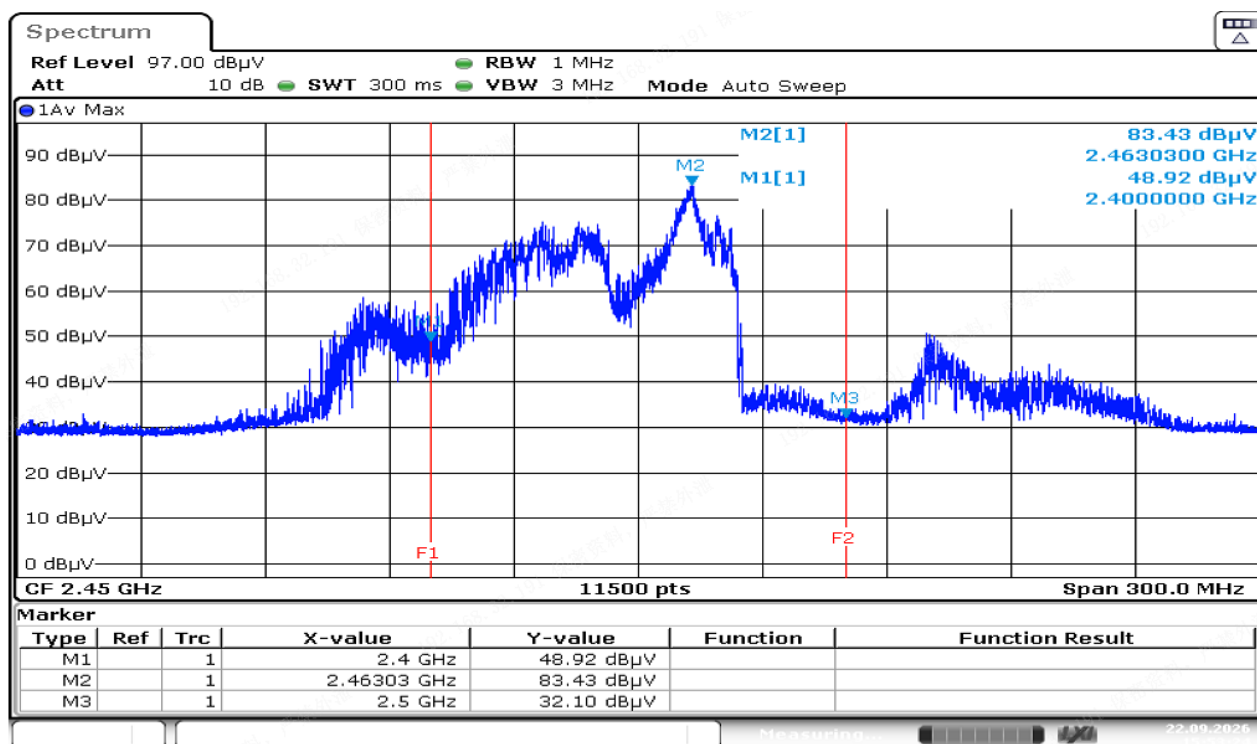

ProjectNo.:2603U19053E-EM Tester:Peter Rong

Date: 22.SEP.2026 15:53:25

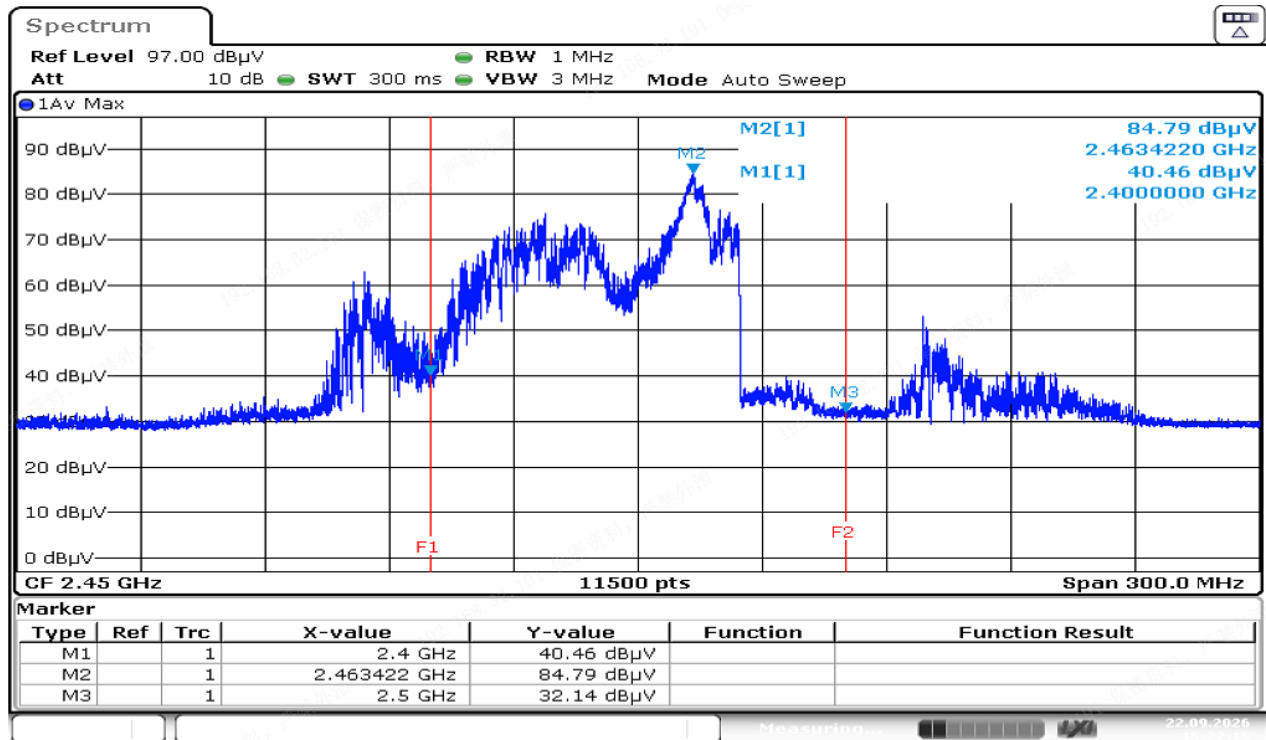High Voltage:

ProjectNo.:2603U19053E-EM Tester:Peter Rong

Date: 22.SEP.2026 15:22:15

5. RF EXPOSURE EVALUATION

5.1 Maximum Permissible Exposure (MPE)

5.1.1 Applicable Standard

According to subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

5.1.2 Limits

Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

5.1.3 Measurement

Sample Number:	3OQ3-1	Test Date:	2026/8/25
Test Site:	966-2	Test Mode:	Operation
Tester:	Peter Rong	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.8	Relative Humidity: (%)	61	ATM Pressure: (kPa)	99.5
----------------------	------	---------------------------	----	---------------------------	------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS	Microwave Survery Meter	1501	123654	2026/3/14	2027/3/13

** **Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Radiation leakage was measured in the as-received condition with the oven door closed using a microwave leakage meter.

A 275 mL water load was placed in the center of the oven and the oven was operated at maximum output power.

☒ There was no microwave leakage exceeding a power level of 0.1mW/cm² observed at any point 5 cm or more from the external surface of the oven.

A maximum of 1.0 mW/cm² is allowed in accordance with the applicable Federal Standards. Hence, microwave leakage in the as-received condition with the oven door closed was below the maximum allowed.

6. EUT PHOTOGRAPHS

Please refer to the attachment 2603U19053E-EM-EXP EUT EXTERNAL PHOTOGRAPHS and 2603U19053E-EM-INP EUT INTERNAL PHOTOGRAPHS

7. TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2603U19053E-EM-00-TSP TEST SETUP PHOTOGRAPHS.

*****END OF REPORT*****