FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E

CERTIFICATION TEST REPORT

For

GSM/WCDMA Phone + Bluetooth, DTS b/g/n and ANT+

MODEL NUMBER: SM-A300H/DS, SM-A300H

FCC ID: A3LSMA300H

REPORT NUMBER: 14I18839-E1 REVISION A

ISSUE DATE: Oct 14, 2014

Prepared for

SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

Prepared by

UL VERIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	9/16/14	Initial issue	P. Zhang
A	10/14/14	Updated page 13, 33,39,59	P. Zhang

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 5
2. TEST METHODOLOGY 6
3. FACILITIES AND ACCREDITATION 6
4. CALIBRATION AND UNCERTAINTY 6
4.1. MEASURING INSTRUMENT CALIBRATION 6
4.2. SAMPLE CALCULATION 6
4.3. MEASUREMENT UNCERTAINTY 7
5. EQUIPMENT UNDER TEST 8
5.1. DESCRIPTION OF EUT 8
5.2. MAXIMUM OUTPUT POWER 8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS 9
5.4. DESCRIPTION OF TEST SETUP 10
6. TEST AND MEASUREMENT EQUIPMENT 13
7. Summary Table 14
8. RF POWER OUTPUT VERIFICATION 15
8.1. GSM/GPRS/EDGE 15
8.1.1. GSM OUTPUT POWER RESULT 16
8.2. UMTS REL 99 18
8.2.1. UMTS REL 99 OUTPUT POWER RESULT 18
8.3. UMTS HSDPA 19
8.3.1. UMTS HSDPA OUTPUT POWER RESULT 20
8.4. UMTS HSUPA 21
8.4.1. UMTS HSUPA OUTPUT POWER RESULT 22
9. PEAK TO AVERAGE RATIO 23
9.1. CONDUCTED PEAK TO AVERAGE RESULT 23
9.1.1. WCDMA 23
9.1.2. GSM 25
10. LIMITS AND CONDUCTED RESULTS 27
10.1. OCCUPIED BANDWIDTH 27
10.1.1. OCCUPIED BANDWIDTH RESULTS 28
10.1.1. OCCUPIED BANDWIDTH PLOTS 30
10.2. BAND EDGE EMISSIONS 33

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.2.1. BAND EDGE PLOTS 34
10.3. OUT OF BAND EMISSIONS 39
10.3.1. OUT OF BAND EMISSIONS RESULT 40
10.3.2. OUT OF BAND EMISSIONS PLOTS.....42
10.4. FREQUENCY STABILITY 45
10.4.1. FREQUENCY STABILITY RESULTS.....46
11. RADIATED TEST RESULTS 48
11.1. RADIATED POWER (ERP & EIRP).....48
11.1.1. ERP/EIRP Results.....49
11.1.2. ERP/EIRP DATA.....50
11.2. FIELD STRENGTH OF SPURIOUS RADIATION.....58
11.2.1. SPURIOUS RADIATION DATA.....60
12. SETUP PHOTOS 68

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1. ATTESTATION OF TEST RESULTS

COMPANY NAME:	**SAMSUNG ELECTRONICS CO., LTD.**
EUT DESCRIPTION:	**GSM/WCDMA Phone + Bluetooth + DTS b/g/n & ANT+**
MODEL:	**SM-A300H/DS, SM-A300H**
SERIAL NUMBER:	**1957568 (Radiated); 1957564 (Conducted)**
DATE TESTED:	**September 15 - September 16, 2014**

APPLICABLE STANDARDS	
STANDARD	**TEST RESULTS**
FCC PART 22H and 24E	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

Tested By:

CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22 and FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A(IC: 2324B-1)	☐ Chamber D(IC: 2324B-4)
☒ Chamber B(IC: 2324B-2)	☐ Chamber E(IC: 2324B-5)
☒ Chamber C(IC: 2324B-3)	☐ Chamber F(IC: 2324B-6)
	☐ Chamber G(IC: 2324B-7)
	☐ Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at http://ts.nist.gov/standards/scopes/2000650.htm.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

EIRP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(between the SG and substitution antenna) + Substitution Antenna Factor (dBi)

ERP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(between the SG and substitution antenna)

(Path loss = Signal generator output – PSA reading with substitution antenna)

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 40000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA Phone + Bluetooth, DTS b/g/n and ANT+.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation mW	Conducted		Radiated	
			AVG (dBm)	AVG (mW)	AVG(dBm)	AVG (mW)
GSM850	824~849	GMSK	32.6	1819.70		
	824~849	GPRS	32.6	1819.70	24.49	281.19
	824~849	EGPRS	27.5	562.34	20.70	117.49
GSM1900	1850~1910	GMSK	30.0	1000		
	1850~1910	GPRS	30.0	1000	30.72	1180.32
	1850~1910	EGPRS	26.5	446.68	27.23	548.45
Band 5	824~849	REL99	22.9	194.98	17.90	61.66
	824~849	HSDPA	22.0	158.49	17.03	50.47
	824~849	HSUPA	22.0	158.49		
Band 2	1850~1910	REL99	22.5	177.83	22.15	164.06
	1850~1910	HSDPA	20.5	112.20	21.38	137.40
	1850~1910	HSUPA	21.5	141.25		

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
GSM850, 824~849MHz	-2.2
GSM1900, 1850~1910MHz	-2.8
Band 5, 824~849MHz	-2.2
Band 2, 1850~1910MHz	-2.8

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	**Manufacturer**	**Model**	**Serial Number**	**FCC ID**
AC Adapter	Samsung	ETA0U83EWE	N/A	N/A
Earphone	Samsung	EHS64AVFWE	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	**Port**	**# of identical ports**	**Connector Type**	**Cable Type**	**Cable Length (m)**	**Remarks**
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA

I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	**Port**	**# of Identical Ports**	**Connector Type**	**Cable Type**	**Cable Length**	**Remarks**
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes

TEST SETUP

The EUT is continuously communicated to the call box during the tests.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

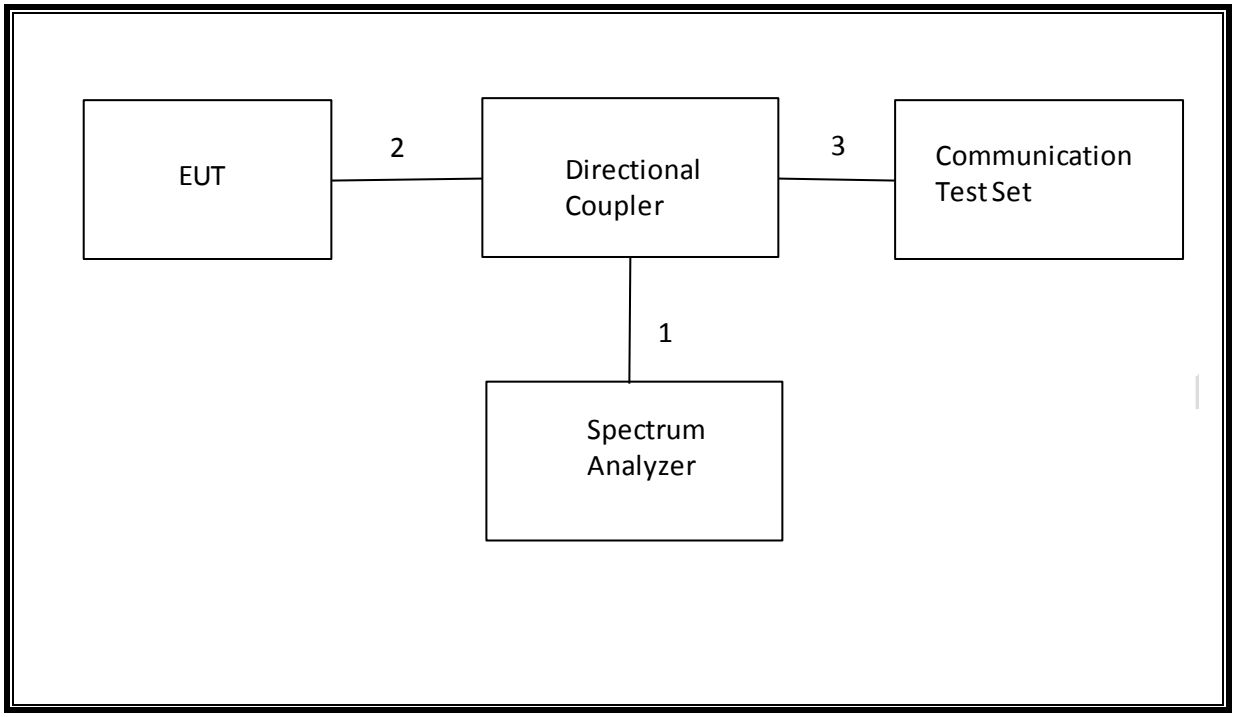

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

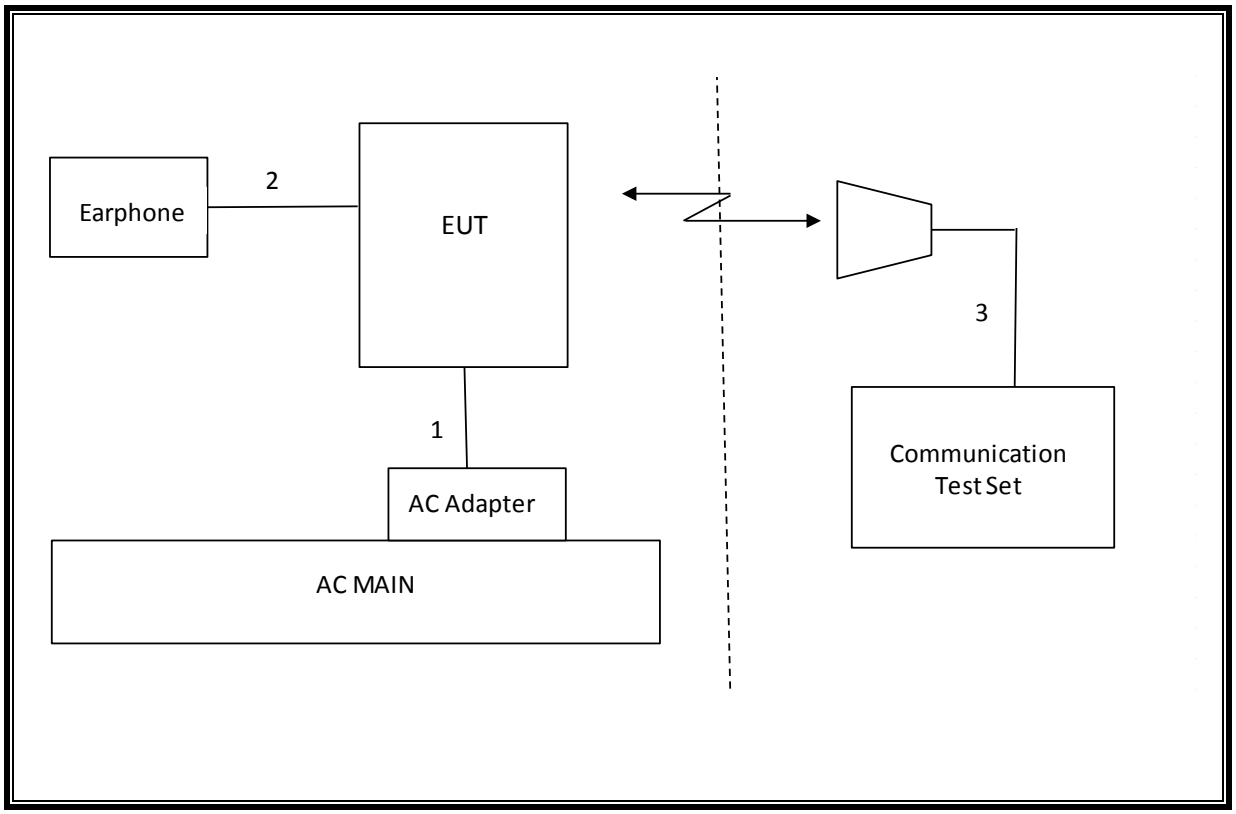

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	08/14/15
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 18 GHz	EMCO	3115	C00784	10/25/14
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/15
Communications Test Set	R&S	CMW500	T159	07/02/15
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/15
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	C00993	02/14/15
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/14

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	4.229 MHz
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-15.704dBm
2.1046	N/A	Conducted output power	N/A		Pass	32.6dBm
22.355 24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability	2.5PPM		Pass	0.007 PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	24.49 dBm
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	30.72 dBm
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-34.3dBm

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press Connection control to choose the different menus

Press RESET > choose all to reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM+GPRS or GSM+EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850/900

> 30 dBm for GPRS1800/1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0> 4 dB

Slot Config > Unchanged (if already set under MS Signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3 (Default)

Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)

Bit Stream > 2E9-1PSR Bit Pattern

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal On to turn on the signal and change settings

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.1.1. GSM OUTPUT POWER RESULT

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
850	GSM (Voice)	CS1	1	128	824.2	32.6	23.6
				190	836.6	32.5	23.5
				251	848.8	32.5	23.5
	GPRS (GMSK)	CS1	1	128	824.2	32.6	23.6
				190	836.6	32.5	23.5
				251	848.8	32.5	23.4
			2	128	824.2	30.3	24.3
				190	836.6	30.1	24.1
				251	848.8	30.0	24.0
			3	128	824.2	28.4	24.1
				190	836.6	28.4	24.1
				251	848.8	28.4	24.1
			4	128	824.2	26.8	23.8
				190	836.6	26.6	23.6
				251	848.8	26.7	23.7
	EGPRS (8PSK)	MCS5	1	128	824.2	27.5	18.5
				190	836.6	27.5	18.5
				251	848.8	27.5	18.5
			2	128	824.2	26.7	20.7
				190	836.6	26.6	20.6
				251	848.8	26.7	20.7
			3	128	824.2	24.1	19.8
				190	836.6	24.0	19.7
				251	848.8	24.1	19.8
			4	128	824.2	23.8	20.8
				190	836.6	23.7	20.7
				251	848.8	23.7	20.7

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
GSM (Voice)	CS1	1	512	1850.2	30.0	21.0
			661	1880.0	30.0	21.0
			810	1909.8	30.0	21.0
GPRS (GMSK)	CS1	1	512	1850.2	30.0	21.0
			661	1880.0	30.0	21.0
			810	1909.8	30.0	21.0
		2	512	1850.2	27.4	21.4
			661	1880.0	27.0	21.0
			810	1909.8	27.4	21.4
		3	512	1850.2	25.2	20.9
			661	1880.0	24.7	20.4
			810	1909.8	25.3	21.0
		4	512	1850.2	24.0	21.0
			661	1880.0	23.5	20.5
			810	1909.8	24.0	21.0
EGPRS (8PSK)	MCS5	1	512	1850.2	26.5	17.5
			661	1880.0	26.0	17.0
			810	1909.8	26.5	17.5
		2	512	1850.2	25.5	19.5
			661	1880.0	25.3	19.3
			810	1909.8	25.5	19.5
		3	512	1850.2	23.0	18.7
			661	1880.0	22.5	18.2
			810	1909.8	23.1	18.8
		4	512	1850.2	22.7	19.7
			661	1880.0	22.3	19.3
			810	1909.8	22.8	19.8

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2. UMTS REL 99

TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	βc	Not Applicable
	βd	Not Applicable
	βec	Not Applicable
	βc/βd	8/15
	βhs	Not Applicable
	βed	Not Applicable

8.2.1. UMTS REL 99 OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	Conducted Power (dBm)
				Avg (dBm)
Band 5	REL99	4132	826.4	22.9
		4183	836.6	22.8
		4233	846.6	22.8
Band 2	REL99	9262	1852.4	22.4
		9400	1880	22.5
		9538	1907.6	22.4

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	βc	2/15	12/15	15/15	15/15
	βd	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	βc/βd	2/15	12/15	15/8	15/4
	βhs	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	Ahs =βhs/βc	30/15			

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.1. UMTS HSDPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm) Avg (dBm)
Band 5	HSDPA	1	4132	826.4	22.0
			4183	836.6	21.9
			4233	846.6	21.9
		2	4132	826.4	21.9
			4183	836.6	21.8
			4233	846.6	21.8
		3	4132	826.4	21.4
			4183	836.6	21.4
			4233	846.6	21.3
		4	4132	826.4	21.3
			4183	836.6	21.3
			4233	846.6	21.4
Band 2	HSDPA	1	9262	1852.4	20.0
			9400	1880	20.5
			9538	1907.6	20.2
		2	9262	1852.4	20.0
			9400	1880	20.4
			9538	1907.6	20.1
		3	9262	1852.4	20.0
			9400	1880	20.4
			9538	1907.6	20.2
		4	9262	1852.4	20.0
			9400	1880	20.3
			9538	1907.6	20.3

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.4. UMTS HSUPA

TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCH (dB)	-9				
	HS-SCCH_1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
	Bec	209/225	12/15	30/15	2/15	5/15
	βc/βd	11/15	6/15	15/9	2/15	15/15
	Bhs	22/15	12/15	30/15	4/15	30/15
	βed (note1)	1309/225	94/75	47/15 47/15	56/75	134/15
	MPR	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = βhs/βc	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	

Note1: βed cannot be set directly, it is set by Absolute Grant Value.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.4.1. UMTS HSUPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm)
					Avg (dBm)
Band 5	HSUPA	1	4132	826.4	21.0
			4183	836.6	21.0
			4233	846.6	21.8
		2	4132	826.4	21.4
			4183	836.6	21.3
			4233	846.6	21.3
		3	4132	826.4	21.7
			4183	836.6	21.7
			4233	846.6	21.6
		4	4132	826.4	21.9
			4183	836.6	21.8
			4233	846.6	21.7
		5	4132	826.4	21.9
			4183	836.6	21.9
			4233	846.6	22.0
Band 2	HSUPA	1	9262	1852.4	21.2
			9400	1880	21.5
			9538	1907.6	21.4
		2	9262	1852.4	20.7
			9400	1880	21.0
			9538	1907.6	20.7
		3	9262	1852.4	21.2
			9400	1880	21.2
			9538	1907.6	21.4
		4	9262	1852.4	21.2
			9400	1880	21.4
			9538	1907.6	21.3
		5	9262	1852.4	20.5
			9400	1880	21.0
			9538	1907.6	20.9

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT

9.1.1. WCDMA

Band Band 2 HSDPA	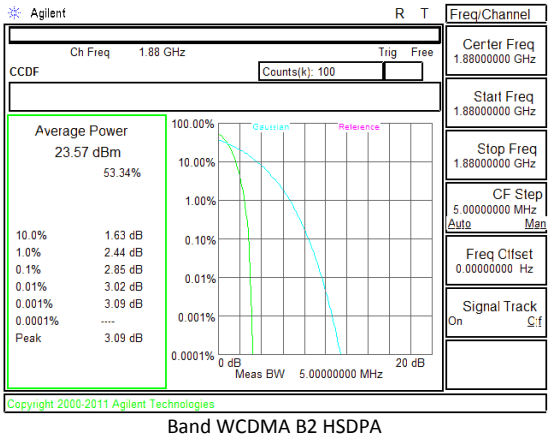 Band WCDMA B2 HSDPA	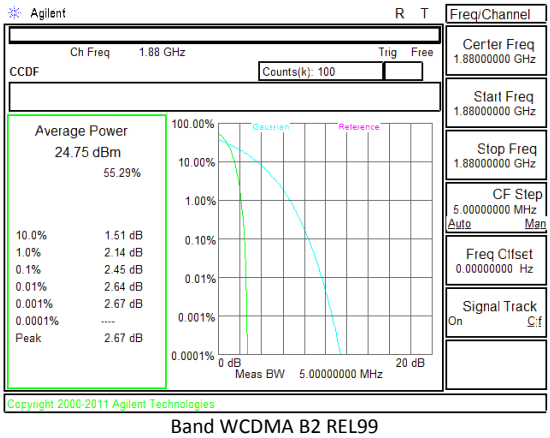 Band WCDMA B2 REL99

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band Band 5 HSDPA	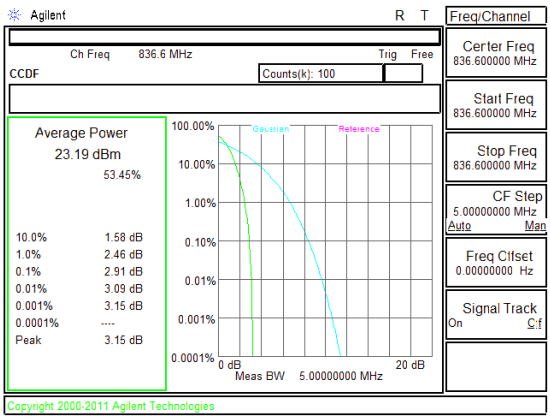 Band WCDMA B5 HSDPA	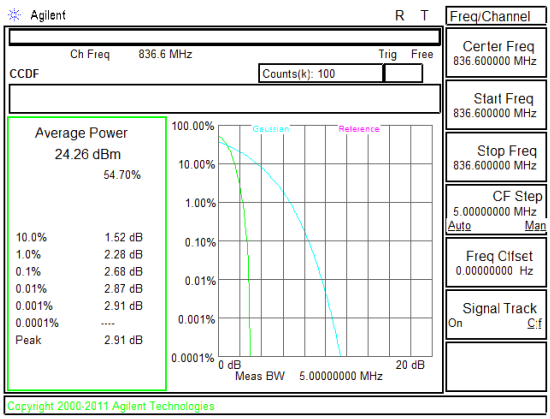 Band WCDMA B5 REL99

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9.1.2. GSM

Band 5 GSM	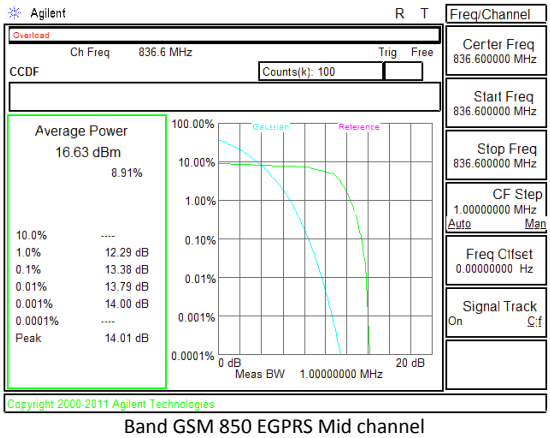 Band GSM 850 EGPRS Mid channel	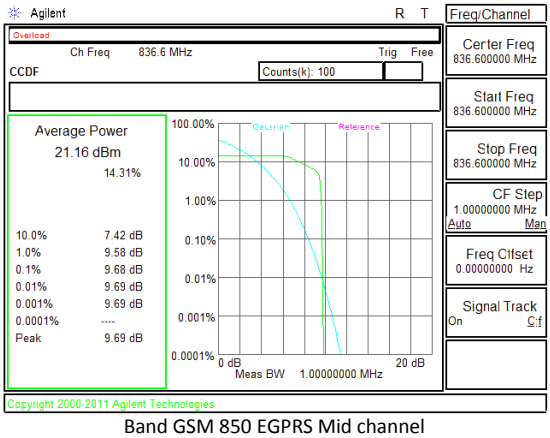 Band GSM 850 EGPRS Mid channel

UL VERIFICATION SERVICES INC.
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
FORM NO: CCSUP4701I
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band 5 GSM	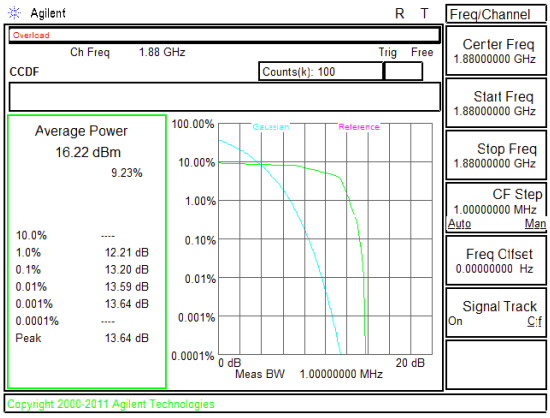 Band GSM 1900 EGPRS Mid channel	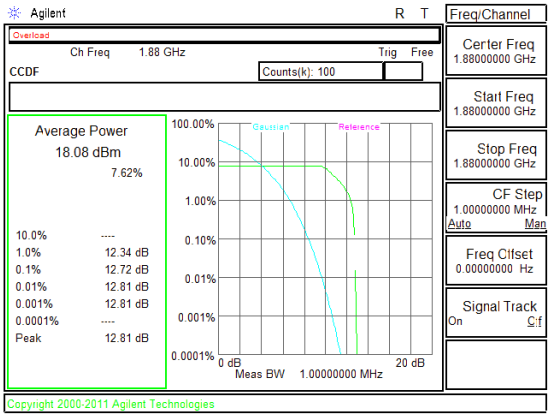 Band GSM 1900 EGPRS Mid channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r01 - 06/07/2013)

MODES TESTED

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.1.1. OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
GSM850	GMSK	128	824.2		
		190	836.6		
		251	848.8		
	GPRS	128	824.2	244.23	320.32
		190	836.6	241.85	323.82
		251	848.8	240.94	323.11
	EGPRS	128	824.2	255.70	317.28
		190	836.6	260.51	311.69
		251	848.8	260.33	309.17
GSM1900	GMSK	512	1850.2		
		661	1880		
		810	1909.8		
	GPRS	512	1850.2	243.97	320.51
		661	1880	240.13	318.90
		810	1909.8	242.44	316.44
	EGPRS	512	1850.2	246.08	306.29
		661	1880	261.87	359.63
		810	1909.8	251.77	310.10

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
Band 5	REL99	4132	826.4	4.173	4.662
		4183	836.6	4.183	4.664
		4233	846.6	4.159	4.656
	HSDPA	4132	826.4	4.176	4.665
		4183	836.6	4.179	4.647
		4233	846.6	4.171	4.662
	HSUPA	4132	826.4		
		4183	836.6		
		4233	846.6		
Band 2	REL99	9262	1852.4	4.201	4.673
		9400	1880	4.196	4.695
		9538	1907.6	4.229	4.744
	HSDPA	9262	1852.4	4.175	4.661
		9400	1880	4.179	4.656
		9538	1907.6	4.207	4.700
	HSUPA	9262	1852.4		
		9400	1880		
		9538	1907.6		

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.1.1. OCCUPIED BANDWIDTH PLOTS

OCCUPIED BANDWIDTH PLOTS

Band Band 2 HSDPA	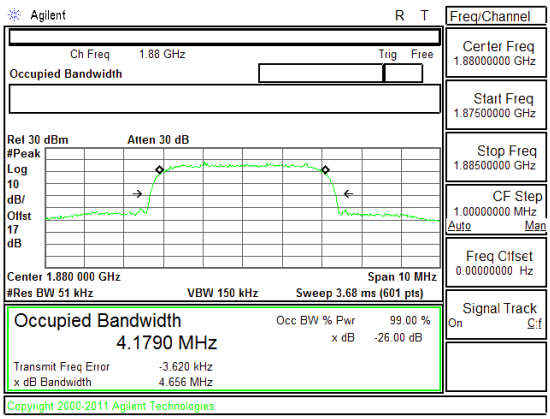 Band WCDMA B2 HSDPA OBW	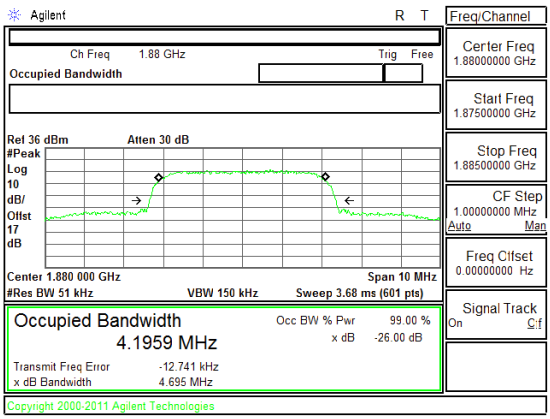 Band WCDMA B2 REL99 OBW

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

Band 5

HSDPA

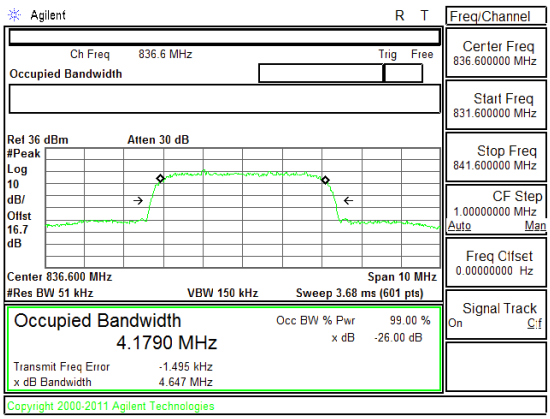

Band WCDMA B5 HSDPA OBW

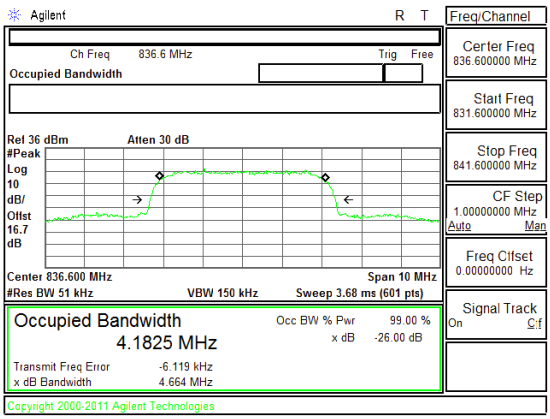

Band WCDMA B5 REL99 OBW

Band

GSM 1900

EGPRS

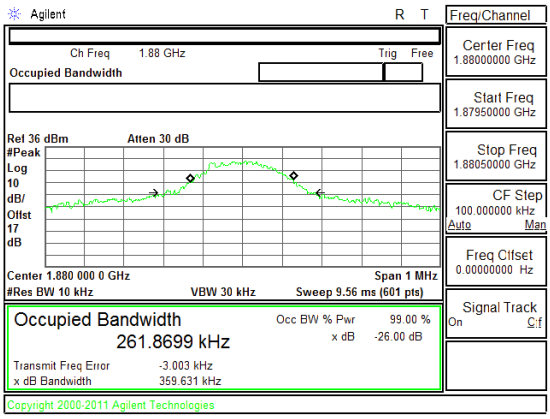

Band GSM1900 EGPRS OBW Mid channel

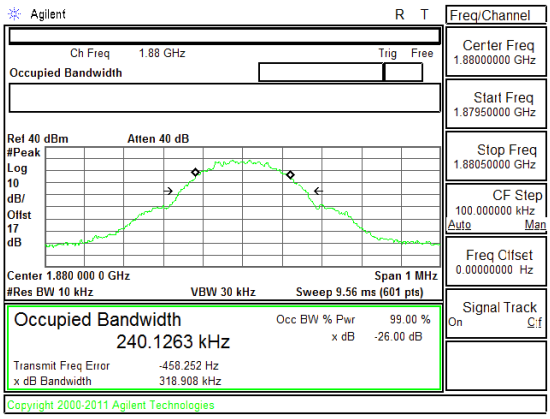

Band GSM1900 GPRS OBW Mid channel

UL VERIFICATION SERVICES INC.
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
FORM NO: CCSUP4701I
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band GSM 850 EGPRS	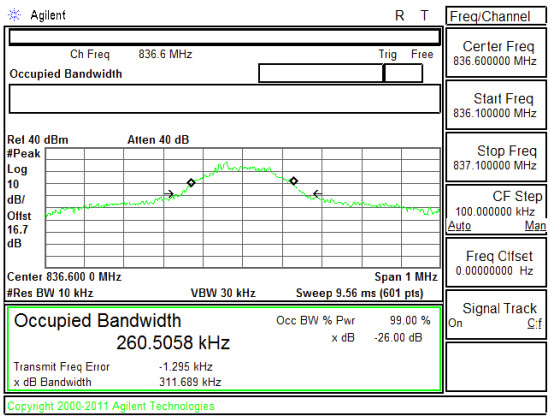 Band GSM850 EGPRS OBW Mid channel	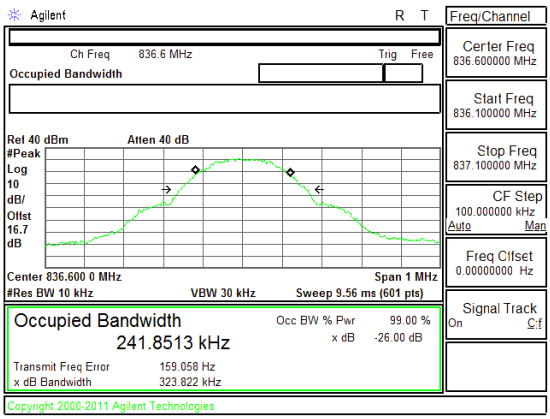 Band GSM850 GPRS OBW Mid channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01
The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

MODES TESTED

GSM, WCDMA

RESULTS

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.2.1. BAND EDGE PLOTS

WCDMA

Band Band 2 HSDPA	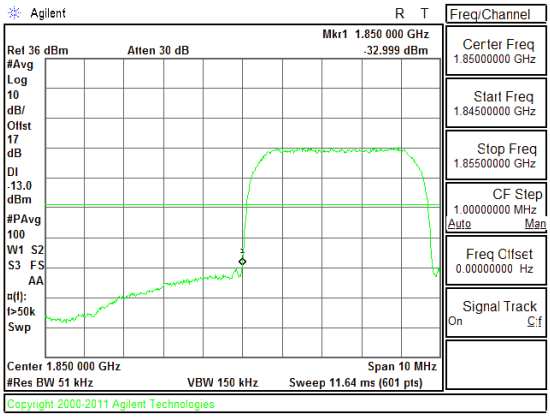 Band WCDMA B2 HSDPA CBE	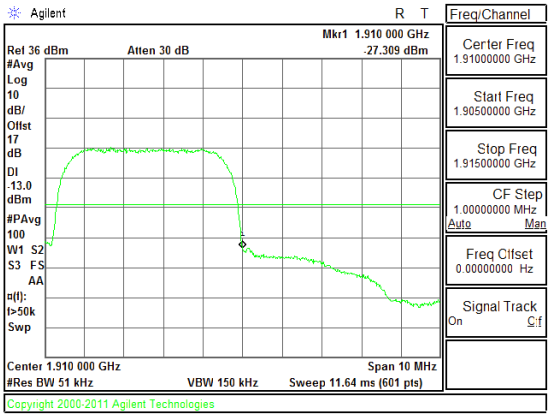 Band WCDMA B2 HSDPA CBE

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band Band 2 REL99	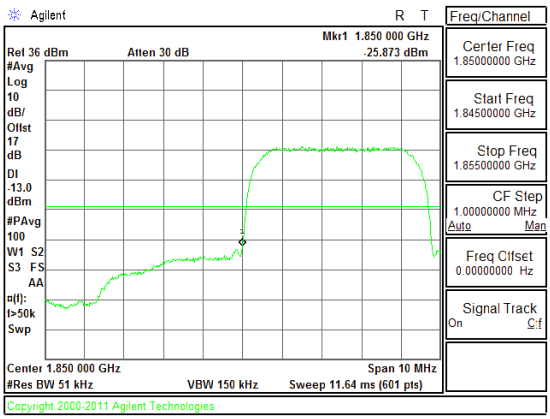 Band WCDMA B2 REL99 CBE	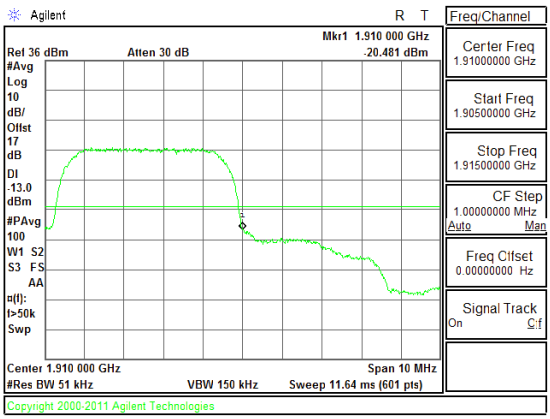 Band WCDMA B2 REL99 CBE

Band Band 5	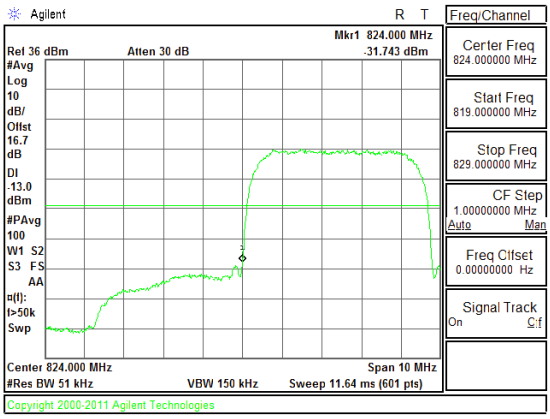 Band WCDMA B5 HSDPA CBE	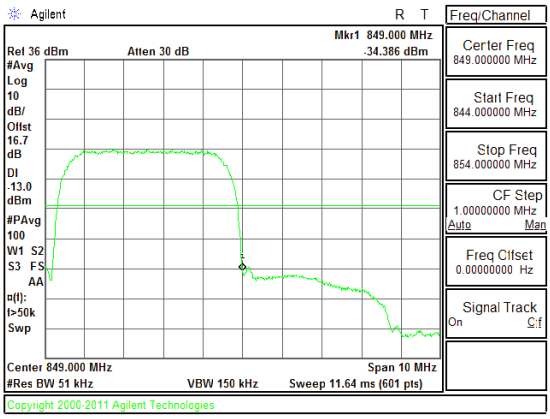 Band WCDMA B5 REL99 CBE

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band Band 5	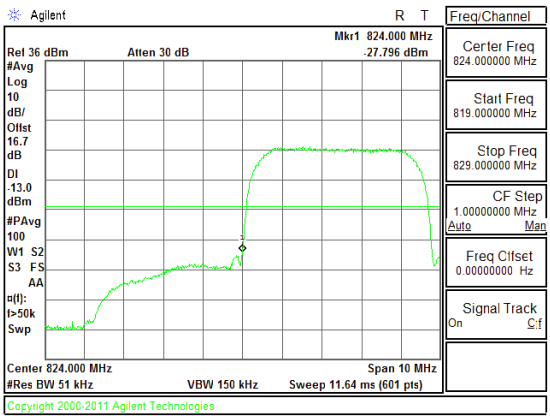 Band WCDMA B5 REL99 CBE	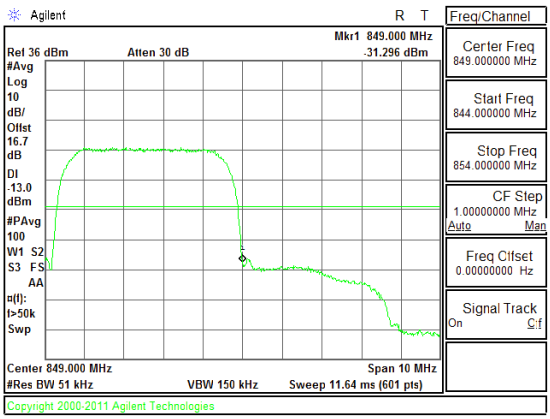 Band WCDMA B5 HSDPA CBE

Band GSM 1900 EGPRS	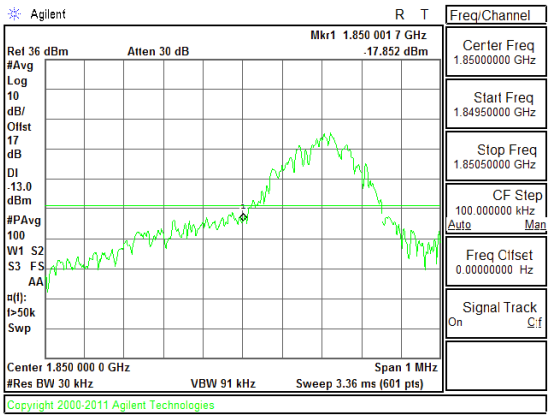 Band GSM1900 EGPRS CBE Low channel	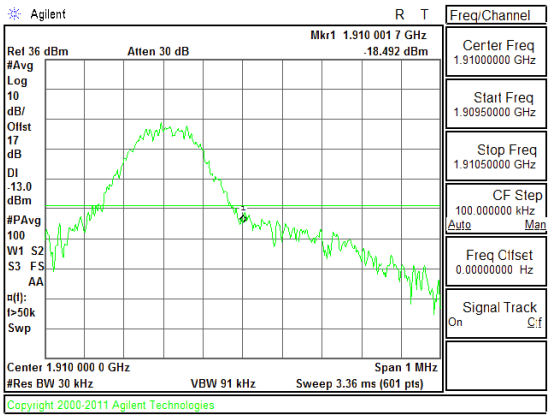 Band GSM1900 EGPRS CBE High channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band GSM 1900 GPRS	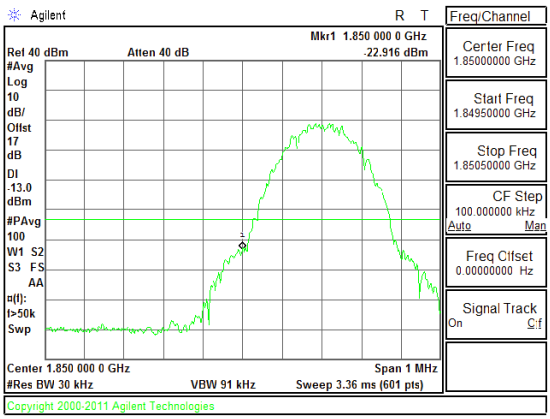 Band GSM1900 GPRS CBE Low channel	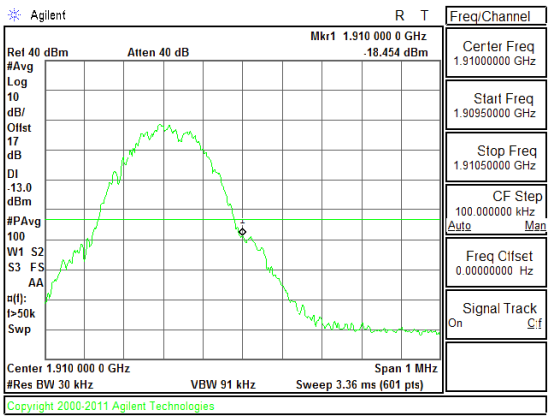 Band GSM1900 GPRS CBE High channel

Band GSM 850 EGPRS	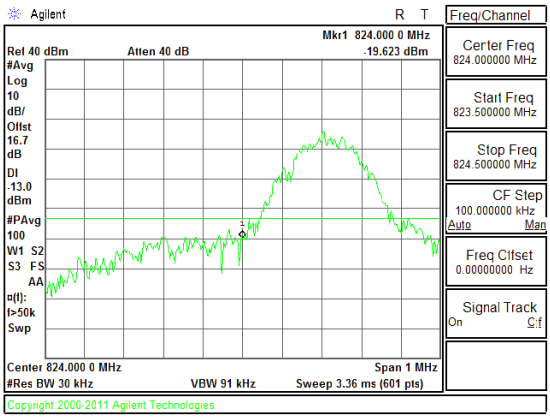 Band GSM850 EGPRS CBE Low channel	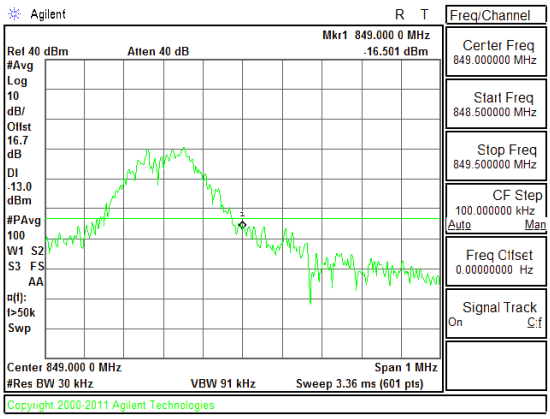 Band GSM850 EGPRS CBE High channel

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band GSM 850 GPRS	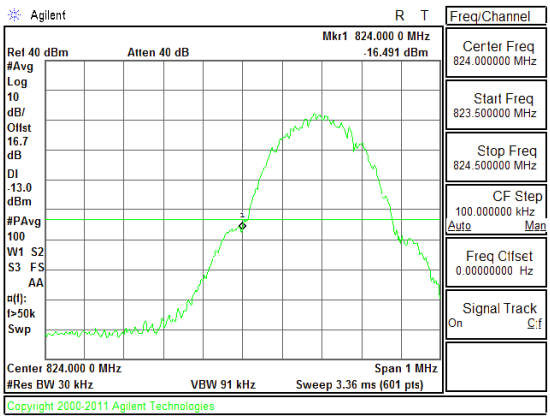 Band GSM850 GPRS CBE Low channel	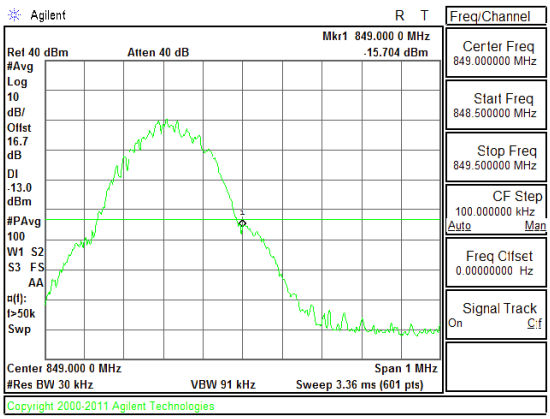 Band GSM850 GPRS CBE High channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, and §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

MODES TESTED

GSM, WCDMA

RESULTS

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.3.1. OUT OF BAND EMISSIONS RESULT

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM850	GMSK	824.2			
		836.6			
		848.8			
	GPRS	824.2	-27.13	-13	-14.13
		836.6	-29.45	-13	-16.45
		848.8	-29.52	-13	-16.52
	EGPRS	824.2	-26.04	-13	-13.04
		836.6	-29.81	-13	-16.81
		848.8	-26.63	-13	-13.63
GSM1900	GMSK	1850.2			
		1880			
		1909.8			
	GPRS	1850.2	-26.98	-13	-13.98
		1880	-27.04	-13	-14.04
		1909.8	-29.4	-13	-16.4
	EGPRS	1850.2	-26.59	-13	-13.59
		1880	-25.87	-13	-12.87
		1909.8	-26.72	-13	-13.72

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
Band 5	REL99	826.4	-27.08	-13	-14.08
		836.6	-27.61	-13	-14.61
		846.6	-27.37	-13	-14.37
	HSDPA	826.4	-24.91	-13	-11.91
		836.6	-27.04	-13	-14.04
		846.6	-27.08	-13	-14.08
Band 2	REL99	1852.4	-29.14	-13	-16.14
		1880	-25.69	-13	-12.69
		1907.6	-26.95	-13	-13.95
	HSDPA	1852.4	-27.07	-13	-14.07
		1880	-30.26	-13	-17.26
		1907.6	-29.54	-13	-16.54

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.3.2. OUT OF BAND EMISSIONS PLOTS

WCDMA

Band Band 2 HSDPA	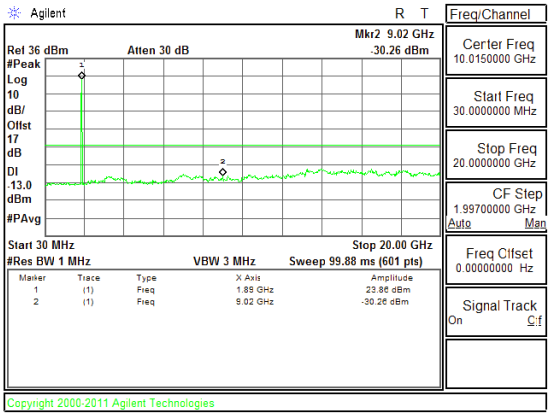 Band WCDMA B2 HSDPA CSE	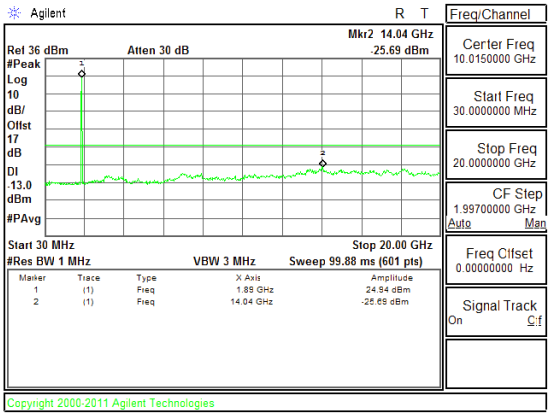 Band WCDMA B2 REL99 CSE

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band Band 5 HSDPA	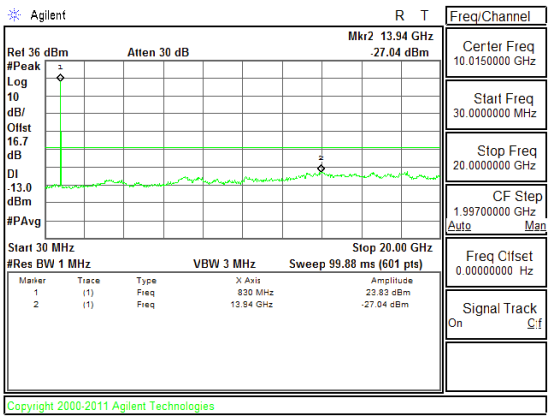 Band WCDMA B5 HSDPA CSE	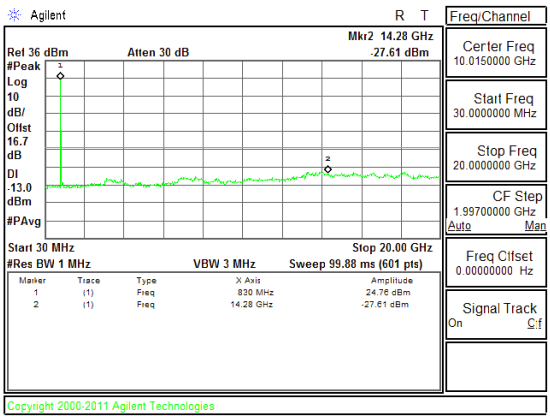 Band WCDMA B5 REL99 CSE

GSM

Band GSM 1900 EGPRS	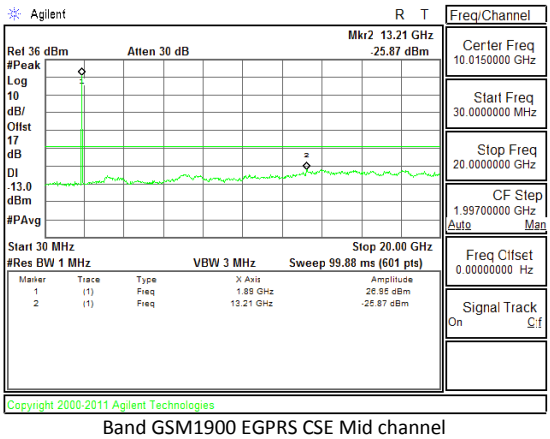 Band GSM1900 EGPRS CSE Mid channel	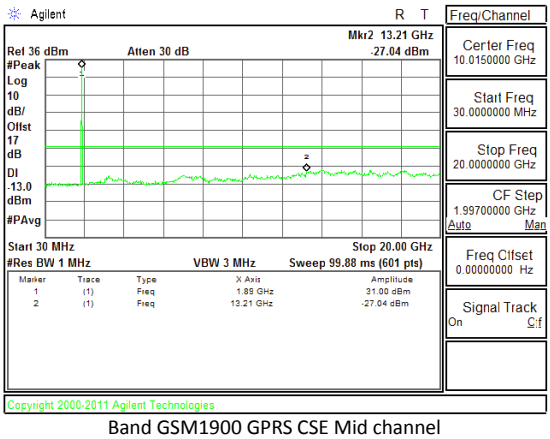 Band GSM1900 GPRS CSE Mid channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band GSM 850 EGPRS	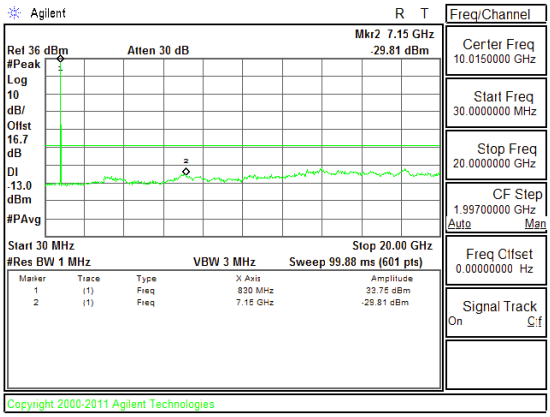 Band GSM850 EGPRS CSE Mid channel	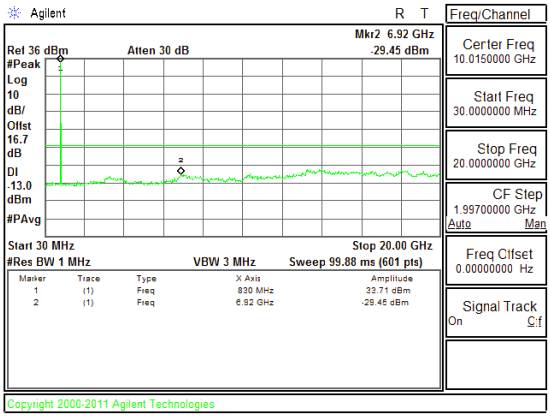 Band GSM850 GPRS CSE Mid channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ±2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

SOP

Frequency Stability vs Temperature:

The EUT is place inside a temperature chamber. The temperature is set to 20ºC and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until +50ºC is reached. Reference power supply voltage for these tests is 3.7Vdc.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case). The test voltage ranges from 3.50 to 4.26 VDC.

MODES TESTED

GSM 850 and GSM1900

RESULTS

See the following pages.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.4.1. FREQUENCY STABILITY RESULTS

GPRS 850 CELL BAND, MID CHANNEL190, Frequency 836.6MHz

Reference Frequency: PCS Mid Channel		836.6	MHz @ 20°C	
Limit: to stay +- 2.5 ppm =		2091.500	Hz	
Power Supply (Vdc)	**Environment Temperature (°C)**	**Frequency Deviation Measureed with Time Elapse (MHz)**	**Delta (ppm)**	**Limit (ppm)**
3.80	50	836.599993	0.000	2.5
3.80	40	836.600009	-0.019	2.5
3.80	30	836.599993	0.000	2.5
3.80	***20***	**836.599993**	**0**	***2.5***
3.80	10	836.599991	0.003	2.5
3.80	0	836.599991	0.003	2.5
3.80	-10	836.599989	0.004	2.5
3.80	-20	836.599990	0.004	2.5
3.80	-30	836.599988	0.006	2.5

Reference Frequency: PCS Mid Channel		836.6	MHz @ 20°C	
Limit: to stay +- 2.5 ppm =		2091.500	Hz	
Power Supply (Vdc)	**Environment Temperature (°C)**	**Frequency Deviation Measureed with Time Elapse (MHz)**	**Delta (ppm)**	**Limit (ppm)**
3.80	***20***	***836.599993***	***0***	***2.5***
4.30	20	836.5999873	*0.007*	2.5
3.20	20	836.599992	*0.001*	2.5

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

GPRS 1900 CELL BAND, MID CHANNEL 661, Frequency 1880 MHz

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C Limit: to stay +- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	**Environment Temperature (°C)**	**Frequency Deviation Measureed with Time Elapse**		
		(MHz)	**Delta (ppm)**	**Limit (ppm)**
3.80	50	1880.000018	-0.019	2.5
3.80	40	1880.000017	-0.018	2.5
3.80	30	1879.999983	-0.001	2.5
3.80	***20***	**1879.999982**	**0**	***2.5***
3.80	10	1879.999972	0.005	2.5
3.80	0	1880.000019	-0.019	2.5
3.80	-10	1879.999985	-0.001	2.5
3.80	-20	1879.999982	0.000	2.5
3.80	-30	1880.000017	-0.018	2.5

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C Limit: to stay +- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	**Environment Temperature (°C)**	**Frequency Deviation Measureed with Time Elapse**		
		(MHz)	**Delta (ppm)**	**Limit (ppm)**
3.80	***20***	***1879.999982***	***0***	***2.5***
4.30	20	1879.999982	*0.000*	2.5
3.20	20	1880.00002	*-0.020*	2.5

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17; PSA setting reference to 971168 D01 v02r01

For peak power measurement with a PSA:

a) Set the RBW ≥ OBW; b) Set VBW ≥ 3 × RBW; c) Set span ≥ 2 x RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points ≥ span/RBW; g) Trace mode = max hold;

For average power measurement with a PSA:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW ≥ 3 x RBW; d) Set number of points in sweep ≥ 2 × span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle ≥ 98; h) Use trigger to capture bursts If burst duty cycle < 98; i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function.

TEST RESULTS

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.1.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	EIRP	
				dBm	mW
Band 2	REL99	9262	1852.4	21.85	153.11
		9400	1880	22.15	164.06
		9538	1907.6	20.70	117.49
	HSDPA	9262	1852.4	20.66	116.41
		9400	1880	21.38	137.40
		9538	1907.6	20.36	108.64

Band	Mode	Channel	f(MHz)	ERP	
				dBm	mW
Band 5	REL99	4132	826.4	15.76	37.67
		4183	836.6	16.50	44.67
		4233	846.6	17.90	61.66
	HSDPA	4132	826.4	15.05	31.99
		4183	836.6	15.95	39.36
		4233	846.6	17.03	50.47

Band	Mode	Channel	f(MHz)	EIRP	
				dBm	mW
GSM1900	GPRS	512	1850.2	30.72	1180.32
		661	1880	30.23	1054.38
		810	1909.8	29.91	979.49
	EGPRS	512	1850.2	27.23	528.45
		661	1880	26.99	500.03
		810	1909.8	26.71	468.81

Band	Mode	Channel	f(MHz)	ERP	
				dBm	mW
GSM850	GPRS	128	824.2	24.49	281.19
		190	836.6	22.75	188.36
		251	848.8	23.75	237.13
	EGPRS	128	824.2	20.70	117.49
		190	836.6	19.10	81.28
		251	848.8	20.02	100.46

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.1.2. ERP/EIRP DATA

WCDMA

Band

Band 2

HSDPA

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber C

Company: Samsung
Project #: 14I18839
Date: 09/15/14
Test Engineer: Gavin C.
Configuration: EUT only (1957566)
Mode: HSDPA B2

Test Equipment:
Receiving: Horn T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1852.40	5.41	V	0.9	7.9	12.36	33.0	-20.6	
1852.40	13.71	H	0.9	7.9	20.66	33.0	-12.3	
Mid Ch								
1880.00	8.26	V	0.9	7.9	15.21	33.0	-17.8	
1880.00	14.43	H	0.9	7.9	21.38	33.0	-11.6	
High Ch								
1907.60	9.60	V	0.9	7.9	16.60	33.0	-16.4	
1907.60	13.36	H	0.9	7.9	20.36	33.0	-12.6	

Rev. 3.17.11
Note: For Band 4 EIRP limit is 30dBm

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

Band 2

REL99

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber C

Company: Samsung
Project #: 14I18839
Date: 09/15/14
Test Engineer: Gavin C.
Configuration: EUT only (1957566)
Mode: RELL99 B2

Test Equipment:
Receiving: Horn T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	(dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1852.40	7.03	V	0.9	7.9	13.98	33.0	-19.0	
1852.40	14.90	H	0.9	7.9	21.85	33.0	-11.2	
Mid Ch								
1880.00	8.80	V	0.9	7.9	15.75	33.0	-17.3	
1880.00	15.20	H	0.9	7.9	22.15	33.0	-10.9	
High Ch								
1907.60	10.15	V	0.9	7.9	17.15	33.0	-15.9	
1907.60	13.70	H	0.9	7.9	20.70	33.0	-12.3	

Rev. 3.17.11
Note: For Band 4 EIRP limit is 30dBm

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

Band 5

HSDPA

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14I18839
Date: 09/15/14
Test Engineer: D. Sblendorio
Configuration: EUT only X-pos (1957566)
Mode: HSDPA B5

Test Equipment:
Receiving: Sunol T243, and 3m Chamber N-type Cable (Setup this one for testing EUT)
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
826.40	5.01	V	0.9	0.0	4.11	38.5	-34.3	
826.40	15.95	H	0.9	0.0	15.05	38.5	-23.4	
Mid Ch								
836.60	2.71	V	0.9	0.0	1.81	38.5	-36.6	
836.60	16.85	H	0.9	0.0	15.95	38.5	-22.5	
High Ch								
846.60	6.18	V	0.9	0.0	5.28	38.5	-33.2	
846.60	17.93	H	0.9	0.0	17.03	38.5	-21.4	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

Band 5

REL99

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14I18839
Date: 09/15/14
Test Engineer: D. Sblendorio
Configuration: EUT only X-pos (1957570)
Mode: REL99 B5

Test Equipment:
Receiving: Sunol T243, and 3m Chamber N-type Cable (Setup this one for testing EUT)
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
826.40	5.98	V	0.9	0.0	5.08	38.5	-33.4	
826.40	16.66	H	0.9	0.0	15.76	38.5	-22.7	
Mid Ch								
836.60	6.76	V	0.9	0.0	5.86	38.5	-32.6	
836.60	17.40	H	0.9	0.0	16.50	38.5	-21.9	
High Ch								
846.60	7.66	V	0.9	0.0	6.76	38.5	-31.7	
846.60	18.80	H	0.9	0.0	17.90	38.5	-20.5	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

GSM

Band

GSM 1900

EGPRS

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber C

Company: Samsung
Project #: 14I18839
Date: 09/15/14
Test Engineer: R. Alegre
Configuration: EUT only (1957566)
Mode: EGPRS 1900

Test Equipment:
Receiving: Horn T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1850.20	18.31	V	0.9	7.9	25.31	33.0	-7.7	
1850.20	20.23	H	0.9	7.9	27.23	33.0	-5.8	
Mid Ch								
1880.00	16.68	V	0.9	7.9	23.68	33.0	-9.3	
1880.00	19.99	H	0.9	7.9	26.99	33.0	-6.0	
High Ch								
1909.80	18.63	V	0.9	7.9	25.63	33.0	-7.4	
1909.80	19.71	H	0.9	7.9	26.71	33.0	-6.3	

Rev. 3.17.11
Note: For Band 4 EIRP limit is 30dBm

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

GSM 1900

GPRS

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber C

Company: Samsung
Project #: 14I18839
Date: 09/15/14
Test Engineer: R. Alegre
Configuration: EUT only (1957566)
Mode: GPRS 1900

Test Equipment:
Receiving: Horn T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1850.20	21.70	V	0.9	7.9	28.70	33.0	-4.3	
1850.20	23.72	H	0.9	7.9	30.72	33.0	-2.3	
Mid Ch								
1880.00	19.93	V	0.9	7.9	26.93	33.0	-6.1	
1880.00	23.23	H	0.9	7.9	30.23	33.0	-2.8	
High Ch								
1909.80	21.80	V	0.9	7.9	28.80	33.0	-4.2	
1909.80	22.91	H	0.9	7.9	29.91	33.0	-3.1	

Rev. 3.17.11
Note: For Band 4 EIRP limit is 30dBm

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

GSM 850

EGPRS

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14I18839
Date: 09/15/14
Test Engineer: D. Sblendorio
Configuration: EUT only X-pos (1957570)
Mode: EGPRS 850MHz

Test Equipment:
Receiving: Sunol T243, and 3m Chamber N-type Cable (Setup this one for testing EUT)
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	12.89	V	0.9	0.0	12.04	38.5	-26.4	
824.20	21.55	H	0.9	0.0	20.70	38.5	-17.7	
Mid Ch								
836.60	13.60	V	0.9	0.0	12.75	38.5	-25.7	
836.60	19.95	H	0.9	0.0	19.10	38.5	-19.3	
High Ch								
848.80	14.69	V	0.9	0.0	13.84	38.5	-24.6	
848.80	20.87	H	0.9	0.0	20.02	38.5	-18.4	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

GSM 850

GPRS

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14I18839
Date: 09/15/14
Test Engineer: D. Sblendorio
Configuration: EUT only X-pos (1957570)
Mode: GPRS 850MHz

Test Equipment:
Receiving: Sunol T243, and 3m Chamber N-type Cable (Setup this one for testing EUT)
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	13.40	V	0.9	0.0	12.50	38.5	-25.9	
824.20	25.39	H	0.9	0.0	24.49	38.5	-14.0	
Mid Ch								
836.60	14.18	V	0.9	0.0	13.28	38.5	-25.2	
836.60	23.65	H	0.9	0.0	22.75	38.5	-15.7	
High Ch								
848.80	14.66	V	0.9	0.0	13.76	38.5	-24.7	
848.80	24.65	H	0.9	0.0	23.75	38.5	-14.7	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917 and §24.238

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

MODES TESTED

GSM, WCDMA

RESULTS

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.2.1. SPURIOUS RADIATION DATA

WCDMA

Band

Band 2

HSDPA

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18839
Date: 09/16/14
Test Engineer: G. Chan
Configuration: EUT w/ AC Charger + HS
Mode: HSDPA_B2

Chamber	Pre-amplifer	Filter	Limit
5m Chamber B	T34 8449B	Filter 1	Part 24

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1852.4MHz									
3.705	-3.4	V	3.0	35.4	1.0	-37.8	-13.0	-24.8	
5.557	-14.1	V	3.0	34.7	1.0	-47.8	-13.0	-34.8	
7.410	-13.4	V	3.0	34.9	1.0	-47.3	-13.0	-34.3	
3.705	-3.4	H	3.0	35.4	1.0	-37.8	-13.0	-24.8	
5.557	-14.3	H	3.0	34.7	1.0	-48.0	-13.0	-35.0	
7.410	-12.3	H	3.0	34.9	1.0	-46.2	-13.0	-33.2	
Mid Ch, 1880MHz									
3.760	-7.9	V	3.0	35.3	1.0	-42.2	-13.0	-29.2	
5.640	-14.0	V	3.0	34.7	1.0	-47.7	-13.0	-34.7	
7.520	-13.4	V	3.0	34.9	1.0	-47.4	-13.0	-34.4	
3.760	-9.0	H	3.0	35.3	1.0	-43.3	-13.0	-30.3	
5.640	-14.2	H	3.0	34.7	1.0	-47.9	-13.0	-34.9	
7.520	-12.7	H	3.0	34.9	1.0	-46.6	-13.0	-33.6	
High Ch, 1907.6MHz									
3.815	-10.1	V	3.0	35.3	1.0	-44.4	-13.0	-31.4	
5.723	-14.6	V	3.0	34.7	1.0	-48.4	-13.0	-35.4	
7.630	-13.0	V	3.0	34.9	1.0	-47.0	-13.0	-34.0	
3.815	-12.0	H	3.0	35.3	1.0	-46.3	-13.0	-33.3	
5.723	-14.3	H	3.0	34.7	1.0	-48.0	-13.0	-35.0	
7.630	-12.0	H	3.0	34.9	1.0	-45.9	-13.0	-32.9	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18839
Date: 09/16/14
Test Engineer: G. Chan
Configuration: EUT w/ AC Charger + HS
Mode: Rel99_B2

Chamber	Pre-amplifer	Filter	Limit
5m Chamber B	T34 8449B	Filter 1	Part 24

Band

Band 2

REL99

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1852.4MHz									
3.705	-11.7	V	3.0	35.4	1.0	-46.1	-13.0	-33.1	
5.557	-14.7	V	3.0	34.7	1.0	-48.4	-13.0	-35.4	
7.410	-14.1	V	3.0	34.9	1.0	-48.0	-13.0	-35.0	
3.705	-6.3	H	3.0	35.4	1.0	-40.7	-13.0	-27.7	
5.557	-14.3	H	3.0	34.7	1.0	-48.0	-13.0	-35.0	
7.410	-11.7	H	3.0	34.9	1.0	-45.6	-13.0	-32.6	
Mid Ch, 1880MHz									
3.760	-16.4	V	3.0	35.3	1.0	-50.7	-13.0	-37.7	
5.640	-13.9	V	3.0	34.7	1.0	-47.6	-13.0	-34.6	
7.520	-13.8	V	3.0	34.9	1.0	-47.7	-13.0	-34.7	
3.760	-13.0	H	3.0	35.3	1.0	-47.3	-13.0	-34.3	
5.640	-14.0	H	3.0	34.7	1.0	-47.7	-13.0	-34.7	
7.520	-13.2	H	3.0	34.9	1.0	-47.1	-13.0	-34.1	
High Ch, 1907.6MHz									
3.815	-9.8	V	3.0	35.3	1.0	-44.1	-13.0	-31.1	
5.723	-12.6	V	3.0	34.7	1.0	-46.4	-13.0	-33.4	
7.630	-13.4	V	3.0	34.9	1.0	-47.3	-13.0	-34.3	
3.815	-10.8	H	3.0	35.3	1.0	-45.0	-13.0	-32.0	
5.723	-14.6	H	3.0	34.7	1.0	-48.4	-13.0	-35.4	
7.630	-11.7	H	3.0	34.9	1.0	-45.6	-13.0	-32.6	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18839
Date: 09/15/14
Test Engineer: D. Sblendorio
Configuration: X-Pos EUT w/ AC Charger + HS
Mode: HSDPA_B5

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 22

Band

Band 5

HSDPA

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.4MHz									
1.653	-17.3	V	3.0	37.4	1.0	-53.7	-13.0	-40.7	
2.479	-13.6	V	3.0	36.4	1.0	-49.0	-13.0	-36.0	
3.306	-18.2	V	3.0	35.8	1.0	-53.0	-13.0	-40.0	
1.653	-14.5	H	3.0	37.4	1.0	-50.9	-13.0	-37.9	
2.479	-12.4	H	3.0	36.4	1.0	-47.8	-13.0	-34.8	
3.306	-18.2	H	3.0	35.8	1.0	-53.0	-13.0	-40.0	
Mid Ch, 836.6MHz									
1.673	-21.1	V	3.0	37.3	1.0	-57.5	-13.0	-44.5	
2.510	-14.5	V	3.0	36.4	1.0	-49.8	-13.0	-36.8	
3.346	-17.7	V	3.0	35.8	1.0	-52.4	-13.0	-39.4	
1.673	-19.4	H	3.0	37.3	1.0	-55.7	-13.0	-42.7	
2.510	-11.4	H	3.0	36.4	1.0	-46.7	-13.0	-33.7	
3.346	-18.0	H	3.0	35.8	1.0	-52.7	-13.0	-39.7	
High Ch, 846.6MHz									
1.693	-19.5	V	3.0	37.3	1.0	-55.8	-13.0	-42.8	
2.540	-16.6	V	3.0	36.3	1.0	-52.0	-13.0	-39.0	
3.386	-17.5	V	3.0	35.7	1.0	-52.2	-13.0	-39.2	
1.693	-20.1	H	3.0	37.3	1.0	-56.5	-13.0	-43.5	
2.540	-13.3	H	3.0	36.3	1.0	-48.7	-13.0	-35.7	
3.386	-18.0	H	3.0	35.7	1.0	-52.7	-13.0	-39.7	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18839
Date: 09/15/14
Test Engineer: D. Sblendorio
Configuration: X-Pos EUT w/ AC Charger + HS
Mode: REL99_B5

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 22

Band

Band 5

REL99

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.4MHz									
1.653	-17.6	V	3.0	37.4	1.0	-53.9	-13.0	-40.9	
2.479	-14.2	V	3.0	36.4	1.0	-49.6	-13.0	-36.6	
3.306	-17.9	V	3.0	35.8	1.0	-52.7	-13.0	-39.7	
1.653	-14.3	H	3.0	37.4	1.0	-50.7	-13.0	-37.7	
2.479	-17.0	H	3.0	36.4	1.0	-52.4	-13.0	-39.4	
3.306	-18.1	H	3.0	35.8	1.0	-52.9	-13.0	-39.9	
Mid Ch, 836.6MHz									
1.673	-19.7	V	3.0	37.3	1.0	-56.0	-13.0	-43.0	
2.510	-6.1	V	3.0	36.4	1.0	-41.4	-13.0	-28.4	
3.346	-18.1	V	3.0	35.8	1.0	-52.8	-13.0	-39.8	
1.673	-17.6	H	3.0	37.3	1.0	-53.9	-13.0	-40.9	
2.510	-8.7	H	3.0	36.4	1.0	-44.0	-13.0	-31.0	
3.346	-18.2	H	3.0	35.8	1.0	-52.9	-13.0	-39.9	
High Ch, 846.6MHz									
1.693	-18.9	V	3.0	37.3	1.0	-55.2	-13.0	-42.2	
2.540	-15.3	V	3.0	36.3	1.0	-50.6	-13.0	-37.6	
3.386	-17.2	V	3.0	35.7	1.0	-51.9	-13.0	-38.9	
1.693	-18.4	H	3.0	37.3	1.0	-54.7	-13.0	-41.7	
2.540	-13.8	H	3.0	36.3	1.0	-49.2	-13.0	-36.2	
3.386	-17.7	H	3.0	35.7	1.0	-52.4	-13.0	-39.4	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

GSM

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18839
Date: 09/16/14
Test Engineer: J. Gomez & J. Hsu
Configuration: X-Pos with AC adapter + headset (Sample 1957570)
Mode: EGPRS1900

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 24

Band: GSM 1900 EGPRS

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.20MHz									
3.700	-11.5	V	3.0	35.4	1.0	-45.9	-13.0	-32.9	
5.551	-11.8	V	3.0	34.7	1.0	-45.6	-13.0	-32.6	
7.401	-12.9	V	3.0	34.9	1.0	-46.9	-13.0	-33.9	
3.700	-6.4	H	3.0	35.4	1.0	-40.8	-13.0	-27.8	
5.551	-12.2	H	3.0	34.7	1.0	-45.9	-13.0	-32.9	
7.401	-10.6	H	3.0	34.9	1.0	-44.5	-13.0	-31.5	
Mid Ch, 1880.0MHz									
3.760	-11.9	V	3.0	35.3	1.0	-46.2	-13.0	-33.2	
5.640	-13.7	V	3.0	34.7	1.0	-47.4	-13.0	-34.4	
7.520	-11.9	V	3.0	34.9	1.0	-45.9	-13.0	-32.9	
3.760	-12.6	H	3.0	35.3	1.0	-46.9	-13.0	-33.9	
5.640	-12.6	H	3.0	34.7	1.0	-46.3	-13.0	-33.3	
7.520	-11.7	H	3.0	34.9	1.0	-45.6	-13.0	-32.6	
High Ch, 1909.80MHz									
3.820	-11.3	V	3.0	35.3	1.0	-45.6	-13.0	-32.6	
5.729	-13.1	V	3.0	34.7	1.0	-46.9	-13.0	-33.9	
7.639	-7.7	V	3.0	35.0	1.0	-41.7	-13.0	-28.7	
3.820	-11.6	H	3.0	35.3	1.0	-45.9	-13.0	-32.9	
5.729	-13.0	H	3.0	34.7	1.0	-46.8	-13.0	-33.8	
7.639	-11.2	H	3.0	35.0	1.0	-45.2	-13.0	-32.2	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18839
Date: 09/16/14
Test Engineer: J. Gomez & J. Hsu
Configuration: X-Pos with AC adapter + headset (Sample 1957570)
Mode: GPRS1900

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 24

Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1850.20MHz									
GSM 1900	3.700	-12.6	V	3.0	35.4	1.0	-47.0	-13.0	-34.0	
	5.551	-7.3	V	3.0	34.7	1.0	-41.0	-13.0	-28.0	
	7.401	-12.2	V	3.0	34.9	1.0	-46.2	-13.0	-33.2	
	3.700	-8.5	H	3.0	35.4	1.0	-42.9	-13.0	-29.9	
GPRS	5.551	-8.1	H	3.0	34.7	1.0	-41.8	-13.0	-28.8	
	7.401	-11.0	H	3.0	34.9	1.0	-45.0	-13.0	-32.0	
	Mid Ch, 1880.0MHz									
	3.760		V	3.0	35.3	1.0	-34.3	-13.0	-21.3	
	5.640	-9.4	V	3.0	34.7	1.0	-43.1	-13.0	-30.1	
	7.520	-11.1	V	3.0	34.9	1.0	-45.0	-13.0	-32.0	
	3.760	-10.5	H	3.0	35.3	1.0	-44.8	-13.0	-31.8	
	5.640	-8.4	H	3.0	34.7	1.0	-42.2	-13.0	-29.2	
	7.520	-10.2	H	3.0	34.9	1.0	-44.2	-13.0	-31.2	
	High Ch, 1909.80MHz									
	3.820	-11.5	V	3.0	35.3	1.0	-45.8	-13.0	-32.8	
	5.729	-3.1	V	3.0	34.7	1.0	-36.9	-13.0	-23.9	
	7.639	-12.6	V	3.0	35.0	1.0	-46.5	-13.0	-33.5	
	3.820	-11.0	H	3.0	35.3	1.0	-45.3	-13.0	-32.3	
	5.729	-5.2	H	3.0	34.7	1.0	-38.9	-13.0	-25.9	
	7.639	-11.7	H	3.0	35.0	1.0	-45.7	-13.0	-32.7	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18839
Date: 09/15/14
Test Engineer: D. Sblendorio
Configuration: X-Pos EUT w/ AC Charger + HS
Mode: EGPRS 850

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 22

Band: GSM 850 EGPRS

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.2MHz									
1.648	-16.2	V	3.0	37.4	1.0	-52.6	-13.0	-39.6	
2.473	-13.8	V	3.0	36.4	1.0	-49.1	-13.0	-36.1	
3.297	-16.5	V	3.0	35.8	1.0	-51.3	-13.0	-38.3	
1.648	-10.4	H	3.0	37.4	1.0	-46.7	-13.0	-33.7	
2.473	-11.0	H	3.0	36.4	1.0	-46.4	-13.0	-33.4	
3.297	-17.2	H	3.0	35.8	1.0	-52.0	-13.0	-39.0	
Mid Ch, 836.6MHz									
1.673	-21.3	V	3.0	37.3	1.0	-57.6	-13.0	-44.6	
2.510	-18.4	V	3.0	36.4	1.0	-53.7	-13.0	-40.7	
3.346	-17.1	V	3.0	35.8	1.0	-51.9	-13.0	-38.9	
1.673	-22.5	H	3.0	37.3	1.0	-58.9	-13.0	-45.9	
2.510	-20.1	H	3.0	36.4	1.0	-55.4	-13.0	-42.4	
3.346	-16.7	H	3.0	35.8	1.0	-51.5	-13.0	-38.5	
High Ch, 848.8MHz									
1.698	-14.3	V	3.0	37.3	1.0	-50.6	-13.0	-37.6	
2.547	-7.6	V	3.0	36.3	1.0	-42.9	-13.0	-29.9	
3.395	-16.6	V	3.0	35.7	1.0	-51.3	-13.0	-38.3	
1.698	-13.4	H	3.0	37.3	1.0	-49.7	-13.0	-36.7	
2.547	2.6	H	3.0	36.3	1.0	-32.7	-13.0	-19.7	
3.395	-16.4	H	3.0	35.7	1.0	-51.1	-13.0	-38.1	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18839
Date: 09/15/14
Test Engineer: D. Sblendorio
Configuration: X-Pos EUT w/ AC Charger + HS
Mode: GPRS 850

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 22

Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 824.2MHz									
GSM 850	1.648	-12.5	V	3.0	37.4	1.0	-48.8	-13.0	-35.8	
	2.473	-12.9	V	3.0	36.4	1.0	-48.3	-13.0	-35.3	
	3.297	-15.7	V	3.0	35.8	1.0	-50.5	-13.0	-37.5	
	1.648	-9.1	H	3.0	37.4	1.0	-45.5	-13.0	-32.5	
GPRS	2.473	-6.5	H	3.0	36.4	1.0	-41.9	-13.0	-28.9	
	3.297	-16.2	H	3.0	35.8	1.0	-51.0	-13.0	-38.0	
	Mid Ch, 836.6MHz									
	1.673	-10.4	V	3.0	37.3	1.0	-46.7	-13.0	-33.7	
	2.510	-9.7	V	3.0	36.4	1.0	-45.1	-13.0	-32.1	
	3.346	-17.7	V	3.0	35.8	1.0	-52.4	-13.0	-39.4	
	1.673	-13.6	H	3.0	37.3	1.0	-49.9	-13.0	-36.9	
	2.510	-1.1	H	3.0	36.4	1.0	-36.5	-13.0	-23.5	
	3.346	-17.9	H	3.0	35.8	1.0	-52.6	-13.0	-39.6	
	High Ch, 848.8MHz									
	1.698	-21.2	V	3.0	37.3	1.0	-57.5	-13.0	-44.5	
	2.547	-3.5	V	3.0	36.3	1.0	-38.8	-13.0	-25.8	
	3.395	-15.2	V	3.0	35.7	1.0	-49.9	-13.0	-36.9	
	1.698	-14.9	H	3.0	37.3	1.0	-51.2	-13.0	-38.2	
	2.547	-6.2	H	3.0	36.3	1.0	-41.5	-13.0	-28.5	
	3.395	-16.4	H	3.0	35.7	1.0	-51.1	-13.0	-38.1	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.