



FCC TEST REPORT

FCC ID: 2A27V-M5

On Behalf of

Dongguan Genai Technology Co., Ltd

Wifi camera

Model No.: M5

Prepared for : Dongguan Genai Technology Co., Ltd
Address : Room 901, No.2 Building, No.1, Jiaoping Road, Tangxia Town,
Dongguan City, Guangdong Province, China

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2511196-C01-R01
Date of Receipt : Nov. 18, 2025
Date of Test : Nov. 18, 2025-Mar. 18, 2026
Date of Report : Mar. 18, 2026
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary Of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of Connection Between EUT and Simulators	8
2.5. Test Mode Description	9
2.6. Software test version and power setting information	15
2.7. Test Conditions	15
2.8. Test Facility	16
2.9. Measurement Uncertainty	16
2.10. Test Equipment List	17
3. Spurious Emission	18
3.1. Test Limits	18
3.2. Block Diagram of Test setup	19
3.3. Test Procedure	20
3.4. Test Results	21
4. Power Line Conducted Emission	28
4.1. Test Limits	28
4.2. Test Procedure	28
4.3. Test Setup	28
4.4. Test Results	29
5. Out-of-band Emissions	32
5.1. Test Limits	32
5.2. Test Procedure	32
5.3. Test Setup	32
5.4. Test Results	32
6. Conducted Maximum Output Power	50
6.1. Test limits	50
6.2. Test Procedure	50
6.3. Test Setup	50
6.4. Test Results	50
7. Peak Power Spectral Density	51
7.1. Test limits	51
7.2. Test Procedure	51
7.3. Test Setup	51
7.4. Test Results	52
8. Occupied Bandwidth	58
8.1. Test limits	58
8.2. Test Procedure	58
8.3. Test Setup	58
8.4. Test Results	58
9. Band Edge Test	70
9.1. Test Limit	70
9.2. Block Diagram of Test Setup	70
9.3. Test Procedure	70
9.4. Test Results	71
10. Antenna Requirement	75
10.1. Standard Requirement	75
10.2. Test Results	75
11. Photos of test setup	76

12. Photos of EUT 76

TEST REPORT DECLARATION

Applicant : Dongguan Genai Technology Co., Ltd
Address : Room 901, No.2 Building, No.1, Jiaoping Road, Tangxia Town, Dongguan City,
Guangdong Province, China
Manufacturer : Shenzhen Hongshengrui Technology Co., Ltd
Address : Building 2, 201-4, Building 1, Zhenhan Road, Gankeng Community, Jihua Street,
Longgang District, Shenzhen, China
EUT Description : Wifi camera
(A) Model No. : M5
(B) Trademark : N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10-2020

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part 15C requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Felix Pang
Test Engineer


.....

Approved by (name + signature).....:

Simple Guan
Project Manager


.....

Date of issue.....:

Mar. 18, 2026

Revision History

Revision	Issue Date	Revisions	Revised By
V0	Mar. 18, 2026	Initial released Issue	Felix Pang

1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Conducted Emission	FCC Part 15: 15.207ANSI C63.10-2020	P
6dB Bandwidth	FCC PART 15:15.247(a)(2), ANSI C63.10-2020	P
Output Power	FCC Part 15: 15.247(b)(3), ANSI C63.10-2020	P
Radiated Spurious Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d), ANSI C63.10-2020	P
Conducted Spurious & Band Edge Emission	FCC Part 15: 15.247(d), ANSI C63.10-2020	P
Power Spectral Density	FCC PART 15:15.247(e), ANSI C63.10-2020	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d), ANSI C63.10-2020	P
Antenna Requirement	FCC Part 15: 15.203	P

Note: 1. P is an abbreviation for Pass.

2. F is an abbreviation for Fail.

3. N/A is an abbreviation for Not Applicable.

4. Conclusion determination rules of this report: Unless there are clear provisions on measurement uncertainty in the standard or customer requirements, decision by actual test data without considering measurement uncertainty.

5. Measurement method usage KDB 558074 D01 15.247 Meas Guidance v05r02.

2. General Information

2.1. Description of Device (EUT)

Product Name : Wifi camera
Model : M5
Diff : /
Test Voltage : Input: DC 5 V  1 A or DC 3.7V powered by battery

Radio technology	: 2.4G WiFi
Operation frequency	: 2412MHz-2462MHz for IEEE 802.11 b, g, n/HT20
Channel No.	: 802.11b/802.11g/802.11n(HT20): 11CH IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)
Modulation type	: IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM(64QAM, 16QAM, QPSK, BPSK)
Antenna Type	: PCB antenna, maximum gain is 5.3dBi.

PMN : N/A
HVIN : N/A

Software version : N/A
Hardware version/FVIN : N/A

Note : Antenna information is provided by applicant.
Testing lab is not responsible for the accuracy of the information.

2.2. Accessories of Device (EUT)


Accessories 1 : /
Manufacturer : /
Model : /
Rating : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number
1	AC Adapter	Huizhou Jinhua Industrial Development Co., Ltd.	VCBAJACH	N/A
2	Laptop	Lenovo (Beijing) Co., Ltd	ThinkPad E480	N/A

2.4. Block Diagram of Connection Between EUT and Simulators


Conducted Emission



Radiated Emission



RF Conducted Test



2.5. Test Mode Description


Keeping TX			
Mode	Data rate (Mbps)	Channel	Frequency(MHz)
IEEE 802.11 b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11 g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11 n/HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462

Note: According exploratory test, EUT will have maximum output power in those data rate. So those data rate were used for all test.


Channel list:					
For IEEE 802.11b, g, n/HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2412	CH5	2432	CH9	2452
CH2	2417	CH6	2437	CH10	2457
CH3	2422	CH7	2442	CH11	2462
CH4	2427	CH8	2447		

Note: duty cycle see below:


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	98.94	0	0.12
NVNT	b	2437	Ant1	99.06	0	0.12
NVNT	b	2462	Ant1	99.06	0	0.12
NVNT	g	2412	Ant1	98.92	0	0.18
NVNT	g	2437	Ant1	98.92	0	0.18
NVNT	g	2462	Ant1	98.92	0	0.18
NVNT	n20	2412	Ant1	100	0	0.01
NVNT	n20	2437	Ant1	100	0	0.01
NVNT	n20	2462	Ant1	100	0	0.01

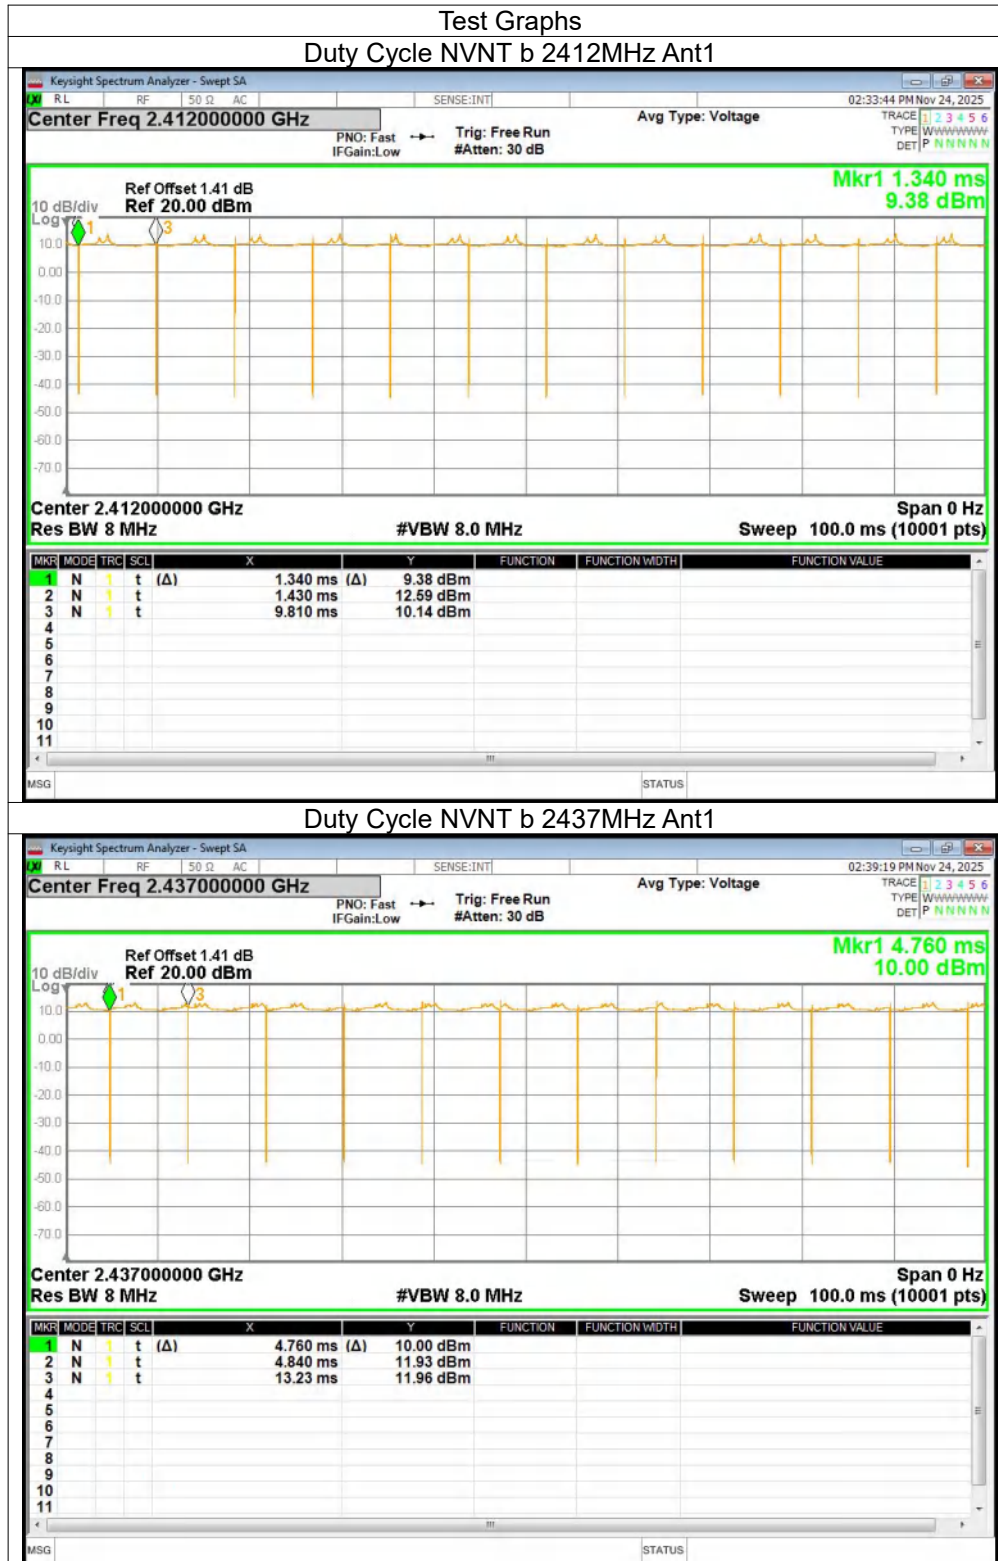


Duty Cycle NVNT b 2462MHz Ant1

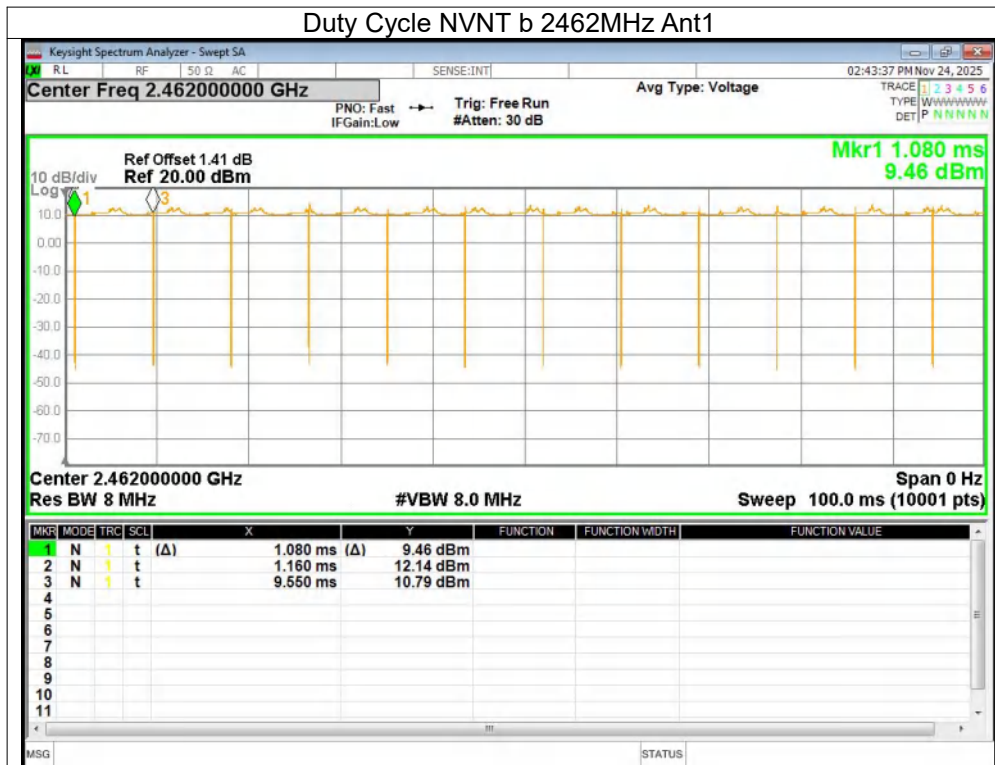


Duty Cycle NVNT g 2412MHz Ant1

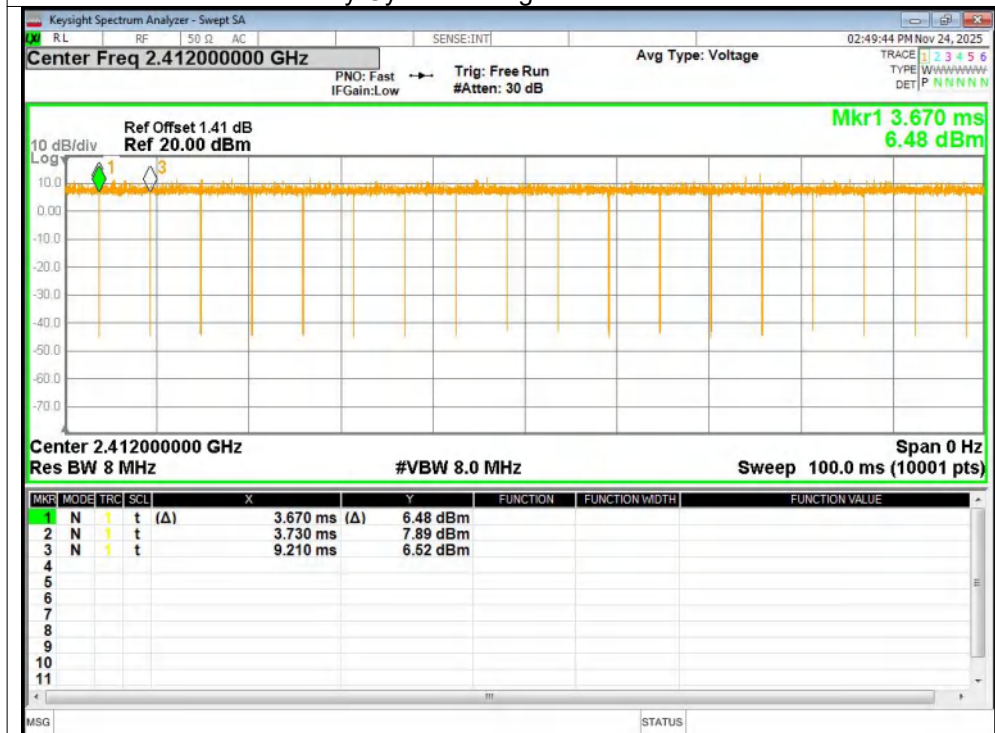


Duty Cycle NVNT g 2437MHz Ant1

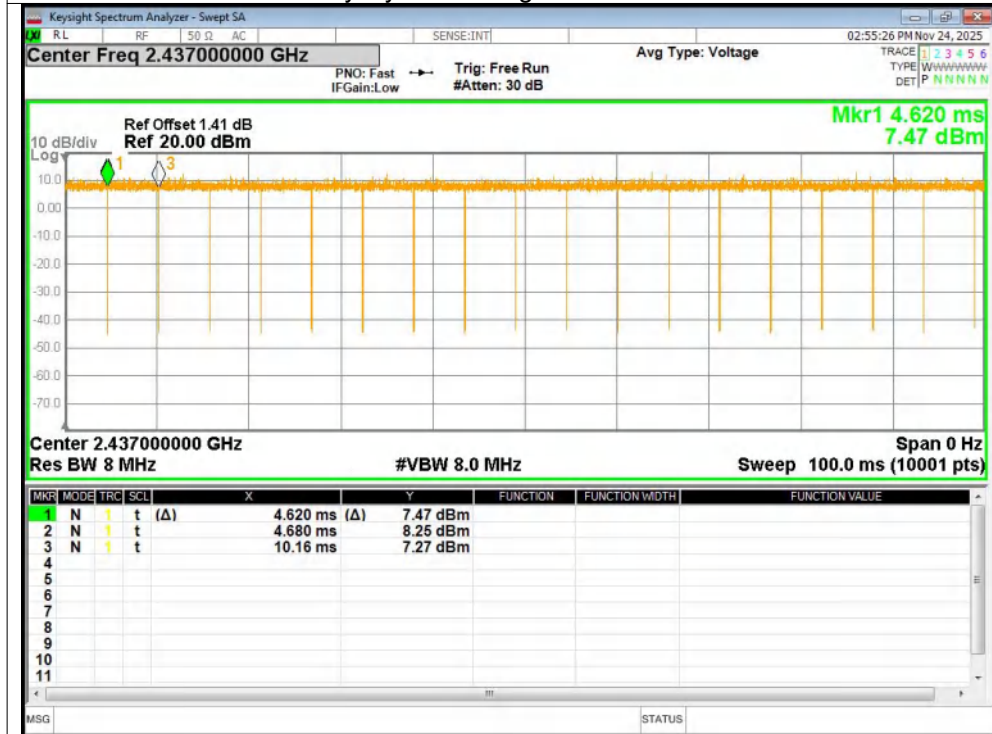

Duty Cycle NVNT g 2462MHz Ant1

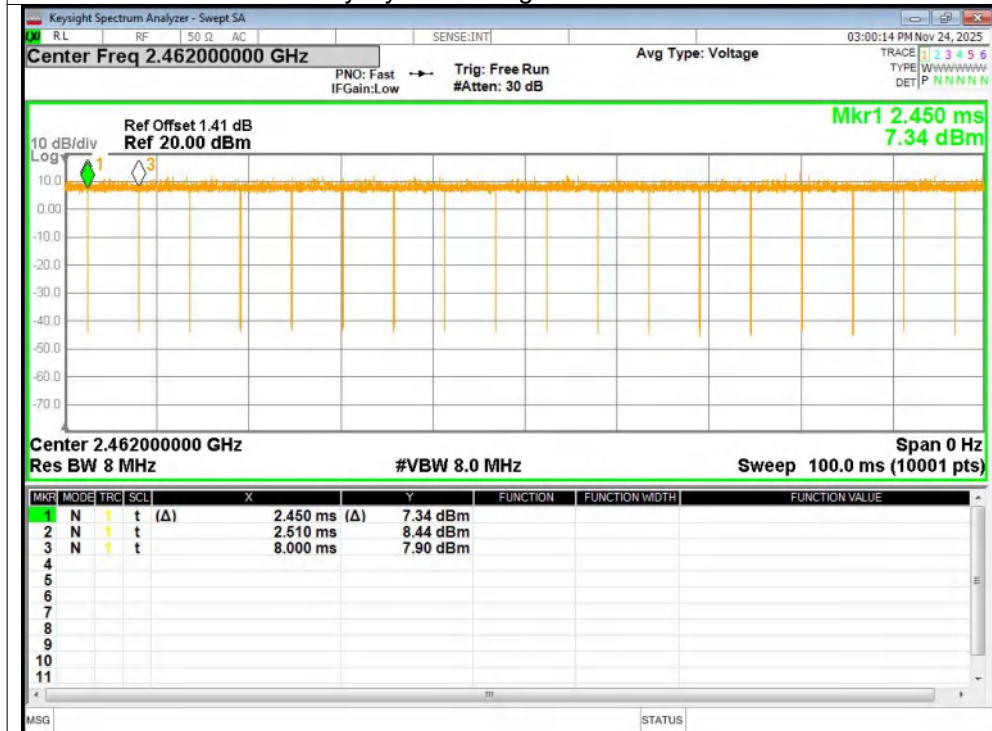


Duty Cycle NVNT n20 2412MHz Ant1

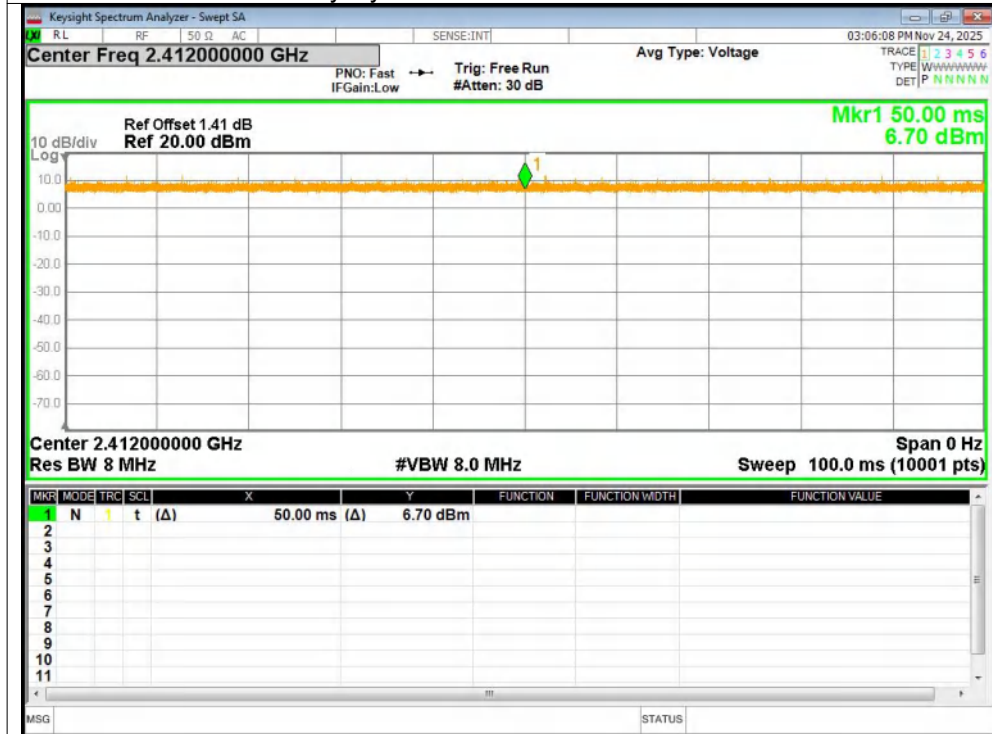

Duty Cycle NVNT n20 2437MHz Ant1



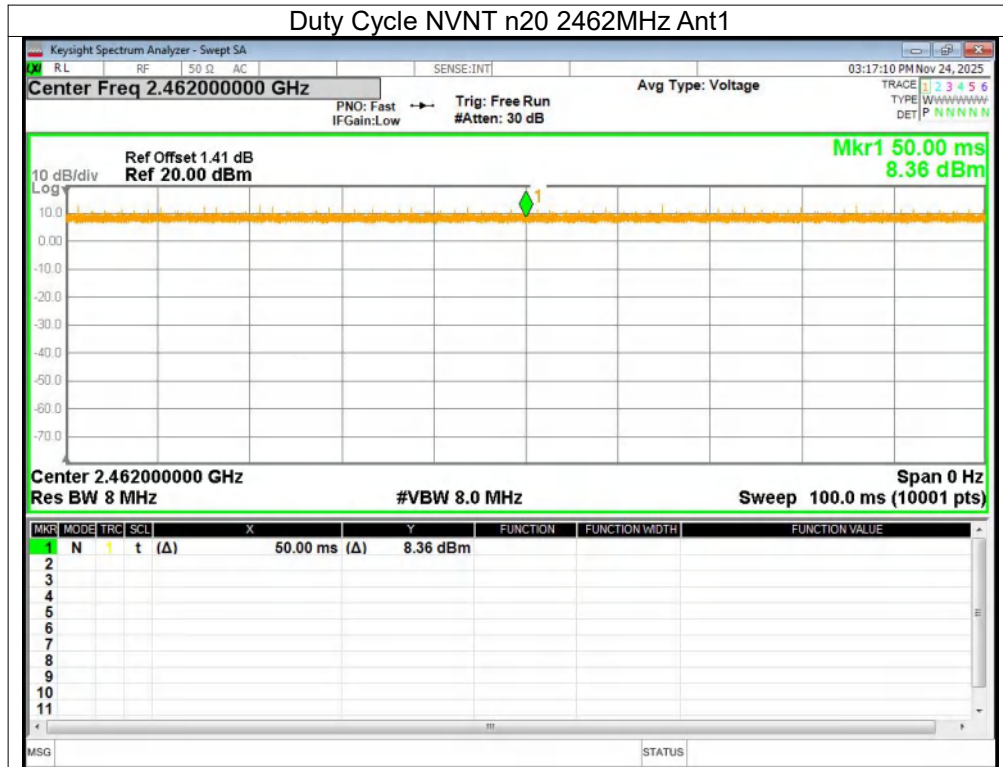

2.6. Software test version and power setting information

Software testing version	Beken Wi-Fi Test Tool V1.7.2		
Mode	The client 's preset testing software is used to control the operation of EUT in continuous transmission mode and select the testing channel, wireless mode:		
Power level setup by client			
Mode	Channel	Frequency (MHz)	Soft Set
IEEE 802.11b/g/n20	Low :CH1	2412	TX level is set as defaults value.
	Middle: CH6	2437	TX level is set as defaults value.
	High: CH11	2462	TX level is set as defaults value.

2.7. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

2.8. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

2.9. Measurement Uncertainty

(95% confidence levels, $k=2$)

Item	Uncertainty
Power Line Conducted Emissions Test	2.13dB
Radiation Emission test in 3m chamber(Below 30MHz)	4.07dB
Radiation Emission test in 3m chamber(30MHz to 1GHz)	4.51dB
Radiation Emission test in 3m chamber(1GHz to 18GHz)	5.07dB
Radiation Emission test in 3m chamber(18GHz to 40GHz)	5.21dB
Radio Frequency	48.24KHz
Conducted RF Power	0.41dB
Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Duty Cycle	1%
Conducted-Spurious Emission	1.26dB

2.10. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2024.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2024.12.18	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835240	/	2024.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2024.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LAPA_01G1 8G-45dB	SK20220329 01	/	2024.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_0118 G-45	SK20200108 01	/	2024.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.0 2-1111533-F Z	/	2024.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2024.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2024.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2024.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	2022112516 38	/	2024.12.18	1 Year
17.	Cable	SKET	Cable-RE-1	#02/#03	/	2024.12.18	1 Year
18.	Cable	SKET	Cable-RE-2	#01	/	2024.12.18	1 Year
19.	Cable	SKET	Cable-RE-3	#04	/	2024.12.18	1 Year
20.	Cable	SKET	Cable-CE-1	A-E-24	/	2024.12.18	1 Year
21.	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2024.12.18	1 Year
22.	Power meter	Agilent	E4419B	GB40202121	/	2024.12.18	1 Year
23.	Comprehensive Test Instrument	Rohde&Schwarz	CMW 500	145266	/	2024.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer		Version			
RE	EZ EMC	Farad		PSI-3A1			
CE	EZ EMC	Farad		PSI-3A1			
RF	RTS	TACHOY		V1.0.0			

3. Spurious Emission

3.1. Test Limits

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

Note: The peak limit is 20 dB higher than the average limit


All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

3.2. Block Diagram of Test setup


a. In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

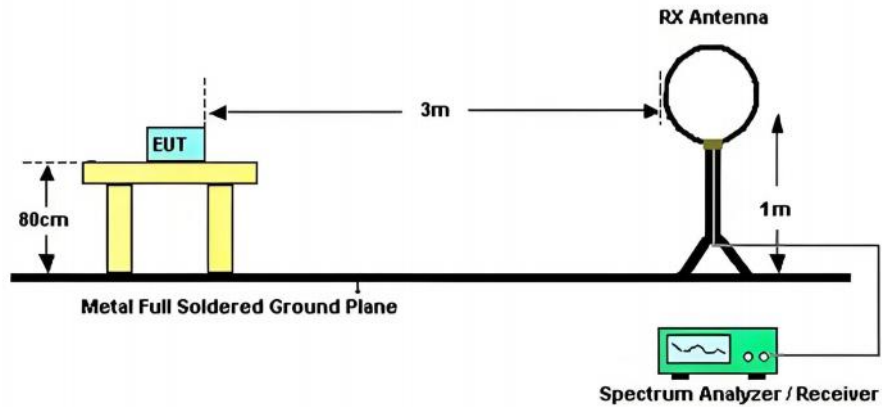

b. In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

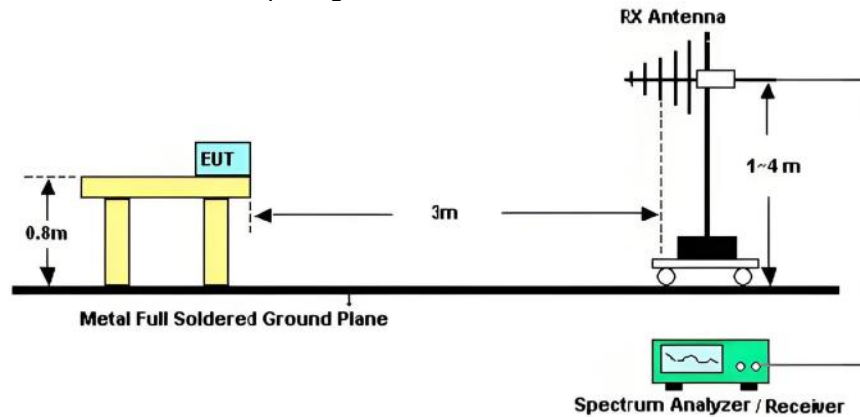

c. In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

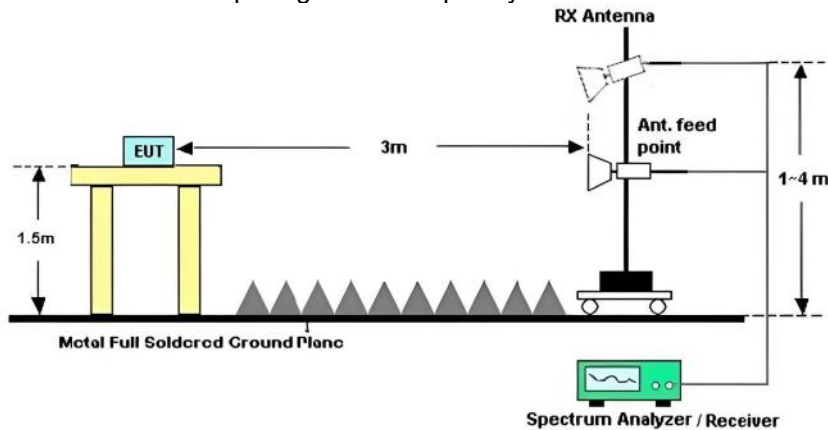

3.3. Test Procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.

(2) Setup EUT and simulator

(3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.

(a) Change work frequency or channel of device if practicable.

(b) Change modulation type of device if practicable.

(c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions

(4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated

(5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10-2020 on Radiated Emission test.

(6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

Test setup information:

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHZ~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz


3.4. Test Results

We have scanned from 9kHz to the 10th harmonic of the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz:	
Test Date : 2025.11.27	Temperature : 26°C
Test Engineer : Felix Pang	Humidity : 54%
Test Mode : IEEE 802.11b mode	
Test Results : PASS	
Note:	The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


From 30MHz to 1000MHz:	
Test Date : 2025.11.27	Temperature : 26°C
Test Engineer : Felix Pang	Humidity : 54%
Test Mode : IEEE 802.11b mode	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. All modes have been tested, and only worst data of IEEE 802.11b mode, Channel 2412MHz was listed in this report.

Polarization: Horizontal

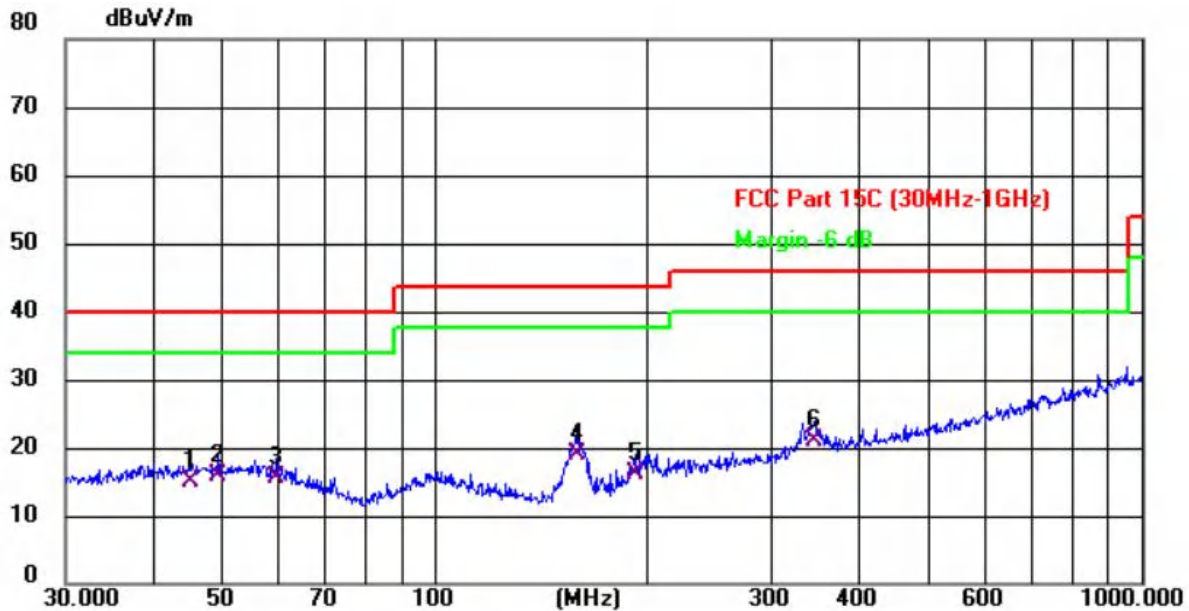

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	45.2165	23.72	-8.72	15.00	40.00	-25.00	QP
2 *	49.3594	24.43	-8.47	15.96	40.00	-24.04	QP
3	59.6492	24.80	-9.36	15.44	40.00	-24.56	QP
4	158.6676	31.54	-12.46	19.08	43.50	-24.42	QP
5	191.7450	26.60	-10.53	16.07	43.50	-27.43	QP
6	344.3854	27.14	-6.25	20.89	46.00	-25.11	QP

Level = Reading + Factor Margin = Level - Limit

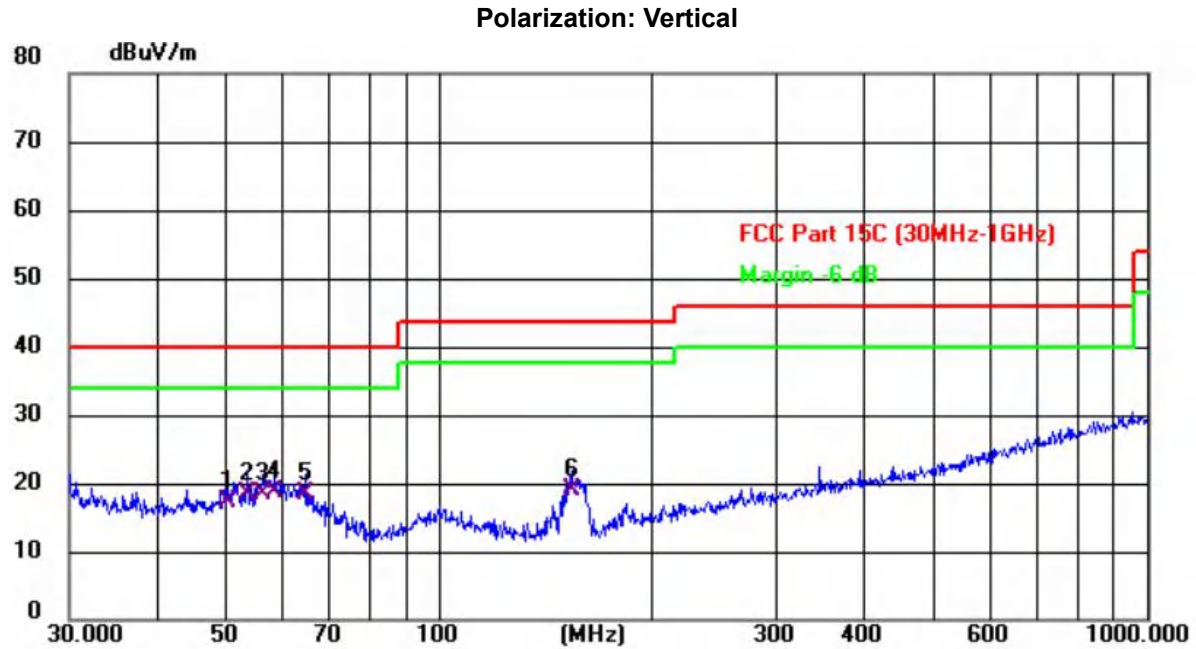

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	50.2323	25.72	-8.45	17.27	40.00	-22.73	QP
2	53.6931	27.19	-8.79	18.40	40.00	-21.60	QP
3	56.3947	27.36	-9.05	18.31	40.00	-21.69	QP
4 *	58.6126	27.89	-9.27	18.62	40.00	-21.38	QP
5	64.6594	28.97	-10.63	18.34	40.00	-21.66	QP
6	153.7384	31.67	-12.72	18.95	43.50	-24.55	QP

Level = Reading + Factor Margin = Level - Limit

From 1GHz to 25GHz:	
Test Date : 2025.11.27	Temperature : 26℃
Test Engineer : Felix Pang	Humidity : 54%
Test Mode : WiFi mode	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

Test Mode : IEEE 802.11b TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4824	V	57.71	-13.25	44.46	74	-29.54	Peak
2	4824	V	48.84	-13.25	35.59	54	-18.41	Avg
3	7236	--	--	--	--	--	--	--
4	9648	--	--	--	--	--	--	--
5	4824	H	57.44	-13.25	44.19	74	-29.81	Peak
6	4824	H	47.29	-13.25	34.04	54	-19.96	Avg
7	7236	--	--	--	--	--	--	--
8	9648	--	--	--	--	--	--	--
Test Mode : IEEE 802.11b TX Mid								
1	4874	V	58.09	-12.98	45.11	74	-28.89	Peak
2	4874	V	48.3	-12.98	35.32	54	-18.68	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	59.49	-12.98	46.51	74	-27.49	Peak
6	4874	H	48.7	-12.98	35.72	54	-18.28	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11b TX High								
1	4924	V	57.66	-12.7	44.96	74	-29.04	Peak
2	4924	V	48.76	-12.7	36.06	54	-17.94	Avg
3	7386	--	--	--	--	--	--	--
4	9848	--	--	--	--	--	--	--
5	4924	H	58.97	-12.7	46.27	74	-27.73	Peak
6	4924	H	48.31	-12.7	35.61	54	-18.39	Avg
7	7386	--	--	--	--	--	--	--
8	9848	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.								

Test Mode : IEEE 802.11g TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4824	V	59.75	-13.25	46.5	74	-27.5	Peak
2	4824	V	48.12	-13.25	34.87	54	-19.13	Avg
3	7236	--	--	--	--	--	--	--
4	9648	--	--	--	--	--	--	--
5	4824	H	57.6	-13.25	44.35	74	-29.65	Peak
6	4824	H	48.27	-13.25	35.02	54	-18.98	Avg
7	7236	--	--	--	--	--	--	--
8	9648	--	--	--	--	--	--	--
Test Mode : IEEE 802.11g TX Mid								
1	4874	V	57.21	-12.98	44.23	74	-29.77	Peak
2	4874	V	47.85	-12.98	34.87	54	-19.13	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	59.33	-12.98	46.35	74	-27.65	Peak
6	4874	H	47.97	-12.98	34.99	54	-19.01	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11g TX High								
1	4924	V	58.29	-12.7	45.59	74	-28.41	Peak
2	4924	V	48.76	-12.7	36.06	54	-17.94	Avg
3	7386	--	--	--	--	--	--	--
4	9848	--	--	--	--	--	--	--
5	4924	H	59.88	-12.7	47.18	74	-26.82	Peak
6	4924	H	47.91	-12.7	35.21	54	-18.79	Avg
7	7386	--	--	--	--	--	--	--
8	9848	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.								

Test Mode : IEEE 802.11n/HT20 TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4824	V	59.58	-13.25	46.33	74	-27.67	Peak
2	4824	V	48.83	-13.25	35.58	54	-18.42	Avg
3	7236	--	--	--	--	--	--	--
4	9648	--	--	--	--	--	--	--
5	4824	H	59.89	-13.25	46.64	74	-27.36	Peak
6	4824	H	47.82	-13.25	34.57	54	-19.43	Avg
7	7236	--	--	--	--	--	--	--
8	9648	--	--	--	--	--	--	--
Test Mode : IEEE 802.11n/HT20 TX Mid								
1	4874	V	58.44	-12.98	45.46	74	-28.54	Peak
2	4874	V	47.7	-12.98	34.72	54	-19.28	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	58.22	-12.98	45.24	74	-28.76	Peak
6	4874	H	48.91	-12.98	35.93	54	-18.07	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11n/HT20 TX High								
1	4924	V	59.93	-12.7	47.23	74	-26.77	Peak
2	4924	V	48.86	-12.7	36.16	54	-17.84	Avg
3	7386	--	--	--	--	--	--	--
4	9848	--	--	--	--	--	--	--
5	4924	H	59.13	-12.7	46.43	74	-27.57	Peak
6	4924	H	48.48	-12.7	35.78	54	-18.22	Avg
7	7386	--	--	--	--	--	--	--
8	9848	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.								

4. Power Line Conducted Emission

4.1. Test Limits

Frequency (MHz)	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.


2. The lower limit shall apply at the transition frequencies.

3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10-2020 on Conducted Emission Measurement. The bandwidth of test receiver is set at 9 kHz.

4.3. Test Setup

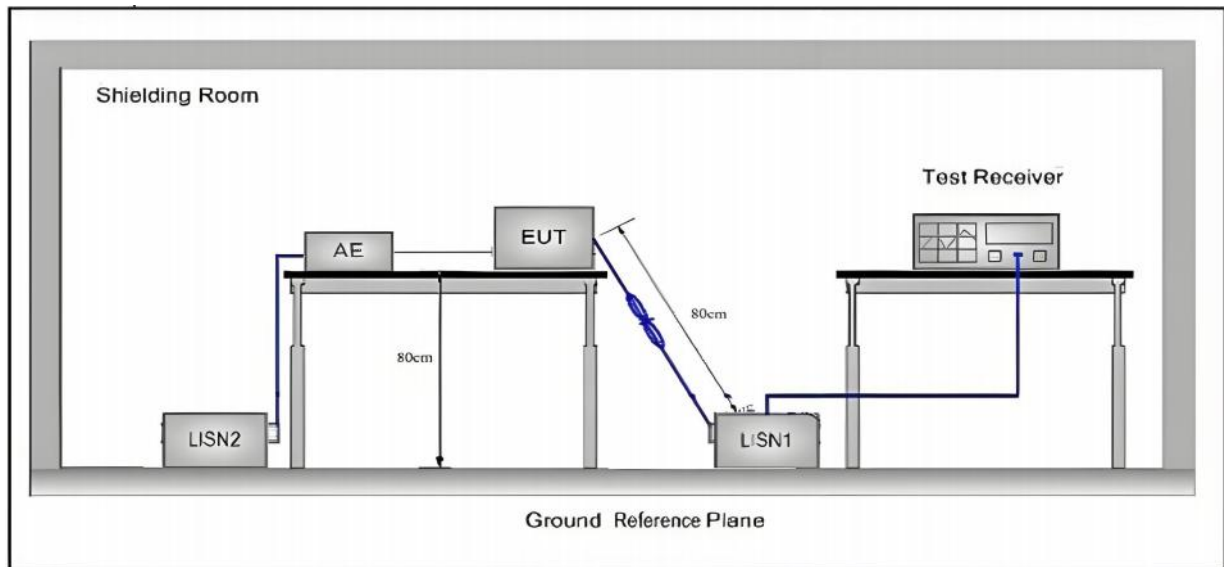


4.4. Test Results

Test Date	: 2025.11.28	Temperature	: 26℃
Test Engineer	: Felix Pang	Humidity	: 54%
Test Mode	: WIFI mode		
Test Results	: PASS		

Note: 1. The test results are listed in next pages.

2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.
3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.
4. All modes have been tested, and only worst data of b mode, Channel 2412MHz (AC 120V/ 60Hz) was listed in this report.


Polarization: L

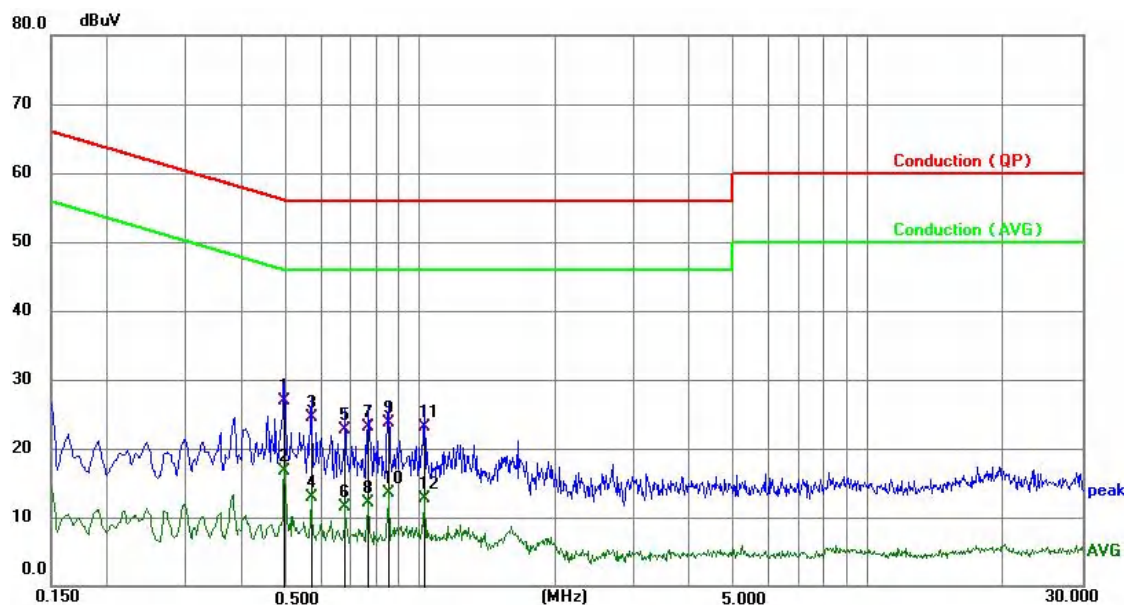

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.4964	16.94	10.02	26.96	56.06	-29.10	QP
2	0.4964	6.75	10.02	16.77	46.06	-29.29	AVG
3	0.5700	14.44	10.03	24.47	56.00	-31.53	QP
4	0.5700	2.86	10.03	12.89	46.00	-33.11	AVG
5	0.6809	12.73	10.03	22.76	56.00	-33.24	QP
6	0.6809	1.50	10.03	11.53	46.00	-34.47	AVG
7	0.7664	13.09	10.04	23.13	56.00	-32.87	QP
8	0.7664	2.13	10.04	12.17	46.00	-33.83	AVG
9	0.8520	13.63	10.05	23.68	56.00	-32.32	QP
10	0.8520	3.41	10.05	13.46	46.00	-32.54	AVG
11	1.0230	13.04	10.06	23.10	56.00	-32.90	QP
12	1.0230	2.58	10.06	12.64	46.00	-33.36	AVG

Note: Level = Reading + Factor Margin = Level - Limit

Polarization: N

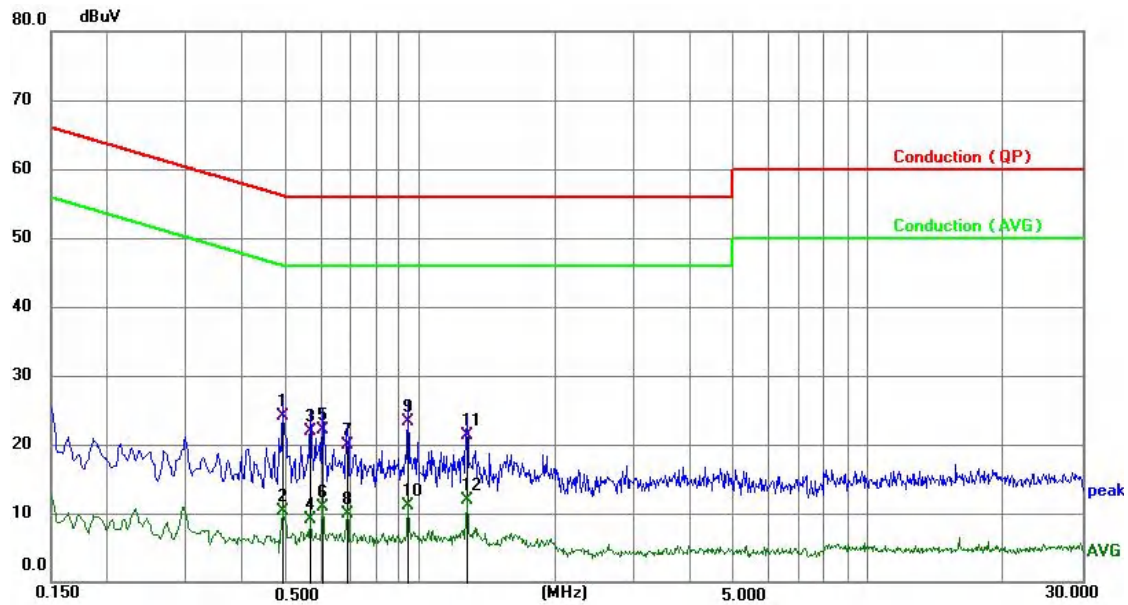

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.4920	14.11	10.02	24.13	56.13	-32.00	QP
2	0.4920	0.23	10.02	10.25	46.13	-35.88	AVG
3	0.5685	11.95	10.03	21.98	56.00	-34.02	QP
4	0.5685	-0.83	10.03	9.20	46.00	-36.80	AVG
5	0.6045	11.99	10.03	22.02	56.00	-33.98	QP
6	0.6045	0.85	10.03	10.88	46.00	-35.12	AVG
7	0.6854	9.86	10.03	19.89	56.00	-36.11	QP
8	0.6854	-0.19	10.03	9.84	46.00	-36.16	AVG
9	0.9420	13.16	10.06	23.22	56.00	-32.78	QP
10	0.9420	1.00	10.06	11.06	46.00	-34.94	AVG
11	1.2703	11.27	10.06	21.33	56.00	-34.67	QP
12	1.2703	1.93	10.06	11.99	46.00	-34.01	AVG

Note: Level = Reading + Factor Margin = Level - Limit

5. Out-of-band Emissions

5.1. Test Limits


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.

5.2. Test Procedure

ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

5.3. Test Setup

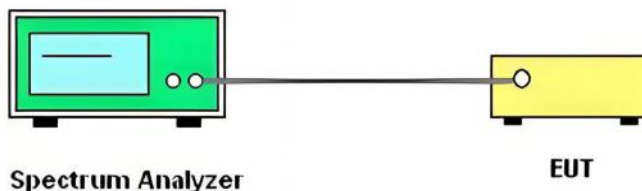

5.4. Test Results

PASS.

The test results are listed in next pages.

Band Edge: Pass.


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-35.53	-20	Pass
NVNT	b	2462	Ant1	-52.96	-20	Pass
NVNT	g	2412	Ant1	-31.02	-20	Pass
NVNT	g	2462	Ant1	-47.41	-20	Pass
NVNT	n20	2412	Ant1	-34.48	-20	Pass
NVNT	n20	2462	Ant1	-46.41	-20	Pass


Test Graphs


Band Edge NVNT b 2412MHz Ant1 Ref





Band Edge NVNT b 2412MHz Ant1 Emission

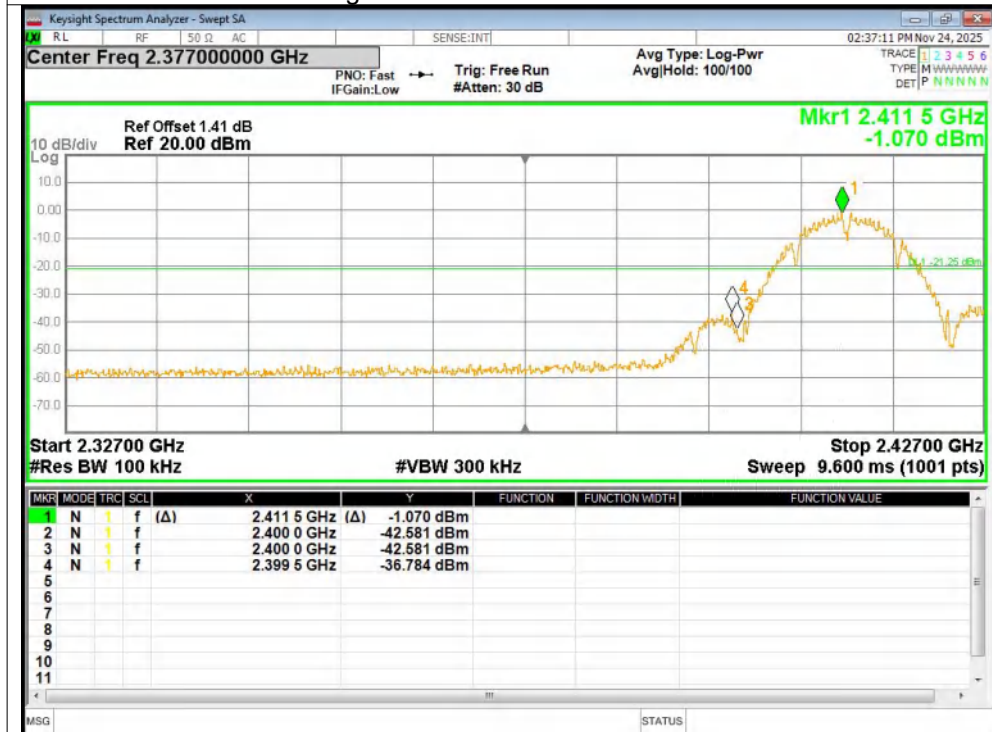


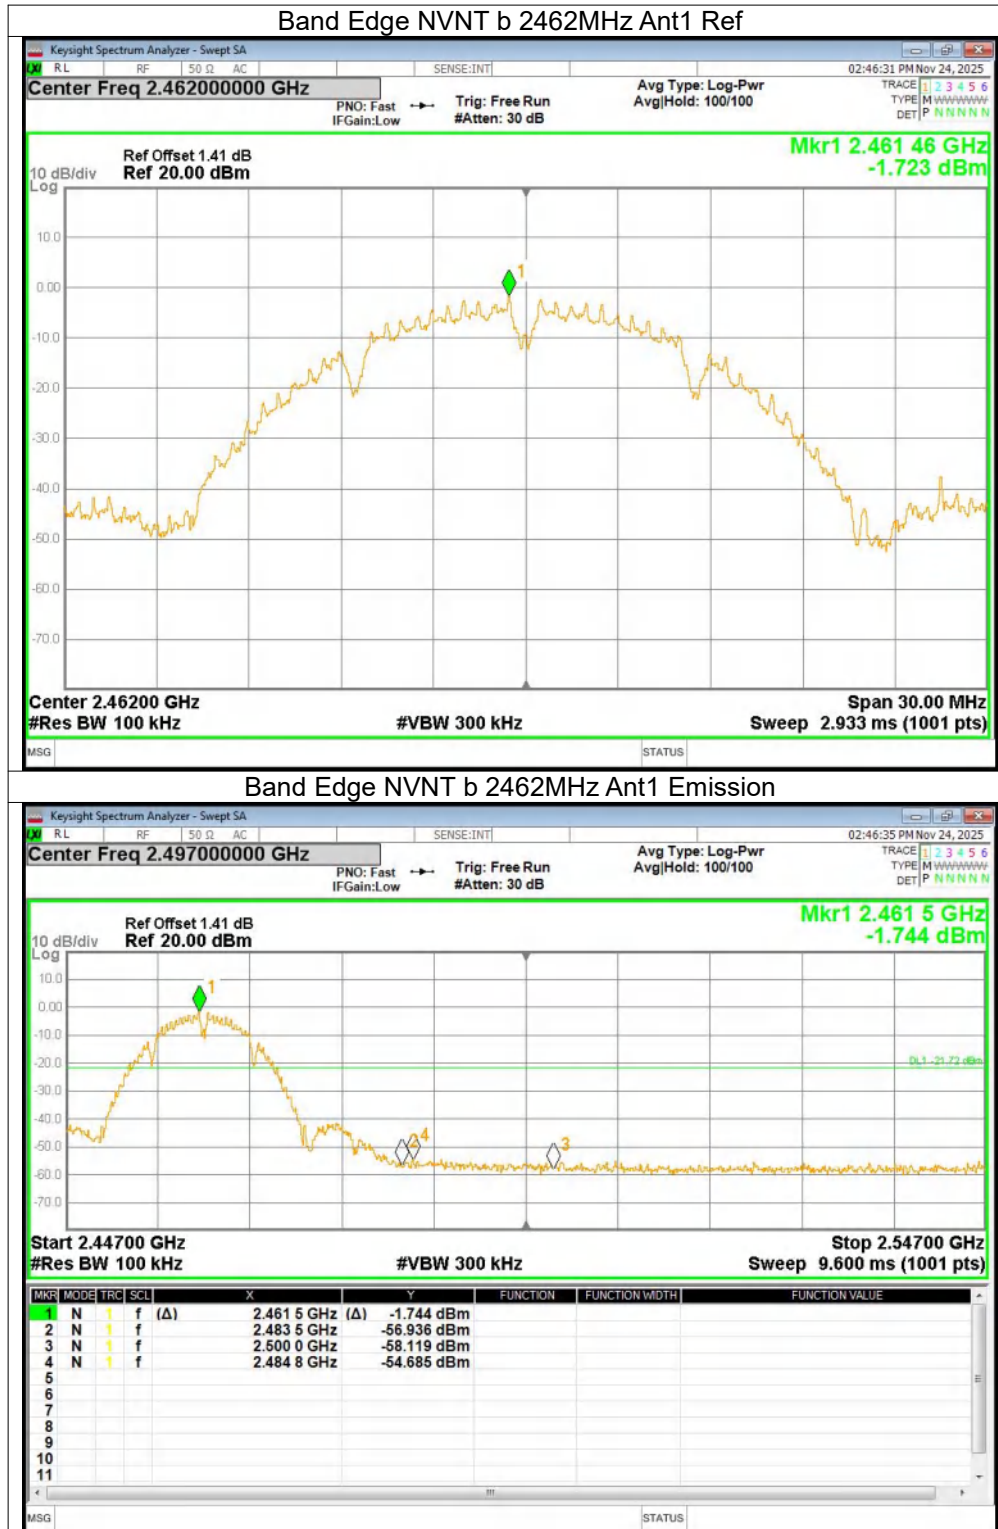

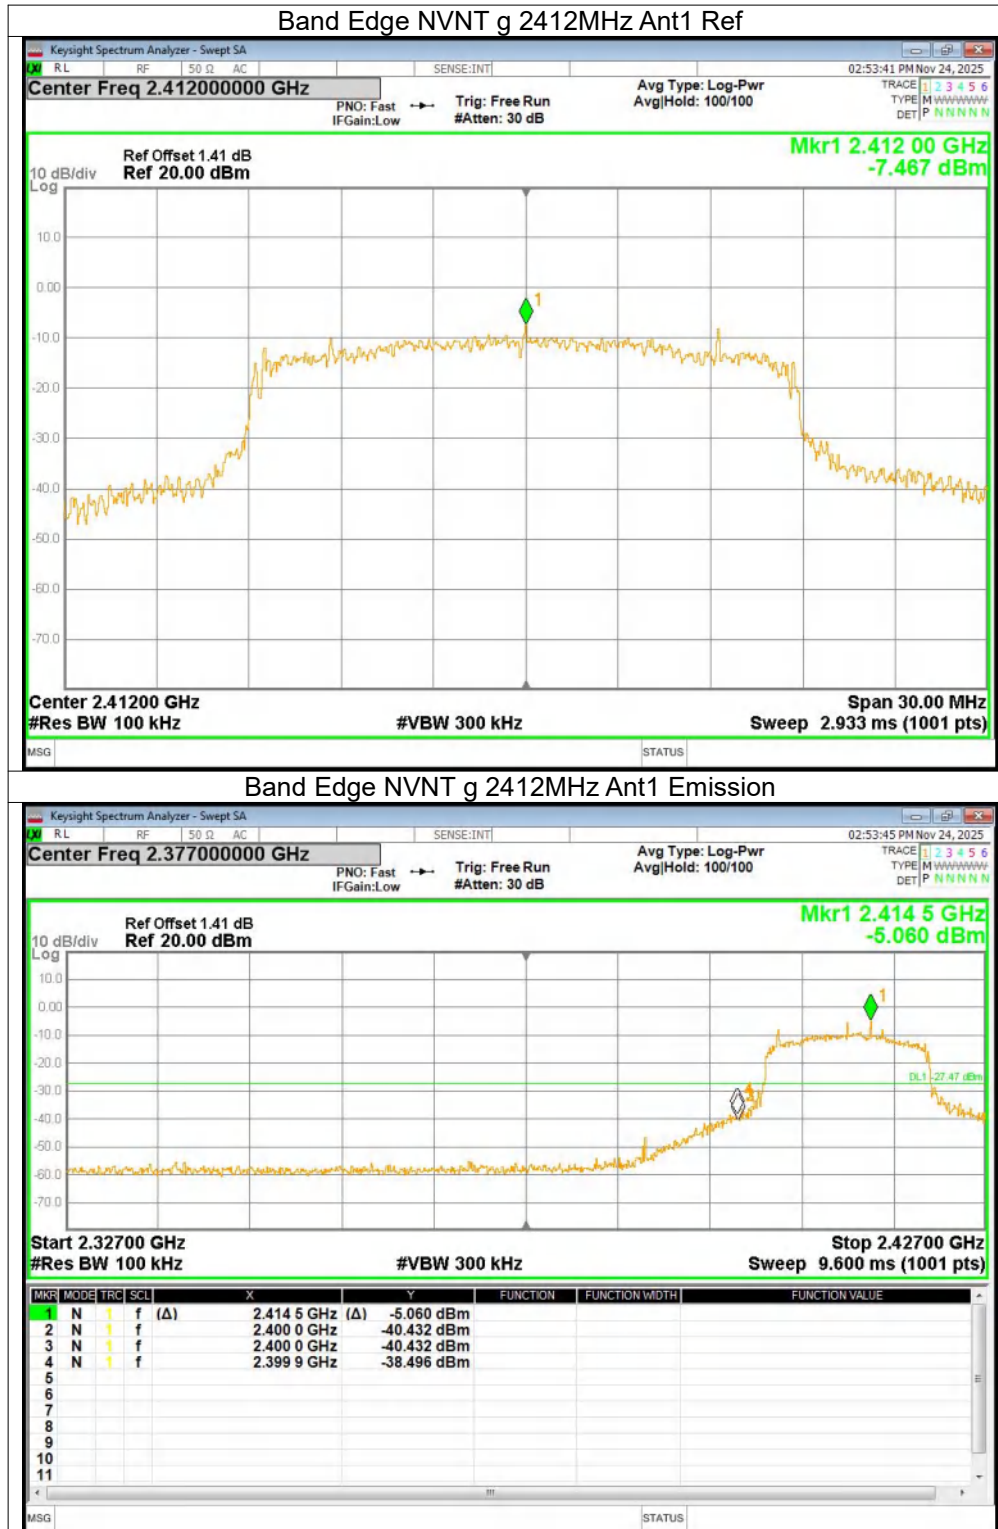

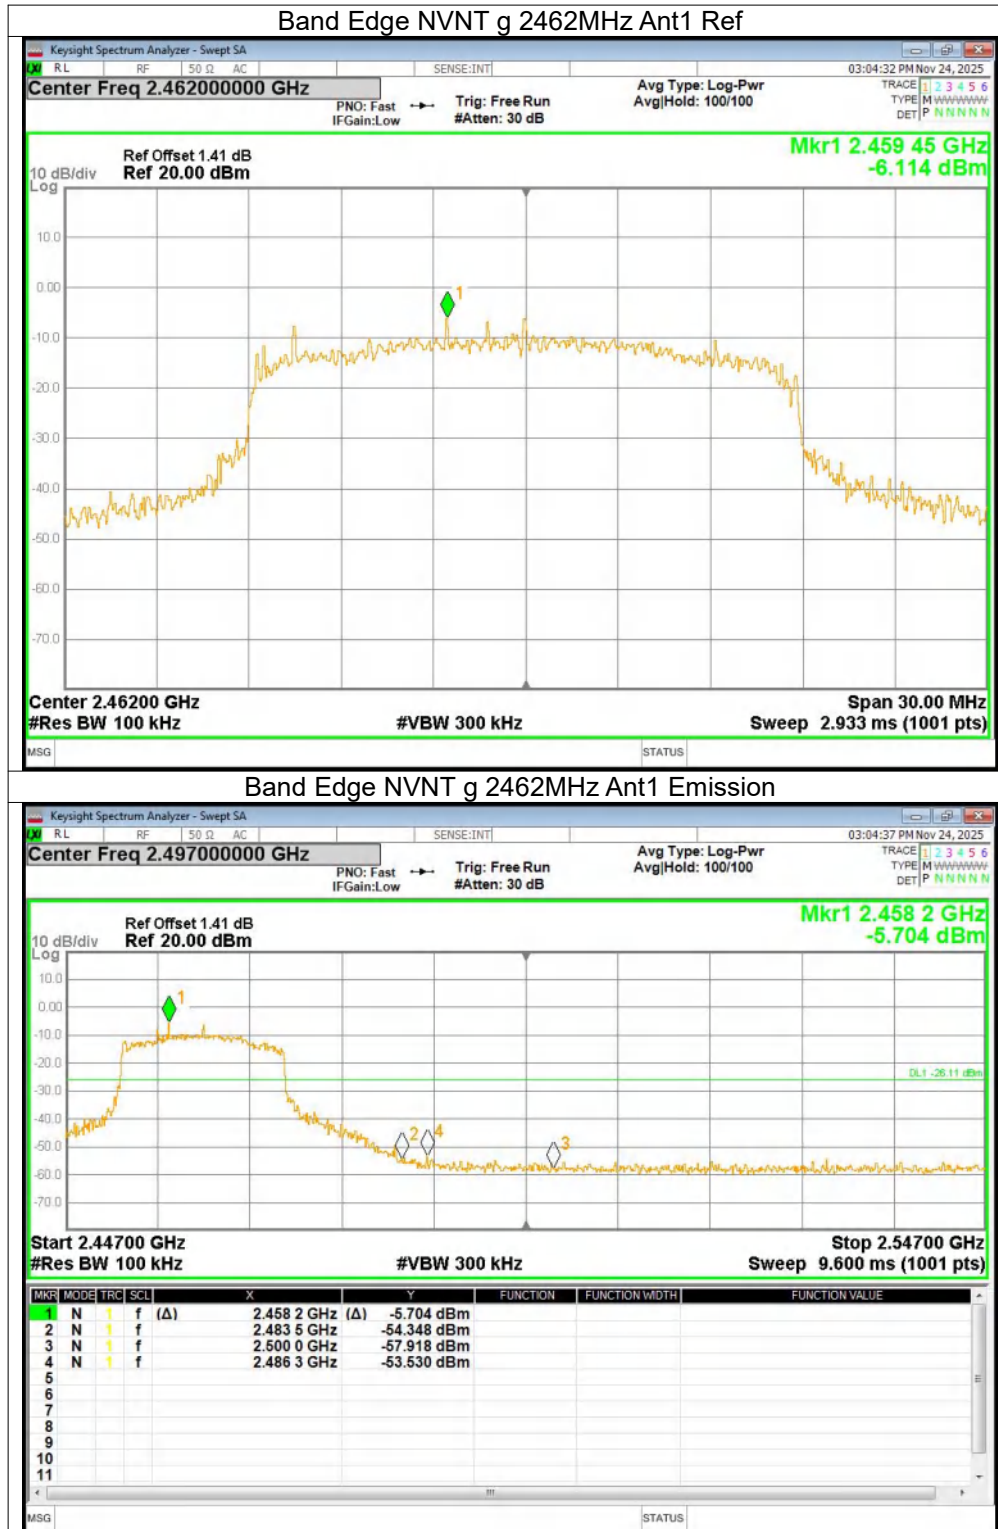

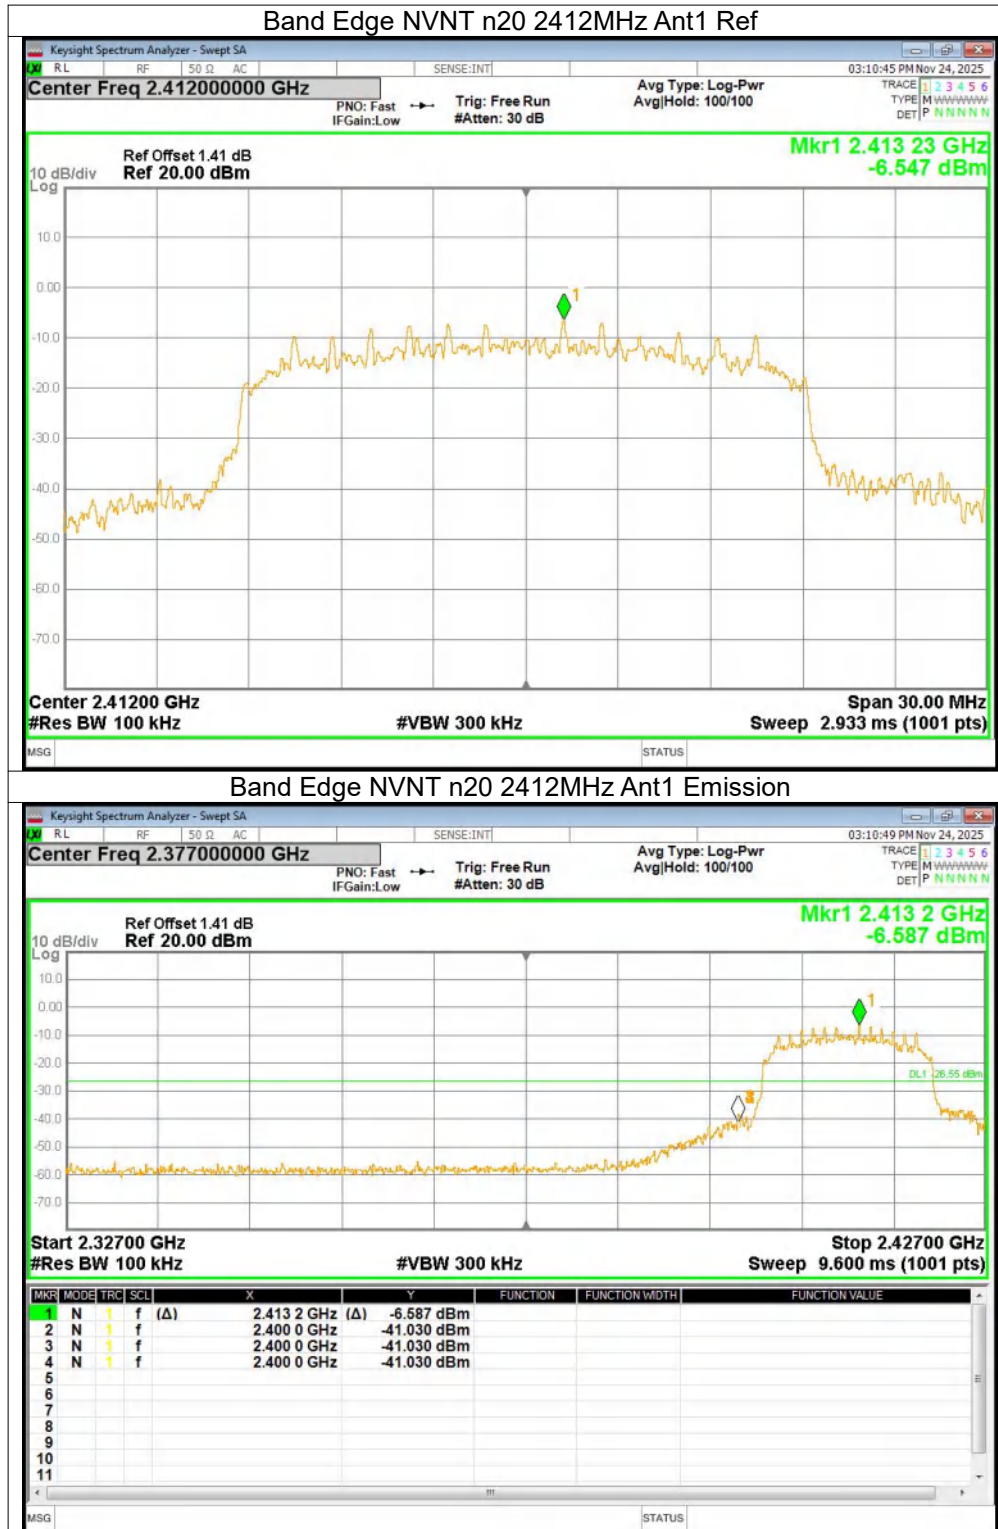

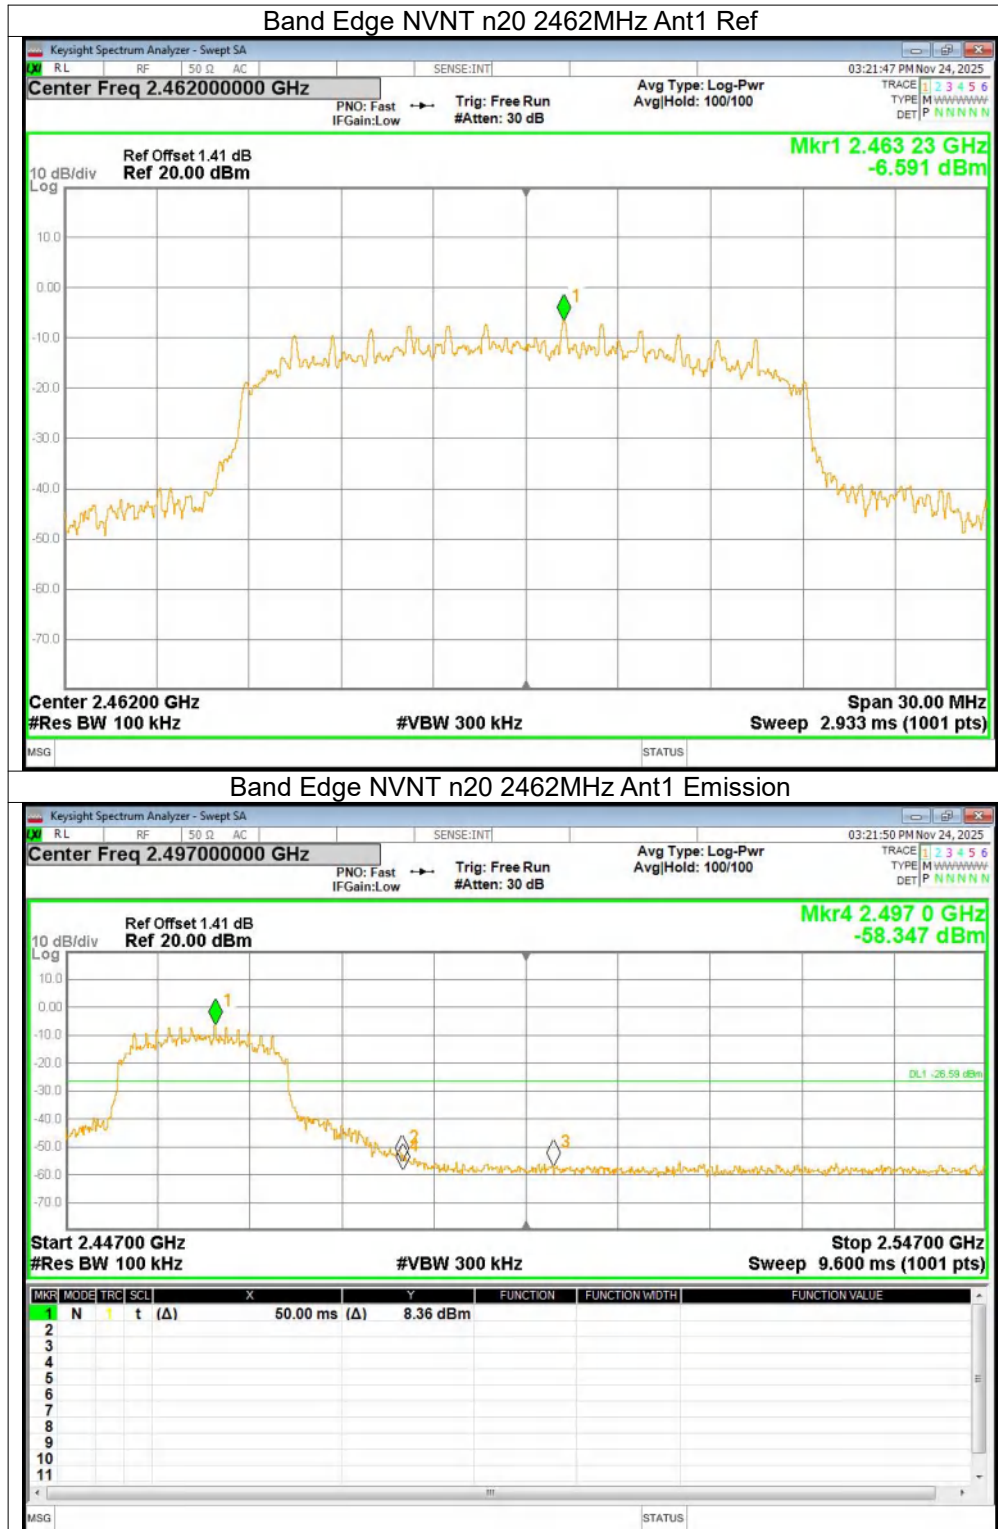


Conducted spurious emission: Pass.


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-40.74	-20	Pass
NVNT	b	2437	Ant1	-41.59	-20	Pass
NVNT	b	2462	Ant1	-41.28	-20	Pass
NVNT	g	2412	Ant1	-37.58	-20	Pass
NVNT	g	2437	Ant1	-37.71	-20	Pass
NVNT	g	2462	Ant1	-37.63	-20	Pass
NVNT	n20	2412	Ant1	-37.49	-20	Pass
NVNT	n20	2437	Ant1	-38.11	-20	Pass
NVNT	n20	2462	Ant1	-36.8	-20	Pass

Test Graphs


Tx. Spurious NVNT b 2412MHz Ant1 Ref

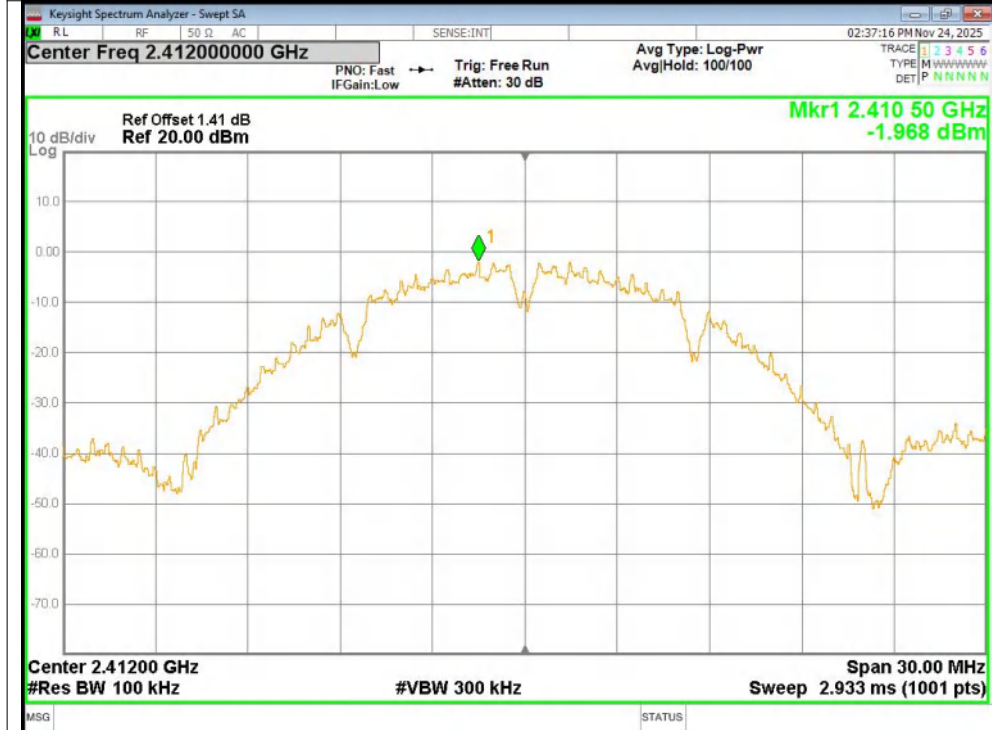


Tx. Spurious NVNT b 2412MHz Ant1 Emission

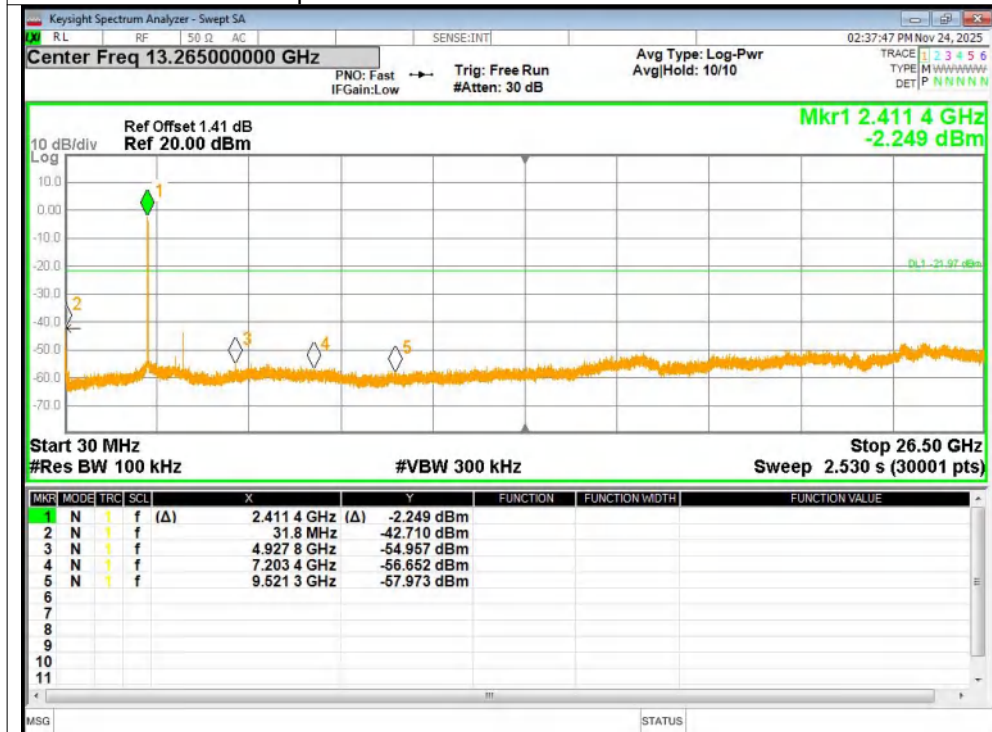


Tx. Spurious NVNT b 2437MHz Ant1 Ref

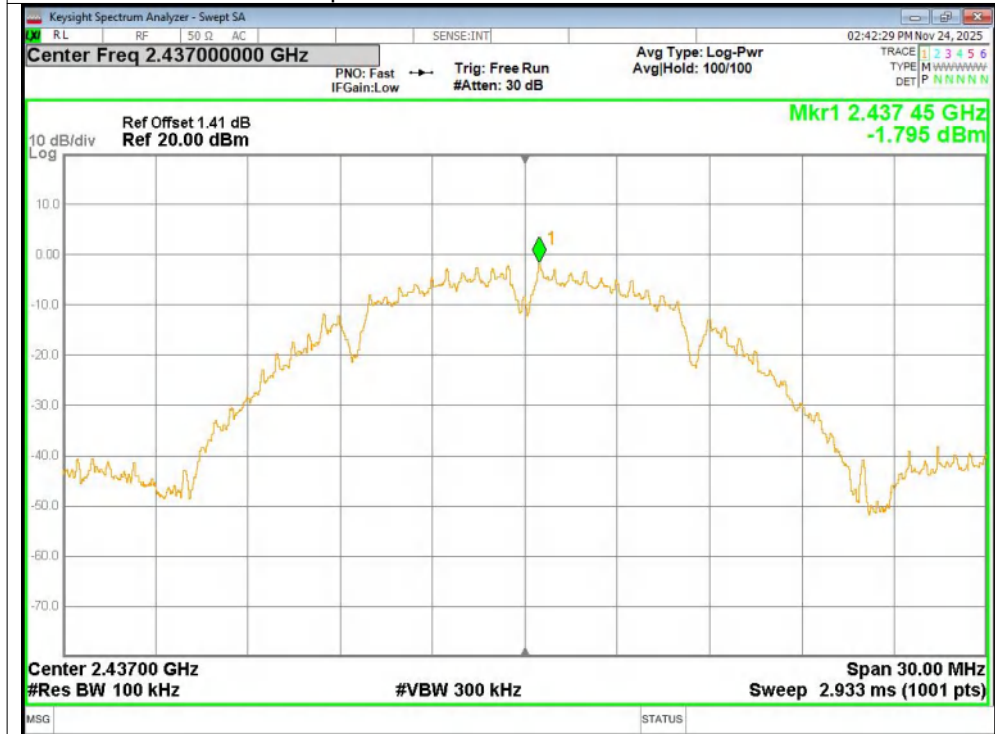


Tx. Spurious NVNT b 2437MHz Ant1 Emission

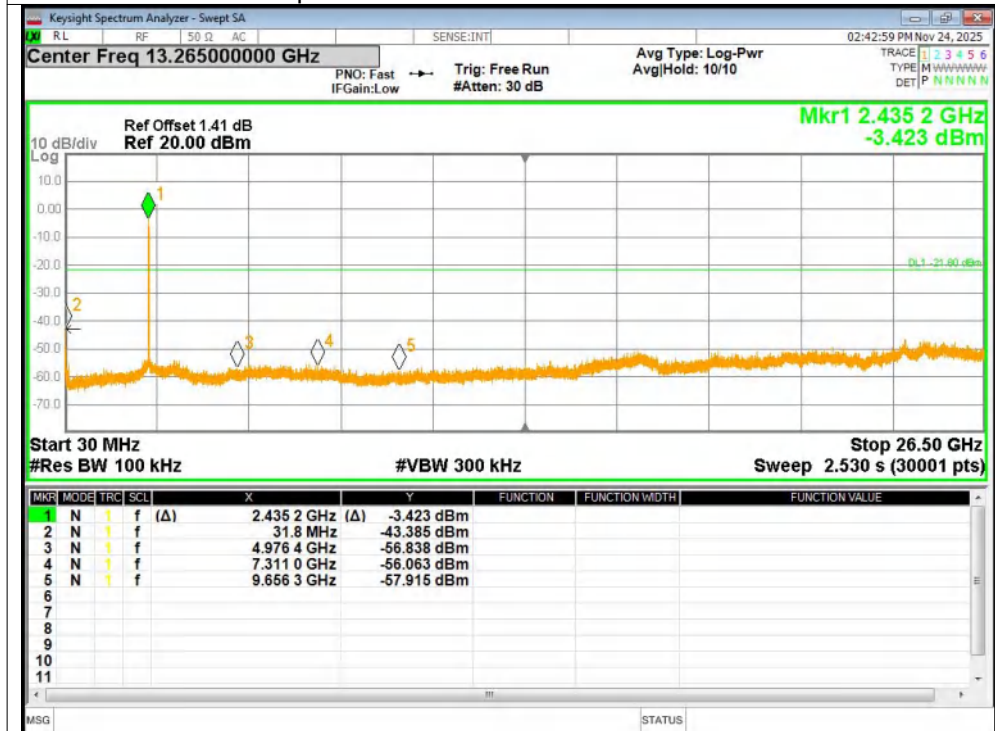

Tx. Spurious NVNT b 2462MHz Ant1 Ref

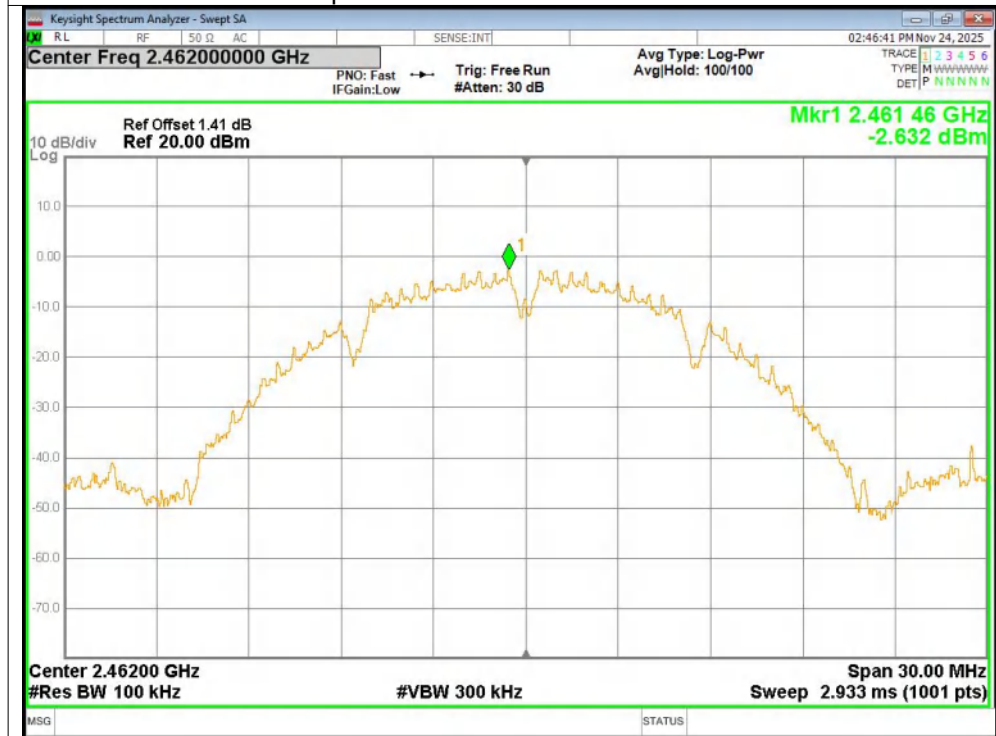


Tx. Spurious NVNT b 2462MHz Ant1 Emission

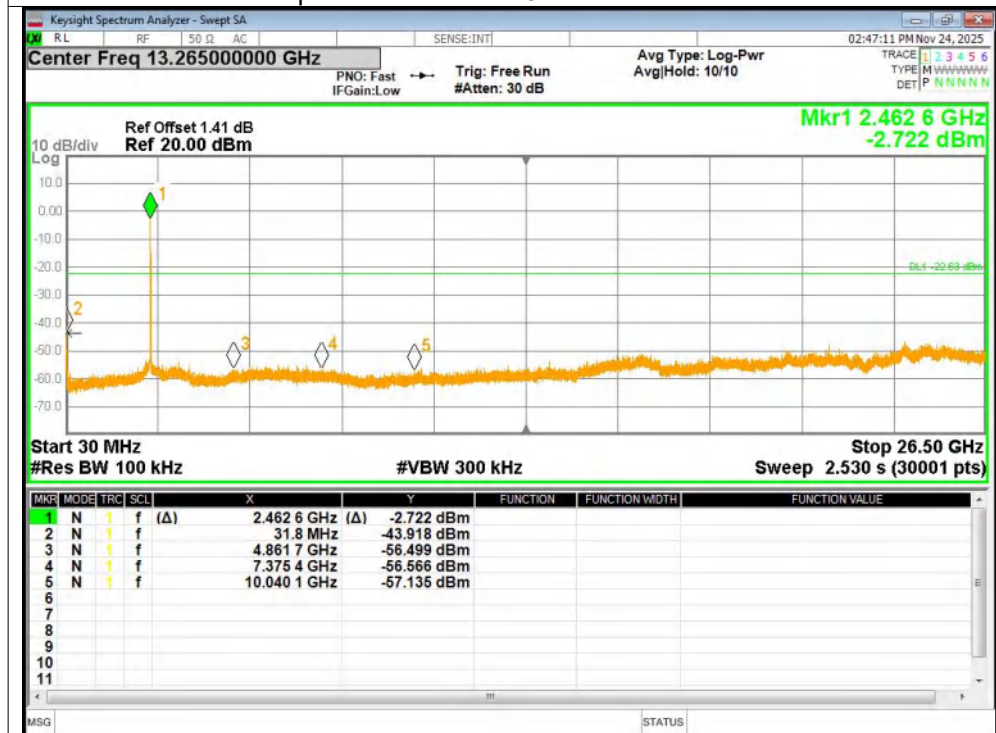

Tx. Spurious NVNT g 2412MHz Ant1 Ref




Tx. Spurious NVNT g 2412MHz Ant1 Emission

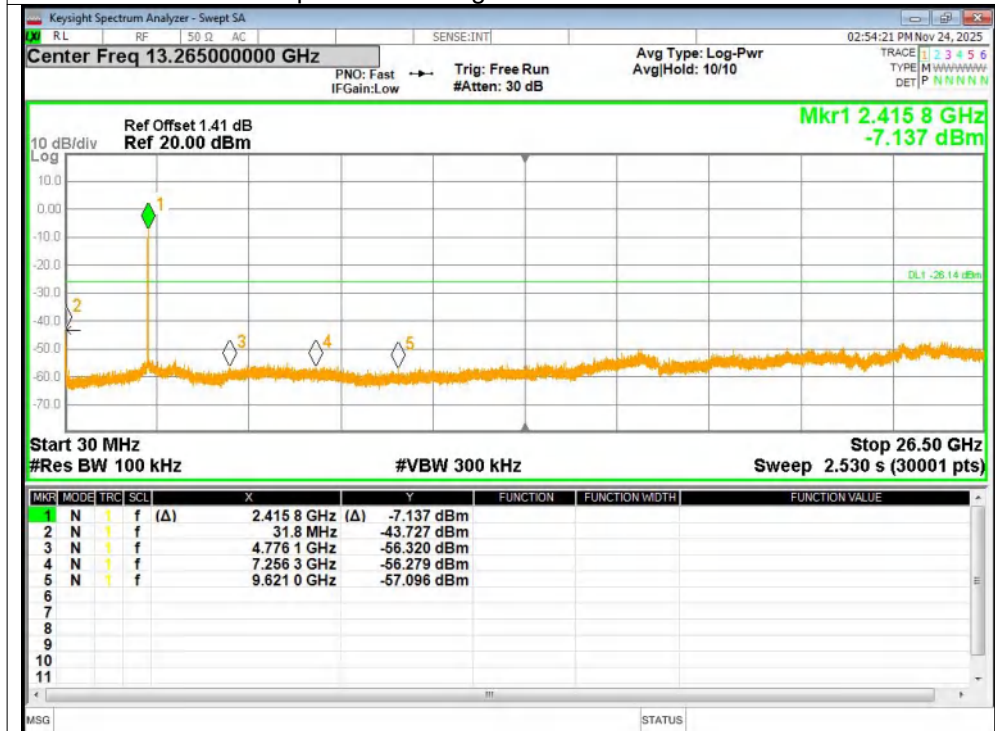

Tx. Spurious NVNT g 2437MHz Ant1 Ref




Tx. Spurious NVNT g 2437MHz Ant1 Emission

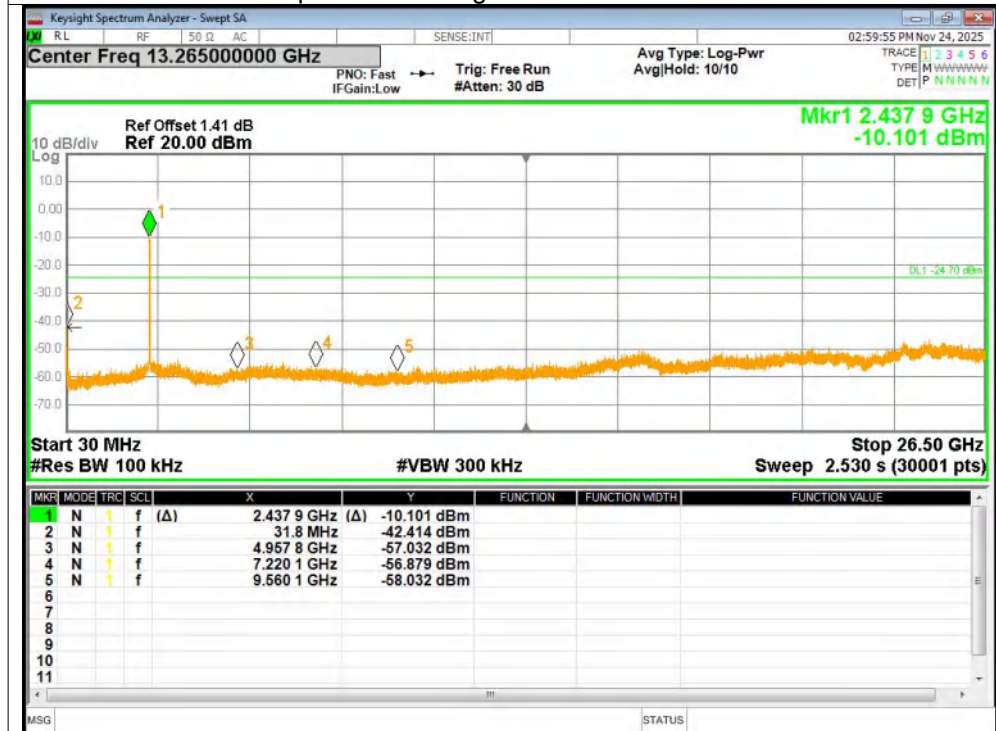


Tx. Spurious NVNT g 2462MHz Ant1 Ref




Tx. Spurious NVNT g 2462MHz Ant1 Emission

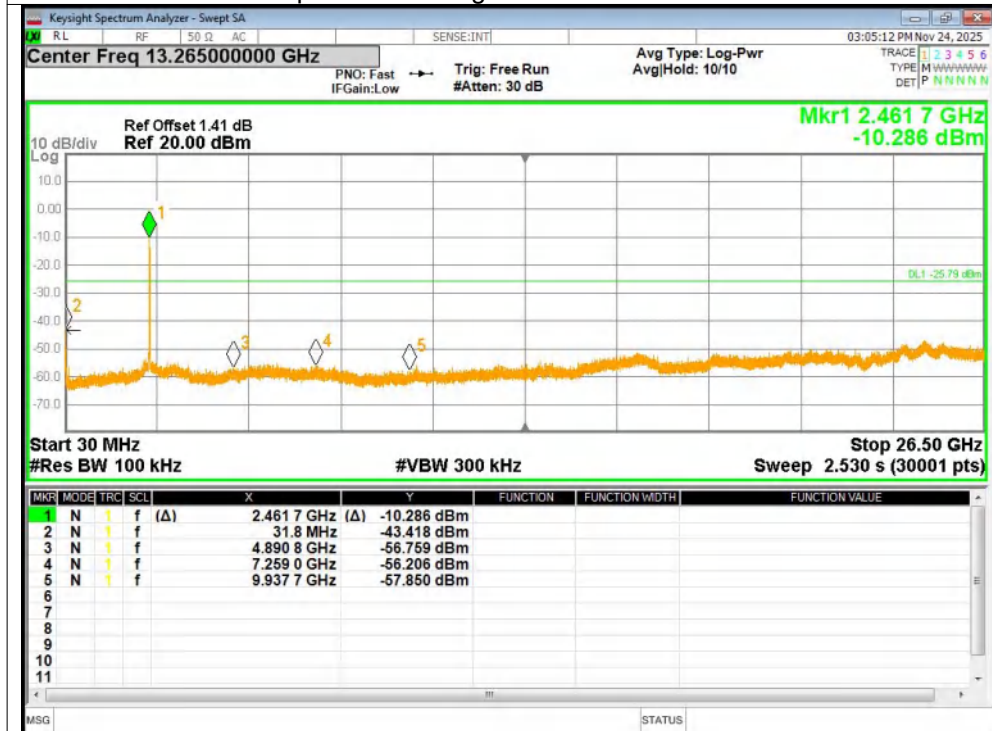


Tx. Spurious NVNT n20 2412MHz Ant1 Ref

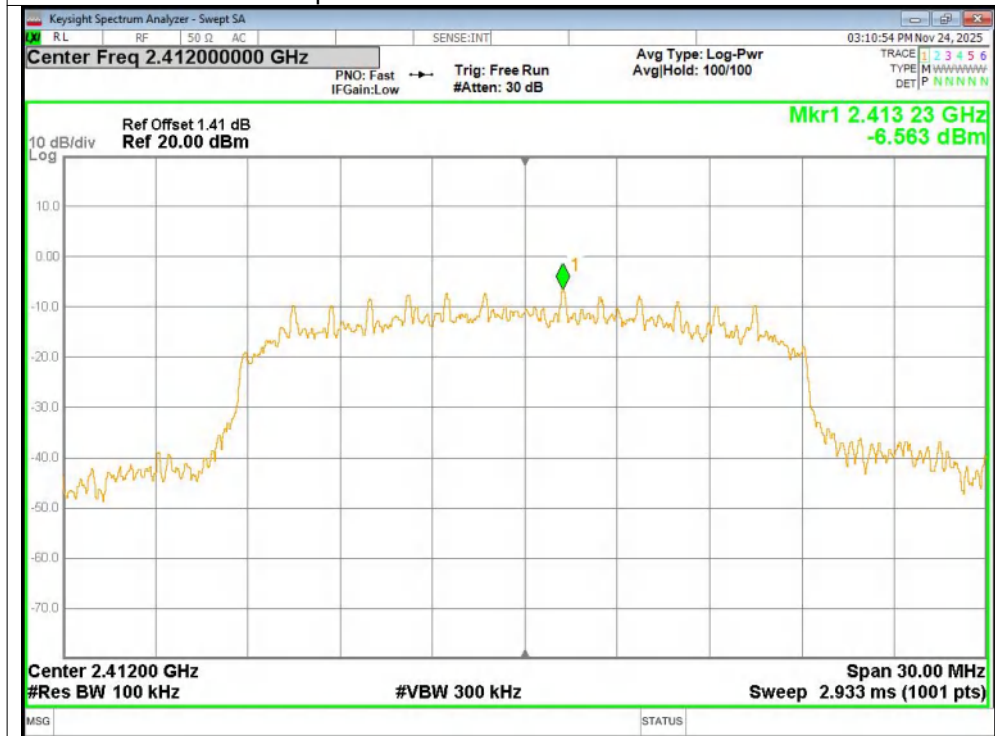


Tx. Spurious NVNT n20 2412MHz Ant1 Emission

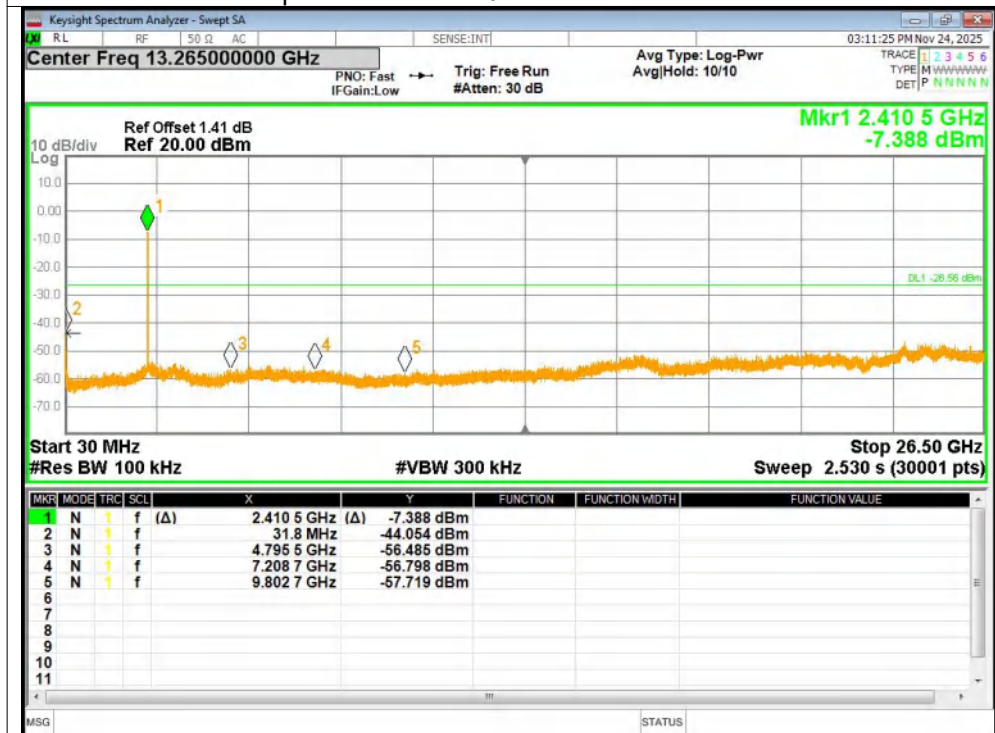

Tx. Spurious NVNT n20 2437MHz Ant1 Ref

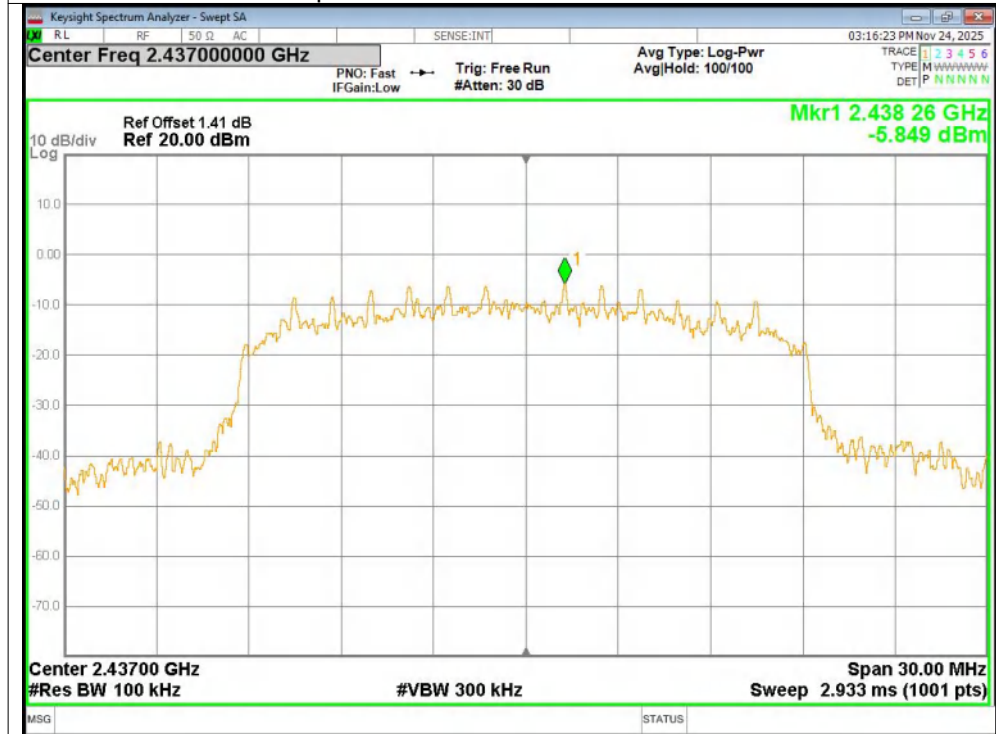


Tx. Spurious NVNT n20 2437MHz Ant1 Emission

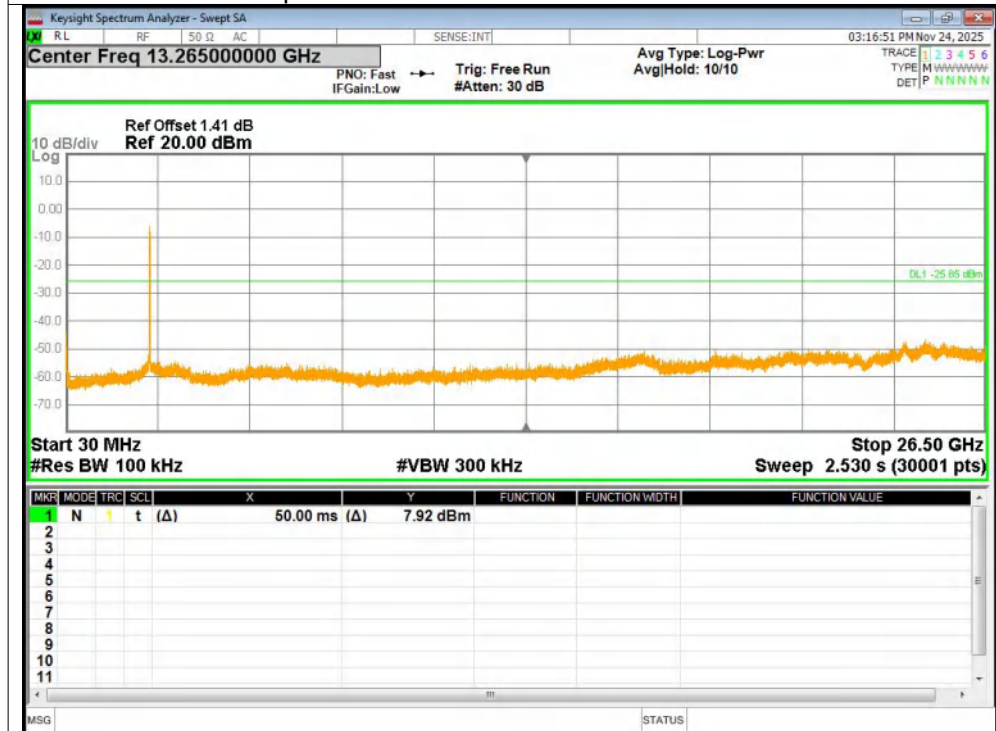

Tx. Spurious NVNT n20 2462MHz Ant1 Ref



Tx. Spurious NVNT n20 2462MHz Ant1 Emission

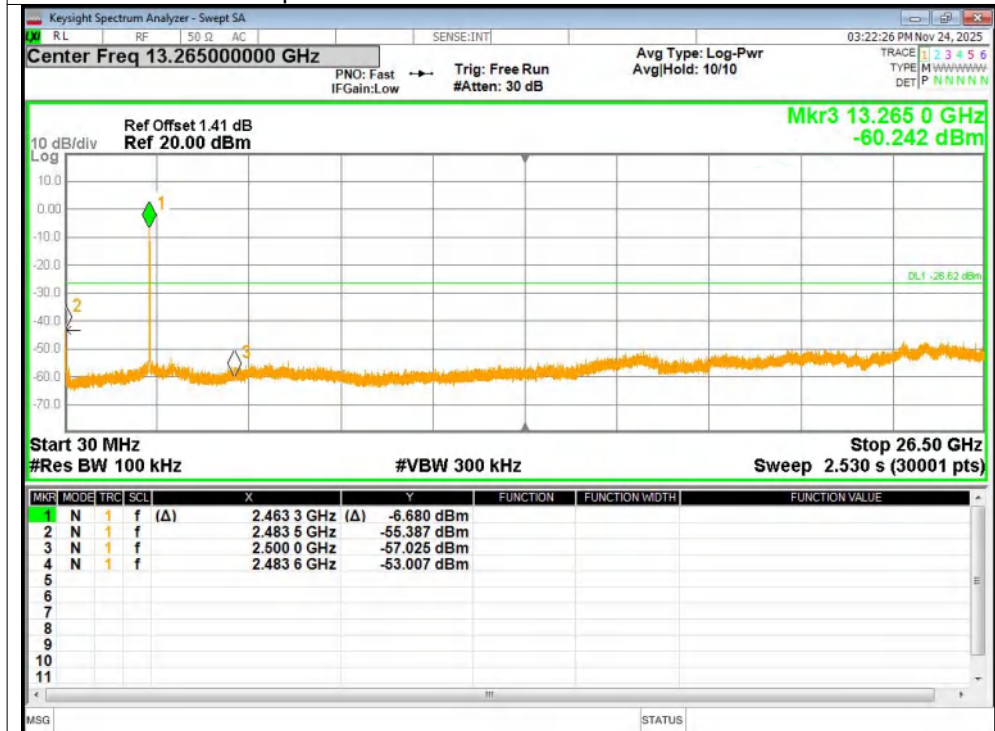

6. Conducted Maximum Output Power

6.1. Test limits

Please refer FCC PART 15.247.

Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1 W(30dBm)

6.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

1. Place the EUT on the table and set it in transmitting mode.
2. Connected the EUT's antenna port to peak power meter by 20dB attenuator.
3. Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

6.3. Test Setup



6.4. Test Results

Modulation	Frequency (MHz)	Detector	Total Power(dBm)	limit(dBm)	Result
802.11b	2412.00	Peak	8.31	30	Pass
802.11b	2437.00	Peak	8.81	30	Pass
802.11b	2462.00	Peak	8.83	30	Pass
802.11g	2412.00	Peak	7.94	30	Pass
802.11g	2437.00	Peak	8.24	30	Pass
802.11g	2462.00	Peak	8.33	30	Pass
802.11n20	2412.00	Peak	7.91	30	Pass
802.11n20	2437.00	Peak	8.96	30	Pass
802.11n20	2462.00	Peak	8.76	30	Pass

7. Peak Power Spectral Density

7.1. Test limits


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

7.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02


1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 30kHz(Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$), VBW = 300kHz(Set the VBW $\geq 3 \times \text{RBW}$), span $\geq 1.5 \times \text{DTS bandwidth}$., detail see the test plot.
4. Record the max reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

7.3. Test Setup

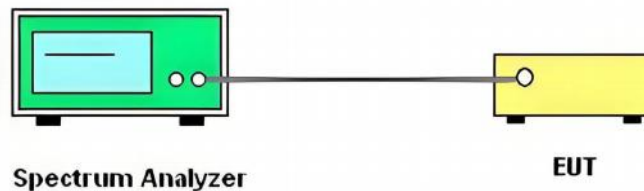



7.4. Test Results


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-14.89	0	-14.89	8	Pass
NVNT	b	2437	Ant1	-14.08	0	-14.08	8	Pass
NVNT	b	2462	Ant1	-14.17	0	-14.17	8	Pass
NVNT	g	2412	Ant1	-18.95	0	-18.95	8	Pass
NVNT	g	2437	Ant1	-18.36	0	-18.36	8	Pass
NVNT	g	2462	Ant1	-18.98	0	-18.98	8	Pass
NVNT	n20	2412	Ant1	-20.49	0	-20.49	8	Pass
NVNT	n20	2437	Ant1	-19.43	0	-19.43	8	Pass
NVNT	n20	2462	Ant1	-19.56	0	-19.56	8	Pass

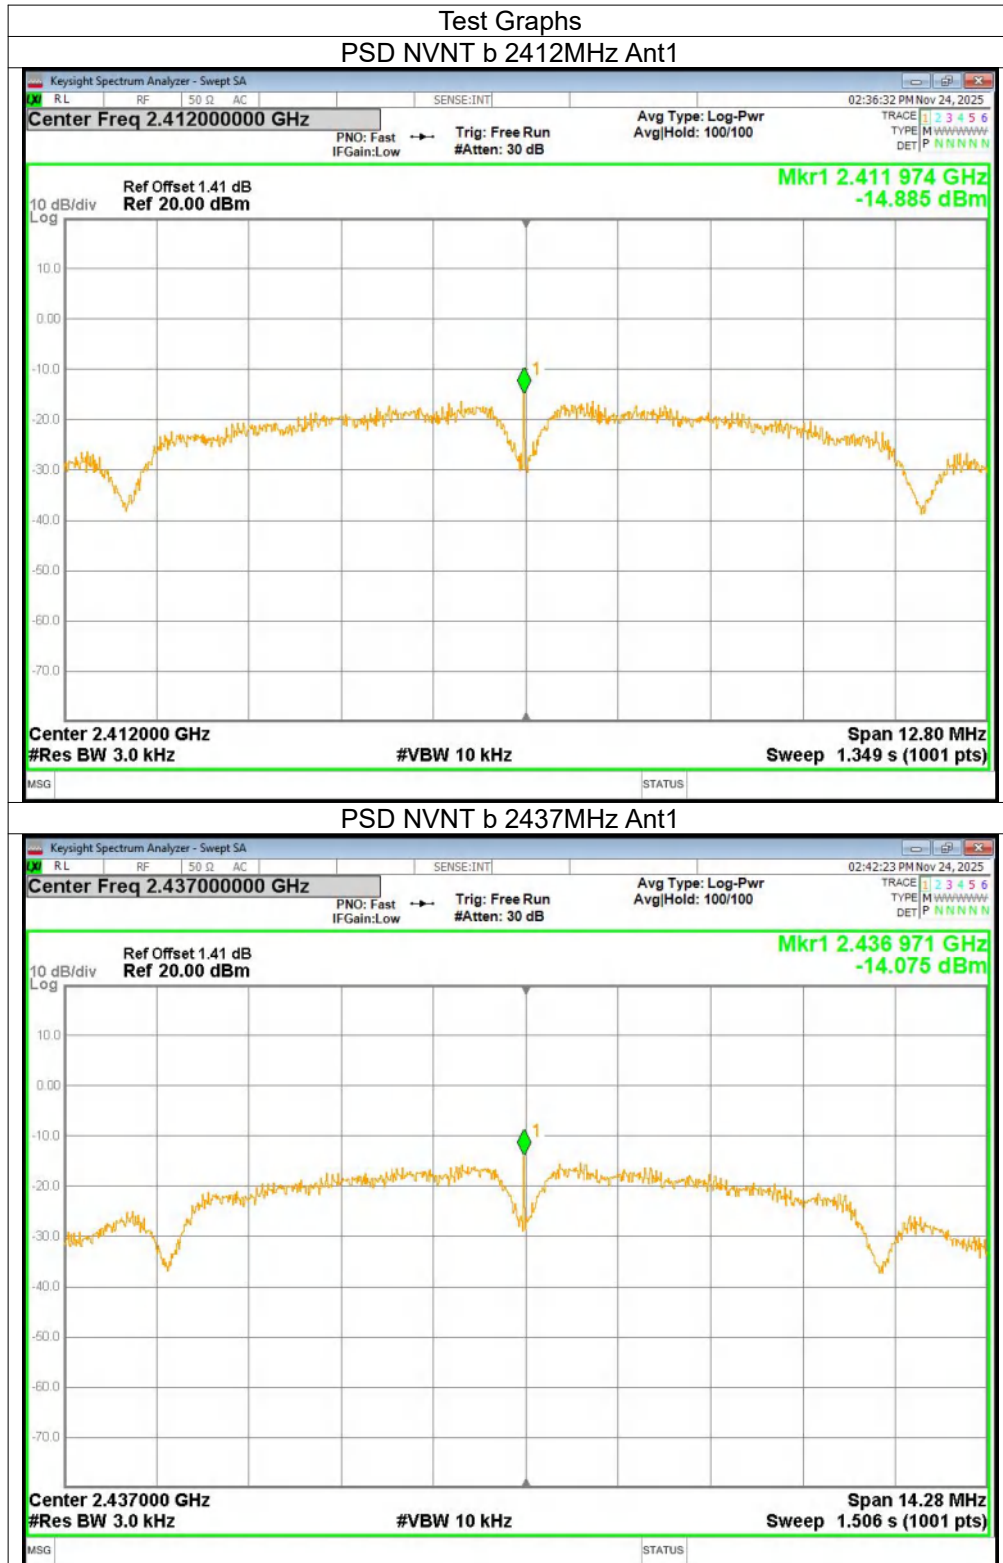



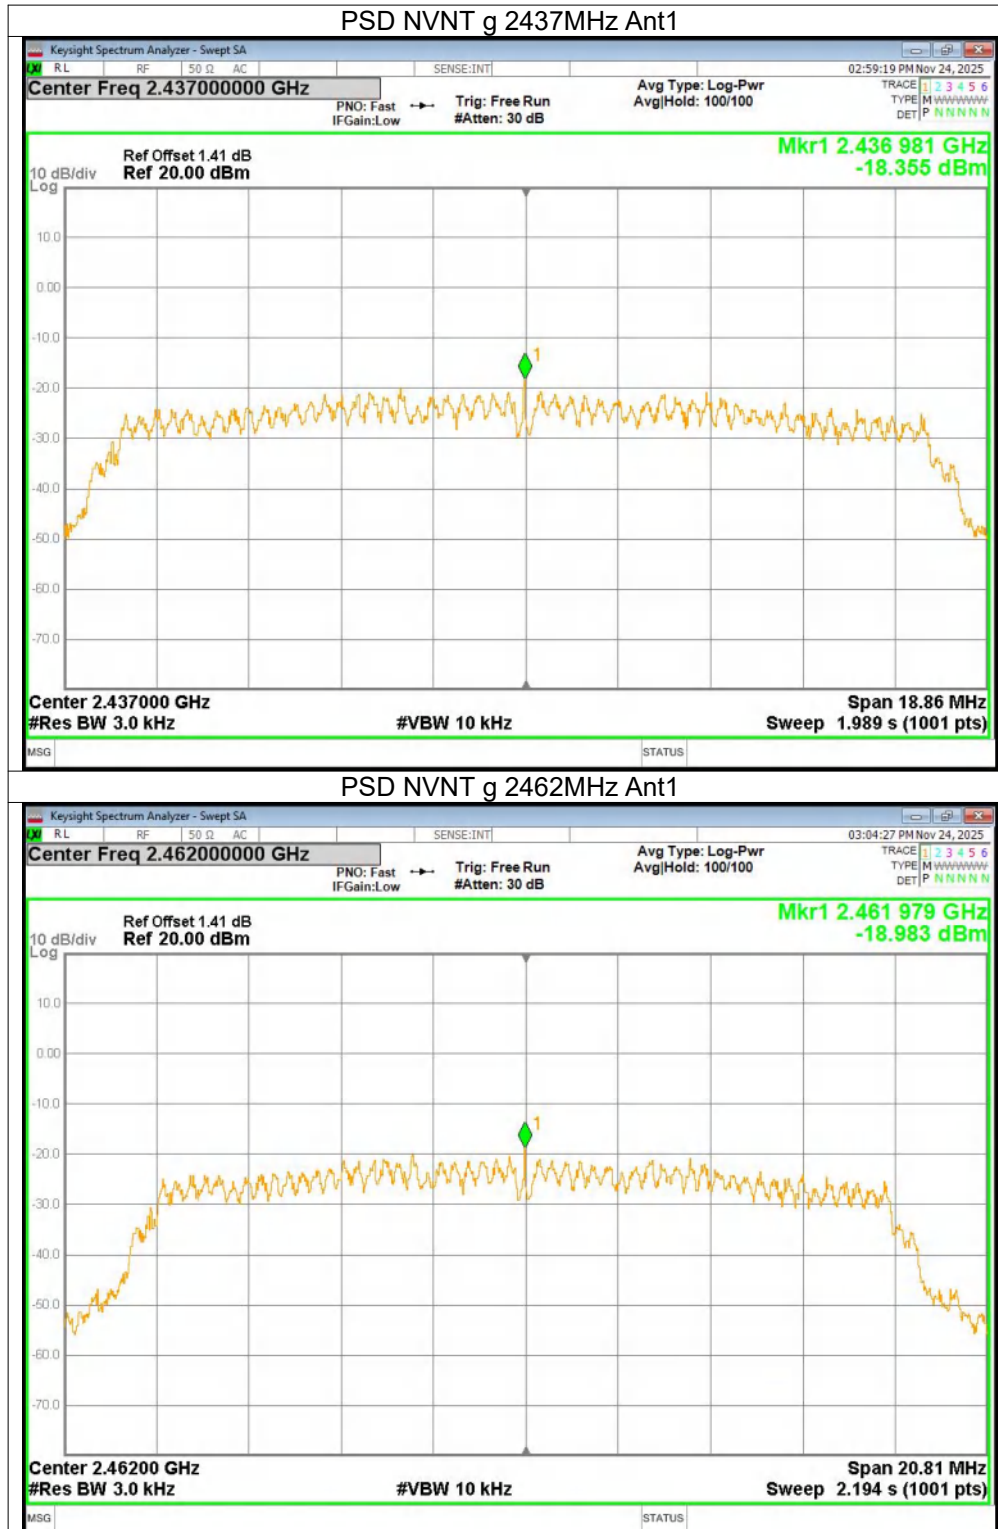

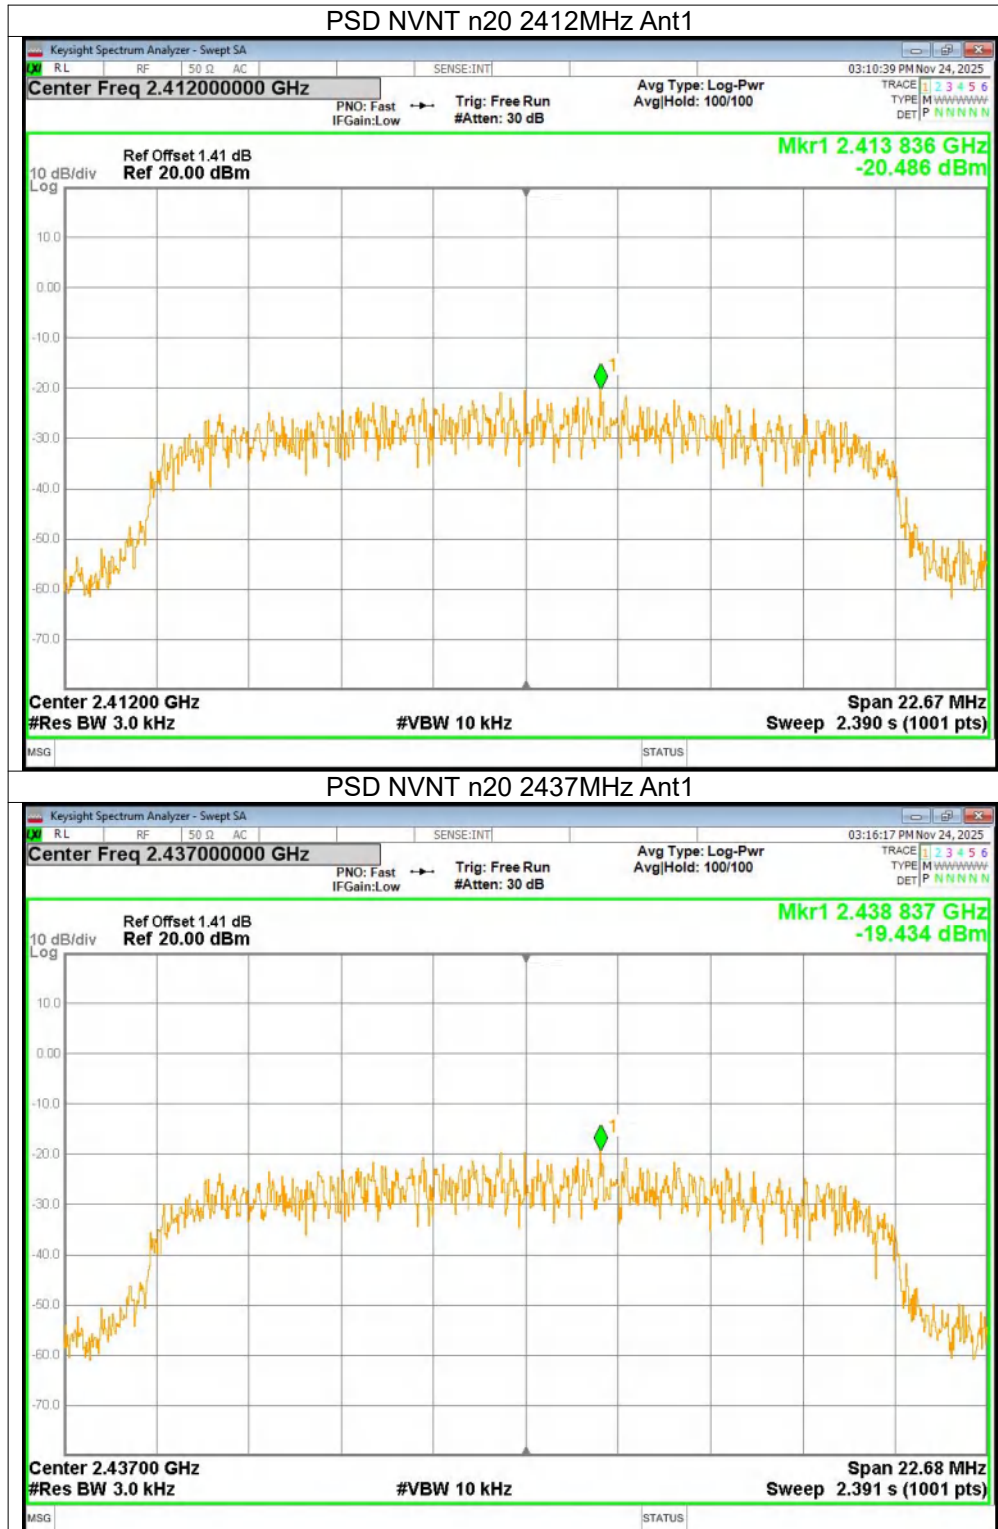

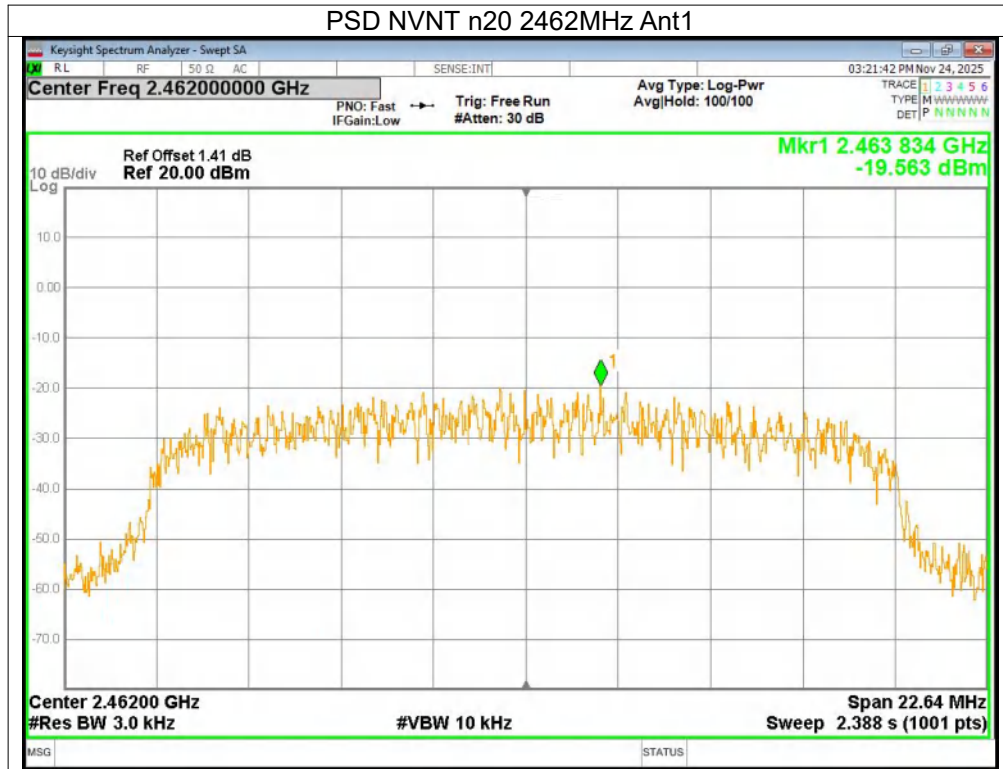

8. Occupied Bandwidth

8.1. Test limits

Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz


8.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

a) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

b) The test receiver set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz, $VBW \geq 3 \times RBW = 620 \text{ kHz}$, Peak Detector, Sweep time set auto, detail see the test plot.



8.3. Test Setup


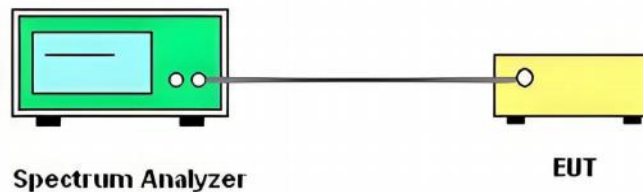




8.4. Test Results


Condition	Antenna	Modulation	Frequency (MHz)	-6dB BW(MHz)	limit(kHz)	Result
NVNT	ANT1	802.11b	2412.00	9.075	500	Pass
NVNT	ANT1	802.11b	2437.00	9.061	500	Pass
NVNT	ANT1	802.11b	2462.00	8.618	500	Pass
NVNT	ANT1	802.11g	2412.00	17.367	500	Pass
NVNT	ANT1	802.11g	2437.00	14.97	500	Pass
NVNT	ANT1	802.11g	2462.00	15.095	500	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	15.506	500	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	15.936	500	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	15.533	500	Pass

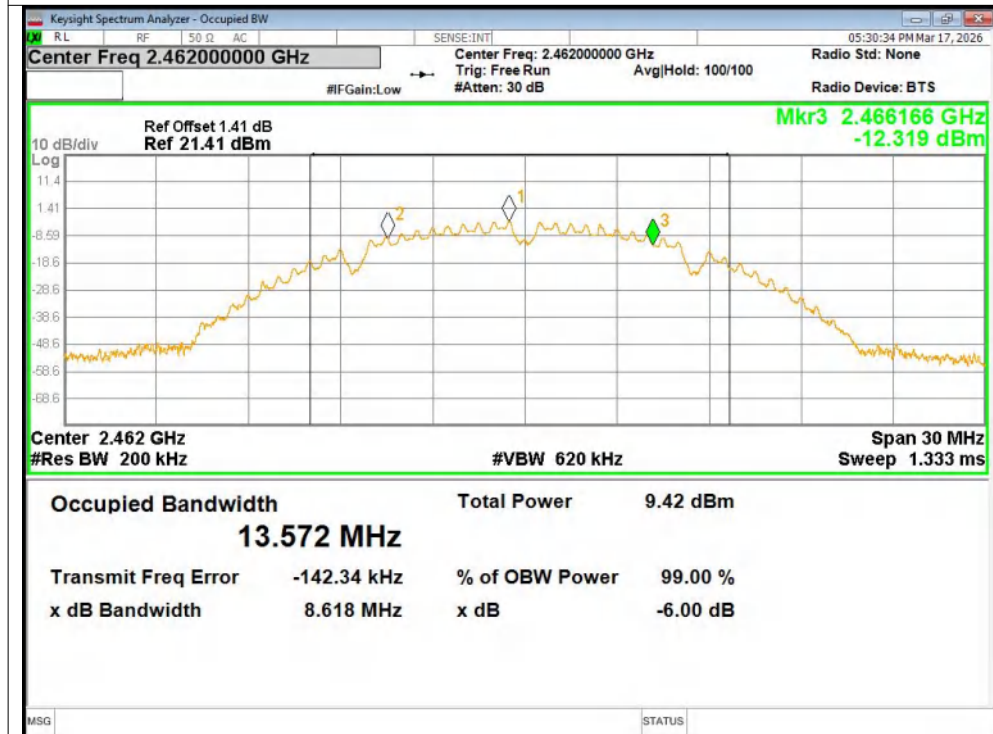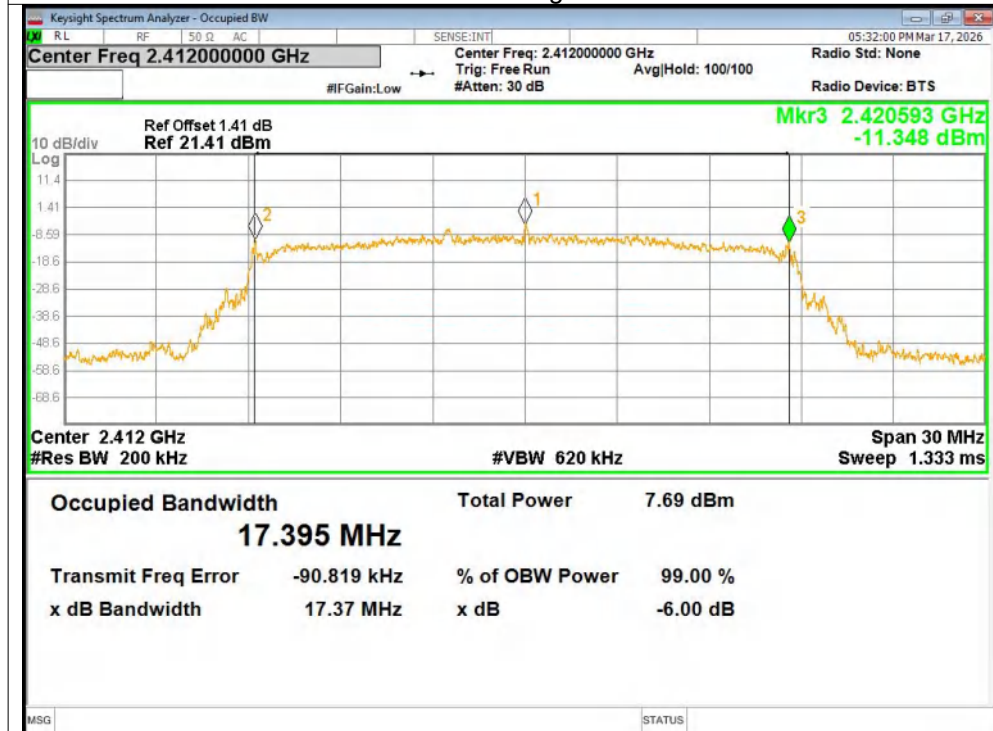


-6dB Bandwidth NVNT b 2462MHz Ant1**-6dB Bandwidth NVNT g 2412MHz Ant1**

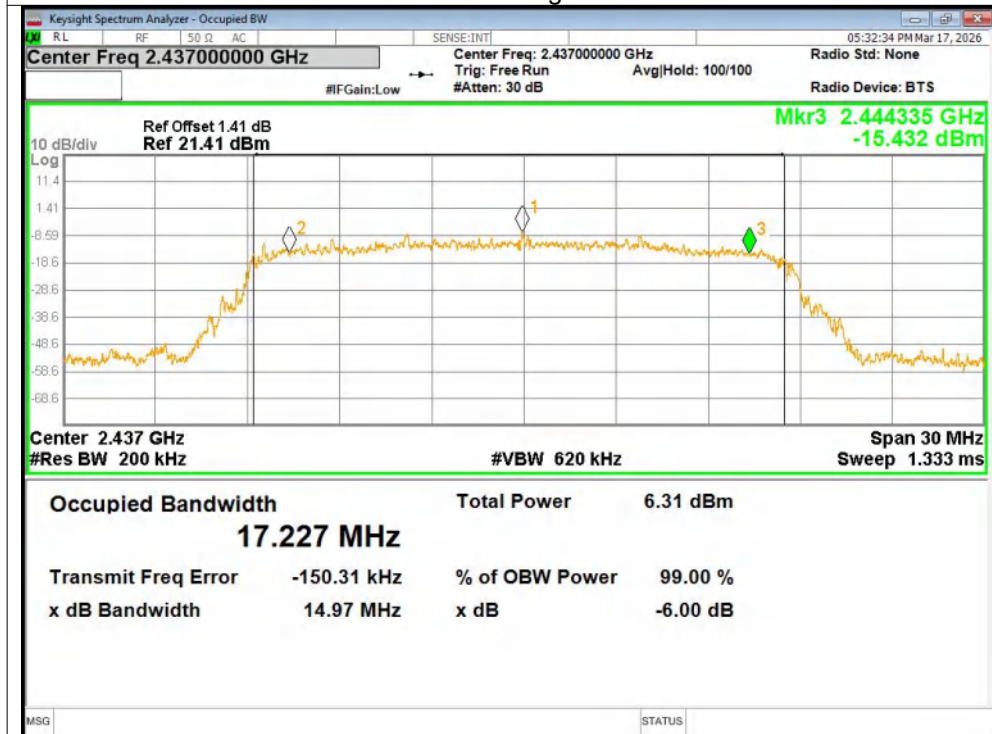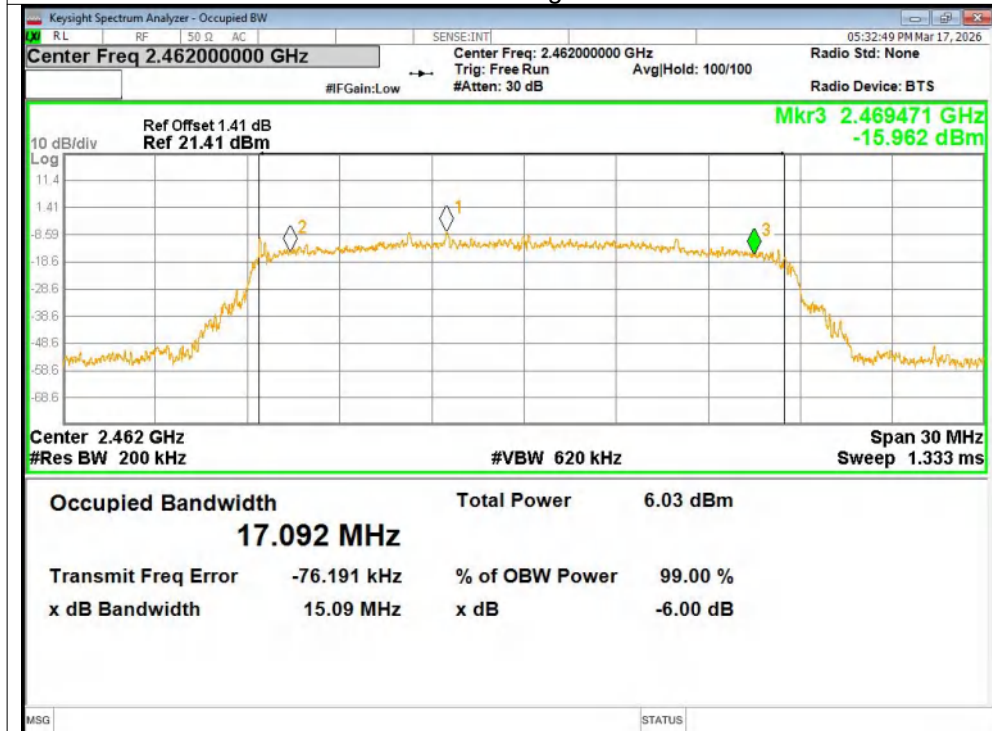-6dB Bandwidth NVNT g 2437MHz Ant1**-6dB Bandwidth NVNT g 2462MHz Ant1**

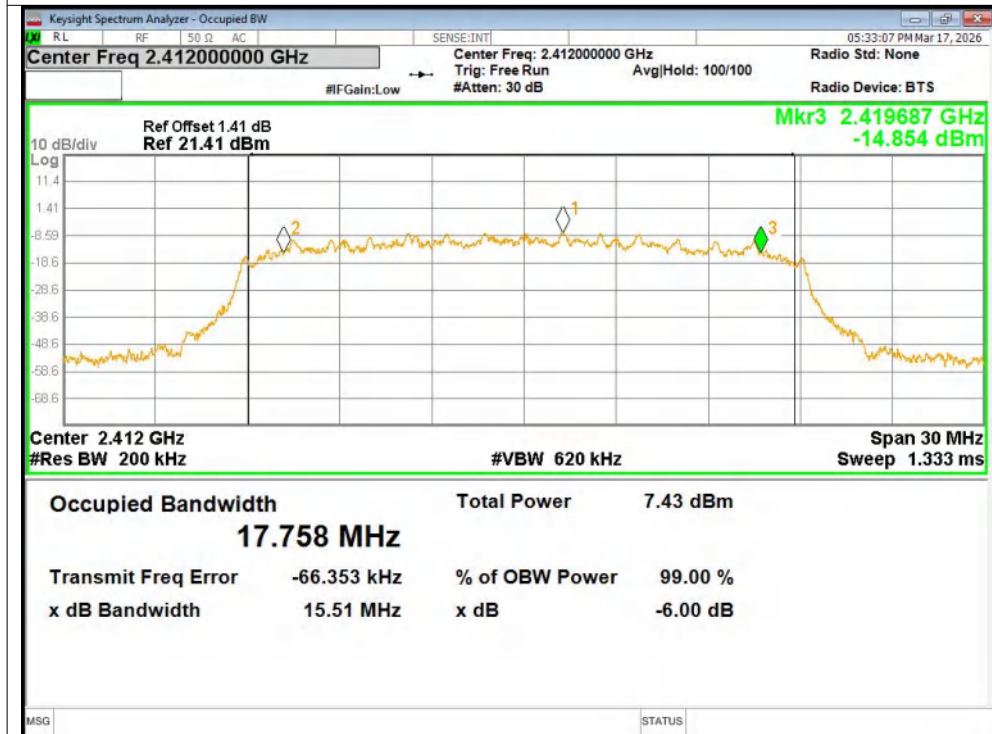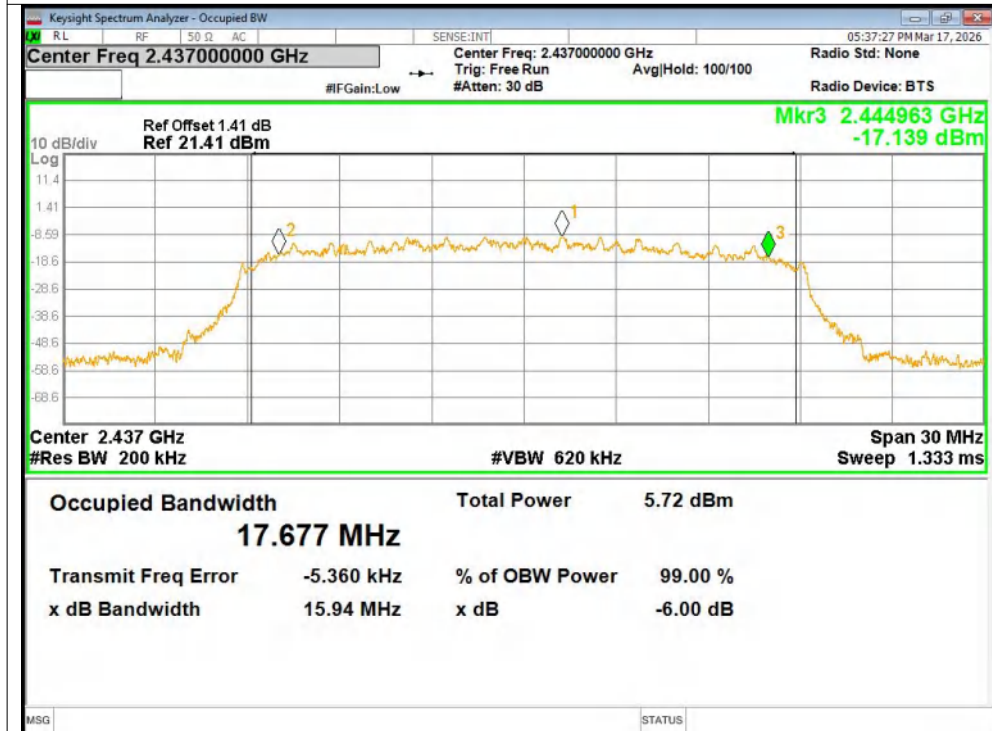
-6dB Bandwidth NVNT n20 2412MHz Ant1**-6dB Bandwidth NVNT n20 2437MHz Ant1**

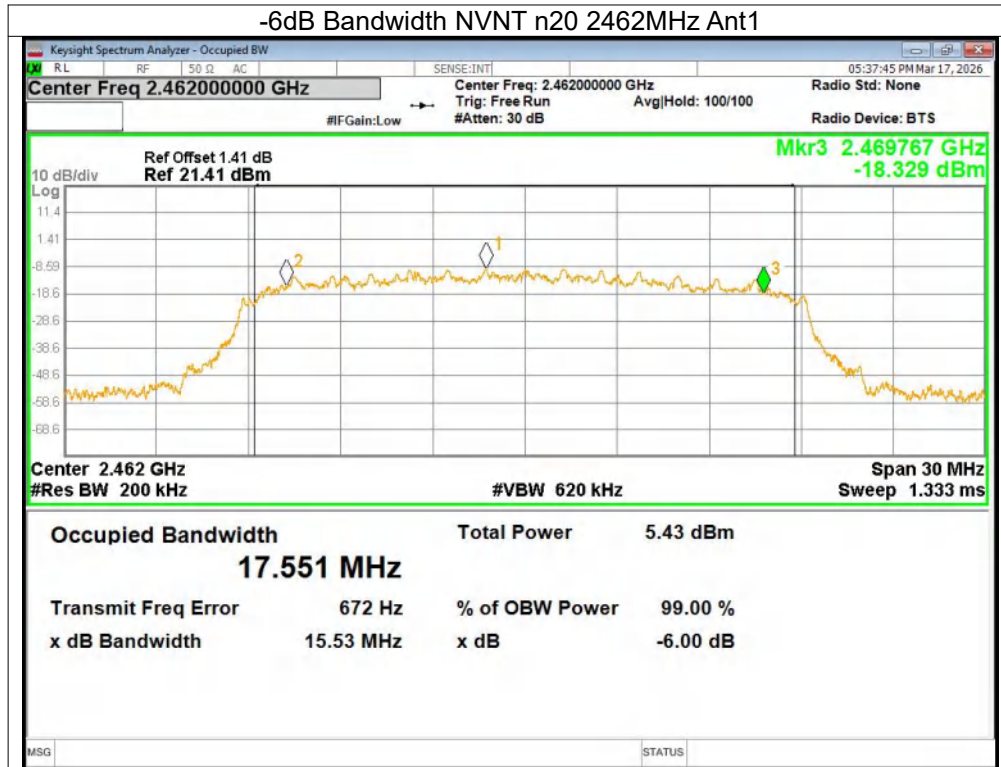


Condition	Antenna	Modulation	Frequency (MHz)	99%%BW(MHz)
NVNT	ANT1	802.11b	2412.00	13.95
NVNT	ANT1	802.11b	2437.00	13.997
NVNT	ANT1	802.11b	2462.00	14.014
NVNT	ANT1	802.11g	2412.00	17.237
NVNT	ANT1	802.11g	2437.00	17.346
NVNT	ANT1	802.11g	2462.00	17.274
NVNT	ANT1	802.11n(HT20)	2412.00	17.762
NVNT	ANT1	802.11n(HT20)	2437.00	17.757
NVNT	ANT1	802.11n(HT20)	2462.00	17.691

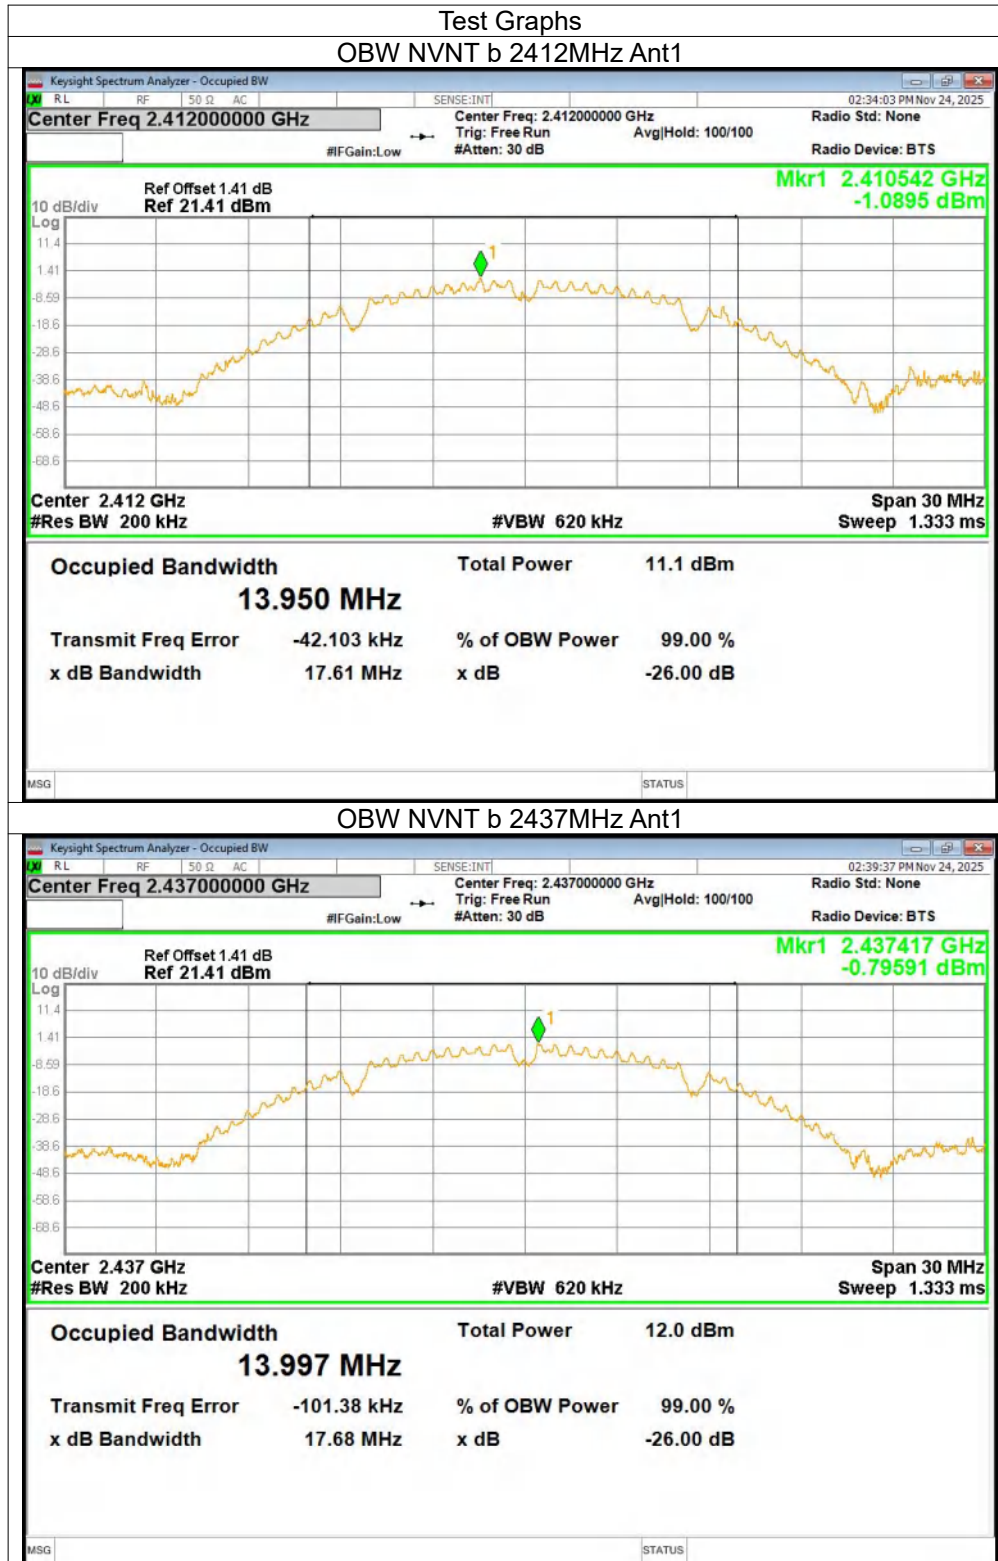


OBW NVNT b 2462MHz Ant1

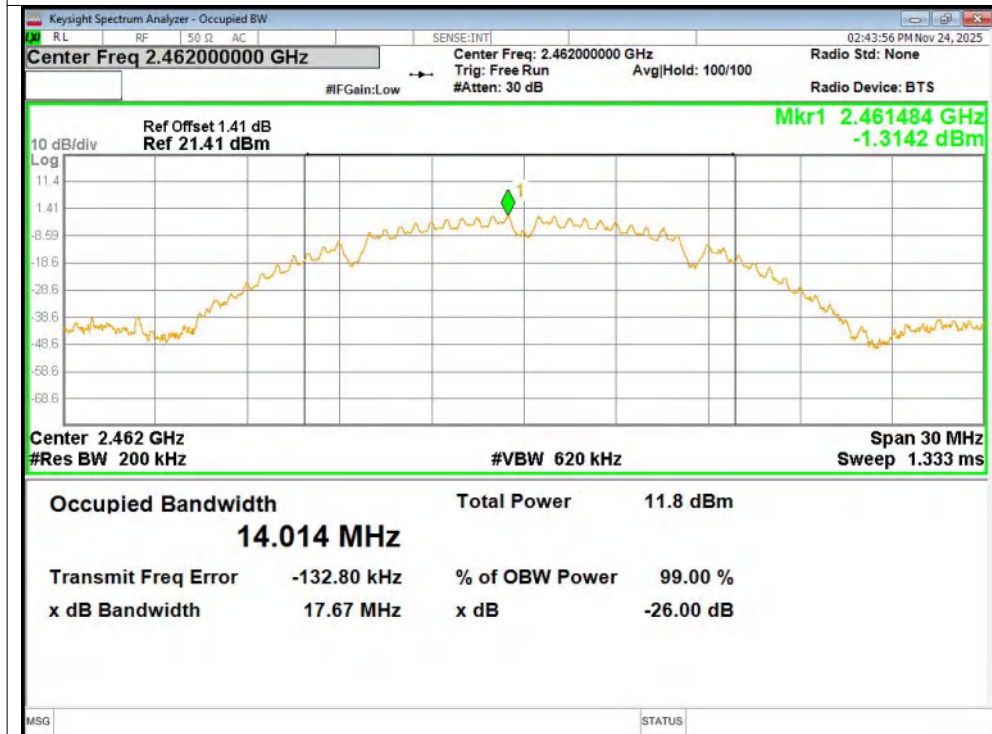


OBW NVNT g 2412MHz Ant1

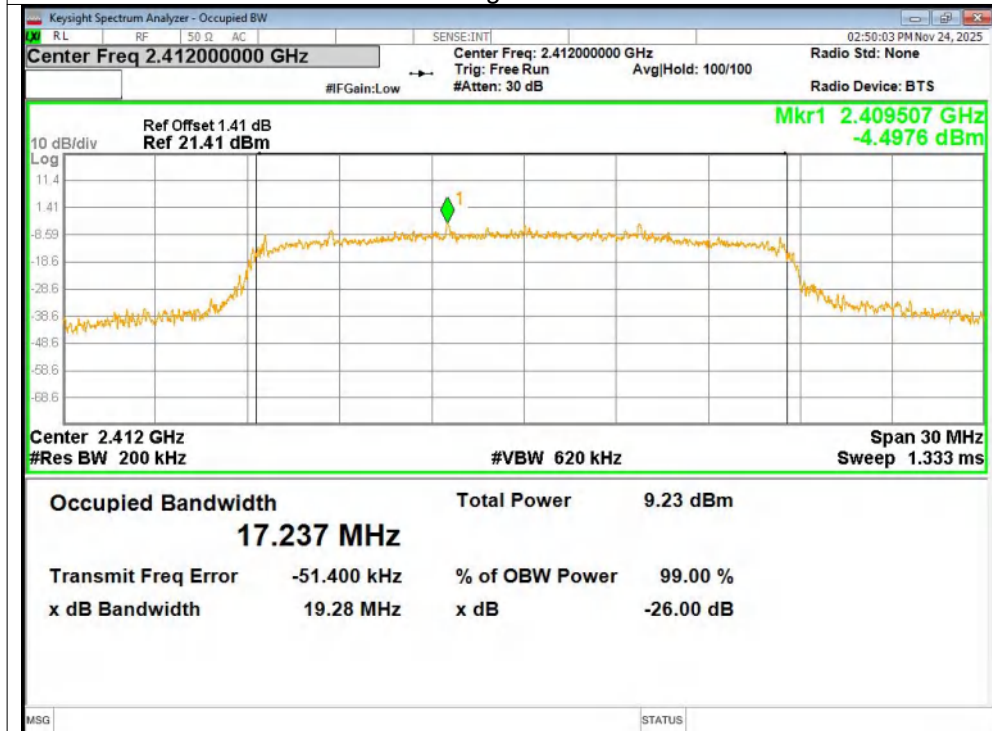


OBW NVNT g 2437MHz Ant1

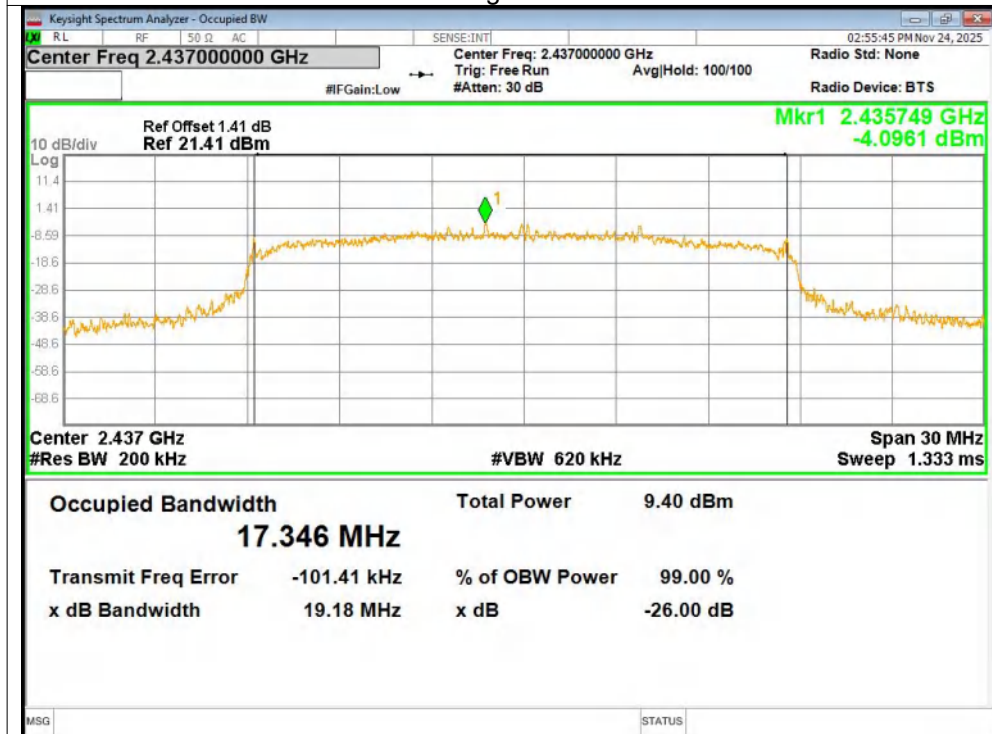


OBW NVNT g 2462MHz Ant1

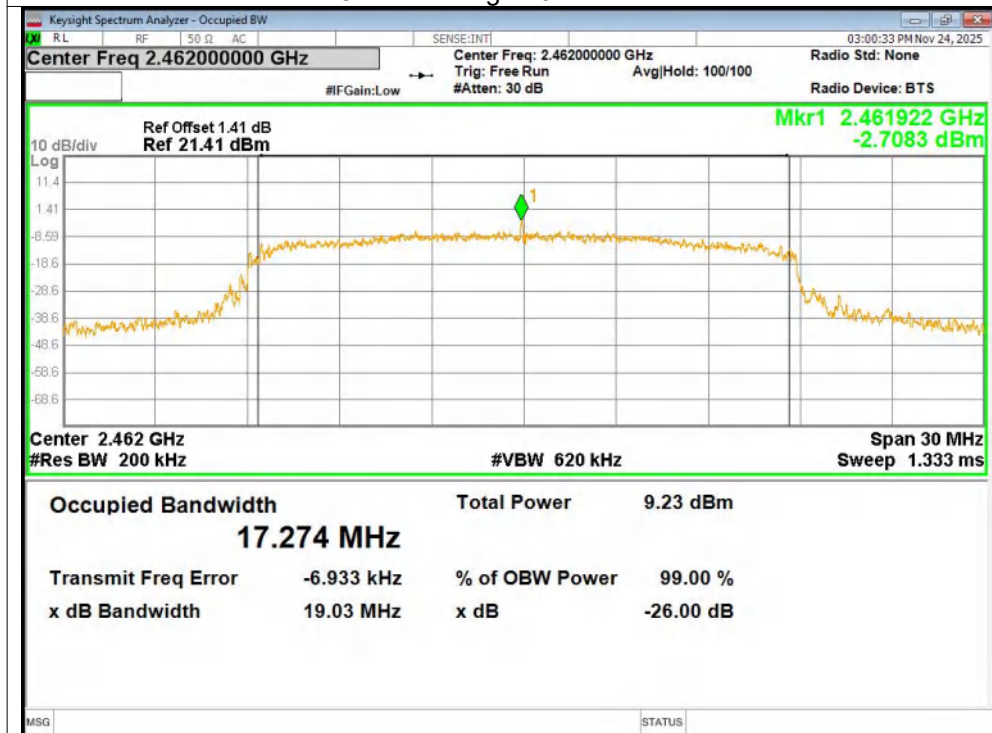


OBW NVNT n20 2412MHz Ant1

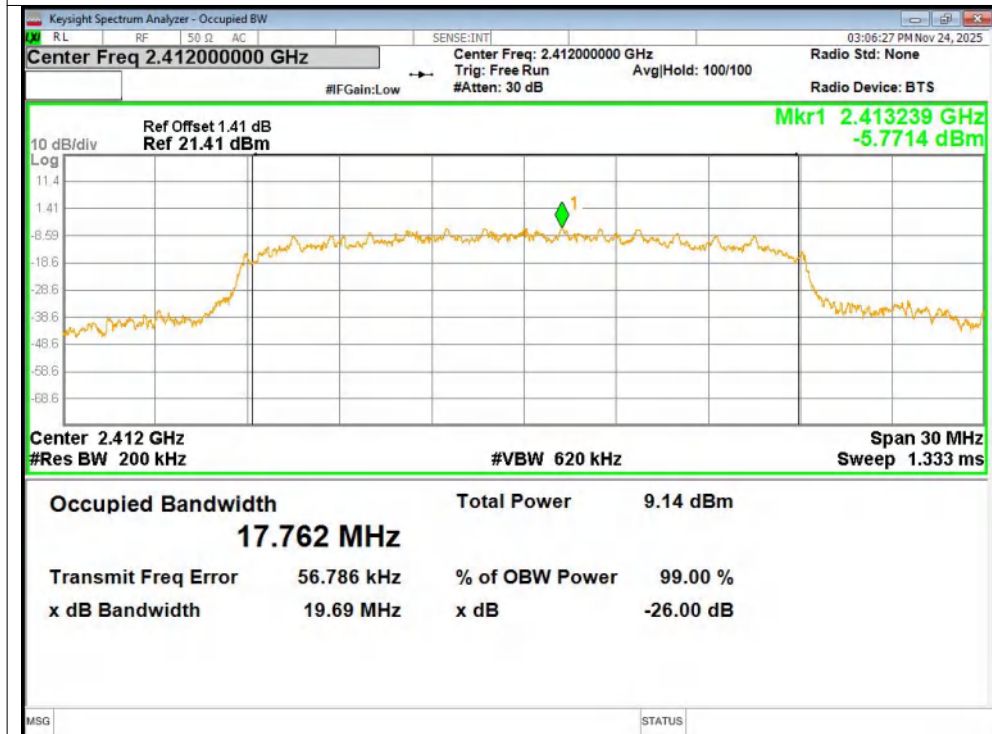

OBW NVNT n20 2437MHz Ant1

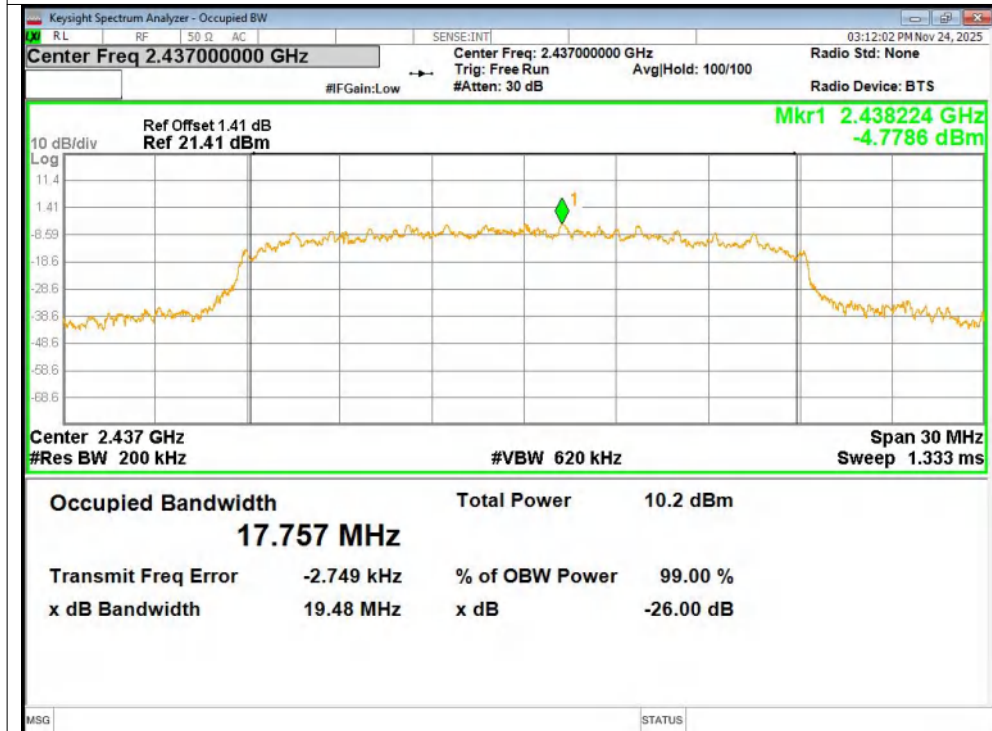

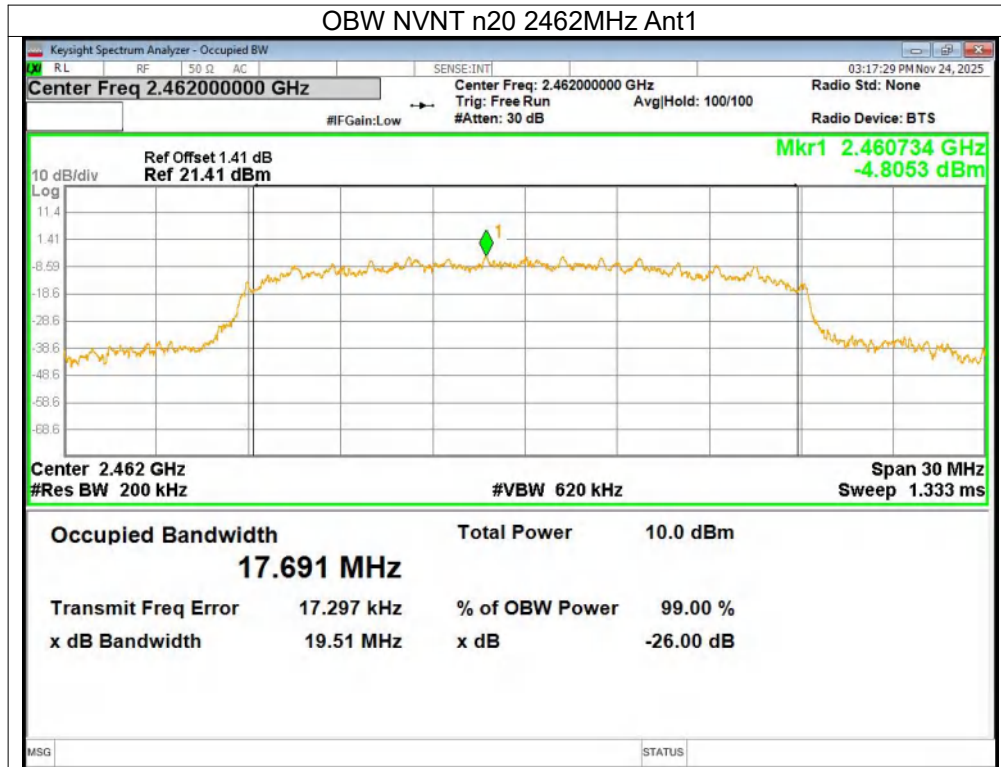

9. Band Edge Test


9.1. Test Limit

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241

9.2. Block Diagram of Test Setup

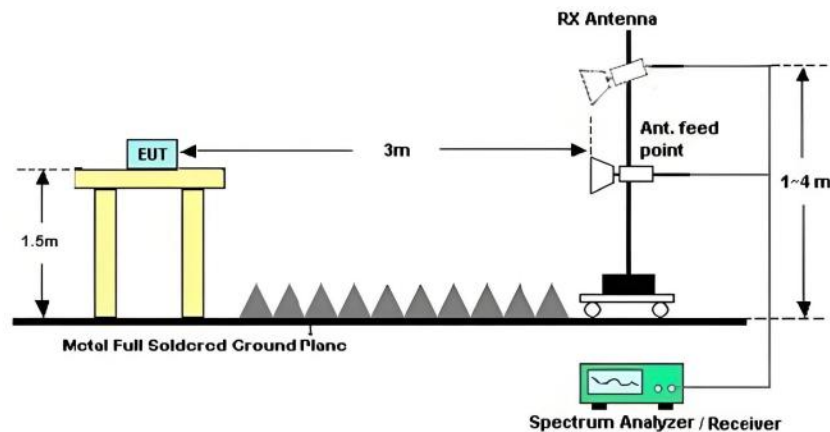

9.3. Test Procedure

ANSI C63.10-2020 section 6.10.5.2

All restriction band and non- restriction band have been tested, only worse case is reported.

Details see the KDB558074 D01 Meas Guidance v05r02

1. Put the EUT on a 1.5m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission
2. Check the spurious emissions out of band.
3. RBW 1MHz, VBW 3MHz, peak detector for peak value, RBW 1MHz, VBW 10Hz, RMS detector for AV value.

9.4. Test Results

Test Date : 2025.11.27						Temperature : 26℃		
Test Engineer : Felix Pang						Humidity : 54%		
Test Results : PASS								
Frequency Range : 2310MHz~2410MHz								
Test Mode : IEEE 802.11b TX 2412MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	62.57	-20.45	42.12	74	-31.88	Peak
2	2390	H	--	-20.45	--	54	-11.88	Avg
3	2400	H	62.37	-20.41	41.96	74	-32.04	Peak
4	2400	H	--	-20.41	--	54	-12.04	Avg
1	2390	V	62.06	-20.45	41.61	74	-32.39	Peak
2	2390	V	--	-20.45	--	54	-12.39	Avg
3	2400	V	62.94	-20.41	42.53	74	-31.47	Peak
4	2400	V	--	-20.41	--	54	-11.47	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : IEEE 802.11b TX 2462MHz								
1	2483.5	H	62.62	-20.15	42.47	74	-31.53	Peak
2	2483.5	H	--	-20.15	--	54	-11.53	Avg
1	2483.5	V	62.65	-20.15	42.5	74	-31.5	Peak
2	2483.5	V	--	-20.15	--	54	-11.5	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Frequency Range : 2310MHz~2410MHz								
Test Mode : IEEE 802.11g TX 2412MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	62.93	-20.45	42.48	74	-31.52	Peak
2	2390	H	--	-20.45	--	54	-11.52	Avg
3	2400	H	62.28	-20.41	41.87	74	-32.13	Peak
4	2400	H	--	-20.41	--	54	-12.13	Avg
1	2390	V	62.23	-20.45	41.78	74	-32.22	Peak
2	2390	V	--	-20.45	--	54	-12.22	Avg
3	2400	V	62.61	-20.41	42.2	74	-31.8	Peak
4	2400	V	--	-20.41	--	54	-11.8	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : IEEE 802.11g TX 2462MHz								
1	2483.5	H	62.76	-20.15	42.61	74	-31.39	Peak
2	2483.5	H	--	-20.15	--	54	-11.39	Avg
1	2483.5	V	62.74	-20.15	42.59	74	-31.41	Peak
2	2483.5	V	--	-20.15	--	54	-11.41	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Frequency Range : 2310MHz~2410MHz								
Test Mode : IEEE 802.11n/HT20 TX 2412MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	62.45	-20.45	42	74	-32	Peak
2	2390	H	--	-20.45	--	54	-12	Avg
3	2400	H	62.53	-20.41	42.12	74	-31.88	Peak
4	2400	H	--	-20.41	--	54	-11.88	Avg
1	2390	V	62.85	-20.45	42.4	74	-31.6	Peak
2	2390	V	--	-20.45	--	54	-11.6	Avg
3	2400	V	62.92	-20.41	42.51	74	-31.49	Peak
4	2400	V	--	-20.41	--	54	-11.49	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : IEEE 802.11n/HT20 TX 2462MHz								
1	2483.5	H	62.2	-20.15	42.05	74	-31.95	Peak
2	2483.5	H	--	-20.15	--	54	-11.95	Avg
1	2483.5	V	62.12	-20.15	41.97	74	-32.03	Peak
2	2483.5	V	--	-20.15	--	54	-12.03	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Frequency Range : 2310MHz~2410MHz								
Test Mode : IEEE 802.11n/HT40 TX 2422MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	62.12	-20.45	41.67	74	-32.33	Peak
2	2390	H	--	-20.45	--	54	-12.33	Avg
3	2400	H	62.81	-20.41	42.4	74	-31.6	Peak
4	2400	H	--	-20.41	--	54	-11.6	Avg
1	2390	V	62.18	-20.45	41.73	74	-32.27	Peak
2	2390	V	--	-20.45	--	54	-12.27	Avg
3	2400	V	62.21	-20.41	41.8	74	-32.2	Peak
4	2400	V	--	-20.41	--	54	-12.2	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : IEEE 802.11n/HT40 TX 2452MHz								
1	2483.5	H	62.19	-20.15	42.04	74	-31.96	Peak
2	2483.5	H	--	-20.15	--	54	-11.96	Avg
1	2483.5	V	62.07	-20.15	41.92	74	-32.08	Peak
2	2483.5	V	--	-20.15	--	54	-12.08	Avg
Note:	1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.							

10. Antenna Requirement

10.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

10.2. Test Results

The EUT antenna is PCB antenna. It complies with the standard requirement.

11. Photos of test setup

Reference to the **appendix I Test Setup Photo** for details.

12. Photos of EUT

Reference to the **appendix II external photos** and **appendix III internal photos** for details.

----- END OF REPORT-----