FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n

MODEL NUMBER: SM-G313MY

FCC ID: A3LSMG313MY

REPORT NUMBER: 14I18409-E1

ISSUE DATE: August 5, 2014

Prepared for

SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

Prepared by

UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	07/28/14	Initial issue	P. Zhang
A	8/5/14	Updated statement	P. Zhang

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 5
2. TEST METHODOLOGY 6
3. FACILITIES AND ACCREDITATION 6
4. CALIBRATION AND UNCERTAINTY 6
4.1. MEASURING INSTRUMENT CALIBRATION 6
4.2. SAMPLE CALCULATION 6
4.3. MEASUREMENT UNCERTAINTY 7
5. EQUIPMENT UNDER TEST 8
5.1. DESCRIPTION OF EUT 8
5.2. MAXIMUM OUTPUT POWER 8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS 9
5.4. DESCRIPTION OF TEST SETUP 10
6. TEST AND MEASUREMENT EQUIPMENT 13
7. Summary Table 14
8. RF POWER OUTPUT VERIFICATION 15
8.1. GSM/GPRS/EDGE 15
8.1.1. GSM OUTPUT POWER RESULT 16
8.2. UMTS REL 99 17
8.2.1. UMTS REL 99 OUTPUT POWER RESULT 17
8.3. UMTS HSDPA 18
8.3.1. UMTS HSDPA OUTPUT POWER RESULT 18
8.3.2. UMTS HSUPA 19
8.3.3. UMTS HSUPA OUTPUT POWER RESULT 20
9. PEAK TO AVERAGE RATIO 21
9.1. CONDUCTED PEAK TO AVERAGE RESULT 21
10. LIMITS AND CONDUCTED RESULTS 22
10.1. OCCUPIED BANDWIDTH 22
10.1.1. OCCUPIED BANDWIDTH RESULTS 23
10.1.1. OCCUPIED BANDWIDTH PLOTS 24
10.2. BAND EDGE EMISSIONS 26

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.2.1. BAND EDGE PLOTS 27
10.3. OUT OF BAND EMISSIONS 29
10.3.1. OUT OF BAND EMISSIONS RESULT 30
10.3.2. OUT OF BAND EMISSIONS PLOTS.....31
10.4. FREQUENCY STABILITY 33
10.4.1. FREQUENCY STABILITY RESULTS.....34
11. RADIATED TEST RESULTS 36
11.1. RADIATED POWER (ERP & EIRP).....36
11.1.1. ERP/EIRP Results.....36
11.1.2. ERP/EIRP DATA.....38
11.2. FIELD STRENGTH OF SPURIOUS RADIATION 42
11.2.1. SPURIOUS RADIATION DATA.....43
12. SETUP PHOTOS 47

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1. ATTESTATION OF TEST RESULTS

COMPANY NAME:	**SAMSUNG ELECTRONICS CO., LTD.**
EUT DESCRIPTION:	**GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n**
MODEL:	**SM-G313MY**
Serial Number:	**FL-206-A, FL-206-B, FL-206-C (Radiated)**
DATE TESTED:	**MAY 28 - JUNE 13, 2014**

APPLICABLE STANDARDS	
STANDARD	**TEST RESULTS**
FCC PART 22H AND 24E	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

PENG ZHANG

CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

Tested By:

CHARLES VERGONIO

CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A	☒ Chamber D
☐ Chamber B	☐ Chamber E
☒ Chamber C	☐ Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at http://ts.nist.gov/standards/scopes/2000650.htm.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

EIRP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(between the SG and substitution antenna) + Substitution Antenna Factor (dBi)

ERP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(between the SG and substitution antenna)

(Path loss = Signal generator output – PSA reading with substitution antenna)

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n bar phone.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/2 4/27						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			Peak(dBm)	Peak (mW)	Peak (dBm)	Peak (mW)
GSM850	824~849	GMSK	32.7	1862.08		
	824~849	GPRS	32.7	1862.08	31.58	1439
GSM1900	1850~1910	GMSK	29.8	955.00		
	1850~1910	GPRS	29.8	955.00	29.98	995.40

FCC Part 22/2 4/27						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
Band 2	1850~1910	REL99	22.5	177.82	22.27	168.65
	1850~1910	HSDPA	22.3	169.82	21.86	153.46
	1850~1910	HSUPA	22.3	169.82		

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
Band 5, 824~849MHz	-1.38
Band 2, 1850~1910MHz	-0.47

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	SM-G313M	N/A	N/A
Earphone	Samsung	SM-G313M	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA

I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes

TEST SETUP

The EUT is continuously communicated to the call box during the tests.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

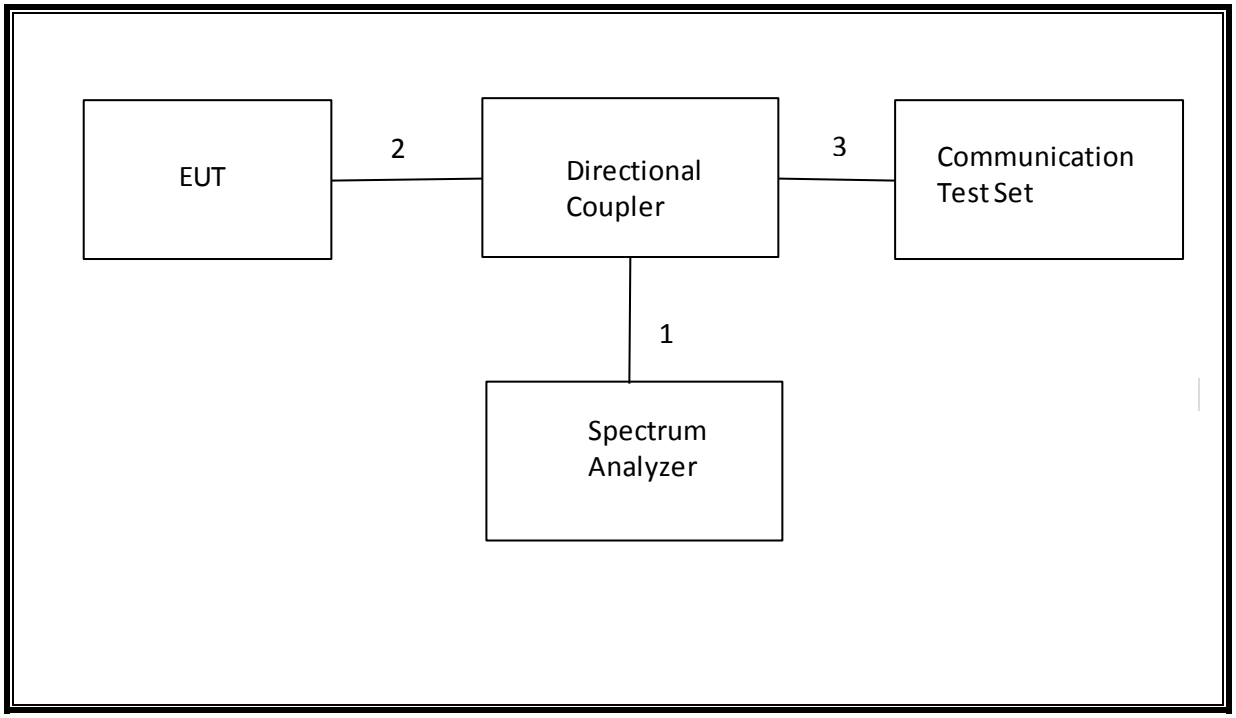

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

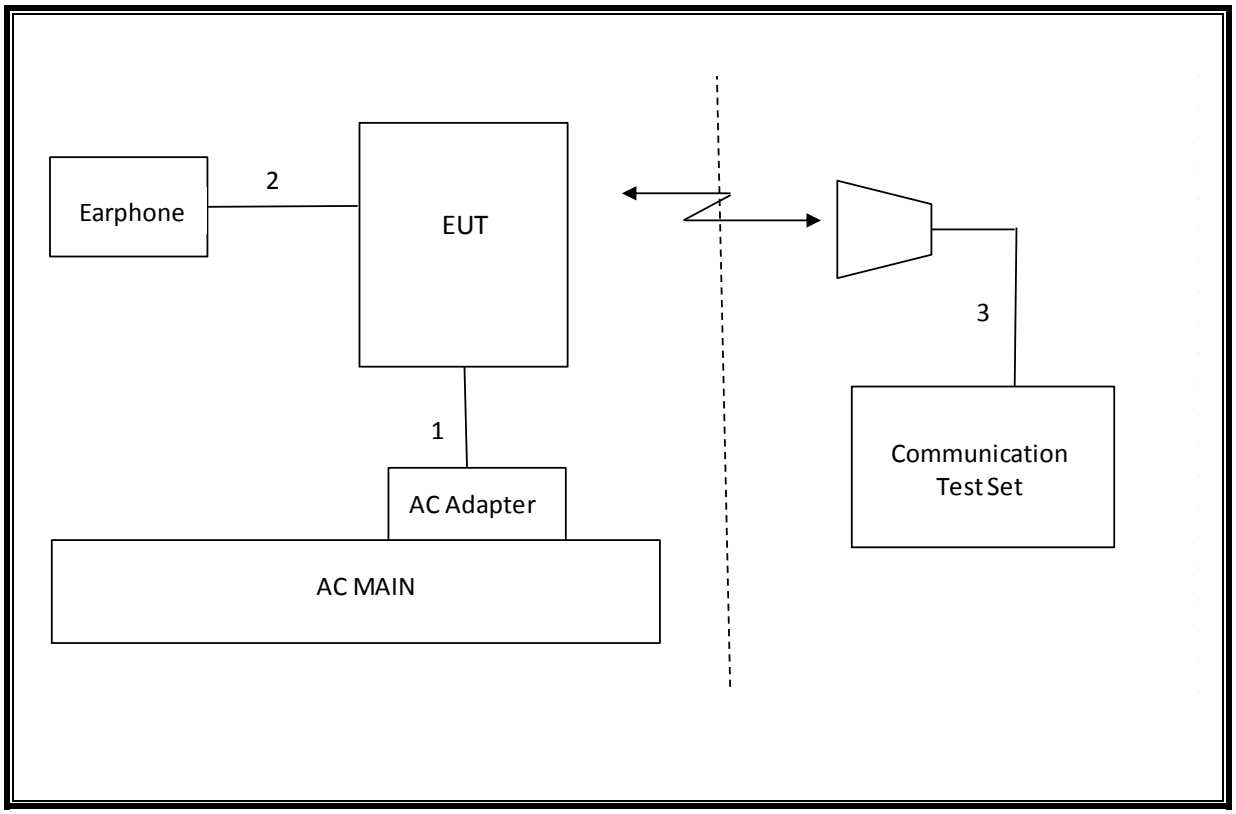

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	**Manufacturer**	**Model**	**Asset**	**Cal Due**
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	08/14/14
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 18 GHz	EMCO	3115	C00784	09/25/14
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/15
Communications Test Set	R&S	CMW500	T159	07/02/14
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/14
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	C00993	02/14/15
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 18-26 GHz	ARA	MWH	C00946	11/12/14

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7. Summary Table

The model FCC ID: A3LSMG313MY shares the same enclosure and circuit board as mode FCC ID: A3LSMG313M. The WWAN/WLAN/Bluetooth circuitry and layout, including antenna, are almost identical between the two units. The WWAN/WLAN/Bluetooth antenna and surrounding circuitry is the same between these two units.

After confirming through preliminary radiated emissions that the performance of the A3LSMG313M WWAN remains representative of this model (FCC ID: A3LSMG313MY) test data for FCC ID: A3LSMG313M is being submitted for this application.

Radiated emissions were fully re-evaluated against FCC Part 15B requirements for digital devices and results indicated no significant differences between the two versions. Other differences between the two FCC IDs are in the WCDMA 1, 2, 5 changed to WCDMA 1, 2, 8 by changing W5 DPX to W8 DPX.

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Note
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	4.164 MHz
22.917(a) 24.238(a) 27.53(g) 90.691	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-18.86 dBm
2.1046	N/A	Conducted output power	N/A		Pass	32.7 dBm
22.355 24.235 27.54 90.213	RSS-132(4.3) RSS-133(6.3) RSS-139(6.3) RSS-199(4.3)	Frequency Stability	2.5PPM		Pass	0.059PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	31.58 dBm
24.232(c) 27.50(h)(2)	RSS-133(6.4) RSS-199(4.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	29.98 dbm
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-29.6 dBm

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press Connection control to choose the different menus

Press RESET > choose all to reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM+GPRS or GSM+EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850/900

> 30 dBm for GPRS1800/1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0> 4 dB

Slot Config > Unchanged (if already set under MS Signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3 (Default)

Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)

Bit Stream > 2E9-1PSR Bit Pattern

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal On to turn on the signal and change settings

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.1.1. GSM OUTPUT POWER RESULT

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)
GSM (Voice)	CS1	1	512	1850.2	29.7
			661	1880.0	29.8
			810	1909.8	28.8
GPRS (GMSK)	CS1	1	512	1850.2	29.7
			661	1880.0	29.8
			810	1909.8	29.8
		2	512	1850.2	26.7
			661	1880.0	26.9
			810	1909.8	27.0
		3	512	1850.2	25.7
			661	1880.0	25.9
			810	1909.8	26.1
		4	512	1850.2	23.7
			661	1880.0	23.9
			810	1909.8	24.1

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)
GSM (Voice)	CS1	1	128	824.2	32.7
			190	836.6	32.7
			251	848.8	32.6
GPRS (GMSK)	CS1	1	128	824.2	32.7
			190	836.6	32.7
			251	848.8	32.6
		2	128	824.2	29.6
			190	836.6	29.5
			251	848.8	29.4
		3	128	824.2	28.6
			190	836.6	28.5
			251	848.8	28.4
		4	128	824.2	26.5
			190	836.6	26.5
			251	848.8	26.4

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2. UMTS REL 99

TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	βc	Not Applicable
	βd	Not Applicable
	βec	Not Applicable
	βc/βd	8/15
	βhs	Not Applicable
	βed	Not Applicable

8.2.1. UMTS REL 99 OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	Conducted Power (dBm) Avg (dBm)
Band 2	REL99	9262	1852.4	22.5
		9400	1880	22.5
		9538	1907.6	22.5

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	βc	2/15	12/15	15/15	15/15
	βd	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	βc/βd	2/15	12/15	15/8	15/4
	βhs	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	Ahs =βhs/βc	30/15			

8.3.1. UMTS HSDPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm) Avg (dBm)
Band 2	HSDPA	1	9262	1852.4	22.3
			9400	1880	22.0
			9538	1907.6	21.9
		2	9262	1852.4	22.0
			9400	1880	21.8
			9538	1907.6	21.7
		3	9262	1852.4	21.8
			9400	1880	21.6
			9538	1907.6	21.5
		4	9262	1852.4	21.9
			9400	1880	21.6
			9538	1907.6	21.5

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.2. UMTS HSUPA

TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCH (dB)	-9				
	HS-SCCH_1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
	Bec	209/225	12/15	30/15	2/15	5/15
	βc/βd	11/15	6/15	15/9	2/15	15/15
	Bhs	22/15	12/15	30/15	4/15	30/15
	βed (note1)	1309/225	94/75	47/15 47/15	56/75	134/15
	MPR	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = βhs/βc	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	

Note1: βed cannot be set directly, it is set by Absolute Grant Value.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.3. UMTS HSUPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm) Avg (dBm)
Band 2	HSUPA	1	9262	1852.4	20.9
			9400	1880	20.5
			9538	1907.6	20.7
		2	9262	1852.4	22.0
			9400	1880	22.0
			9538	1907.6	22.0
		3	9262	1852.4	20.9
			9400	1880	20.9
			9538	1907.6	20.9
		4	9262	1852.4	20.5
			9400	1880	20.5
			9538	1907.6	20.9
		5	9262	1852.4	22.3
			9400	1880	22.3
			9538	1907.6	22.0

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT

Band		
Band 2 HSDPA	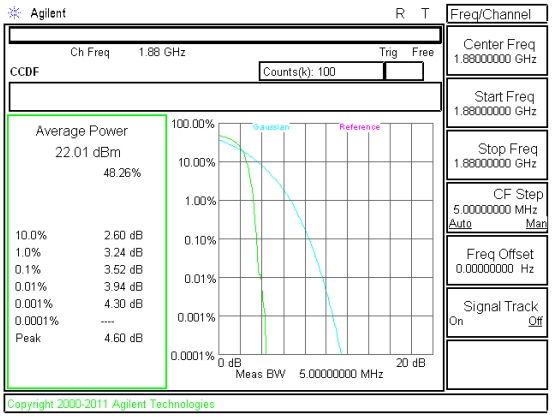 Band WCDMA B2 HSDPA	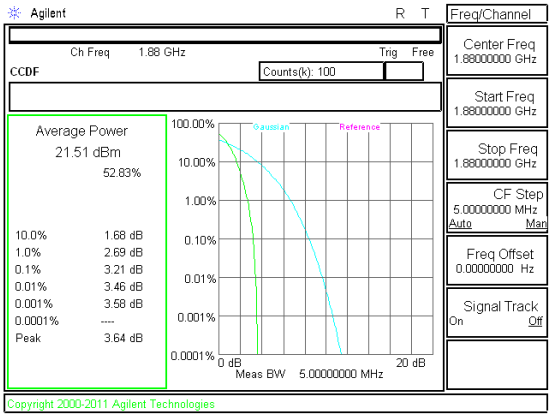 Band WCDMA B2 REL99

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

IC: RSS-132, 4.5; RSS-133, 6.5

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r01 - 06/07/2013)

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.1.1. OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
GSM850	GPRS	128	824.2	250.13	331.381
		190	836.6	249.74	328.79
		251	848.8	245.45	327.53
GSM1900	GPRS	512	1850.2	246.54	325.28
		661	1880	249.73	329.69
		810	1909.8	248.87	330.23
Band 2	REL99	9262	1852.4	4160	4708
		9400	1880	4148	4717
		9538	1907.6	4140	4707
	HSDPA	9262	1852.4	4135	4666
		9400	1880	4153	4713
		9538	1907.6	4155	4700

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.1.1. OCCUPIED BANDWIDTH PLOTS

Band		
Band 2 HSDPA	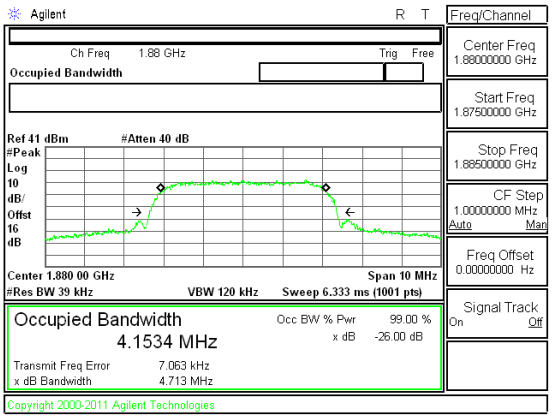 Band WCDMA B2 HSDPA OBW	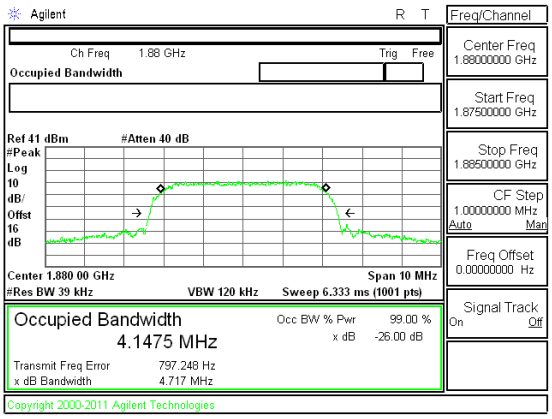 Band WCDMA B2 REL99 OBW

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band GSM1900 GPRS	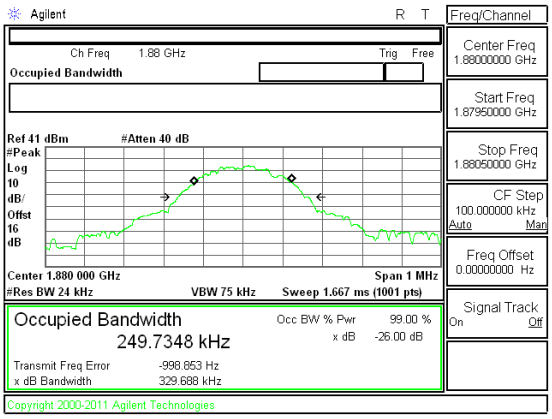 Band GSM1900 GPRS OBW Mid channel	
Band GSM850 GPRS	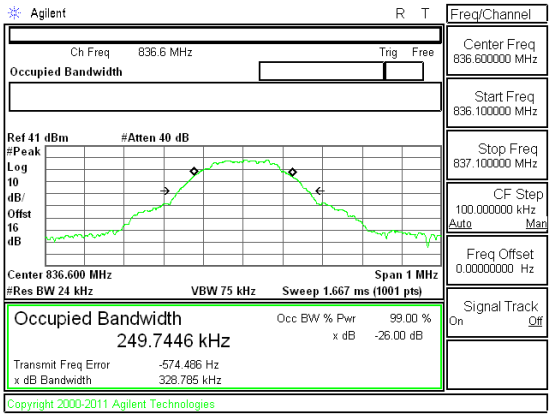 Band GSM850 GPRS OBW Mid channel	

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01
The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

RESULTS

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.2.1. BAND EDGE PLOTS

Band Band 2 HSDPA	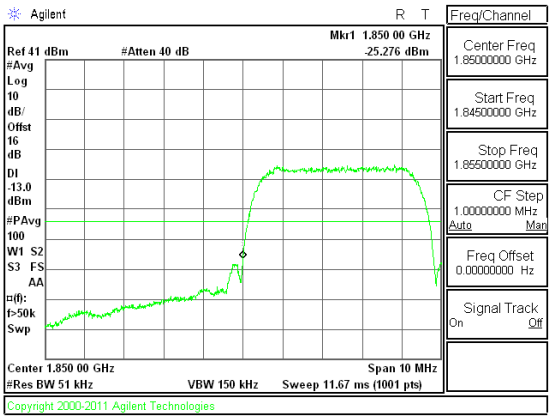 Band WCDMA B2 HSDPA CBE	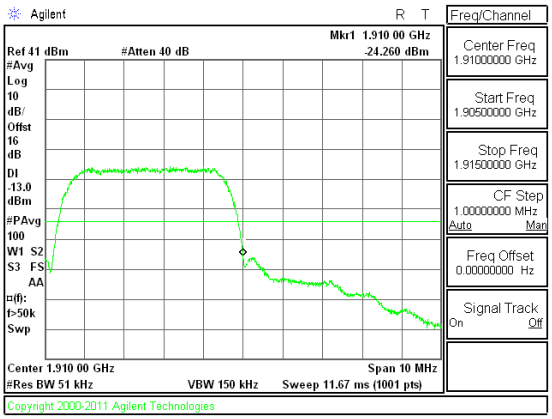 Band WCDMA B2 HSDPA CBE
Band Band 2 REL99	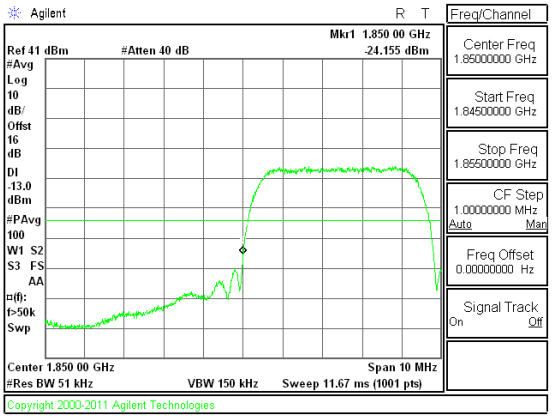 Band WCDMA B2 REL99 CBE	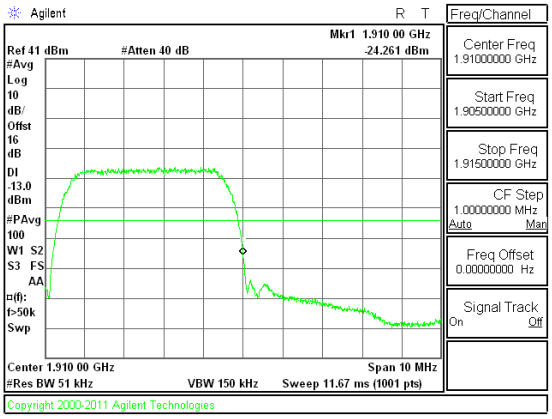 Band WCDMA B2 REL99 CBE

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band GSM1900 GPRS	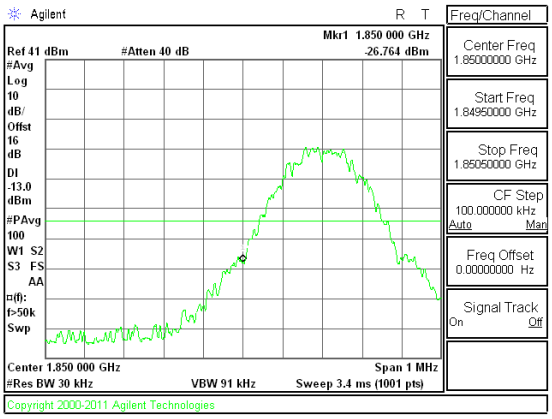 Band GSM1900 GPRS CBE Low channel	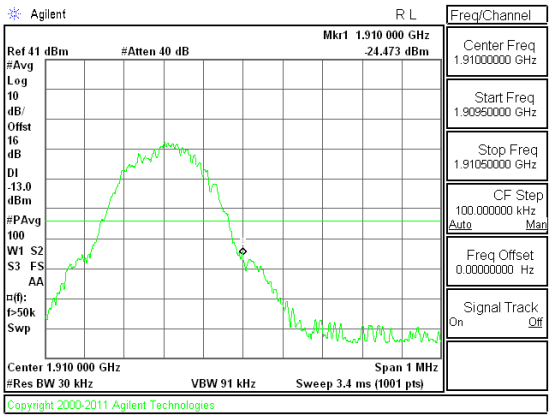 Band GSM1900 GPRS CBE High channel
Band GSM850 GPRS	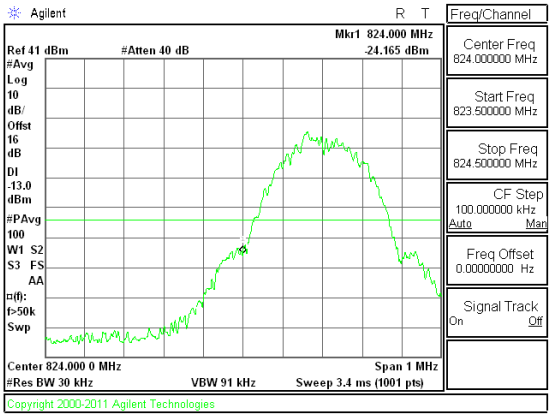 Band GSM850 GPRS CBE Low channel	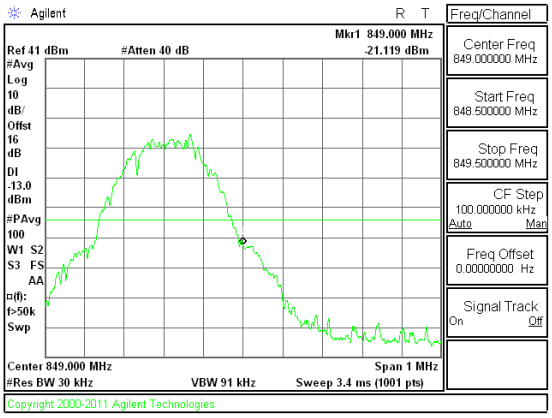 Band GSM850 GPRS CBE High channel

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

RESULTS

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.3.1. OUT OF BAND EMISSIONS RESULT

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM850	GPRS	824.2	-19.25	-13	-6.25
		836.6	-19.77	-13	-6.77
		848.8	-18.87	-13	-5.87
GSM1900	GPRS	1850.2	-18.93	-13	-5.93
		1880	-20.32	-13	-7.32
		1909.8	-18.86	-13	-5.86
Band 2	REL99	1852.4	-20.69	-13	-7.69
		1880	-20.26	-13	-7.26
		1907.6	-19.58	-13	-6.58
	HSDPA	1852.4	-19.27	-13	-6.27
		1880	-19.70	-13	-6.70
		1907.6	-19.75	-13	-6.75

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.3.2. OUT OF BAND EMISSIONS PLOTS

Band Band 2 HSDPA	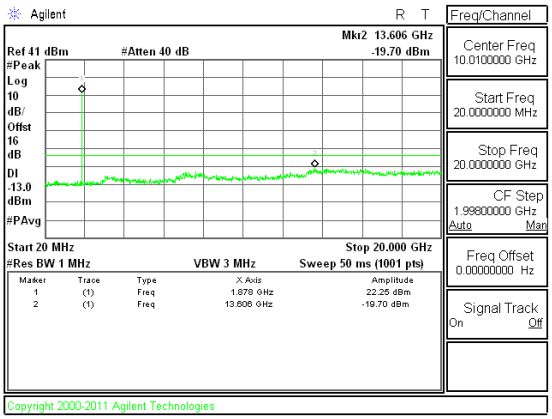 Band WCDMA B2 HSDPA CSE	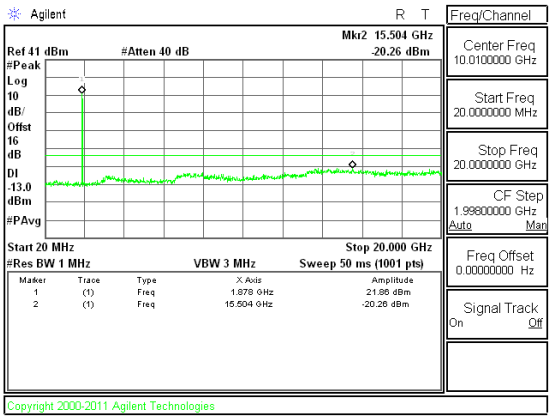 Band WCDMA B2 REL99 CSE
Band GSM1900 GPRS	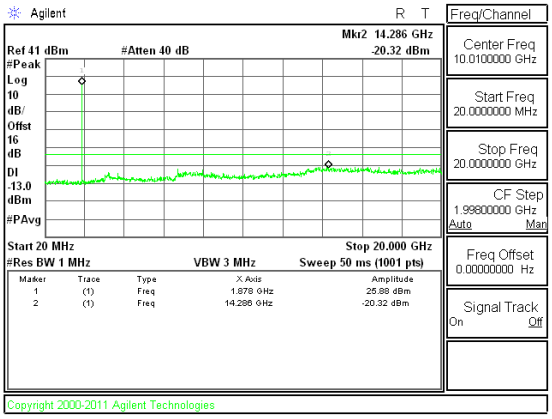 Band GSM1900 GPRS CSE Mid channel	

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band GSM850 GPRS	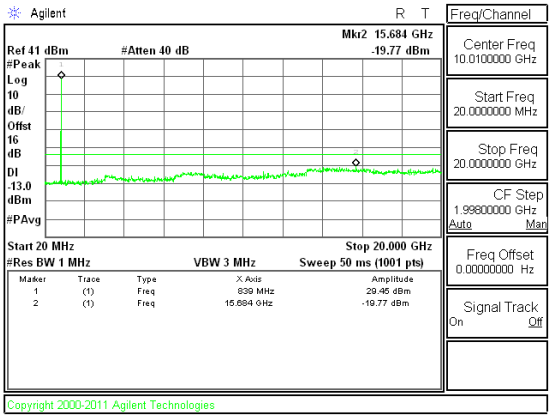 Band GSM850 GPRS CSE Mid channel	

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ±2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

RESULTS

See the following pages.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.4.1. FREQUENCY STABILITY RESULTS

GPRS 1900, Channel 661 Freq: 1880MHz– MID CHANNEL

Reference Frequency: PCS Mid Channel 1880MHz @ 20°C Limit: to stay +- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measureed with Time Elapse (MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1879.999941	0.012	2.5
3.80	40	1879.999952	0.006	2.5
3.80	30	1879.999952	0.006	2.5
3.80	***20***	***1879.999964***	***0***	***2.5***
3.80	10	1879.999962	0.001	2.5
3.80	0	1879.999969	-0.002	2.5
3.80	-10	1880.000033	-0.037	2.5
3.80	-20	1879.999969	-0.003	2.5
3.80	-30	1879.999966	-0.001	2.5

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C Limit: to stay +- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measureed with Time Elapse (MHz)	Delta (ppm)	Limit (ppm)
3.80	***20***	***1879.999975***	***0***	***2.5***
4.30	20	1879.999971	*0.002*	2.5
3.20	20	1879.999972	*0.002*	2.5

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

GPRS 850 CELL BAND, – MID CHANNEL190, Frequency 836.6MHz

Reference Frequency: Cell Mid Channel 836.6 MHz @ 20ºC Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measureed with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.599957	0.025	2.5
3.80	40	836.599972	0.007	2.5
3.80	30	836.599976	0.002	2.5
3.80	***20***	***836.599978***	***0***	***2.5***
3.80	10	836.600024	-0.055	2.5
3.80	0	836.600024	-0.055	2.5
3.80	-10	836.600024	-0.055	2.5
3.80	-20	836.600027	-0.059	2.5
3.80	-30	836.600027	-0.059	2.5

Reference Frequency: Cell Mid Channel 836.6 MHz @ 20ºC Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measureed with Time Elapse		
			Delta (ppm)	Limit (ppm)
3.80	***20***	***836.599980***	***0.00000***	***2.5***
4.30	20	836.599980	*0.00000*	2.5
3.20	20	836.599980	*0.00000*	2.5

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17

TEST RESULTS

11.1.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 2	REL99	9262	1852.4	21.69	147.57
		9400	1880	20.26	106.16
		9538	1907.6	22.27	168.65
	HSDPA	9262	1852.4	21.60	144.54
		9400	1880	20.50	112.20
		9538	1907.6	21.86	153.46

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM1900	GPRS	512	1850.2	28.14	651.62
		661	1880	29.98	995.40
		810	1909.8	29.37	864.96

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM850	GPRS	128	824.2	31.08	1282
		190	836.6	31.58	1439
		251	848.8	31.45	1396

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.1.2. ERP/EIRP DATA

Band

Band 2

HSDPA

High Frequency Fundamental Measurement
Compliance Certification Services Chamber C

Company: Samsung
Project #: 14i17928
Date: 06/11/14
Test Engineer: Charles Vergonio
Configuration: EUT ONLY, X Position
Mode: HSDPA 1900MHz

Test Equipment:
Receiving: T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 4ft SMA Cable (227086002) Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1.853	8.3	V	0.85	8.49	15.90	33.0	-17.1	
1.853	14.0	H	0.85	8.49	21.60	33.0	-11.4	
Mid Ch								
1.880	6.3	V	0.85	8.34	13.80	33.0	-19.2	
1.880	13.0	H	0.85	8.34	20.50	33.0	-12.5	
High Ch								
1.907	7.4	V	0.85	8.21	14.73	33.0	-18.3	
1.907	14.5	H	0.85	8.21	21.86	33.0	-11.1	

Rev. 3.17.11

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

Band 2

REL99

High Frequency Fundamental Measurement
Compliance Certification Services Chamber C

Company: Samsung
Project #: 14I17928
Date: 06/11/14
Test Engineer: Charles Vergonio
Configuration: EUT ONLY, X Position
Mode: WCDMA_1900 MHz_Rel 99

Test Equipment:
Receiving: T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 16ft SMA Cable (247217006) Warehouse

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1852.40	8.54	V	0.85	7.89	15.58	33.0	-17.4	
1852.40	14.65	H	0.85	7.89	21.69	33.0	-11.3	
Mid Ch								
1880.00	6.66	V	0.85	7.87	13.68	33.0	-19.3	
1880.00	13.24	H	0.85	7.87	20.26	33.0	-12.7	
High Ch								
1907.60	7.37	V	0.85	7.88	14.40	33.0	-18.6	
1907.60	15.24	H	0.85	7.88	22.27	33.0	-10.7	

Rev. 3.17.11
Note: For Band 4 EIRP limit is 30dBm

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

GSM1900

GPRS

High Frequency Fundamental Measurement
Compliance Certification Services Chamber C

Company: Samsung
Project #: 14I17928
Date: 06/10/14
Test Engineer: Charles Vergonio
Configuration: EUT ONLY, X Position
Mode: GPRS 1900MHz

Test Equipment:
Receiving: T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 16ft SMA Cable (247217006) Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1.850	15.4	V	0.85	7.89	22.41	33.0	-10.6	
1.850	21.1	H	0.85	7.89	28.14	33.0	-4.9	
Mid Ch								
1.880	15.5	V	0.85	7.87	22.52	33.0	-10.5	
1.880	23.0	H	0.85	7.87	29.98	33.0	-3.0	
High Ch								
1.910	14.5	V	0.85	7.88	21.55	33.0	-11.4	
1.910	22.3	H	0.85	7.88	29.37	33.0	-3.6	

Rev. 3.17.11

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

GSM850

GPRS

High Frequency Substitution Measurement
Compliance Certification Services Chamber D

Company: Samsung
Project #: 14I17928
Date: 06/04/14
Test Engineer: O. Stoelting
Configuration: EUT ONLY, X Position
Mode: GRPS 850MHz

Test Equipment:
Receiving: Hybrid T408, and Chamber E SMA Cables
Substitution: Dipole T416, 22ft SMA Cable

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	20.14	V	0.9	0.0	19.24	38.5	-19.2	
824.20	31.98	H	0.9	0.0	31.08	38.5	-7.4	
Mid Ch								
836.60	19.94	V	0.9	0.0	19.04	38.5	-19.4	
836.60	32.48	H	0.9	0.0	31.58	38.5	-6.9	
High Ch								
848.80	20.00	V	0.9	0.0	19.10	38.5	-19.4	
848.80	32.35	H	0.9	0.0	31.45	38.5	-7.0	

Rev. 3.17.11

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238

LIMIT

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RESULTS

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.2.1. SPURIOUS RADIATION DATA

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: SAMSUNG
Project #: 14I17928
Date: 06/05/14
Test Engineer: O. Stoelting
Configuration: X-Pos. EUT with AC charger & HS
Mode: HSDPA_HARM_1900MHz

Chamber	Pre-amplifer	Filter	Limit
5m Chamber A	T34 8449B	Filter 1	Part 24

Band

Band 2

HSDPA

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1852.4MHz									
3.705	-19.2	V	3.0	35.4	1.0	-53.6	-13.0	-40.6	
5.557	-16.3	V	3.0	34.7	1.0	-50.0	-13.0	-37.0	
7.409	-14.5	V	3.0	34.9	1.0	-48.4	-13.0	-35.4	
3.705	-18.4	H	3.0	35.4	1.0	-52.8	-13.0	-39.8	
5.557	-15.6	H	3.0	34.7	1.0	-49.3	-13.0	-36.3	
7.409	-14.3	H	3.0	34.9	1.0	-48.2	-13.0	-35.2	
Mid Ch, 1880MHz									
3.760	-18.1	V	3.0	35.3	1.0	-52.4	-13.0	-39.4	
5.640	-16.4	V	3.0	34.7	1.0	-50.1	-13.0	-37.1	
7.520	-14.4	V	3.0	34.9	1.0	-48.3	-13.0	-35.3	
3.760	-17.4	H	3.0	35.3	1.0	-51.8	-13.0	-38.8	
5.640	-15.8	H	3.0	34.7	1.0	-49.5	-13.0	-36.5	
7.520	-13.9	H	3.0	34.9	1.0	-47.8	-13.0	-34.8	
High Ch, 1907.6MHz									
3.815	-17.6	V	3.0	35.3	1.0	-51.9	-13.0	-38.9	
5.723	-16.8	V	3.0	34.7	1.0	-50.5	-13.0	-37.5	
7.630	-13.7	V	3.0	34.9	1.0	-47.7	-13.0	-34.7	
3.815	-17.7	H	3.0	35.3	1.0	-52.0	-13.0	-39.0	
5.723	-16.0	H	3.0	34.7	1.0	-49.8	-13.0	-36.8	
7.630	-12.8	H	3.0	34.9	1.0	-46.8	-13.0	-33.8	

Rev. 03.03.09

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17928
Date: 06/04/14
Test Engineer: O. Stoelting
Configuration: X-pos. EUT w/ ac charger & HS
Mode: Rel 99_HARM_ 1900MHz

Chamber	Pre-amplifer	Filter	Limit
5m Chamber A	T34 8449B	Filter 1	Part 24

Band

Band 2

REL99

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1852.4MHz									
3.705	-21.5	V	3.0	35.4	1.0	-55.9	-13.0	-42.9	
5.557	-20.4	V	3.0	34.7	1.0	-54.2	-13.0	-41.2	
7.409	-19.8	V	3.0	34.9	1.0	-53.7	-13.0	-40.7	
3.705	-21.0	H	3.0	35.4	1.0	-55.4	-13.0	-42.4	
5.557	-19.5	H	3.0	34.7	1.0	-53.3	-13.0	-40.3	
7.409	-17.9	H	3.0	34.9	1.0	-51.8	-13.0	-38.8	
Mid Ch, 1880MHz									
3.760	-21.4	V	3.0	35.3	1.0	-55.8	-13.0	-42.8	
5.640	-20.2	V	3.0	34.7	1.0	-53.9	-13.0	-40.9	
7.520	-18.8	V	3.0	34.9	1.0	-52.7	-13.0	-39.7	
3.760	-21.5	H	3.0	35.3	1.0	-55.8	-13.0	-42.8	
5.640	-19.4	H	3.0	34.7	1.0	-53.2	-13.0	-40.2	
7.520	-18.0	H	3.0	34.9	1.0	-51.9	-13.0	-38.9	
High Ch, 1907.6MHz									
3.815	-22.1	V	3.0	35.3	1.0	-56.4	-13.0	-43.4	
5.723	-20.4	V	3.0	34.7	1.0	-54.1	-13.0	-41.1	
7.630	-18.6	V	3.0	34.9	1.0	-52.6	-13.0	-39.6	
3.815	-22.7	H	3.0	35.3	1.0	-57.0	-13.0	-44.0	
5.723	-20.9	H	3.0	34.7	1.0	-54.7	-13.0	-41.7	
7.630	-19.1	H	3.0	34.9	1.0	-53.0	-13.0	-40.0	

Rev. 03.03.09

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17928
Date: 06/04/14
Test Engineer: O. Stoelting
Configuration: X-pos. EUT w/ ac charger & HS
Mode: GPRS 1900

Chamber	Pre-amplifer	Filter	Limit
5m Chamber A	T343 8449B	Filter 1	Part 24

Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 1850MHz									
GSM1900 GPRS	3.700	-22.9	V	3.0	35.4	1.0	-57.3	-13.0	-44.3	
	5.550	-19.5	V	3.0	34.7	1.0	-53.2	-13.0	-40.2	
	7.400	-15.9	V	3.0	34.9	1.0	-49.8	-13.0	-36.8	
	3.700	-25.1	H	3.0	35.4	1.0	-59.5	-13.0	-46.5	
	5.550	-21.8	H	3.0	34.7	1.0	-55.5	-13.0	-42.5	
	7.400	-20.0	H	3.0	34.9	1.0	-53.9	-13.0	-40.9	
	Mid Ch, 1880.0MHz									
	3.760	-17.2	V	3.0	35.3	1.0	-51.6	-13.0	-38.6	
	5.640	-18.5	V	3.0	34.7	1.0	-52.2	-13.0	-39.2	
	7.520	-19.1	V	3.0	34.9	1.0	-53.0	-13.0	-40.0	
	3.760	-22.2	H	3.0	35.3	1.0	-56.5	-13.0	-43.5	
	5.640	-16.8	H	3.0	34.7	1.0	-50.6	-13.0	-37.6	
	7.520	-17.6	H	3.0	34.9	1.0	-51.5	-13.0	-38.5	
	High Ch, 1909.8 MHz									
	3.820	-19.2	V	3.0	35.3	1.0	-53.5	-13.0	-40.5	
	5.729	-20.0	V	3.0	34.7	1.0	-53.8	-13.0	-40.8	
	7.639	-18.1	V	3.0	35.0	1.0	-52.0	-13.0	-39.0	
	3.820	-19.1	H	3.0	35.3	1.0	-53.4	-13.0	-40.4	
	5.729	-17.4	H	3.0	34.7	1.0	-51.1	-13.0	-38.1	
	7.639	-15.6	H	3.0	35.0	1.0	-49.6	-13.0	-36.6	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14U17928
Date: 06/05/14
Test Engineer: O. Stoelting
Configuration: X Position EUT, AC Charger, HS
Mode: GPRS 850

Chamber	Pre-amplifer	Filter	Limit
5m Chamber A	T34 8449B	Filter 1	Part 22

Band

GSM850

GPRS

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.2MHz									
1.648	-2.3	V	3.0	37.4	1.0	-38.7	-13.0	-25.7	
2.473	-4.5	V	3.0	36.4	1.0	-39.9	-13.0	-26.9	
3.297	-11.3	V	3.0	35.8	1.0	-46.1	-13.0	-33.1	
1.648	3.2	H	3.0	37.4	1.0	-33.2	-13.0	-20.2	
2.473	-15.5	H	3.0	36.4	1.0	-50.9	-13.0	-37.9	
3.297	-11.0	H	3.0	35.8	1.0	-45.8	-13.0	-32.8	
Mid Ch, 836.6MHz									
1.673	-11.9	V	3.0	37.3	1.0	-48.2	-13.0	-35.2	
2.510	-10.6	V	3.0	36.4	1.0	-46.0	-13.0	-33.0	
3.346	-8.4	V	3.0	35.8	1.0	-43.1	-13.0	-30.1	
1.673	-10.7	H	3.0	37.3	1.0	-47.1	-13.0	-34.1	
2.510	-9.5	H	3.0	36.4	1.0	-44.9	-13.0	-31.9	
3.346	-8.5	H	3.0	35.8	1.0	-43.3	-13.0	-30.3	
High Ch, 848.8MHz									
1.698	6.7	V	3.0	37.3	1.0	-29.6	-13.0	-16.6	
2.547	-6.4	V	3.0	36.3	1.0	-41.8	-13.0	-28.8	
3.395	-9.7	V	3.0	35.7	1.0	-44.4	-13.0	-31.4	
1.698	-0.7	H	3.0	37.3	1.0	-37.0	-13.0	-24.0	
2.547	-12.6	H	3.0	36.3	1.0	-47.9	-13.0	-34.9	
3.395	-8.9	H	3.0	35.7	1.0	-43.6	-13.0	-30.6	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701H
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.