FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART M

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n & NFC

MODEL NUMBER: SM-G3586V

FCC ID: A3LSMG3586V

REPORT NUMBER: 14I17354-1

ISSUE DATE: April 9, 2014

Prepared for

SAMSUNG ELECTRONICS CO., LTD.

416, MAETAN 3-DONG, YEONGTONG-GU

SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

Prepared by

UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
-	4/9/14	Initial	P. Kim

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 5
2. TEST METHODOLOGY 6
3. FACILITIES AND ACCREDITATION 6
4. CALIBRATION AND UNCERTAINTY 6
4.1. MEASURING INSTRUMENT CALIBRATION 6
4.2. SAMPLE CALCULATION 6
4.3. MEASUREMENT UNCERTAINTY 6
5. EQUIPMENT UNDER TEST 7
5.1. DESCRIPTION OF EUT 7
5.2. MAXIMUM OUTPUT POWER 7
5.3. MAXIMUM OUTPUT POWER (LTE) 8
5.4. DESCRIPTION OF AVAILABLE ANTENNAS 9
5.5. DESCRIPTION OF TEST SETUP 10
6. TEST AND MEASUREMENT EQUIPMENT 13
7. Summary Table 14
8. RF POWER OUTPUT VERIFICATION 15
8.1. GSM/GPRS/EDGE 15
8.1.1. GSM OUTPUT POWER RESULT 16
8.2. UMTS REL 99 17
8.2.1. UMTS REL 99 OUTPUT POWER RESULT 17
8.3. UMTS HSDPA 18
8.3.1. UMTS HSDPA OUTPUT POWER RESULT 18
8.3.2. UMTS HSUPA 19
8.3.3. UMTS HSUPA OUTPUT POWER RESULT 20
8.4. LTE OUTPUT VERIFICATION 21
8.4.1. LTE OUTPUT RESULT 21
9. PEAK TO AVERAGE RATIO 23
9.1. CONDUCTED PEAK TO AVERAGE RESULT 23
10. LIMITS AND CONDUCTED RESULTS 26
10.1. OCCUPIED BANDWIDTH 26

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.1.1. OCCUPIED BANDWIDTH RESULTS 27
10.1.2. LTE OCCUPIED BANDWIDTH RESULTS 28
10.1.3. OCCUPIED BANDWIDTH PLOTS 30
10.2. BAND EDGE EMISSIONS 34
10.2.1. BAND EDGE PLOTS 35
10.2.2. EMISSION MASK PLOTS 38
10.3. OUT OF BAND EMISSIONS 42
10.3.1. OUT OF BAND EMISSIONS RESULT 43
10.3.2. OUT OF BAND EMISSIONS PLOTS 45
10.4. FREQUENCY STABILITY 49
10.4.1. FREQUENCY STABILITY RESULTS 50
11. RADIATED TEST RESULTS 53
11.1. RADIATED POWER (ERP & EIRP) 53
11.1.1. ERP/EIRP Results 53
11.1.2. LTE ERP/EIRP Results 55
11.1.3. ERP/EIRP Data 57
11.2. FIELD STRENGTH OF SPURIOUS RADIATION 71
11.2.1. SPURIOUS RADIATION Data 72
12. SETUP PHOTOS 87

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1. ATTESTATION OF TEST RESULTS

COMPANY NAME:	**SAMSUNG ELECTRONICS CO., LTD.**
EUT DESCRIPTION:	**GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n & NFC**
MODEL:	**SM-G3586V**
SERIAL NUMBER:	**FL-102-A (conducted & radiated)**
DATE TESTED:	**March 21 – April 9, 2014**

APPLICABLE STANDARDS	
STANDARD	**TEST RESULTS**
FCC PART 22H, 24E and 27M	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For

UL Verification Services Inc. By:

PHILIP KIM
PROGRAM MANAGER
UL Verification Services Inc.

Tested By:

CHARLES VERGONIO
TEST TECHNICIAN
UL Verification Services Inc.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24, FCC CFR 47 Part 27.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at http://www.ul.com

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

EIRP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(between the SG and substitution antenna) + Substitution Antenna Factor (dBi)

ERP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(between the SG and substitution antenna)

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n & NFC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
GSM850	824~849	GMSK	32.9	1949.84		
	824~849	GPRS	33.0	1995.26	26.221	418.89
	824~849	EGPRS	27.0	501.19	20.123	102.87
GSM1900	1850~1910	GMSK	30.1	1023.29		
	1850~1910	GPRS	30.1	1023.29	28.44	698.23
	1850~1910	EGPRS	26.2	416.87	26.35	431.52

FCC Part 24						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
Band 2	1850~1910	REL99	22.5	177.83	22.3	169.82
	1850~1910	HSDPA	21.4	138.04	21.07	127.94
	1850~1910	HSUPA	21.4	138.04		

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.3. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and radiated ERP/EIRP output powers as follows:

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
			Peak	Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE41	2496~2690	20MHz	QPSK	20.5	112.20	20.575	114.16
	2496~2690	20MHz	16QAM	19.5	89.13	20.575	114.16

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
			Peak	Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE41	2496~2690	15MHz	QPSK	20.5	112.20	20.633	115.69
	2496~2690	15MHz	16QAM	19.5	89.13	20.075	101.74

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
			Peak	Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE41	2496~2690	10MHz	QPSK	20.5	112.20	20.733	118.39
	2496~2690	10MHz	16QAM	19.5	89.13	20.233	105.51

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
			Peak	Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE41	2496~2690	5MHz	QPSK	20.5	112.20	20.575	114.16
	2496~2690	5MHz	16QAM	19.5	89.13	19.255	84.24

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
B5, 824~849MHz	-4.38
B2, 1850~1910MHz	-2.43
LTE41, 2496~2690MHz	1.08

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	SM-G3586	DK4DA09TS	N/A
Earphone	Samsung	SM-G3586	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA

I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes

TEST SETUP

The EUT is continuously communicated to the call box during the tests.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

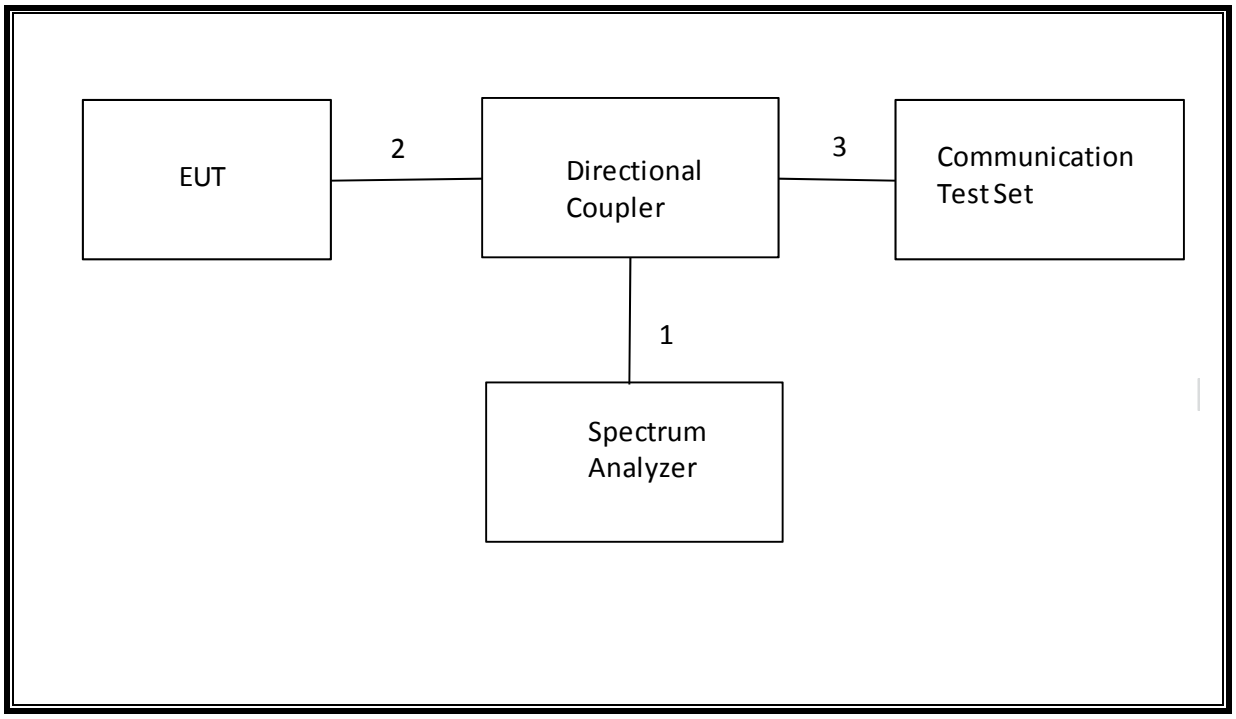

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

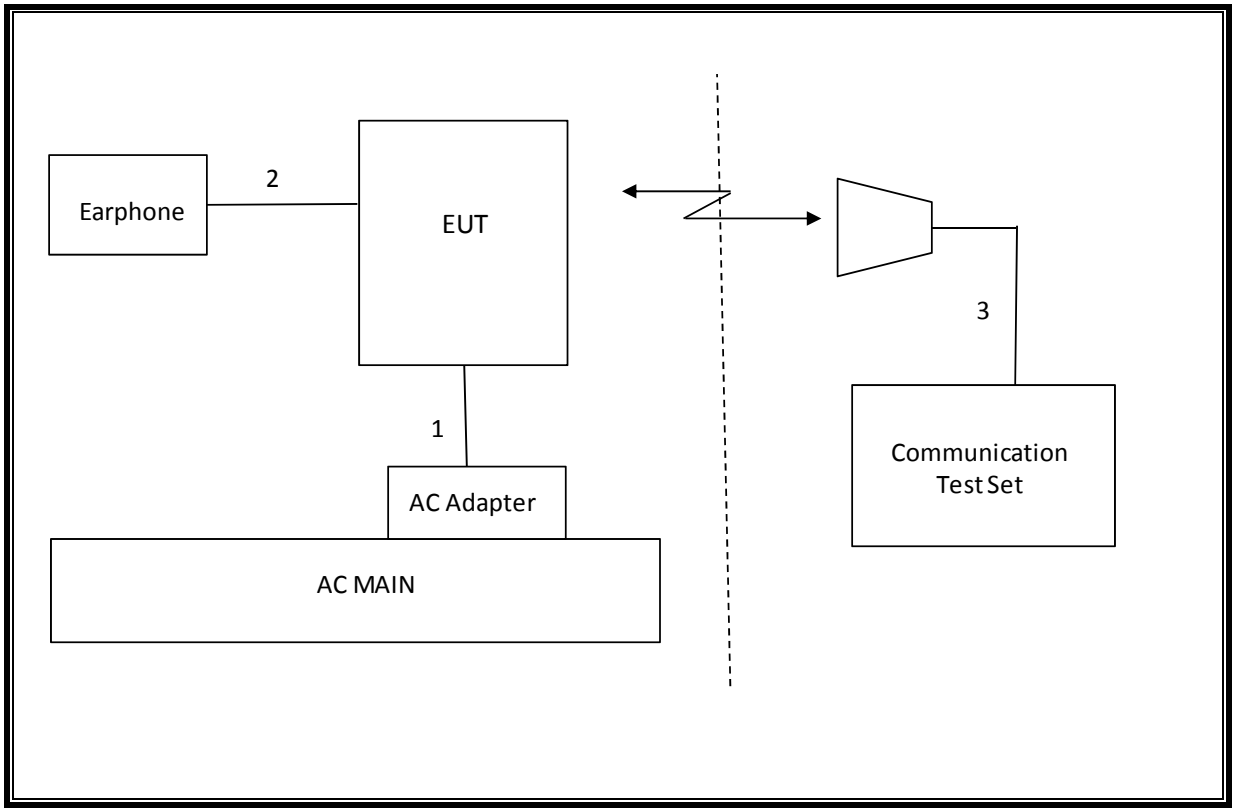

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	**Manufacturer**	**Model**	**Asset**	**Cal Due**
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	08/14/14
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 18 GHz	EMCO	3115	C00784	10/25/14
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/15
Communications Test Set	R&S	CMW500	T159	07/02/14
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/14
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	C00993	02/14/15
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn,18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/14

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	17.85MHz
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-130(4.6)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-18.284dBm
2.1046	N/A	Conducted output power	N/A		Pass	33.0dBm
22.355 24.235 27.54	RSS-132(4.3) RSS-133(6.3) RSS-130(4.2)	Frequency Stability	2.5PPM		Pass	0.032PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	26.22dBm
27.50(b)(10)	RSS-130(4.4)		34.77 dBm		Pass	
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	28.44dBm
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-130(4.6)	Radiated Spurious Emission	-13dBm		Pass	-36.7dBm

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press Connection control to choose the different menus

Press RESET > choose all to reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM+GPRS or GSM+EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850/900

> 30 dBm for GPRS1800/1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0> 4 dB

Slot Config > Unchanged (if already set under MS Signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3 (Default)

Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)

Bit Stream > 2E9-1PSR Bit Pattern

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal On to turn on the signal and change settings

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.1.1. GSM OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	1 time slot	2 time slot	3 time slot	4 time slot
				Peak (dBm)	Peak (dBm)	Peak (dBm)	Peak (dBm)
GSM850	GMSK	128	824.2	32.9			
		190	836.6	32.9			
		251	848.8	32.8			
	GPRS	128	824.2	33.0	29.9	29.3	27.6
		190	836.6	32.9	29.9	29.5	27.5
		251	848.8	32.8	29.9	29.5	27.4
	EGPRS	128	824.2	27.0	26.6	24.1	23.9
		190	836.6	27.0	26.7	24.1	23.9
		251	848.8	27.0	26.7	24.1	23.9
GSM1900	GMSK	512	1850.2	30.1			
		661	1880	30.0			
		810	1909.8	30.0			
	GPRS	512	1850.2	30.1	27.5	25.3	24.0
		661	1880	30.1	27.6	25.3	24.1
		810	1909.8	30.0	27.5	25.2	24.1
	EGPRS	512	1850.2	26.2	25.9	23.3	23.1
		661	1880	26.2	25.9	23.3	23.2
		810	1909.8	26.2	25.9	23.2	23.1

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2. UMTS REL 99

TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	βc	Not Applicable
	βd	Not Applicable
	βec	Not Applicable
	βc/βd	8/15
	βhs	Not Applicable
	βed	Not Applicable

8.2.1. UMTS REL 99 OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	Conducted Power (dBm)
				Avg (dBm)
Band 2	REL99	9262	1852.4	22.5
		9400	1880	22.5
		9538	1907.6	22.5

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	βc	2/15	12/15	15/15	15/15
	βd	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	βc/βd	2/15	12/15	15/8	15/4
	βhs	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	Ahs =βhs/βc	30/15			

8.3.1. UMTS HSDPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm) Avg (dBm)
Band 2	HSDPA	1	9262	1852.4	21.4
			9400	1880	21.4
			9538	1907.6	21.4
		2	9262	1852.4	21.2
			9400	1880	21.3
			9538	1907.6	21.5
		3	9262	1852.4	20.6
			9400	1880	20.6
			9538	1907.6	20.7
		4	9262	1852.4	20.6
			9400	1880	20.5
			9538	1907.6	20.7

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.2. UMTS HSUPA

TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCH (dB)	-9				
	HS-SCCH_1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
	Bec	209/225	12/15	30/15	2/15	5/15
	βc/βd	11/15	6/15	15/9	2/15	15/15
	Bhs	22/15	12/15	30/15	4/15	30/15
	βed (note1)	1309/225	94/75	47/15 47/15	56/75	134/15
	MPR	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = βhs/βc	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	

Note1: βed cannot be set directly, it is set by Absolute Grant Value.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.3. UMTS HSUPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm) Avg (dBm)
Band 2	HSUPA	1	9262	1852.4	21.4
			9400	1880	21.4
			9538	1907.6	21.2
		2	9262	1852.4	20.5
			9400	1880	20.4
			9538	1907.6	20.3
		3	9262	1852.4	20.4
			9400	1880	20.2
			9538	1907.6	20.2
		4	9262	1852.4	20.4
			9400	1880	20.6
			9538	1907.6	20.7
		5	9262	1852.4	21.4
			9400	1880	21.3
			9538	1907.6	21.4

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.4. LTE OUTPUT VERIFICATION

8.4.1. LTE OUTPUT RESULT

Full Power

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						39750	40620	41490
						2506 MHz	2593 MHz	2680 MHz
LTE Band 41	20	QPSK	1	0	0	20.50	20.48	20.50
			1	49	0	20.43	20.42	20.40
			1	99	0	20.47	20.38	20.36
			50	0	1	19.50	19.34	19.47
			50	24	1	19.50	19.34	19.40
			50	50	1	19.50	19.33	19.50
			100	0	1	19.50	19.38	19.46
		16QAM	1	0	1	19.23	19.15	19.50
			1	49	1	19.50	19.11	19.50
			1	99	1	19.40	19.10	19.50
			50	0	2	19.40	19.33	19.50
			50	24	2	19.30	19.33	19.50
			50	50	2	19.50	19.33	19.43
			100	0	2	19.50	19.35	19.50
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						39725	40620	41515
						2503.5 MHz	2593 MHz	2682.5 MHz
LTE Band 41	15	QPSK	1	0	0	20.38	20.50	20.50
			1	37	0	20.50	20.48	20.50
			1	74	0	20.50	20.44	20.40
			36	0	1	19.50	19.40	19.50
			36	20	1	19.50	19.45	19.50
			36	39	1	19.50	19.46	19.49
			75	0	1	19.50	19.46	19.50
		16QAM	1	0	1	19.43	19.50	19.48
			1	37	1	19.50	19.48	19.50
			1	74	1	19.50	19.50	19.50
			36	0	2	19.50	19.38	19.47
			36	20	2	19.50	19.38	19.47
			36	39	2	19.50	19.35	19.43
			75	0	2	19.50	19.45	19.50

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						39700	40620	41540
						2501 MHz	2593 MHz	2685 MHz
LTE Band 41	10	QPSK	1	0	0	20.50	20.50	20.50
			1	25	0	20.50	20.40	20.50
			1	49	0	20.40	20.30	20.40
			25	0	1	19.50	19.42	19.50
			25	12	1	19.50	19.40	19.47
			25	25	1	19.50	19.43	19.48
			50	0	1	19.50	19.45	19.48
		16QAM	1	0	1	19.50	19.46	19.50
			1	25	1	19.50	19.50	19.50
			1	49	1	19.50	19.50	19.50
			25	0	2	19.41	19.30	19.47
			25	12	2	19.50	19.31	19.46
			25	25	2	19.50	19.28	19.44
			50	0	2	19.50	19.42	19.45

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						39675	40620	41564
						2498.5 MHz	2593 MHz	2687.5 MHz
LTE Band 41	5	QPSK	1	0	0	20.45	20.50	20.50
			1	25	0	20.50	20.50	20.41
			1	49	0	20.50	20.50	20.46
			25	0	1	19.30	19.20	19.40
			25	12	1	19.30	19.40	19.40
			25	25	1	19.50	19.50	19.50
			50	0	1	19.40	19.40	19.20
		16QAM	1	0	1	19.40	19.50	19.50
			1	25	1	19.40	19.50	19.50
			1	49	1	19.50	19.50	19.50
			25	0	2	19.00	19.30	19.40
			25	12	2	19.10	19.20	19.30
			25	25	2	19.11	19.20	19.20
			50	0	2	19.20	19.00	19.30

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT

Band LTE41 20MHz	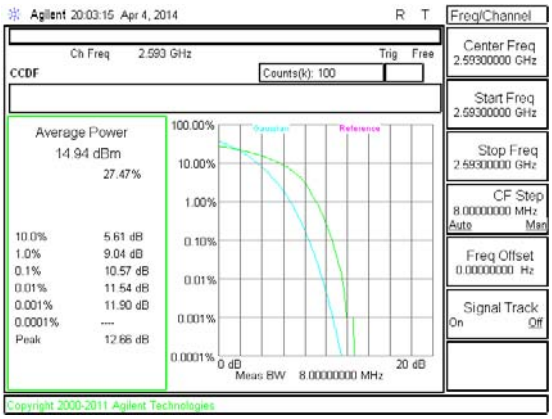 Band LTE41 20MHz 16QAM Mid channel	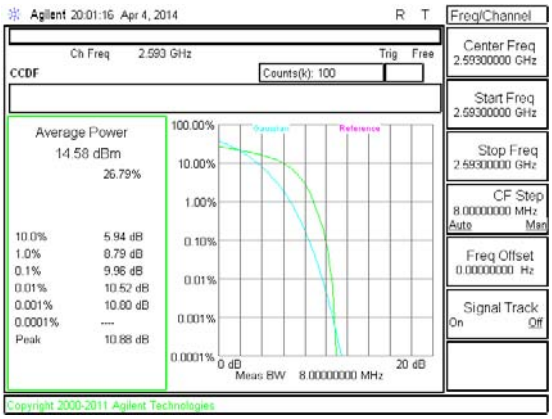 Band LTE41 20MHz QPSK Mid channel

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE41 15MHz	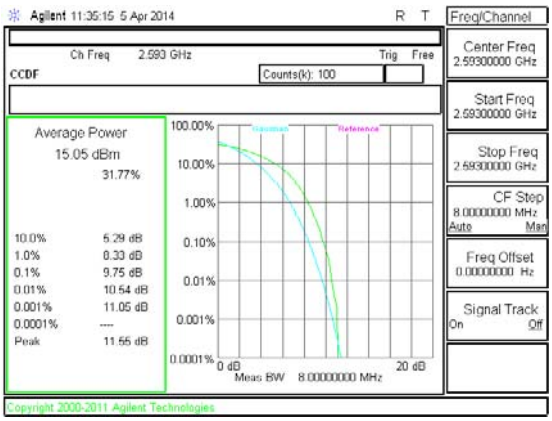 Band LTE41 15MHz 16QAM Mid channel	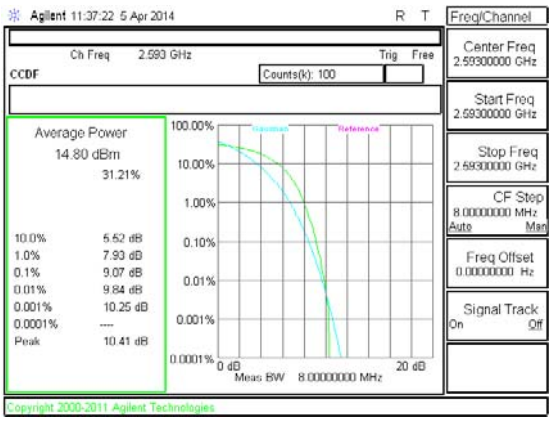 Band LTE41 15MHz QPSK Mid channel
Band LTE41 10MHz	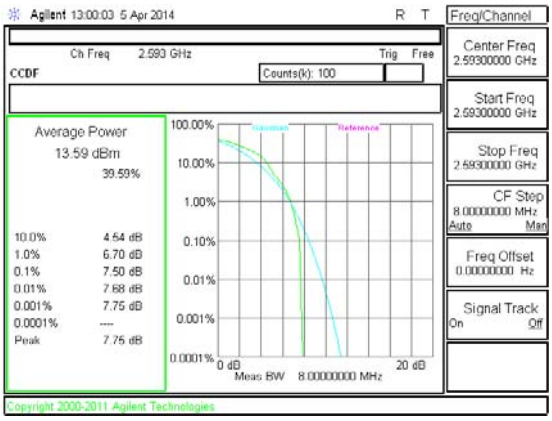 Band LTE41 10MHz 16QAM Mid channel	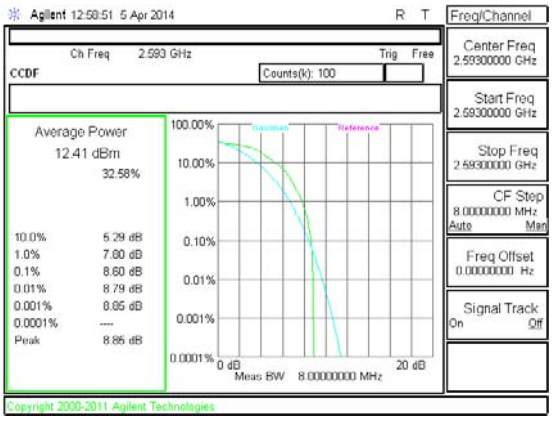 Band LTE41 10MHz QPSK Mid channel

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE41 5MHz	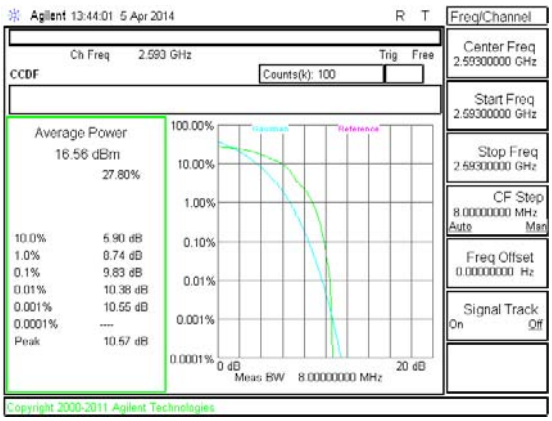 Band LTE41 5MHz 16QAM Mid channel	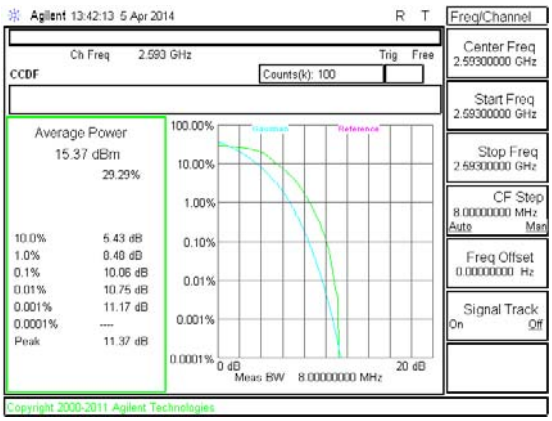 Band LTE41 5MHz QPSK Mid channel
Band Band 2	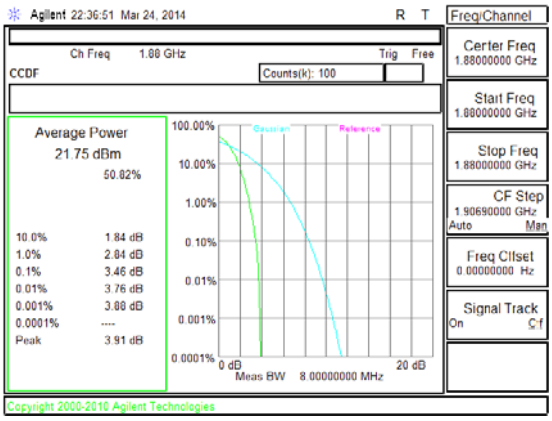 Band WCDMA B2 HSDPA	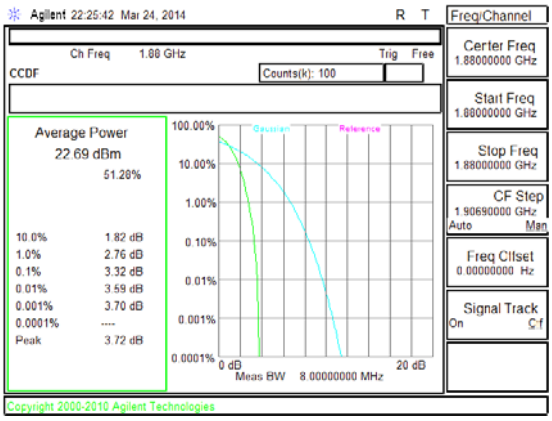 Band WCDMA B2 REL99

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049
IC: RSS-132, 4.5; RSS-133, 6.5

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r01 - 06/07/2013)

MODES TESTED

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.1.1. OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
GSM850	GMSK	128	824.2	247	318
		190	836.6	247	326
		251	848.8	242	321
	GPRS	128	824.2	237	298
		190	836.6	236	304
		251	848.8	239	300
GSM1900	GMSK	512	1850.2	244	321
		661	1880	248	324
		810	1909.8	245	316
	GPRS	512	1850.2	236	309
		661	1880	243	319
		810	1909.8	245	314
Band 2	REL99	9262	1852.4	4170	4629
		9400	1880	4157	4634
		9538	1907.6	4203	4712
	HSDPA	9262	1852.4	4153	4636
		9400	1880	4170	4633
		9538	1907.6	4167	4651

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.1.2. LTE OCCUPIED BANDWIDTH RESULTS

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE41	20	QPSK	100/0	2506	17.83	18.75
			100/0	2593	17.77	18.67
			100/0	2680	17.81	18.80
		16QAM	100/0	2506	17.85	18.54
			100/0	2593	17.82	18.60
			100/0	2680	17.84	18.84

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE41	15	QPSK	75/0	2503.5	13.37	14.06
			75/0	2593	13.39	13.90
			75/0	2682.5	13.32	14.20
		16QAM	75/0	2503.5	13.31	13.94
			75/0	2593	13.40	14.22
			75/0	2682.5	13.32	14.20

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE41	10	QPSK	50/0	2501	8.81	9.66
			50/0	2593	8.93	9.50
			50/0	2685	8.92	9.53
		16QAM	50/0	2501	8.93	9.49
			50/0	2593	8.92	9.52
			50/0	2685	8.92	9.56

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE41	5	QPSK	25/0	2498.5	4.45	4.84
			25/0	2593	4.48	4.87
			25/0	2687.5	4.46	4.86
		16QAM	25/0	2498.5	4.45	4.92
			25/0	2593	4.46	4.86
			25/0	2687.5	4.47	4.87

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.1.3. OCCUPIED BANDWIDTH PLOTS

Band LTE41 20MHz	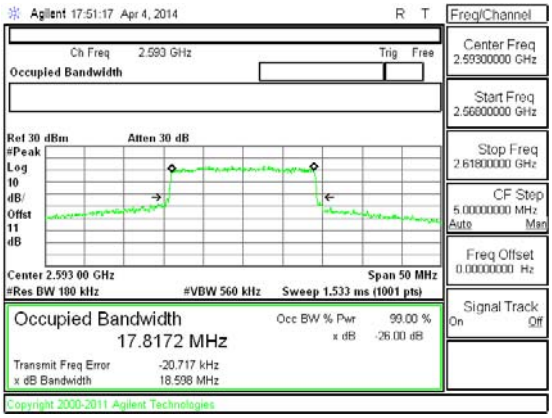 Band LTE41 20MHz OBW 16QAM Mid Channel FRB.gif	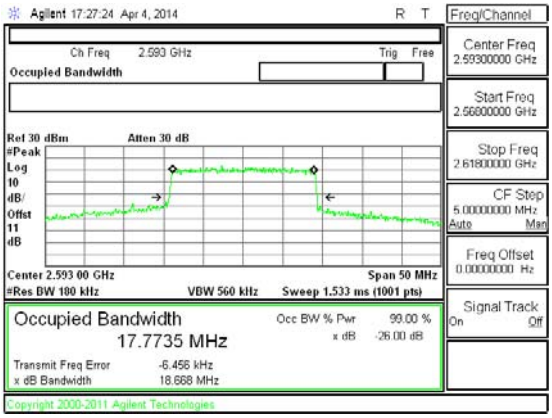 Band LTE41 20MHz OBW QPSK Mid Channel FRB.gif

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE41 15MHz	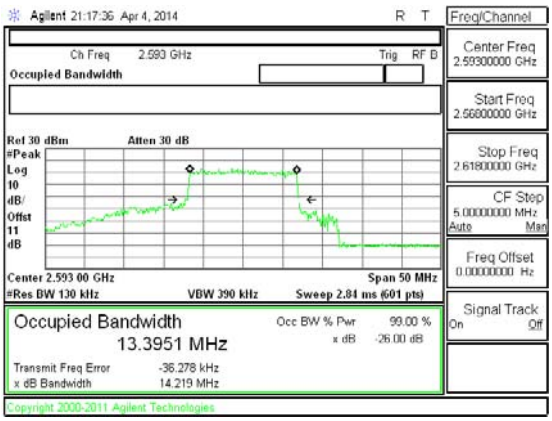 Band LTE41 15MHz OBW 16QAM Mid Channel FRB.gif	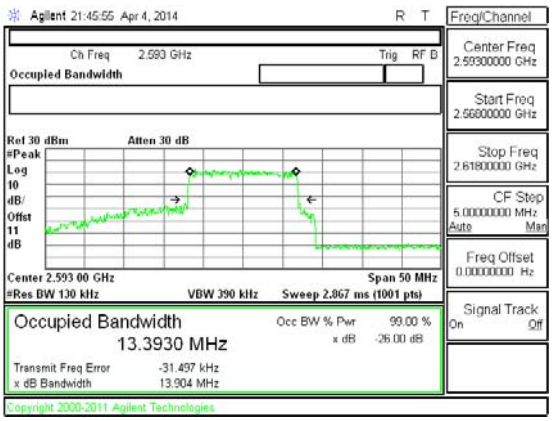 Band LTE41 15MHz OBW QPSK Mid Channel FRB.gif
Band LTE41 10MHz	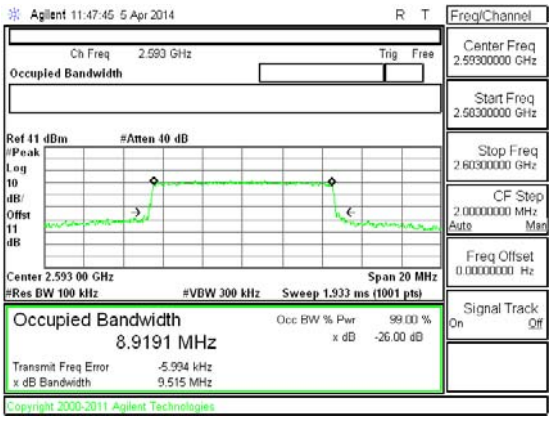 Band LTE41 10MHz OBW 16QAM Mid Channel FRB.gif	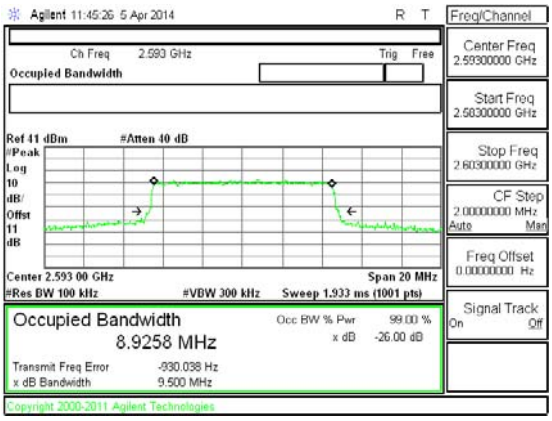 Band LTE41 10MHz OBW QPSK Mid Channel FRB.gif

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE41 5MHz	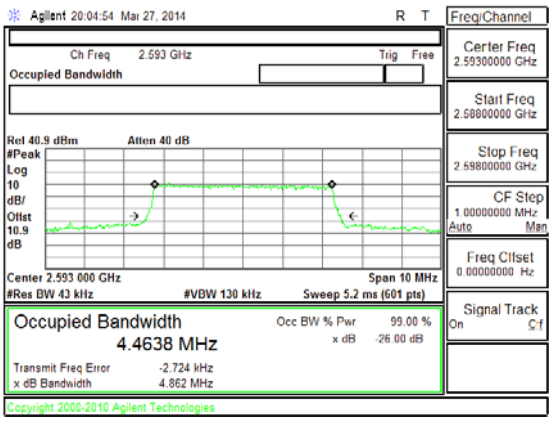 Band LTE41 5MHz OBW 16QAM Mid Channel FRB.gif	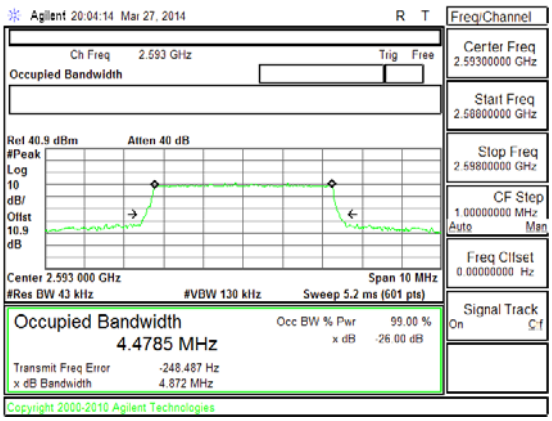 Band LTE41 5MHz OBW QPSK Mid Channel FRB.gif
Band Band 2	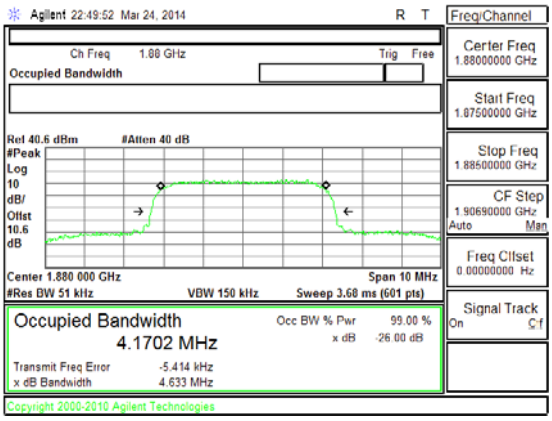 Band WCDMA B2 HSDPA OBW	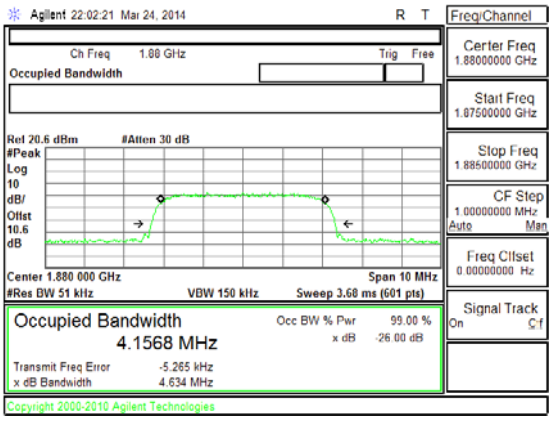 Band WCDMA B2 REL99 OBW

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band GSM1900	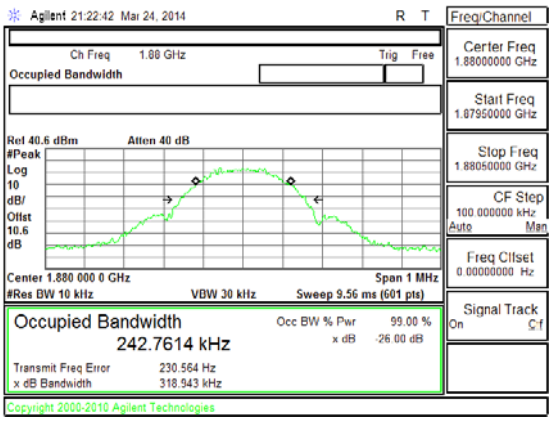 Band GSM1900 EGPRS OBW Mid channel	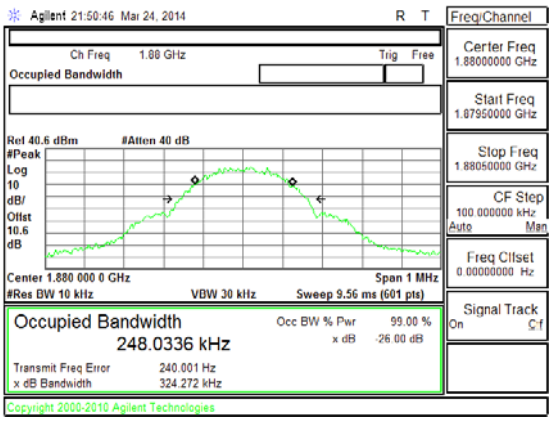 Band GSM1900 GPRS OBW Mid channel
Band GSM850	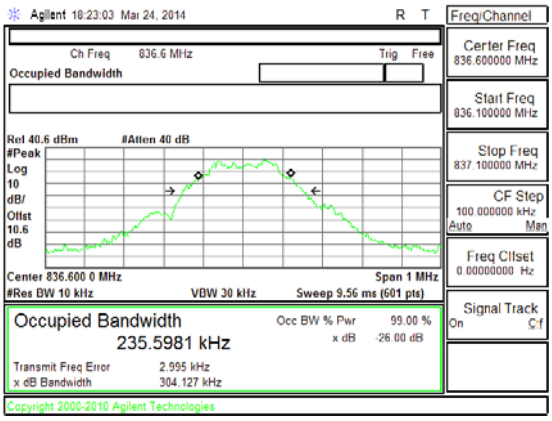 Band GSM850 EGPRS OBW Mid channel	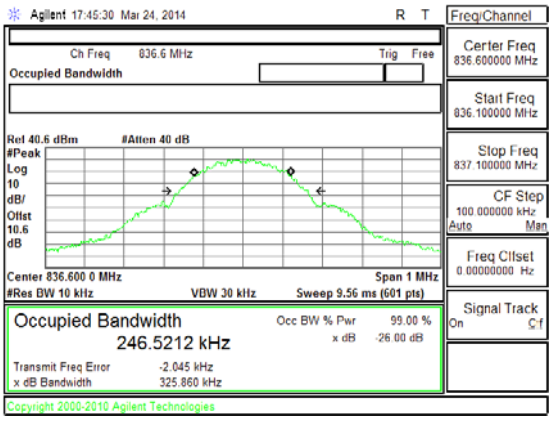 Band GSM850 GPRS OBW Mid channel

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01
The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

RESULTS

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.2.1. BAND EDGE PLOTS

Band Band 2 HSDPA	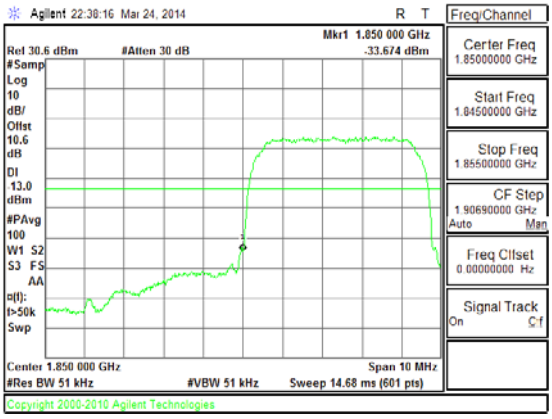 Band WCDMA B2 HSDPA CBE	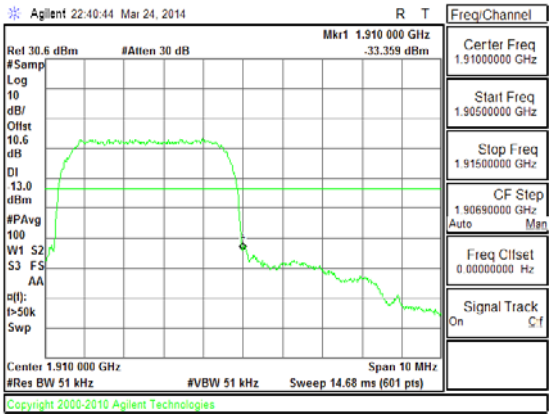 Band WCDMA B2 HSDPA CBE
Band Band 2 REL99	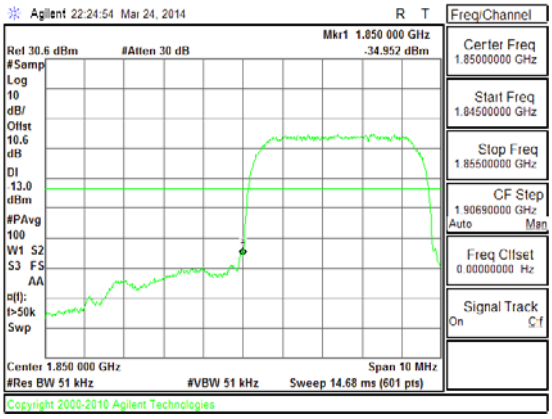 Band WCDMA B2 REL99 CBE	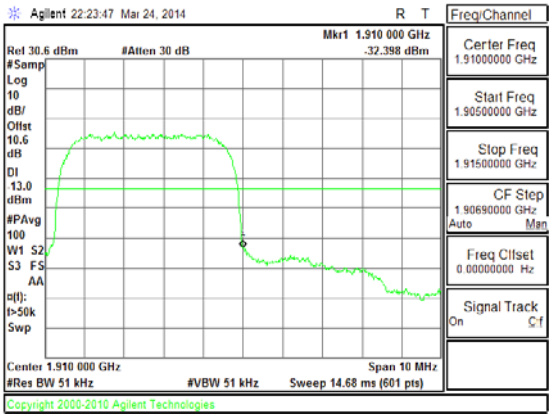 Band WCDMA B2 REL99 CBE

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band GSM1900 EGPRS	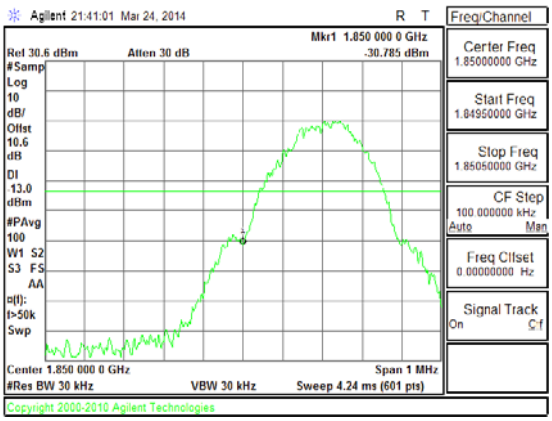 Band GSM1900 EGPRS CBE Low channel	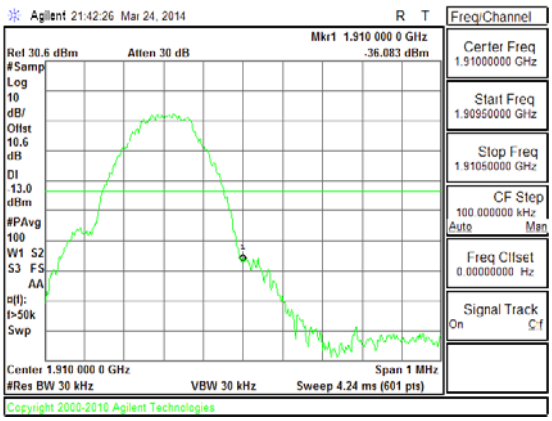 Band GSM1900 EGPRS CBE High channel
Band GSM1900 GPRS	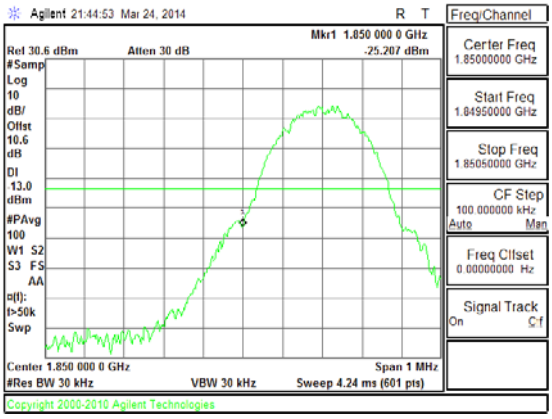 Band GSM1900 GPRS CBE Low channel	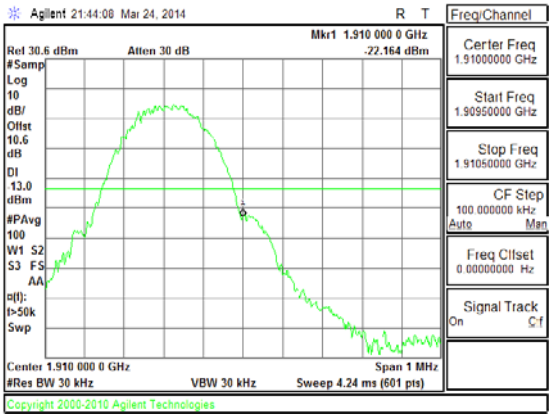 Band GSM1900 GPRS CBE High channel

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band GSM850 EGPRS	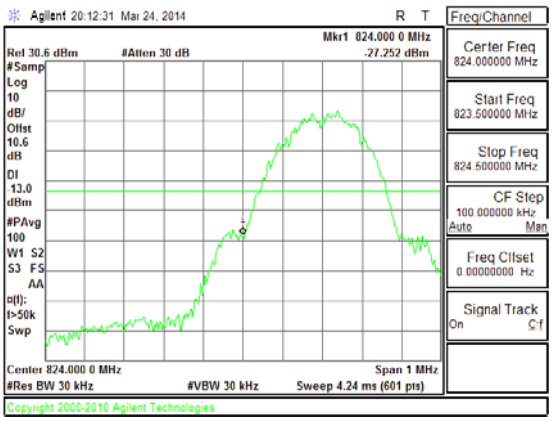 Band GSM850 EGPRS CBE Low channel	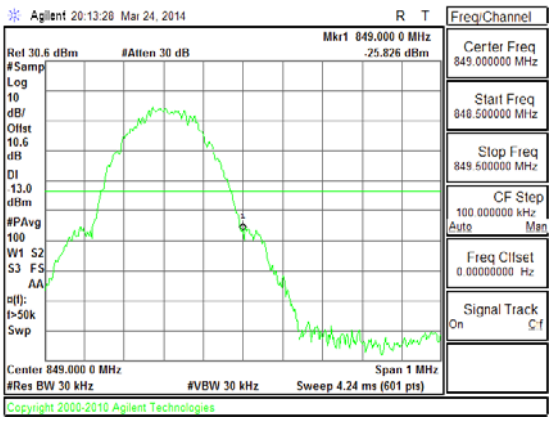 Band GSM850 EGPRS CBE High channel
Band GSM850 GPRS	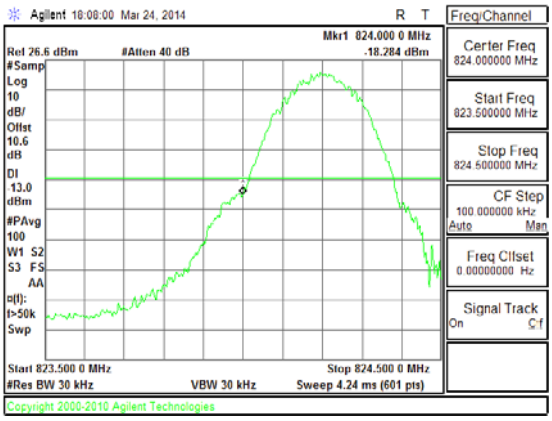 Band GSM850 GPRS CBE Low channel	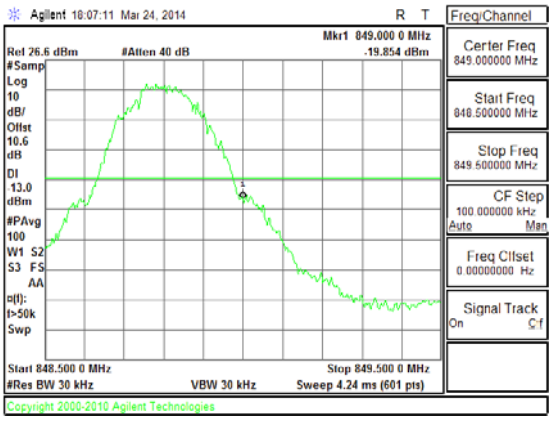 Band GSM850 GPRS CBE High channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.2.2. EMISSION MASK PLOTS

Band LTE41 20MHz	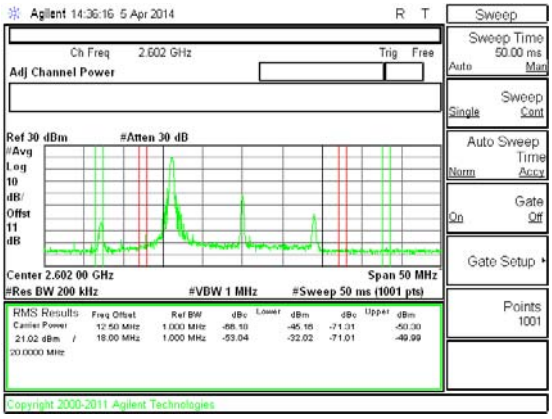 Band LTE41 20MHz EM 16QAM 1RB.gif	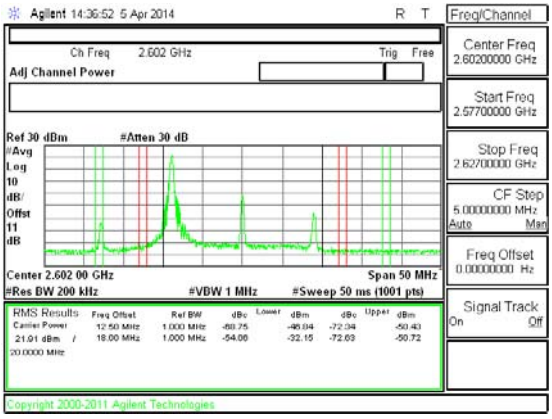 Band LTE41 20MHz EM QPSK 1RB.gif
Band LTE41 20MHz	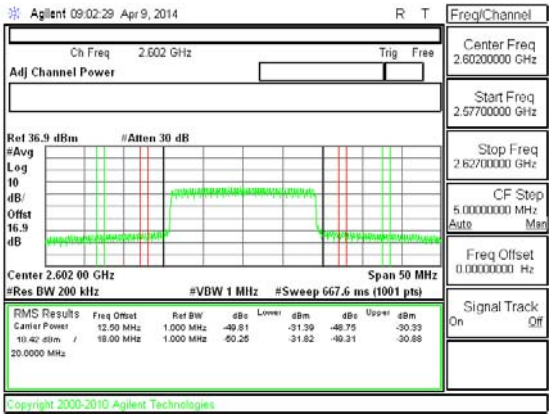 Band LTE41 20MHz EM 16QAM FRB.gif	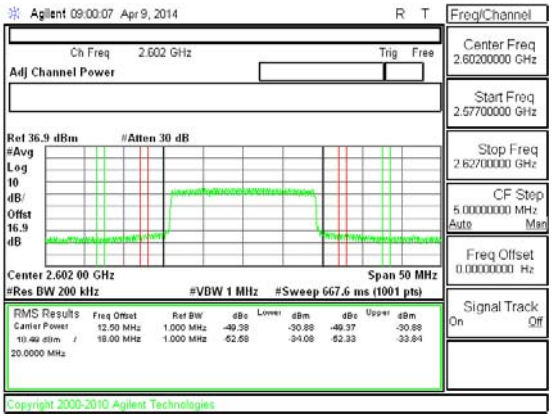 Band LTE41 20MHz EM QPSK FRB.gif

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE41 15MHz	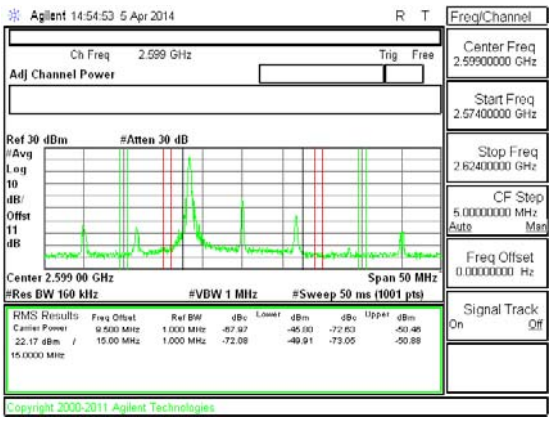 Band LTE41 15MHz EM 16QAM 1RB.gif	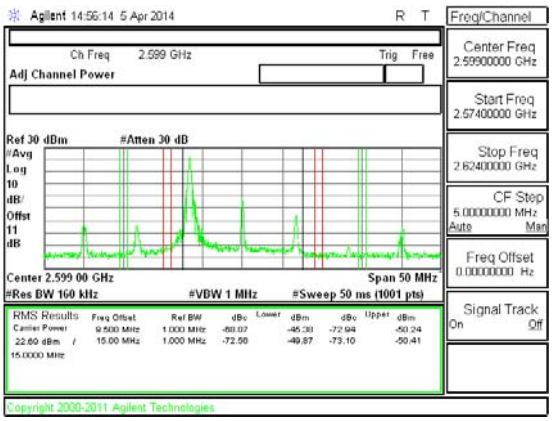 Band LTE41 15MHz EM QPSK 1RB.gif
Band LTE41 15MHz	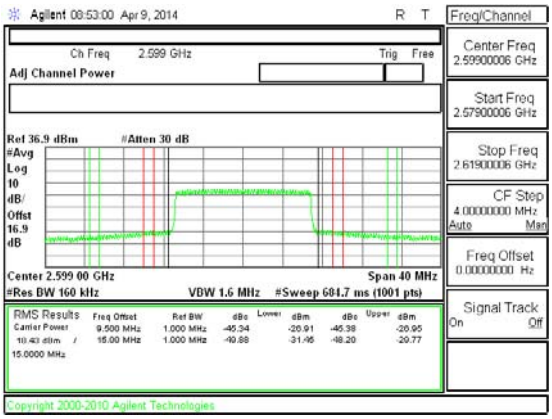 Band LTE41 15MHz EM 16QAM FRB.gif	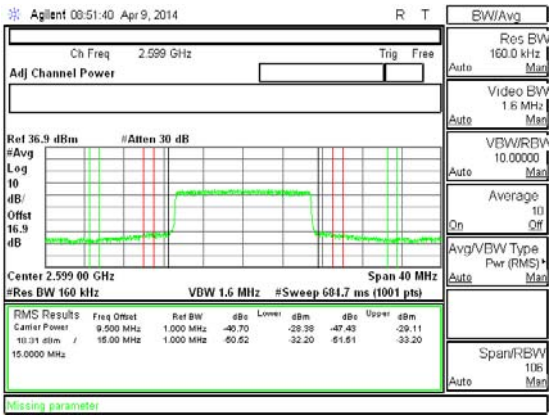 Band LTE41 15MHz EM QPSK FRB.gif

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE41 10MHz 16QAM	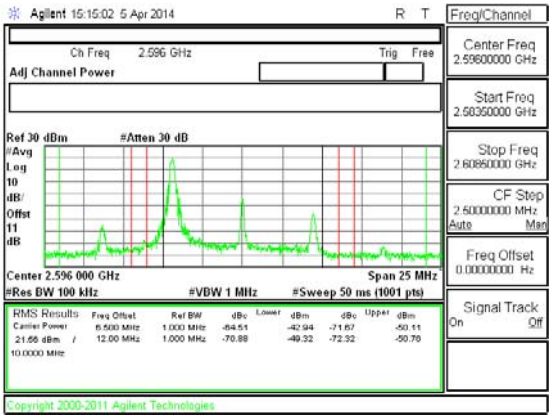 Band LTE41 10MHz EM 16QAM 1RB.gif	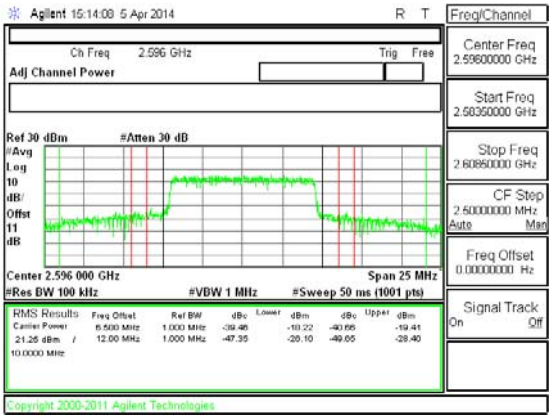 Band LTE41 10MHz EM 16QAM FRB.gif
Band LTE41 10MHz QPSK	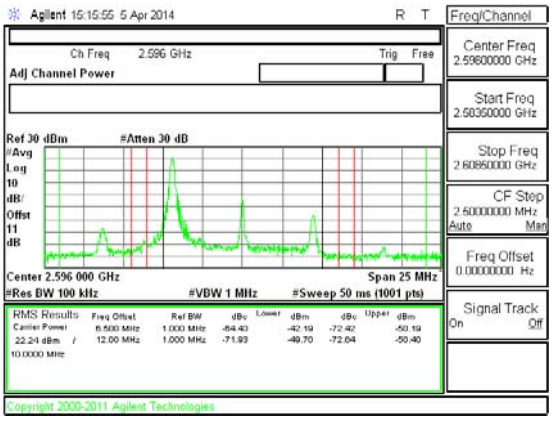 Band LTE41 10MHz EM QPSK 1RB.gif	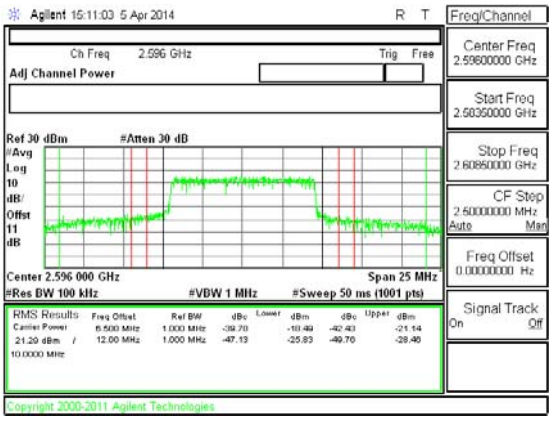 Band LTE41 10MHz EM QPSK FRB.gif

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE41 5MHz 16QAM	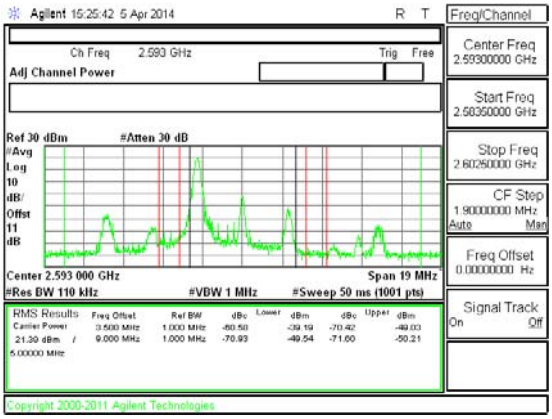 Band LTE41 5MHz EM 16QAM Mid Channel 1RB.gif	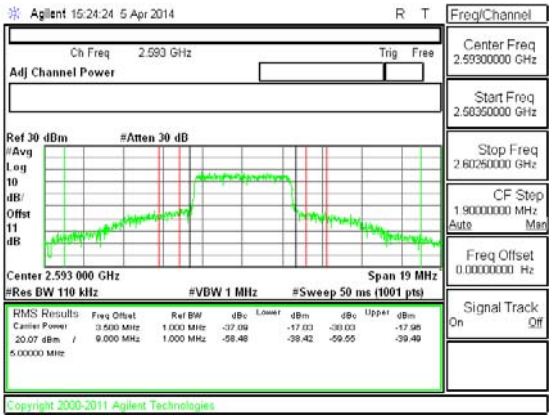 Band LTE41 5MHz EM 16QAM Mid Channel FRB.gif
Band LTE41 5MHz QPSK	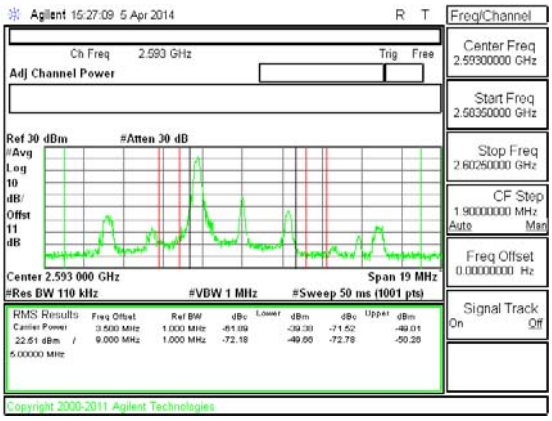 Band LTE41 5MHz EM QPSK Mid Channel 1RB.gif	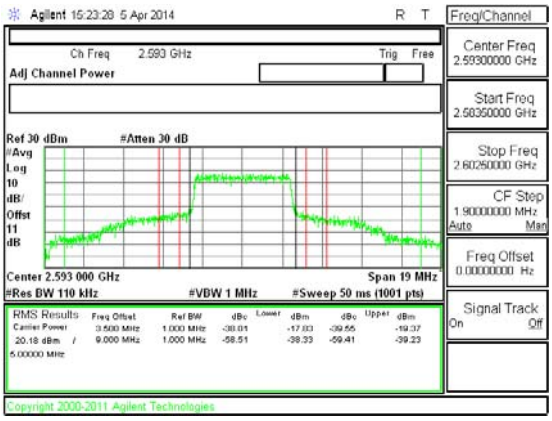 Band LTE41 5MHz EM QPSK Mid Channel FRB.gif

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

RESULTS

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.3.1. OUT OF BAND EMISSIONS RESULT

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE41	20	QPSK	2506	-34.25	-13	-21.25
			2593	-34.47	-13	-21.47
			2680	-35.35	-13	-22.35
		16QAM	2506	-39.53	-13	-26.53
			2593	-26.78	-13	-13.78
			2680	-35.64	-13	-22.64

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE41	15	QPSK	2503.5	-29.49	-13	-16.49
			2593	-34.04	-13	-21.04
			2682.5	-33.49	-13	-20.49
		16QAM	2503.5	-28.86	-13	-15.86
			2593	-33.08	-13	-20.08
			2682.5	-29.73	-13	-16.73

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE41	10	QPSK	2501	-48.6	-13	-35.6
			2593	-28.64	-13	-15.64
			2685	-30.39	-13	-17.39
		16QAM	2501	-25.67	-13	-12.67
			2593	-28.82	-13	-15.82
			2685	-32.4	-13	-19.4

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE41	5	QPSK	2498.5	-41.03	-13	-28.03
			2593	-28.19	-13	-15.19
			2687.5	-27.02	-13	-14.02
		16QAM	2498.5	-46.03	-13	-33.03
			2593	-28.19	-13	-15.19

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

			2687.5	-26.74	-13	-13.74

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM850	GPRS	824.2	-27.03	-13	-14.03
		836.6	-25.89	-13	-12.89
		848.8	-26.46	-13	-13.46
	EGPRS	824.2	-26.39	-13	-13.39
		836.6	-25.27	-13	-12.27
		848.8	-25.58	-13	-12.58
GSM1900	GMSK	1850.2	-25.96	-13	-12.96
		1880	-26.36	-13	-13.36
		1909.8	-26.4	-13	-13.4
	GPRS	1850.2	-25.09	-13	-12.09
		1880	-26.11	-13	-13.11
		1909.8	-25.17	-13	-12.17
Band 2	REL99	1852.4	-36.29	-13	-23.29
		1880	-35.5	-13	-22.5
		1907.6	-36.31	-13	-23.31
	HSDPA	1852.4	-27.06	-13	-14.06
		1880	-25.85	-13	-12.85
		1907.6	-25.09	-13	-12.09

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.3.2. OUT OF BAND EMISSIONS PLOTS

Band LTE41 20MHz	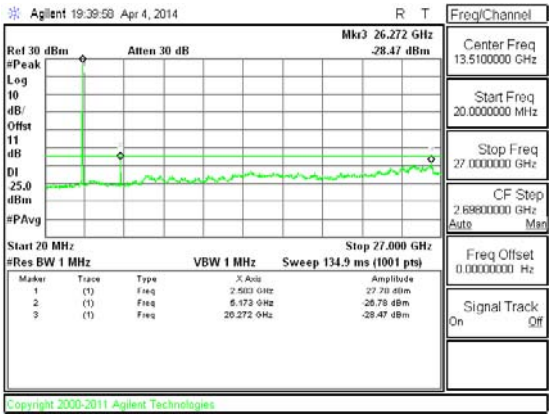 Band LTE41 20MHz CSE 16QAM Mid channel	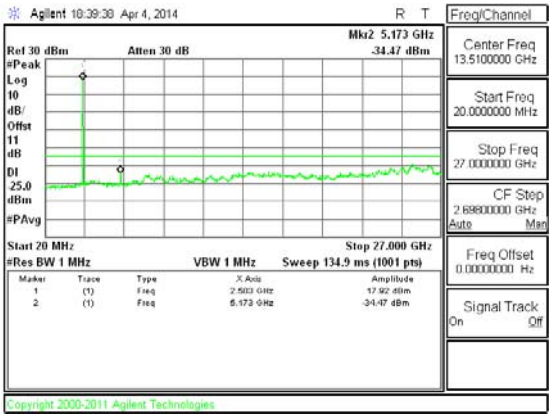 Band LTE41 20MHz CSE QPSK Mid channel
Band LTE41 15MHz	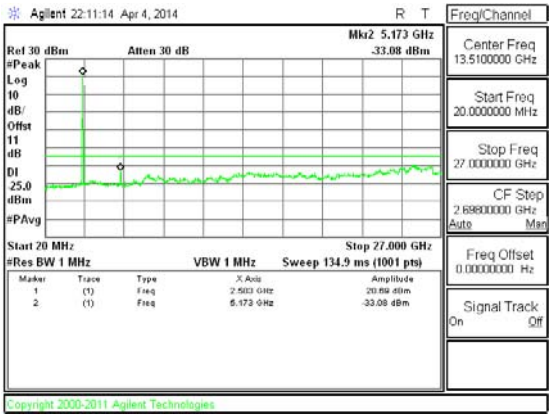 Band LTE41 15MHz CSE 16QAM Mid channel	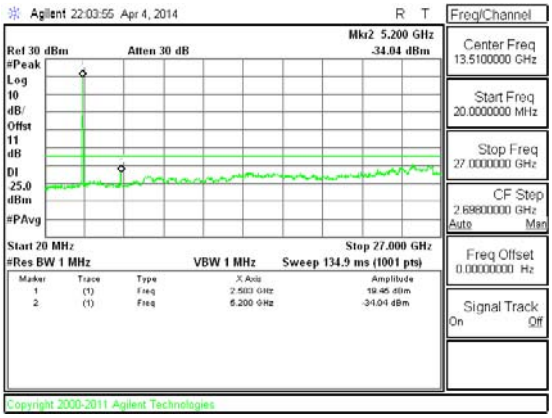 Band LTE41 15MHz CSE QPSK Mid channel

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE41 10MHz	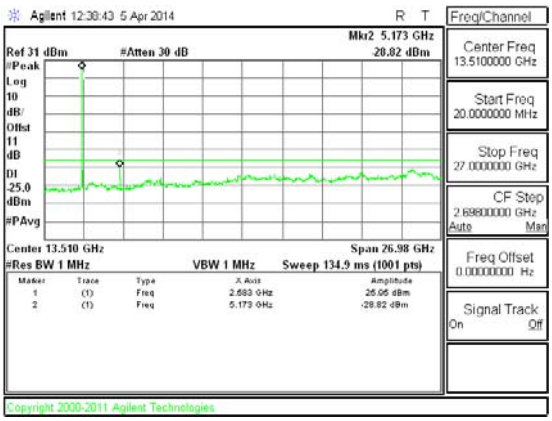 Band LTE41 10MHz CSE 16QAM Mid channel	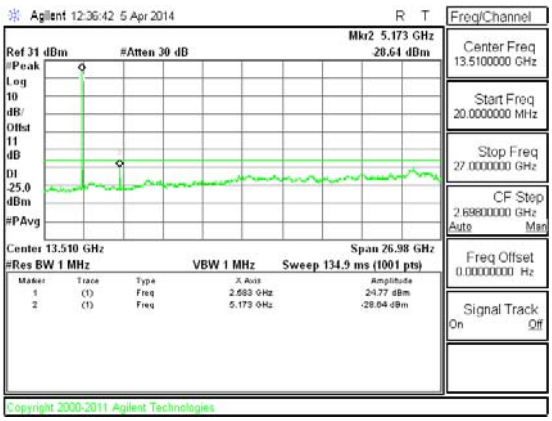 Band LTE41 10MHz CSE QPSK Mid channel
Band LTE41 5MHz	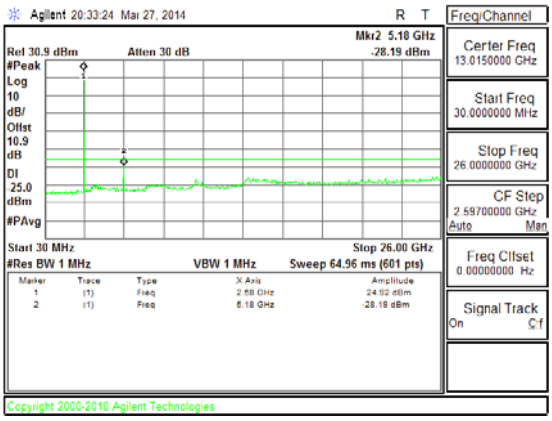 Band LTE41 5MHz CSE 16QAM Mid channel	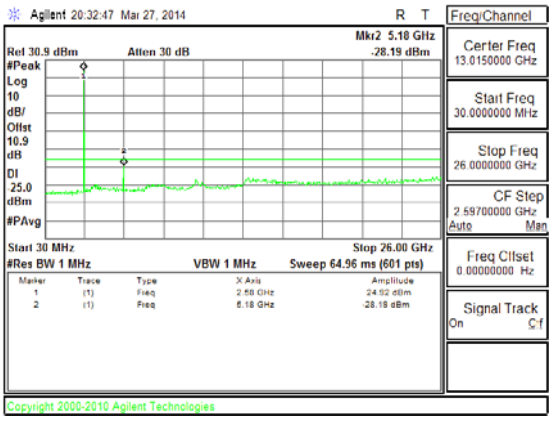 Band LTE41 5MHz CSE QPSK Mid channel

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band Band 2 HSDPA	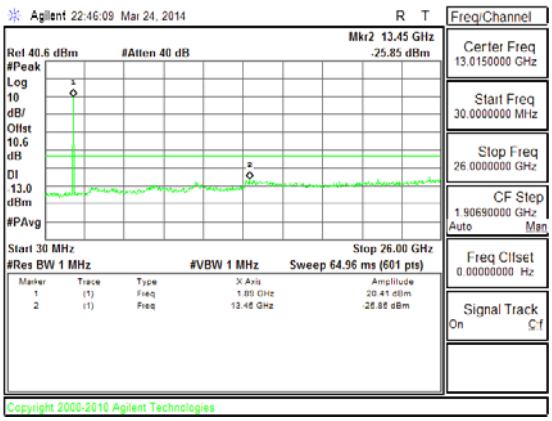 Band WCDMA B2 HSDPA CSE	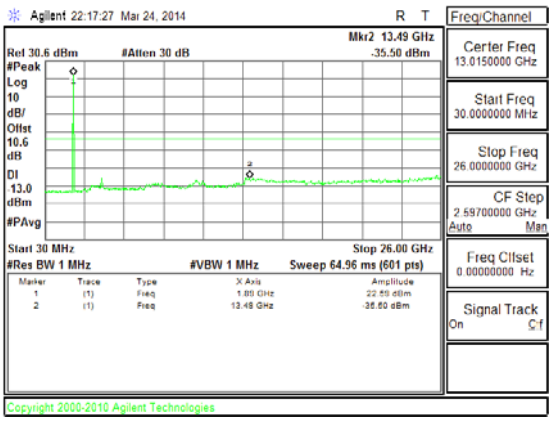 Band WCDMA B2 REL99 CSE
Band GSM1900	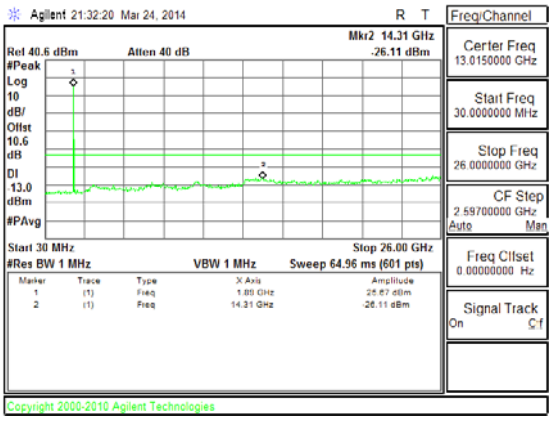 Band GSM1900 EGPRS CSE Mid channel	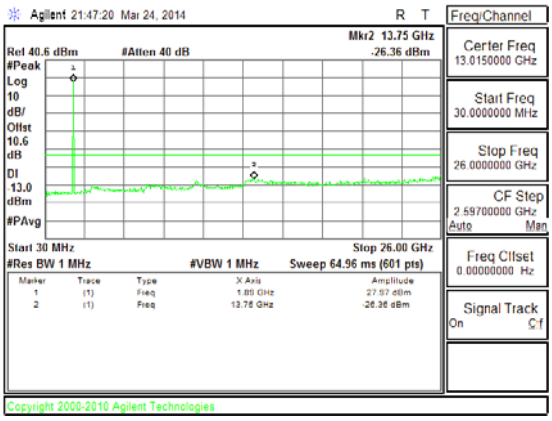 Band GSM1900 GPRS CSE Mid channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band GSM850 EGPRS	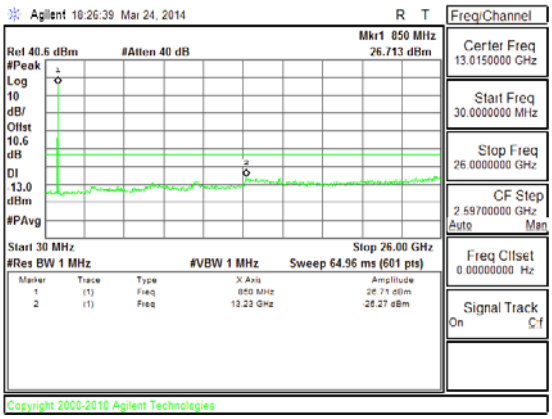 Band GSM850 EGPRS CSE Mid channel	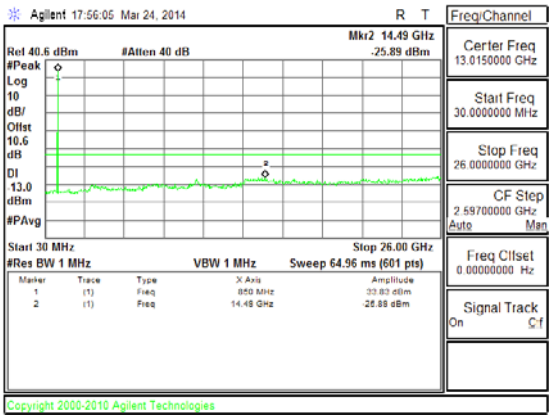 Band GSM850 GPRS CSE Mid channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, and §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ±2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

RESULTS

See the following pages.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.4.1. FREQUENCY STABILITY RESULTS

GPRS 850 CELL BAND, – MID CHANNEL190, Frequency 836.6MHz

Reference Frequency: Cell Mid Channel 836.6 MHz @ 20ºC Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measureed with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	50	836.600032	0.000	2.5
3.70	40	836.600030	0.002	2.5
3.70	30	836.600029	0.004	2.5
3.70	***20***	***836.600032***	***0***	***2.5***
3.70	10	836.600030		2.5
3.70	0	836.600035	-0.004	2.5
3.70	-10	836.600029	0.004	2.5
3.70	-20	836.600028	0.005	2.5
3.70	-30	836.600030	0.002	2.5

Reference Frequency: Cell Mid Channel 836.6 MHz @ 20ºC Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measureed with Time Elapse		
			Delta (ppm)	Limit (ppm)
3.70	***20***	***836.600008***	***0.00000***	***2.5***
4.20	20	836.600009	*-0.00120*	2.5
3.30	20	836.600007	*0.00120*	2.5

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

GPRS 1900, Channel 661 Freq: 1880MHz– MID CHANNELl

Reference Frequency: PCS Mid Channel 1880MHz @ 20°C Limit: to stay +- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measureed with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	50	1880.000077	-0.001	2.5
3.70	40	1880.000071	0.002	2.5
3.70	30	1880.000069	0.003	2.5
3.70	***20***	***1880.000075***	***0***	***2.5***
3.70	10	1880.000077	-0.001	2.5
3.70	0	1880.000073	0.001	2.5
3.70	-10	1880.000072	0.002	2.5
3.70	-20	1880.000073	0.001	2.5
3.70	-30	1880.000075	0.000	2.5

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C Limit: to stay +- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measureed with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	***20***	***1880.000075***	***0***	***2.5***
4.20	20	1880.000071	*0.002*	2.5
3.30	20	1880.000076	*-0.001*	2.5

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

LTE BAND 41 – MID CHANNEL

Reference Frequency: Cellular Mid Channel 2592.999996MHz @ 20°C Limit: to stay +- 2.5 ppm = 6482.250 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measureed with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	50	2592.90010	-0.029	2.5
3.70	40	2592.90011	-0.032	2.5
3.70	30	2592.90010	-0.029	2.5
3.70	***20***	***2592.90003***	***0***	***2.5***
3.70	10	2592.90007	-0.017	2.5
3.70	0	2592.90012	-0.036	2.5
3.70	-10	2592.90009	-0.025	2.5
3.70	-20	2592.90009	-0.025	2.5
3.70	-30	2592.90008	-0.021	2.5

Reference Frequency: Cellular Mid Channel 2592.999996 MHz @ 20°C Limit: to stay +- 2.5 ppm = 6482.250 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measureed with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	***20***	***2592.90009***	***0***	***2.5***
4.20	20	2592.90008	*0.004*	2.5
3.30	20	2592.90009	*0.000*	2.5
End Volt(3.2)	20	2592.90007	*0.008*	2.5

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232.

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17

11.1.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 2	REL99	9262	1852.4	22.3	169.82
		9400	1880	19.74	94.19
		9538	1907.6	20.56	113.76
	HSDPA	9262	1852.4	21.07	127.94
		9400	1880	18.57	71.94
		9538	1907.6	19.24	83.95

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM1900	GPRS	512	1850.2	28.44	698.23
		661	1880	25.55	358.92
		810	1909.8	25.5	354.81
	EGPRS	512	1850.2	26.35	431.52
		661	1880	24.06	254.68
		810	1909.8	24.28	267.92

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM850	GPRS	128	824.2	26.221	418.89
		190	836.6	24.511	282.55
		251	848.8	25.831	382.91
	EGPRS	128	824.2	20.093	102.16
		190	836.6	19.647	92.19
		251	848.8	20.123	102.87

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.1.2. LTE ERP/EIRP Results

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE41	20	QPSK	1/0	2506	20.178	104.18
			1/0	2593	20.575	114.16
			1/0	2680	19.963	99.15
		16QAM	1/0	2506	19.658	92.43
			1/0	2593	20.575	114.16
			1/0	2680	18.973	78.94

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE41	15	QPSK	1/0	2503.5	20.008	100.18
			1/0	2593	18.775	75.42
			1/0	2682.5	20.633	115.69
		16QAM	1/0	2503.5	18.808	76
			1/0	2593	20.075	101.74
			1/0	2682.5	19.533	89.8

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE41	10	QPSK	1/0	2501	20.108	102.52
			1/0	2593	20.205	104.83
			1/0	2685	20.733	118.39
		16QAM	1/0	2501	18.508	70.93
			1/0	2593	19.705	93.43
			1/0	2685	20.233	105.51

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE41	5	QPSK	1/0	2498.5	19.058	80.5
			1/0	2593	20.575	114.16
			1/0	2687.5	18.483	70.52
		16QAM	1/0	2498.5	18.398	69.15
			1/0	2593	19.255	84.24
			1/0	2687.5	18.013	63.28

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.1.3. ERP/EIRP Data

High Frequency Fundamental Measurement
Compliance Certification Services Chamber C

Company: Samsung
Project #: 14I17354
Date: 04/05/14
Test Engineer: S.Tran
Configuration: EUT Only
Mode: LTE Band 41, 20MHz, 16QAM

Band

LTE41

20MHz

16QAM

Test Equipment:
Receiving: Horn T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	N
Low Ch								
2.506	8.1	V	1.07	9.48	16.51	33.0	-16.5	
2.506	11.3	H	1.07	9.48	19.66	33.0	-13.3	
Mid Ch								
2.593	7.8	V	1.10	9.51	16.23	33.0	-16.8	
2.593	12.2	H	1.10	9.51	20.58	33.0	-12.4	
High Ch								
2.680	9.9	V	1.20	9.53	18.26	33.0	-14.7	
2.680	10.6	H	1.20	9.53	18.97	33.0	-14.0	

Rev. 3.17.11

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

LTE41

20MHz

QPSK

High Frequency Fundamental Measurement
Compliance Certification Services Chamber C

Company: Samsung
Project #: 14I17354
Date: 04/05/14
Test Engineer: S.Tran
Configuration: EUT Only
Mode: LTE Band 41, 20MHz, QPSK

Test Equipment:
Receiving: Horn T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	N
Low Ch								
2.506	8.6	V	1.07	9.48	17.00	33.0	-16.0	
2.506	11.8	H	1.07	9.48	20.18	33.0	-12.8	
Mid Ch								
2.593	8.7	V	1.10	9.51	17.14	33.0	-15.9	
2.593	12.2	H	1.10	9.51	20.58	33.0	-12.4	
High Ch								
2.680	10.8	V	1.20	9.53	19.16	33.0	-13.8	
2.680	11.6	H	1.20	9.53	19.96	33.0	-13.0	

Rev. 3.17.11

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

LTE41

15MHz

16QAM

High Frequency Fundamental Measurement
Compliance Certification Services Chamber C

Company: Samsung
Project #: 14I17354
Date: 04/04/14
Test Engineer: K. Kedida
Configuration: EUT Only
Mode: LTE Band 41, 15MHz, 16QAM

Test Equipment:
Receiving: Horn T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	M
Low Ch								
2.504	10.3	V	1.07	9.48	18.71	33.0	-14.3	
2.504	10.4	H	1.07	9.48	18.81	33.0	-14.2	
Mid Ch								
2.593	8.8	V	1.10	9.51	17.21	33.0	-15.8	
2.593	11.7	H	1.10	9.51	20.08	33.0	-12.9	
High Ch								
2.683	10.1	V	1.20	9.53	18.43	33.0	-14.6	
2.683	11.2	H	1.20	9.53	19.53	33.0	-13.5	

Rev. 3.17.11

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

LTE41

15MHz

QPSK

High Frequency Fundamental Measurement
Compliance Certification Services Chamber C

Company: Samsung
Project #: 14I17354
Date: 04/04/14
Test Engineer: K. Kedida
Configuration: EUT Only
Mode: LTE Band 41, 15MHz, QPSK

Test Equipment:
Receiving: Horn T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	M
Low Ch								
2.504	10.9	V	1.07	9.48	19.31	33.0	-13.7	
2.504	11.6	H	1.07	9.48	20.01	33.0	-13.0	
Mid Ch								
2.593	9.5	V	1.10	9.51	17.91	33.0	-15.1	
2.593	10.4	H	1.10	9.51	18.78	33.0	-14.2	
High Ch								
2.683	10.6	V	1.20	9.53	18.93	33.0	-14.1	
2.683	12.3	H	1.20	9.53	20.63	33.0	-12.4	

Rev. 3.17.11

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

LTE41

10MHz

16QAM

High Frequency Fundamental Measurement
Compliance Certification Services Chamber C

Company: Samsung
Project #: 14I17354
Date: 04/04/14
Test Engineer: K. Kedida
Configuration: EUT Only
Mode: LTE Band 41, 10MHz, 16QAM

Test Equipment:
Receiving: Horn T119, and Chamber B SMA Cables
Substitution: Horn T59 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	M
Low Ch								
2.501	10.1	V	1.07	9.48	18.51	33.0	-14.5	
2.501	9.8	H	1.07	9.48	18.21	33.0	-14.8	
Mid Ch								
2.593	7.6	V	1.10	9.51	16.01	33.0	-17.0	
2.593	11.3	H	1.10	9.51	19.71	33.0	-13.3	
High Ch								
2.685	9.7	V	1.20	9.53	18.04	33.0	-15.0	
2.685	11.9	H	1.20	9.53	20.23	33.0	-12.8	

Rev. 3.17.11

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

LTE41

10MHz

QPSK

High Frequency Fundamental Measurement
Compliance Certification Services Chamber D

Company: Samsung
Project #: 14I17354
Date: 04/04/14
Test Engineer: K. Kedida
Configuration: EUT Only
Mode: LTE Band 41, 10MHz, QPSK

Test Equipment:
Receiving: Horn T119, and Chamber B SMA Cables
Substitution: Horn T59 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	N
Low Ch								
2.501	11.3	V	1.07	9.48	19.71	33.0	-13.3	
2.501	11.7	H	1.07	9.48	20.11	33.0	-12.9	
Mid Ch								
2.593	10.1	V	1.10	9.51	18.51	33.0	-14.5	
2.593	11.8	H	1.10	9.51	20.21	33.0	-12.8	
High Ch								
2.685	10.8	V	1.20	9.53	19.13	33.0	-13.9	
2.685	12.4	H	1.20	9.53	20.73	33.0	-12.3	

Rev. 3.17.11

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

LTE41

5MHz

16QAM

High Frequency Fundamental Measurement
Compliance Certification Services Chamber C

Company: Samsung
Project #: 14I17354
Date: 04/05/14
Test Engineer: S.Tran
Configuration: EUT Only
Mode: LTE Band 41, 5MHz, 16QAM

Test Equipment:
Receiving: Horn T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	N
Low Ch								
2.499	9.7	V	1.07	9.48	18.08	33.0	-14.9	
2.499	10.0	H	1.07	9.48	18.40	33.0	-14.6	
Mid Ch								
2.593	9.6	V	1.10	9.51	18.01	33.0	-15.0	
2.593	10.9	H	1.10	9.51	19.26	33.0	-13.7	
High Ch								
2.688	9.7	V	1.20	9.53	18.01	33.0	-15.0	
2.688	9.6	H	1.20	9.53	17.93	33.0	-15.1	

Rev. 3.17.11

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

LTE41

5MHz

QPSK

High Frequency Fundamental Measurement
Compliance Certification Services Chamber C

Company: Samsung
Project #: 14I17354
Date: 04/05/14
Test Engineer: S.Tran
Configuration: EUT Only
Mode: LTE Band 41, 5MHz, QPSK

Test Equipment:
Receiving: Horn T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 8ft SMA Cable Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	M
Low Ch								
2.499	10.6	V	1.07	9.48	18.98	33.0	-14.0	
2.499	10.7	H	1.07	9.48	19.06	33.0	-13.9	
Mid Ch								
2.593	9.0	V	1.10	9.51	17.36	33.0	-15.6	
2.593	12.2	H	1.10	9.51	20.58	33.0	-12.4	
High Ch								
2.688	9.8	V	1.20	9.53	18.08	33.0	-14.9	
2.688	10.2	H	1.20	9.53	18.48	33.0	-14.5	

Rev. 3.17.11

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

Band 2

HSDPA

High Frequency Fundamental Measurement
Compliance Certification Services Chamber C

Company: Samsung
Project #: 14I17354
Date: 03/26/14
Test Engineer: K.Kedida
Configuration: EUT ONLY, X Position
Mode: HSDPA 1900MHz

Test Equipment:
Receiving: T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 4ft SMA Cable (244639001) Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1.852	7.5	V	0.85	7.92	14.57	33.0	-18.4	
1.852	14.0	H	0.85	7.92	21.07	33.0	-11.9	
Mid Ch								
1.880	7.2	V	0.85	7.92	14.22	33.0	-18.8	
1.880	11.5	H	0.85	7.92	18.57	33.0	-14.4	
High Ch								
1.908	7.0	V	0.85	7.92	14.02	33.0	-19.0	
1.908	12.2	H	0.85	7.92	19.24	33.0	-13.8	

Rev. 3.17.11

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

Band 2

REL99

High Frequency Fundamental Measurement
Compliance Certification Services Chamber C

Company: Samsung
Project #: 14I17354
Date: 03/26/14
Test Engineer: K.Kedida
Configuration: EUT ONLY, X Position
Mode: REL99 1900MHz

Test Equipment:
Receiving: T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 4ft SMA Cable (244639001) Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1.852	8.9	V	0.85	7.92	15.97	33.0	-17.0	
1.852	15.2	H	0.85	7.92	22.30	33.0	-10.7	
Mid Ch								
1.880	8.1	V	0.85	7.92	15.12	33.0	-17.9	
1.880	12.7	H	0.85	7.92	19.74	33.0	-13.3	
High Ch								
1.907	7.6	V	0.85	7.92	14.67	33.0	-18.3	
1.907	13.5	H	0.85	7.92	20.56	33.0	-12.4	

Rev. 3.17.11

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

GSM1900

EGPRS

High Frequency Fundamental Measurement
Compliance Certification Services Chamber C

Company: Samsung
Project #: 14I17354
Date: 03/26/14
Test Engineer: K.Kedida
Configuration: EUT ONLY, Y Position
Mode: EGPRS 1900MHz

Test Equipment:
Receiving: T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 4ft SMA Cable (244639001) Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1.850	14.3	V	0.85	7.90	21.35	33.0	-11.7	
1.850	19.3	H	0.85	7.90	26.35	33.0	-6.7	
Mid Ch								
1.880	13.9	V	0.85	7.90	20.90	33.0	-12.1	
1.880	17.0	H	0.85	7.90	24.06	33.0	-8.9	
High Ch								
1.910	13.1	V	0.85	7.80	20.05	33.0	-13.0	
1.910	17.3	H	0.85	7.80	24.28	33.0	-8.7	

Rev. 3.17.11

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

GSM1900

GPRS

High Frequency Fundamental Measurement
Compliance Certification Services Chamber C

Company: Samsung
Project #: 14I17354
Date: 03/26/14
Test Engineer: K.Kedida
Configuration: EUT ONLY, Y Position
Mode: GPRS 1900MHz

Test Equipment:
Receiving: T119, and Chamber C SMA Cables
Substitution: Horn T59 Substitution, 4ft SMA Cable (244639001) Warehouse

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1.850	15.7	V	0.85	7.90	22.78	33.0	-10.2	
1.850	21.4	H	0.85	7.90	28.44	33.0	-4.6	
Mid Ch								
1.880	15.3	V	0.85	7.90	22.37	33.0	-10.6	
1.880	18.5	H	0.85	7.90	25.55	33.0	-7.5	
High Ch								
1.910	14.5	V	0.85	7.80	21.43	33.0	-11.6	
1.910	18.6	H	0.85	7.80	25.50	33.0	-7.5	

Rev. 3.17.11

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

GSM850

EGPRS

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber C

Company: Samsung
Project #: 13I17354
Date: 4/2/2014
Test Engineer: S.Tran
Configuration: EUT
Mode: EGPRS 850

Test Equipment:
Receiving: Sunol T185, and 3m Chamber N-type Cable (Setup this one for testing EUT)
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	12.24	V	0.5	0.0	11.74	38.5	-26.7	
824.20	20.59	H	0.5	0.0	20.09	38.5	-18.4	
Mid Ch								
836.60	12.09	V	0.5	0.0	11.59	38.5	-26.9	
836.60	20.15	H	0.5	0.0	19.65	38.5	-18.8	
High Ch								
848.80	13.40	V	0.5	0.0	12.91	38.5	-25.5	
848.80	20.62	H	0.5	0.0	20.12	38.5	-18.3	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

GSM850

GPRS

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber C

Company: Samsung
Project #: 13I17354
Date: 4/2/2014
Test Engineer: S.Tran
Configuration: EUT
Mode: GPRS 850

Test Equipment:
Receiving: Sunol T185, and 3m Chamber N-type Cable (Setup this one for testing EUT)
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	14.65	V	0.5	0.0	14.15	38.5	-24.3	
824.20	26.72	H	0.5	0.0	26.22	38.5	-12.2	
Mid Ch								
836.60	14.44	V	0.5	0.0	13.94	38.5	-24.5	
836.60	25.01	H	0.5	0.0	24.51	38.5	-13.9	
High Ch								
848.80	15.66	V	0.5	0.0	15.16	38.5	-23.3	
848.80	26.33	H	0.5	0.0	25.83	38.5	-12.6	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238

LIMIT

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RESULTS

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.2.1. SPURIOUS RADIATION Data

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17354
Date: 04/02/14
Test Engineer: K.Kedida
Configuration: X Position, w/AC Charger and headphones
Mode: TX, LTE band 41, 20MHz, 16QAM

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T145 8449B	Filter 1	Part 27

Band
LTE41
20MHz
16QAM

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, (2506 MHz)									
5.012	-26.0	V	3.0	28.9	1.0	-53.8	-25.0	-28.8	
7.518	-23.4	V	3.0	26.3	1.0	-48.7	-25.0	-23.7	
10.553	-18.8	V	3.0	22.9	1.0	-40.7	-25.0	-15.7	
5.012	-25.6	H	3.0	28.9	1.0	-53.5	-25.0	-28.5	
7.518	-22.5	H	3.0	26.3	1.0	-47.9	-25.0	-22.9	
10.553	-18.4	H	3.0	22.9	1.0	-40.3	-25.0	-15.3	
Mid Ch, (2593 MHz)									
5.186	-25.2	V	3.0	28.7	1.0	-52.9	-25.0	-27.9	
7.779	-22.1	V	3.0	26.0	1.0	-47.1	-25.0	-22.1	
10.372	-20.1	V	3.0	23.0	1.0	-42.1	-25.0	-17.1	
5.186	-24.8	H	3.0	28.7	1.0	-52.5	-25.0	-27.5	
7.779	-21.1	H	3.0	26.0	1.0	-46.1	-25.0	-21.1	
10.372	-18.9	H	3.0	23.0	1.0	-40.9	-25.0	-15.9	
High Ch, (2680 MHz)									
5.360	-9.2	V	3.0	28.5	1.0	-36.7	-25.0	-11.7	
8.040	-22.2	V	3.0	25.6	1.0	-46.8	-25.0	-21.8	
10.720	-18.9	V	3.0	22.9	1.0	-40.8	-25.0	-15.8	
5.360	-26.5	H	3.0	28.5	1.0	-54.0	-25.0	-29.0	
8.040	-20.4	H	3.0	25.6	1.0	-45.1	-25.0	-20.1	
10.720	-19.3	H	3.0	22.9	1.0	-41.2	-25.0	-16.2	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17354
Date: 04/02/14
Test Engineer: K.Kedida
Configuration: X Position, w/AC Charger and headphones
Mode: TX, LTE band 41, 20MHz, QPSK

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T145 8449B	Filter 1	Part 27

Band: LTE41 20MHz QPSK

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, (2506 MHz)									
5.012	-25.6	V	3.0	28.9	1.0	-53.4	-25.0	-28.4	
7.518	-23.0	V	3.0	26.3	1.0	-48.3	-25.0	-23.3	
10.553	-18.6	V	3.0	22.9	1.0	-40.5	-25.0	-15.5	
5.012	-25.2	H	3.0	28.9	1.0	-53.1	-25.0	-28.1	
7.518	-22.2	H	3.0	26.3	1.0	-47.5	-25.0	-22.5	
10.553	-17.8	H	3.0	22.9	1.0	-39.8	-25.0	-14.8	
Mid Ch, (2593 MHz)									
5.186	-24.5	V	3.0	28.7	1.0	-52.3	-25.0	-27.3	
7.779	-21.3	V	3.0	26.0	1.0	-46.3	-25.0	-21.3	
10.372	-19.2	V	3.0	23.0	1.0	-41.2	-25.0	-16.2	
5.186	-24.1	H	3.0	28.7	1.0	-51.9	-25.0	-26.9	
7.779	-21.0	H	3.0	26.0	1.0	-45.9	-25.0	-20.9	
10.372	-17.8	H	3.0	23.0	1.0	-39.8	-25.0	-14.8	
High Ch, (2680 MHz)									
5.360	-27.0	V	3.0	28.5	1.0	-54.6	-25.0	-29.6	
8.040	-21.5	V	3.0	25.6	1.0	-46.1	-25.0	-21.1	
10.720	-18.1	V	3.0	22.9	1.0	-40.0	-25.0	-15.0	
5.360	-26.1	H	3.0	28.5	1.0	-53.7	-25.0	-28.7	
8.040	-19.6	H	3.0	25.6	1.0	-44.3	-25.0	-19.3	
10.720	-18.5	H	3.0	22.9	1.0	-40.4	-25.0	-15.4	

Rev. 03.03.09

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company:	Samsung
Project #:	14I17354
Date:	04/02/14
Test Engineer:	K.Kedida
Configuration:	X Position, w/AC Charger and headphones
Mode:	TX, LTE band 41, 15MHz, 16QAM

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T145 8449B	Filter 1	Part 27

Band
LTE41
15MHz
16QAM

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, (2503.5 MHz)									
5.007	-25.4	V	3.0	28.9	1.0	-53.3	-25.0	-28.3	
7.511	-23.3	V	3.0	26.3	1.0	-48.7	-25.0	-23.7	
10.014	-19.9	V	3.0	23.1	1.0	-42.0	-25.0	-17.0	
5.007	-25.7	H	3.0	28.9	1.0	-53.6	-25.0	-28.6	
7.511	-22.1	H	3.0	26.3	1.0	-47.4	-25.0	-22.4	
10.014	-19.4	H	3.0	23.1	1.0	-41.5	-25.0	-16.5	
Mid Ch, (2593 MHz)									
5.186	-25.0	V	3.0	28.7	1.0	-52.7	-25.0	-27.7	
7.779	-22.0	V	3.0	26.0	1.0	-47.0	-25.0	-22.0	
10.372	-19.4	V	3.0	23.0	1.0	-41.4	-25.0	-16.4	
5.186	-25.3	H	3.0	28.7	1.0	-53.0	-25.0	-28.0	
7.779	-22.2	H	3.0	26.0	1.0	-47.2	-25.0	-22.2	
10.372	-19.4	H	3.0	23.0	1.0	-41.4	-25.0	-16.4	
High Ch, (2682.5 MHz)									
5.365	-26.5	V	3.0	28.5	1.0	-54.0	-25.0	-29.0	
8.052	-21.3	V	3.0	25.6	1.0	-46.0	-25.0	-21.0	
10.730	-19.6	V	3.0	22.9	1.0	-41.5	-25.0	-16.5	
5.365	-26.2	H	3.0	28.5	1.0	-53.7	-25.0	-28.7	
8.052	-21.4	H	3.0	25.6	1.0	-46.0	-25.0	-21.0	
10.730	-18.1	H	3.0	22.9	1.0	-40.0	-25.0	-15.0	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17354
Date: 04/02/14
Test Engineer: K.Kedida
Configuration: X Position, w/AC Charger and headphones
Mode: TX, LTE band 41, 15MHz, QPSK

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T145 8449B	Filter 1	Part 27

Band: LTE41 15MHz QPSK

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, (2503.5 MHz)									
5.007	-24.8	V	3.0	28.9	1.0	-52.7	-25.0	-27.7	
7.511	-22.3	V	3.0	26.3	1.0	-47.6	-25.0	-22.6	
10.014	-19.5	V	3.0	23.1	1.0	-41.6	-25.0	-16.6	
5.007	-24.8	H	3.0	28.9	1.0	-52.7	-25.0	-27.7	
7.511	-21.5	H	3.0	26.3	1.0	-46.8	-25.0	-21.8	
10.014	-18.8	H	3.0	23.1	1.0	-40.9	-25.0	-15.9	
Mid Ch, (2593 MHz)									
5.186	-24.6	V	3.0	28.7	1.0	-52.3	-25.0	-27.3	
7.779	-21.7	V	3.0	26.0	1.0	-46.7	-25.0	-21.7	
10.372	-19.0	V	3.0	23.0	1.0	-41.0	-25.0	-16.0	
5.186	-24.5	H	3.0	28.7	1.0	-52.2	-25.0	-27.2	
7.779	-21.7	H	3.0	26.0	1.0	-46.7	-25.0	-21.7	
10.372	-18.8	H	3.0	23.0	1.0	-40.8	-25.0	-15.8	
High Ch, (2682.5 MHz)									
5.365	-25.9	V	3.0	28.5	1.0	-53.5	-25.0	-28.5	
8.052	-20.9	V	3.0	25.6	1.0	-45.6	-25.0	-20.6	
10.730	-18.9	V	3.0	22.9	1.0	-40.8	-25.0	-15.8	
5.365	-25.3	H	3.0	28.5	1.0	-52.8	-25.0	-27.8	
8.052	-21.0	H	3.0	25.6	1.0	-45.6	-25.0	-20.6	
10.730	-17.4	H	3.0	22.9	1.0	-39.2	-25.0	-14.2	

Rev. 03.03.09

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17354
Date: 04/02/14
Test Engineer: K.Kedida
Configuration: X Position, w/AC Charger and headphones
Mode: TX, LTE band 41, 10MHz, 16QAM

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T145 8449B	Filter 1	Part 27

Band: LTE41, 10MHz, 16QAM

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, (2501 MHz)									
5.002	-26.5	V	3.0	28.9	1.0	-54.4	-25.0	-29.4	
7.503	-23.3	V	3.0	26.3	1.0	-48.7	-25.0	-23.7	
10.004	-20.7	V	3.0	23.1	1.0	-42.8	-25.0	-17.8	
5.002	-25.2	H	3.0	28.9	1.0	-53.1	-25.0	-28.1	
7.503	-21.9	H	3.0	26.3	1.0	-47.2	-25.0	-22.2	
10.004	-19.7	H	3.0	23.1	1.0	-41.8	-25.0	-16.8	
Mid Ch, (2593 MHz)									
5.186	-25.6	V	3.0	28.7	1.0	-53.3	-25.0	-28.3	
7.779	-22.5	V	3.0	26.0	1.0	-47.5	-25.0	-22.5	
10.372	-20.1	V	3.0	23.0	1.0	-42.1	-25.0	-17.1	
5.186	-24.6	H	3.0	28.7	1.0	-52.3	-25.0	-27.3	
7.779	-22.1	H	3.0	26.0	1.0	-47.1	-25.0	-22.1	
10.372	-18.5	H	3.0	23.0	1.0	-40.5	-25.0	-15.5	
High Ch, (2685 MHz)									
5.375	-26.2	V	3.0	28.5	1.0	-53.8	-25.0	-28.8	
8.055	-22.4	V	3.0	25.6	1.0	-47.1	-25.0	-22.1	
10.740	-18.3	V	3.0	22.9	1.0	-40.2	-25.0	-15.2	
5.375	-26.3	H	3.0	28.5	1.0	-53.9	-25.0	-28.9	
8.055	-22.1	H	3.0	25.6	1.0	-46.7	-25.0	-21.7	
10.740	-19.1	H	3.0	22.9	1.0	-41.0	-25.0	-16.0	

Rev. 03.03.09

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17354
Date: 04/02/14
Test Engineer: K.Kedida
Configuration: X Position, w/AC Charger and headphones
Mode: TX, LTE band 41, 10MHz, QPSK

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T145 8449B	Filter 1	Part 27

Band: LTE41 10MHz QPSK

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, (2501 MHz)									
5.002	-26.0	V	3.0	28.9	1.0	-53.9	-25.0	-28.9	
7.503	-22.3	V	3.0	26.3	1.0	-47.6	-25.0	-22.6	
10.004	-20.3	V	3.0	23.1	1.0	-42.4	-25.0	-17.4	
5.002	-24.5	H	3.0	28.9	1.0	-52.4	-25.0	-27.4	
7.503	-21.2	H	3.0	26.3	1.0	-46.6	-25.0	-21.6	
10.004	-19.0	H	3.0	23.1	1.0	-41.1	-25.0	-16.1	
Mid Ch, (2593 MHz)									
5.186	-25.0	V	3.0	28.7	1.0	-52.7	-25.0	-27.7	
7.779	-22.0	V	3.0	26.0	1.0	-47.0	-25.0	-22.0	
10.372	-19.2	V	3.0	23.0	1.0	-41.1	-25.0	-16.1	
5.186	-24.1	H	3.0	28.7	1.0	-51.9	-25.0	-26.9	
7.779	-21.9	H	3.0	26.0	1.0	-46.9	-25.0	-21.9	
10.372	-18.4	H	3.0	23.0	1.0	-40.4	-25.0	-15.4	
High Ch, (2685 MHz)									
5.375	-25.9	V	3.0	28.5	1.0	-53.5	-25.0	-28.5	
8.055	-22.1	V	3.0	25.6	1.0	-46.7	-25.0	-21.7	
10.740	-18.0	V	3.0	22.9	1.0	-39.9	-25.0	-14.9	
5.375	-26.3	H	3.0	28.5	1.0	-53.9	-25.0	-28.9	
8.055	-20.4	H	3.0	25.6	1.0	-45.0	-25.0	-20.0	
10.740	-18.6	H	3.0	22.9	1.0	-40.5	-25.0	-15.5	

Rev. 03.03.09

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17354
Date: 04/02/14
Test Engineer: K.Kedida
Configuration: X Position, w/AC Charger and headphones
Mode: TX, LTE band 41, 5MHz, 16QAM

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T145 8449B	Filter 1	Part 27

Band: LTE41, 5MHz, 16QAM

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, (2498.5 MHz)									
4.997	-27.7	V	3.0	28.9	1.0	-55.6	-25.0	-30.6	
7.495	-22.3	V	3.0	26.4	1.0	-47.7	-25.0	-22.7	
9.994	-18.8	V	3.0	23.1	1.0	-40.9	-25.0	-15.9	
4.997	-25.8	H	3.0	28.9	1.0	-53.7	-25.0	-28.7	
7.495	-21.4	H	3.0	26.4	1.0	-46.7	-25.0	-21.7	
9.994	-19.1	H	3.0	23.1	1.0	-41.2	-25.0	-16.2	
Mid Ch, (2593 MHz)									
5.186	-25.0	V	3.0	28.7	1.0	-52.7	-25.0	-27.7	
7.779	-22.5	V	3.0	26.0	1.0	-47.5	-25.0	-22.5	
10.372	-19.0	V	3.0	23.0	1.0	-41.0	-25.0	-16.0	
5.186	-24.7	H	3.0	28.7	1.0	-52.4	-25.0	-27.4	
7.779	-20.9	H	3.0	26.0	1.0	-45.9	-25.0	-20.9	
10.372	-19.0	H	3.0	23.0	1.0	-41.0	-25.0	-16.0	
High Ch, (2687.5 MHz)									
5.375	-25.4	V	3.0	28.5	1.0	-53.0	-25.0	-28.0	
8.062	-22.6	V	3.0	25.6	1.0	-47.3	-25.0	-22.3	
10.750	-19.1	V	3.0	22.9	1.0	-41.0	-25.0	-16.0	
5.375	-25.5	H	3.0	28.5	1.0	-53.1	-25.0	-28.1	
8.062	-20.8	H	3.0	25.6	1.0	-45.4	-25.0	-20.4	
10.750	-17.7	H	3.0	22.9	1.0	-39.6	-25.0	-14.6	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17354
Date: 04/02/14
Test Engineer: K.Kedida
Configuration: X Position, w/AC Charger and headphones
Mode: TX, LTE band 41, 5MHz, QPSK

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T145 8449B	Filter 1	Part 27

Band: LTE41, 5MHz, QPSK

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, (2498.5 MHz)									
4.997	-27.3	V	3.0	28.9	1.0	-55.2	-25.0	-30.2	
7.495	-21.7	V	3.0	26.4	1.0	-47.1	-25.0	-22.1	
9.994	-18.2	V	3.0	23.1	1.0	-40.3	-25.0	-15.3	
4.997	-25.2	H	3.0	28.9	1.0	-53.1	-25.0	-28.1	
7.495	-20.3	H	3.0	26.4	1.0	-45.6	-25.0	-20.6	
9.994	-18.6	H	3.0	23.1	1.0	-40.7	-25.0	-15.7	
Mid Ch, (2593 MHz)									
5.186	-24.4	V	3.0	28.7	1.0	-52.1	-25.0	-27.1	
7.779	-21.6	V	3.0	26.0	1.0	-46.6	-25.0	-21.6	
10.372	-18.5	V	3.0	23.0	1.0	-40.5	-25.0	-15.5	
5.186	-24.4	H	3.0	28.7	1.0	-52.1	-25.0	-27.1	
7.779	-20.7	H	3.0	26.0	1.0	-45.7	-25.0	-20.7	
10.372	-18.4	H	3.0	23.0	1.0	-40.4	-25.0	-15.4	
High Ch, (2687.5 MHz)									
5.375	-24.6	V	3.0	28.5	1.0	-52.2	-25.0	-27.2	
8.062	-21.7	V	3.0	25.6	1.0	-46.4	-25.0	-21.4	
10.750	-18.6	V	3.0	22.9	1.0	-40.5	-25.0	-15.5	
5.375	-25.9	H	3.0	28.5	1.0	-53.5	-25.0	-28.5	
8.062	-20.7	H	3.0	25.6	1.0	-45.3	-25.0	-20.3	
10.750	-17.0	H	3.0	22.9	1.0	-38.9	-25.0	-13.9	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17354
Date: 04/01/14
Test Engineer: J. Jackson
Configuration: X Position, EUT and AC Adapter
Mode: WCDMA_HSDPA 1900

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T343 8449B	Filter 1	Part 24

Band

Band 2

HSDPA

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1852.4MHz									
3.705	-21.5	V	3.0	35.4	1.0	-55.9	-13.0	-42.9	
5.557	-18.4	V	3.0	34.7	1.0	-52.2	-13.0	-39.2	
7.409	-13.2	V	3.0	34.9	1.0	-47.1	-13.0	-34.1	
3.705	-20.8	H	3.0	35.4	1.0	-55.2	-13.0	-42.2	
5.557	-18.1	H	3.0	34.7	1.0	-51.8	-13.0	-38.8	
7.409	-12.9	H	3.0	34.9	1.0	-46.8	-13.0	-33.8	
Mid Ch, 1880.0MHz									
3.760	-21.8	V	3.0	35.3	1.0	-56.1	-13.0	-43.1	
5.640	-17.8	V	3.0	34.7	1.0	-51.5	-13.0	-38.5	
7.520	-13.1	V	3.0	34.9	1.0	-47.0	-13.0	-34.0	
3.760	-21.6	H	3.0	35.3	1.0	-55.9	-13.0	-42.9	
5.640	-18.0	H	3.0	34.7	1.0	-51.7	-13.0	-38.7	
7.520	-12.3	H	3.0	34.9	1.0	-46.2	-13.0	-33.2	
High Ch, 1907.6 MHz									
3.820	-21.5	V	3.0	35.3	1.0	-55.8	-13.0	-42.8	
5.723	-17.7	V	3.0	34.7	1.0	-51.4	-13.0	-38.4	
7.630	-13.2	V	3.0	34.9	1.0	-47.2	-13.0	-34.2	
3.820	-21.3	H	3.0	35.3	1.0	-55.6	-13.0	-42.6	
5.723	-16.9	H	3.0	34.7	1.0	-50.6	-13.0	-37.6	
7.630	-12.4	H	3.0	34.9	1.0	-46.4	-13.0	-33.4	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17354
Date: 04/01/14
Test Engineer: J. Jackson
Configuration: X Position, EUT and AC Adapter
Mode: WCDMA_REL_99 1900

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T343 8449B	Filter 1	Part 24

Band

Band 2

REL99

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1852.4MHz									
3.705	-21.8	V	3.0	35.4	1.0	-56.2	-13.0	-43.2	
5.557	-18.2	V	3.0	34.7	1.0	-51.9	-13.0	-38.9	
7.409	-12.9	V	3.0	34.9	1.0	-46.8	-13.0	-33.8	
3.705	-21.4	H	3.0	35.4	1.0	-55.8	-13.0	-42.8	
5.557	-17.5	H	3.0	34.7	1.0	-51.2	-13.0	-38.2	
7.409	-12.9	H	3.0	34.9	1.0	-46.9	-13.0	-33.9	
Mid Ch, 1880.0MHz									
3.760	-21.7	V	3.0	35.3	1.0	-56.1	-13.0	-43.1	
5.640	-17.8	V	3.0	34.7	1.0	-51.5	-13.0	-38.5	
7.520	-12.8	V	3.0	34.9	1.0	-46.8	-13.0	-33.8	
3.760	-21.6	H	3.0	35.3	1.0	-55.9	-13.0	-42.9	
5.640	-17.6	H	3.0	34.7	1.0	-51.4	-13.0	-38.4	
7.520	-12.1	H	3.0	34.9	1.0	-46.0	-13.0	-33.0	
High Ch, 1907.6 MHz									
3.820	-21.0	V	3.0	35.3	1.0	-55.3	-13.0	-42.3	
5.723	-17.0	V	3.0	34.7	1.0	-50.8	-13.0	-37.8	
7.630	-13.2	V	3.0	34.9	1.0	-47.1	-13.0	-34.1	
3.820	-21.6	H	3.0	35.3	1.0	-55.9	-13.0	-42.9	
5.723	-17.3	H	3.0	34.7	1.0	-51.1	-13.0	-38.1	
7.630	-12.7	H	3.0	34.9	1.0	-46.6	-13.0	-33.6	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17354
Date: 04/01/14
Test Engineer: J. Jackson
Configuration: X Position, w/AC Charger and headphones
Mode: EGPRS 1900

Chamber	Pre-amplifer	Filter	Limit
3m Chamber A	T343 8449B	Filter 1	Part 24

Band

GSM1900

EGPRS

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz									
3.700	-21.6	V	3.0	35.4	1.0	-56.0	-13.0	-43.0	
5.550	-18.6	V	3.0	34.7	1.0	-52.4	-13.0	-39.4	
7.400	-12.6	V	3.0	34.9	1.0	-46.5	-13.0	-33.5	
3.700	-22.0	H	3.0	35.4	1.0	-56.4	-13.0	-43.4	
5.550	-18.0	H	3.0	34.7	1.0	-51.8	-13.0	-38.8	
7.400	-11.7	H	3.0	34.9	1.0	-45.6	-13.0	-32.6	
Mid Ch, 1880.0MHz									
3.760	-21.7	V	3.0	35.3	1.0	-56.0	-13.0	-43.0	
5.640	-18.2	V	3.0	34.7	1.0	-51.9	-13.0	-38.9	
7.520	-13.2	V	3.0	34.9	1.0	-47.2	-13.0	-34.2	
3.760	-22.1	H	3.0	35.3	1.0	-56.4	-13.0	-43.4	
5.640	-17.8	H	3.0	34.7	1.0	-51.5	-13.0	-38.5	
7.520	-12.4	H	3.0	34.9	1.0	-46.4	-13.0	-33.4	
High Ch, 1909.8 MHz									
3.820	-21.0	V	3.0	35.3	1.0	-55.3	-13.0	-42.3	
5.729	-17.2	V	3.0	34.7	1.0	-50.9	-13.0	-37.9	
7.640	-13.2	V	3.0	35.0	1.0	-47.1	-13.0	-34.1	
3.820	-20.8	H	3.0	35.3	1.0	-55.1	-13.0	-42.1	
5.729	-17.0	H	3.0	34.7	1.0	-50.8	-13.0	-37.8	
7.640	-11.8	H	3.0	35.0	1.0	-45.7	-13.0	-32.7	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17354
Date: 04/01/14
Test Engineer: J. Jackson
Configuration: X Position, w/AC Charger and headphones
Mode: GPRS 1900

Chamber	Pre-amplifer	Filter	Limit
3m Chamber A	T343 8449B	Filter 1	Part 24

Band

GSM1900

GPRS

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz									
3.700	-21.8	V	3.0	35.4	1.0	-56.2	-13.0	-43.2	
5.550	-17.3	V	3.0	34.7	1.0	-51.0	-13.0	-38.0	
7.400	-12.8	V	3.0	34.9	1.0	-46.7	-13.0	-33.7	
3.700	-22.0	H	3.0	35.4	1.0	-56.4	-13.0	-43.4	
5.550	-17.9	H	3.0	34.7	1.0	-51.6	-13.0	-38.6	
7.400	-12.2	H	3.0	34.9	1.0	-46.1	-13.0	-33.1	
Mid Ch, 1880.0MHz									
3.760	-20.6	V	3.0	35.3	1.0	-54.9	-13.0	-41.9	
5.640	-18.0	V	3.0	34.7	1.0	-51.7	-13.0	-38.7	
7.520	-12.8	V	3.0	34.9	1.0	-46.8	-13.0	-33.8	
3.760	-20.5	H	3.0	35.3	1.0	-54.9	-13.0	-41.9	
5.640	-17.8	H	3.0	34.7	1.0	-51.5	-13.0	-38.5	
7.520	-12.1	H	3.0	34.9	1.0	-46.0	-13.0	-33.0	
High Ch, 1909.8 MHz									
3.820	-21.5	V	3.0	35.3	1.0	-55.8	-13.0	-42.8	
5.729	-17.8	V	3.0	34.7	1.0	-51.5	-13.0	-38.5	
7.640	-13.2	V	3.0	35.0	1.0	-47.1	-13.0	-34.1	
3.820	-21.7	H	3.0	35.3	1.0	-56.0	-13.0	-43.0	
5.729	-17.8	H	3.0	34.7	1.0	-51.5	-13.0	-38.5	
7.640	-12.3	H	3.0	35.0	1.0	-46.2	-13.0	-33.2	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17354
Date: 04/02/14
Test Engineer: K.Kedida
Configuration: X Position, AC Charger
Mode: EGPRS 850

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 22

Band

GSM850

EGPRS

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.2MHz									
1.648	-20.2	V	3.0	37.4	1.0	-56.6	-13.0	-43.6	
2.473	-14.8	V	3.0	36.4	1.0	-50.2	-13.0	-37.2	
3.297	-12.1	V	3.0	35.8	1.0	-46.9	-13.0	-33.9	
1.648	-21.0	H	3.0	37.4	1.0	-57.3	-13.0	-44.3	
2.473	-15.7	H	3.0	36.4	1.0	-51.1	-13.0	-38.1	
3.297	-11.0	H	3.0	35.8	1.0	-45.8	-13.0	-32.8	
Mid Ch, 836.6MHz									
1.673	-20.5	V	3.0	37.3	1.0	-56.8	-13.0	-43.8	
2.510	-14.4	V	3.0	36.4	1.0	-49.8	-13.0	-36.8	
3.346	-10.9	V	3.0	35.8	1.0	-45.7	-13.0	-32.7	
1.673	-20.5	H	3.0	37.3	1.0	-56.9	-13.0	-43.9	
2.510	-15.4	H	3.0	36.4	1.0	-50.8	-13.0	-37.8	
3.346	-12.5	H	3.0	35.8	1.0	-47.3	-13.0	-34.3	
High Ch, 848.8MHz									
1.698	-19.3	V	3.0	37.3	1.0	-55.6	-13.0	-42.6	
2.547	-13.9	V	3.0	36.3	1.0	-49.3	-13.0	-36.3	
3.395	-11.0	V	3.0	35.7	1.0	-45.7	-13.0	-32.7	
1.698	-20.4	H	3.0	37.3	1.0	-56.7	-13.0	-43.7	
2.547	-15.9	H	3.0	36.3	1.0	-51.3	-13.0	-38.3	
3.395	-11.7	H	3.0	35.7	1.0	-46.4	-13.0	-33.4	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17354
Date: 04/02/14
Test Engineer: K.Kedida
Configuration: X Position, AC Charger
Mode: EGPRS 850

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 22

Band

GSM850

EGPRS

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.2MHz									
1.648	-20.2	V	3.0	37.4	1.0	-56.6	-13.0	-43.6	
2.473	-14.8	V	3.0	36.4	1.0	-50.2	-13.0	-37.2	
3.297	-12.1	V	3.0	35.8	1.0	-46.9	-13.0	-33.9	
1.648	-21.0	H	3.0	37.4	1.0	-57.3	-13.0	-44.3	
2.473	-15.7	H	3.0	36.4	1.0	-51.1	-13.0	-38.1	
3.297	-11.0	H	3.0	35.8	1.0	-45.8	-13.0	-32.8	
Mid Ch, 836.6MHz									
1.673	-20.5	V	3.0	37.3	1.0	-56.8	-13.0	-43.8	
2.510	-14.4	V	3.0	36.4	1.0	-49.8	-13.0	-36.8	
3.346	-10.9	V	3.0	35.8	1.0	-45.7	-13.0	-32.7	
1.673	-20.5	H	3.0	37.3	1.0	-56.9	-13.0	-43.9	
2.510	-15.4	H	3.0	36.4	1.0	-50.8	-13.0	-37.8	
3.346	-12.5	H	3.0	35.8	1.0	-47.3	-13.0	-34.3	
High Ch, 848.8MHz									
1.698	-19.3	V	3.0	37.3	1.0	-55.6	-13.0	-42.6	
2.547	-13.9	V	3.0	36.3	1.0	-49.3	-13.0	-36.3	
3.395	-11.0	V	3.0	35.7	1.0	-45.7	-13.0	-32.7	
1.698	-20.4	H	3.0	37.3	1.0	-56.7	-13.0	-43.7	
2.547	-15.9	H	3.0	36.3	1.0	-51.3	-13.0	-38.3	
3.395	-11.7	H	3.0	35.7	1.0	-46.4	-13.0	-33.4	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I17354
Date: 04/02/14
Test Engineer: K.Kedida
Configuration: X Position, AC Charger
Mode: GPRS 850

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 22

Band

GSM850

GPRS

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.2MHz									
1.648	-19.8	V	3.0	37.4	1.0	-56.2	-13.0	-43.2	
2.473	-14.2	V	3.0	36.4	1.0	-49.5	-13.0	-36.5	
3.297	-11.5	V	3.0	35.8	1.0	-46.3	-13.0	-33.3	
1.648	-20.8	H	3.0	37.4	1.0	-57.2	-13.0	-44.2	
2.473	-15.2	H	3.0	36.4	1.0	-50.5	-13.0	-37.5	
3.297	-10.9	H	3.0	35.8	1.0	-45.7	-13.0	-32.7	
Mid Ch, 836.6MHz									
1.673	-20.0	V	3.0	37.3	1.0	-56.3	-13.0	-43.3	
2.510	-14.0	V	3.0	36.4	1.0	-49.4	-13.0	-36.4	
3.346	-11.0	V	3.0	35.8	1.0	-45.8	-13.0	-32.8	
1.673	-20.4	H	3.0	37.3	1.0	-56.8	-13.0	-43.8	
2.510	-15.1	H	3.0	36.4	1.0	-50.4	-13.0	-37.4	
3.346	-11.6	H	3.0	35.8	1.0	-46.4	-13.0	-33.4	
High Ch, 848.8MHz									
1.698	-19.3	V	3.0	37.3	1.0	-55.6	-13.0	-42.6	
2.547	-13.8	V	3.0	36.3	1.0	-49.1	-13.0	-36.1	
3.395	-10.1	V	3.0	35.7	1.0	-44.8	-13.0	-31.8	
1.698	-20.0	H	3.0	37.3	1.0	-56.3	-13.0	-43.3	
2.547	-15.5	H	3.0	36.3	1.0	-50.8	-13.0	-37.8	
3.395	-10.9	H	3.0	35.7	1.0	-45.6	-13.0	-32.6	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: FCC_24_22_27_90
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.