

Prüfbericht-Nr.: <i>Test report no.:</i>	CN26XKTP 001	Auftrags-Nr.: <i>Order no.:</i>	48305469	Seite 1 von 28 Page 1 of 28																								
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2026-05-15																									
Auftraggeber: <i>Client:</i>	Dot Origin Ltd Unit 7 Coopers Place, Combe Lane, Wormley, Godalming, GU8 5SZ, UK																											
Prüfgegenstand: <i>Test item:</i>	VTAP25L																											
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	VTAP25L																											
Auftrags-Inhalt: <i>Order content:</i>	FCC Part 15C Test report (NFC)																											
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.225																											
Wareneingangsdatum: <i>Date of sample receipt:</i>	2026-06-25																											
Prüfmuster-Nr.: <i>Test sample no:</i>	A004318131-001																											
Prüfzeitraum: <i>Testing period:</i>	2026-07-03 - 2026-07-20																											
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland Taiwan Ltd. New Taipei Branch																											
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland Taiwan Ltd. Taipei Testing Laboratories																											
Prüfergebnis*: <i>Test result*:</i>	Pass																											
überprüft von: <i>compiled by:</i>	genehmigt von: <i>authorized by:</i>																											
Datum: <i>Date:</i> 2026-07-24	Ausstellungsdatum: <i>Issue date:</i> 2026-07-24																											
Stellung / Position:	Stellung / Position:																											
Anderson Chiu Senior Project Manager		Zeus Chen Lab Manager																										
Sonstiges / Other:																												
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>																										
<table><tr><td>* Legende:</td><td>1 = sehr gut</td><td>2 = gut</td><td>3 = befriedigend</td><td>4 = ausreichend</td><td>5 = mangelhaft</td></tr><tr><td></td><td>P(ass) = entspricht o.g. Prüfgrundlage(n)</td><td>F(ail) = entspricht nicht o.g. Prüfgrundlage(n)</td><td>N/A = nicht anwendbar</td><td>N/T = nicht getestet</td><td></td></tr><tr><td>* Legend:</td><td>1 = very good</td><td>2 = good</td><td>3 = satisfactory</td><td>4 = sufficient</td><td>5 = poor</td></tr><tr><td></td><td>P(ass) = passed a.m. test specification(s)</td><td>F(ail) = failed a.m. test specification(s)</td><td>N/A = not applicable</td><td>N/T = not tested</td><td></td></tr></table>					* Legende:	1 = sehr gut	2 = gut	3 = befriedigend	4 = ausreichend	5 = mangelhaft		P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet		* Legend:	1 = very good	2 = good	3 = satisfactory	4 = sufficient	5 = poor		P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested	
* Legende:	1 = sehr gut	2 = gut	3 = befriedigend	4 = ausreichend	5 = mangelhaft																							
	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet																								
* Legend:	1 = very good	2 = good	3 = satisfactory	4 = sufficient	5 = poor																							
	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested																								
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>																												

Prüfbericht-Nr.:
Test report no.:

CN26XKTP 001

Seite 2 von 28
Page 2 of 28

Anmerkungen Remarks

- | | |
|----------|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüflabors kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</p> <p>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p> |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</p> <p><i>As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.</p> <p>Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i></p> <p><i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p> |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p> |

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.203	Antenna Requirement	Pass
5.1.2	15.225 (a)(b)(c)	Field Strength of Fundamental Emissions	Pass
5.1.3	15.225 (d)	Radiated Spurious Emissions	Pass
5.1.4	15.225 (e)	Frequency Stability	Pass
5.1.5	15.215 (c)	20 dB Bandwidth	Pass
5.1.5	2.1049	99% Occupied Bandwidth	Pass
5.2.1	15.207	Mains Conducted Emission	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS	10
4. TEST SET-UP AND OPERATION MODES	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 TEST OPERATION AND TEST SOFTWARE	11
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.4 TEST SETUP DIAGRAM	13
5. TEST RESULTS	15
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	15
5.1.1 Antenna Requirement	15
5.1.2 Field Strength of Fundamental Emissions	16
5.1.3 Radiated Spurious Emissions	19
5.1.4 Frequency Stability	23
5.1.5 20 dB Bandwidth and 99% Occupied Bandwidth	25
5.2 MAINS EMISSION	27
5.2.1 Mains Conducted Emission	27
APPENDIX A - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION	
APPENDIX SP - PHOTOGRAPHS OF TEST SETUP	
APPENDIX EP - PHOTOGRAPHS OF EUT	

Prüfbericht - Nr.: **CN26XKTP 001**
Test Report No.

Seite 5 von 28
Page 5 of 28

HISTORY OF THIS TEST REPORT

Revision	Description	Date Issued
R01	Original Release	2026-07-24

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Radiated Emissions & Mains Conducted Emission

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.225
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10-2020

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

TÜV Rheinland Taiwan Ltd. Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

TÜV Rheinland Taiwan Ltd. Taipei Testing Laboratories

No.458-18, 458-19, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 180491 (TW3567)
ISED Registration No.: 25563 (TW3567)

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.32 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.31 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a VTAP25L working at 13.56 MHz with NFC function.
For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	VTAP25L
Type Identification	VTAP25L
FCC ID	2A282-VTAP25L

Technical Specification of EUT

Item	EUT information
Operating Frequency	13.56 MHz
Operation Voltage	5 Vdc
Modulation	ASK
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.3

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum emission level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Setup for testing: The EUT has USB comms and 2 serial which makes it possible to read data from the NFC reader. The NFC reader is permanently on.

The samples were used as follows:
A004318131-001

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Radiated Spurious Emissions	Frequency Stability	20 dB & Occupied Bandwidth	Mains Conducted Emission	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Y-plane**.
2. "-" means no effect.

Radiated Spurious Emissions

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)
-	13.56	13.56

Frequency Stability

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)
-	13.56	13.56

20 dB Bandwidth & Occupied Bandwidth

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)
-	13.56	13.56

Prüfbericht - Nr.: CN26XKTP 001
Test Report No.

Seite 12 von 28
Page 12 of 28

Mains Conducted Emission

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)
-	13.56	13.56

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Radiated Spurious Emissions	27.3-29.5 °C	40-48 %	Roger Liao
Frequency Stability	20.3-20.7 °C	49-65 %	Nick Hsu
20 dB & Occupied Bandwidth	20.3-20.7 °C	49-65 %	Nick Hsu
Mains Conducted Emission	23.3 °C	51 %	Roger Liao

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


None

Support Unit


Support Unit								
No	Description	Brand	Model	S/N	Shielded	Ferrite Core (Qty)	Length (cm)	Remark
A	Captive USB cable	Custom	NA	N/A	YES	NO	180	--
B	NFC Card	Generic	NA	N/A	-	-	-	MIFARE Classic
1	Notebook	DELL	Latitude 7490	N/A	-	-	-	--
2	AC Adapter	DELL	LA65M130	N/A	-	-	-	--

4.4 Test Setup Diagram


<Radiated Spurious Emissions mode>

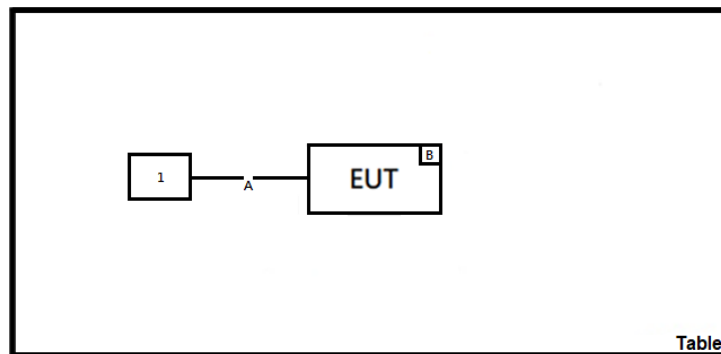

<Mains Conducted Emission mode>

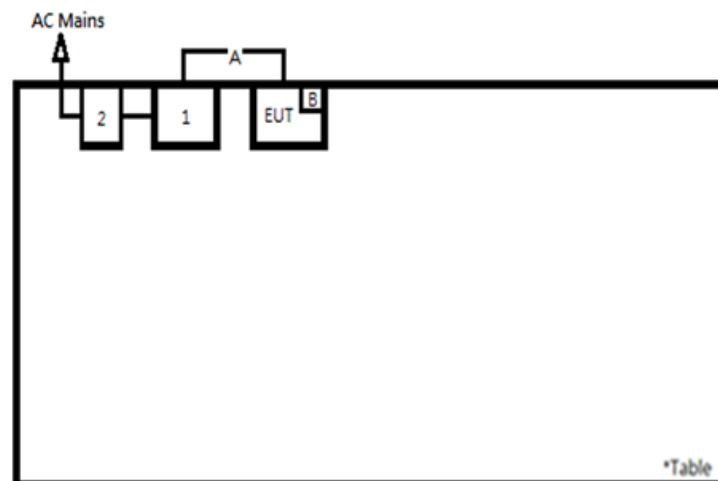


Detail View of EUT for Conducted Emission 13.56MHz Antenna Terminal Configurations
With Integral Antenna Connected

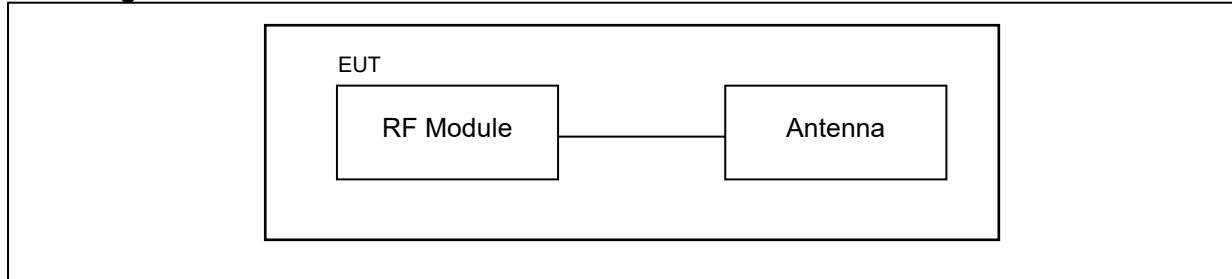

Note: Antenna Connected normally / Fundamental wave radiated.

With Antenna Replaced with a Suitable Dummy Load

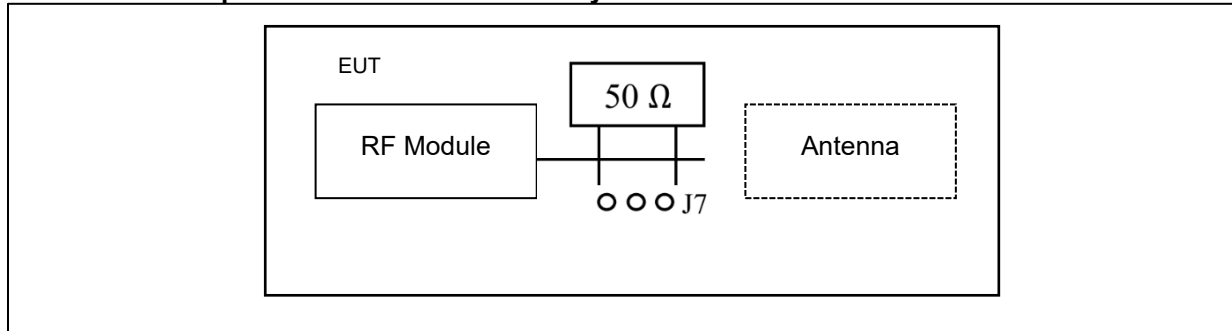

Note: Antenna signal path interrupted and terminated with suitable dummy load.

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

The antenna is PCB printed Loop antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.
Refer to EUT photo for details.

5.1.2 Field Strength of Fundamental Emissions


Limit

- The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Kind of Test Site

3m Semi-Anechoic Chamber

Test Setup

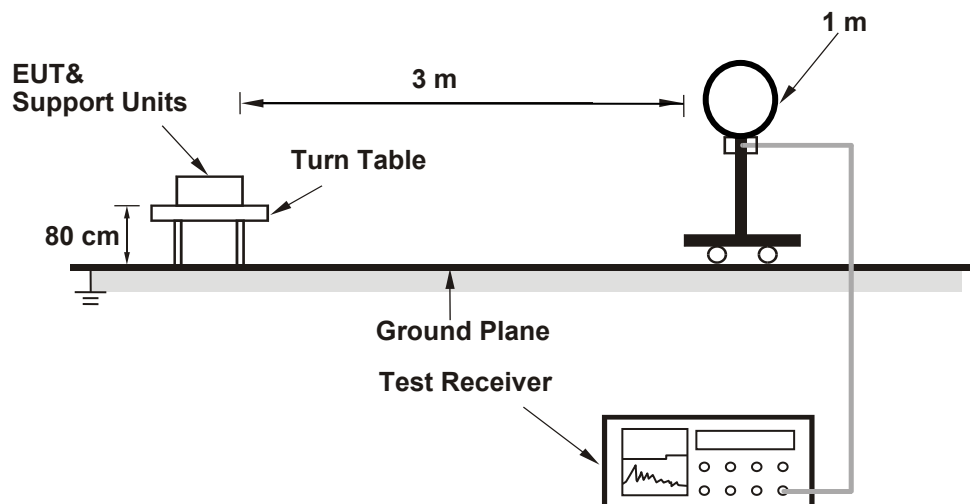

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Prüfbericht - Nr.: CN26XKTP 001
Test Report No.

 Seite 17 von 28
 Page 17 of 28

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
30 MHz ~ 1 GHz					
Receiver	R&S	ESR7	102109	2026/02/04	2027/02/03
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2026/05/11	2027/05/10
LF-AMP	Agilent	8447D	2727A05146	2026/01/15	2027/01/14
Microwave Cable	EMCI	RG 214 U/2*11N/7M	24038601	2026/02/25	2027/02/24
Microwave Cable	HUBER+SUHNER	SUC0FLEX 104	802244/4	2026/02/25	2027/02/24
Microwave Cable	HUBER+SUHNER	SUC0FLEX 104	MY37203/4	2026/02/25	2027/02/24
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
Below 30 MHz					
Receiver	R&S	ESR7	102109	2026/02/04	2027/02/03
Loop Antenna	SCHWARZBECK	FMZB 1519B	00215	2025/12/16	2026/12/15
Microwave Cable	EM	RG 214 U/2*11N/7M	24038601	2026/02/25	2027/02/24
Microwave Cable	HUBER+SUHNER	SUC0FLEX 104	802244/4	2026/02/25	2027/02/24
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A

Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – Amplifier (dB)

Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Limit at 30m = 15848 (uV/m)

******Limit at 3m = $20 \cdot \log(15848) + 40 \log(30\text{m}/3\text{m})$ (dBuV/m)
= 84+40 (dBuV/m)
= 124 (dBuV/m)

Please refer to Appendix A.

5.1.3 Radiated Spurious Emissions

Limit


The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209 as below table:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup

<Radiated Emissions below 30 MHz>

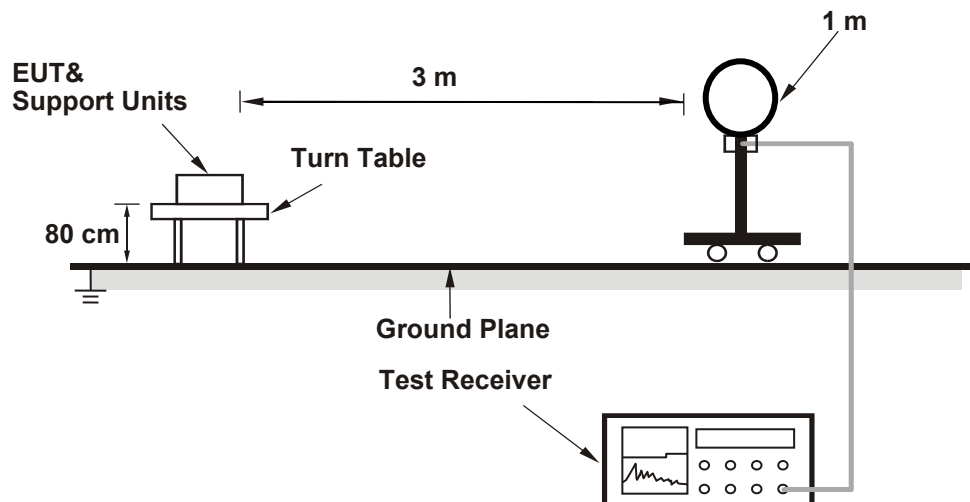

<Radiated Emissions 30 MHz to 1 GHz>

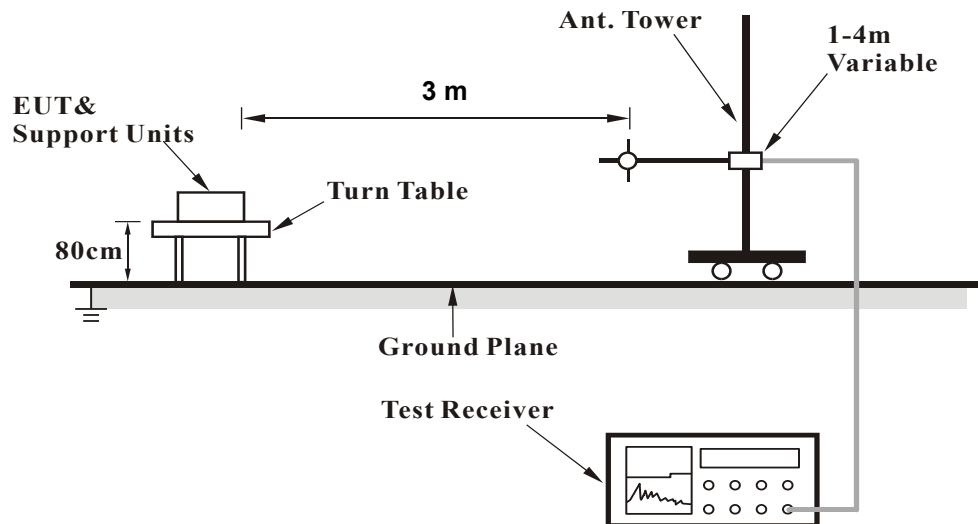

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Please refer to 5.1.2 Instruments

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.
3. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.
4. The emission levels of other frequencies (including the 10th harmonic of the highest fundamental frequency) are very lower than the limit and are not shown in the test report.

Prüfbericht - Nr.: **CN26XKTP 001**
Test Report No.

Seite 22 von 28
Page 22 of 28

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – Amplifier (dB)

Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix A.

Note: The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated at least 20 dB below the permissible value to be reported.


5.1.4 Frequency Stability

Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01 % of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 degrees C.

Kind of Test Site Shielded room

Test Setup

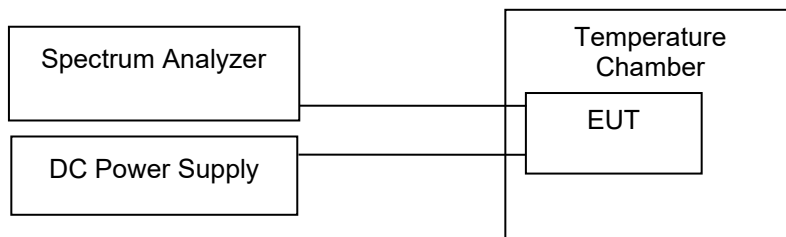

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2026/02/24	2027/02/23	2026/07/03	2026/07/03

Test Procedures

- The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- Turned the EUT on and coupled its output to a spectrum analyzer.
- Turned the EUT off and set the chamber to the highest temperature specified.
- Allowed sufficient time (approximately 30 min) for the temperature of the chamber to stabilize then turned the EUT on and measured the operating frequency after 2, 5, and 10 minutes.
- Repeated step b and c with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85 % to 115 % and the frequency record.

Frequency (MHz)		13.56							
Condition		Test Time				Frequency Error (%)			
Extreme	Modulation Mode	0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min
T _{20°C} V _{max}	CW	13.560000	13.560000	13.560000	13.560000	0.00000	0.00000	0.00000	0.00000
T _{20°C} V _{min}	CW	13.560000	13.560000	13.560000	13.560000	0.00000	0.00000	0.00000	0.00000
T _{50°C} V _{nom}	CW	13.559942	13.559913	13.559913	13.559884	-0.00043	-0.00064	-0.00064	-0.00086
T _{40°C} V _{nom}	CW	13.559942	13.559942	13.559942	13.559942	-0.00043	-0.00043	-0.00043	-0.00043
T _{30°C} V _{nom}	CW	13.560000	13.559971	13.559971	13.559971	0.00000	-0.00021	-0.00021	-0.00021
T _{20°C} V _{nom}	CW	13.560000	13.560000	13.560000	13.560000	0.00000	0.00000	0.00000	0.00000
T _{10°C} V _{nom}	CW	13.560058	13.560058	13.560058	13.560058	0.00043	0.00043	0.00043	0.00043
T _{0°C} V _{nom}	CW	13.560087	13.560087	13.560087	13.560087	0.00064	0.00064	0.00064	0.00064
T _{-10°C} V _{nom}	CW	13.560087	13.560087	13.560087	13.560087	0.00064	0.00064	0.00064	0.00064
T _{-20°C} V _{nom}	CW	13.560058	13.560058	13.560058	13.560087	0.00043	0.00043	0.00043	0.00064
Limit (%)		-				+/- 0.01			
Result		Pass							


5.1.5 20 dB Bandwidth and 99% Occupied Bandwidth

Limit

The 20 dB bandwidth shall be specified in operating frequency band.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101512	2026/02/24	2027/02/23	2026/07/03	2026/07/03

Test Procedure


<20 dB Bandwidth>

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1 kHz RBW and 3 kHz VBW. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

<99% Occupied Bandwidth>

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to Sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

Test Results

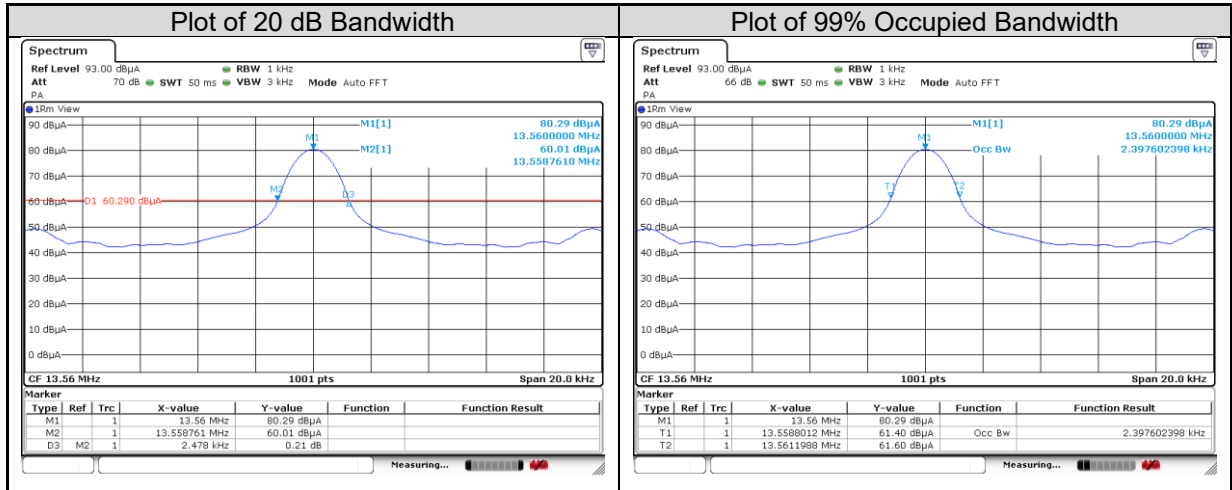

5.2 Mains Emission


5.2.1 Mains Conducted Emission

Limit

Mains Conducted emissions as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

Test Setup

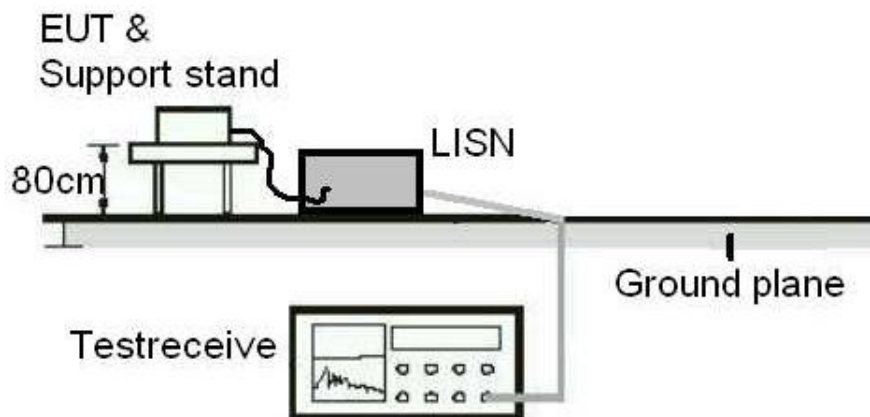

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Two-Line V-Network	SCHWARZBECK	NSLK 8127	8127-00976	2026/01/07	2027/01/06
EMI Test Receiver	R&S	ESCI	101094	2025/11/19	2026/11/18


Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results


Please refer to Appendix A.

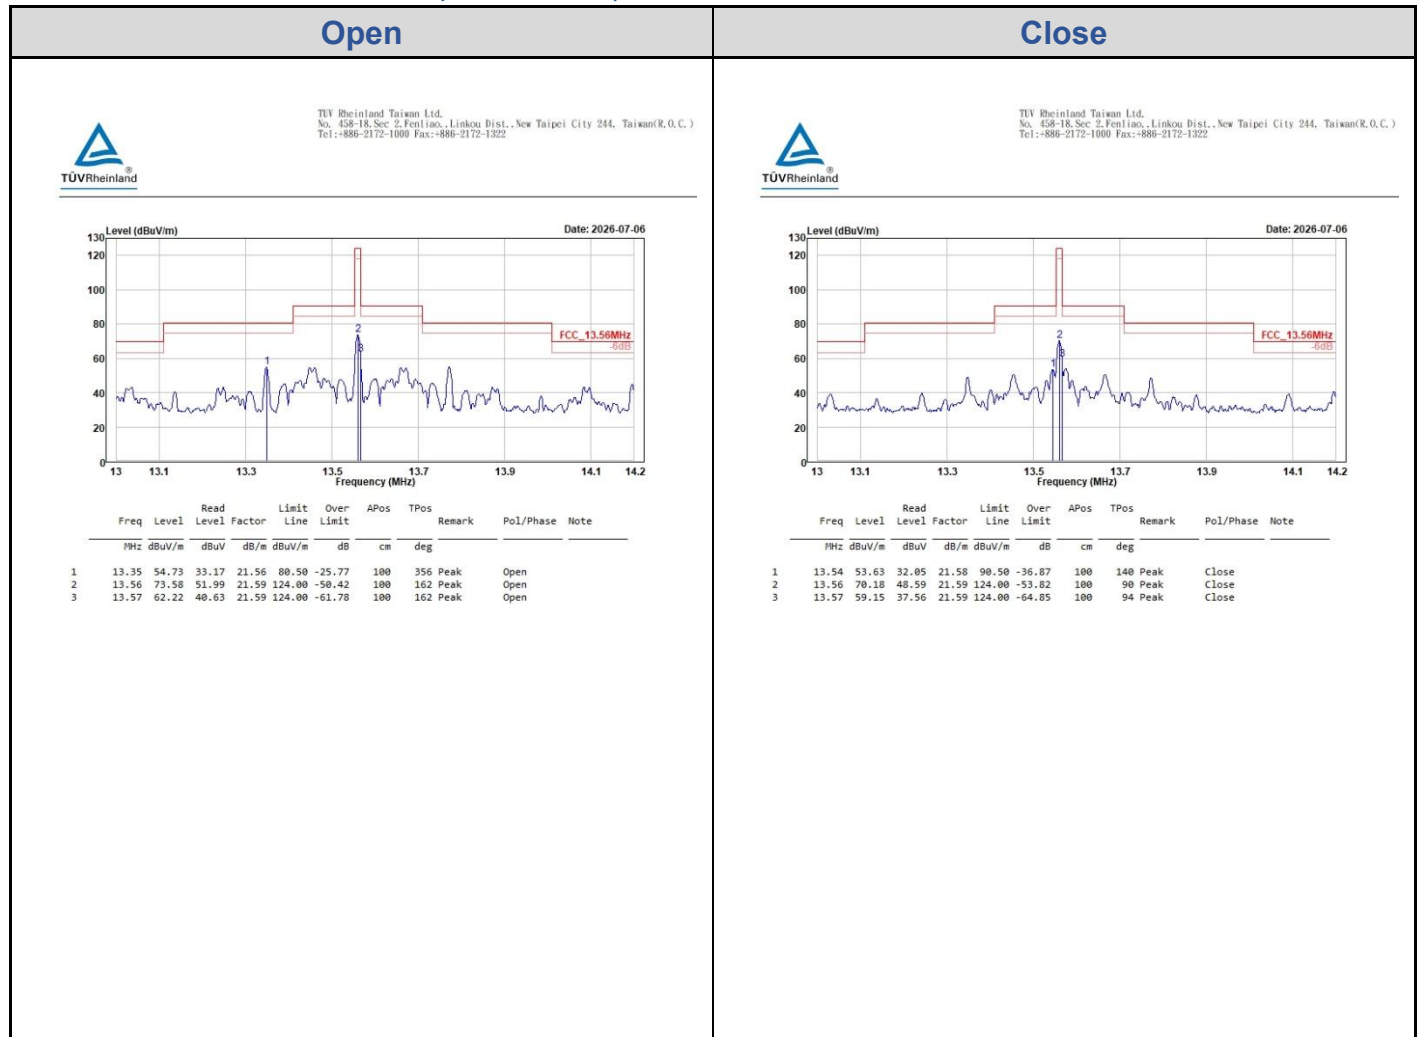

Ground



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

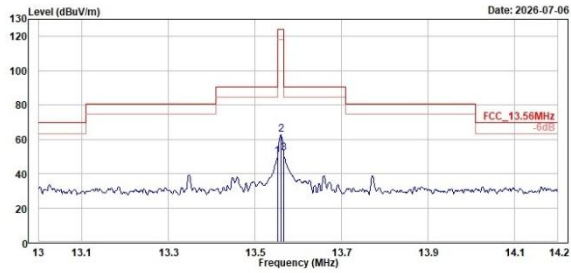


	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	13.55	49.70	28.11	21.59	90.50	-40.80	100	164 Peak	Ground	
2	13.56	62.53	40.94	21.59	124.00	-61.47	100	194 Peak	Ground	
3	13.57	51.73	30.14	21.59	124.00	-72.27	100	164 Peak	Ground	

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz

9kHz~150kHz(Open)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

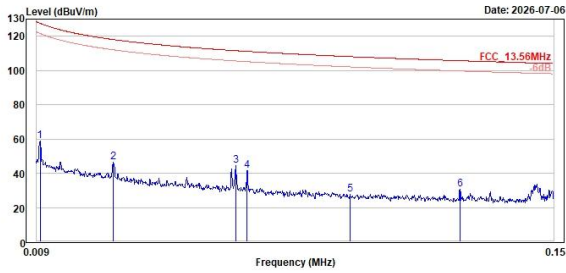


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	0.01	58.89	41.50	17.30	127.60	-68.80		100	26	Peak	Open	
2	0.03	46.66	27.45	19.21	118.05	-71.39		100	73	Peak	Open	
3	0.06	44.54	25.92	18.62	111.57	-67.03		100	238	Peak	Open	
4	0.07	41.51	23.07	18.44	111.15	-69.64		100	360	Peak	Open	
5	0.09	27.80	9.74	18.06	108.09	-88.29		100	213	Peak	Open	
6	0.12	30.77	12.47	18.30	105.70	-74.93		100	219	Peak	Open	

150kHz~30MHz(Open)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

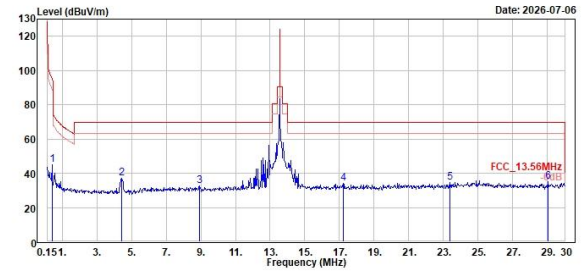


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	0.42	44.74	25.80	18.94	95.17	-50.43		100	330	Peak	Open	
2	4.45	37.25	17.76	19.49	69.50	-32.25		100	30	Peak	Open	
3	8.93	32.63	11.63	21.00	69.50	-36.87		100	330	Peak	Open	
4	17.22	34.20	12.14	22.06	69.50	-35.30		100	344	Peak	Open	
5	23.37	34.85	12.44	22.41	69.50	-34.65		100	74	Peak	Open	
6	29.01	35.21	12.47	22.74	69.50	-34.29		100	179	Peak	Open	

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz

Horizontal



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

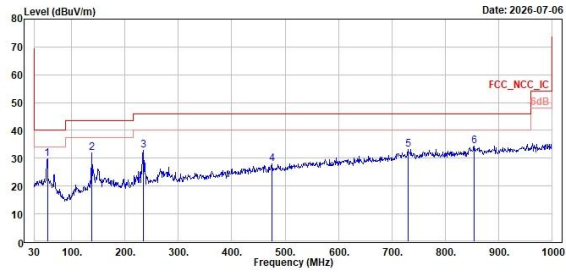


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	54.25	29.82	35.69	-5.87	40.00	-10.18		200	360	Peak	Horizontal	
2	137.67	32.01	39.06	-7.05	43.50	-11.49		200	81	Peak	Horizontal	
3	233.70	32.79	39.96	-7.17	46.00	-13.21		200	251	Peak	Horizontal	
4	475.23	27.88	29.89	-2.01	46.00	-18.12		200	360	Peak	Horizontal	
5	730.34	33.29	30.59	2.70	46.00	-12.71		200	86	Peak	Horizontal	
6	854.50	34.35	30.04	4.31	46.00	-11.65		110	360	Peak	Horizontal	

Vertical



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

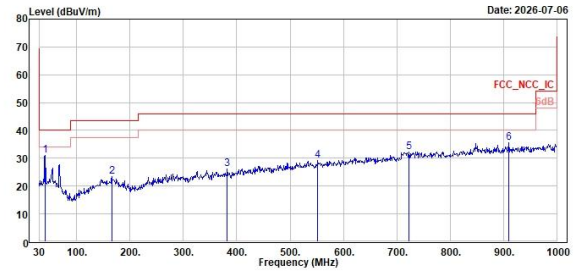

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	40.67	31.10	37.59	-6.49	40.00	-8.90		100	107	Peak	Vertical	
2	165.80	23.41	29.14	-5.73	43.50	-20.09		200	331	Peak	Vertical	
3	382.11	26.16	29.68	-3.52	46.00	-19.84		200	303	Peak	Vertical	
4	551.86	29.21	29.70	-0.49	46.00	-16.79		100	315	Peak	Vertical	
5	723.55	32.39	29.80	2.59	46.00	-13.61		143	360	Peak	Vertical	
6	909.79	35.53	30.48	5.05	46.00	-10.47		200	59	Peak	Vertical	

Mains Conducted Emission, Tx Mode, 150kHz ~ 30MHz


Worst Band

(Line)

(Neutral)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan (R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

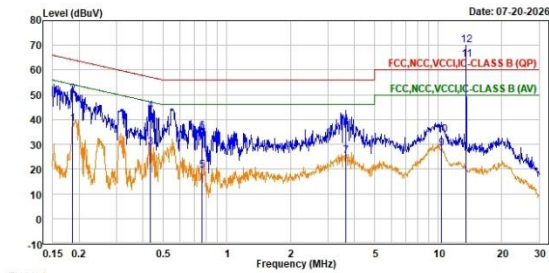


Trace: 1

	Freq	Level	Read	Limit	Over		Pol/Phase	Note
	MHz	dBuV	Level Factor	Line	Limit	Remark		
1	0.19	38.38	28.36	10.02	54.22	-15.84 Average	line1	
2	0.19	50.19	40.17	10.02	64.22	-14.03 QP	line1	
3	0.43	28.76	18.71	10.05	47.18	-18.42 Average	line1	
4	0.43	43.38	33.33	10.05	57.18	-13.80 QP	line1	
5	0.76	19.57	9.45	10.12	46.00	-26.43 Average	line1	
6	0.76	35.00	24.88	10.12	56.00	-21.00 QP	line1	
7	3.64	25.29	14.81	10.48	46.00	-20.71 Average	line1	
8	3.64	36.74	26.26	10.48	56.00	-19.26 QP	line1	
9	10.32	28.23	17.22	11.01	50.00	-21.77 Average	line1	
10	10.32	33.72	22.71	11.01	60.00	-26.28 QP	line1	
11 *	13.56	64.16	53.02	11.14	50.00	14.16 Average	line1	
12 *	13.56	69.93	58.79	11.14	60.00	9.93 QP	line1	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan (R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

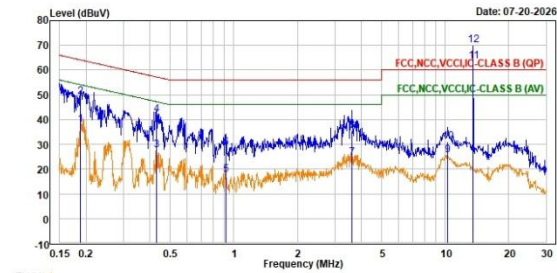

Trace: 1


	Freq	Level	Read	Limit	Over		Pol/Phase	Note
	MHz	dBuV	Level Factor	Line	Limit	Remark		
1	0.19	37.83	27.81	10.02	54.10	-16.27 Average	neutral	
2	0.19	49.17	39.15	10.02	64.10	-14.93 QP	neutral	
3	0.43	27.68	17.64	10.04	47.22	-19.54 Average	neutral	
4	0.43	41.99	31.95	10.04	57.22	-15.23 QP	neutral	
5	0.92	17.69	7.61	10.08	46.00	-28.31 Average	neutral	
6	0.92	28.54	18.46	10.08	56.00	-27.46 QP	neutral	
7	3.62	24.52	14.26	10.26	46.00	-21.48 Average	neutral	
8	3.62	35.68	25.34	10.26	56.00	-20.40 QP	neutral	
9	10.27	25.54	14.81	10.73	50.00	-24.46 Average	neutral	
10	10.27	30.99	20.26	10.73	60.00	-29.01 QP	neutral	
11 *	13.56	63.56	52.65	10.91	50.00	13.56 Average	neutral	
12 *	13.56	70.04	59.13	10.91	60.00	10.04 QP	neutral	

Mains Conducted Emission, Tx Mode, 50 Ohm Terminal, 150kHz ~ 30MHz

Line



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan (R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

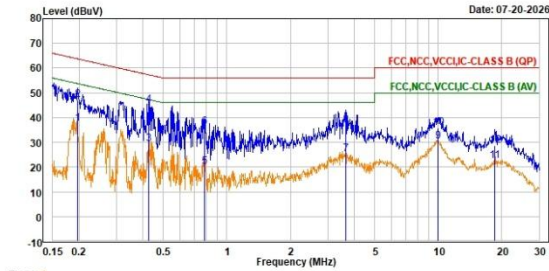


Trace: 1

	Freq	Level	Read	Factor	Limit	Over	Remark	Pol/Phase	Note
	MHz	dBuV	dBuV	dB	dBuV	dB			
1	0.20	37.57	27.55	10.02	53.76	-16.19	Average	line1	
2	0.20	47.26	37.24	10.02	63.76	-16.50	QP	line1	
3	0.43	29.24	19.20	10.04	47.35	-18.11	Average	line1	
4	0.43	45.08	35.04	10.04	57.35	-12.27	QP	line1	
5	0.78	20.17	10.05	10.12	46.00	-25.83	Average	line1	
6	0.78	36.17	26.05	10.12	56.00	-19.83	QP	line1	
7	3.64	25.31	14.83	10.48	46.00	-20.69	Average	line1	
8	3.64	36.73	26.25	10.48	56.00	-19.27	QP	line1	
9	9.97	30.28	19.28	11.00	50.00	-19.72	Average	line1	
10	9.97	35.85	24.85	11.00	60.00	-24.15	QP	line1	
11	18.50	22.51	11.22	11.29	50.00	-27.49	Average	line1	
12	18.50	28.53	17.24	11.29	60.00	-31.47	QP	line1	

Neutral



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan (R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

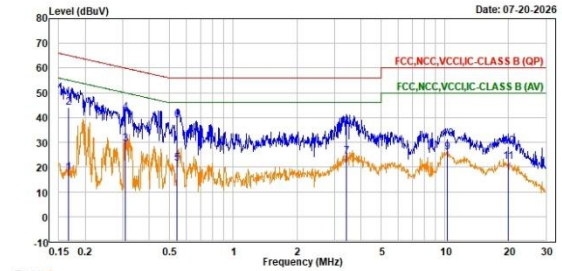

Trace: 1

	Freq	Level	Read	Factor	Limit	Over	Remark	Pol/Phase	Note
	MHz	dBuV	dBuV	dB	dBuV	dB			
1	0.17	17.84	7.82	10.02	55.09	-37.25	Average	neutral	
2	0.17	44.08	34.06	10.02	65.09	-21.01	QP	neutral	
3	0.31	29.19	19.16	10.03	50.00	-20.81	Average	neutral	
4	0.31	41.96	31.93	10.03	60.00	-18.04	QP	neutral	
5	0.54	21.61	11.55	10.06	46.00	-24.39	Average	neutral	
6	0.54	38.89	28.83	10.06	56.00	-17.11	QP	neutral	
7	3.43	24.33	14.07	10.26	46.00	-21.67	Average	neutral	
8	3.43	36.22	25.96	10.26	56.00	-19.78	QP	neutral	
9	10.22	25.78	15.05	10.73	50.00	-24.22	Average	neutral	
10	10.22	31.47	20.74	10.73	60.00	-28.53	QP	neutral	
11	19.94	22.13	10.95	11.18	50.00	-27.87	Average	neutral	
12	19.94	28.25	17.07	11.18	60.00	-31.75	QP	neutral	