

Dynascan Technology Corp.

TEST REPORT

Model:

68301, 68303, 68305, 68307

REPORT NUMBER

251200020THC-001

ISSUE DATE

May 26, 2026

PAGES

22

DOCUMENT CONTROL NUMBER

GFT-OP-10h (28-Nov-2018)

© 2020 Intertek



Radio Spectrum TEST REPORT

Applicant:	Dynascan Technology Corp. 6F., No. 88, Wenmao Rd., Guishan Dist., Taoyuan City 333001, Taiwan
Product:	EPAPER DISPLAY
Model No.:	68301, 68303, 68305, 68307
FCC ID:	2AKWY-XBP501
Test Method/ Standard:	47 CFR FCC Part 15.407 KDB 789033 D02 v02r01 ANSI C63.10 2020 KDB 662911 D01 v02r01 KDB 905462 D02 v02
Test By:	Intertek Testing Services Taiwan Ltd., Hsinchu Laboratory No. 17, Ln. 246, Niupu S. Rd., Xiangshan Dist, Hsinchu City 300075, Taiwan



Rich Nien

Rich Nien
Engineer

Rico Deng

Rico Deng
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Revision History

Report No.	Issue Date	Revision Summary
251200020THC-001	May 26, 2026	Original report

Table of Contents

Summary of Test Data.....	4
1. General Information	5
1.1 Identification of the EUT.....	5
1.2 Adapter information	5
1.3 Additional information about the EUT	5
1.4 Antenna description	6
1.5 Operation mode.....	6
1.6 Peripherals equipment	6
2. Dynamic Frequency Selection (DFS) test	7
2.1 UNII Device Description	7
2.2 Operating mode.....	8
2.3 Test Protocol and Requirements.....	8
2.4 DFS Detection Thresholds and Limitations of each Parameter	10
2.5 Radar Test Waveforms	11
2.6 Radar Waveform Calibration	14
2.6.1 Radar Waveform Calibration Plot	15
2.7 Test instruments and setup	16
2.7.1 Deviation about the radar waveform	16
2.7.2 Test setup.....	16
2.8 DFS test results	16
2.8.1 Test summary.....	16
2.8.2 DFS test result.....	17
2.8.2.1 Channel Move & Closing Transmission time	18
2.9 Non-Occupancy Period	20
Appendix A: Test equipment list	21
Appendix B: Measurement Uncertainty	22

Summary of Test Data

Test Requirement	Applicable Rule (Section 15.407)	Result
Dynamic Frequency Selection (DFS)	15.407(h)(2)	Pass
Antenna requirement	15.203	Pass

Note: Please note that the test results with statement of conformity, the decision rules which are based on: Safety Testing: the specification, standard or IEC Guide 115.

Other Testing: the specification, standard and not taking into account the measurement uncertainty.

1. General Information

1.1 Identification of the EUT

Product:	EPAPER DISPLAY
Model No.:	68301, 68307
Operating Frequency:	1. 5180MHz~5240MHz 2. 5260MHz~5320MHz 3. 5500MHz~5700MHz 4. 5745MHz~5825MHz
Channel Number:	1. 7 channels for 5180MHz~5240MHz 2. 7 channels for 5260MHz~5320MHz 3. 18 channels for 5500MHz~5700MHz 4. 8 channels for 5745MHz~5825MHz
Rating:	1. DC 5V 2.5A from USB-C Charger for 68301 2. DC 12V 2.5A from USB-C Charger for 68307
Sample receiving date:	1. 2025/12/02 for 68301 2. 2026/04/22 for 68307
Sample condition:	Workable
Test Date(s):	2026/02/12

1.2 Adapter information

The EUT will be supplied with a power supply from below list:

No.	Model no.	Specification
USB-C Charger	A1C030AC	I/P: 100-240V~ 50/60Hz, 1.2A O/P: 5.0V=3.0A 15.0W/9.0V=3.0A 27.0W/12.0V=2.5A 30.0W/15.0V=2.0A 30.0W/ 20.0V=1.5A 30.0W

1.3 Additional information about the EUT

The customer confirmed the models listed as below were series model to model 68301 (EUT), the difference between main model and series model are listed as below.

Model Number	Protective Glass	Dimensions
68301	V	13.3"
68303	X	13.3"
68305	X	28.54"
68307	V	28.54"

1.4 Antenna description

Antenna 1

Antenna Gain: 3.44dBi
Antenna Type: FPC antenna
Connector Type: I-Pex
Remark: Antenna information provided by the client.

Antenna 2

Antenna Gain: 3.44dBi
Antenna Type: FPC antenna
Connector Type: I-Pex
Remark: Antenna information provided by the client.

1.5 Operation mode

Connected to Notebook via USB Cable, executing “CMD” and enter command to select different frequency and modulation.

1.6 Peripherals equipment

Peripheral Name	Brand	Model No.	Serial No.
Notebook PC	Dell	PC14250	14941295392
Notebook PC	HP	HP ProBook 440 G3	5CD8021S9H
Wireless Router	ASUS	RT AX88U pro	R21G6800458249F

2. Dynamic Frequency Selection (DFS) test

2.1 UNII Device Description

1. The UAP-AC-M operates in the following UNII bands:

- a. 5250-5350 MHz
- b. 5470-5725 MHz

2. Operating mode:

The EUT was defined as the client without radar detection function.

Associating peripheral:

The device was set up to associate with the master device (UAP-AC-M).

3. The maximum EIRP of this device is 14.709 dBm from UNII band. This device doesn't exceed 27dBm EIRP, so no transmit power control is implemented.

4. Below are the available 50 ohm antenna assemblies and their corresponding gains. 0dBi gain was used to set the -64dBm threshold level during calibration of the conducted test setup.

5. Information regarding the parameters of the detected Radar Waveforms is not available to the end user.

2.2 Operating mode

Performance was measured at an active frequency of 5290 and 5530MHz, and the radar signal was centered at 5290 and 5530 MHz.

One laptop PC is connected to the AP via a wire Ethernet connection. A separate laptop PC is used as a host computer for the Station. The AP and the Station transmit output levels are set to normal operating condition.

System architectures were used under IP based mode.

2.3 Test Protocol and Requirements

For a Master Device, the DFS conformance requirements will be verified utilizing one short pulse radar type. Additionally, the Channel Move Time and Channel Closing Transmission Time requirements will be verified utilizing the long pulse radar type. The statistical performance check will be verified utilizing all radar type.

For a Client Device without DFS, the channel move time and channel closing transmission time requirements will be verified with one short pulse radar type.

For testing a Client Device with In-Service Monitoring, two configurations must be tested.

The Client Device detects the radar waveform:

The channel move time and channel closing transmission time requirements will be verified utilizing short pulse radar type and the long pulse radar type. The statistical performance check will be verified utilizing all radar types.

The Master Device detects the radar waveform:

The channel move time and channel closing transmission time requirements will be verified utilizing short pulse radar type.

A UNII network will employ a DFS function to:

- detect signals from radar systems and to avoid co-channel operation with these systems
 - provide on aggregate a Uniform Spreading of the Operating Channels across the entire band.
- This applies to the 5250-5350 MHz and/ or 5470-5725 MHz bands.

Within the context of the operation of the DFS function, a UNII device will operate in either Master Mode or Client Mode. UNII devices operating in Client Mode can only operate in a network controlled by a UNII device operating in Master Mode.

The tables as below summarize the information contained.

Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
UNII Detection Bandwidth	Yes	Not required	Yes

Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
UNII Detection Bandwidth	Yes	Not required

2.4 DFS Detection Thresholds and Limitations of each Parameter

Maximum Transmit Power	Value (See Notes 1 , 2 and 3)
≥ 200 mW	-64 dBm
< 200 mW and power spectral density < 10 dBm/MHz	-62 dBm
< 200 mW that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

Parameter	Value
Non-occupancy Period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds (See Note 1)
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period (See Note 1 and 2)
UNII Detection Bandwidth	Minimum 100% of the UNII 99% transmission power bandwidth. (See Note 3)
Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows: • For the Short Pulse Radar Test Signals this instant is the end of the Burst. • For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated. • For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the Radar Waveform. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

TEST REPORT

2.5 Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{SEC}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

Long Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.

Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- 3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- 5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.


A representative example of a Long Pulse radar test waveform:

- 1) The total test signal length is 12 seconds.
- 2) 8 Bursts are randomly generated for the Burst_Count.
- 3) Burst 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.

TEST REPORT

- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) Bursts 2 through 8 are generated using steps 3 – 5.
- 7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

Graphical Representation of a Long Pulse radar Test Waveform

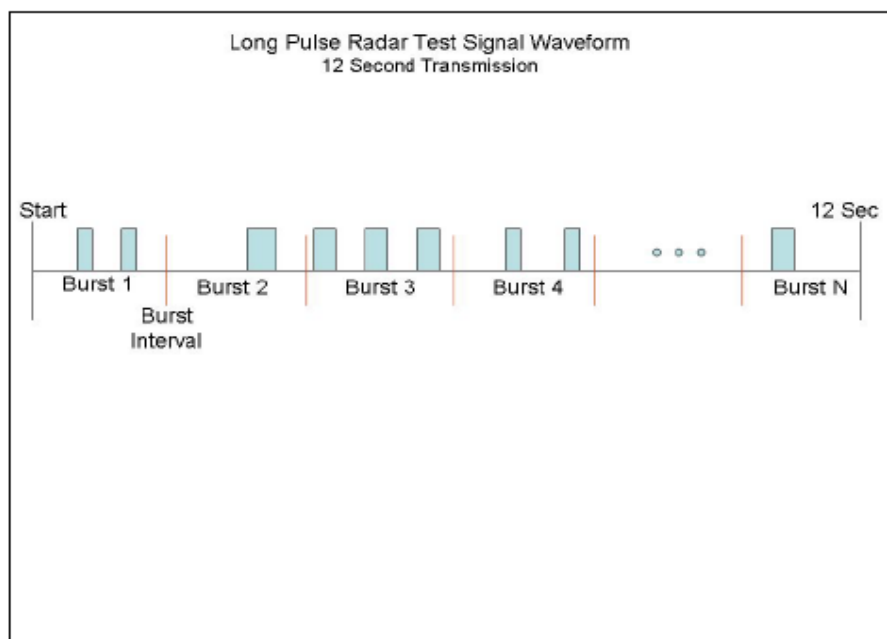

Frequency Hopping Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected¹ from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

2.6 Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted radar waveform. A spectrum analyzer is used to establish the test signal level for each radar type. During this process, there were no transmissions by either Master or Client device. The spectrum analyzer was switched to the zero span (time domain) mode at the frequency of the radar waveform generator. The peak detection was utilized. The spectrum analyzer RBW and VBW were set to at least 3MHz.


The signal generator amplitude and/ or step attenuators were set so that the power level measured at the spectrum analyzer was equal to the DFS detection threshold that is required for the tests.

The signal generator amplitude was set so that the power level measured at the spectrum analyzer was –64 dBm.

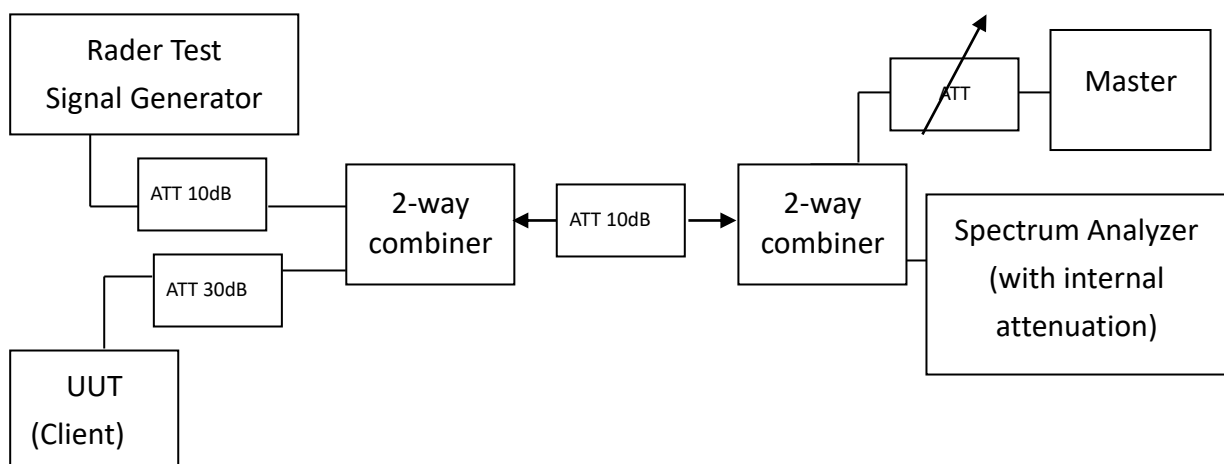


2.6.1 Radar Waveform Calibration Plot

Radar Type 0@802.11ax(HE80)Mode 5290MHz

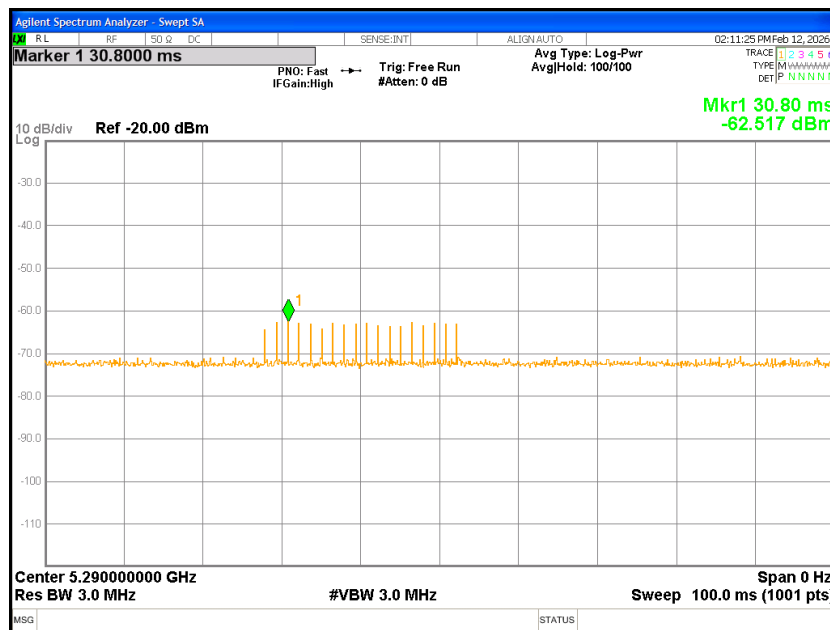

Radar Type 0@802.11ax(HE80)Mode 5530MHz

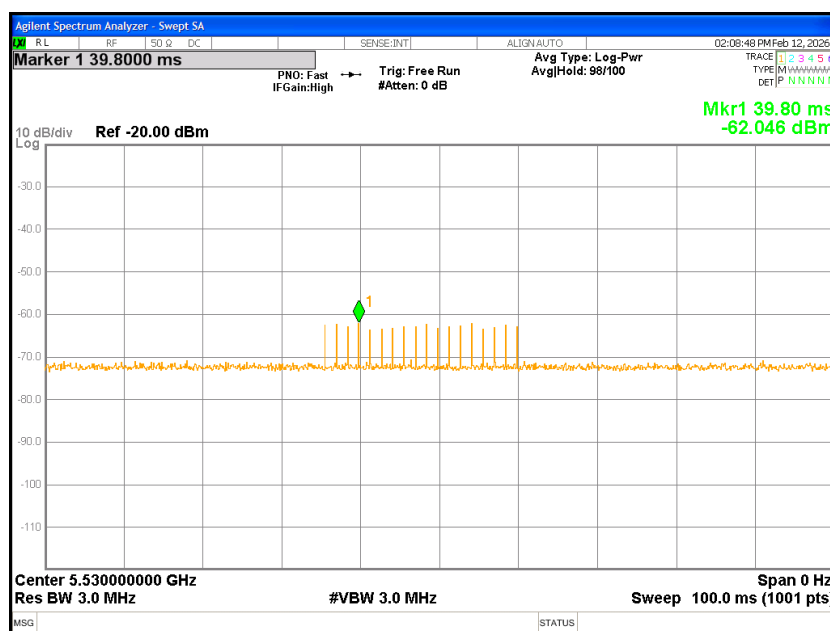


2.7 Test instruments and setup

2.7.1 Deviation about the radar waveform

No deviation.

2.7.2 Test setup

Setup for Client with injection at the Master (Client Mode without DFS detection)

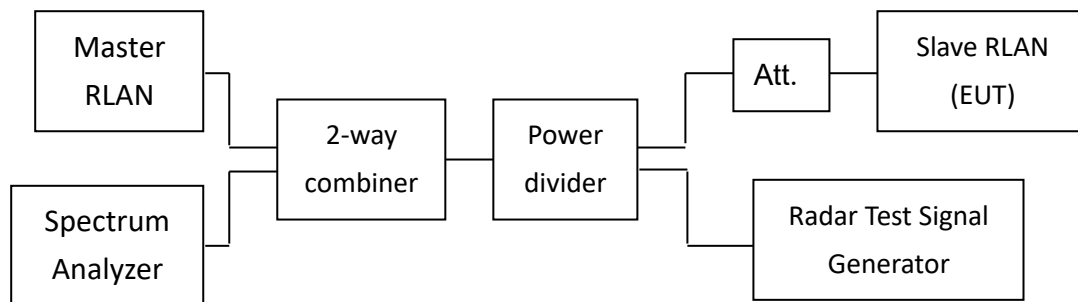

2.8 DFS test results

2.8.1 Test summary

This EUT was defined as the Client without DFS detection.



Clause	Parameter	Required	Result
15.407	DFS Detection Threshold	Not Required	N/A
15.407	Channel Availability Check Time	Not Required	N/A
15.407	Channel Move Time	Applicable	Pass
15.407	Channel Closing Transmission Time	Applicable	Pass
15.407	Non-Occupancy Period	Applicable	Pass
15.407	Uniform Spreading	Not Required	N/A
15.407	UNII Detection Bandwidth	Not Required	N/A

2.8.2 DFS test result



Mode	Channel	Channel Move Time(s)	Limit (s)	Channel Closing Transmission Time (ms)	Limit (ms)	Result
802.11ax(HE80)	58	0.07	10	0	60	PASS
802.11ax(HE80)	106	0.04	10	0	60	PASS

2.8.2.1 Channel Move & Closing Transmission time

Channel Move Time&Closing Time @802.11ax(HE80)Mode 5290MHz

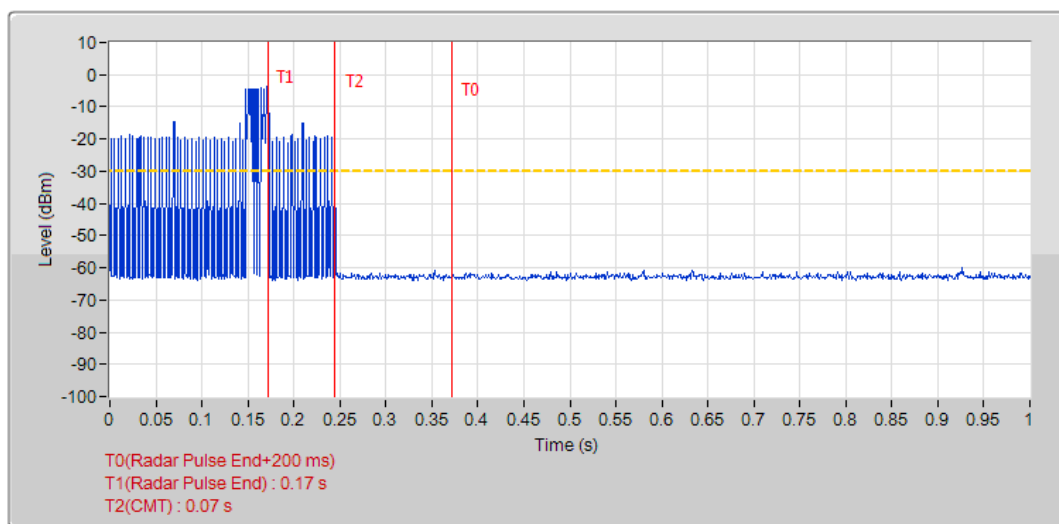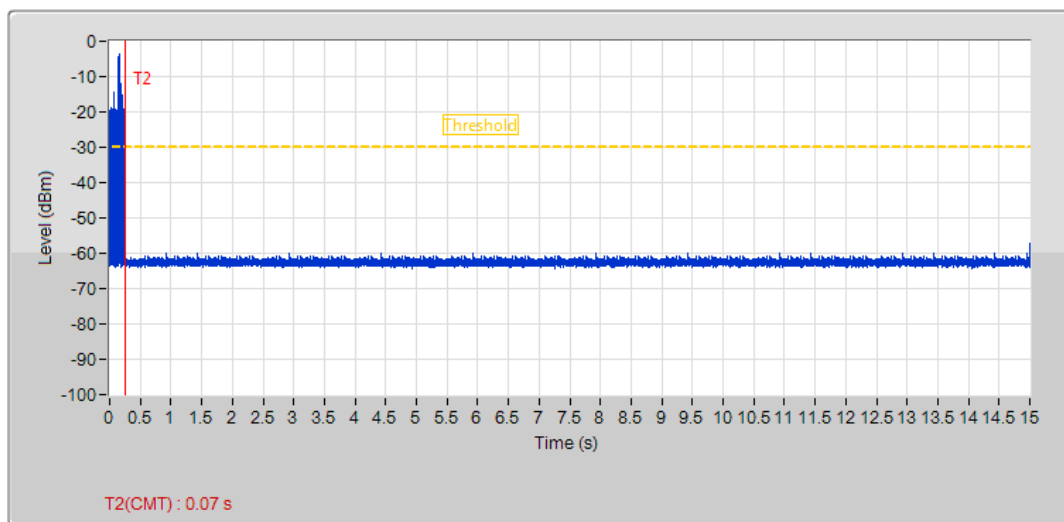


Channel Move Time&Closing Time @802.11ax(HE80)Mode 5530MHz

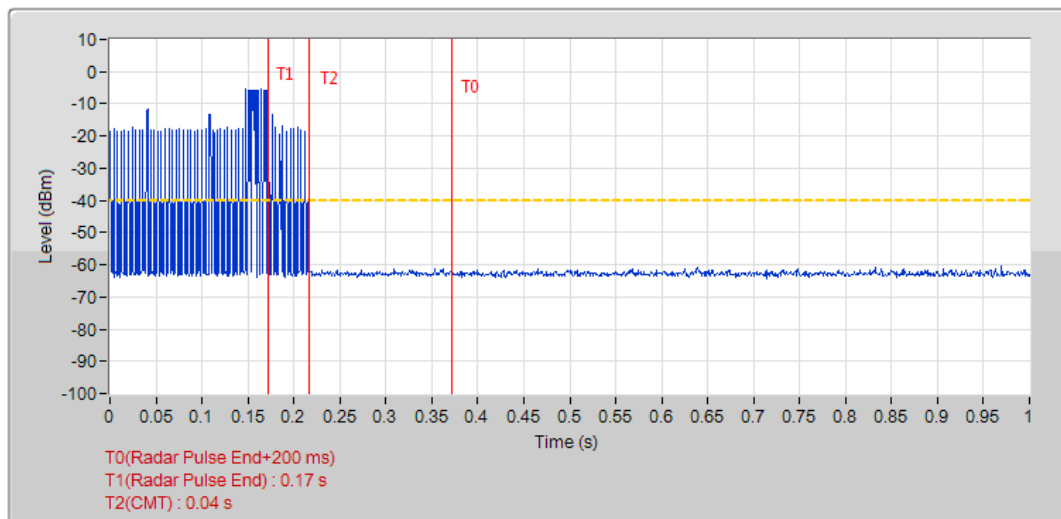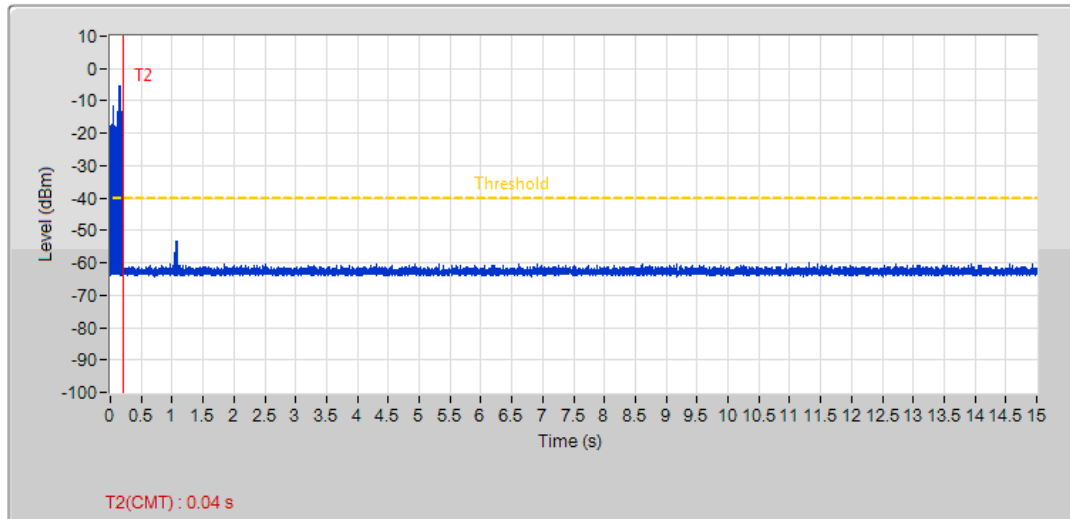


2.9 Non-Occupancy Period

Non-Occupancy Period @802.11ax(HE80)Mode 5290MHz

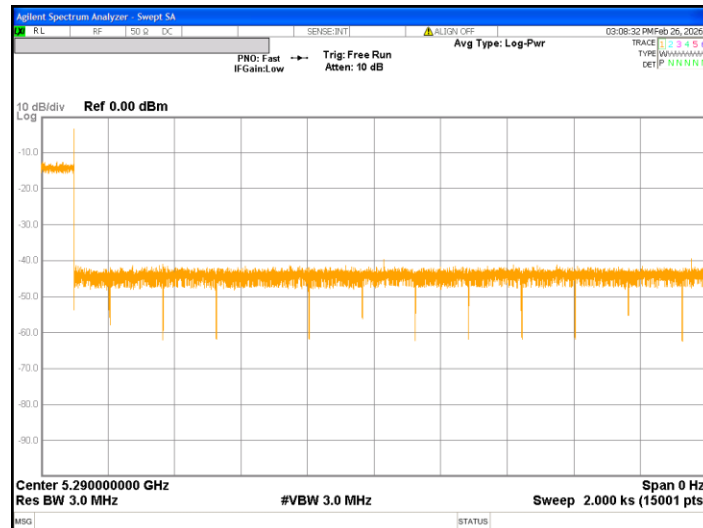

Non-Occupancy Period @802.11ax(HE80)Mode 5530MHz

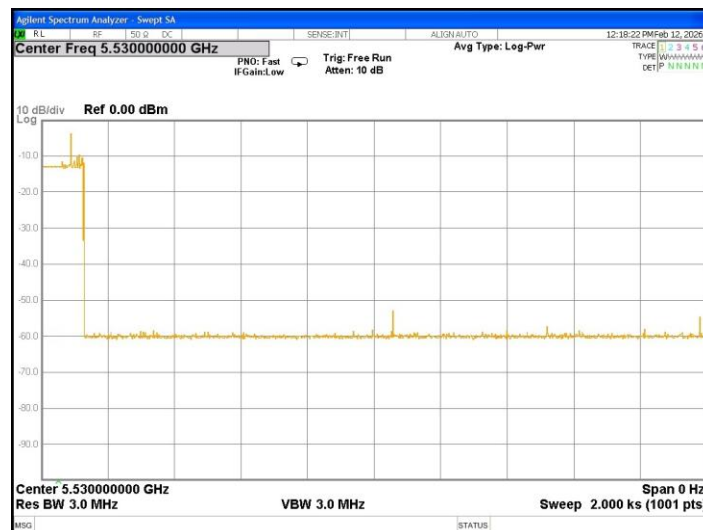

Appendix A: Test equipment list

Test Equipment/ Test site	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
Signal Analyzer	Agilent	N9030A	MY51380492	2026/01/20	2027/01/19
Signal Generator	KEYSIGHT	N5182B	MY56200111	2025/05/26	2026/05/25
DFS Test software	Keysight	Keysight Signal Studio for DFS Radar Profiles	V 3.0.0.0	NCR	NCR

Appendix B: Measurement Uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2.0$.

Item	Uncertainty
DFS	0.69 dB