FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART E

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Tablet + Bluetooth, DTS/UNII a/b/g/n/ac and ANT+

MODEL NUMBER: SM-T805S, SM-T805K, SM-T805L

FCC ID: A3LSMT805KOR

REPORT NUMBER: 14I18753-E1 Revision A

ISSUE DATE: OCTOBER 14, 2014

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-088

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	9/18/14	Initial issue	P. Zhang
A	10/14/14	Revised HSUPA Conducted Power	P. Zhang

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 5
2. TEST METHODOLOGY 6
3. FACILITIES AND ACCREDITATION 6
4. CALIBRATION AND UNCERTAINTY 6
4.1. MEASURING INSTRUMENT CALIBRATION 6
4.2. SAMPLE CALCULATION 6
4.3. MEASUREMENT UNCERTAINTY 7
5. EQUIPMENT UNDER TEST 8
5.1. DESCRIPTION OF EUT 8
5.2. MAXIMUM OUTPUT POWER 8
5.3. MAXIMUM OUTPUT POWER (LTE) 9
5.4. DESCRIPTION OF AVAILABLE ANTENNAS 10
5.5. DESCRIPTION OF TEST SETUP 11
6. TEST AND MEASUREMENT EQUIPMENT 14
7. Summary Table 15
8. RF POWER OUTPUT VERIFICATION 16
8.1. GSM/GPRS/EDGE 16
8.1.1. GSM OUTPUT POWER RESULT 17
8.2. UMTS REL 99 18
8.2.1. UMTS REL 99 OUTPUT POWER RESULT 18
8.3. UMTS HSDPA 19
8.3.1. UMTS HSDPA OUTPUT POWER RESULT 20
8.3.2. UMTS HSUPA 21
8.3.3. UMTS HSUPA OUTPUT POWER RESULT 22
8.4. LTE OUTPUT VERIFICATION 23
8.4.1. LTE OUTPUT RESULT 23
9. PEAK TO AVERAGE RATIO 25
9.1. CONDUCTED PEAK TO AVERAGE RESULT 25
10. LIMITS AND CONDUCTED RESULTS 29
10.1. OCCUPIED BANDWIDTH 29
10.1.1. OCCUPIED BANDWIDTH RESULTS 30
10.1.1. OCCUPIED BANDWIDTH PLOTS 32

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.2. BAND EDGE EMISSIONS 36
10.2.1. BAND EDGE PLOTS 37
10.3. OUT OF BAND EMISSIONS 48
10.3.1. OUT OF BAND EMISSIONS RESULT 49
10.3.2. OUT OF BAND EMISSIONS PLOTS....51
10.4. FREQUENCY STABILITY 55
10.4.1. FREQUENCY STABILITY RESULTS....56
11. RADIATED TEST RESULTS 59
11.1. RADIATED POWER (ERP & EIRP)....59
11.1.1. ERP/EIRP Results....60
11.1.2. LTE ERP/EIRP Results 61
11.1.3. ERP/EIRP PLOTS....62
11.2. FIELD STRENGTH OF SPURIOUS RADIATION 75
11.2.1. SPURIOUS RADIATION DATA....76
12. SETUP PHOTOS 89

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1. ATTESTATION OF TEST RESULTS

COMPANY NAME:	SAMSUNG ELECTRONICS CO., LTD**.**
EUT DESCRIPTION:	GSM/WCDMA/LTE Tablet + Bluetooth, DTS/UNII a/b/g/n/ac and ANT+
MODEL:	SM-T805S, SM-T805K, SM-T805L
Serial Number:	Conducted: 1951580 Radiated: 1951579
DATE TESTED:	SEPTEMBER 5 - 18, 2014

APPLICABLE STANDARDS	
STANDARD	**TEST RESULTS**
FCC PART 22H, 24E, 27E	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For

UL Verification Services Inc. By:

PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

Tested By:

DANIEL SOPER
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24, FCC CFR 47 Part 27.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☐ Chamber D
☒ Chamber B	☐ Chamber E
☒ Chamber C	☐ Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at http://ts.nist.gov/standards/scopes/2000650.htm.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

EIRP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(between the SG and substitution antenna) + Substitution Antenna Factor (dBi)
ERP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(between the SG and substitution antenna)
(Path loss = Signal generator output – PSA reading with substitution antenna)

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 27000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Tablet + Bluetooth, DTS/UNII a/b/g/n/ac and ANT+

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
GSM1900	1850~1910	GMSK	29.5	891.3		
	1850~1910	GPRS	29.5	891.3	32.9	1945.4
	1850~1910	EGPRS				

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
Band 5	824~849	REL99	22.8	190.5	19.2	83.6
	824~849	HSDPA	22.7	186.2	18.5	71.3
	824~849	HSUPA	22.7	186.2		
	824~849	DC-HSDPA				
Band 2	1850~1910	REL99	22.5	177.83	26.5	443.6
	1850~1910	HSDPA	22.5	177.83	26.3	423.6
	1850~1910	HSUPA	21.6	144.54		

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.3. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and radiated ERP/EIRP output powers as follows:

FCC Part 27 (10MHz Bandwidth)							
Band	Frequency Range(MHz)	Bandwidth (MHz)	Modulation	Conducted		Radiated	
			Peak	Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE17	704~716	10MHz	QPSK	23.5	223.9	11.4	13.80
	704~716	10MHz	16QAM	22.5	177.8	10.6	11.48

FCC Part 27 (5MHz Bandwidth)							
Band	Frequency Range(MHz)	Bandwidth (MHz)	Modulation	Conducted		Radiated	
			Peak	Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE17	704~716	5MHz	QPSK	23.5	223.9	11.8	15.14
	704~716	5MHz	16QAM	22.5	177.8	10.4	10.96

FCC Part 22 (10MHz Bandwidth)							
Band	Frequency Range(MHz)	Bandwidth (MHz)	Modulation	Conducted		Radiated	
			Peak	Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE5	824~849	10MHz	QPSK	23.5	223.9	19.10	81.3
	824~849	10MHz	16QAM	22.5	177.8	18.17	65.63

FCC Part 22 (5MHz Bandwidth)							
Band	Frequency Range(MHz)	Bandwidth (MHz)	Modulation	Conducted		Radiated	
			Peak	Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE5	824~849	5MHz	QPSK	23.5	223.9	19.25	84.16
	824~849	5MHz	16QAM	22.5	177.8	18.16	65.48

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
Band 5, 824~849MHz	-4.86
Band 2, 1850~1910MHz	3.74
LTE17, 704~716MHz	-10.81

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	EP-TA10KWK	N/A	N/A
Earphone	Samsung	SM-T805S	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA

I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes

TEST SETUP

The EUT is continuously communicated to the call box during the tests.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

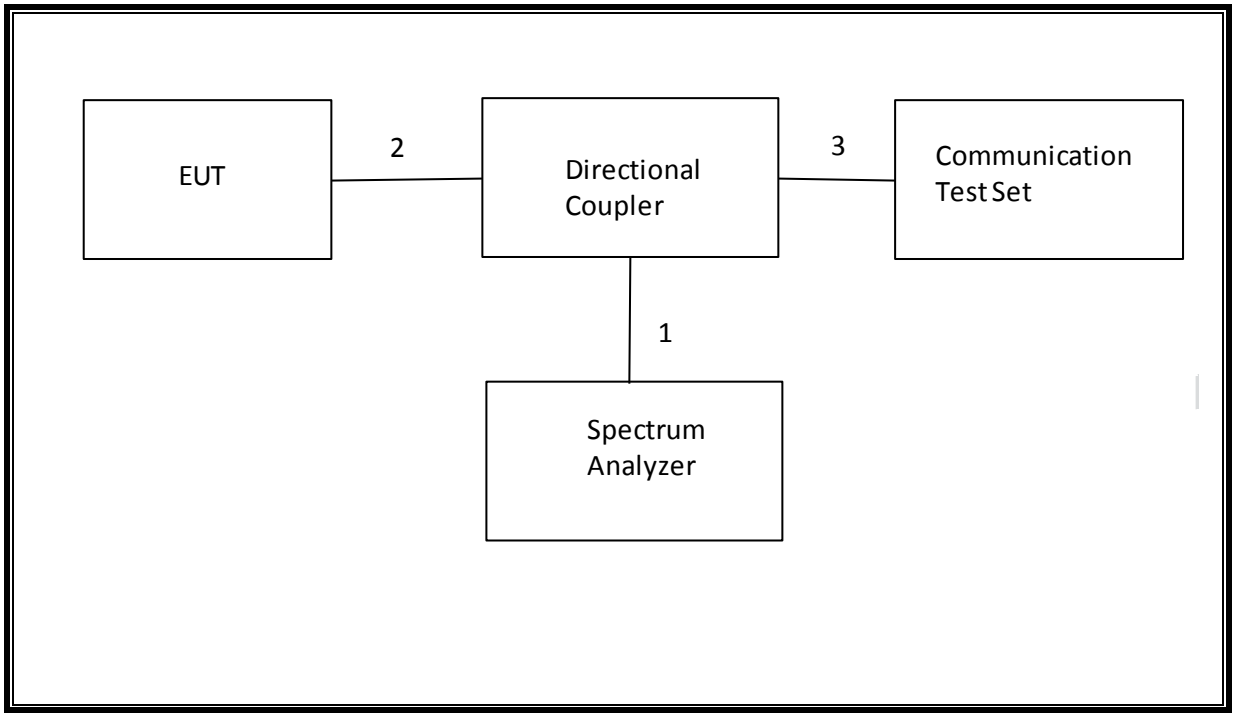

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

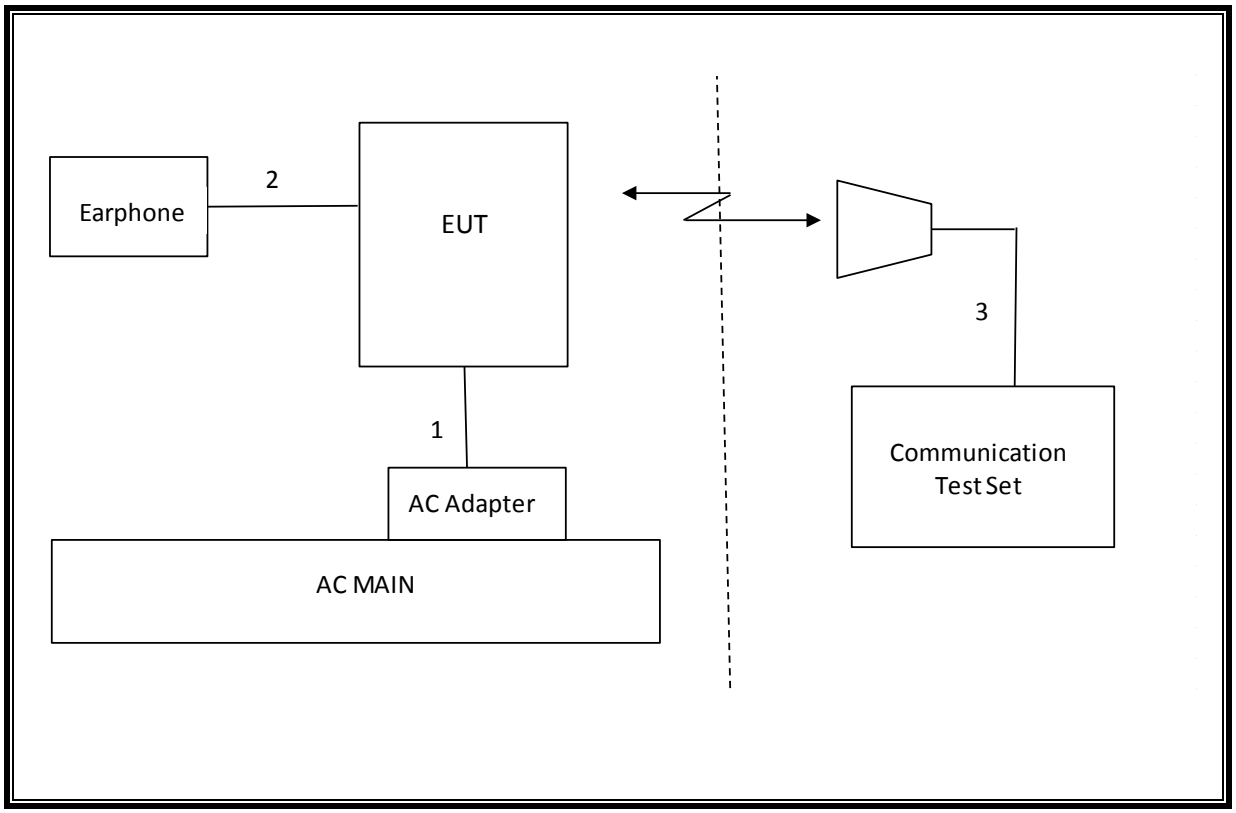

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	**Manufacturer**	**Model**	**Asset**	**Cal Due**
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	A012712	03/04/15
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 18 GHz	EMCO	3115	C00784	10/25/14
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/15
Communications Test Set	R&S	CMW500	135385	07/10/15
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	1629	01/23/15
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/14

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	8.96MHz
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-130(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-22.27dBm
2.1046	N/A	Conducted output power	N/A		Pass	29.5dBm
22.355 24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability	2.5PPM		Pass	0.014PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	19.25dBm
27.50(b)(10)	RSS-130(4.4)		34.77 dBm		Pass	18.81dBm
24.232(c) 27.50(h)(2)	RSS-133(6.4) RSS-199(4.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	32.9dBm
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-130(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-24.2dBm

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press Connection control to choose the different menus

Press RESET > choose all to reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM+GPRS or GSM+EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850/900

> 30 dBm for GPRS1800/1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0> 4 dB

Slot Config > Unchanged (if already set under MS Signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3 (Default)

Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)

Bit Stream > 2E9-1PSR Bit Pattern

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal On to turn on the signal and change settings

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.1.1. GSM OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	1 time slot	2 time slot
				Peak (dBm)	Peak (dBm)
GSM1900	GMSK	512	1850.2	29.4	
		661	1880	29.5	
		810	1909.8	29.2	
	GPRS	512	1850.2	29.4	26.7
		661	1880	29.5	26.8
		810	1909.8	29.2	26.7

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.2. UMTS REL 99

TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	βc	Not Applicable
	βd	Not Applicable
	βec	Not Applicable
	βc/βd	8/15
	βhs	Not Applicable
	βed	Not Applicable

8.2.1. UMTS REL 99 OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	Conducted Power (dBm)
				Avg (dBm)
Band 5	REL99	4132	826.4	22.8
		4183	836.6	22.7
		4233	846.6	22.8
Band 2	REL99	9262	1852.4	22.0
		9400	1880	22.3
		9538	1907.6	22.5

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	βc	2/15	12/15	15/15	15/15
	βd	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	βc/βd	2/15	12/15	15/8	15/4
	βhs	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	Ahs =βhs/βc	30/15			

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.3.1. UMTS HSDPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm)
					Avg (dBm)
Band 5	HSDPA	1	4132	826.4	22.5
			4183	836.6	23.0
			4233	846.6	22.5
		2	4132	826.4	22.9
			4183	836.6	23.0
			4233	846.6	22.5
		3	4132	826.4	23.0
			4183	836.6	23.0
			4233	846.6	22.7
		4	4132	826.4	21.5
			4183	836.6	22.0
			4233	846.6	21.7
Band 2	HSDPA	1	9262	1852.4	22.0
			9400	1880	22.4
			9538	1907.6	22.3
		2	9262	1852.4	21.6
			9400	1880	22.5
			9538	1907.6	22.5
		3	9262	1852.4	21.4
			9400	1880	21.7
			9538	1907.6	21.7
		4	9262	1852.4	20.5
			9400	1880	20.6
			9538	1907.6	20.6

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.4. UMTS HSUPA

TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCH (dB)	-9				
	HS-SCCH_1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
	Bec	209/225	12/15	30/15	2/15	5/15
	βc/βd	11/15	6/15	15/9	2/15	15/15
	Bhs	22/15	12/15	30/15	4/15	30/15
	βed (note1)	1309/225	94/75	47/15 47/15	56/75	134/15
	MPR	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = βhs/βc	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27	

Note1: βed cannot be set directly, it is set by Absolute Grant Value.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.4.1. UMTS HSUPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm)
					Avg (dBm)
Band 5	HSUPA	1	4132	826.4	22.5
			4183	836.6	22.7
			4233	846.6	22.2
		2	4132	826.4	20.5
			4183	836.6	20.7
			4233	846.6	20.2
		3	4132	826.4	21.3
			4183	836.6	21.6
			4233	846.6	21.1
		4	4132	826.4	20.5
			4183	836.6	20.8
			4233	846.6	20.2
		5	4132	826.4	22.5
			4183	836.6	22.7
			4233	846.6	22.2
Band 2	HSUPA	1	9262	1852.4	21.0
			9400	1880	21.1
			9538	1907.6	21.6
		2	9262	1852.4	20.8
			9400	1880	19.1
			9538	1907.6	19.9
		3	9262	1852.4	20.7
			9400	1880	20.2
			9538	1907.6	20.9
		4	9262	1852.4	19.8
			9400	1880	19.1
			9538	1907.6	20.0
		5	9262	1852.4	21.0
			9400	1880	21.1
			9538	1907.6	21.6

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

8.5. LTE OUTPUT VERIFICATION

8.5.1. LTE OUTPUT RESULT

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm) 23790 710 MHz
LTE Band 17	10	QPSK	1	0	0	**23.50**
			1	25	0	23.50
			1	49	0	23.50
			25	0	1	**22.10**
			25	12	1	22.09
			25	25	1	22.09
			50	0	1	**22.08**
		16QAM	1	0	1	22.50
			1	25	1	22.50
			1	49	1	22.50
			25	0	2	21.01
			25	12	2	20.95
			25	25	2	20.99
			50	0	2	20.91

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm) 23790 710 MHz
LTE Band 17	5	QPSK	1	0	0	23.50
			1	12	0	23.50
			1	24	0	23.50
			12	0	1	22.17
			12	7	1	22.15
			12	13	1	22.17
			25	0	1	22.12
		16QAM	1	0	1	22.50
			1	12	1	22.50
			1	24	1	22.50
			12	0	2	21.13
			12	7	2	21.08
			12	13	2	21.12
			25	0	2	20.99

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20450	20525	20600
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	**23.50**	**23.50**	**23.50**
			1	25	0	23.50	23.50	23.50
			1	49	0	23.50	23.50	23.50
			25	0	1	**22.27**	**22.23**	22.17
			25	12	1	22.24	22.23	**22.21**
			25	25	1	22.21	22.17	22.18
			50	0	1	22.14	**22.17**	22.11
		16QAM	1	0	1	22.50	22.50	22.49
			1	25	1	22.50	22.50	22.45
			1	49	1	22.50	22.50	22.45
			25	0	2	21.03	21.00	20.97
			25	12	2	20.99	20.98	21.01
			25	25	2	21.01	20.97	21.02
			50	0	2	20.97	20.95	20.96

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20425	20525	20625
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	23.50	23.50	23.50
			1	12	0	23.50	23.50	23.50
			1	24	0	23.50	23.50	23.50
			12	0	1	22.22	22.19	22.16
			12	7	1	22.22	22.22	22.13
			12	13	1	22.24	22.19	22.17
			25	0	1	22.28	22.23	22.18
		16QAM	1	0	1	22.50	22.50	22.50
			1	12	1	22.50	22.50	22.50
			1	24	1	22.50	22.50	22.50
			12	0	2	21.06	21.05	20.96
			12	7	2	21.04	21.01	20.92
			12	13	2	21.05	21.08	20.91
			25	0	2	21.06	21.00	21.05

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

9. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT

Band LTE17 10MHz 16QAM	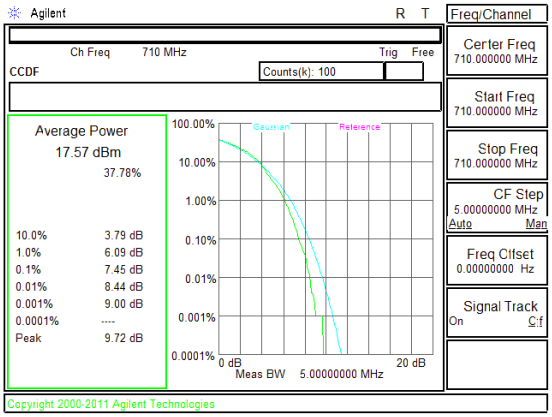 Band LTE17 10MHz 16QAM Mid channel	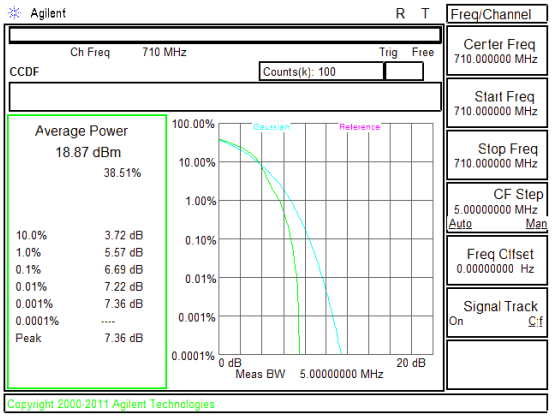 Band LTE17 10MHz QPSK Mid channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE17 5MHz 16QAM	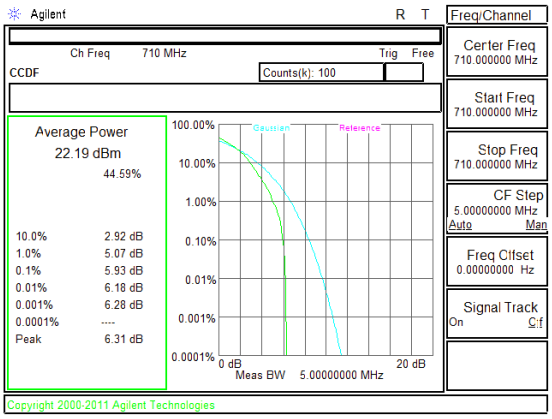 Band LTE17 5MHz 16QAM Mid channel	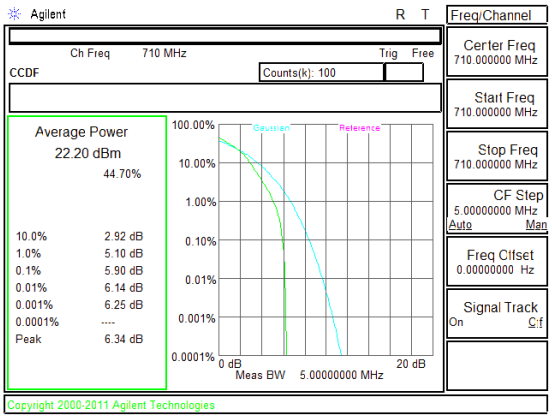 Band LTE17 5MHz QPSK Mid channel

Band LTE5 10MHz 16QAM	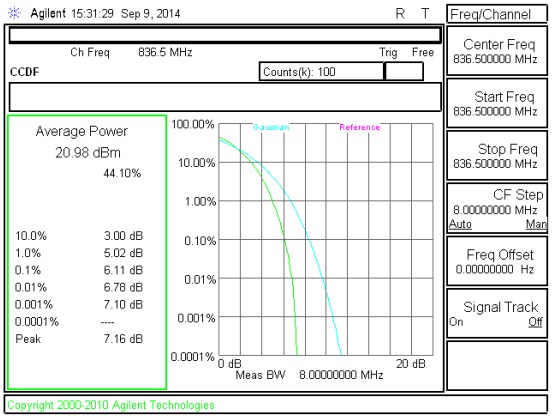 Band LTE5 10MHz 16QAM Mid channel	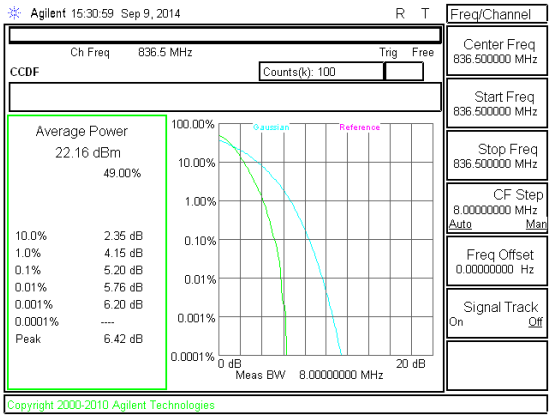 Band LTE5 10MHz QPSK Mid channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE5 5MHz 16QAM	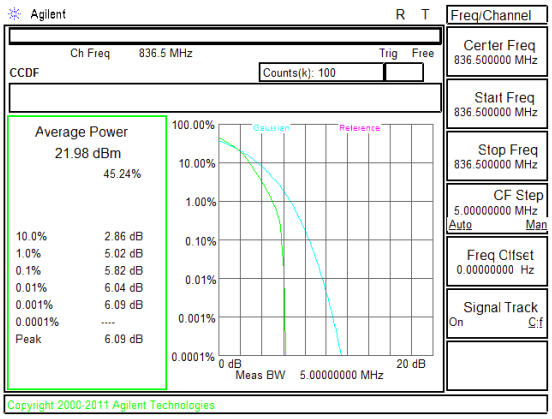 Band LTE5 5MHz 16QAM Mid channel	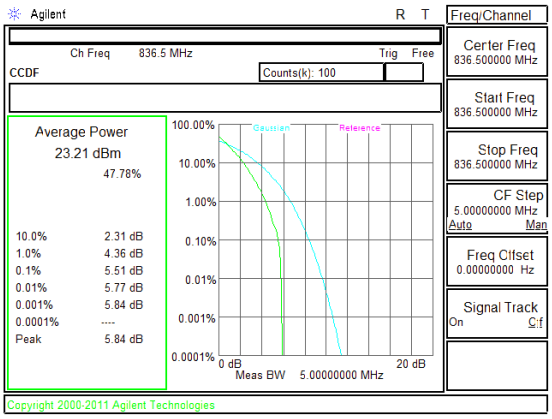 Band LTE5 5MHz QPSK Mid channel

Band Band 2 HSDPA	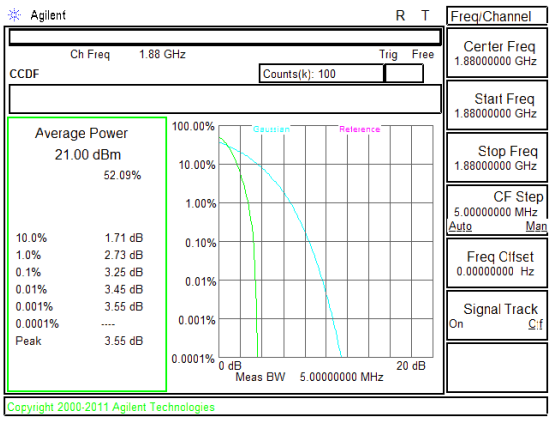 Band WCDMA B2 HSDPA	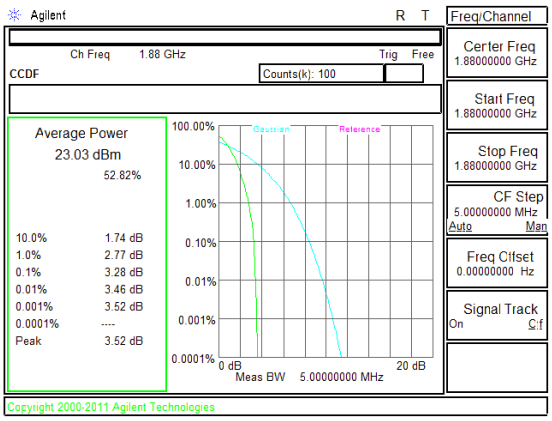 Band WCDMA B2 REL99

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band Band 5 HSDPA	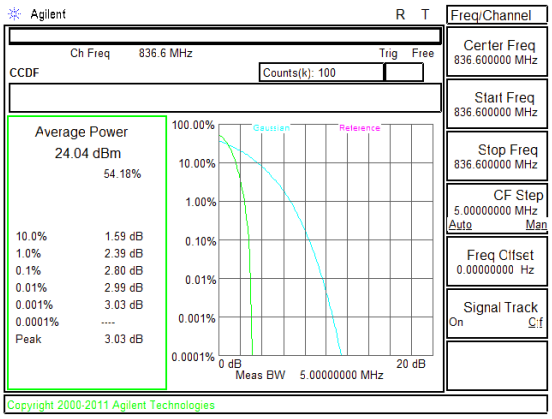 Band WCDMA B5 HSDPA	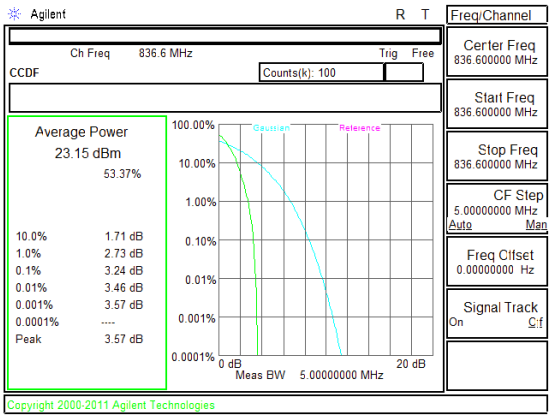 Band WCDMA B5 REL99
GSM	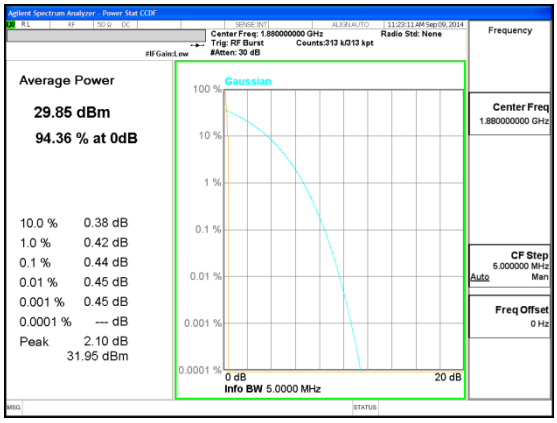 GPRS 1900

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r01 - 06/07/2013)

MODES TESTED

GSM, WCDMA, LTE Band 5, LTE Band 17

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.1.1. OCCUPIED BANDWIDTH RESULTS

GSM OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
GSM1900	GMSK	512	1850.2		
		661	1880		
		810	1909.8		
	GPRS	512	1850.2	0.24	0.32
		661	1880	0.24	0.32
		810	1909.8	0.25	0.32

WCDMA OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
Band 5	REL99	4132	826.4	4.15	4.71
		4183	836.6	4.13	4.71
		4233	846.6	4.15	4.70
	HSDPA	4132	826.4	4.17	4.76
		4183	836.6	4.17	4.73
		4233	846.6	4.15	4.74
	HSUPA	4132	826.4		
		4183	836.6		
		4233	846.6		
Band 2	REL99	9262	1852.4	4.15	4.69
		9400	1880	4.17	4.73
		9538	1907.6	4.16	4.72
	HSDPA	9262	1852.4	4.15	4.71
		9400	1880	4.15	4.72
		9538	1907.6	4.16	4.73
	HSUPA	9262	1852.4		
		9400	1880		
		9538	1907.6		

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

LTE OCCUPIED BANDWIDTH RESULTS

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE17	10	QPSK	50/0	709	8.93	9.57
			50/0	710	8.92	9.61
			50/0	711	8.91	9.62
		16QAM	50/0	709	8.92	9.65
			50/0	710	8.93	9.62
			50/0	711	8.94	9.58

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE17	5	QPSK	25/0	706.5	4.48	4.87
			25/0	710	4.47	4.86
			25/0	713.5	4.48	4.84
		16QAM	25/0	706.5	4.46	4.87
			25/0	710	4.49	4.88
			25/0	713.5	4.47	4.87

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	10	QPSK	50/0	829	8.93	9.66
			50/0	836.5	8.94	9.65
			50/0	844	8.96	9.64
		16QAM	50/0	829	8.94	9.67
			50/0	836.5	8.93	9.69
			50/0	844	8.93	9.60

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	5	QPSK	25/0	826.5	4.46	4.89
			25/0	836.5	4.46	4.86
			25/0	846.5	4.47	4.85
		16QAM	25/0	826.5	4.47	4.88
			25/0	836.5	4.47	4.86
			25/0	846.5	4.47	4.83

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.1.1. OCCUPIED BANDWIDTH PLOTS

Band		
LTE17	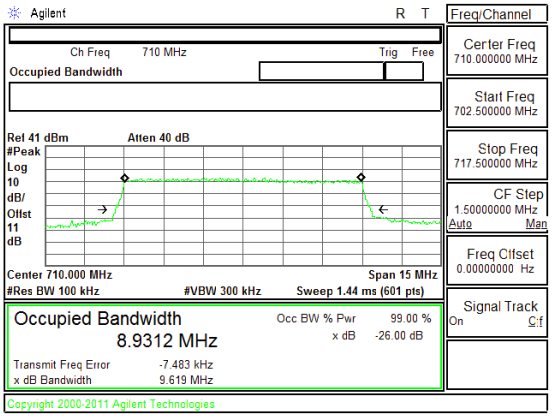 Band LTE17 10MHz OBW 16QAM Mid Channel FRB.gif	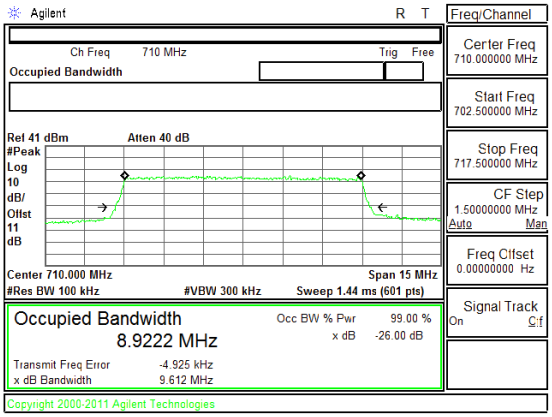 Band LTE17 10MHz OBW QPSK Mid Channel FRB.gif
10MHz		
16QAM		

Band		
LTE17	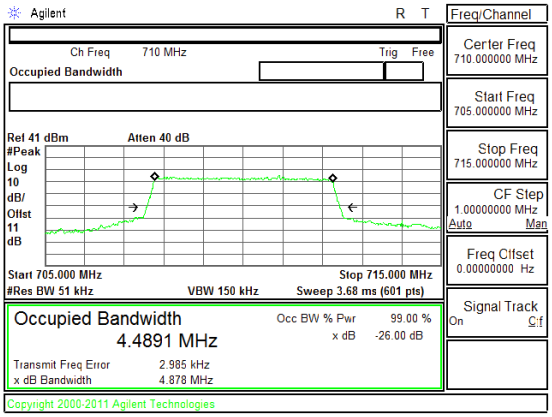 Band LTE17 5MHz OBW 16QAM Mid Channel FRB.gif	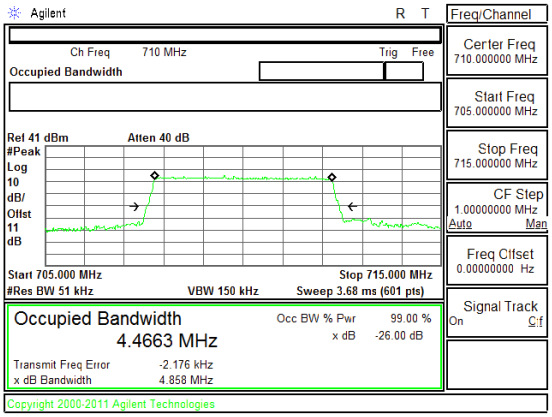 Band LTE17 5MHz OBW QPSK Mid Channel FRB.gif
5MHz		
16QAM		

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE5 10MHz 16QAM

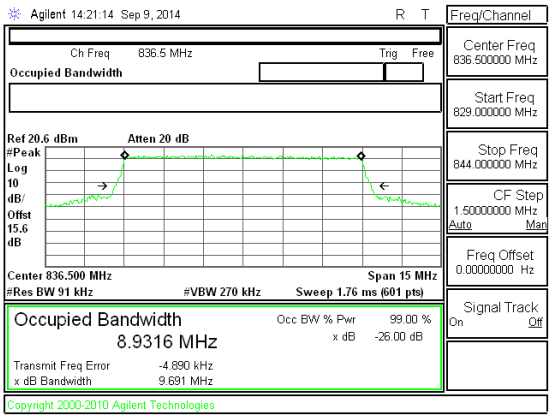

Band LTE5 10MHz OBW 16QAM Mid Channel FRB.gif

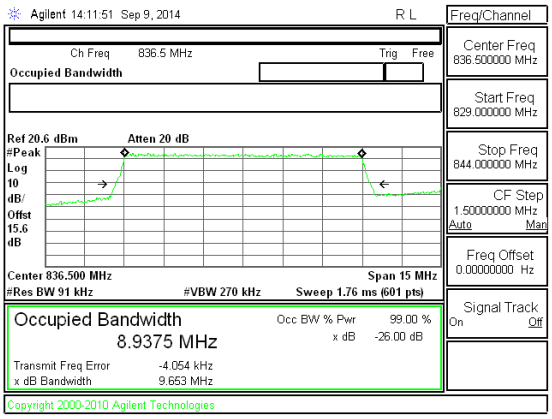

Band LTE5 10MHz OBW QPSK Mid Channel FRB.gif

Band LTE5 5MHz 16QAM

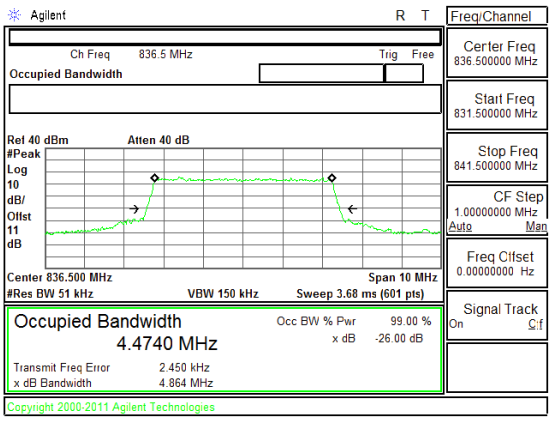

Band LTE5 5MHz OBW 16QAM Mid Channel FRB.gif

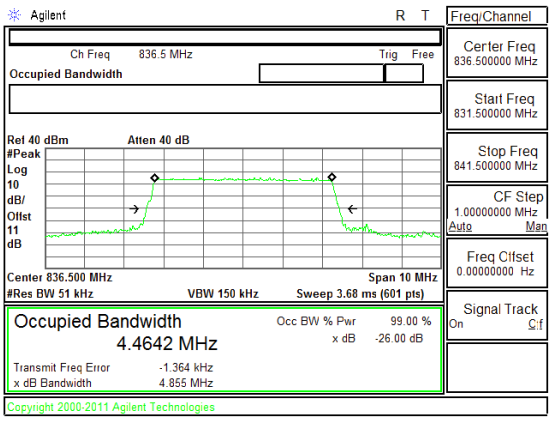

Band LTE5 5MHz OBW QPSK Mid Channel FRB.gif

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

Band 2

HSDPA

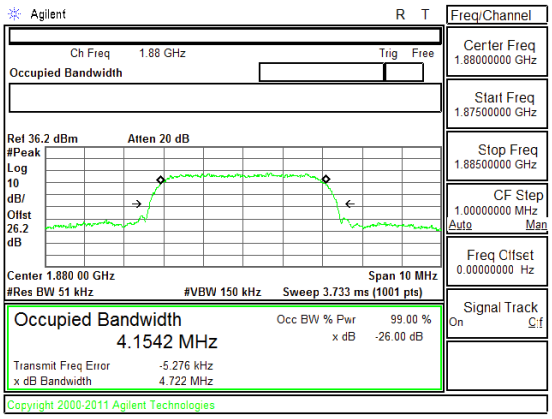

Band WCDMA B2 HSDPA OBW

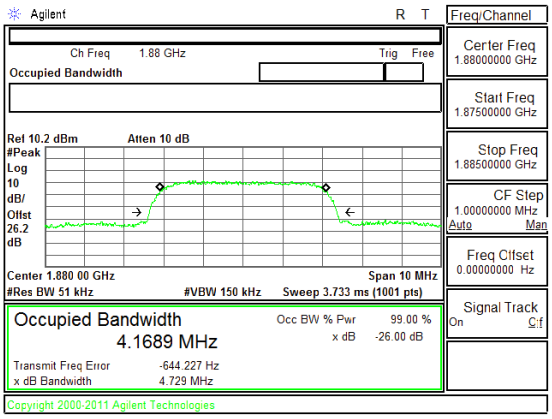

Band WCDMA B2 REL99 OBW

Band

Band 5

HSDPA

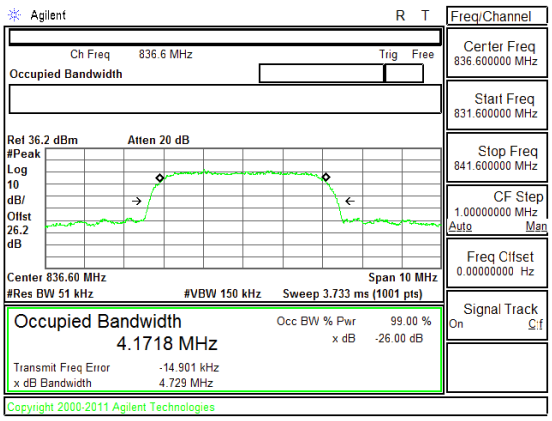

Band WCDMA B5 HSDPA OBW

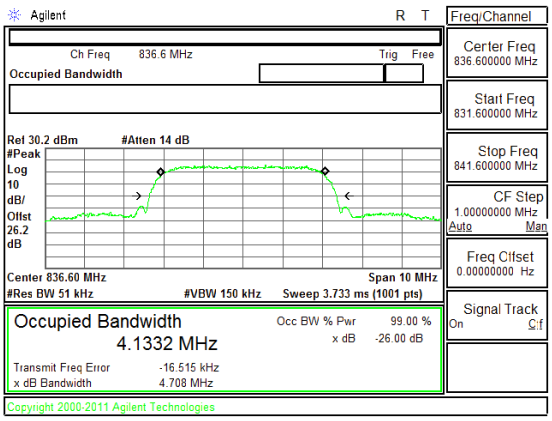

Band WCDMA B5 REL99 OBW

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band GSM 1900 GPRS	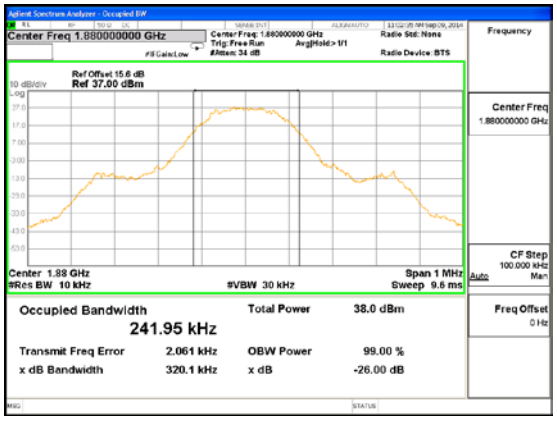 Band GSM1900 GPRS OBW Mid channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238, §27. 53

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

Part 27: (m)(4) For mobile station, the attenuation factor shall be not less than 43+10Log(P)dB at the channel edge and (55+10Log(P)dB) at 5.5MHz from the channel edges.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01
The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

MODES TESTED

GSM, WCDMA, LTE Band 5, LTE Band 17

RESULTS

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.2.1. BAND EDGE PLOTS

Band LTE17 10MHz 16QAM	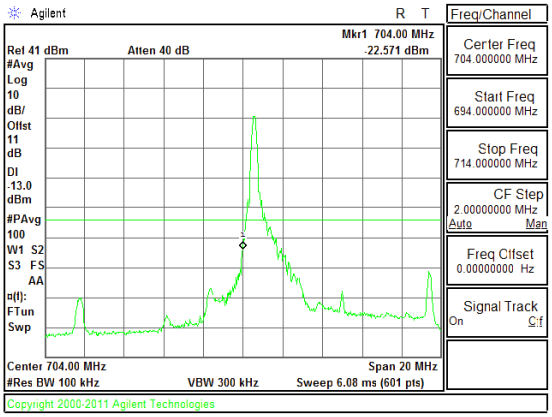 Band LTE17 10MHz CBE 16QAM Low Channel 1RB.gif	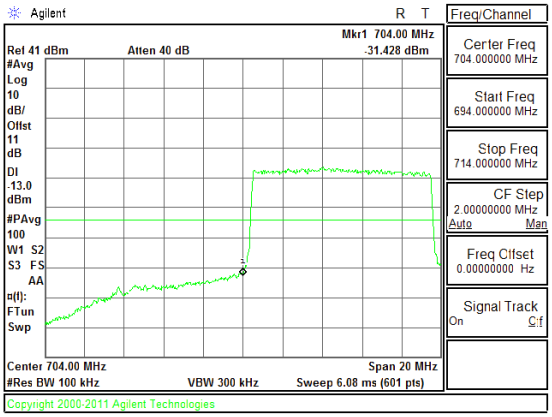 Band LTE17 10MHz CBE 16QAM Low Channel FRB.gif
Band LTE17 10MHz 16QAM	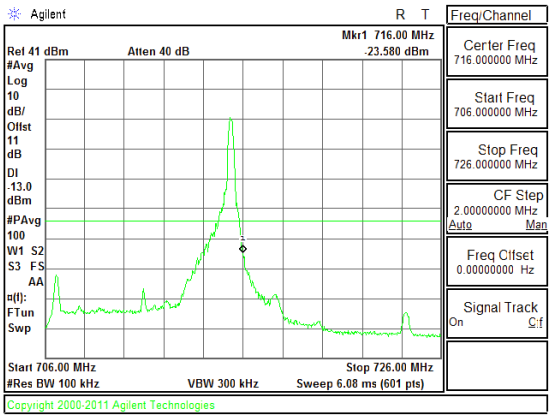 Band LTE17 10MHz CBE 16QAM High Channel 1RB.gif	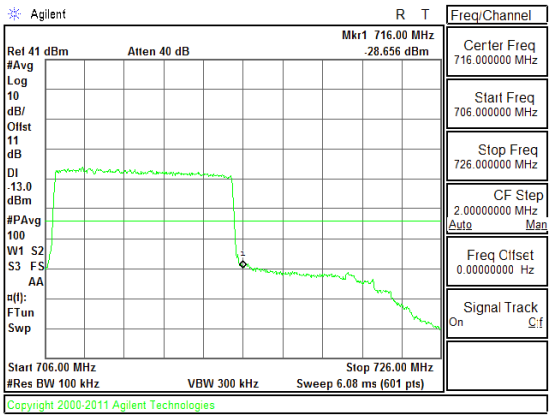 Band LTE17 10MHz CBE 16QAM High Channel FRB.gif

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE17 10MHz QPSK	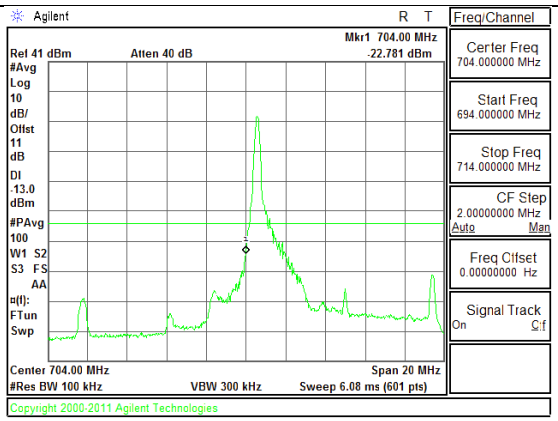 Band LTE17 10MHz CBE QPSK Low Channel 1RB.gif	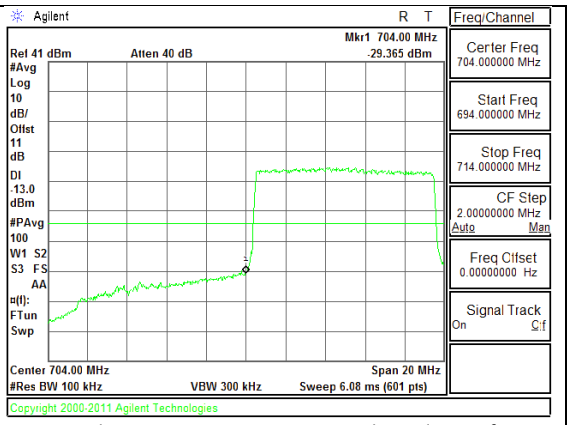 Band LTE17 10MHz CBE QPSK Low Channel FRB.gif
Band LTE17 10MHz QPSK	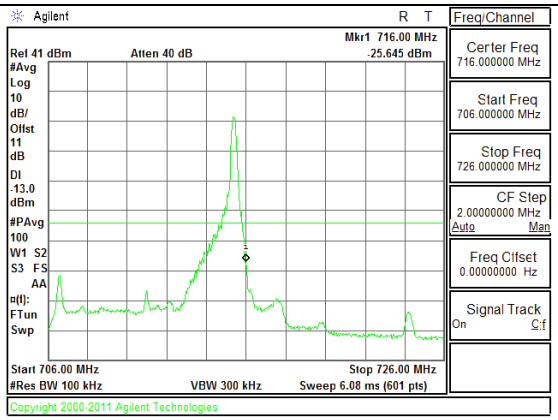 Band LTE17 10MHz CBE QPSK High Channel 1RB.gif	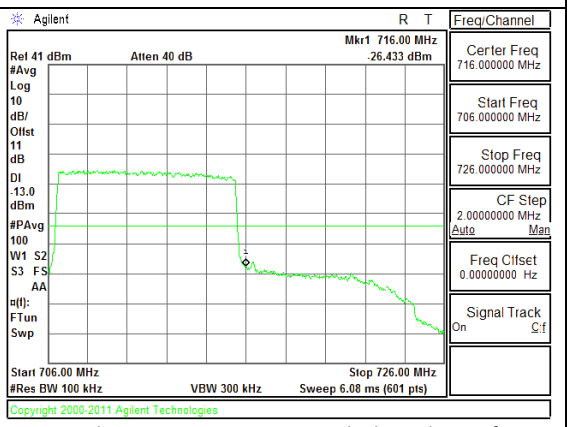 Band LTE17 10MHz CBE QPSK High Channel FRB.gif

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE17 5MHz 16QAM	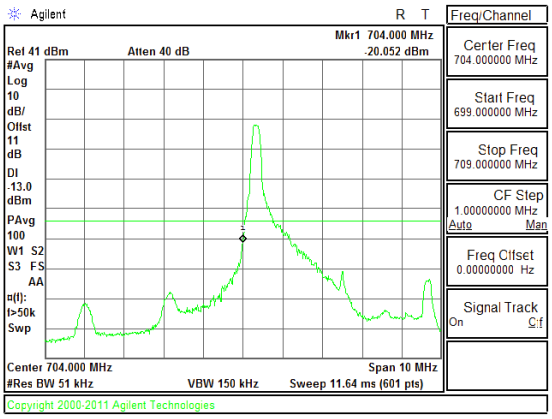 Band LTE17 5MHz CBE 16QAM Low Channel 1RB.gif	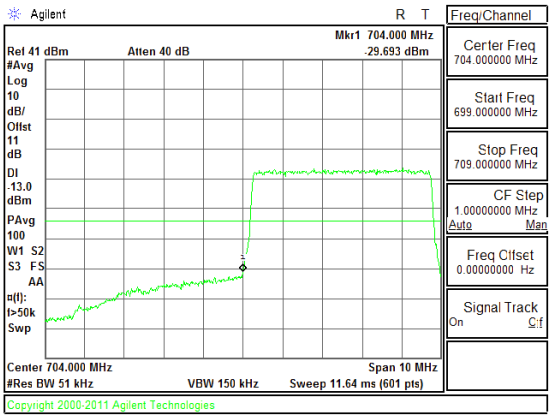 Band LTE17 5MHz CBE 16QAM Low Channel FRB.gif
Band LTE17 5MHz 16QAM	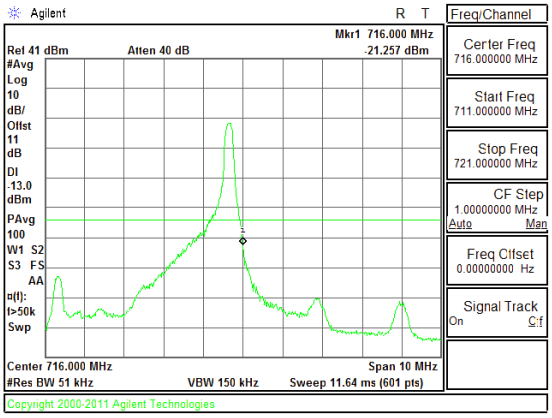 Band LTE17 5MHz CBE 16QAM High Channel 1RB.gif	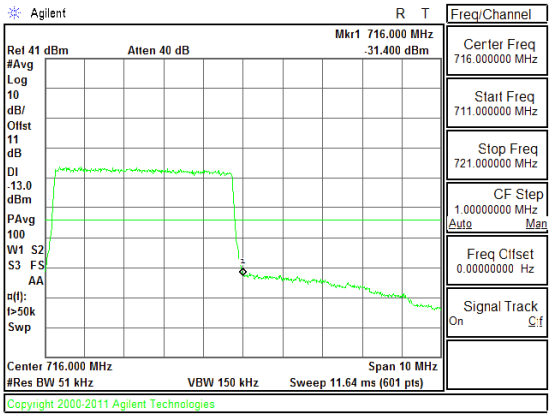 Band LTE17 5MHz CBE 16QAM High Channel FRB.gif

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE17 5MHz QPSK	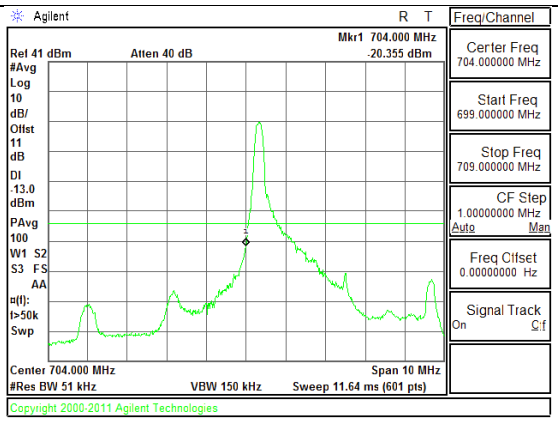 Band LTE17 5MHz CBE QPSK Low Channel 1RB.gif	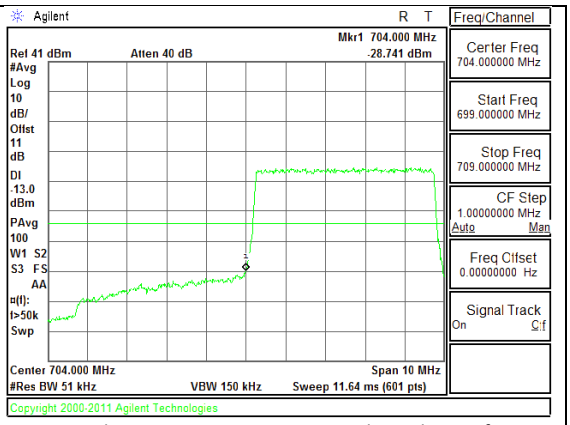 Band LTE17 5MHz CBE QPSK Low Channel FRB.gif
Band LTE17 5MHz QPSK	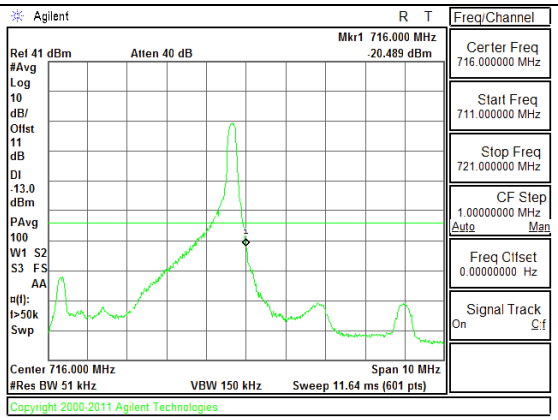 Band LTE17 5MHz CBE QPSK High Channel 1RB.gif	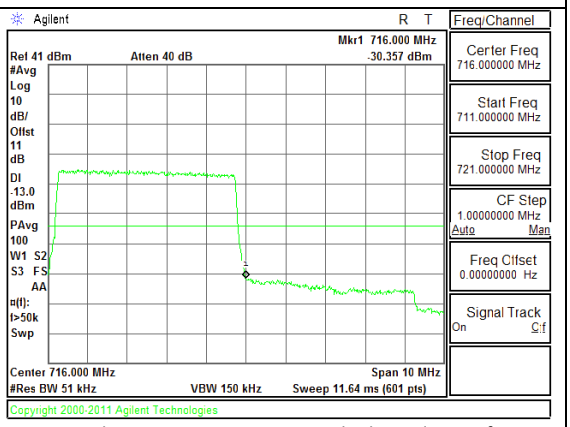 Band LTE17 5MHz CBE QPSK High Channel FRB.gif

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE5 10MHz 16QAM	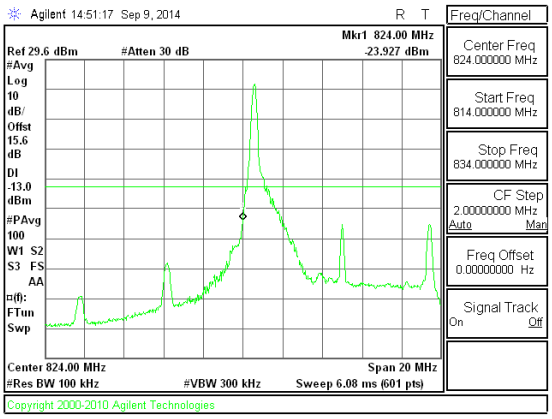 Band LTE5 10MHz CBE 16QAM Low Channel 1RB.gif	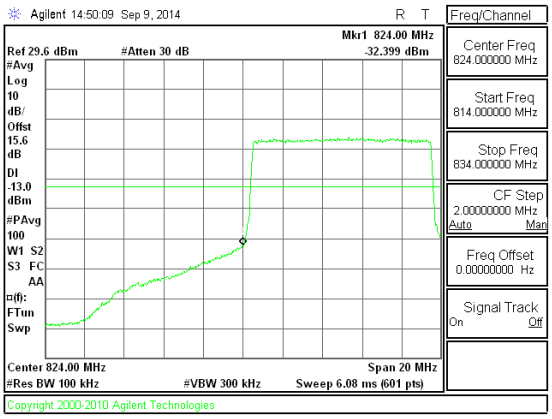 Band LTE5 10MHz CBE 16QAM Low Channel FRB.gif
Band LTE5 10MHz 16QAM	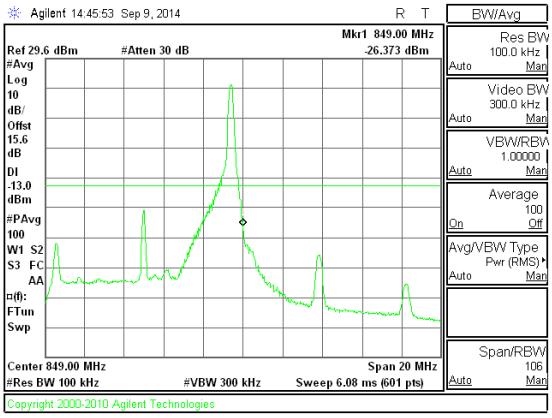 Band LTE5 10MHz CBE 16QAM High Channel 1RB.gif	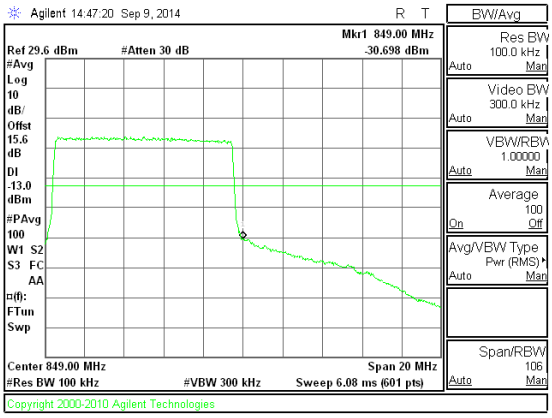 Band LTE5 10MHz CBE 16QAM High Channel FRB.gif

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE5 10MHz QPSK	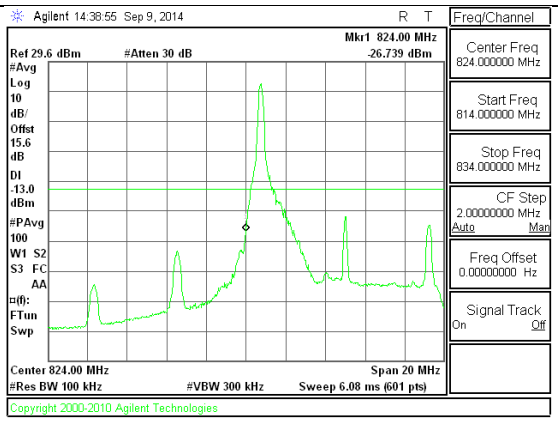 Band LTE5 10MHz CBE QPSK Low Channel 1RB.gif	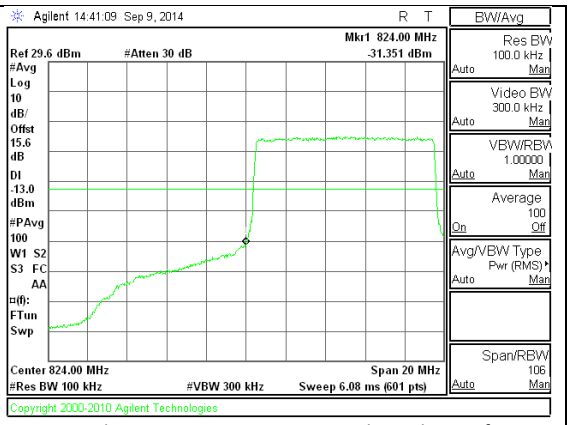 Band LTE5 10MHz CBE QPSK Low Channel FRB.gif
Band LTE5 10MHz QPSK	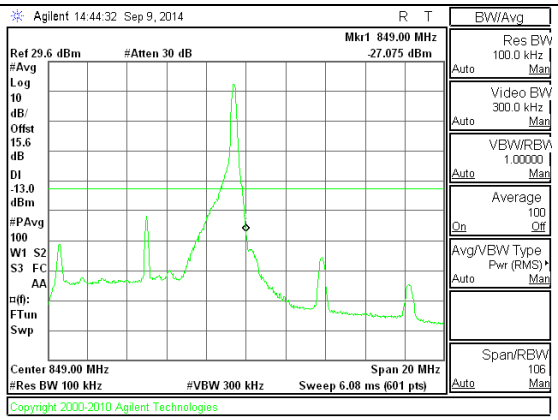 Band LTE5 10MHz CBE QPSK High Channel 1RB.gif	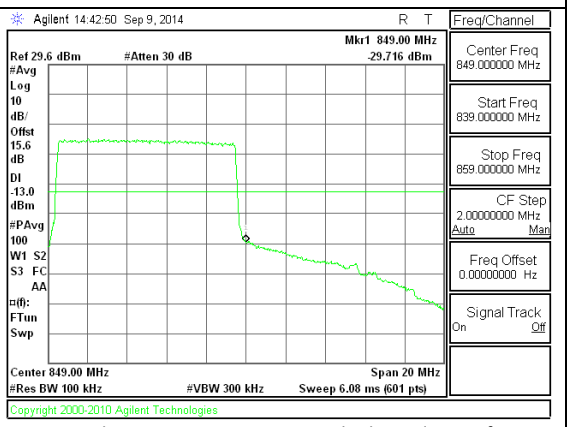 Band LTE5 10MHz CBE QPSK High Channel FRB.gif

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE5 5MHz 16QAM	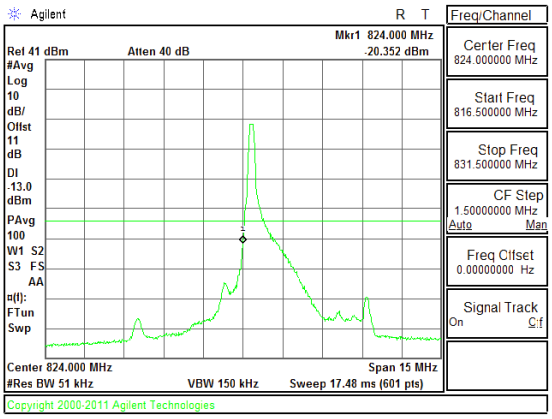 Band LTE5 5MHz CBE 16QAM Low Channel 1RB.gif	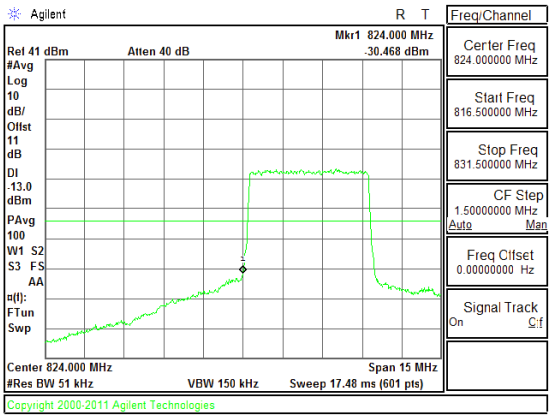 Band LTE5 5MHz CBE 16QAM Low Channel FRB.gif
Band LTE5 5MHz 16QAM	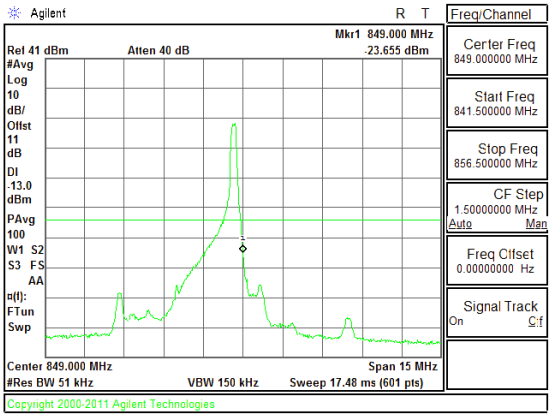 Band LTE5 5MHz CBE 16QAM High Channel 1RB.gif	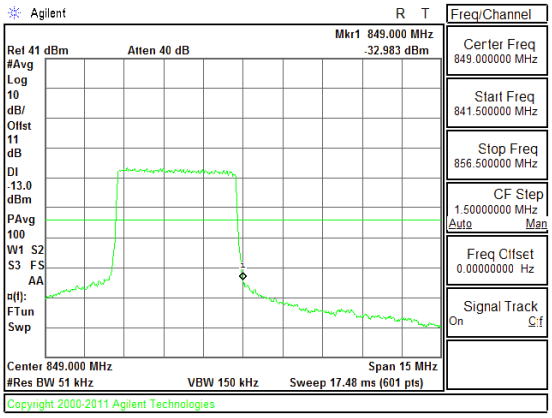 Band LTE5 5MHz CBE 16QAM High Channel FRB.gif

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE5 5MHz QPSK	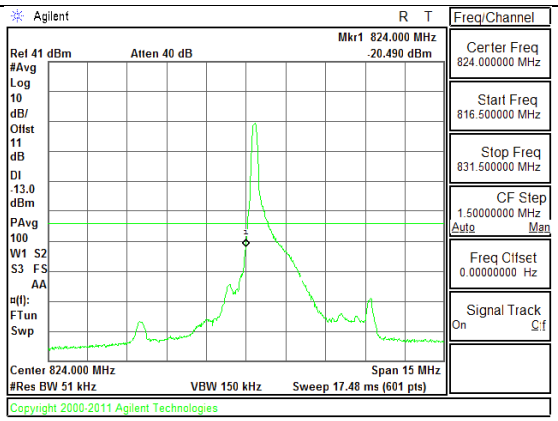 Band LTE5 5MHz CBE QPSK Low Channel 1RB.gif	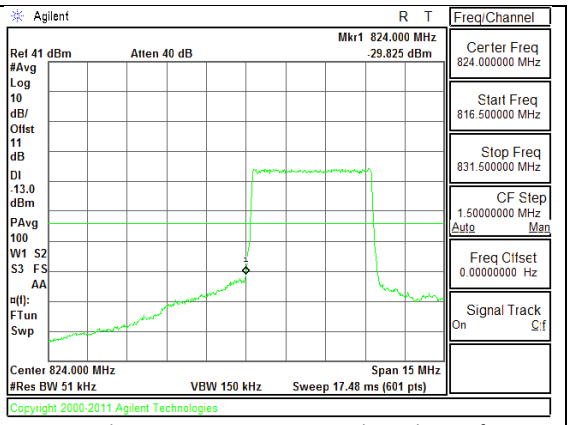 Band LTE5 5MHz CBE QPSK Low Channel FRB.gif
Band LTE5 5MHz QPSK	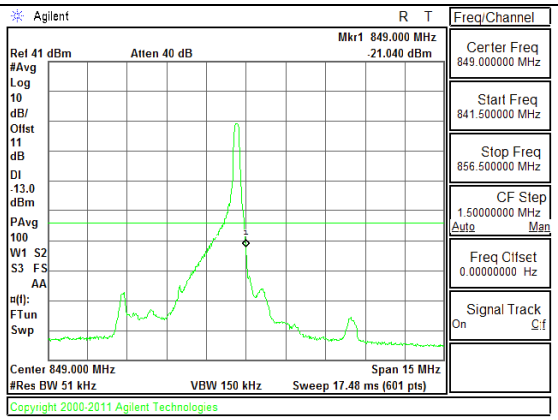 Band LTE5 5MHz CBE QPSK High Channel 1RB.gif	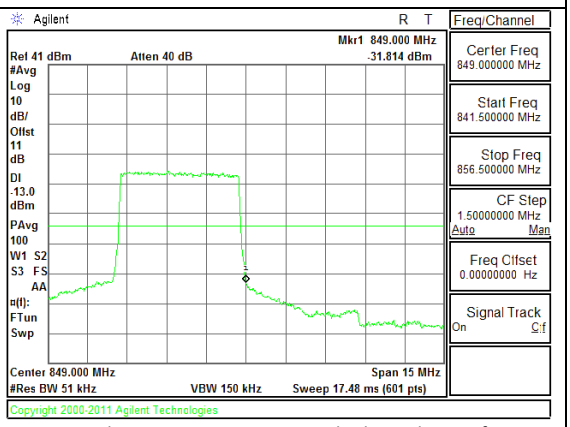 Band LTE5 5MHz CBE QPSK High Channel FRB.gif

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band Band 2 HSDPA	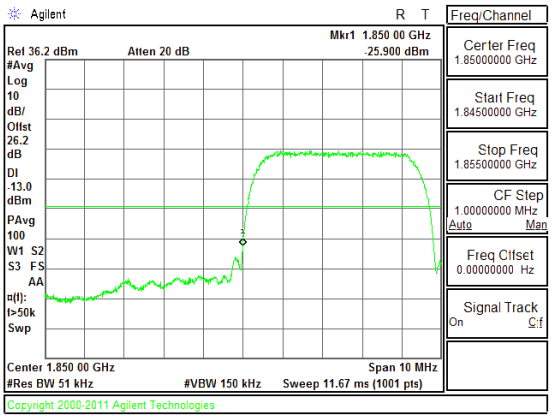 Band WCDMA B2 HSDPA CBE	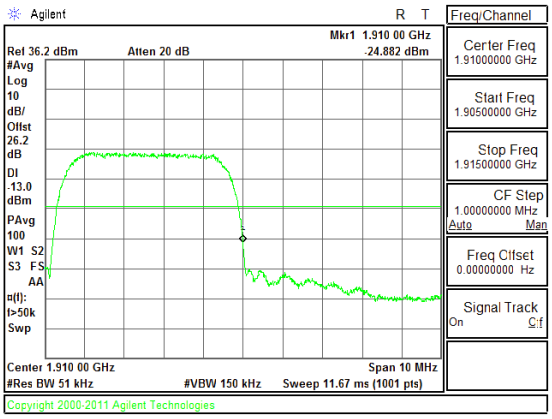 Band WCDMA B2 HSDPA CBE
Band Band 2 REL99	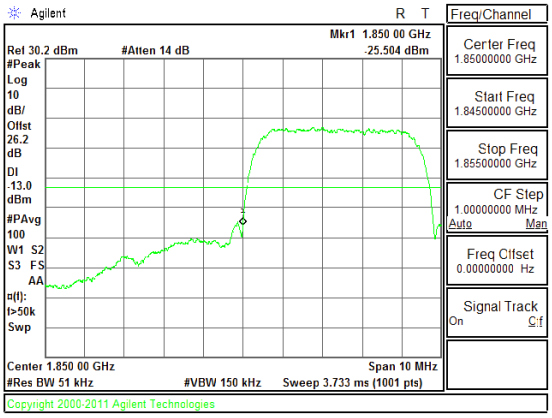 Band WCDMA B2 REL99 CBE	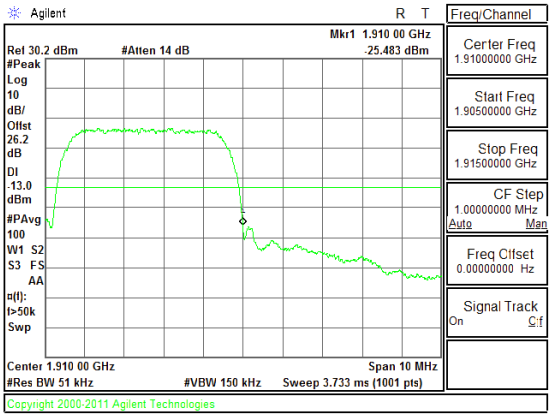 Band WCDMA B2 REL99 CBE

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band Band 5 HSDPA	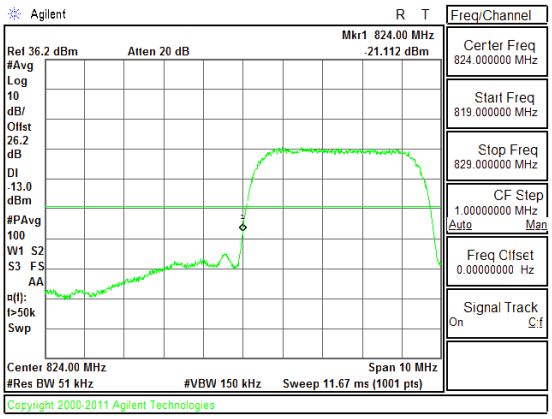 Band WCDMA B5 HSDPA CBE	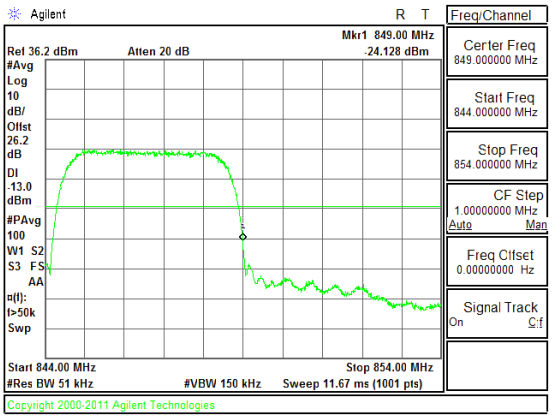 Band WCDMA B5 HSDPA CBE
Band Band 5 REL99	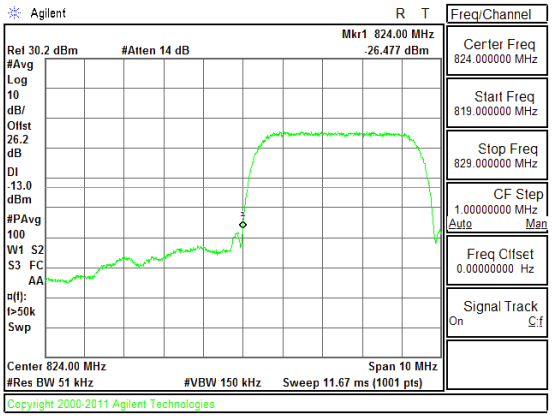 Band WCDMA B5 REL99 CBE	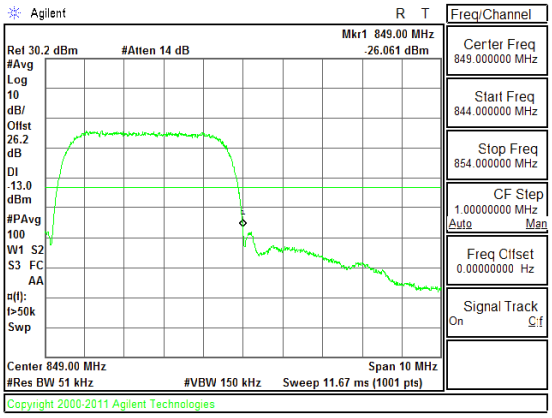 Band WCDMA B5 REL99 CBE

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band GSM 1900 GPRS	 Band GSM1900 GPRS CBE Low channel	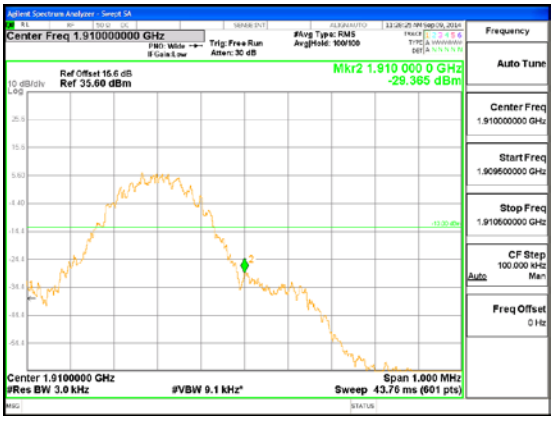 Band GSM1900 GPRS CBE High channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §27.53

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

MODES TESTED

GSM, WCDMA, LTE Band 5, LTE Band 17

RESULTS

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.3.1. OUT OF BAND EMISSIONS RESULT

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE17	10	QPSK	709	-32.24	-13	-19.24
			710	-32.62	-13	-19.62
			711	-33.69	-13	-20.69
		16QAM	709	-33.53	-13	-20.53
			710	-32.97	-13	-19.97
			711	-35.58	-13	-22.58

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE17	5	QPSK	706.5	-33.25	-13	-20.25
			710	-32.86	-13	-19.86
			713.5	-34.03	-13	-21.03
		16QAM	706.5	-33.37	-13	-20.37
			710	-33.73	-13	-20.73
			713.5	-32.89	-13	-19.89

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	10	QPSK	829	-41.05	-13	-28.05
			836.5	-41.03	-13	-28.03
			844	-41.61	-13	-28.61
		16QAM	829	-41.3	-13	-28.3
			836.5	-39.96	-13	-26.96
			844	-40.48	-13	-27.48

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	5	QPSK	826.5	-23.15	-13	-10.15
			836.5	-23.59	-13	-10.59
			846.5	-22.68	-13	-9.68
		16QAM	826.5	-22.79	-13	-9.79
			836.5	-22.27	-13	-9.27
			846.5	-23.11	-13	-10.11

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
WCDMA B2	REL99	1852.4	-32.92	-13	-19.92
		1880	-33.82	-13	-20.82
		1907.6	-33.23	-13	-20.23
	HSDPA	1852.4	-29.87	-13	-16.87
		1880	-27.24	-13	-14.24
		1907.6	-30.24	-13	-17.24

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
WCDMA B5	REL99	826.4	-35.68	-13	-22.68
		836.6	-36.32	-13	-23.32
		846.6	-35.08	-13	-22.08
	HSDPA	826.4	-27.24	-13	-14.24
		836.6	-30.49	-13	-17.49
		846.6	-30.71	-13	-17.71

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM1900	GPRS	1850.2	-35.92	-13	-22.92
		1880	-36.146	-13	-23.15
		1909.8	-36.14	-13	-23.14

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.3.2. OUT OF BAND EMISSIONS PLOTS

Band LTE17 10MHz 16QAM

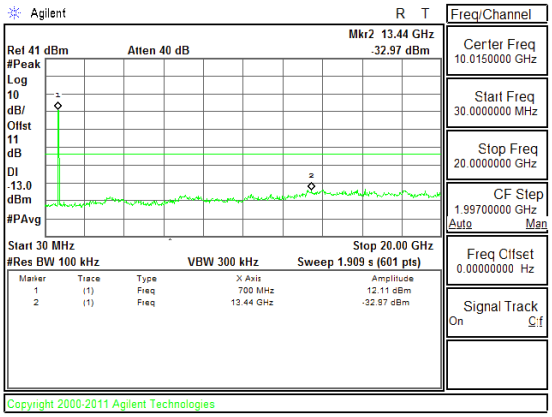

Band LTE17 10MHz CSE 16QAM Mid channel

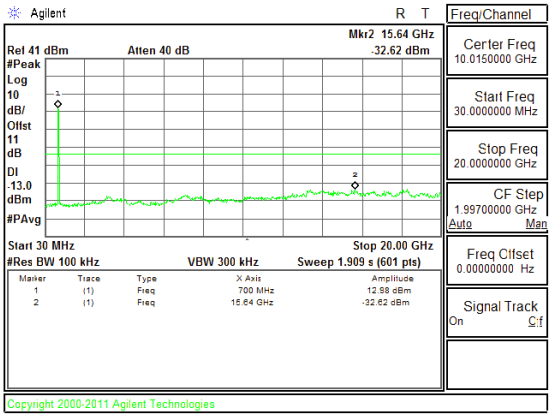

Band LTE17 10MHz CSE QPSK Mid channel

Band LTE17 5MHz 16QAM

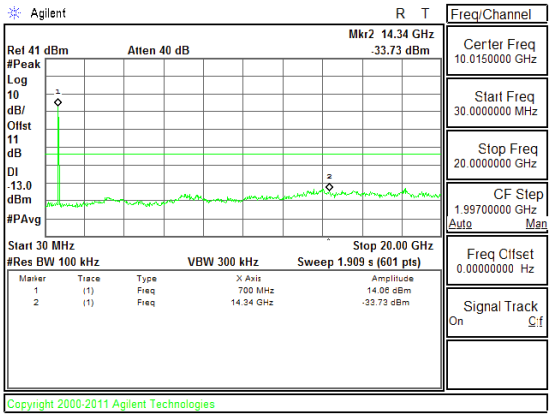

Band LTE17 5MHz CSE 16QAM Mid channel

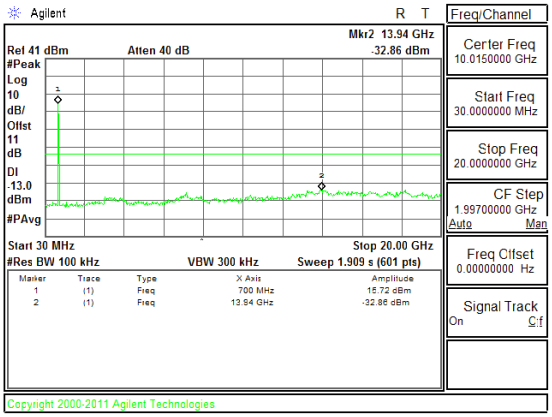

Band LTE17 5MHz CSE QPSK Mid channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band LTE5 10MHz 16QAM	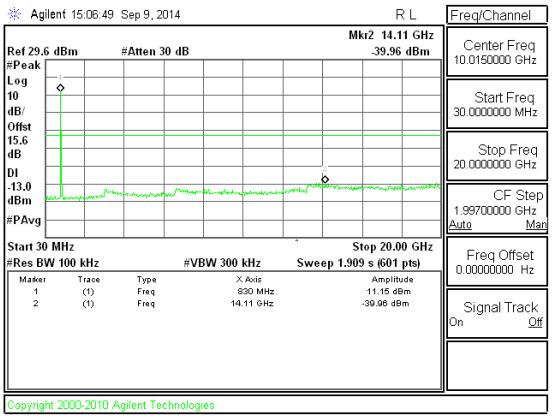 Band LTE5 10MHz CSE 16QAM Mid channel	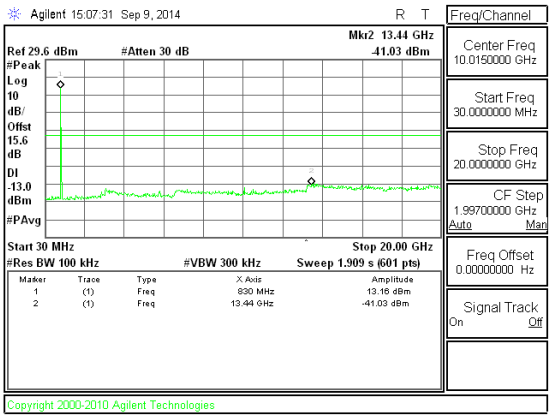 Band LTE5 10MHz CSE QPSK Mid channel
Band LTE5 5MHz 16QAM	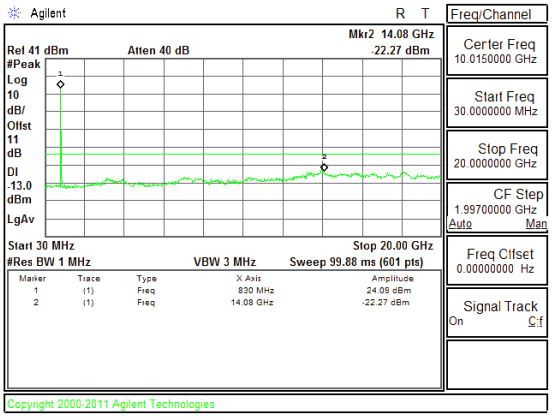 Band LTE5 5MHz CSE 16QAM Mid channel	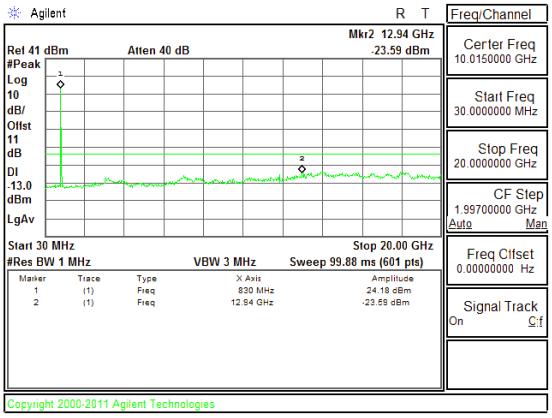 Band LTE5 5MHz CSE QPSK Mid channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

Band 2

HSDPA

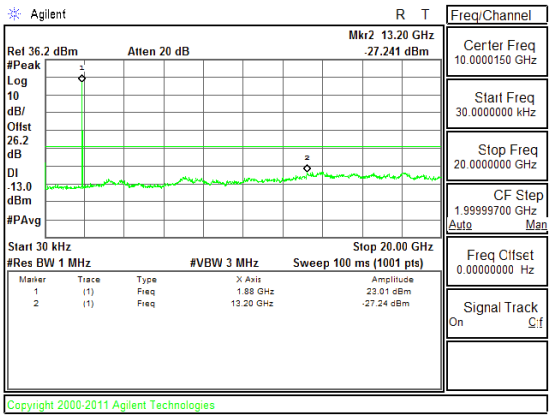

Band WCDMA B2 HSDPA CSE

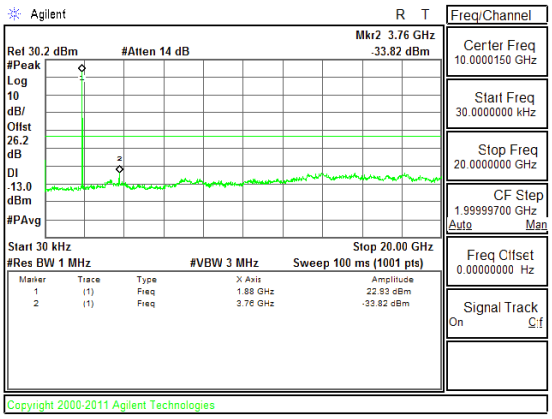

Band WCDMA B2 REL99 CSE

Band

Band 5

HSDPA

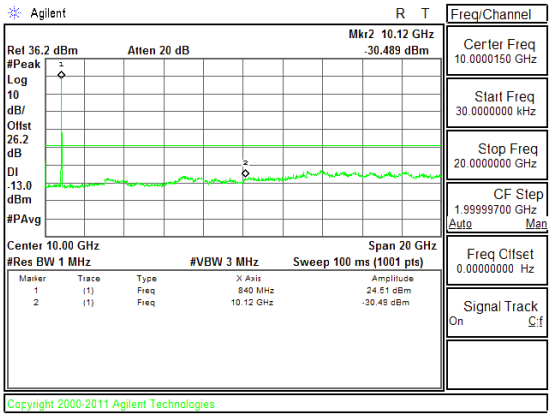

Band WCDMA B5 HSDPA CSE

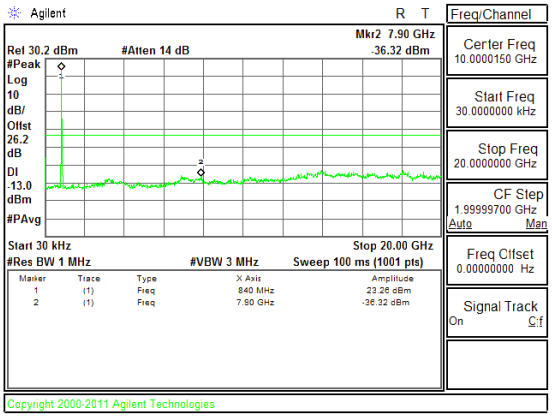

Band WCDMA B5 REL99 CSE

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band GSM 1900 GPRS	 Band GSM1900 GPRS CSE Mid channel

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ±2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

RESULTS

See the following pages.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

10.4.1. FREQUENCY STABILITY RESULTS

BAND V, Channel 4183, Freq: 836.6MHz – MID CHANNEL

Reference Frequency: Cell Mid Channel 836.6 MHz @ 20ºC Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measureed with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.599995	0.002	2.5
3.80	40	836.599996	0.001	2.5
3.80	30	836.600003	-0.007	2.5
3.80	***20***	***836.599997***	***0***	***2.5***
3.80	10	836.599996	0.001	2.5
3.80	0	836.600003	-0.007	2.5
3.80	-10	836.599995	0.002	2.5
3.80	-20	836.600004	-0.008	2.5
3.80	-30	836.600002	-0.006	2.5

Reference Frequency: Mid Channel 836.6 MHz @ 20ºC Limit: +- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measureed with Time Elapse		
			Delta (ppm)	Limit (ppm)
3.80	***20***	***836.599997***	***0.00000***	***2.5***
4.18	20	836.599993	*0.00478*	2.5
3.42	20	836.599996	*0.00120*	2.5

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

BAND II, Channel 9400 Freq: 1880MHz– MID CHANNEL

Reference Frequency: PC S Mid Channel 1880MHz @ 20°C Limit: to stay +- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measureed with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1880.000005	0.001	2.5
3.80	40	1880.000007	-0.001	2.5
3.80	30	1880.000005	0.001	2.5
3.80	***20***	***1880.000006***	***0***	***2.5***
3.80	10	1880.000008	-0.001	2.5
3.80	0	1880.000007	-0.001	2.5
3.80	-10	1880.000005	0.001	2.5
3.80	-20	1880.000007	-0.001	2.5
3.80	-30	1880.000009	-0.002	2.5

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C Limit: to stay +- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measureed with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	***20***	***1880.000006***	***0***	***2.5***
4.18	20	1880.000007	*-0.001*	2.5
3.42	20	1880.000005	*0.001*	2.5

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

LTE BAND 17 Freq. 710Mhz – MID CHANNEL done 9/6/14

Reference Frequency: PCS Mid Channel 710.000031 MHz @ 20ºC Limit: within the authorized block or +- 2.5 ppm = 1775.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measureed with Time Elapse (MHz)	Delta (ppm)	Limit (ppm)
3.70	50	710.000004	0.003	2.5
3.70	40	709.999997	0.013	2.5
3.70	30	709.999996	0.014	2.5
3.70	***20***	***710.000006***	***0***	***2.5***
3.70	10	710.000004	0.003	2.5
3.70	0	710.000002	0.006	2.5
3.70	-10	710.000003	0.004	2.5
3.70	-20	710.000004	0.003	2.5
3.70	-30	710.000003	0.004	2.5

Reference Frequency: PCS Mid Channel 710.000031 MHz @ 20ºC Limit: within the authorized block or +- 2.5 ppm = 1775.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measureed with Time Elapse	Delta (ppm)	Limit (ppm)
3.70	***20***	***710.000006***	***0.00000***	***2.5***
4.20	20	710.000004	*0.00282*	2.5
3.30	20	710.000003	*0.00423*	2.5

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50(c) - (10) Portable stations (hand-held devices) are limited to 3 watts ERP; (LTE B17)

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17; PSA setting reference to 971168 D01 v02r01

For peak power measurement with a PSA:

a) Set the RBW ≥ OBW; b) Set VBW ≥ 3 × RBW; c) Set span ≥ 2 x RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points ≥ span/RBW; g) Trace mode = max hold;

For average power measurement with a PSA:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW ≥ 3 x RBW; d) Set number of points in sweep ≥ 2 × span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle ≥ 98; h) Use trigger to capture bursts If burst duty cycle < 98; i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function.

MODES TESTED

GSM, WCDMA, LTE Band 5, LTE Band 17

TEST RESULTS

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.1.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 2	REL99	9262	1852.4	26.47	443.61
		9400	1880	26.17	414
		9538	1907.6	25.03	318.42
	HSDPA	9262	1852.4	26.27	423.64
		9400	1880	25.36	343.56
		9538	1907.6	24.6	288.4
	HSUPA	9262	1852.4		
		9400	1880		
		9538	1907.6		

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 5	REL99	4132	826.4	17.567	57.11
		4183	836.6	18.312	67.8
		4233	846.6	19.221	83.58
	HSDPA	4132	826.4	17.437	55.42
		4183	836.6	17.742	59.46
		4233	846.6	18.531	71.3
	HSUPA	4132	826.4		
		4183	836.6		
		4233	846.6		

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM1900	GMSK	512	1850.2		
		661	1880		
		810	1909.8		
	GPRS	512	1850.2	32.86	1931.97
		661	1880	32.89	1945.36
		810	1909.8	32.22	1667.25
	EGPRS	512	1850.2		
		661	1880		
		810	1909.8		

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.1.2. LTE ERP/EIRP Results

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE17	10	QPSK	1/0	710	11.4	13.80
		16QAM	1/0	710	10.6	11.48

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE17	5	QPSK	1/0	710	11.8	15.14
		16QAM	1/0	710	10.4	10.96

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	10	QPSK	1/0	829	17.54	56.78
			1/0	836.5	18.12	64.88
			1/0	844	19.10	81.3
		16QAM	1/0	829	16.68	46.58
			1/0	836.5	17.23	52.86
			1/0	844	18.17	65.63

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	5	QPSK	1/0	826.5	17.67	58.51
			1/0	836.5	18.01	63.26
			1/0	846.5	19.25	84.16
		16QAM	1/0	826.5	16.59	45.62
			1/0	836.5	17.43	55.35
			1/0	846.5	18.16	65.48

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.1.3. ERP/EIRP PLOTS

Band

LTE17

5MHz

QPSK

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14I18753
Date: 09/29/14
Test Engineer: Kiya/Dante
Configuration: EUT only (1951597)
Mode: LTE Band 17_5MHz_QPSK

Test Equipment:
Receiving: Sunol T185, and 3m Chamber N-type Cable (Setup this one for testing EUT)
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
706.50	3.20	V	0.9	0.0	2.30	34.8	-32.5	
706.50	11.10	H	0.9	0.0	10.20	34.8	-24.6	
Mid Ch								
710.00	2.19	V	0.9	0.0	1.29	34.8	-33.5	
710.00	12.70	H	0.9	0.0	11.80	34.8	-23.0	
High Ch								
713.50	3.14	V	0.9	0.0	2.24	34.8	-32.5	
713.50	11.50	H	0.9	0.0	10.60	34.8	-24.2	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

LTE17

5MHz

16QAM

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14I18753
Date: 09/29/14
Test Engineer: Kiya/Dante
Configuration: EUT only (1951597)
Mode: LTE Band 17_5MHz_16QAM

Test Equipment:
Receiving: Sunol T185, and 3m Chamber N-type Cable (Setup this one for testing EUT)
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
706.50	2.00	V	0.9	0.0	1.10	34.8	-33.7	
706.50	9.70	H	0.9	0.0	8.80	34.8	-26.0	
Mid Ch								
710.00	0.89	V	0.9	0.0	-0.01	34.8	-34.8	
710.00	11.30	H	0.9	0.0	10.40	34.8	-24.4	
High Ch								
713.50	1.94	V	0.9	0.0	1.04	34.8	-33.7	
713.50	10.10	H	0.9	0.0	9.20	34.8	-25.6	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

LTE17

10MHz

16QAM

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14I18753
Date: 09/29/14
Test Engineer: Kiya/Dante
Configuration: EUT only (1951597)
Mode: LTE Band 17_10MHz_16QAM

Test Equipment:
Receiving: Sunol T243, and 3m Chamber N-type Cable (Setup this one for testing EUT)
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
706.50		V	0.9	0.0				
706.50		H	0.9	0.0				
Mid Ch								
710.00	1.39	V	0.9	0.0	0.49	34.8	-34.3	
710.00	11.50	H	0.9	0.0	10.60	34.8	-24.2	
High Ch								
713.50		V	0.9	0.0				
713.50		H	0.9	0.0				

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

LTE17

10MHz

QPSK

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14I18753
Date: 09/29/14
Test Engineer: Kiya/Dante
Configuration: EUT only (1951597)
Mode: LTE Band 17_10MHz_QPSK

Test Equipment:
Receiving: Sunol T185, and 3m Chamber N-type Cable (Setup this one for testing EUT)
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
706.50		V	0.9	0.0				
706.50		H	0.9	0.0				
Mid Ch								
710.00	2.89	V	0.9	0.0	1.99	34.8	-32.8	
710.00	12.30	H	0.9	0.0	11.40	34.8	-23.4	
High Ch								
713.50		V	0.9	0.0				
713.50		H	0.9	0.0				

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

LTE5

10MHz

16QAM

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber C

Company: Samsung
Project #: 14I18753
Date: 09/09/14
Test Engineer: R. Alegre
Configuration: EUT only
Mode: LTE5 10MHz 16QAM

Test Equipment:
Receiving: Hybrid T185 , and Chamber C SMA Cables
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
829.00	16.76	V	0.9	0.0	15.86	38.5	-22.6	
829.00	17.58	H	0.9	0.0	16.68	38.5	-21.8	
Mid Ch								
836.50	17.24	V	0.9	0.0	16.34	38.5	-22.1	
836.50	18.13	H	0.9	0.0	17.23	38.5	-21.2	
High Ch								
844.00	18.47	V	0.9	0.0	17.57	38.5	-20.9	
844.00	19.07	H	0.9	0.0	18.17	38.5	-20.3	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

LTE5

10MHz

QPSK

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber C

Company: Samsung
Project #: 14I18753
Date: 09/09/14
Test Engineer: R. Alegre
Configuration: EUT only
Mode: LTE5 10MHz QPSK

Test Equipment:
Receiving: Hybrid T185, and Chamber C SMA Cables
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
829.00	17.70	V	0.9	0.0	16.80	38.5	-21.6	
829.00	18.44	H	0.9	0.0	17.54	38.5	-20.9	
Mid Ch								
836.50	18.19	V	0.9	0.0	17.29	38.5	-21.2	
836.50	19.02	H	0.9	0.0	18.12	38.5	-20.3	
High Ch								
844.00	19.56	V	0.9	0.0	18.66	38.5	-19.8	
844.00	20.00	H	0.9	0.0	19.10	38.5	-19.3	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

LTE5

5MHz

16QAM

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber C

Company: Samsung
Project #: 14I18753
Date: 09/09/14
Test Engineer: R. Alegre
Configuration: EUT only
Mode: LTE5 5MHz 16QAM

Test Equipment:
Receiving: Hybrid T185, and Chamber C SMA Cables
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
826.50	16.64	V	0.9	0.0	15.74	38.5	-22.7	
826.50	17.49	H	0.9	0.0	16.59	38.5	-21.9	
Mid Ch								
836.50	18.07	V	0.9	0.0	17.17	38.5	-21.3	
836.50	18.33	H	0.9	0.0	17.43	38.5	-21.0	
High Ch								
846.50	17.03	V	0.9	0.0	16.13	38.5	-22.3	
846.50	19.06	H	0.9	0.0	18.16	38.5	-20.3	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

LTE5

5MHz

QPSK

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber C

Company: Samsung
Project #: 14I18753
Date: 09/09/14
Test Engineer: R. Alegre
Configuration: EUT only
Mode: LTE5 5MHz QPSK

Test Equipment:
Receiving: Horn T185, and Chamber C SMA Cables
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
826.50	17.78	V	0.9	0.0	16.88	38.5	-21.6	
826.50	18.57	H	0.9	0.0	17.67	38.5	-20.8	
Mid Ch								
836.50	18.62	V	0.9	0.0	17.72	38.5	-20.7	
836.50	18.91	H	0.9	0.0	18.01	38.5	-20.4	
High Ch								
846.50	18.21	V	0.9	0.0	17.31	38.5	-21.1	
846.50	20.15	H	0.9	0.0	19.25	38.5	-19.2	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

Band 2

HSDPA

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14I18753
Date: 09/08/14
Test Engineer: R. Alegre
Configuration: EUT only
Mode: HSDPA B2

Test Equipment:
Receiving: Horn T345, and Chamber B SMA Cables
Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1852.40	13.14	V	0.9	7.9	20.14	33.0	-12.9	
1852.40	19.27	H	0.9	7.9	26.27	33.0	-6.7	
Mid Ch								
1880.00	11.86	V	0.9	7.9	18.86	33.0	-14.1	
1880.00	18.36	H	0.9	7.9	25.36	33.0	-7.6	
High Ch								
1907.60	11.85	V	0.9	7.9	18.90	33.0	-14.1	
1907.60	17.55	H	0.9	7.9	24.60	33.0	-8.4	

Rev. 3.17.11
Note: For Band 4 EIRP limit is 30dBm

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

Band 2

REL99

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14I18753
Date: 09/08/14
Test Engineer: R. Alegre
Configuration: EUT only
Mode: REL 99 B2

Test Equipment:
Receiving: Horn T345, and Chamber B SMA Cables
Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1852.40	14.22	V	0.9	7.9	21.22	33.0	-11.8	
1852.40	19.47	H	0.9	7.9	26.47	33.0	-6.5	
Mid Ch								
1880.00	12.03	V	0.9	7.9	19.03	33.0	-14.0	
1880.00	19.17	H	0.9	7.9	26.17	33.0	-6.8	
High Ch								
1907.60	12.05	V	0.9	7.9	19.10	33.0	-13.9	
1907.60	17.98	H	0.9	7.9	25.03	33.0	-8.0	

Rev. 3.17.11
Note: For Band 4 EIRP limit is 30dBm

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

Band 5

HSDPA

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14I18753
Date: 09/08/14
Test Engineer: R. Alegre
Configuration: EUT only
Mode: HSDPA B5

Test Equipment:
Receiving: Sunol T243, and 3m Chamber N-type Cable (Setup this one for testing EUT)
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
826.40	8.49	V	0.9	0.0	7.59	38.5	-30.9	
826.40	18.34	H	0.9	0.0	17.44	38.5	-21.0	
Mid Ch								
836.60	9.60	V	0.9	0.0	8.70	38.5	-29.8	
836.60	18.64	H	0.9	0.0	17.74	38.5	-20.7	
High Ch								
846.60	10.85	V	0.9	0.0	9.95	38.5	-28.5	
846.60	19.43	H	0.9	0.0	18.53	38.5	-19.9	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

Band 5

REL99

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14I18753
Date: 09/08/14
Test Engineer: R. Alegre
Configuration: EUT only
Mode: REL99 B5

Test Equipment:
Receiving: Sunol T243, and 3m Chamber N-type Cable (Setup this one for testing EUT)
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
826.40	9.18	V	0.9	0.0	8.28	38.5	-30.2	
826.40	18.47	H	0.9	0.0	17.57	38.5	-20.9	
Mid Ch								
836.60	10.14	V	0.9	0.0	9.24	38.5	-29.2	
836.60	19.21	H	0.9	0.0	18.31	38.5	-20.1	
High Ch								
846.60	10.97	V	0.9	0.0	10.07	38.5	-28.4	
846.60	20.12	H	0.9	0.0	19.22	38.5	-19.2	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

Band

GSM 1900

GPRS

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14I18753
Date: 09/08/14
Test Engineer: R. Alegre
Configuration: EUT only
Mode: GPRS 1900

Test Equipment:
Receiving: Horn T345, and Chamber B SMA Cables
Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1850.20	17.26	V	0.9	7.9	24.26	33.0	-8.7	
1850.20	25.86	H	0.9	7.9	32.86	33.0	-0.1	
Mid Ch								
1880.00	17.07	V	0.9	7.9	24.07	33.0	-8.9	
1880.00	25.89	H	0.9	7.9	32.89	33.0	-0.1	
High Ch								
1909.80	18.71	V	0.9	7.9	25.76	33.0	-7.2	
1909.80	25.17	H	0.9	7.9	32.22	33.0	-0.8	

Rev. 3.17.11
Note: For Band 4 EIRP limit is 30dBm

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

Part 27: (m)(4) For mobile station, the attenuation factor shall be not less than 43+10Log(P)dB at the channel edge and (55+10Log(P)dB) at 5.5MHz from the channel edges.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RESULTS

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

11.2.1. SPURIOUS RADIATION DATA

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18726
Date: 09/11/14
Test Engineer: D. Sblendorio
Configuration: EUT w/ AC charger, headset(Sample 1951579)
Mode: LTE17 10M 16QAM HARM

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 27

Band: LTE17 10MHz 16QAM

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch,709MHz									
1.418	-10.6	V	3.0	37.8	1.0	-47.3	-13.0	-34.3	
2.127	-18.3	V	3.0	36.7	1.0	-54.0	-13.0	-41.0	
2.836	-19.1	V	3.0	36.2	1.0	-54.3	-13.0	-41.3	
1.418	-11.0	H	3.0	37.8	1.0	-47.7	-13.0	-34.7	
2.127	-20.5	H	3.0	36.7	1.0	-56.2	-13.0	-43.2	
2.836	-20.6	H	3.0	36.2	1.0	-55.8	-13.0	-42.8	
Mid Ch,710MHz									
1.420	-10.6	V	3.0	37.8	1.0	-47.4	-13.0	-34.4	
2.130	-17.7	V	3.0	36.7	1.0	-53.4	-13.0	-40.4	
2.840	-20.2	V	3.0	36.2	1.0	-55.4	-13.0	-42.4	
1.420	-10.0	H	3.0	37.8	1.0	-46.7	-13.0	-33.7	
2.130	-21.2	H	3.0	36.7	1.0	-56.9	-13.0	-43.9	
2.840	-20.5	H	3.0	36.2	1.0	-55.7	-13.0	-42.7	
High Ch, 711MHz									
1.422	-11.1	V	3.0	37.8	1.0	-47.8	-13.0	-34.8	
2.133	-18.6	V	3.0	36.7	1.0	-54.3	-13.0	-41.3	
2.844	-19.5	V	3.0	36.2	1.0	-54.6	-13.0	-41.6	
1.422	-10.5	H	3.0	37.8	1.0	-47.3	-13.0	-34.3	
2.133	-18.5	H	3.0	36.7	1.0	-54.1	-13.0	-41.1	
2.844	-19.7	H	3.0	36.2	1.0	-54.9	-13.0	-41.9	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18726
Date: 09/11/14
Test Engineer: D. Sblendorio
Configuration: EUT w/ AC charger, headset(Sample 1951579)
Mode: LTE17 10M QPSK HARM

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 27

Band: LTE17 10MHz QPSK

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch,709MHz									
1.418	-12.9	V	3.0	37.8	1.0	-49.6	-13.0	-36.6	
2.127	-17.9	V	3.0	36.7	1.0	-53.6	-13.0	-40.6	
2.836	-19.6	V	3.0	36.2	1.0	-54.7	-13.0	-41.7	
1.418	-13.0	H	3.0	37.8	1.0	-49.7	-13.0	-36.7	
2.127	-20.9	H	3.0	36.7	1.0	-56.6	-13.0	-43.6	
2.836	-20.0	H	3.0	36.2	1.0	-55.2	-13.0	-42.2	
Mid Ch,710MHz									
1.420	-12.6	V	3.0	37.8	1.0	-49.4	-13.0	-36.4	
2.130	-17.1	V	3.0	36.7	1.0	-52.8	-13.0	-39.8	
2.840	-19.9	V	3.0	36.2	1.0	-55.1	-13.0	-42.1	
1.420	-12.3	H	3.0	37.8	1.0	-49.1	-13.0	-36.1	
2.130	-20.8	H	3.0	36.7	1.0	-56.5	-13.0	-43.5	
2.840	-19.4	H	3.0	36.2	1.0	-54.5	-13.0	-41.5	
High Ch, 711MHz									
1.422	-13.3	V	3.0	37.8	1.0	-50.1	-13.0	-37.1	
2.133	-19.0	V	3.0	36.7	1.0	-54.7	-13.0	-41.7	
2.844	-19.5	V	3.0	36.2	1.0	-54.7	-13.0	-41.7	
1.422	-10.5	H	3.0	37.8	1.0	-47.3	-13.0	-34.3	
2.133	-18.5	H	3.0	36.7	1.0	-54.1	-13.0	-41.1	
2.844	-19.7	H	3.0	36.2	1.0	-54.9	-13.0	-41.9	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18726
Date: 09/11/14
Test Engineer: D. Sblendorio
Configuration: EUT w/ AC charger, headset(Sample 1951579)
Mode: LTE17 5M 16QAM HARM

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 27

Band: LTE17 5MHz 16QAM

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch,706.5MHz									
1.413	-11.6	V	3.0	37.8	1.0	-48.3	-13.0	-35.3	
2.120	-18.1	V	3.0	36.7	1.0	-53.8	-13.0	-40.8	
2.283	-17.7	V	3.0	36.6	1.0	-53.2	-13.0	-40.2	
1.413	-11.7	H	3.0	37.8	1.0	-48.5	-13.0	-35.5	
2.120	-20.2	H	3.0	36.7	1.0	-55.9	-13.0	-42.9	
2.283	-23.4	H	3.0	36.6	1.0	-59.0	-13.0	-46.0	
Mid Ch,710MHz									
1.420	-8.1	V	3.0	37.8	1.0	-44.9	-13.0	-31.9	
2.130	-16.4	V	3.0	36.7	1.0	-52.1	-13.0	-39.1	
2.840	-19.2	V	3.0	36.2	1.0	-54.4	-13.0	-41.4	
1.420	-8.8	H	3.0	37.8	1.0	-45.6	-13.0	-32.6	
2.130	-20.6	H	3.0	36.7	1.0	-56.3	-13.0	-43.3	
2.840	-20.8	H	3.0	36.2	1.0	-56.0	-13.0	-43.0	
High Ch, 713.5MHz									
1.427	-11.5	V	3.0	37.7	1.0	-48.2	-13.0	-35.2	
2.141	-17.9	V	3.0	36.7	1.0	-53.6	-13.0	-40.6	
2.854	-18.9	V	3.0	36.2	1.0	-54.0	-13.0	-41.0	
1.427	-8.7	H	3.0	37.7	1.0	-45.4	-13.0	-32.4	
2.141	-19.6	H	3.0	36.7	1.0	-55.2	-13.0	-42.2	
2.854	-20.5	H	3.0	36.2	1.0	-55.7	-13.0	-42.7	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18726
Date: 09/11/14
Test Engineer: D. Sblendorio
Configuration: EUT w/ AC charger, headset(Sample 1951579)
Mode: LTE17 5M QPSK HARM

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 27

Band: LTE17 5MHz QPSK

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch,706.5MHz									
1.413	-11.0	V	3.0	37.8	1.0	-47.7	-13.0	-34.7	
2.120	-18.8	V	3.0	36.7	1.0	-54.5	-13.0	-41.5	
2.283	-22.5	V	3.0	36.6	1.0	-58.1	-13.0	-45.1	
1.413	-11.3	H	3.0	37.8	1.0	-48.1	-13.0	-35.1	
2.120	-20.4	H	3.0	36.7	1.0	-56.1	-13.0	-43.1	
2.283	-24.4	H	3.0	36.6	1.0	-59.9	-13.0	-46.9	
Mid Ch,710MHz									
1.420	-9.1	V	3.0	37.8	1.0	-45.8	-13.0	-32.8	
2.130	-17.2	V	3.0	36.7	1.0	-52.9	-13.0	-39.9	
2.840	-20.0	V	3.0	36.2	1.0	-55.1	-13.0	-42.1	
1.420	-9.7	H	3.0	37.8	1.0	-46.5	-13.0	-33.5	
2.130	-21.7	H	3.0	36.7	1.0	-57.4	-13.0	-44.4	
2.840	-20.2	H	3.0	36.2	1.0	-55.4	-13.0	-42.4	
High Ch, 713.5MHz									
1.427	-11.5	V	3.0	37.7	1.0	-48.2	-13.0	-35.2	
2.141	-18.5	V	3.0	36.7	1.0	-54.2	-13.0	-41.2	
2.854	-19.1	V	3.0	36.2	1.0	-54.3	-13.0	-41.3	
1.427	-9.1	H	3.0	37.7	1.0	-45.8	-13.0	-32.8	
2.141	-20.0	H	3.0	36.7	1.0	-55.7	-13.0	-42.7	
2.854	-20.1	H	3.0	36.2	1.0	-55.3	-13.0	-42.3	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18753
Date: 09/11/14
Test Engineer: Jude Semana
Configuration: EUT w/ AC Adaptor + HS, X-pos
Mode: LTE5 16QAM 10MHz Harm

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 22

Band: LTE5 10MHz 16QAM

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824MHz									
1.648	-30.9	V	3.0	37.4	1.0	-67.3	-13.0	-54.3	
2.472	-24.5	V	3.0	36.4	1.0	-59.9	-13.0	-46.9	
3.296	-24.7	V	3.0	35.8	1.0	-59.5	-13.0	-46.5	
1.648	-30.5	H	3.0	37.4	1.0	-66.9	-13.0	-53.9	
2.472	-26.4	H	3.0	36.4	1.0	-61.8	-13.0	-48.8	
3.296	-25.0	H	3.0	35.8	1.0	-59.8	-13.0	-46.8	
Mid Ch, 836.5MHz									
1.673	-30.6	V	3.0	37.3	1.0	-67.0	-13.0	-54.0	
2.510	-24.2	V	3.0	36.4	1.0	-59.5	-13.0	-46.5	
3.346	-25.5	V	3.0	35.8	1.0	-60.2	-13.0	-47.2	
1.673	-31.0	H	3.0	37.3	1.0	-67.4	-13.0	-54.4	
2.510	-25.6	H	3.0	36.4	1.0	-60.9	-13.0	-47.9	
3.346	-24.9	H	3.0	35.8	1.0	-59.7	-13.0	-46.7	
High Ch, 848.9MHz									
1.697	-29.0	V	3.0	37.3	1.0	-65.3	-13.0	-52.3	
2.546	-25.0	V	3.0	36.3	1.0	-60.4	-13.0	-47.4	
3.395	-24.8	V	3.0	35.7	1.0	-59.5	-13.0	-46.5	
1.697	-30.3	H	3.0	37.3	1.0	-66.6	-13.0	-53.6	
2.546	-26.5	H	3.0	36.3	1.0	-61.8	-13.0	-48.8	
3.395	-23.4	H	3.0	35.7	1.0	-58.1	-13.0	-45.1	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18753
Date: 09/11/14
Test Engineer: Jude Semana
Configuration: EUT w/ AC Adaptor + HS, X-pos
Mode: LTE5 QPSK 10MHz Harm

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 22

Band: LTE5 10MHz QPSK

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824MHz									
1.648	-30.7	V	3.0	37.4	1.0	-67.1	-13.0	-54.1	
2.472	-24.2	V	3.0	36.4	1.0	-59.6	-13.0	-46.6	
3.296	-24.3	V	3.0	35.8	1.0	-59.1	-13.0	-46.1	
1.648	-31.2	H	3.0	37.4	1.0	-67.6	-13.0	-54.6	
2.472	-25.7	H	3.0	36.4	1.0	-61.1	-13.0	-48.1	
3.296	-24.6	H	3.0	35.8	1.0	-59.4	-13.0	-46.4	
Mid Ch, 836.5MHz									
1.673	-30.2	V	3.0	37.3	1.0	-66.5	-13.0	-53.5	
2.510	-24.4	V	3.0	36.4	1.0	-59.8	-13.0	-46.8	
3.346	-25.3	V	3.0	35.8	1.0	-60.1	-13.0	-47.1	
1.673	-30.3	H	3.0	37.3	1.0	-66.7	-13.0	-53.7	
2.510	-25.5	H	3.0	36.4	1.0	-60.9	-13.0	-47.9	
3.346	-24.8	H	3.0	35.8	1.0	-59.5	-13.0	-46.5	
High Ch, 848.9MHz									
1.697	-30.1	V	3.0	37.3	1.0	-66.4	-13.0	-53.4	
2.546	-24.7	V	3.0	36.3	1.0	-60.1	-13.0	-47.1	
3.395	-24.9	V	3.0	35.7	1.0	-59.6	-13.0	-46.6	
1.697	-29.6	H	3.0	37.3	1.0	-65.9	-13.0	-52.9	
2.546	-27.2	H	3.0	36.3	1.0	-62.6	-13.0	-49.6	
3.395	-24.7	H	3.0	35.7	1.0	-59.4	-13.0	-46.4	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company:	Samsung
Project #:	14I18753
Date:	09/11/14
Test Engineer:	Jude Semana
Configuration:	EUT w/ AC Adaptor + HS, X-pos
Mode:	LTE5 16QAM 5MHz Harm

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 22

Band

LTE5

5MHz

16QAM

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824 MHz									
1.648	-30.8	V	3.0	37.4	1.0	-67.2	-13.0	-54.2	
2.472	-24.7	V	3.0	36.4	1.0	-60.1	-13.0	-47.1	
3.297	-25.6	V	3.0	35.8	1.0	-60.4	-13.0	-47.4	
1.648	-31.4	H	3.0	37.4	1.0	-67.7	-13.0	-54.7	
2.472	-26.4	H	3.0	36.4	1.0	-61.8	-13.0	-48.8	
3.297	-25.1	H	3.0	35.8	1.0	-59.9	-13.0	-46.9	
Mid Ch, 836.5MHz									
1.673	-30.4	V	3.0	37.3	1.0	-66.8	-13.0	-53.8	
2.510	-25.0	V	3.0	36.4	1.0	-60.4	-13.0	-47.4	
3.346	-25.6	V	3.0	35.8	1.0	-60.4	-13.0	-47.4	
1.673	-30.8	H	3.0	37.3	1.0	-67.2	-13.0	-54.2	
2.510	-25.8	H	3.0	36.4	1.0	-61.2	-13.0	-48.2	
3.346	-25.7	H	3.0	35.8	1.0	-60.4	-13.0	-47.4	
High Ch, 848.9MHz									
1.693	-30.0	V	3.0	37.3	1.0	-66.3	-13.0	-53.3	
2.540	-25.2	V	3.0	36.3	1.0	-60.5	-13.0	-47.5	
3.395	-25.0	V	3.0	35.7	1.0	-59.7	-13.0	-46.7	
1.693	-29.9	H	3.0	37.3	1.0	-66.2	-13.0	-53.2	
2.540	-26.3	H	3.0	36.3	1.0	-61.6	-13.0	-48.6	
3.395	-25.0	H	3.0	35.7	1.0	-59.7	-13.0	-46.7	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18753
Date: 09/11/14
Test Engineer: Jude Semana
Configuration: EUT w/ AC Adaptor + HS, X-pos
Mode: LTE5 QPSK 5MHz Harm

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 22

Band: LTE5 5MHz QPSK

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824 MHz									
1.648	-30.7	V	3.0	37.4	1.0	-67.0	-13.0	-54.0	
2.472	-24.5	V	3.0	36.4	1.0	-59.8	-13.0	-46.8	
3.297	-24.7	V	3.0	35.8	1.0	-59.5	-13.0	-46.5	
1.648	-30.6	H	3.0	37.4	1.0	-67.0	-13.0	-54.0	
2.472	-25.5	H	3.0	36.4	1.0	-60.9	-13.0	-47.9	
3.297	-24.8	H	3.0	35.8	1.0	-59.6	-13.0	-46.6	
Mid Ch, 836.5MHz									
1.673	-30.0	V	3.0	37.3	1.0	-66.3	-13.0	-53.3	
2.510	-24.2	V	3.0	36.4	1.0	-59.6	-13.0	-46.6	
3.346	-25.4	V	3.0	35.8	1.0	-60.2	-13.0	-47.2	
1.673	-30.6	H	3.0	37.3	1.0	-66.9	-13.0	-53.9	
2.510	-26.7	H	3.0	36.4	1.0	-62.0	-13.0	-49.0	
3.346	-26.0	H	3.0	35.8	1.0	-60.8	-13.0	-47.8	
High Ch, 848.9MHz									
1.693	-30.2	V	3.0	37.3	1.0	-66.5	-13.0	-53.5	
2.540	-25.1	V	3.0	36.3	1.0	-60.4	-13.0	-47.4	
3.395	-25.1	V	3.0	35.7	1.0	-59.8	-13.0	-46.8	
1.693	-29.6	H	3.0	37.3	1.0	-65.9	-13.0	-52.9	
2.540	-26.1	H	3.0	36.3	1.0	-61.5	-13.0	-48.5	
3.395	-25.2	H	3.0	35.7	1.0	-59.9	-13.0	-46.9	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18753
Date: 09/11/14
Test Engineer: Jude Semana
Configuration: X-Pos EUT w/ AC charger, headset
Mode: HSDPA B2

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 24

Band

Band 2

HSDPA

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1852.4MHz									
3.705	-22.3	V	3.0	35.4	1.0	-56.7	-13.0	-43.7	
5.557	-20.4	V	3.0	34.7	1.0	-54.1	-13.0	-41.1	
7.410	-18.9	V	3.0	34.9	1.0	-52.9	-13.0	-39.9	
3.705	-22.0	H	3.0	35.4	1.0	-56.4	-13.0	-43.4	
5.557	-19.5	H	3.0	34.7	1.0	-53.2	-13.0	-40.2	
7.410	-17.8	H	3.0	34.9	1.0	-51.7	-13.0	-38.7	
Mid Ch, 1880MHz									
3.760	-23.2	V	3.0	35.3	1.0	-57.5	-13.0	-44.5	
5.640	-20.3	V	3.0	34.7	1.0	-54.0	-13.0	-41.0	
7.520	-18.6	V	3.0	34.9	1.0	-52.5	-13.0	-39.5	
3.760	-22.8	H	3.0	35.3	1.0	-57.2	-13.0	-44.2	
5.640	-19.5	H	3.0	34.7	1.0	-53.3	-13.0	-40.3	
7.520	-17.7	H	3.0	34.9	1.0	-51.6	-13.0	-38.6	
High Ch, 1907.6MHz									
3.815	-23.3	V	3.0	35.3	1.0	-57.6	-13.0	-44.6	
5.723	-20.3	V	3.0	34.7	1.0	-54.1	-13.0	-41.1	
7.630	-16.9	V	3.0	34.9	1.0	-50.8	-13.0	-37.8	
3.815	-23.7	H	3.0	35.3	1.0	-57.9	-13.0	-44.9	
5.723	-20.3	H	3.0	34.7	1.0	-54.1	-13.0	-41.1	
7.630	-16.0	H	3.0	34.9	1.0	-49.9	-13.0	-36.9	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18726
Date: 09/09/14
Test Engineer: L. Lara
Configuration: EUT w/ AC charger, headset(Sample 1951579)
Mode: GPRS 1900

Chamber	Pre-amplifer	Filter	Limit
5m Chamber B	T34 8449B	Filter 1	Part 24

Band

Band 2

REL99

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz									
3.705	-22.1	V	3.0	35.4	1.0	-56.5	-13.0	-43.5	
5.557	-20.4	V	3.0	34.7	1.0	-54.1	-13.0	-41.1	
7.410	-19.8	V	3.0	34.9	1.0	-53.7	-13.0	-40.7	
3.705	-21.4	H	3.0	35.4	1.0	-55.8	-13.0	-42.8	
5.557	-19.2	H	3.0	34.7	1.0	-52.9	-13.0	-39.9	
7.410	-18.0	H	3.0	34.9	1.0	-51.9	-13.0	-38.9	
Mid Ch, 1880MHz									
3.760	-23.0	V	3.0	35.3	1.0	-57.4	-13.0	-44.4	
5.640	-20.3	V	3.0	34.7	1.0	-54.0	-13.0	-41.0	
7.520	-19.4	V	3.0	34.9	1.0	-53.3	-13.0	-40.3	
3.760	-22.1	H	3.0	35.3	1.0	-56.5	-13.0	-43.5	
5.640	-19.3	H	3.0	34.7	1.0	-53.0	-13.0	-40.0	
7.520	-17.9	H	3.0	34.9	1.0	-51.8	-13.0	-38.8	
High Ch, 1909.8MHz									
3.815	-23.2	V	3.0	35.3	1.0	-57.5	-13.0	-44.5	
5.723	-20.4	V	3.0	34.7	1.0	-54.2	-13.0	-41.2	
7.630	-17.7	V	3.0	34.9	1.0	-51.7	-13.0	-38.7	
3.815	-22.9	H	3.0	35.3	1.0	-57.2	-13.0	-44.2	
5.723	-20.1	H	3.0	34.7	1.0	-53.8	-13.0	-40.8	
7.630	-16.1	H	3.0	34.9	1.0	-50.1	-13.0	-37.1	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18753
Date: 09/11/14
Test Engineer: Jude Semana
Configuration: X-Pos EUT w/ AC charger, headset
Mode: HSDPA B5

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 22

Band

Band 5

HSDPA

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.4MHz									
1.653	-30.4	V	3.0	37.4	1.0	-66.8	-13.0	-53.8	
2.479	-24.4	V	3.0	36.4	1.0	-59.7	-13.0	-46.7	
3.306	-24.6	V	3.0	35.8	1.0	-59.4	-13.0	-46.4	
1.653	-31.2	H	3.0	37.4	1.0	-67.6	-13.0	-54.6	
2.479	-25.9	H	3.0	36.4	1.0	-61.3	-13.0	-48.3	
3.306	-25.6	H	3.0	35.8	1.0	-60.4	-13.0	-47.4	
Mid Ch, 836.6MHz									
1.673	-29.7	V	3.0	37.3	1.0	-66.1	-13.0	-53.1	
2.510	-24.7	V	3.0	36.4	1.0	-60.1	-13.0	-47.1	
3.346	-25.5	V	3.0	35.8	1.0	-60.2	-13.0	-47.2	
1.673	-30.7	H	3.0	37.3	1.0	-67.0	-13.0	-54.0	
2.510	-26.6	H	3.0	36.4	1.0	-61.9	-13.0	-48.9	
3.346	-25.6	H	3.0	35.8	1.0	-60.3	-13.0	-47.3	
High Ch, 846.6MHz									
1.693	-30.1	V	3.0	37.3	1.0	-66.4	-13.0	-53.4	
2.540	-25.2	V	3.0	36.3	1.0	-60.5	-13.0	-47.5	
3.386	-24.9	V	3.0	35.7	1.0	-59.6	-13.0	-46.6	
1.693	-29.5	H	3.0	37.3	1.0	-65.8	-13.0	-52.8	
2.540	-27.4	H	3.0	36.3	1.0	-62.8	-13.0	-49.8	
3.386	-22.4	H	3.0	35.7	1.0	-57.2	-13.0	-44.2	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company:	Samsung
Project #:	14I18753
Date:	09/11/14
Test Engineer:	Jude Semana
Configuration:	X-Pos EUT w/ AC charger, headset
Mode:	REL99 B5

Chamber	Pre-amplifer	Filter	Limit
3m Chamber	T34 8449B	Filter 1	Part 22

Band

Band 5

REL99

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.4MHz									
1.653	-30.5	V	3.0	37.4	1.0	-66.9	-13.0	-53.9	
2.479	-24.3	V	3.0	36.4	1.0	-59.7	-13.0	-46.7	
3.306	-21.4	V	3.0	35.8	1.0	-56.1	-13.0	-43.1	
1.653	-30.9	H	3.0	37.4	1.0	-67.3	-13.0	-54.3	
2.479	-26.0	H	3.0	36.4	1.0	-61.3	-13.0	-48.3	
3.306	-24.8	H	3.0	35.8	1.0	-59.6	-13.0	-46.6	
Mid Ch, 836.6MHz									
1.673	-30.6	V	3.0	37.3	1.0	-66.9	-13.0	-53.9	
2.510	-24.4	V	3.0	36.4	1.0	-59.7	-13.0	-46.7	
3.346	-25.5	V	3.0	35.8	1.0	-60.3	-13.0	-47.3	
1.673	-30.8	H	3.0	37.3	1.0	-67.1	-13.0	-54.1	
2.510	-26.1	H	3.0	36.4	1.0	-61.5	-13.0	-48.5	
3.346	-25.4	H	3.0	35.8	1.0	-60.2	-13.0	-47.2	
High Ch, 846.6MHz									
1.693	-30.0	V	3.0	37.3	1.0	-66.3	-13.0	-53.3	
2.540	-25.5	V	3.0	36.3	1.0	-60.8	-13.0	-47.8	
3.386	-25.2	V	3.0	35.7	1.0	-59.9	-13.0	-46.9	
1.693	-30.5	H	3.0	37.3	1.0	-66.8	-13.0	-53.8	
2.540	-26.8	H	3.0	36.3	1.0	-62.2	-13.0	-49.2	
3.386	-25.4	H	3.0	35.7	1.0	-60.1	-13.0	-47.1	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14I18726
Date: 09/09/14
Test Engineer: L. Lara
Configuration: EUT w/ AC charger, headset(Sample 1951579)
Mode: GPRS 1900

Chamber	Pre-amplifer	Filter	Limit
5m Chamber B	T34 8449B	Filter 1	Part 24

Band: GSM 1900 GPRS

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1850.2MHz									
3.705	1.3	V	3.0	35.4	1.0	-33.1	-13.0	-20.1	
5.557	-7.0	V	3.0	34.7	1.0	-40.7	-13.0	-27.7	
7.410	3.0	V	3.0	34.9	1.0	-30.9	-13.0	-17.9	
3.705	3.9	H	3.0	35.4	1.0	-30.5	-13.0	-17.5	
5.557	-2.2	H	3.0	34.7	1.0	-35.9	-13.0	-22.9	
7.410	4.2	H	3.0	34.9	1.0	-29.7	-13.0	-16.7	
Mid Ch, 1880MHz									
3.760	5.2	V	3.0	35.3	1.0	-29.1	-13.0	-16.1	
5.640	-7.1	V	3.0	34.7	1.0	-40.8	-13.0	-27.8	
7.520	6.6	V	3.0	34.9	1.0	-27.3	-13.0	-14.3	
3.760	7.5	H	3.0	35.3	1.0	-26.8	-13.0	-13.8	
5.640	-5.2	H	3.0	34.7	1.0	-38.9	-13.0	-25.9	
7.520	3.3	H	3.0	34.9	1.0	-30.6	-13.0	-17.6	
High Ch, 1909.8MHz									
3.815	6.2	V	3.0	35.3	1.0	-28.1	-13.0	-15.1	
5.723	-5.6	V	3.0	34.7	1.0	-39.3	-13.0	-26.3	
7.630	1.4	V	3.0	34.9	1.0	-32.5	-13.0	-19.5	
3.815	10.1	H	3.0	35.3	1.0	-24.2	-13.0	-11.2	
5.723	-2.3	H	3.0	34.7	1.0	-36.0	-13.0	-23.0	
7.630	0.6	H	3.0	34.9	1.0	-33.3	-13.0	-20.3	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL VERIFICATION SERVICES INC. FORM NO: CCSUP4701I
47173 BENICIA STREET, FREMONT, CA 94538, USA TEL: (510) 771-1000 FAX: (510) 661-0888
This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.