



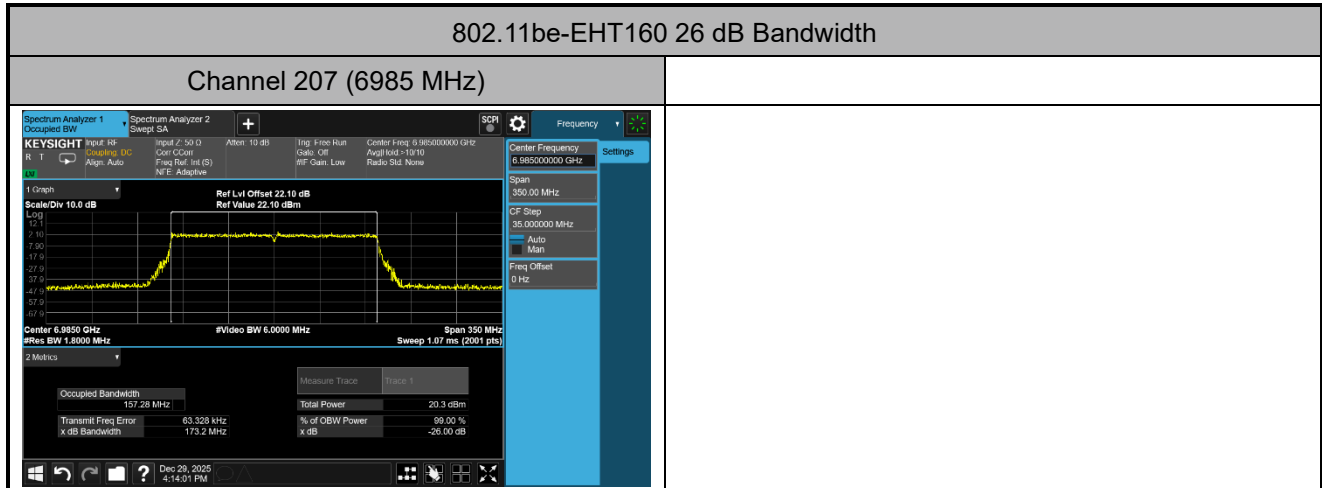


802.11be-EHT320 26 dB Bandwidth


Channel 31 (6105 MHz)

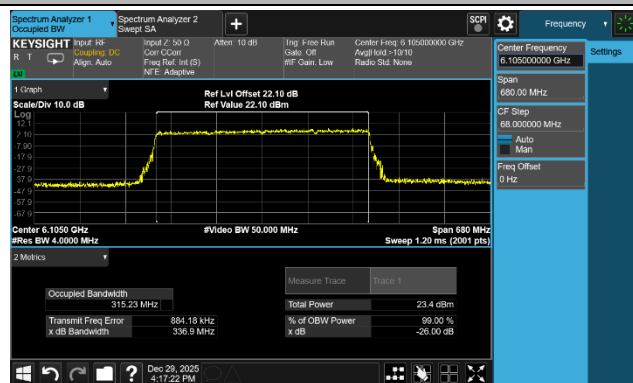


Channel 63 (6265 MHz)

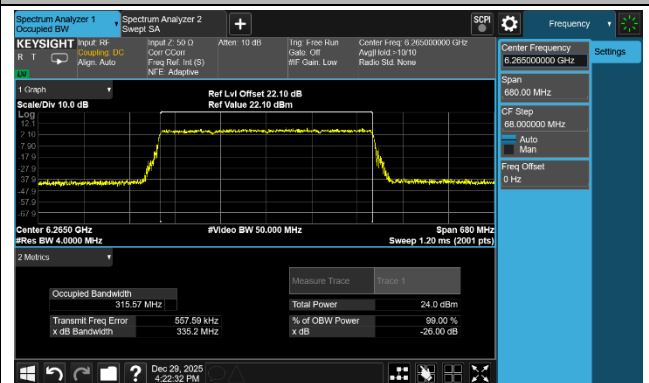


Channel 95 (6425 MHz)

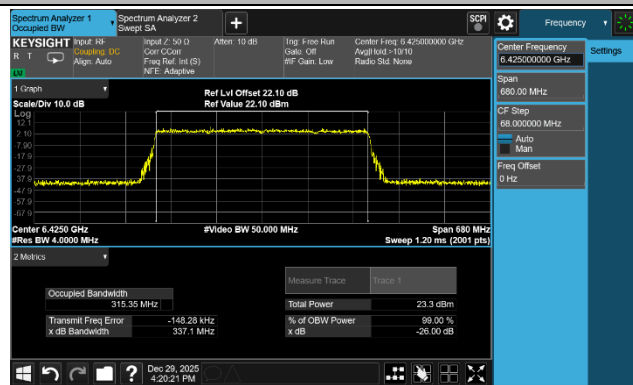


Channel 127 (6585 MHz)

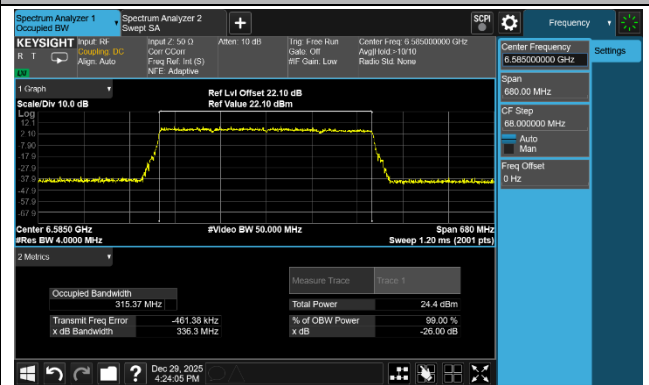

Channel 159 (6745 MHz)

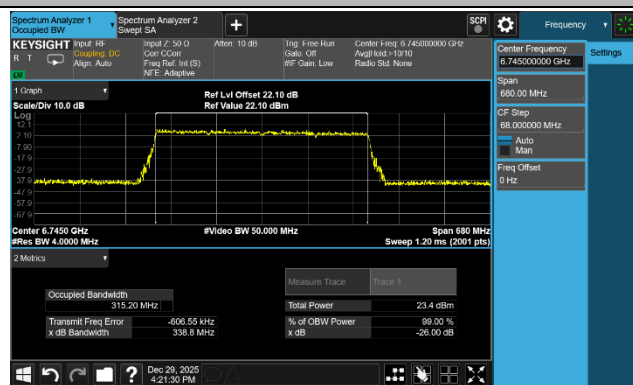

Channel 191 (6905 MHz)

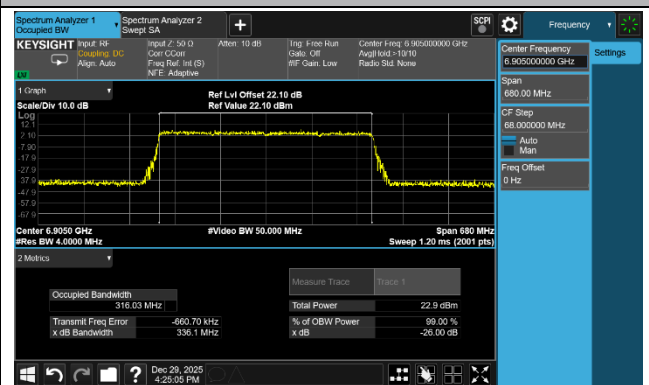

A.3 Output Power Test Result

Test Site	WJ-SR3	Test Engineer	Ellie Wang
Test Date	2025-12-22 ~ 2025-12-23	Model No.	AP541

Test Mode	Data Rate/ MCS	Channel No.	Freq (MHz)	Average Power (dBm)				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 4	Ant 5	Ant 6	Ant 7				
802.11ax-HE20	MCS0	1	5955	4.00	3.37	4.31	3.51	9.83	1.36	11.19	≤ 30.00
802.11ax-HE20	MCS0	49	6195	4.11	3.64	4.14	3.32	9.84	1.36	11.20	≤ 30.00
802.11ax-HE20	MCS0	93	6415	4.31	3.61	3.35	3.08	9.63	1.36	10.99	≤ 30.00
802.11ax-HE20	MCS0	97	6435	4.38	3.47	3.18	3.11	9.59	1.93	11.52	≤ 30.00
802.11ax-HE20	MCS0	105	6475	3.71	2.91	2.17	2.20	8.81	1.93	10.74	≤ 30.00
802.11ax-HE20	MCS0	113	6515	4.12	3.12	2.98	2.82	9.31	1.93	11.24	≤ 30.00
802.11ax-HE20	MCS0	117	6535	4.05	3.20	3.11	2.87	9.35	1.93	11.28	≤ 30.00
802.11ax-HE20	MCS0	149	6695	4.01	3.05	3.07	2.68	9.25	1.93	11.18	≤ 30.00
802.11ax-HE20	MCS0	181	6855	3.88	3.08	3.16	2.91	9.29	1.93	11.22	≤ 30.00
802.11ax-HE20	MCS0	185	6875	3.66	3.27	3.03	3.12	9.30	1.93	11.23	≤ 30.00
802.11ax-HE20	MCS0	189	6895	4.03	3.75	4.01	3.80	9.92	1.44	11.36	≤ 30.00
802.11ax-HE20	MCS0	209	6995	4.17	3.91	4.13	3.70	10.00	1.44	11.44	≤ 30.00
802.11ax-HE20	MCS0	229	7095	3.88	3.68	3.46	3.50	9.65	1.44	11.09	≤ 30.00
802.11ax-HE40	MCS0	3	5965	6.03	6.16	6.44	5.42	12.05	1.36	13.41	≤ 30.00
802.11ax-HE40	MCS0	51	6205	6.18	6.01	6.31	5.31	11.99	1.36	13.35	≤ 30.00
802.11ax-HE40	MCS0	91	6405	6.12	5.91	5.25	4.99	11.61	1.36	12.97	≤ 30.00
802.11ax-HE40	MCS0	99	6445	6.63	5.01	5.43	4.79	11.55	1.93	13.48	≤ 30.00
802.11ax-HE40	MCS0	107	6485	6.55	5.21	5.37	4.51	11.49	1.93	13.42	≤ 30.00
802.11ax-HE40	MCS0	115	6525	6.16	5.57	5.42	4.40	11.45	1.93	13.38	≤ 30.00
802.11ax-HE40	MCS0	123	6565	6.61	5.75	6.01	5.23	11.95	1.93	13.88	≤ 30.00
802.11ax-HE40	MCS0	147	6685	6.27	5.44	6.06	5.15	11.77	1.93	13.70	≤ 30.00
802.11ax-HE40	MCS0	179	6845	6.38	6.09	6.11	5.41	12.03	1.93	13.96	≤ 30.00
802.11ax-HE40	MCS0	187	6885	6.32	5.99	6.08	5.71	12.05	1.93	13.98	≤ 30.00
802.11ax-HE40	MCS0	195	6925	6.61	6.01	6.33	5.87	12.24	1.44	13.68	≤ 30.00
802.11ax-HE40	MCS0	211	7005	6.05	5.97	6.09	5.37	11.90	1.44	13.34	≤ 30.00
802.11ax-HE40	MCS0	227	7085	6.43	6.05	6.22	5.69	12.13	1.44	13.57	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq (MHz)	Average Power (dBm)				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 4	Ant 5	Ant 6	Ant 7				
802.11ax-HE80	MCS0	7	5985	9.11	8.80	9.37	8.68	15.02	1.36	16.38	≤ 30.00
802.11ax-HE80	MCS0	55	6225	9.22	8.94	9.15	8.63	15.01	1.36	16.37	≤ 30.00
802.11ax-HE80	MCS0	87	6385	9.70	8.84	8.59	8.17	14.88	1.36	16.24	≤ 30.00
802.11ax-HE80	MCS0	103	6465	9.50	8.66	8.36	7.71	14.63	1.93	16.56	≤ 30.00
802.11ax-HE80	MCS0	119	6545	9.13	8.35	8.28	7.68	14.41	1.93	16.34	≤ 30.00
802.11ax-HE80	MCS0	135	6625	9.46	8.73	9.01	8.28	14.91	1.93	16.84	≤ 30.00
802.11ax-HE80	MCS0	151	6705	9.60	8.91	8.84	8.43	14.99	1.93	16.92	≤ 30.00
802.11ax-HE80	MCS0	167	6785	9.45	9.04	9.29	8.40	15.08	1.93	17.01	≤ 30.00
802.11ax-HE80	MCS0	183	6865	9.18	8.11	9.21	8.28	14.74	1.93	16.67	≤ 30.00
802.11ax-HE80	MCS0	199	6945	9.02	8.67	9.04	8.44	14.82	1.44	16.26	≤ 30.00
802.11ax-HE80	MCS0	215	7025	8.84	8.58	8.68	8.11	14.58	1.44	16.02	≤ 30.00
802.11ax-HE160	MCS0	15	6025	11.86	11.38	12.19	11.65	17.80	1.36	19.16	≤ 30.00
802.11ax-HE160	MCS0	47	6185	12.16	11.96	12.28	11.85	18.09	1.36	19.45	≤ 30.00
802.11ax-HE160	MCS0	79	6345	12.31	11.76	12.17	11.48	17.96	1.36	19.32	≤ 30.00
802.11ax-HE160	MCS0	111	6505	11.56	11.45	11.34	10.69	17.29	1.93	19.22	≤ 30.00
802.11ax-HE160	MCS0	143	6665	11.45	10.83	11.58	10.74	17.19	1.93	19.12	≤ 30.00
802.11ax-HE160	MCS0	175	6825	11.39	11.41	11.35	10.85	17.28	1.93	19.21	≤ 30.00
802.11ax-HE160	MCS0	207	6985	11.62	11.52	11.61	11.21	17.51	1.44	18.95	≤ 30.00
802.11be-EHT20	MCS0	1	5955	4.16	3.71	4.14	3.34	9.87	1.36	11.23	≤ 30.00
802.11be-EHT20	MCS0	49	6195	4.24	3.87	3.93	3.30	9.87	1.36	11.23	≤ 30.00
802.11be-EHT20	MCS0	93	6415	4.54	3.69	3.23	2.93	9.66	1.36	11.02	≤ 30.00
802.11be-EHT20	MCS0	97	6435	4.65	3.72	3.38	3.01	9.75	1.93	11.68	≤ 30.00
802.11be-EHT20	MCS0	105	6475	4.10	3.14	2.57	2.20	9.08	1.93	11.01	≤ 30.00
802.11be-EHT20	MCS0	113	6515	4.37	3.38	2.66	2.74	9.36	1.93	11.29	≤ 30.00
802.11be-EHT20	MCS0	117	6535	4.34	3.44	3.28	2.63	9.49	1.93	11.42	≤ 30.00
802.11be-EHT20	MCS0	149	6695	3.94	3.24	3.03	2.69	9.27	1.93	11.20	≤ 30.00
802.11be-EHT20	MCS0	181	6855	4.04	3.46	3.23	3.03	9.48	1.93	11.41	≤ 30.00
802.11be-EHT20	MCS0	185	6875	3.84	3.31	3.26	3.05	9.40	1.93	11.33	≤ 30.00
802.11be-EHT20	MCS0	189	6895	4.26	3.95	3.98	3.71	10.00	1.44	11.44	≤ 30.00
802.11be-EHT20	MCS0	209	6995	4.34	4.09	4.17	3.56	10.07	1.44	11.51	≤ 30.00
802.11be-EHT20	MCS0	229	7095	4.12	3.82	3.61	3.34	9.75	1.44	11.19	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq (MHz)	Average Power (dBm)				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 4	Ant 5	Ant 6	Ant 7				
802.11be-EHT40	MCS0	3	5965	6.16	6.21	6.61	5.51	12.16	1.36	13.52	≤ 30.00
802.11be-EHT40	MCS0	51	6205	6.36	6.08	6.41	5.40	12.10	1.36	13.46	≤ 30.00
802.11be-EHT40	MCS0	91	6405	6.53	6.02	5.98	5.01	11.94	1.36	13.30	≤ 30.00
802.11be-EHT40	MCS0	99	6445	6.74	5.60	5.51	4.84	11.75	1.93	13.68	≤ 30.00
802.11be-EHT40	MCS0	107	6485	6.67	5.44	5.42	4.53	11.60	1.93	13.53	≤ 30.00
802.11be-EHT40	MCS0	115	6525	6.17	5.50	5.55	4.54	11.50	1.93	13.43	≤ 30.00
802.11be-EHT40	MCS0	123	6565	6.64	5.95	6.06	5.14	12.00	1.93	13.93	≤ 30.00
802.11be-EHT40	MCS0	147	6685	6.40	5.45	6.15	5.26	11.86	1.93	13.79	≤ 30.00
802.11be-EHT40	MCS0	179	6845	6.55	6.20	6.16	5.53	12.15	1.93	14.08	≤ 30.00
802.11be-EHT40	MCS0	187	6885	6.40	6.03	6.17	5.58	12.08	1.93	14.01	≤ 30.00
802.11be-EHT40	MCS0	195	6925	6.70	6.18	6.36	5.88	12.31	1.44	13.75	≤ 30.00
802.11be-EHT40	MCS0	211	7005	6.22	5.97	6.02	5.42	11.94	1.44	13.38	≤ 30.00
802.11be-EHT40	MCS0	227	7085	6.79	6.07	6.25	5.57	12.21	1.44	13.65	≤ 30.00
802.11be-EHT80	MCS0	7	5985	9.36	9.25	9.70	8.77	15.30	1.36	16.66	≤ 30.00
802.11be-EHT80	MCS0	55	6225	9.45	9.28	9.32	8.68	15.21	1.36	16.57	≤ 30.00
802.11be-EHT80	MCS0	87	6385	9.89	9.33	8.97	8.33	15.19	1.36	16.55	≤ 30.00
802.11be-EHT80	MCS0	103	6465	9.71	8.87	8.51	7.91	14.82	1.93	16.75	≤ 30.00
802.11be-EHT80	MCS0	119	6545	9.24	8.41	8.48	7.72	14.52	1.93	16.45	≤ 30.00
802.11be-EHT80	MCS0	135	6625	9.65	8.93	9.05	8.26	15.02	1.93	16.95	≤ 30.00
802.11be-EHT80	MCS0	151	6705	9.83	9.08	9.05	8.71	15.21	1.93	17.14	≤ 30.00
802.11be-EHT80	MCS0	167	6785	9.60	9.25	9.40	8.67	15.26	1.93	17.19	≤ 30.00
802.11be-EHT80	MCS0	183	6865	9.55	9.08	9.52	8.58	15.22	1.93	17.15	≤ 30.00
802.11be-EHT80	MCS0	199	6945	9.40	8.98	9.19	8.61	15.08	1.44	16.52	≤ 30.00
802.11be-EHT80	MCS0	215	7025	9.06	8.68	8.92	8.31	14.77	1.44	16.21	≤ 30.00
802.11be-EHT160	MCS0	15	6025	12.06	12.13	12.38	11.65	18.08	1.36	19.44	≤ 30.00
802.11be-EHT160	MCS0	47	6185	12.26	12.20	12.50	11.95	18.25	1.36	19.61	≤ 30.00
802.11be-EHT160	MCS0	79	6345	12.80	12.17	12.37	11.61	18.28	1.36	19.64	≤ 30.00
802.11be-EHT160	MCS0	111	6505	12.53	11.74	11.67	10.71	17.73	1.93	19.66	≤ 30.00
802.11be-EHT160	MCS0	143	6665	12.08	11.38	11.97	10.91	17.63	1.93	19.56	≤ 30.00
802.11be-EHT160	MCS0	175	6825	12.09	11.58	11.60	11.11	17.63	1.93	19.56	≤ 30.00
802.11be-EHT160	MCS0	207	6985	11.80	11.64	11.95	11.47	17.74	1.44	19.18	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq (MHz)	Average Power (dBm)				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 4	Ant 5	Ant 6	Ant 7				
802.11be-EHT320	MCS0	31	6105	14.39	14.64	14.61	13.96	20.43	1.36	21.79	≤ 30.00
802.11be-EHT320	MCS0	63	6265	15.22	14.74	14.81	13.99	20.73	1.36	22.09	≤ 30.00
802.11be-EHT320	MCS0	95	6425	14.59	13.90	13.55	12.69	19.76	1.93	21.69	≤ 30.00
802.11be-EHT320	MCS0	127	6585	14.94	14.06	14.19	13.69	20.26	1.93	22.19	≤ 30.00
802.11be-EHT320	MCS0	159	6745	14.57	13.95	14.35	13.48	20.13	1.93	22.06	≤ 30.00
802.11be-EHT320	MCS0	191	6905	14.48	13.87	13.98	13.56	20.01	1.93	21.94	≤ 30.00

Note 1: Total Average Power (dBm) = $10 \times \log \{10^{(\text{Ant 4 Average Power} / 10)} + 10^{(\text{Ant 5 Average Power} / 10)} + 10^{(\text{Ant 6 Average Power} / 10)} + 10^{(\text{Ant 7 Average Power} / 10)}\}$.

Note 2: EIRP (dBm) = Total Average Power (dBm) + Antenna Gain (dBi).

A.4 Power Spectral Density Test Result

Test Site	WJ-SR3	Test Engineer	Ellie Wang
Test Date	2025-12-15 ~ 2025-12-21	Model No.	AP541

Test Mode	Data Rate/ MCS	Channel No.	Freq (MHz)	PSD (dBm/MHz)				Duty Cycle (%)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)
				Ant 4	Ant 5	Ant 6	Ant 7				
802.11be-EHT20	MCS0	1	5955	-8.389	-8.682	-7.915	-8.787	98.13	7.33	4.92	≤ 5.00
802.11be-EHT20	MCS0	49	6195	-8.027	-8.380	-8.494	-8.912	98.13	7.33	4.91	≤ 5.00
802.11be-EHT20	MCS0	93	6415	-7.889	-8.620	-9.167	-9.330	98.13	7.33	4.64	≤ 5.00
802.11be-EHT20	MCS0	97	6435	-8.041	-8.916	-9.220	-9.405	98.13	7.83	4.99	≤ 5.00
802.11be-EHT20	MCS0	105	6475	-8.399	-9.335	-9.713	-9.993	98.13	7.83	4.53	≤ 5.00
802.11be-EHT20	MCS0	113	6515	-8.239	-9.317	-9.169	-9.507	98.13	7.83	4.82	≤ 5.00
802.11be-EHT20	MCS0	117	6535	-8.449	-9.185	-9.377	-9.863	98.13	7.83	4.66	≤ 5.00
802.11be-EHT20	MCS0	149	6695	-8.484	-9.225	-8.933	-9.329	98.13	7.83	4.87	≤ 5.00
802.11be-EHT20	MCS0	181	6855	-8.650	-9.001	-9.021	-9.400	98.13	7.83	4.84	≤ 5.00
802.11be-EHT20	MCS0	185	6875	-8.759	-9.162	-9.334	-9.525	98.13	7.83	4.66	≤ 5.00
802.11be-EHT20	MCS0	189	6895	-8.326	-8.498	-8.515	-9.002	98.13	7.37	4.81	≤ 5.00
802.11be-EHT20	MCS0	209	6995	-8.236	-8.383	-8.556	-9.036	98.13	7.37	4.85	≤ 5.00
802.11be-EHT20	MCS0	229	7095	-8.392	-8.768	-9.135	-9.228	98.13	7.37	4.52	≤ 5.00
802.11be-EHT40	MCS0	3	5965	-8.685	-8.656	-8.672	-9.530	97.18	7.33	4.60	≤ 5.00
802.11be-EHT40	MCS0	51	6205	-8.467	-9.008	-8.638	-9.536	97.18	7.33	4.58	≤ 5.00
802.11be-EHT40	MCS0	91	6405	-7.891	-8.488	-8.651	-9.501	97.18	7.33	4.88	≤ 5.00
802.11be-EHT40	MCS0	99	6445	-8.143	-9.072	-9.241	-9.851	97.18	7.83	4.94	≤ 5.00
802.11be-EHT40	MCS0	107	6485	-8.129	-9.309	-9.435	-10.058	97.18	7.83	4.80	≤ 5.00
802.11be-EHT40	MCS0	115	6525	-8.797	-9.414	-9.390	-10.353	97.18	7.83	4.52	≤ 5.00
802.11be-EHT40	MCS0	123	6565	-8.469	-9.047	-8.935	-9.817	97.18	7.83	4.93	≤ 5.00
802.11be-EHT40	MCS0	147	6685	-8.720	-9.834	-9.201	-9.982	97.18	7.83	4.57	≤ 5.00
802.11be-EHT40	MCS0	179	6845	-8.479	-9.333	-9.043	-9.683	97.18	7.83	4.86	≤ 5.00
802.11be-EHT40	MCS0	187	6885	-8.598	-9.342	-9.363	-9.533	97.18	7.83	4.78	≤ 5.00
802.11be-EHT40	MCS0	195	6925	-8.507	-9.094	-8.713	-9.186	97.18	7.37	4.65	≤ 5.00
802.11be-EHT40	MCS0	211	7005	-8.559	-8.867	-8.641	-9.326	97.18	7.37	4.68	≤ 5.00
802.11be-EHT40	MCS0	227	7085	-7.918	-8.893	-8.514	-9.323	97.18	7.37	4.88	≤ 5.00


Test Mode	Data Rate/ MCS	Channel No.	Freq (MHz)	PSD (dBm/MHz)				Duty Cycle (%)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)
				Ant 4	Ant 5	Ant 6	Ant 7				
802.11be-EHT80	MCS0	7	5985	-8.646	-8.648	-8.637	-9.545	97.32	7.33	4.62	≤ 5.00
802.11be-EHT80	MCS0	55	6225	-8.727	-8.884	-8.926	-9.183	97.32	7.33	4.54	≤ 5.00
802.11be-EHT80	MCS0	87	6385	-7.915	-8.416	-8.845	-9.230	97.32	7.33	4.89	≤ 5.00
802.11be-EHT80	MCS0	103	6465	-7.994	-9.224	-9.108	-9.890	97.32	7.83	4.97	≤ 5.00
802.11be-EHT80	MCS0	119	6545	-8.492	-9.308	-9.529	-10.178	97.32	7.83	4.63	≤ 5.00
802.11be-EHT80	MCS0	135	6625	-8.366	-9.435	-9.117	-9.928	97.32	7.83	4.79	≤ 5.00
802.11be-EHT80	MCS0	151	6705	-8.431	-9.254	-9.267	-9.769	97.32	7.83	4.82	≤ 5.00
802.11be-EHT80	MCS0	167	6785	-8.601	-9.182	-8.843	-9.679	97.32	7.83	4.91	≤ 5.00
802.11be-EHT80	MCS0	183	6865	-8.753	-9.067	-9.145	-9.457	97.32	7.83	4.87	≤ 5.00
802.11be-EHT80	MCS0	199	6945	-8.534	-8.987	-8.741	-9.197	97.32	7.37	4.65	≤ 5.00
802.11be-EHT80	MCS0	215	7025	-8.639	-8.993	-8.765	-9.304	97.32	7.37	4.59	≤ 5.00
802.11be-EHT160	MCS0	15	6025	-8.682	-8.975	-8.582	-8.706	97.32	7.33	4.73	≤ 5.00
802.11be-EHT160	MCS0	47	6185	-8.631	-8.983	-8.843	-8.972	97.32	7.33	4.61	≤ 5.00
802.11be-EHT160	MCS0	79	6345	-7.974	-8.599	-8.417	-9.123	97.32	7.33	4.96	≤ 5.00
802.11be-EHT160	MCS0	111	6505	-8.528	-9.425	-9.765	-9.820	97.32	7.83	4.62	≤ 5.00
802.11be-EHT160	MCS0	143	6665	-8.270	-9.496	-8.839	-9.619	97.32	7.83	4.95	≤ 5.00
802.11be-EHT160	MCS0	175	6825	-8.724	-9.188	-9.327	-9.698	97.32	7.83	4.75	≤ 5.00
802.11be-EHT160	MCS0	207	6985	-8.781	-8.932	-8.615	-9.120	97.32	7.37	4.65	≤ 5.00
802.11be-EHT320	MCS0	31	6105	-8.449	-8.924	-8.632	-8.448	97.18	7.33	4.87	≤ 5.00
802.11be-EHT320	MCS0	63	6265	-7.856	-8.557	-8.546	-9.114	97.18	7.33	4.98	≤ 5.00
802.11be-EHT320	MCS0	95	6425	-8.432	-9.306	-9.851	-10.340	97.18	7.83	4.55	≤ 5.00
802.11be-EHT320	MCS0	127	6585	-8.242	-9.569	-9.395	-9.755	97.18	7.83	4.78	≤ 5.00
802.11be-EHT320	MCS0	159	6745	-8.060	-9.582	-9.057	-9.864	97.18	7.83	4.89	≤ 5.00
802.11be-EHT320	MCS0	191	6905	-8.627	-9.554	-9.282	-9.757	97.18	7.83	4.69	≤ 5.00

Note: When EUT duty cycle < 98%, EIRP PSD (dBm/MHz) = $10 \times \log \{10^{(\text{Ant 4 PSD}/10)} + 10^{(\text{Ant 5 PSD}/10)} + 10^{(\text{Ant 6 PSD}/10)} + 10^{(\text{Ant 7 PSD}/10)}\}$ (dBm/MHz) + $10 \times \log (1/\text{Duty Cycle})$ + Antenna Gain (dBi).


When EUT duty cycle ≥ 98%, EIRP PSD (dBm/MHz) = $10 \times \log \{10^{(\text{Ant 4 PSD}/10)} + 10^{(\text{Ant 5 PSD}/10)} + 10^{(\text{Ant 6 PSD}/10)} + 10^{(\text{Ant 7 PSD}/10)}\}$ (dBm/MHz) + Antenna Gain (dBi).

802.11be-EHT20 Power Spectral Density- Ant 4

Channel 1 (5955 MHz)

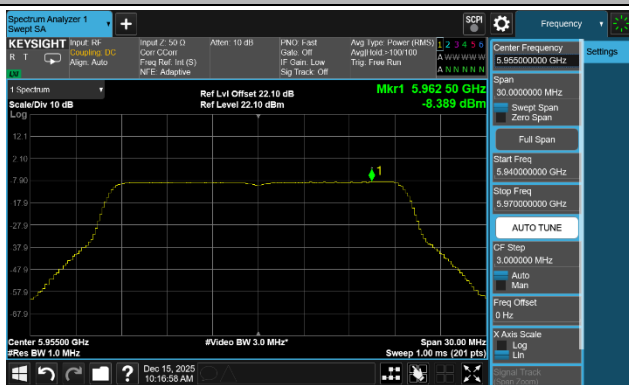

Channel 49 (6195 MHz)

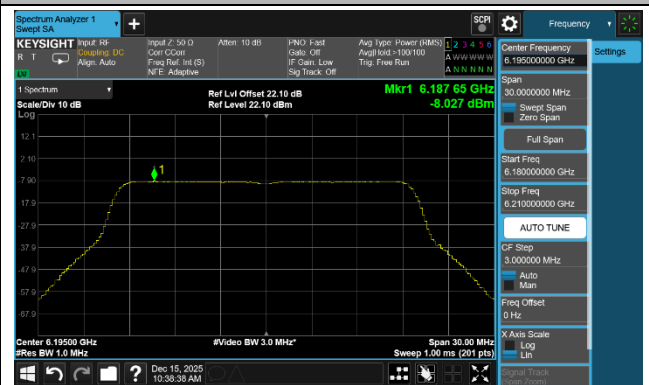


Channel 93 (6415 MHz)




Channel 97 (6435 MHz)



Channel 105 (6475 MHz)

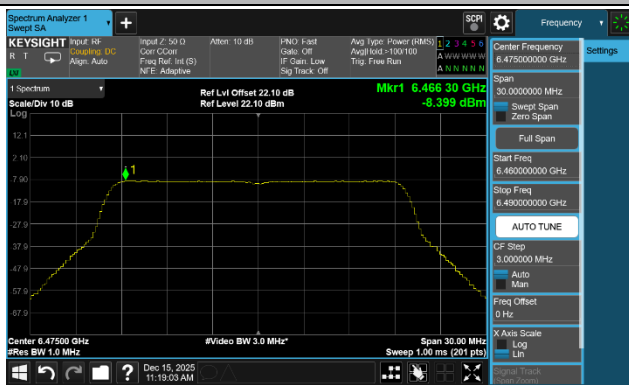


Channel 113 (6515 MHz)

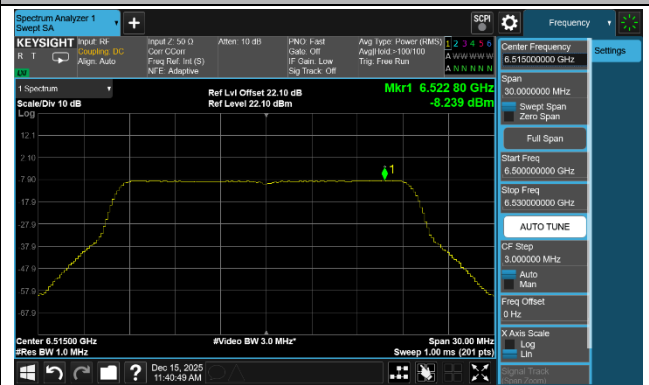


802.11be-EHT20 Power Spectral Density- Ant 4

Channel 117 (6535 MHz)

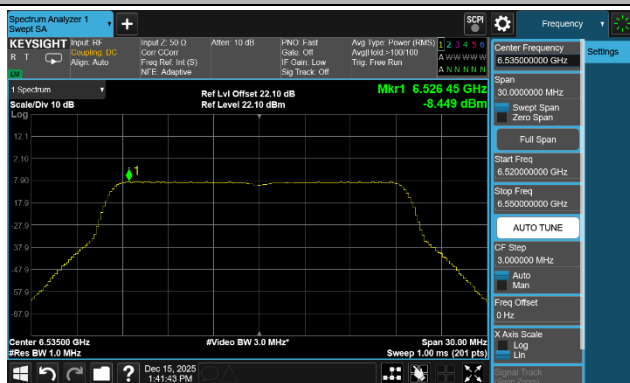


Channel 149 (6695 MHz)

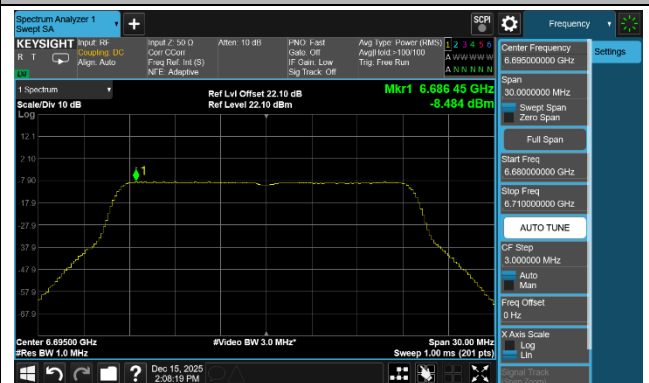


Channel 181 (6855 MHz)



Channel 185 (6875 MHz)

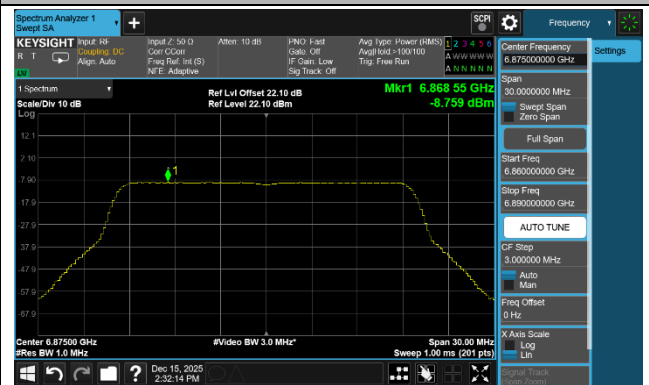


Channel 189 (6895 MHz)

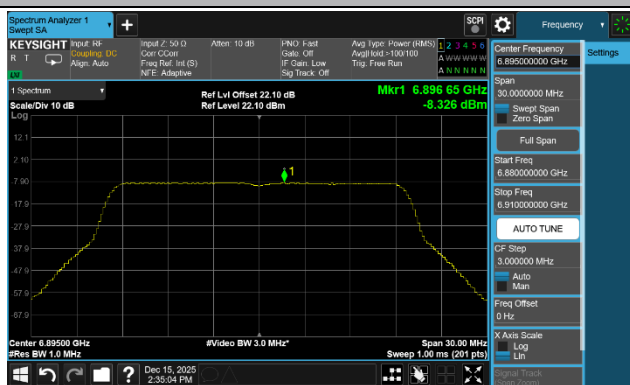


Channel 209 (6995 MHz)



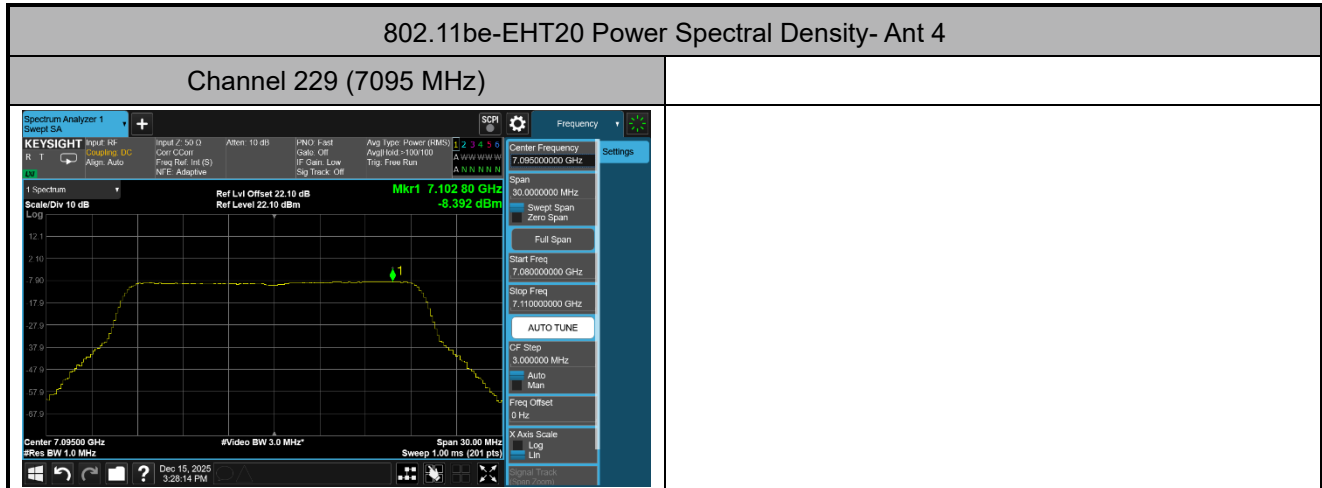


802.11be-EHT40 Power Spectral Density- Ant 4

Channel 3 (5965 MHz)

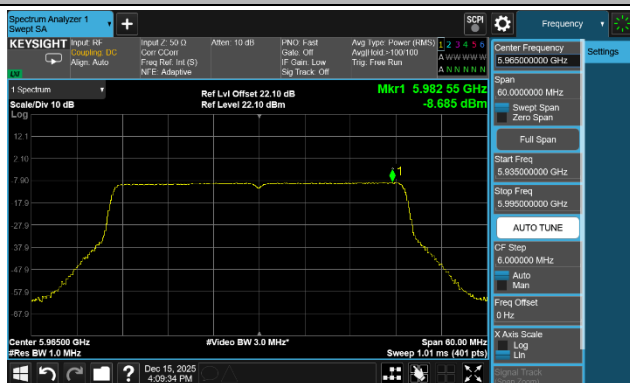

Channel 51 (6205 MHz)

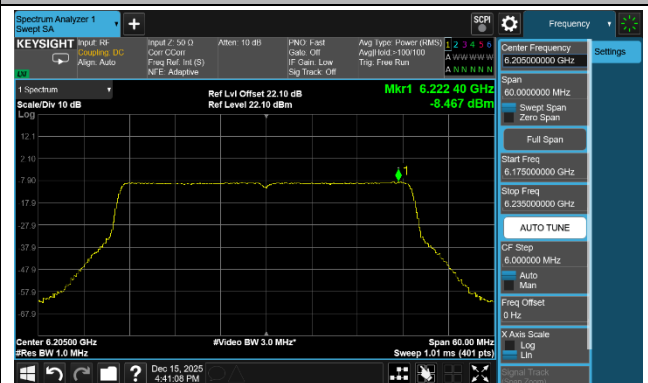

Channel 91 (6405 MHz)



Channel 99 (6445 MHz)



Channel 107 (6485 MHz)




Channel 115 (6525 MHz)




802.11be-EHT40 Power Spectral Density- Ant 4

Channel 123 (6565 MHz)

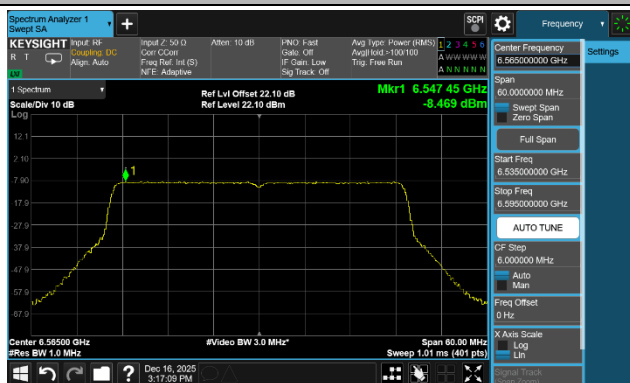


Channel 147 (6685 MHz)

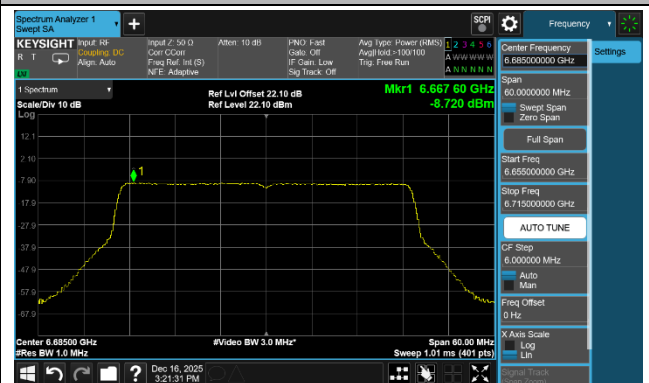


Channel 179 (6845 MHz)




Channel 187 (6885 MHz)

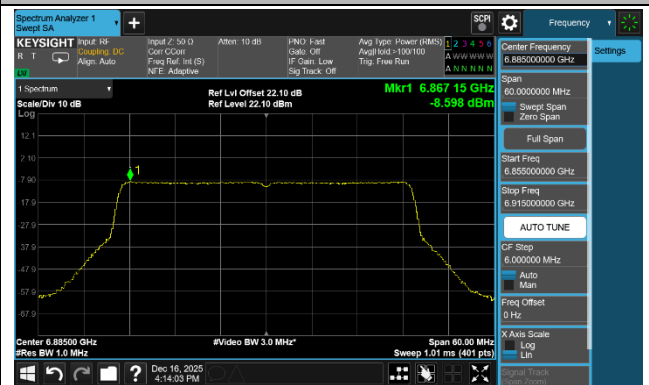

Channel 195 (6925 MHz)

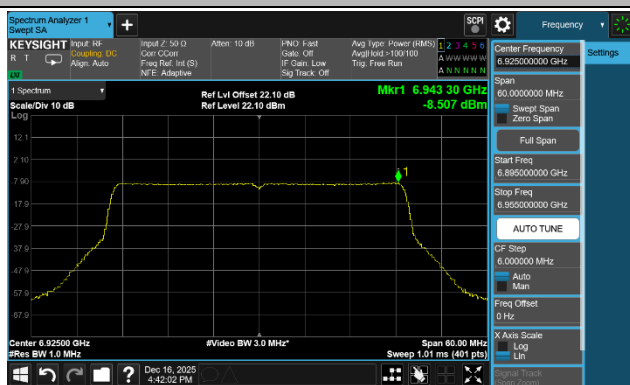


Channel 211 (7005 MHz)

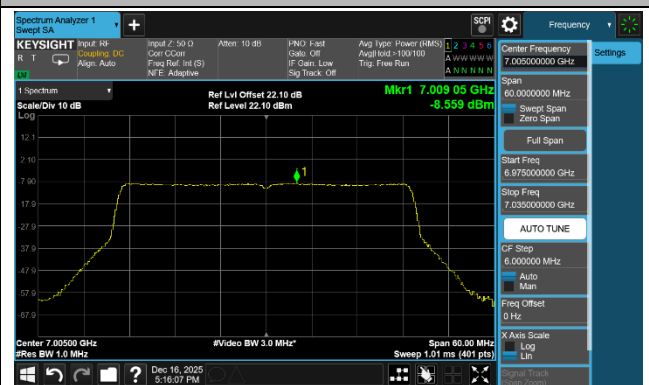


802.11be-EHT40 Power Spectral Density- Ant 4

Channel 227 (7085 MHz)

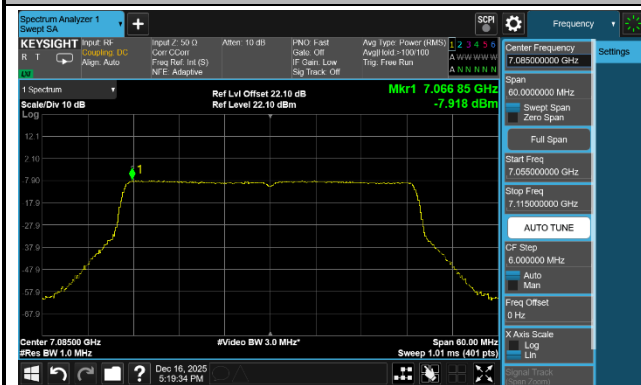


802.11be-EHT80 Power Spectral Density- Ant 4

Channel 7 (5985 MHz)

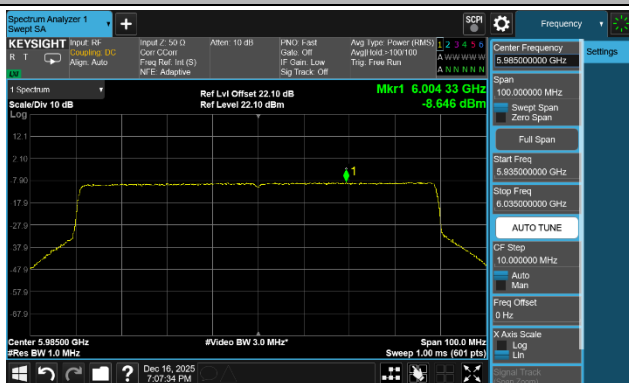


Channel 55 (6225 MHz)

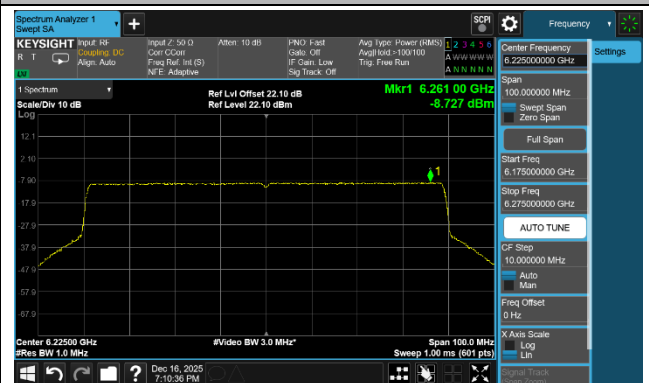


Channel 87 (6385 MHz)




Channel 103 (6465 MHz)

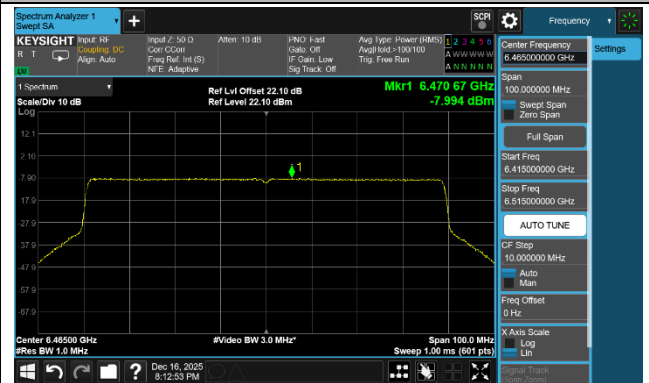

Channel 119 (6545 MHz)

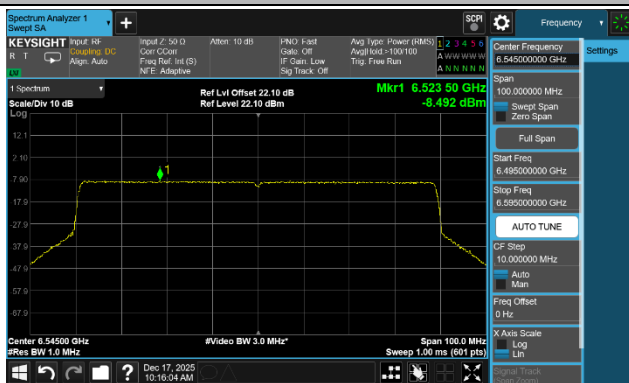


Channel 135 (6625 MHz)

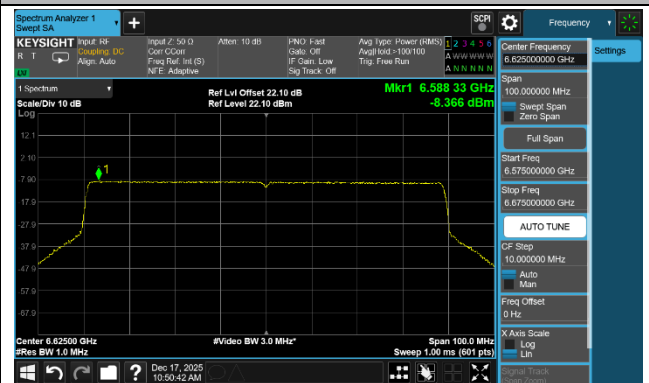


802.11be-EHT80 Power Spectral Density- Ant 4


Channel 151 (6705 MHz)

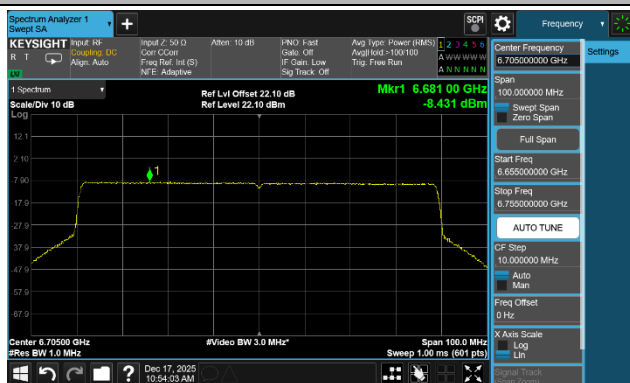


Channel 167 (6785 MHz)

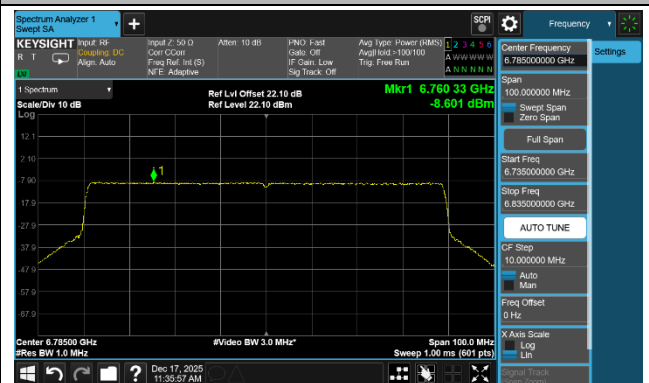


Channel 183 (6865 MHz)

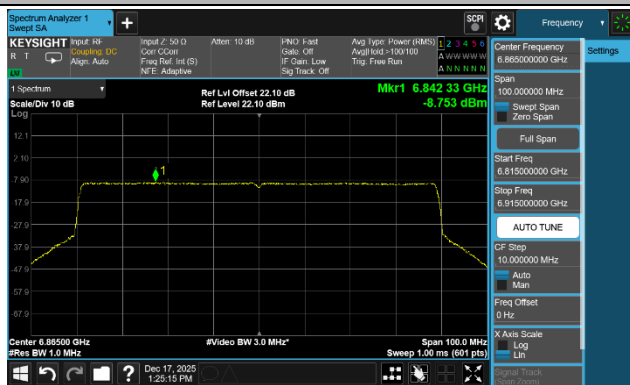

Channel 199 (6945 MHz)

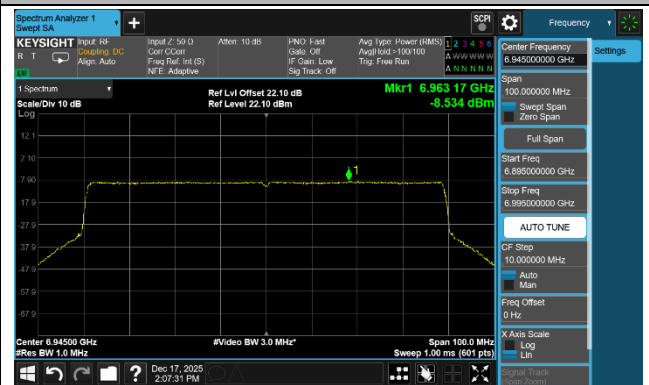


Channel 215 (7025 MHz)

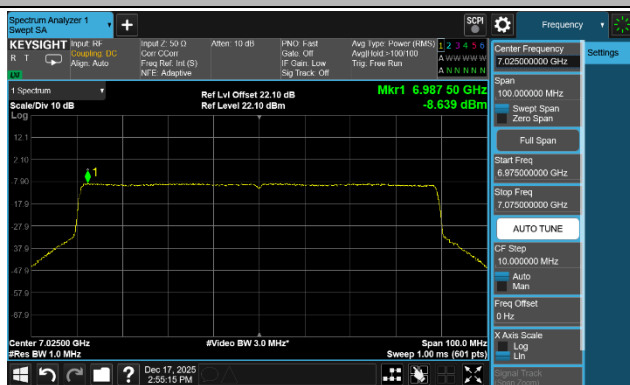


802.11be-EHT160 Power Spectral Density- Ant 4


Channel 15 (6025 MHz)

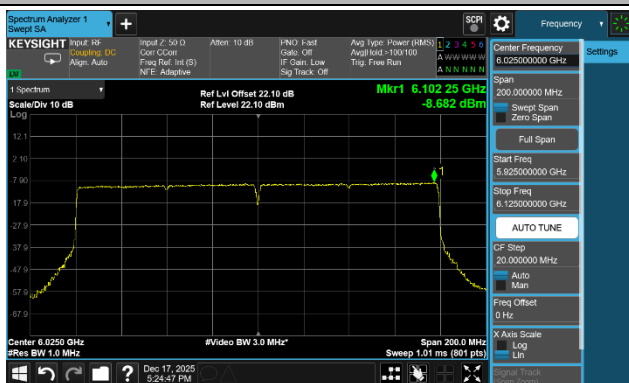


Channel 47 (6185 MHz)

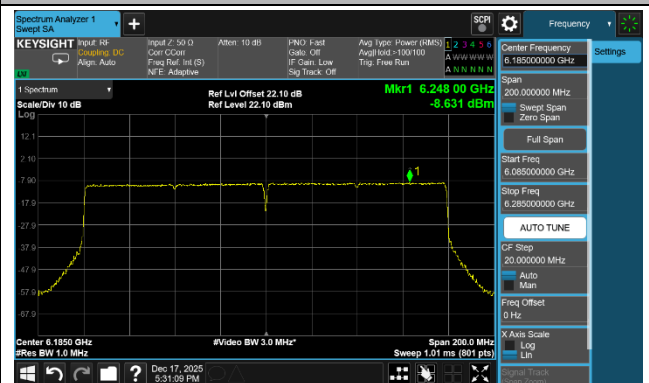


Channel 79 (6345 MHz)

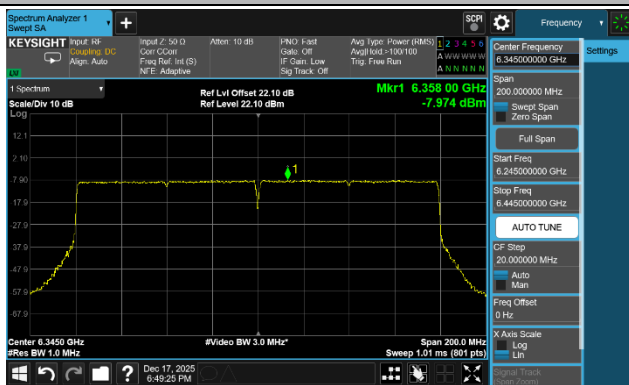


Channel 111 (6505 MHz)

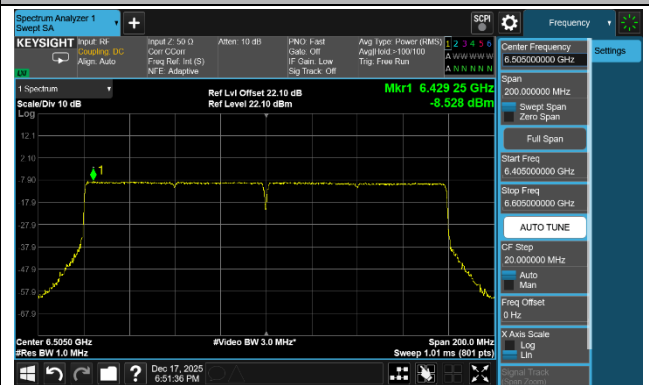

Channel 143 (6665 MHz)

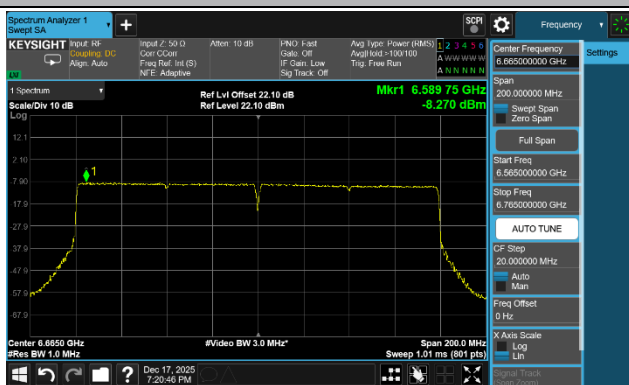


Channel 175 (6825 MHz)

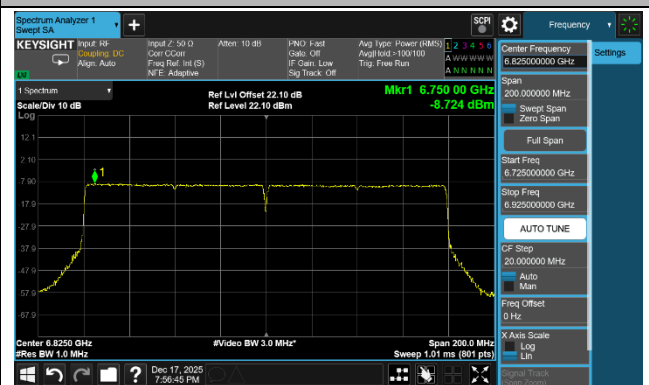


802.11be-EHT160 Power Spectral Density- Ant 4

Channel 207 (6985 MHz)

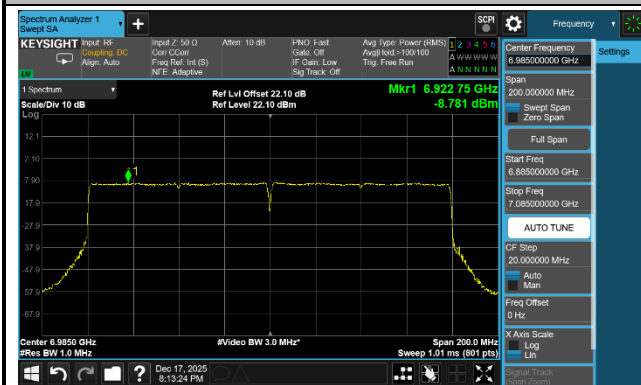


802.11be-EHT320 Power Spectral Density- Ant 4


Channel 31 (6105 MHz)

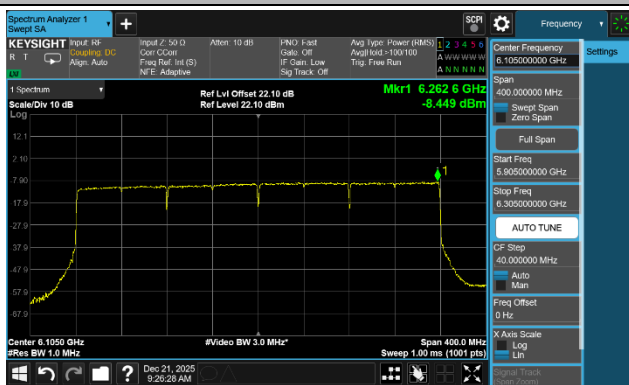


Channel 63 (6265 MHz)

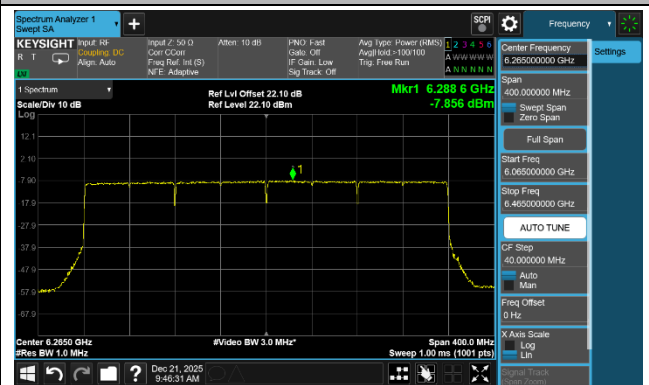


Channel 95 (6425 MHz)

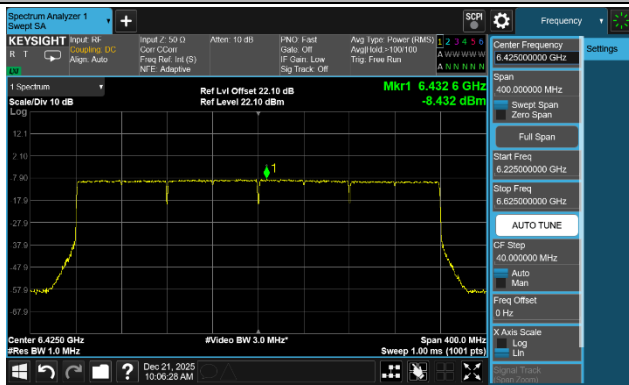


Channel 127 (6585 MHz)

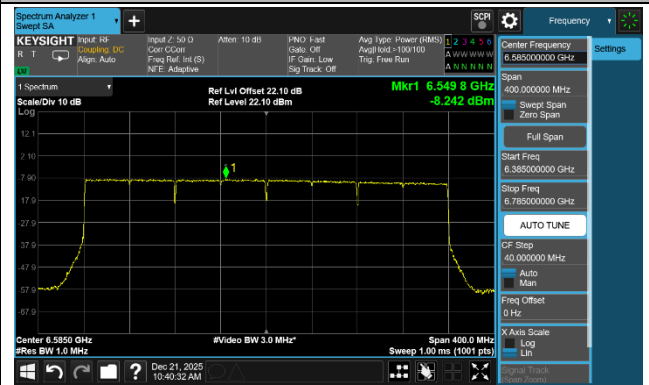

Channel 159 (6745 MHz)

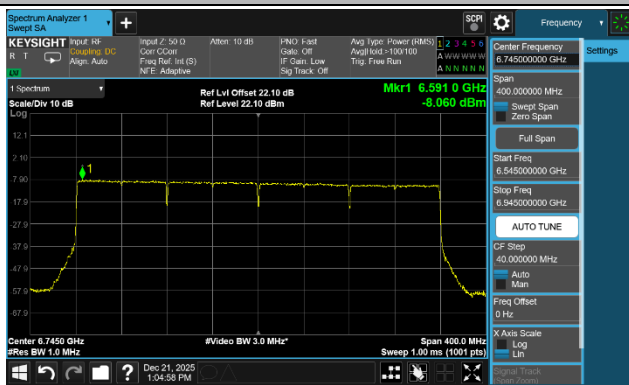


Channel 191 (6905 MHz)

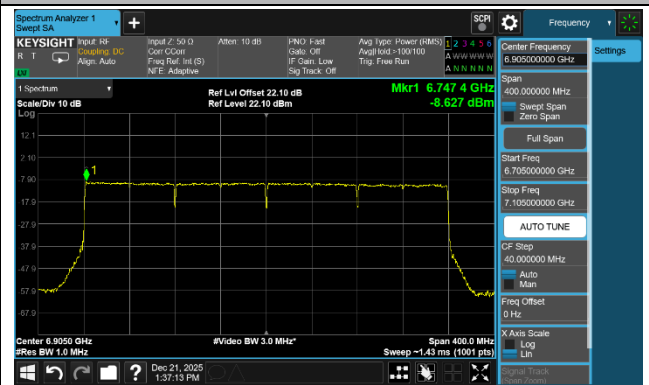


802.11be-EHT20 Power Spectral Density- Ant 5

Channel 1 (5955 MHz)

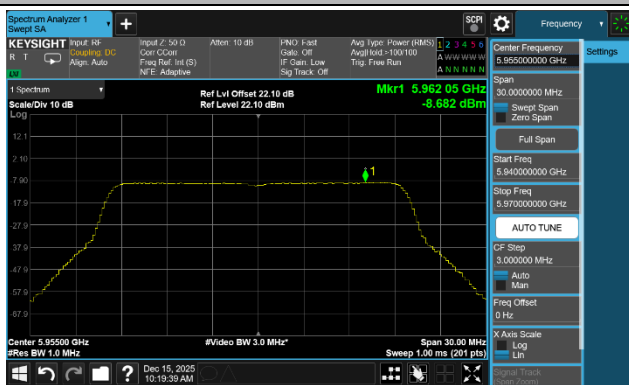


Channel 49 (6195 MHz)

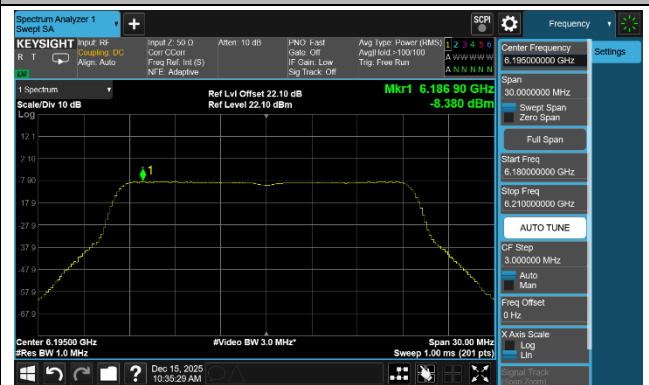


Channel 93 (6415 MHz)



Channel 97 (6435 MHz)

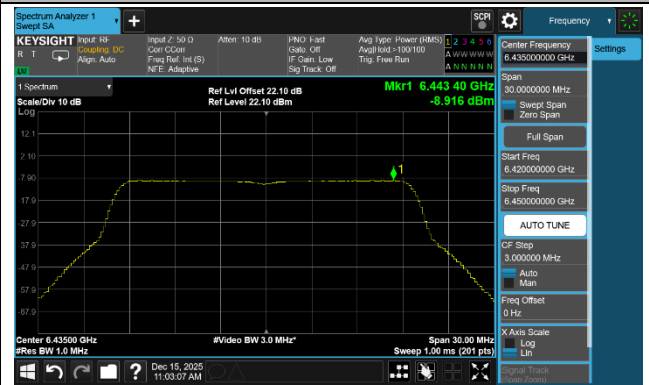

Channel 105 (6475 MHz)

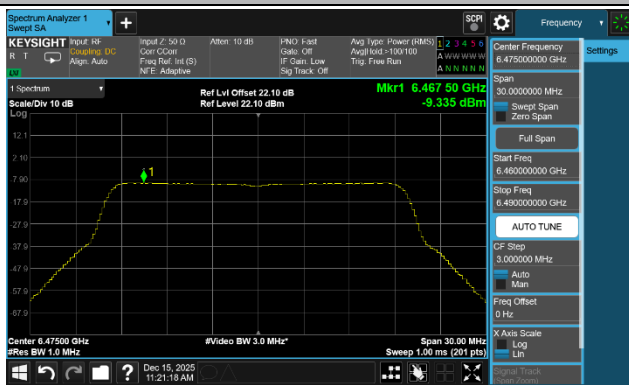

Channel 113 (6515 MHz)

