



Test Report – FCC Part 15B Unintentional Radiator

Applicant: Icom Incorporated

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature 3/10/2023

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.



Table of Contents

1.	CUSTOMER INFORMATION.....	4
1.1	TEST RESULT SUMMARY	4
2.	LOCATION OF TESTING	5
2.1	TEST LABORATORY	5
2.2	TESTING WAS PERFORMED, REVIEWED BY	5
3.	TEST SAMPLE(S) (EUT/DUT)	6
3.1	DESCRIPTION OF THE EUT.....	6
3.2	CONFIGURATION OF EUT	7
3.3	TEST SETUP OF EUT	7
4.	TEST METHODS & APPLICABLE REGULATORY LIMITS.....	8
4.1	TEST METHODS/STANDARDS/GUIDANCE	8
5.	MEASUREMENT UNCERTAINTY.....	8
6.	ENVIRONMENTAL CONDITIONS	8
7.	LIST OF TEST EQUIPMENT AND TEST FACILITY.....	9
8.	TEST RESULTS	10
8.1	RADIATED EMISSIONS.....	11
8.1.1	Scanning Receiver Function, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Plot.....	12
8.1.2	Scanning Receiver Function, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Table.....	13
8.1.3	Scanning Receiver Function, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Plot.....	14
8.1.4	Scanning Receiver Function, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Table.....	15
8.1.5	Scanning Receiver Function, above 1000 MHz, Horizontal/ Vertical Polarity Plot.....	16
8.1.6	Scanning Receiver Function, above 1000 MHz, Horizontal/ Vertical Polarity Table	17
8.1.7	51 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Plot	18
8.1.8	51 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Table	19
8.1.9	51 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Plot.....	20
8.1.10	51 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Table	21
8.1.11	51 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Plot.....	22
8.1.12	51 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Table	23
8.1.13	136 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Plot.....	24
8.1.14	136 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Table.....	25
8.1.15	136 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Plot	26
8.1.16	136 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Table	27
8.1.17	136 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Plot	28
8.1.18	136 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Table	29
8.1.19	381.3 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Plot	30
8.1.20	381.3 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Table	31
8.1.21	381.3 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Plot.....	32
8.1.22	381.3 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Table.....	33
8.1.23	381.3 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Plot.....	34



8.1.24	381.3 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Table.....	35
8.1.25	685.5 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Plot	36
8.1.26	685.5 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Table	37
8.1.27	685.5 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Plot	38
8.1.28	685.5 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Table	39
8.1.29	685.5 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Plot	40
8.1.30	685.5 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Table	41
8.1.31	1211.28 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Plot	42
8.1.32	1211.28 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Table	43
8.1.33	1211.28 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Plot.....	44
8.1.34	1211.28 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Table.....	45
8.1.35	1211.28 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Plot.....	46
8.1.36	1211.28 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Table.....	47
8.2	CONDUCTED EMISSIONS.....	48
8.2.1	Scanning, Line 1 Plot	49
8.2.2	Scanning, Line 1 Table	50
8.2.3	Scanning, Line 2 Plot	51
8.2.4	Scanning, Line 2 Table	52
8.2.5	51 MHz, Line 1 Plot	53
8.2.6	51 MHz, Line 1 Table	54
8.2.7	51 MHz, Line 2 Plot	55
8.2.8	51 MHz, Line 2 Table	56
8.2.9	136 MHz, Line 1 Plot.....	57
8.2.10	136 MHz, Line 1 Table.....	58
8.2.11	136 MHz, Line 2 Plot.....	59
8.2.12	136 MHz, Line 2 Table	60
8.2.13	381.3MHz, Line 1 Plot.....	61
8.2.14	381.3 MHz, Line 1 Table	62
8.2.15	381.3 MHz, Line 2 Plot	63
8.2.16	381.3 MHz, Line 2 Table	64
8.2.17	685.5 MHz, Line 1 Plot	65
8.2.18	685.5 MHz, Line 1 Table	66
8.2.19	685.5 MHz, Line 2 Plot	67
8.2.20	685.5 MHz, Line 2 Table	68
8.2.21	1211.28 MHz, Line 1 Plot	69
8.2.22	1211.28 MHz, Line 1 Table	70
8.2.23	1211.28 MHz, Line 2 Plot.....	71
8.2.24	1211.28 MHz, Line 2 Table.....	72
9.	STATEMENTS OF COMPATIBILITY WITH FCC RULES – PART 15.121.....	73
10.	ANNEX-A - PHOTOGRAPHS OF THE EUT.....	74
11.	ANNEX-B – TEST SETUP PHOTOGRAPHS.....	74
12.	HISTORY OF TEST REPORT CHANGES.....	74



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

1. Customer Information

Applicant: Icom Incorporated
Address: 1-1-32 Kamininami, Hirano-Ku
Osaka, 547-0003, Japan

1.1 Test Result Summary

The following test procedure was used ANSI C63.4-2014. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

Clauses	Description of the Requirements	Result (Pass, Fail or N/A)
Applicable Clauses from FCC 15 B		
15.107	Conducted Emission Limits	Pass
15.111 (a)	Receiver Conducted Power	N/A
15.121	38 dB Rejection	N/A
15.109	Radiated Emission Limits	Pass



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

2. Location of Testing

2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA"). Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780

FCC Designation # US1070

FCC site registration is under A2LA certificate # 0955.01

ISED Canada test site registration # 2056A

EU Notified Body # 1177

For all designations see A2LA scope # 0955.01

2.2 Testing was performed, reviewed by

Dates of Testing: 2/17/2023 – 2/20/2023

Signature:

Sr. EMC Engineer
EMC-003838-NE



Name & Title:

Tim Royer, EMC Engineer

Date of Signature

3/10/2023

Signature:

Name & Title:

Kristoffer Costa, EMC Technician

Date of Signature

3/10/2023



3. Test Sample(s) (EUT/DUT)

The test sample was received: 2/16/2023

3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	AFJ325010
Brief Description	Scanning Receiver
Model(s) #	IC-R6
Firmware version	N/A
Software version	N/A
Serial Number	N/A

Technical Characteristics	
Frequency Range	0.10 - 823.995 MHz 851.0 - 866.995 MHz 896.0 - 1309.995 MHz
RF O/P Power (Max.)	140 mA
Number of Channels	Variable
Duty Cycle	100%
Antenna Connector	SMA
Voltage Rating (AC or Batt.)	Battery



3.2 Configuration of EUT

Band (MHz)	Mode	Number of Ant.
0.100- 1309.995 MHz	Receive	1

Operating conditions during Testing:

No modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT).

Peripherals used during Testing:

No peripherals used.

3.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power-line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.



4. Test methods & Applicable Regulatory Limits

4.1 Test methods/Standards/Guidance

The measurement was performed as per ANSI 63.4. Full test results are available in this report.

Limits and Regulatory Limits:

- 1) FCC 15B

5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
Note: The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

6. Environmental Conditions

Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Parameter	Measurement
Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barometric Pressure	30.05 in Hg
Note: Specific environmental conditions that are applicable to a specific test are available in the test result section.	



7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer's model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

List of Test Equipment

Test Equipment						
Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Antenna	Biconical 1057	Eaton	94455-1	1057	10/16/20	10/16/2023
Antenna, NSA	Log-Periodic 1243	Eaton	96005	1243	5/4/21	5/3/2024
Antenna	Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	2/25/20	2/24/2023
CHAMBER	CHAMBER	Panashield	3M	N/A	3/12/19	12/21/2023
Pre-amp	Pre-amp	RF-LAMBDA	RLNA00M45GA	NA	2/27/19	7/26/2025
Receiver	EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	5/27/21	5/26/2024
Receiver	EMI Test Receiver R&S ESW44	Rohde & Schwarz	ESW44	103049	10/13/21	10/12/2024
LISN	LISN (Primary)	Electro-Metrics	ANS-25/2	225363	9/16/20	9/16/2023



8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Units of measurement

Unless noted otherwise in the referenced standard, the measurements of ac power-line conducted emissions and conducted power output will be reported in units of dB μ V. Unless noted otherwise in the referenced standard, the measurements of radiated emissions will be reported in units of decibels, referenced to one microvolt per meter (dB μ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB μ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

Example:


Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dB μ V	+ 10.36 dB/m	+0.40 dB	=30.36 dB μ V/m @ 3m

$$\text{EIRP} = \text{Pcond (dBm)} + \text{dBi}$$


8.1 Radiated Emissions

Limits from FCC 15.109 and test procedure from ANSI C63.4-2014.

Radiated Test Setup, 30 – 1000 MHz

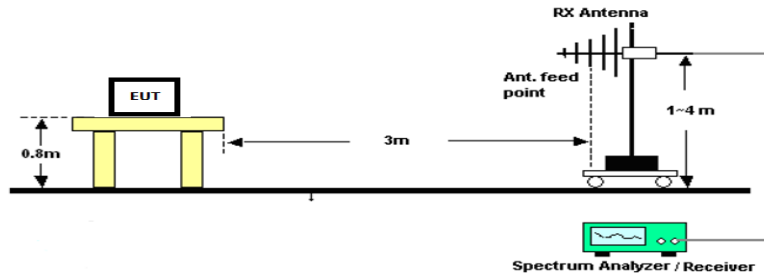


Radiated Test Setup, Above 1000 MHz

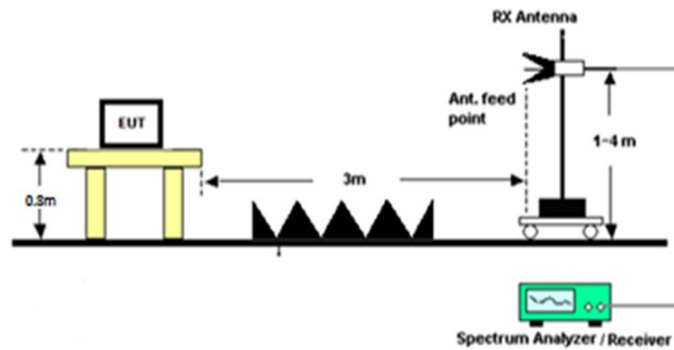



8.1.1 Scanning Receiver Function, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Plot

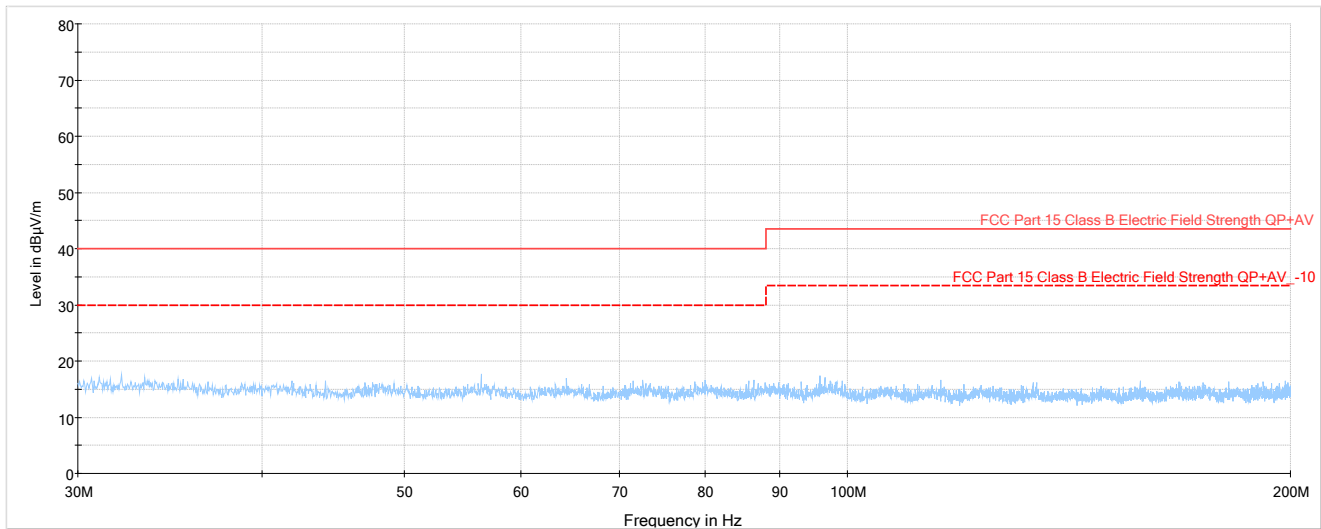



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.2 Scanning Receiver Function, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Table


Test

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---	---	---	---	



8.1.3 Scanning Receiver Function, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Plot

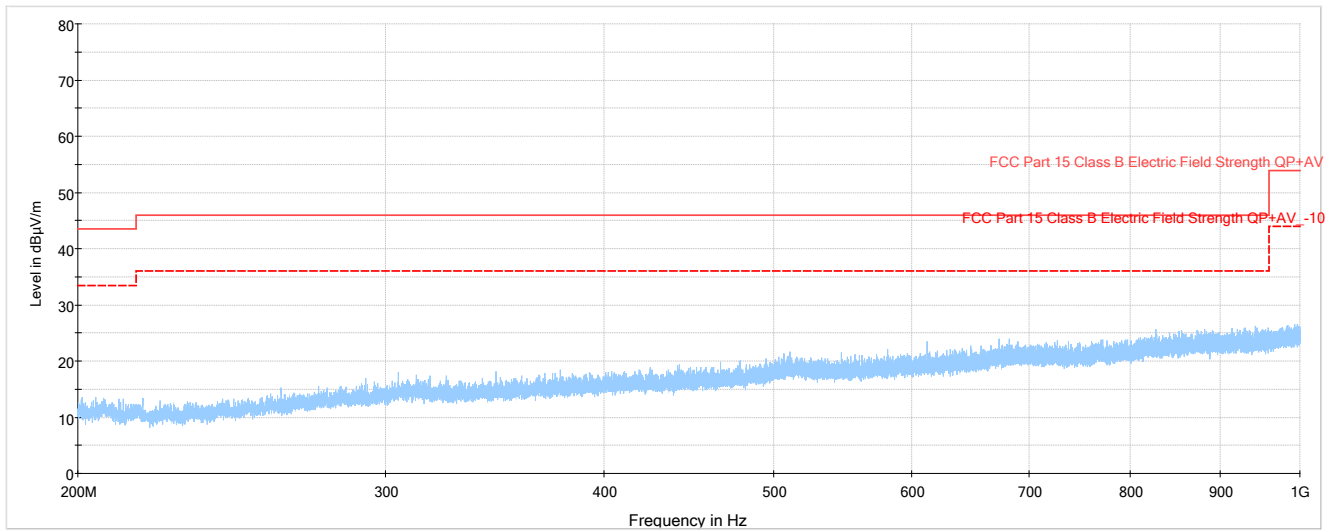



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.4 Scanning Receiver Function, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Table

Test


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---	---	---	---	



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.5 Scanning Receiver Function, above 1000 MHz, Horizontal/ Vertical Polarity Plot

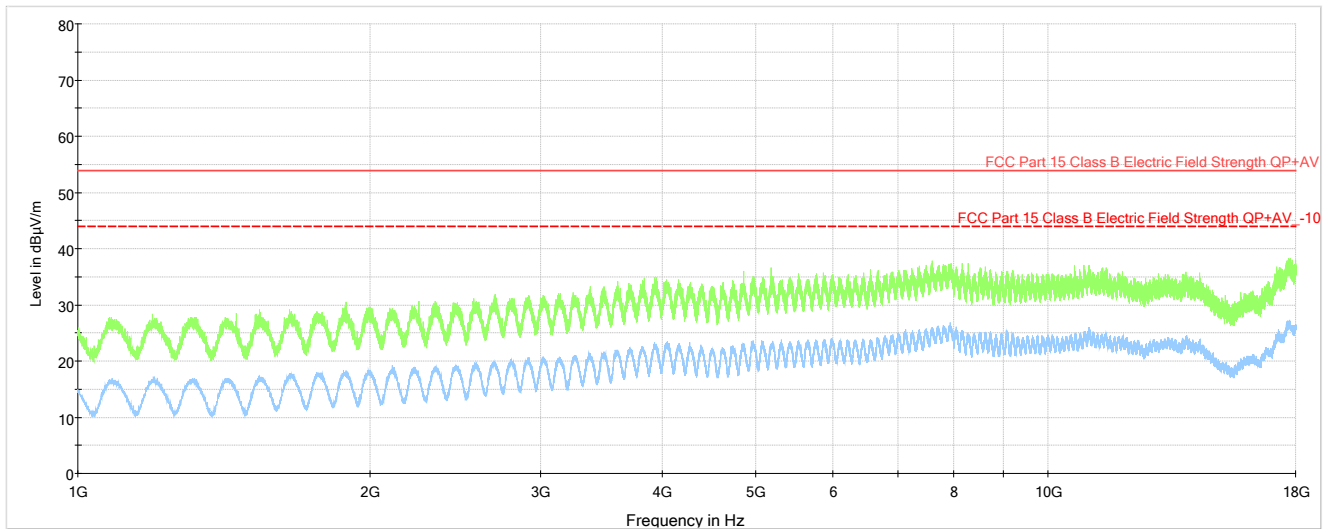



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.6 Scanning Receiver Function, above 1000 MHz, Horizontal/ Vertical Polarity Table

Test


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---	---	---	---	



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.7 51 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Plot

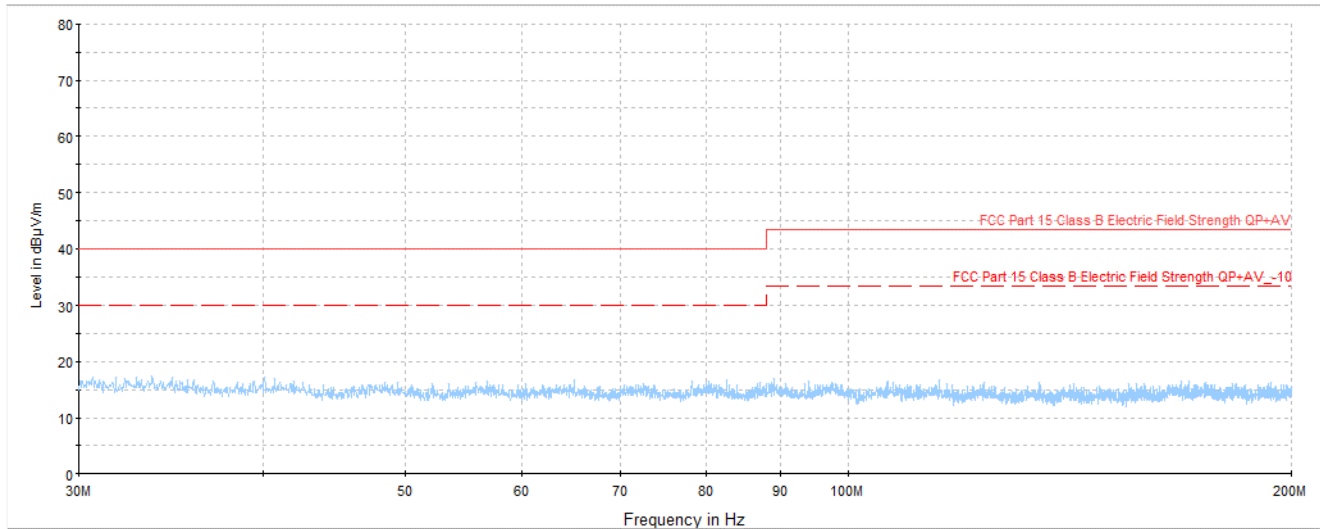



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.8 51 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Table


Test

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---		---	---	



8.1.9 51 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Plot

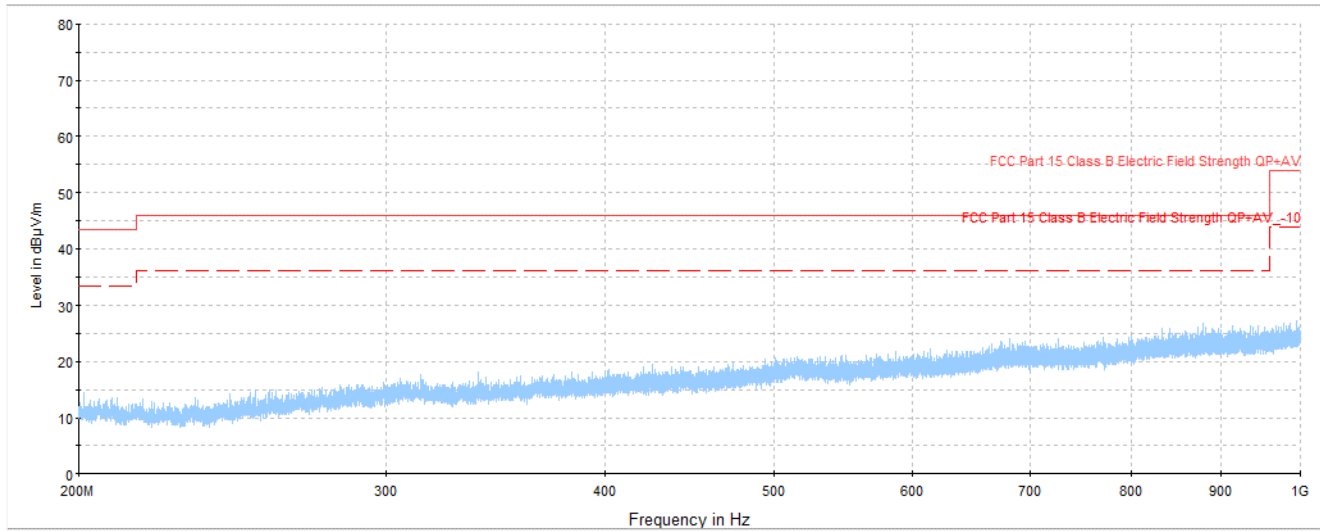



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.10 51 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Table

Test


Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---		---	---	



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.11 51 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Plot

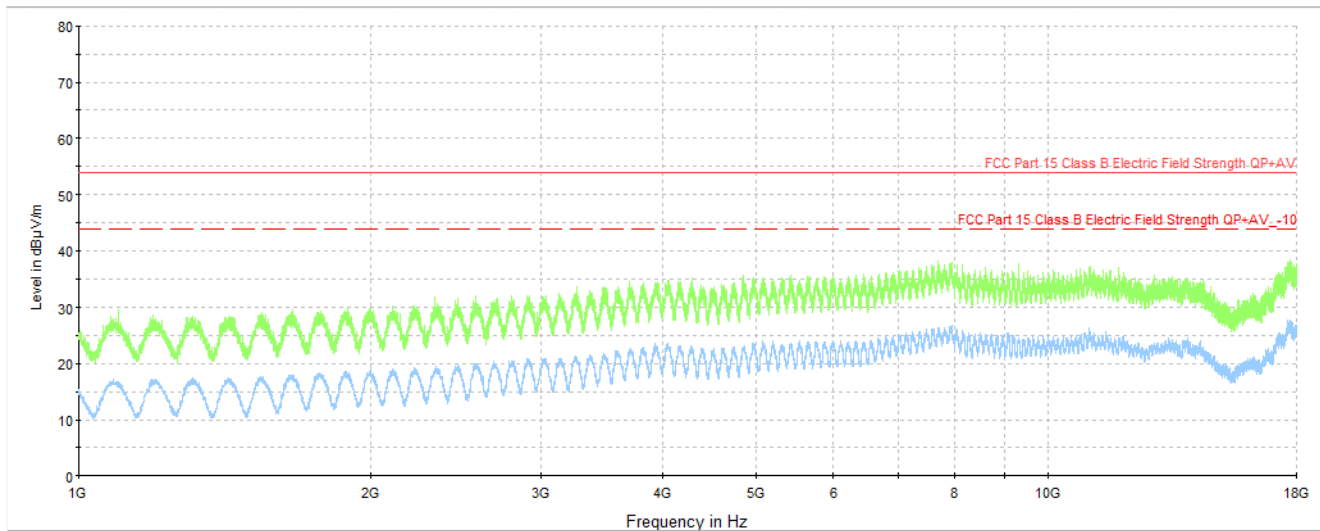



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.12 51 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Table


Test

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---		---	---	



8.1.13 136 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Plot

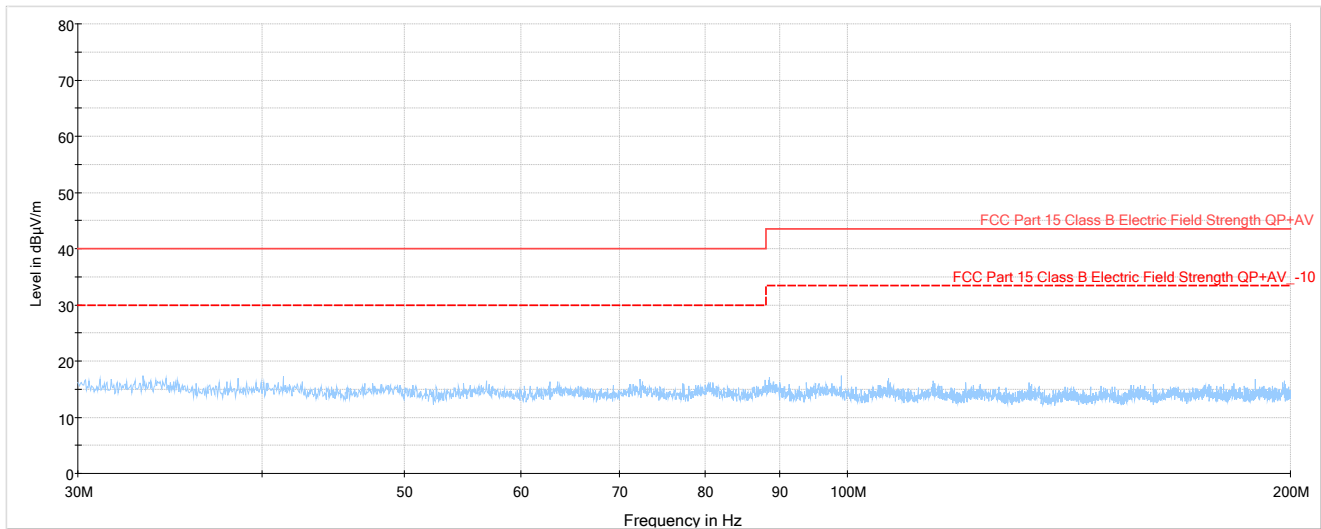



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.14 136 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Table


Test

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---		---	---	



8.1.15 136 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Plot

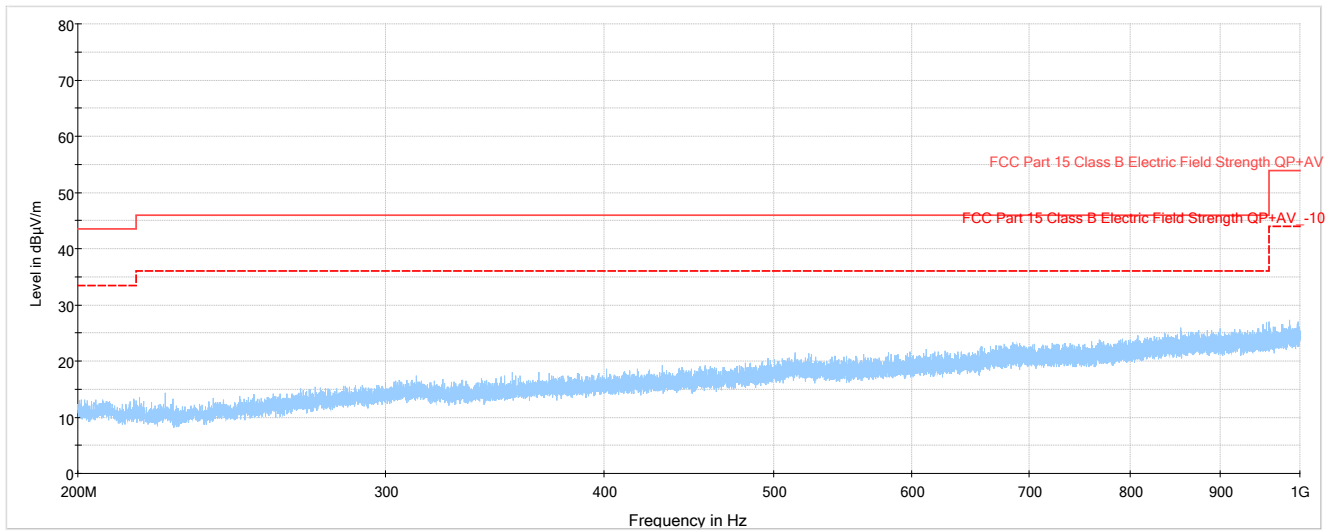



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.16 136 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Table

Test


Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---		---	---	



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.17 136 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Plot

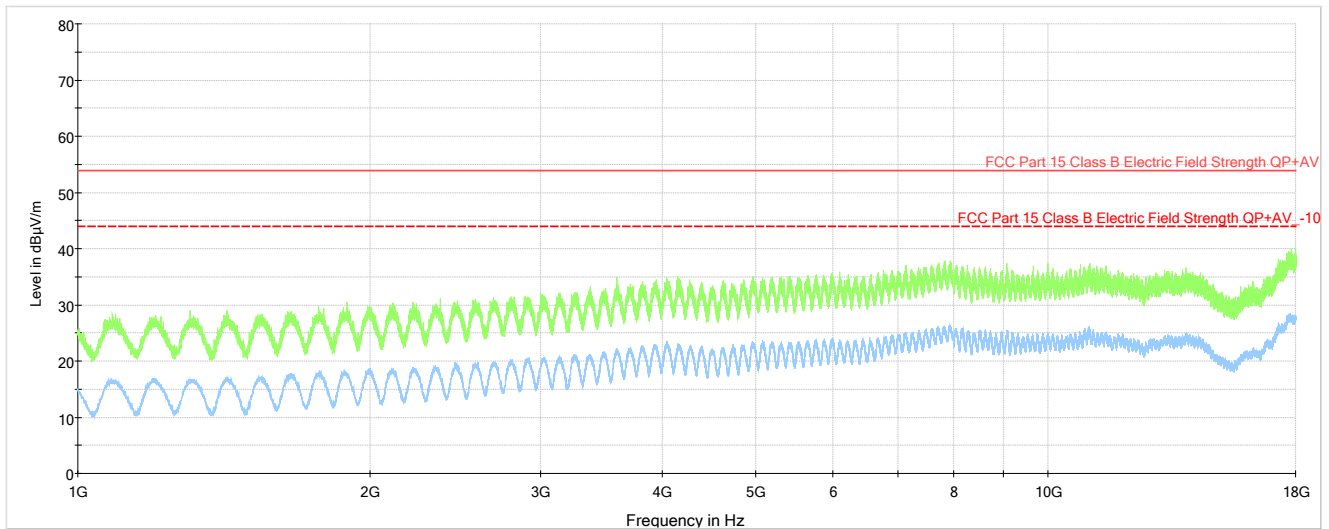



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.18 136 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Table


Test

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---	---	---	---	



8.1.19 381.3 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Plot

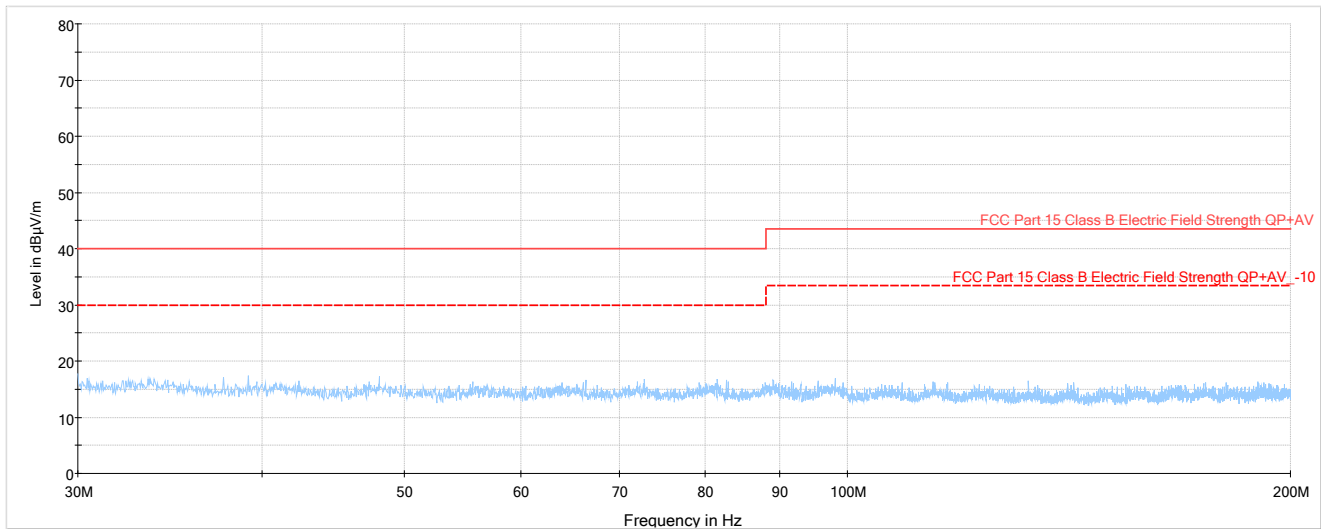



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.20 381.3 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Table


Test

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---	---	---	---	



8.1.21 381.3 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Plot

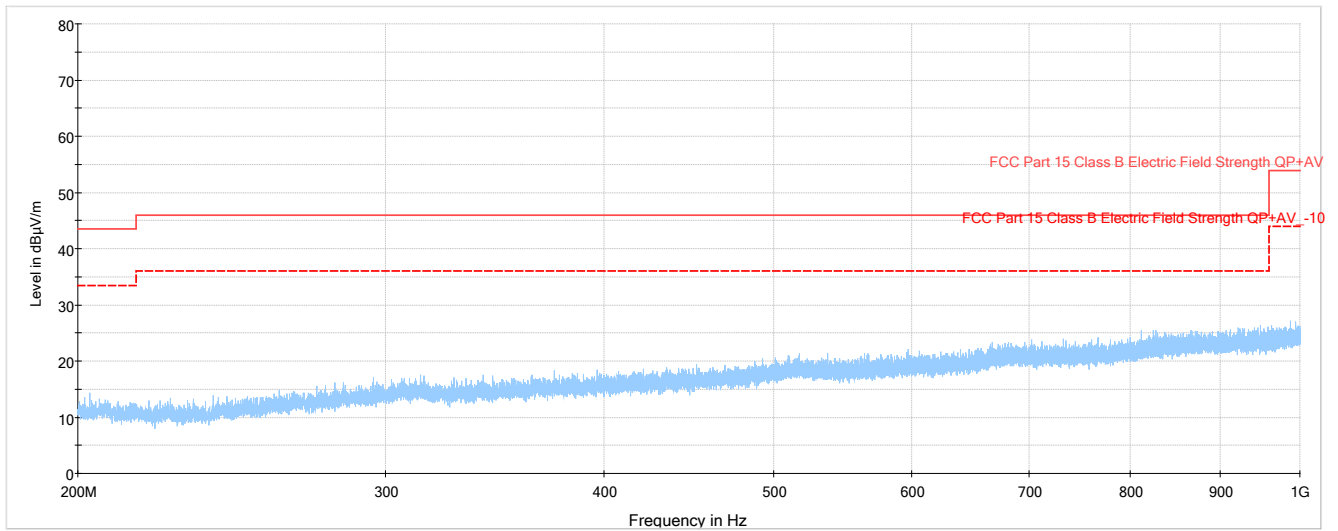



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.22 381.3 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Table


Test

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---		---	---	



8.1.23 381.3 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Plot

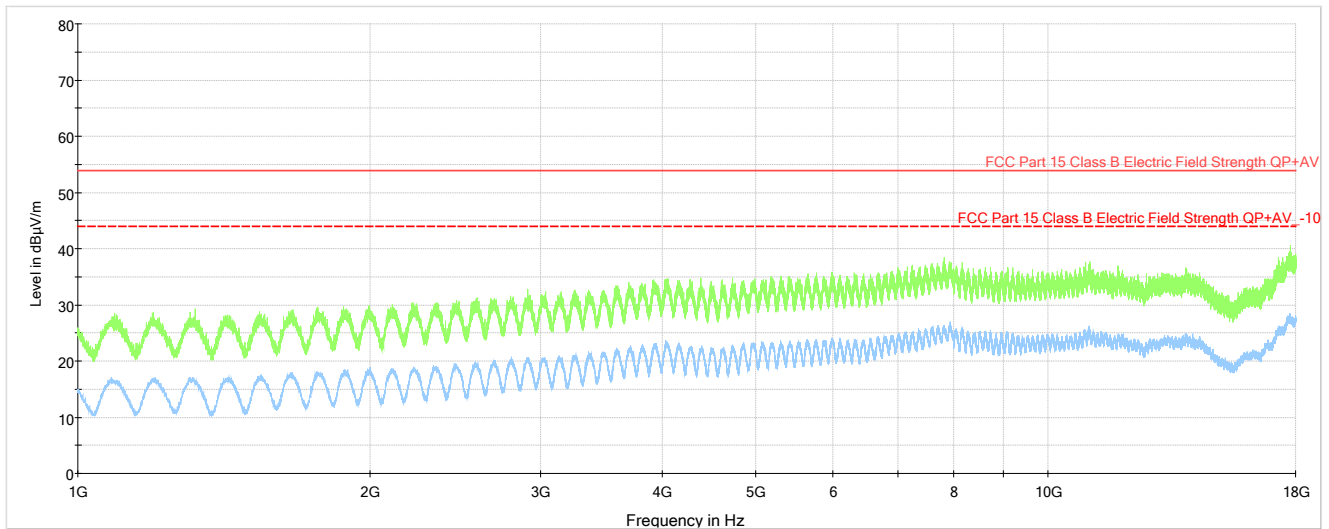



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.24 381.3 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Table


Test

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---		---	---	



8.1.25 685.5 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Plot

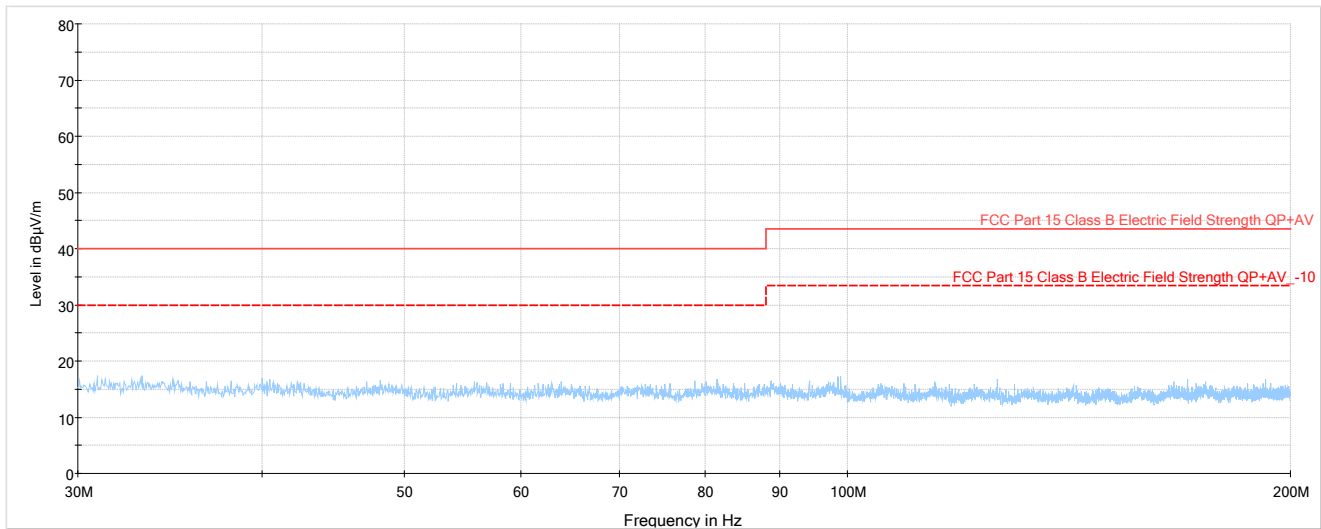



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.26 685.5 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Table


Test

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---		---	---	



8.1.27 685.5 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Plot

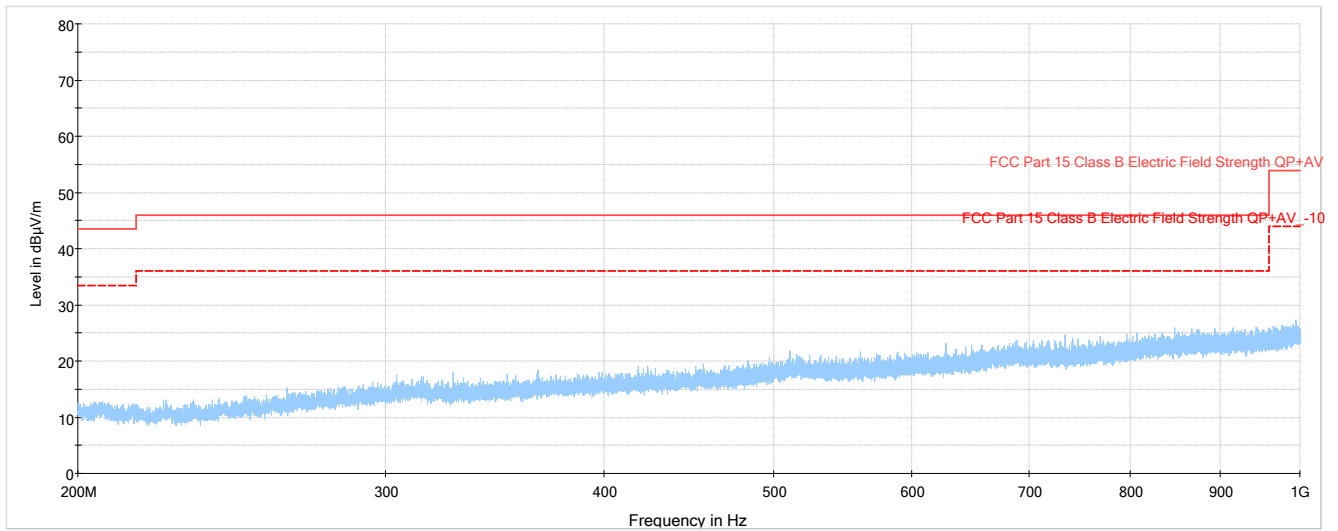



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.28 685.5 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Table

Test


Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---		---	---	



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.29 685.5 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Plot

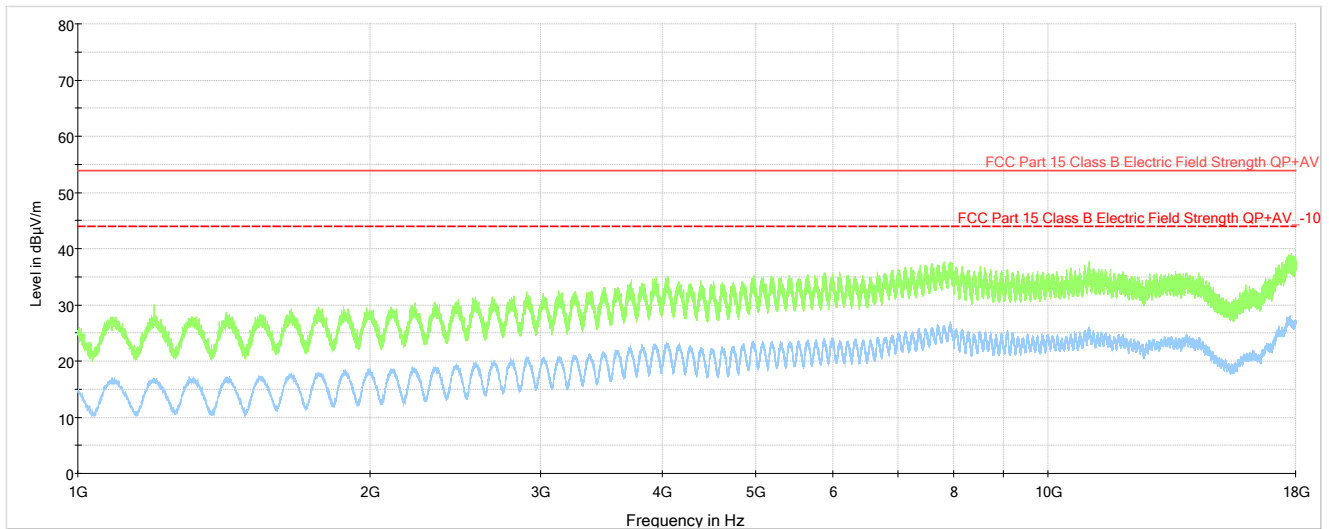



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.30 685.5 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Table

Test


Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---		---	---	



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.31 1211.28 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Plot

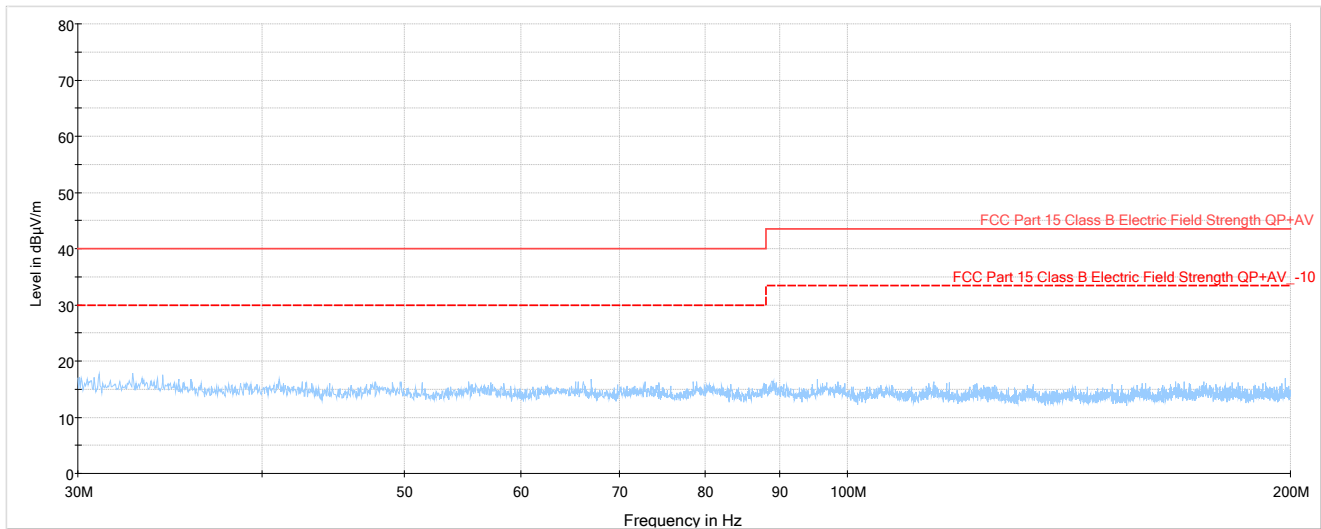



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.32 1211.28 MHz, 30 MHz to 200 MHz, Horizontal/ Vertical Polarity Table

Test


Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---	---	---	---	



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.33 1211.28 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Plot

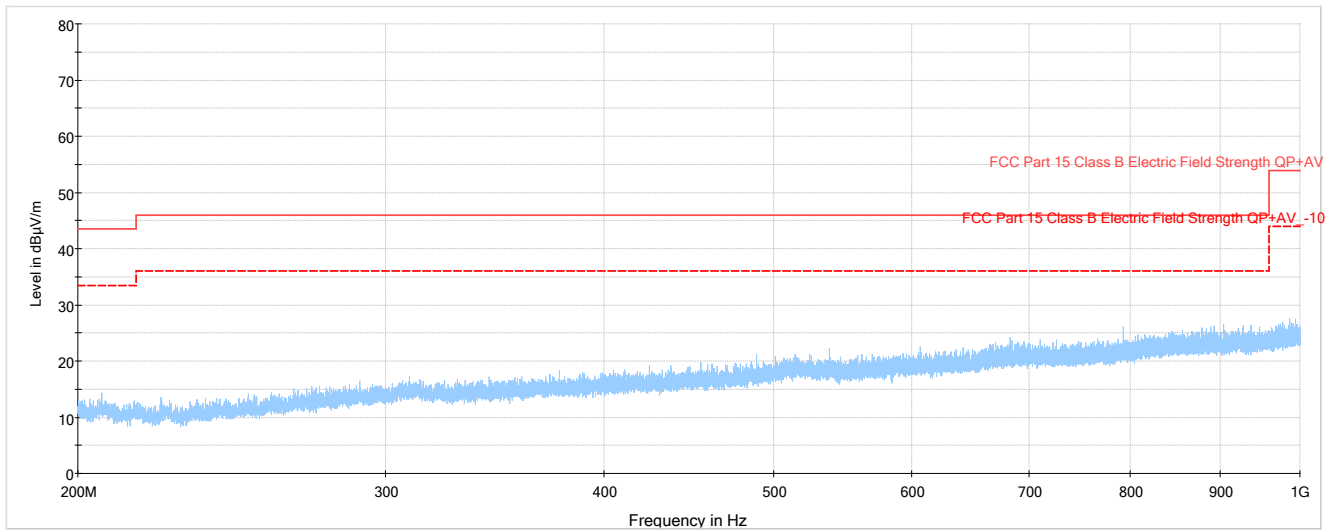



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.34 1211.28 MHz, 200 MHz to 1000 MHz, Horizontal/ Vertical Polarity Table

Test


Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---		---	---	



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.35 1211.28 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Plot

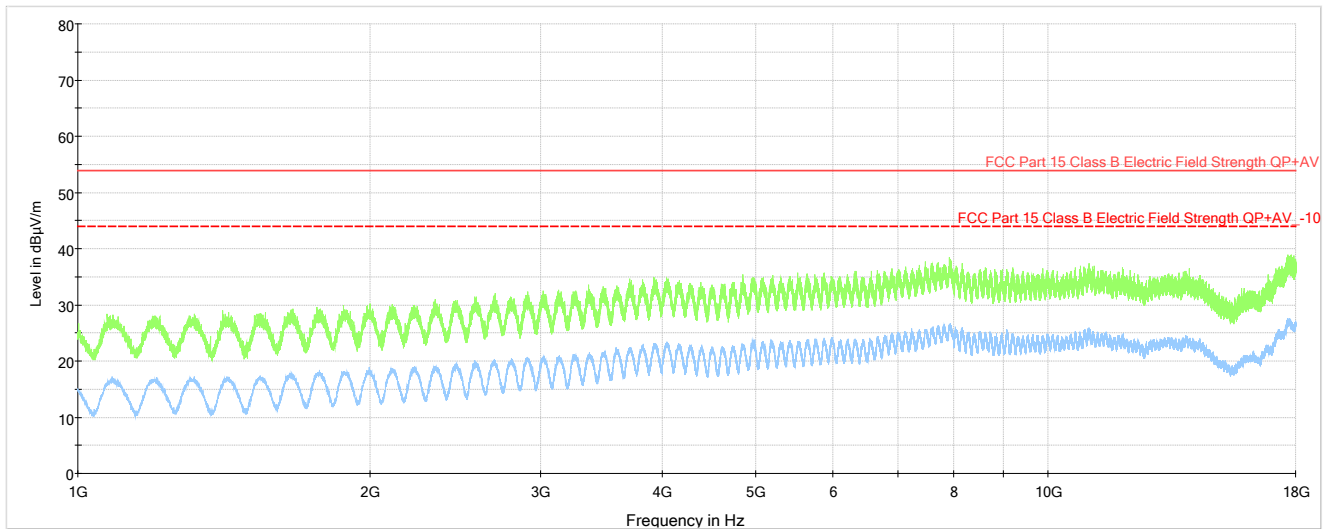



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.1.36 1211.28 MHz, above 1000 MHz, Horizontal/ Vertical Polarity Table


Test

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---		---	---	

8.2 Conducted Emissions

Limits from FCC 15.107 and test procedure from ANSI C63.4-2014.

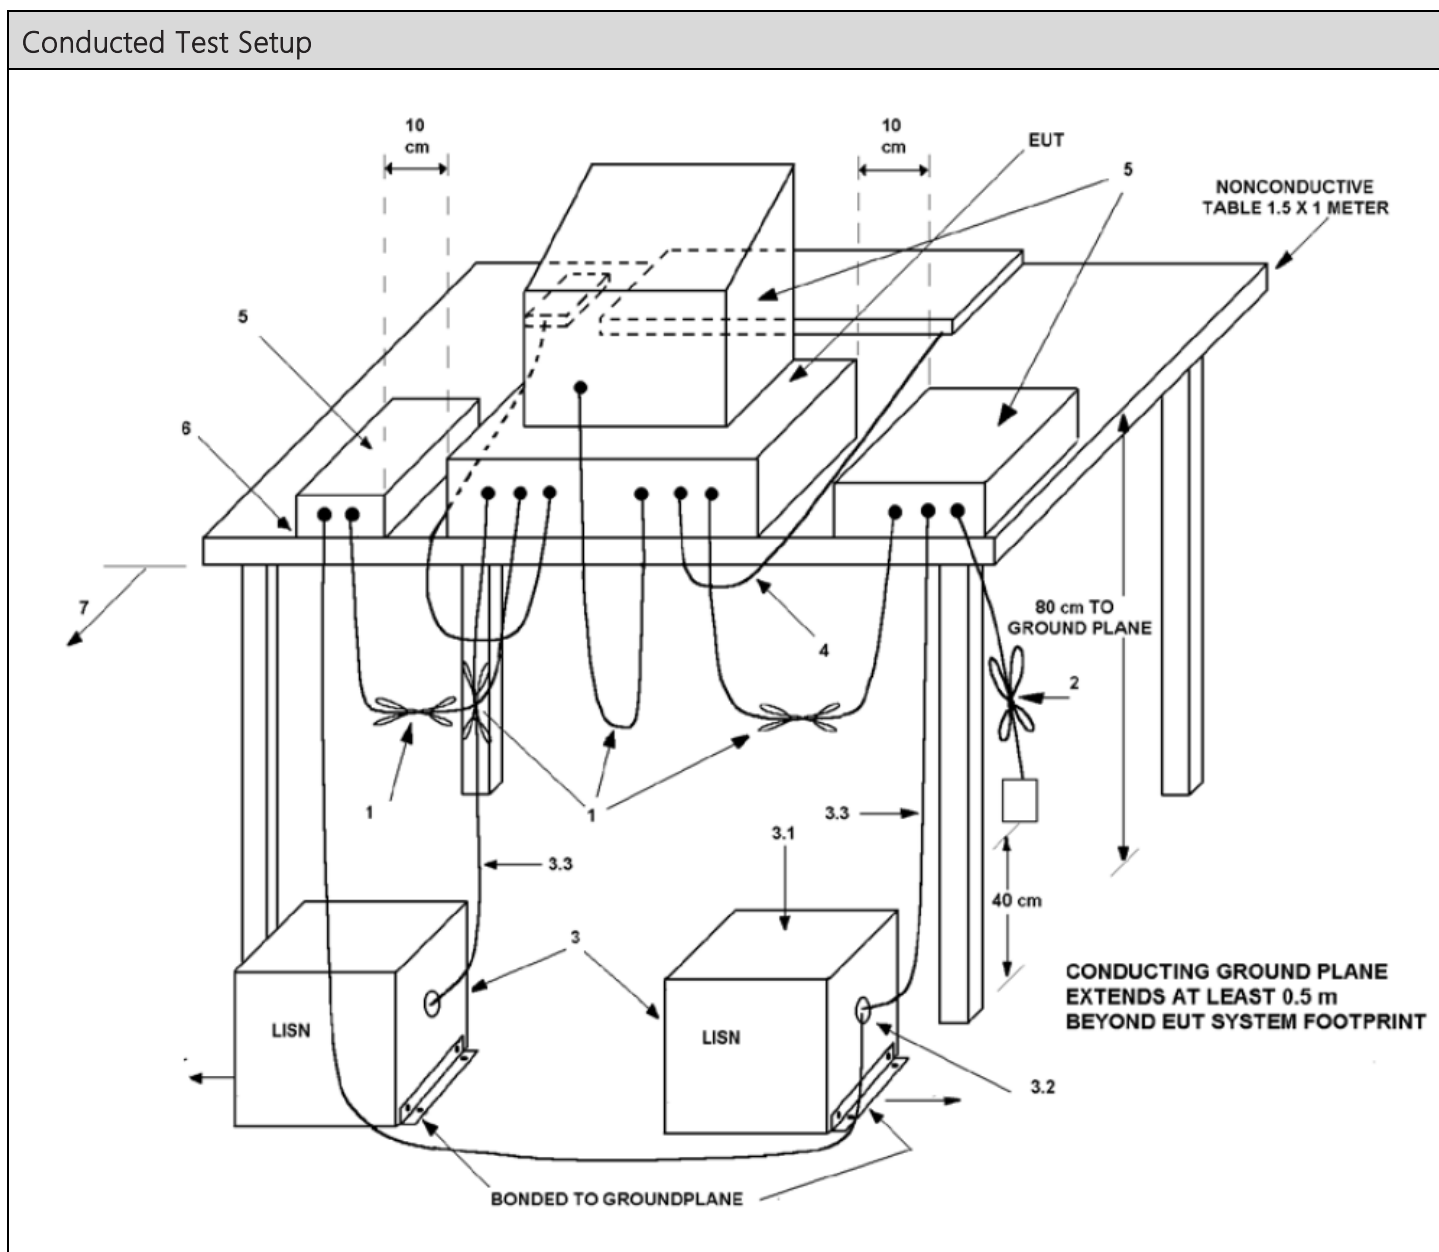




8.2.1 Scanning, Line 1 Plot

20.Feb 23 11:26

Stepped Scan (1 Range)

Scan Start: 150 kHz
Scan Stop: 30 MHz
Detector: Trace 1: MAX PEAK Trace 2: Average
Transducer: tdf_20

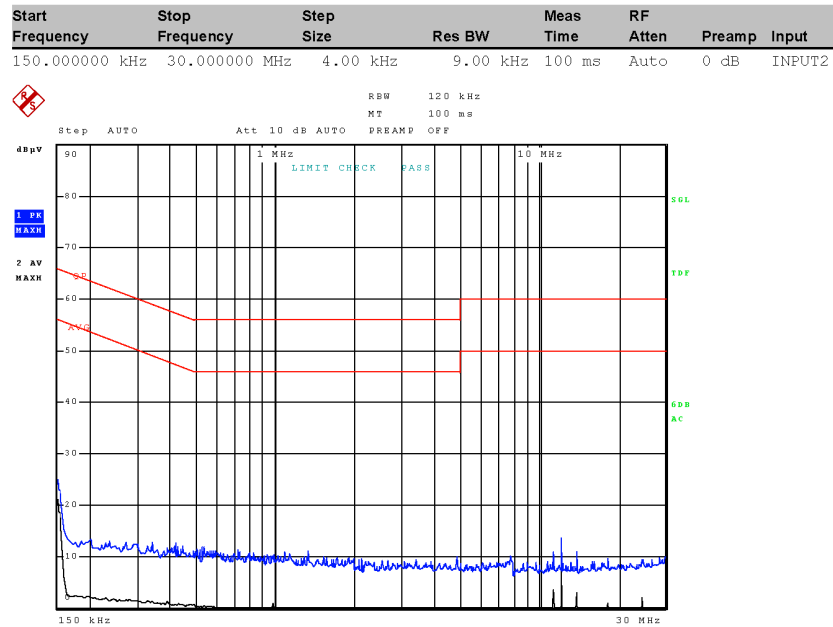

Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 0



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.2.2 Scanning, Line 1 Table

20.Feb 23 11:26

Transducer Table

Name: tdf_20
Interpolation: LIN
Comment: ANS 25/2 Primary LISN IL Line 1 + Coax Cable IL

Frequency	Factor (dB)
150.00 kHz	0.19
170.00 kHz	0.17
200.00 kHz	0.16
250.00 kHz	0.13
300.00 kHz	0.12
350.00 kHz	0.12
400.00 kHz	0.11
500.00 kHz	0.12
600.00 kHz	0.12
700.00 kHz	0.11
800.00 kHz	0.13
900.00 kHz	0.12
1.00 MHz	0.21
1.20 MHz	0.22
1.50 MHz	0.28
2.00 MHz	0.37
2.50 MHz	0.41
3.00 MHz	0.59
4.00 MHz	0.40
5.00 MHz	0.47
7.00 MHz	0.63
10.00 MHz	0.88
15.00 MHz	1.08
20.00 MHz	1.01
30.00 MHz	1.80

Page 2 of 2




8.2.3 Scanning, Line 2 Plot

20.Feb 23 11:40

Stepped Scan (1 Range)

Scan Start: 150 kHz
Scan Stop: 30 MHz
Detector: Trace 1: MAX PEAK Trace 2: Average
Transducer: tdf_20

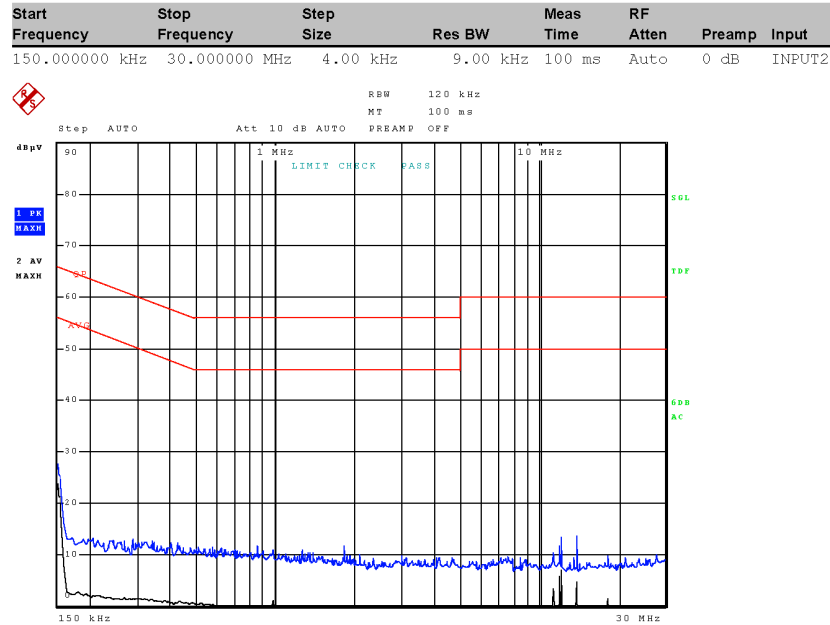

Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 0



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.2.4 Scanning, Line 2 Table

20.Feb 23 11:40

Transducer Table

Name: tdf_20
Interpolation: LIN
Comment: ANS 25/2 Primary LISN IL Line 1 + Coax Cable IL

Frequency	Factor (dB)
150.00 kHz	0.19
170.00 kHz	0.17
200.00 kHz	0.16
250.00 kHz	0.13
300.00 kHz	0.12
350.00 kHz	0.12
400.00 kHz	0.11
500.00 kHz	0.12
600.00 kHz	0.12
700.00 kHz	0.11
800.00 kHz	0.13
900.00 kHz	0.12
1.00 MHz	0.21
1.20 MHz	0.22
1.50 MHz	0.28
2.00 MHz	0.37
2.50 MHz	0.41
3.00 MHz	0.59
4.00 MHz	0.40
5.00 MHz	0.47
7.00 MHz	0.63
10.00 MHz	0.88
15.00 MHz	1.08
20.00 MHz	1.01
30.00 MHz	1.80

Page 2 of 2




8.2.5 51 MHz, Line 1 Plot

20.Feb 23 08:27

Stepped Scan (1 Range)

Scan Start: 150 kHz
Scan Stop: 30 MHz
Detector: Trace 1: MAX PEAK Trace 2: Average
Transducer: tdf_20

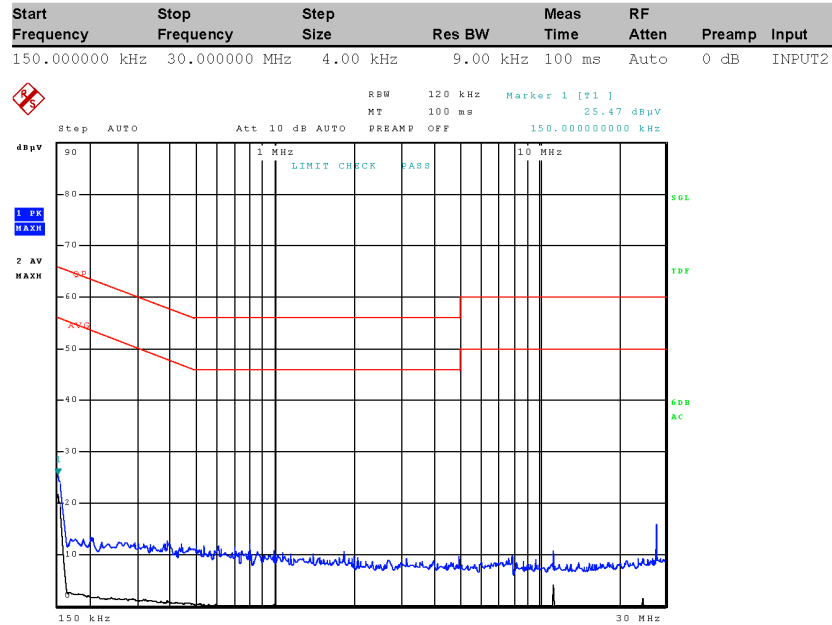

Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 0



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.2.6 51 MHz, Line 1 Table

20.Feb 23 08:27

Transducer Table

Name: tdf_20
Interpolation: LIN
Comment: ANS 25/2 Primary LISN IL Line 1 + Coax Cable IL

Frequency	Factor (dB)
150.00 kHz	0.19
170.00 kHz	0.17
200.00 kHz	0.16
250.00 kHz	0.13
300.00 kHz	0.12
350.00 kHz	0.12
400.00 kHz	0.11
500.00 kHz	0.12
600.00 kHz	0.12
700.00 kHz	0.11
800.00 kHz	0.13
900.00 kHz	0.12
1.00 MHz	0.21
1.20 MHz	0.22
1.50 MHz	0.28
2.00 MHz	0.37
2.50 MHz	0.41
3.00 MHz	0.59
4.00 MHz	0.40
5.00 MHz	0.47
7.00 MHz	0.63
10.00 MHz	0.88
15.00 MHz	1.08
20.00 MHz	1.01
30.00 MHz	1.80

Page 2 of 2




8.2.7 51 MHz, Line 2 Plot

20.Feb 23 08:44

Stepped Scan (1 Range)

Scan Start: 150 kHz
Scan Stop: 30 MHz
Detector: Trace 1: MAX PEAK Trace 2: Average
Transducer: tdf_20

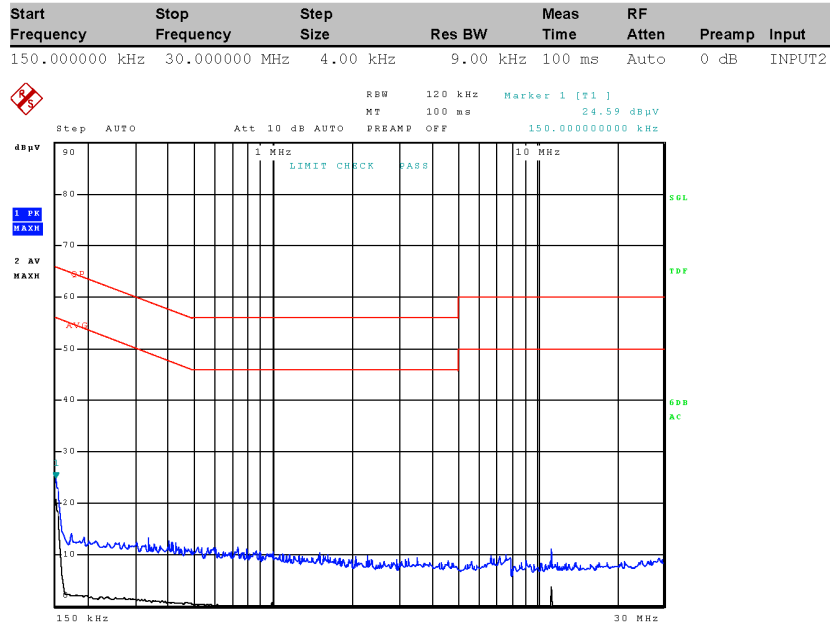

Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 0



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.2.8 51 MHz, Line 2 Table

20.Feb 23 08:44

Transducer Table

Name: tdf_20
Interpolation: LIN
Comment: ANS 25/2 Primary LISN IL Line 1 + Coax Cable IL

Frequency	Factor (dB)
150.00 kHz	0.19
170.00 kHz	0.17
200.00 kHz	0.16
250.00 kHz	0.13
300.00 kHz	0.12
350.00 kHz	0.12
400.00 kHz	0.11
500.00 kHz	0.12
600.00 kHz	0.12
700.00 kHz	0.11
800.00 kHz	0.13
900.00 kHz	0.12
1.00 MHz	0.21
1.20 MHz	0.22
1.50 MHz	0.28
2.00 MHz	0.37
2.50 MHz	0.41
3.00 MHz	0.59
4.00 MHz	0.40
5.00 MHz	0.47
7.00 MHz	0.63
10.00 MHz	0.88
15.00 MHz	1.08
20.00 MHz	1.01
30.00 MHz	1.80

Page 2 of 2




8.2.9 136 MHz, Line 1 Plot

20.Feb 23 09:10

Stepped Scan (1 Range)

Scan Start: 150 kHz
Scan Stop: 30 MHz
Detector: Trace 1: MAX PEAK Trace 2: Average
Transducer: tdf_20

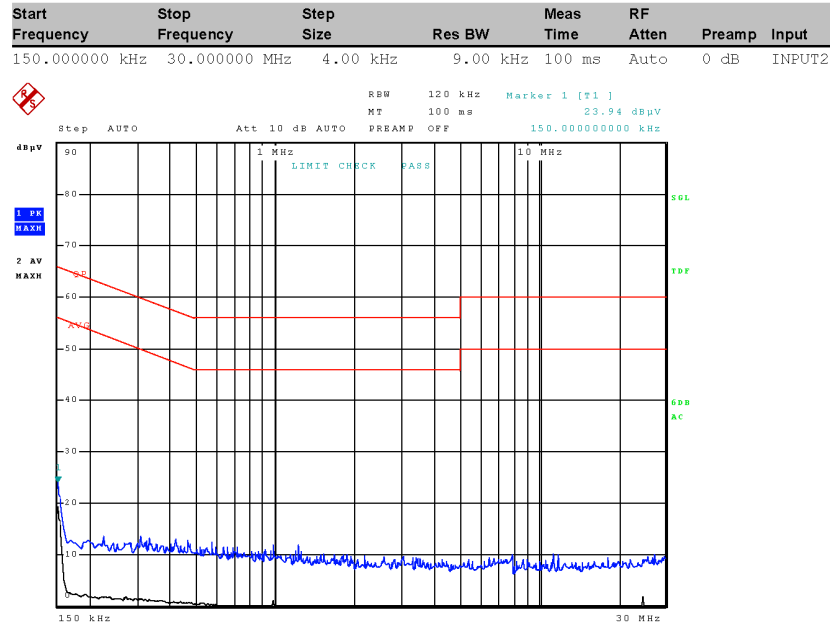

Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 0



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.2.10 136 MHz, Line 1 Table

20.Feb 23 09:10

Transducer Table

Name: tdf_20
Interpolation: LIN
Comment: ANS 25/2 Primary LISN IL Line 1 + Coax Cable IL

Frequency	Factor (dB)
150.00 kHz	0.19
170.00 kHz	0.17
200.00 kHz	0.16
250.00 kHz	0.13
300.00 kHz	0.12
350.00 kHz	0.12
400.00 kHz	0.11
500.00 kHz	0.12
600.00 kHz	0.12
700.00 kHz	0.11
800.00 kHz	0.13
900.00 kHz	0.12
1.00 MHz	0.21
1.20 MHz	0.22
1.50 MHz	0.28
2.00 MHz	0.37
2.50 MHz	0.41
3.00 MHz	0.59
4.00 MHz	0.40
5.00 MHz	0.47
7.00 MHz	0.63
10.00 MHz	0.88
15.00 MHz	1.08
20.00 MHz	1.01
30.00 MHz	1.80

Page 2 of 2




8.2.11 136 MHz, Line 2 Plot

20.Feb 23 09:24

Stepped Scan (1 Range)

Scan Start: 150 kHz
Scan Stop: 30 MHz
Detector: Trace 1: MAX PEAK Trace 2: Average
Transducer: tdf_20

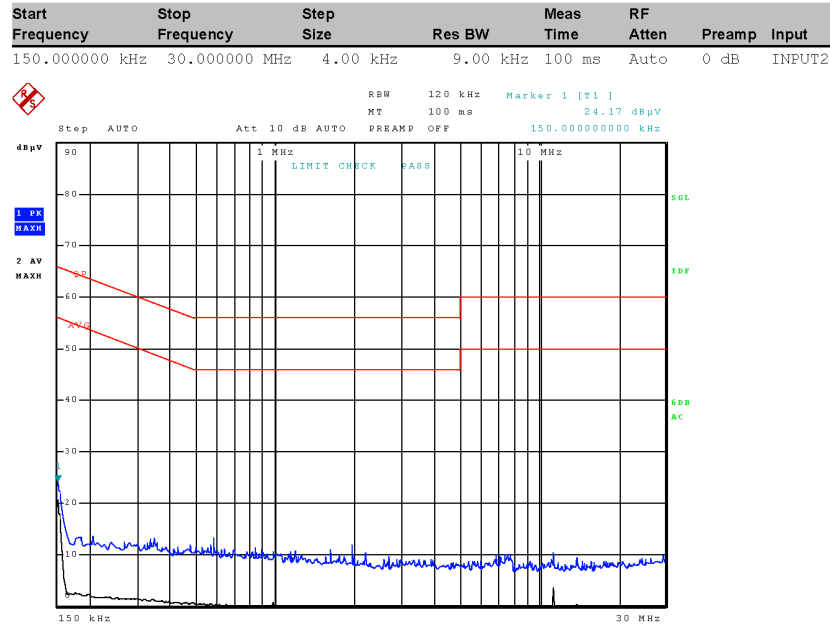

Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 0



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.2.12 136 MHz, Line 2 Table

20.Feb 23 09:24

Transducer Table

Name: tdf_20
Interpolation: LIN
Comment: ANS 25/2 Primary LISN IL Line 1 + Coax Cable IL

Frequency	Factor (dB)
150.00 kHz	0.19
170.00 kHz	0.17
200.00 kHz	0.16
250.00 kHz	0.13
300.00 kHz	0.12
350.00 kHz	0.12
400.00 kHz	0.11
500.00 kHz	0.12
600.00 kHz	0.12
700.00 kHz	0.11
800.00 kHz	0.13
900.00 kHz	0.12
1.00 MHz	0.21
1.20 MHz	0.22
1.50 MHz	0.28
2.00 MHz	0.37
2.50 MHz	0.41
3.00 MHz	0.59
4.00 MHz	0.40
5.00 MHz	0.47
7.00 MHz	0.63
10.00 MHz	0.88
15.00 MHz	1.08
20.00 MHz	1.01
30.00 MHz	1.80

Page 2 of 2




8.2.13 381.3MHz, Line 1 Plot

20.Feb 23 09:38

Stepped Scan (1 Range)

Scan Start: 150 kHz
Scan Stop: 30 MHz
Detector: Trace 1: MAX PEAK Trace 2: Average
Transducer: tdf_20

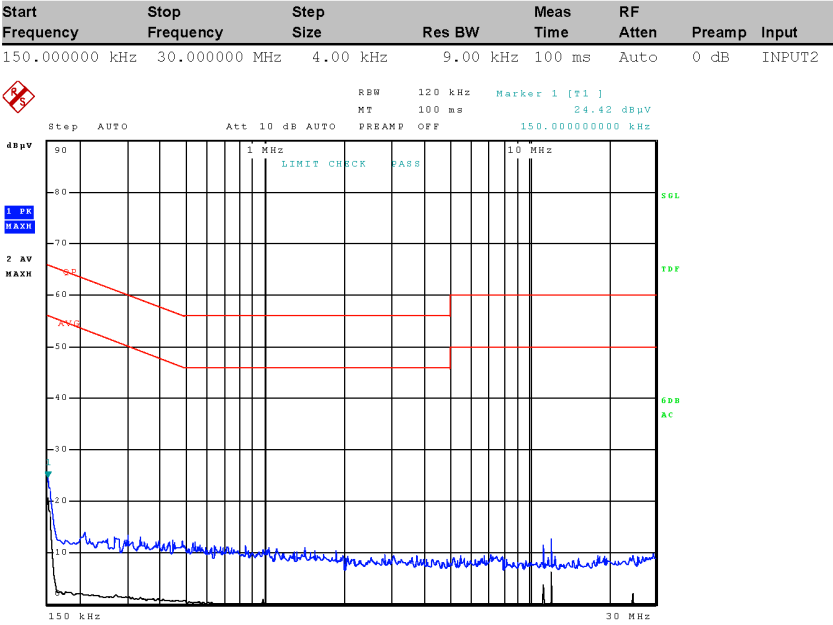

Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 0



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.2.14 381.3 MHz, Line 1 Table

20.Feb 23 09:38

Transducer Table

Name: tdf_20
Interpolation: LIN
Comment: ANS 25/2 Primary LISN IL Line 1 + Coax Cable IL

Frequency	Factor (dB)
150.00 kHz	0.19
170.00 kHz	0.17
200.00 kHz	0.16
250.00 kHz	0.13
300.00 kHz	0.12
350.00 kHz	0.12
400.00 kHz	0.11
500.00 kHz	0.12
600.00 kHz	0.12
700.00 kHz	0.11
800.00 kHz	0.13
900.00 kHz	0.12
1.00 MHz	0.21
1.20 MHz	0.22
1.50 MHz	0.28
2.00 MHz	0.37
2.50 MHz	0.41
3.00 MHz	0.59
4.00 MHz	0.40
5.00 MHz	0.47
7.00 MHz	0.63
10.00 MHz	0.88
15.00 MHz	1.08
20.00 MHz	1.01
30.00 MHz	1.80

Page 2 of 2




8.2.15 381.3 MHz, Line 2 Plot

20.Feb 23 09:51

Stepped Scan (1 Range)

Scan Start: 150 kHz
Scan Stop: 30 MHz
Detector: Trace 1: MAX PEAK Trace 2: Average
Transducer: tdf_20

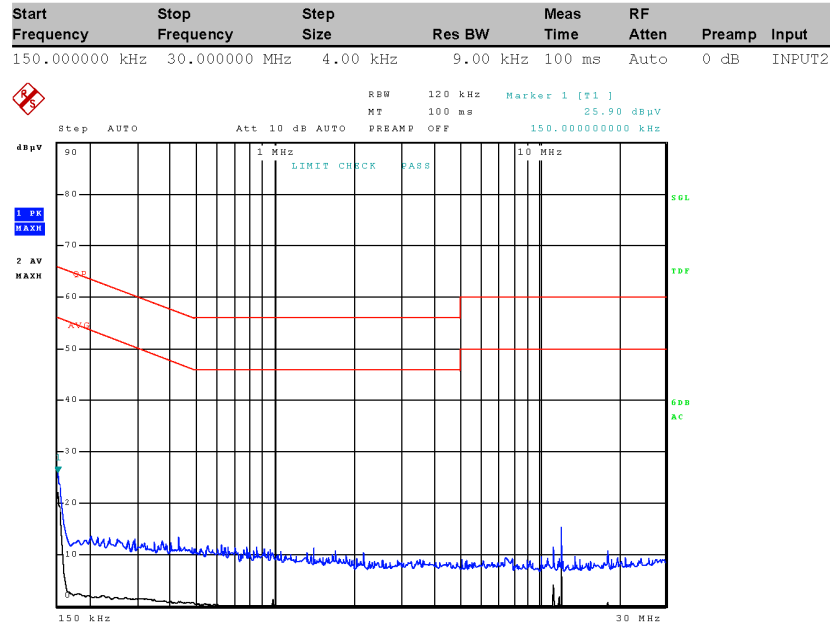

Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 0



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.2.16 381.3 MHz, Line 2 Table

20.Feb 23 09:51

Transducer Table

Name: tdf_20
Interpolation: LIN
Comment: ANS 25/2 Primary LISN IL Line 1 + Coax Cable IL

Frequency	Factor (dB)
150.00 kHz	0.19
170.00 kHz	0.17
200.00 kHz	0.16
250.00 kHz	0.13
300.00 kHz	0.12
350.00 kHz	0.12
400.00 kHz	0.11
500.00 kHz	0.12
600.00 kHz	0.12
700.00 kHz	0.11
800.00 kHz	0.13
900.00 kHz	0.12
1.00 MHz	0.21
1.20 MHz	0.22
1.50 MHz	0.28
2.00 MHz	0.37
2.50 MHz	0.41
3.00 MHz	0.59
4.00 MHz	0.40
5.00 MHz	0.47
7.00 MHz	0.63
10.00 MHz	0.88
15.00 MHz	1.08
20.00 MHz	1.01
30.00 MHz	1.80

Page 2 of 2




8.2.17 685.5 MHz, Line 1 Plot

20.Feb 23 10:09

Stepped Scan (1 Range)

Scan Start: 150 kHz
Scan Stop: 30 MHz
Detector: Trace 1: MAX PEAK Trace 2: Average
Transducer: tdf_20

Start Frequency	Stop Frequency	Step Size	Res BW	Meas Time	RF Atten	Preamp	Input
150.000000 kHz	30.000000 MHz	4.00 kHz	9.00 kHz	100 ms	Auto	0 dB	INPUT2

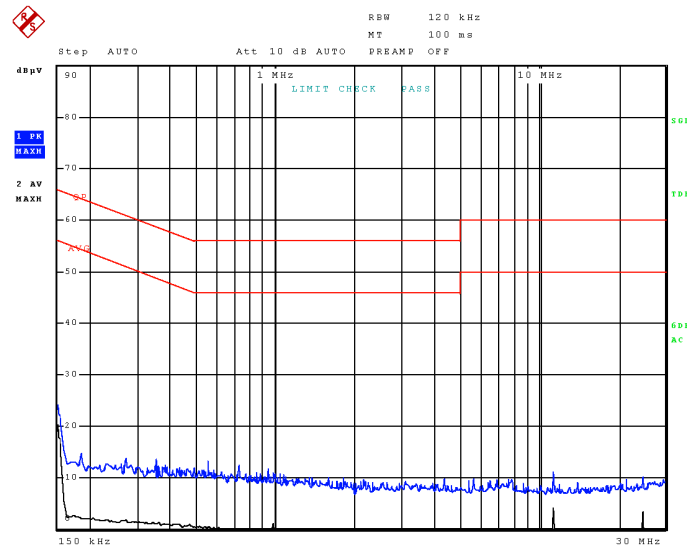

Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 0



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.2.18 685.5 MHz, Line 1 Table

20.Feb 23 10:09

Transducer Table

Name: tdf_20
Interpolation: LIN
Comment: ANS 25/2 Primary LISN IL Line 1 + Coax Cable IL

Frequency	Factor (dB)
150.00 kHz	0.19
170.00 kHz	0.17
200.00 kHz	0.16
250.00 kHz	0.13
300.00 kHz	0.12
350.00 kHz	0.12
400.00 kHz	0.11
500.00 kHz	0.12
600.00 kHz	0.12
700.00 kHz	0.11
800.00 kHz	0.13
900.00 kHz	0.12
1.00 MHz	0.21
1.20 MHz	0.22
1.50 MHz	0.28
2.00 MHz	0.37
2.50 MHz	0.41
3.00 MHz	0.59
4.00 MHz	0.40
5.00 MHz	0.47
7.00 MHz	0.63
10.00 MHz	0.88
15.00 MHz	1.08
20.00 MHz	1.01
30.00 MHz	1.80

Page 2 of 2




8.2.19 685.5 MHz, Line 2 Plot

20.Feb 23 10:23

Stepped Scan (1 Range)

Scan Start: 150 kHz
Scan Stop: 30 MHz
Detector: Trace 1: MAX PEAK Trace 2: Average
Transducer: tdf_20

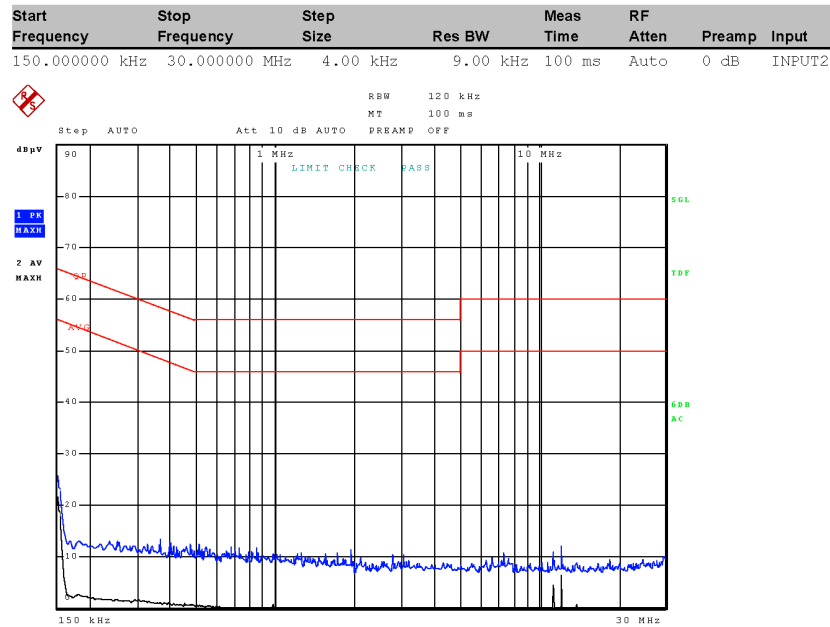

Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 0



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.2.20 685.5 MHz, Line 2 Table

20.Feb 23 10:23

Transducer Table

Name: tdf_20
Interpolation: LIN
Comment: ANS 25/2 Primary LISN IL Line 1 + Coax Cable IL

Frequency	Factor (dB)
150.00 kHz	0.19
170.00 kHz	0.17
200.00 kHz	0.16
250.00 kHz	0.13
300.00 kHz	0.12
350.00 kHz	0.12
400.00 kHz	0.11
500.00 kHz	0.12
600.00 kHz	0.12
700.00 kHz	0.11
800.00 kHz	0.13
900.00 kHz	0.12
1.00 MHz	0.21
1.20 MHz	0.22
1.50 MHz	0.28
2.00 MHz	0.37
2.50 MHz	0.41
3.00 MHz	0.59
4.00 MHz	0.40
5.00 MHz	0.47
7.00 MHz	0.63
10.00 MHz	0.88
15.00 MHz	1.08
20.00 MHz	1.01
30.00 MHz	1.80

Page 2 of 2




8.2.21 1211.28 MHz, Line 1 Plot

20.Feb 23 10:57

Stepped Scan (1 Range)

Scan Start: 150 kHz
Scan Stop: 30 MHz
Detector: Trace 1: MAX PEAK Trace 2: Average
Transducer: tdf_20

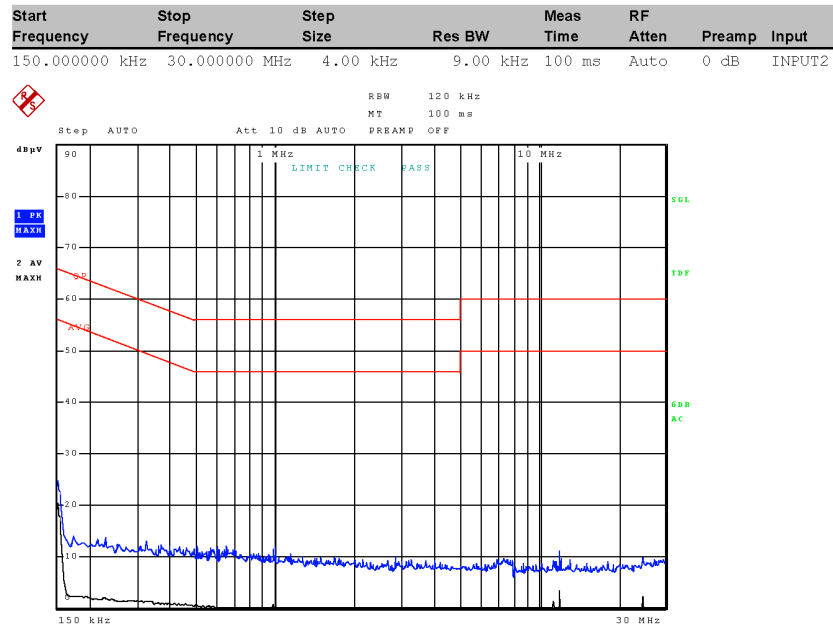

Final Measurement

Meas Time: 1 s
Margin: 20 dB
Subranges: 0



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.2.22 1211.28 MHz, Line 1 Table

20.Feb 23 10:57

Transducer Table

Name: tdf_20
Interpolation: LIN
Comment: ANS 25/2 Primary LISN IL Line 1 + Coax Cable IL

Frequency	Factor (dB)
150.00 kHz	0.19
170.00 kHz	0.17
200.00 kHz	0.16
250.00 kHz	0.13
300.00 kHz	0.12
350.00 kHz	0.12
400.00 kHz	0.11
500.00 kHz	0.12
600.00 kHz	0.12
700.00 kHz	0.11
800.00 kHz	0.13
900.00 kHz	0.12
1.00 MHz	0.21
1.20 MHz	0.22
1.50 MHz	0.28
2.00 MHz	0.37
2.50 MHz	0.41
3.00 MHz	0.59
4.00 MHz	0.40
5.00 MHz	0.47
7.00 MHz	0.63
10.00 MHz	0.88
15.00 MHz	1.08
20.00 MHz	1.01
30.00 MHz	1.80

Page 2 of 2



20.Feb 23 11:12

Scan Start: 150 kHz
Scan Stop: 30 MHz
Detector: Trace 1: MAX PEAK Trace 2: Average
Transducer: tdf 20

RBW 120 kHz
MT 100 ms
PREAMP OFF

Step AUTO Att 10 dB AUTO

dBV

90
80
70
60
50
40
30
20
10
0

1 MHz 10 MHz

LIMIT CHECK PASS

LIMIT CHECK FAIL

1 PR
MAXH

2 AV
MAXH

150 kHz 30 MHz

Meas Time: 1 s
Margin: 20 dB
Subranges: 0



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.2.24 1211.28 MHz, Line 2 Table

20.Feb 23 11:12

Transducer Table

Name: tdf_20
Interpolation: LIN
Comment: ANS 25/2 Primary LISN IL Line 1 + Coax Cable IL

Frequency	Factor (dB)
150.00 kHz	0.19
170.00 kHz	0.17
200.00 kHz	0.16
250.00 kHz	0.13
300.00 kHz	0.12
350.00 kHz	0.12
400.00 kHz	0.11
500.00 kHz	0.12
600.00 kHz	0.12
700.00 kHz	0.11
800.00 kHz	0.13
900.00 kHz	0.12
1.00 MHz	0.21
1.20 MHz	0.22
1.50 MHz	0.28
2.00 MHz	0.37
2.50 MHz	0.41
3.00 MHz	0.59
4.00 MHz	0.40
5.00 MHz	0.47
7.00 MHz	0.63
10.00 MHz	0.88
15.00 MHz	1.08
20.00 MHz	1.01
30.00 MHz	1.80

Page 2 of 2



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

9. Statements of Compatibility with FCC Rules – part 15.121

FCC ID: AFJ325010

This scanning receiver cannot be used or modified to receive cellular radiotelephony frequencies. This is achieved by the key features described in detailed statements below. 1. Statement assessing the vulnerability of {cust_desc} to possible modifications and describing design steps taken to make the tuning, control and filtering circuitry inaccessible (15.121 (a)): The receiver portion of the equipment under this application scans the frequency bands 88MHz to 450 MHz. The receiver circuitry cannot be altered to enable it to scan the cellular bands by means of clipping the leads of components, installing a diode and/or jumper wire, or by any other such simple modification. Nor can the receiver be made to scan the cellular bands by replacing a plug-in semiconductor chip, because no such plug-in chips are utilized anywhere in the receiver. The semiconductor chips that are utilized in the tuning function of the equipment cannot be reprogrammed. The tuning, control and filtering circuitry of the receiver is controlled by a microprocessor firmware, which is unalterable by the user (and it is also unalterable by the manufacturer's own support and distribution staff, and their resellers). Any attempt to modify the circuitry cannot therefore result in achieving access to the cellular bands, but is likely to make the receiver inoperable.

2. Statement relating to cellular band rejection (15.121 (b)): The FCC requirement stipulates that scanning receivers shall reject any signals from the cellular radiotelephone service frequency bands that are 38dB or lower (at 12 dB SINAD). The construction of the equipment under this application is such that image rejection is typically 60 dB, therefore with a more than sufficient margin for adequate suppression of any image frequencies related to the cellular radiotelephone signals. This aspect was tested by the receiver placed in a scanning mode. There were no spurious responses detected within the entire frequency range of the receiver with a rejection ratio less than 44 dB. In view of the above, the equipment complies with part 15.121 of the FCC rules.



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

10. ANNEX-A - Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in a separate document.

11. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate document.

12. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_6575-23_FCC 15B_Scanning Receiver_	1	Initial release	2/20/2023
	2	Updated Page 6	3/10/2023



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

END OF TEST REPORT
