


Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_02.53.03

EUT Name:	Tablet	Temp.(°C):	23.2
Model Number:	PN500CC	Humidity (%RH):	51
Sample Number:	CC26090072-001-S02	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11a CH44 P=19.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

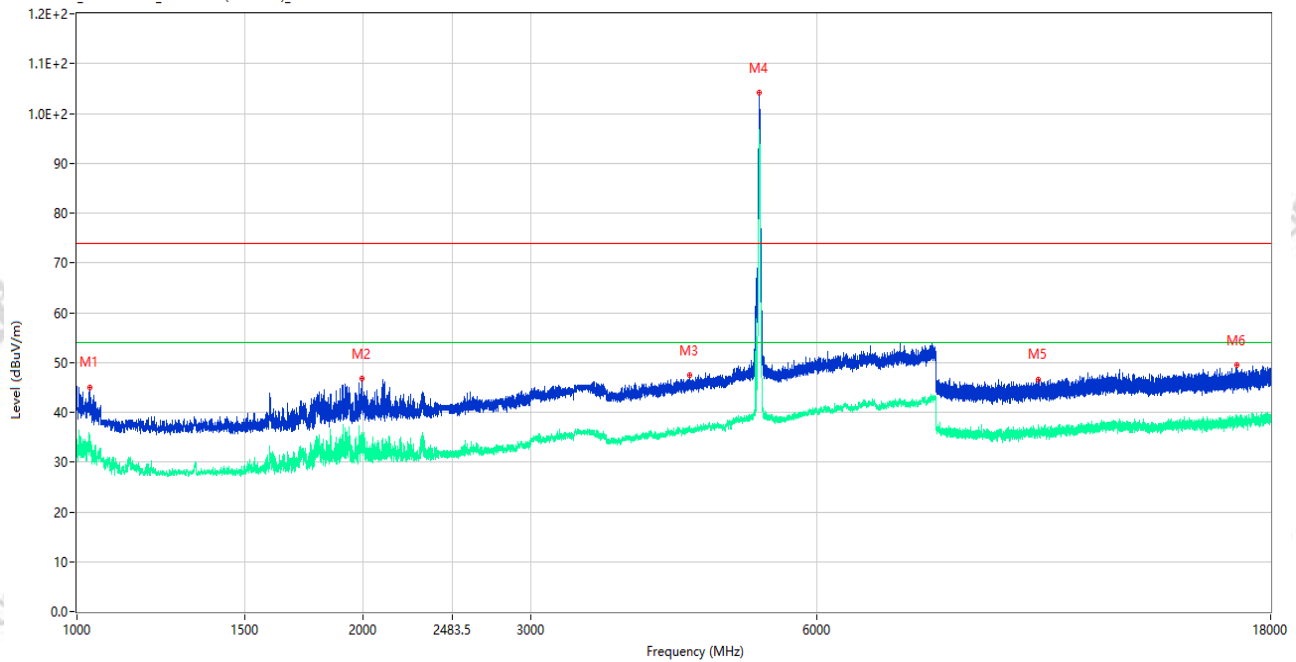

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1031.750	44.91	-15.39	74.0	29.09	Peak	212.00	150	Vertical	Pass
1**	1031.750	34.39	-15.39	54.0	19.61	AV	212.00	150	Vertical	Pass
2	1993.750	46.81	-14.62	74.0	27.19	Peak	108.00	150	Vertical	Pass
2**	1993.750	34.76	-14.62	54.0	19.24	AV	108.00	150	Vertical	Pass
3	4404.000	47.38	-3.01	74.0	26.62	Peak	114.00	150	Vertical	Pass
3**	4404.000	36.71	-3.01	54.0	17.29	AV	114.00	150	Vertical	Pass
4	5219.000	104.08	-2.36	74.0	-30.08	Peak	32.00	150	Vertical	N/A
4**	5219.000	96.64	-2.36	54.0	-42.64	AV	32.00	150	Vertical	N/A
5	10246.750	46.64	-3.36	74.0	27.36	Peak	93.00	150	Vertical	Pass
5**	10246.750	35.95	-3.36	54.0	18.05	AV	93.00	150	Vertical	Pass
6	16576.988	49.45	-0.74	74.0	24.55	Peak	322.00	150	Vertical	Pass
6**	16576.988	38.95	-0.74	54.0	15.05	AV	322.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-15_23.44.58

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=19.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

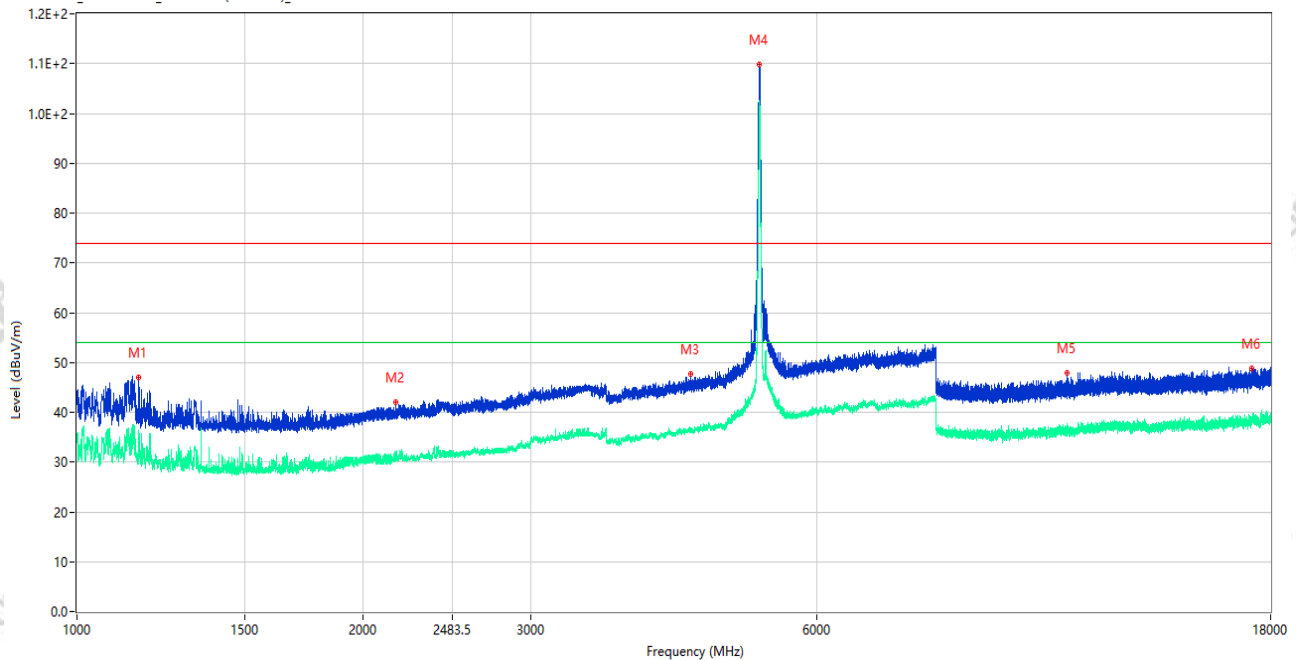

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1161.750	46.93	-15.47	74.0	27.07	Peak	103.00	150	Horizontal	Pass
1**	1161.750	36.26	-15.47	54.0	17.74	AV	103.00	150	Horizontal	Pass
2	2163.500	42.12	-13.21	74.0	31.88	Peak	239.00	150	Horizontal	Pass
2**	2163.500	31.10	-13.21	54.0	22.90	AV	239.00	150	Horizontal	Pass
3	4424.000	47.73	-2.92	74.0	26.27	Peak	240.00	150	Horizontal	Pass
3**	4424.000	36.51	-2.92	54.0	17.49	AV	240.00	150	Horizontal	Pass
4	5218.500	109.76	-2.37	74.0	-35.76	Peak	167.00	150	Horizontal	N/A
4**	5218.500	101.32	-2.37	54.0	-47.32	AV	167.00	150	Horizontal	N/A
5	10999.151	47.80	-2.72	74.0	26.20	Peak	22.00	150	Horizontal	Pass
5**	10999.151	36.53	-2.72	54.0	17.47	AV	22.00	150	Horizontal	Pass
6	17205.676	48.85	0.15	74.0	25.15	Peak	194.00	150	Horizontal	Pass
6**	17205.676	38.78	0.15	54.0	15.22	AV	194.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_03.02.09

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac20 CH44 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

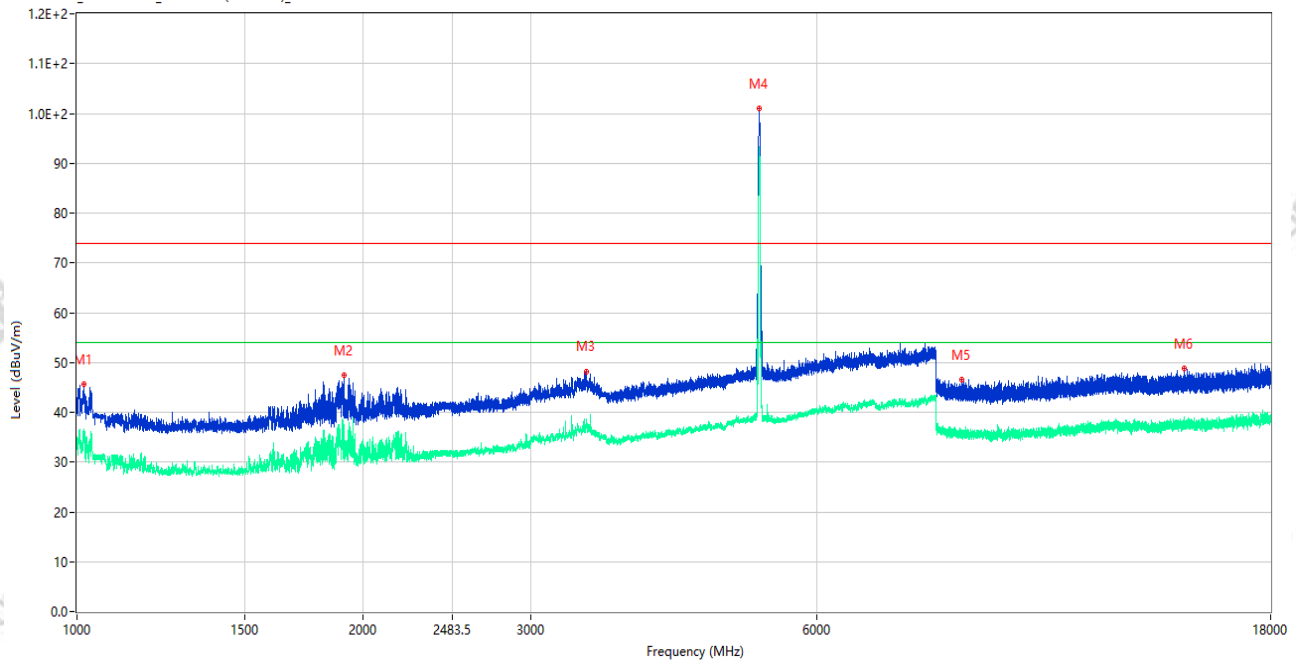


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1017.750	45.59	-14.91	74.0	28.41	Peak	208.00	150	Vertical	Pass
1**	1017.750	35.93	-14.91	54.0	18.07	AV	208.00	150	Vertical	Pass
2	1910.000	47.41	-15.44	74.0	26.59	Peak	146.00	150	Vertical	Pass
2**	1910.000	36.32	-15.44	54.0	17.68	AV	146.00	150	Vertical	Pass
3	3433.000	48.25	-5.12	74.0	25.75	Peak	360.00	150	Vertical	Pass
3**	3433.000	38.73	-5.12	54.0	15.27	AV	360.00	150	Vertical	Pass
4	5219.000	100.91	-2.36	74.0	-26.91	Peak	26.00	150	Vertical	N/A
4**	5219.000	93.34	-2.36	54.0	-39.34	AV	26.00	150	Vertical	N/A
5	8527.725	46.52	-4.98	74.0	27.48	Peak	217.00	150	Vertical	Pass
5**	8527.725	35.76	-4.98	54.0	18.24	AV	217.00	150	Vertical	Pass
6	14594.588	48.76	-2.26	74.0	25.24	Peak	0.00	150	Vertical	Pass
6**	14594.588	38.59	-2.26	54.0	15.41	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_03.07.24

EUT Name:	Tablet	Temp.(°C):	23.2
Model Number:	PN500CC	Humidity (%RH):	51
Sample Number:	CC26090072-001-S02	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11ac20 CH44 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A02+数据线: A03

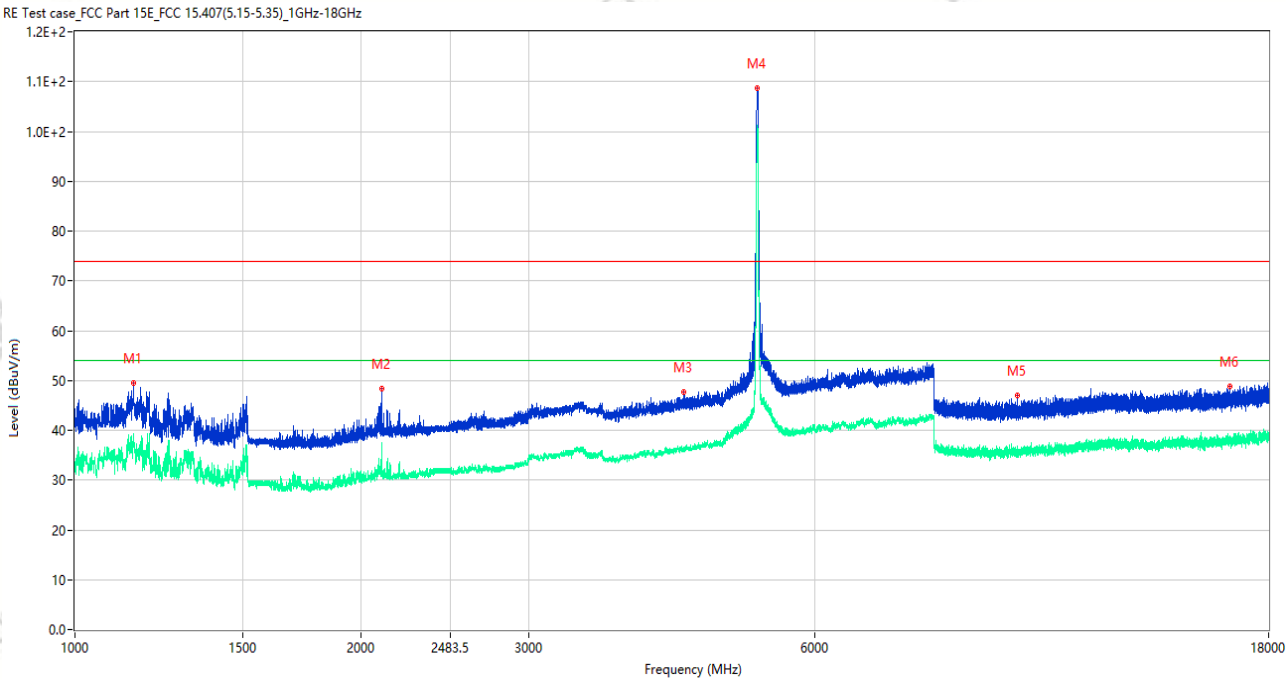

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1152.250	49.56	-15.66	74.0	24.44	Peak	139.00	150	Horizontal	Pass
1**	1152.250	37.75	-15.66	54.0	16.25	AV	139.00	150	Horizontal	Pass
2	2101.000	48.32	-13.53	74.0	25.68	Peak	169.00	150	Horizontal	Pass
2**	2101.000	35.28	-13.53	54.0	18.72	AV	169.00	150	Horizontal	Pass
3	4367.500	47.72	-3.27	74.0	26.28	Peak	315.00	150	Horizontal	Pass
3**	4367.500	36.31	-3.27	54.0	17.69	AV	315.00	150	Horizontal	Pass
4	5220.000	108.63	-2.36	74.0	-34.63	Peak	160.00	150	Horizontal	N/A
4**	5220.000	100.50	-2.36	54.0	-46.50	AV	160.00	150	Horizontal	N/A
5	9804.287	46.94	-3.64	74.0	27.06	Peak	147.00	150	Horizontal	Pass
5**	9804.287	35.85	-3.64	54.0	18.15	AV	147.00	150	Horizontal	Pass
6	16388.512	48.73	-1.43	74.0	25.27	Peak	119.00	150	Horizontal	Pass
6**	16388.512	37.96	-1.43	54.0	16.04	AV	119.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_03.17.53

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac40 CH38 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

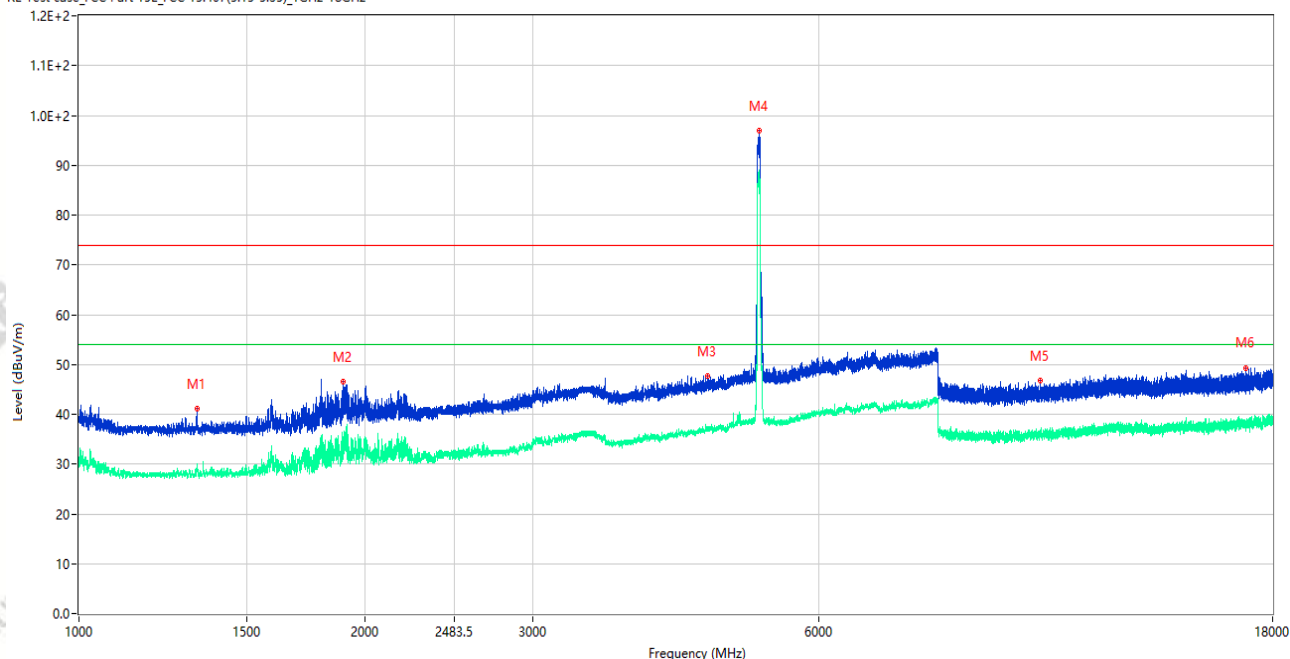

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.500	41.16	-15.99	74.0	32.84	Peak	130.00	150	Vertical	Pass
1**	1330.500	29.69	-15.99	54.0	24.31	AV	130.00	150	Vertical	Pass
2	1895.500	46.54	-15.45	74.0	27.46	Peak	121.00	150	Vertical	Pass
2**	1895.500	34.93	-15.45	54.0	19.07	AV	121.00	150	Vertical	Pass
3	4587.500	47.70	-3.36	74.0	26.30	Peak	28.00	150	Vertical	Pass
3**	4587.500	37.13	-3.36	54.0	16.87	AV	28.00	150	Vertical	Pass
4	5188.500	96.89	-2.31	74.0	-22.89	Peak	33.00	150	Vertical	N/A
4**	5188.500	87.90	-2.31	54.0	-33.90	AV	33.00	150	Vertical	N/A
5	10246.275	46.74	-3.37	74.0	27.26	Peak	323.00	150	Vertical	Pass
5**	10246.275	36.03	-3.37	54.0	17.97	AV	323.00	150	Vertical	Pass
6	16848.676	49.37	-1.11	74.0	24.63	Peak	144.00	150	Vertical	Pass
6**	16848.676	38.13	-1.11	54.0	15.87	AV	144.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_03.12.21

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac40 CH38 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

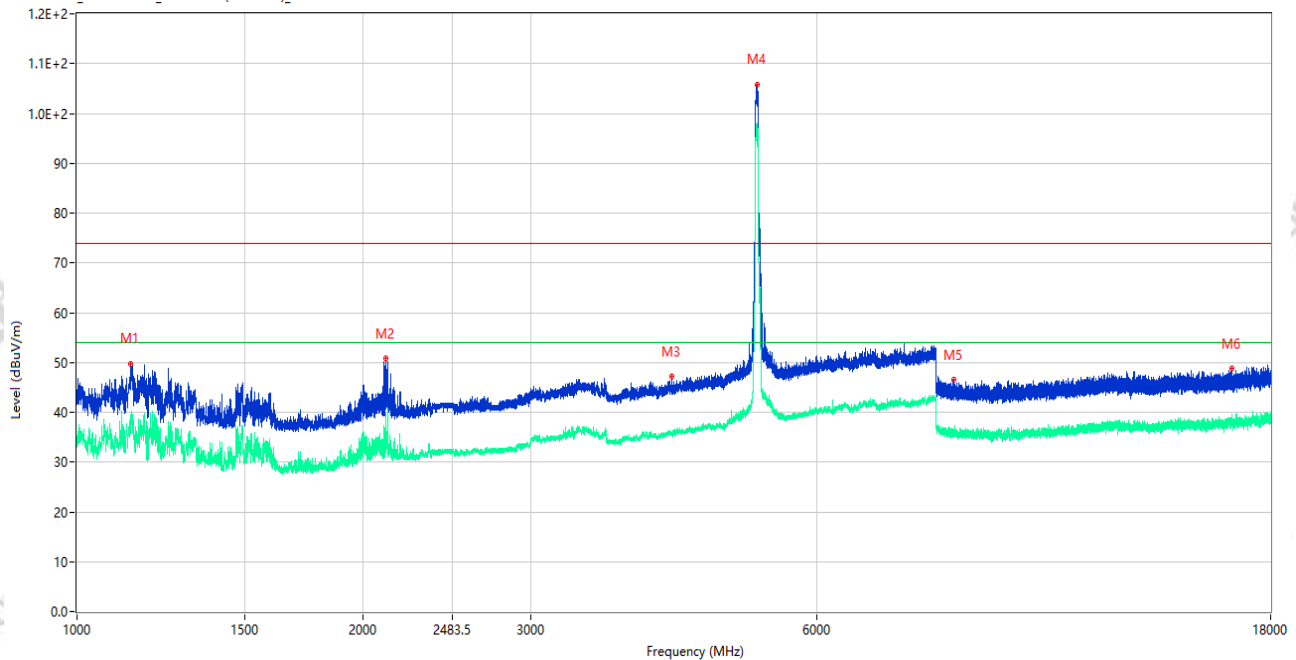

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1139.500	49.82	-15.55	74.0	24.18	Peak	123.00	150	Horizontal	Pass
1**	1139.500	36.35	-15.55	54.0	17.65	AV	123.00	150	Horizontal	Pass
2	2111.750	50.75	-13.60	74.0	23.25	Peak	165.00	150	Horizontal	Pass
2**	2111.750	39.06	-13.60	54.0	14.94	AV	165.00	150	Horizontal	Pass
3	4221.500	47.16	-4.01	74.0	26.84	Peak	107.00	150	Horizontal	Pass
3**	4221.500	35.39	-4.01	54.0	18.61	AV	107.00	150	Horizontal	Pass
4	5188.000	105.85	-2.32	74.0	-31.85	Peak	182.00	150	Horizontal	N/A
4**	5188.000	97.89	-2.32	54.0	-43.89	AV	182.00	150	Horizontal	N/A
5	8368.362	46.51	-4.51	74.0	27.49	Peak	94.00	150	Horizontal	Pass
5**	8368.362	36.15	-4.51	54.0	17.85	AV	94.00	150	Horizontal	Pass
6	16394.287	48.74	-1.13	74.0	25.26	Peak	42.00	150	Horizontal	Pass
6**	16394.287	38.95	-1.13	54.0	15.05	AV	42.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_03.34.46

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac80 CH42 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case FCC Part 15E FCC 15.407(5.15-5.35)_1GHz-18GHz

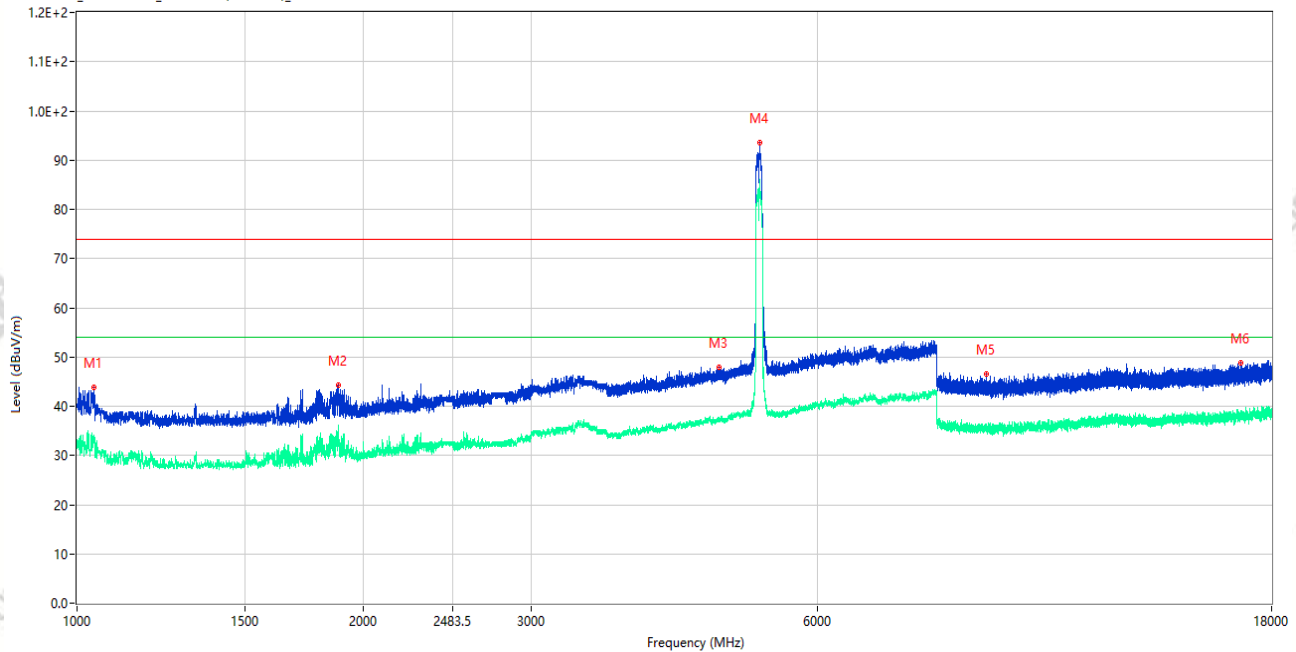

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1041.500	43.80	-15.37	74.0	30.20	Peak	200.00	150	Vertical	Pass
1**	1041.500	32.68	-15.37	54.0	21.32	AV	200.00	150	Vertical	Pass
2	1881.250	44.22	-15.32	74.0	29.78	Peak	135.00	150	Vertical	Pass
2**	1881.250	35.03	-15.32	54.0	18.97	AV	135.00	150	Vertical	Pass
3	4729.500	47.97	-3.35	74.0	26.03	Peak	113.00	150	Vertical	Pass
3**	4729.500	37.50	-3.35	54.0	16.50	AV	113.00	150	Vertical	Pass
4	5214.000	93.49	-2.35	74.0	-19.49	Peak	33.00	150	Vertical	N/A
4**	5214.000	83.98	-2.35	54.0	-29.98	AV	33.00	150	Vertical	N/A
5	9026.475	46.59	-4.29	74.0	27.41	Peak	354.00	150	Vertical	Pass
5**	9026.475	35.90	-4.29	54.0	18.10	AV	354.00	150	Vertical	Pass
6	16704.824	48.75	-1.65	74.0	25.25	Peak	360.00	150	Vertical	Pass
6**	16704.824	38.36	-1.65	54.0	15.64	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_03.39.39

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac80 CH42 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case FCC Part 15E FCC 15.407(5.15-5.35)_1GHz-18GHz

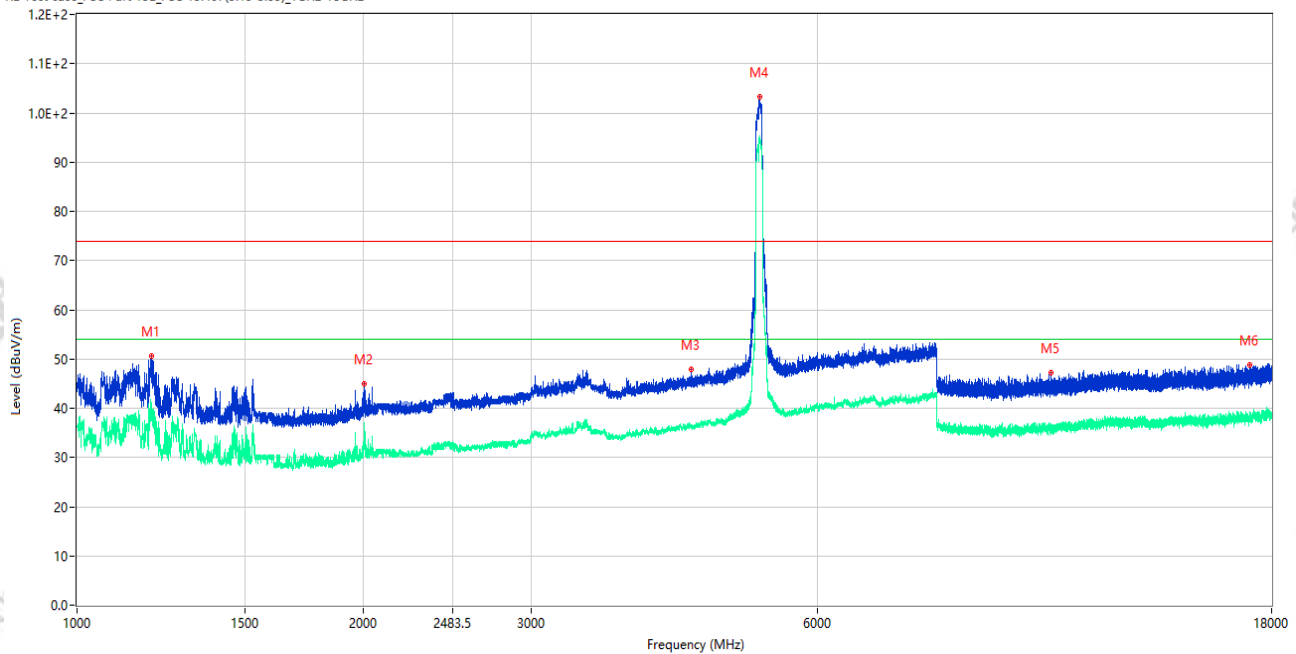

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.000	50.58	-15.73	74.0	23.42	Peak	96.00	150	Horizontal	Pass
1**	1198.000	39.68	-15.73	54.0	14.32	AV	96.00	150	Horizontal	Pass
2	2001.500	44.88	-14.27	74.0	29.12	Peak	168.00	150	Horizontal	Pass
2**	2001.500	36.04	-14.27	54.0	17.96	AV	168.00	150	Horizontal	Pass
3	4424.500	47.83	-2.94	74.0	26.17	Peak	83.00	150	Horizontal	Pass
3**	4424.500	36.35	-2.94	54.0	17.65	AV	83.00	150	Horizontal	Pass
4	5214.000	103.21	-2.35	74.0	-29.21	Peak	172.00	150	Horizontal	N/A
4**	5214.000	94.86	-2.35	54.0	-40.86	AV	172.00	150	Horizontal	N/A
5	10565.713	47.15	-3.22	74.0	26.85	Peak	266.00	150	Horizontal	Pass
5**	10565.713	36.11	-3.22	54.0	17.89	AV	266.00	150	Horizontal	Pass
6	17072.325	48.82	-0.61	74.0	25.18	Peak	114.00	150	Horizontal	Pass
6**	17072.325	39.21	-0.61	54.0	14.79	AV	114.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_04.34.10

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11a CH60 P=19.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

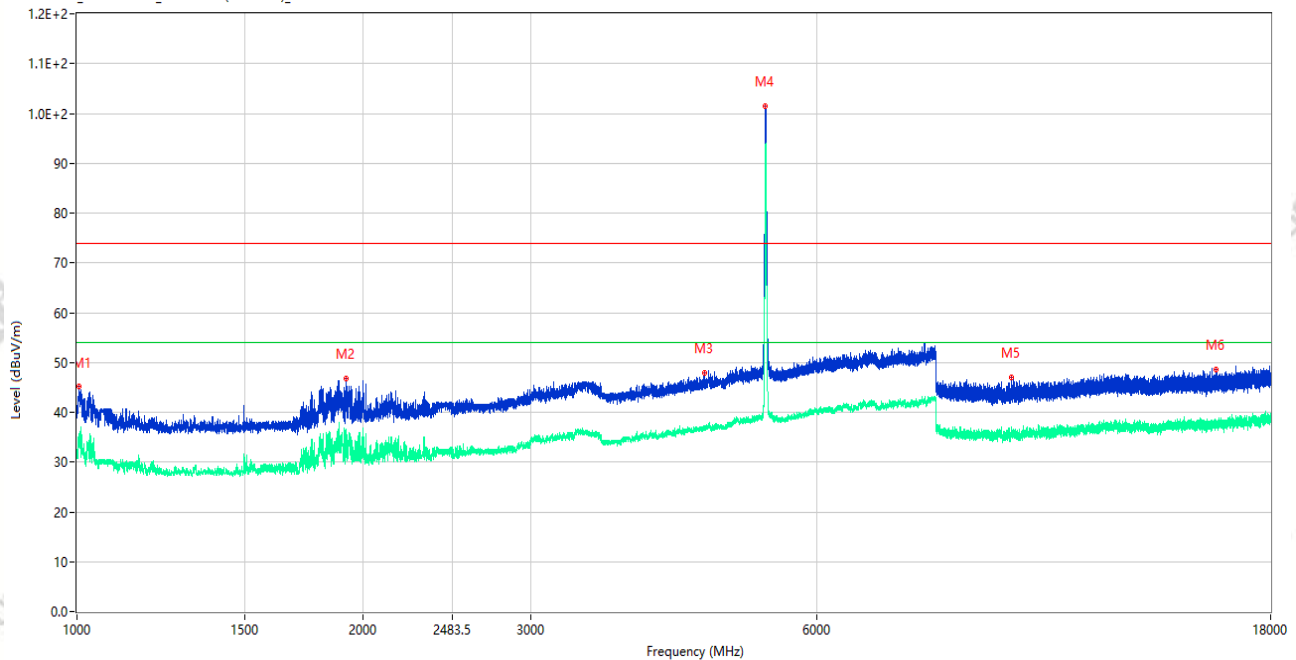

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1004.250	45.10	-14.31	74.0	28.90	Peak	193.00	150	Vertical	Pass
1**	1004.250	34.61	-14.31	54.0	19.39	AV	193.00	150	Vertical	Pass
2	1917.250	46.68	-15.50	74.0	27.32	Peak	134.00	150	Vertical	Pass
2**	1917.250	34.51	-15.50	54.0	19.49	AV	134.00	150	Vertical	Pass
3	4574.000	47.89	-3.34	74.0	26.11	Peak	315.00	150	Vertical	Pass
3**	4574.000	36.93	-3.34	54.0	17.07	AV	315.00	150	Vertical	Pass
4	5299.000	101.49	-2.01	74.0	-27.49	Peak	41.00	150	Vertical	N/A
4**	5299.000	93.76	-2.01	54.0	-39.76	AV	41.00	150	Vertical	N/A
5	9615.475	47.08	-3.37	74.0	26.92	Peak	0.00	150	Vertical	Pass
5**	9615.475	35.84	-3.37	54.0	18.16	AV	0.00	150	Vertical	Pass
6	15757.987	48.48	-1.98	74.0	25.52	Peak	269.00	150	Vertical	Pass
6**	15757.987	38.12	-1.98	54.0	15.88	AV	269.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_04.28.39

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11a CH60 P=19.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

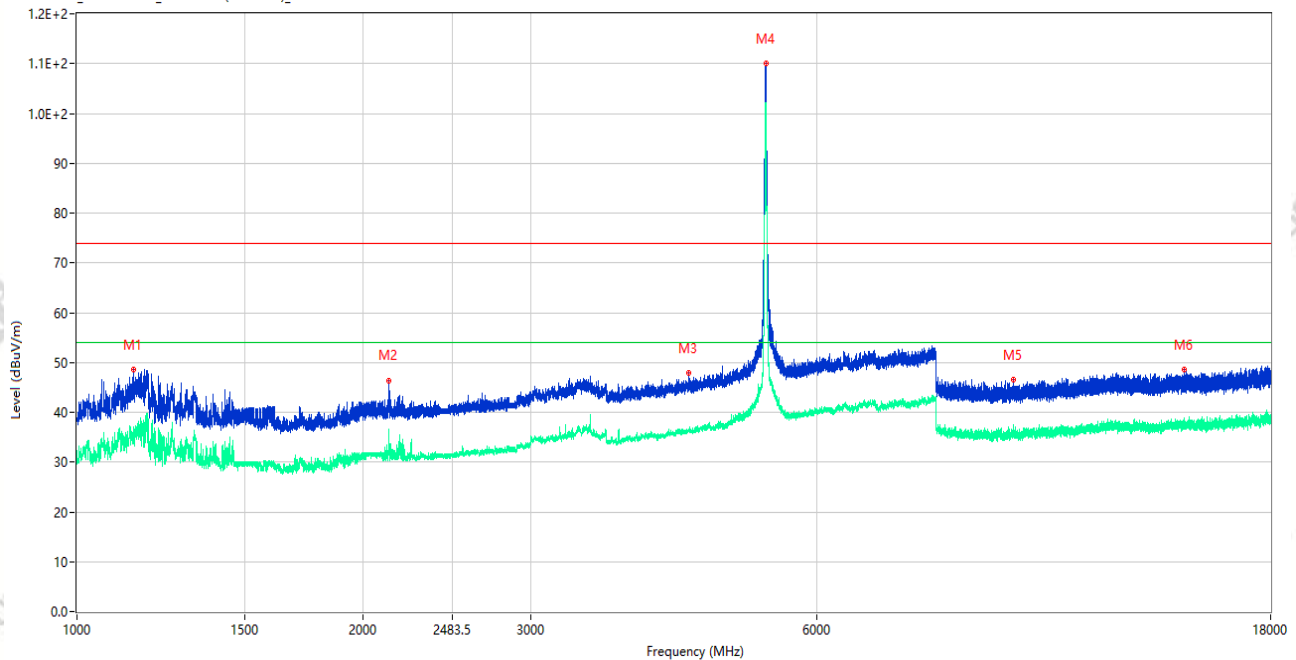

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1146.750	48.67	-15.66	74.0	25.33	Peak	133.00	150	Horizontal	Pass
1**	1146.750	35.36	-15.66	54.0	18.64	AV	133.00	150	Horizontal	Pass
2	2127.250	46.38	-13.26	74.0	27.62	Peak	152.00	150	Horizontal	Pass
2**	2127.250	36.52	-13.26	54.0	17.48	AV	152.00	150	Horizontal	Pass
3	4400.500	47.86	-3.12	74.0	26.14	Peak	217.00	150	Horizontal	Pass
3**	4400.500	36.50	-3.12	54.0	17.50	AV	217.00	150	Horizontal	Pass
4	5304.000	109.97	-2.02	74.0	-35.97	Peak	180.00	150	Horizontal	N/A
4**	5304.000	101.45	-2.02	54.0	-47.45	AV	180.00	150	Horizontal	N/A
5	9652.287	46.50	-3.33	74.0	27.50	Peak	0.00	150	Horizontal	Pass
5**	9652.287	35.44	-3.33	54.0	18.56	AV	0.00	150	Horizontal	Pass
6	14593.275	48.59	-2.12	74.0	25.41	Peak	357.00	150	Horizontal	Pass
6**	14593.275	38.05	-2.12	54.0	15.95	AV	357.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_04.39.28

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n20 CH60 P=18.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

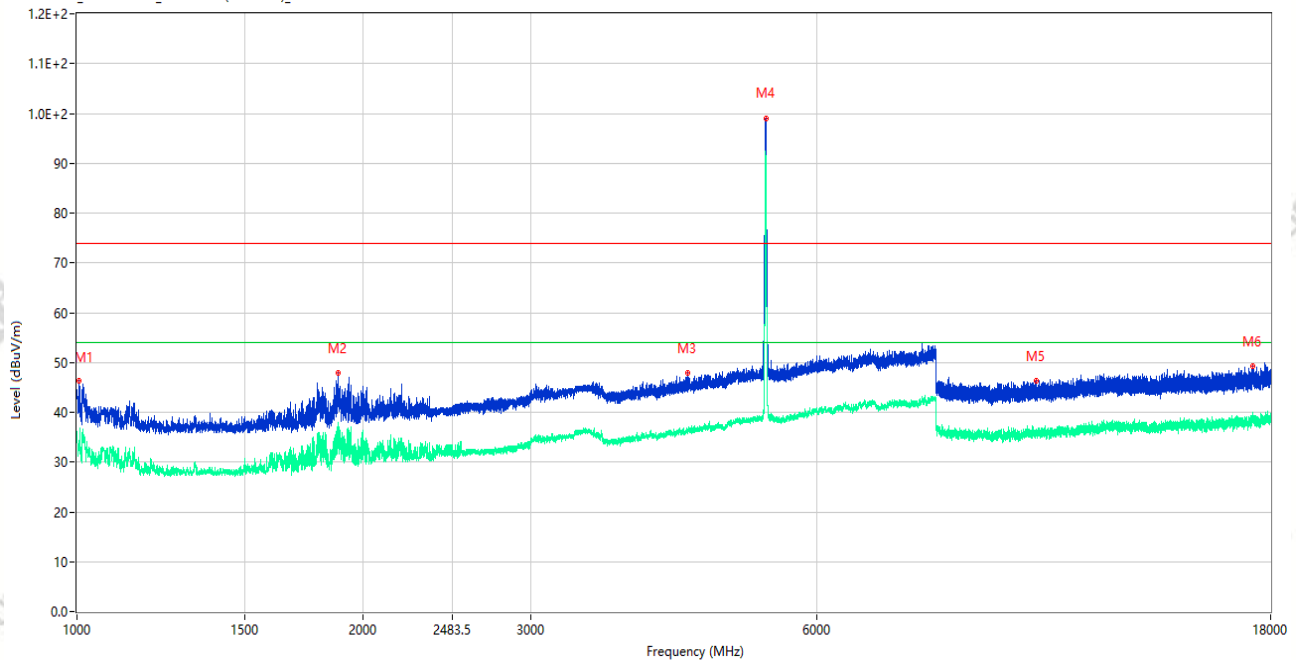

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1005.750	46.29	-14.23	74.0	27.71	Peak	198.00	150	Vertical	Pass
1**	1005.750	32.86	-14.23	54.0	21.14	AV	198.00	150	Vertical	Pass
2	1882.750	47.94	-15.32	74.0	26.06	Peak	143.00	150	Vertical	Pass
2**	1882.750	36.74	-15.32	54.0	17.26	AV	143.00	150	Vertical	Pass
3	4389.500	47.87	-3.61	74.0	26.13	Peak	40.00	150	Vertical	Pass
3**	4389.500	36.15	-3.61	54.0	17.85	AV	40.00	150	Vertical	Pass
4	5302.000	99.07	-2.05	74.0	-25.07	Peak	40.00	150	Vertical	N/A
4**	5302.000	91.13	-2.05	54.0	-37.13	AV	40.00	150	Vertical	N/A
5	10209.937	46.35	-3.09	74.0	27.65	Peak	57.00	150	Vertical	Pass
5**	10209.937	36.19	-3.09	54.0	17.81	AV	57.00	150	Vertical	Pass
6	17233.762	49.23	-0.47	74.0	24.77	Peak	165.00	150	Vertical	Pass
6**	17233.762	38.86	-0.47	54.0	15.14	AV	165.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_04.45.14

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n20 CH60 P=18.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

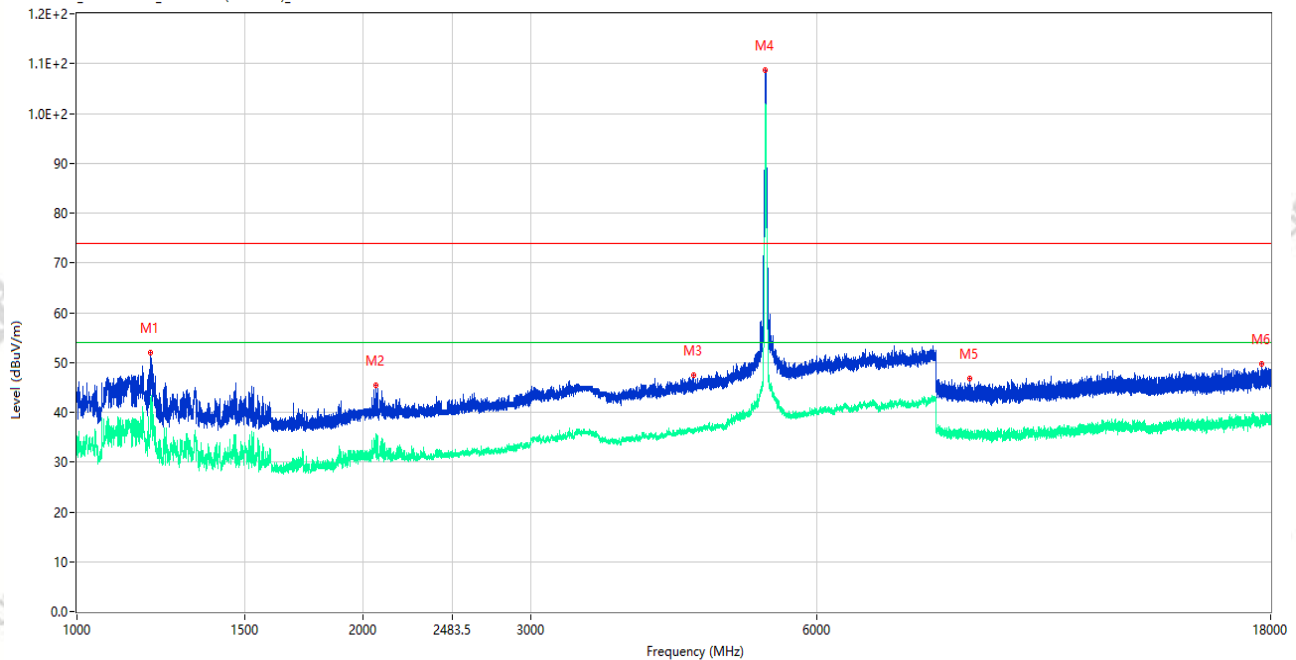

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1194.750	51.98	-15.75	74.0	22.02	Peak	144.00	150	Horizontal	Pass
1**	1194.750	42.09	-15.75	54.0	11.91	AV	144.00	150	Horizontal	Pass
2	2064.500	45.32	-13.82	74.0	28.68	Peak	151.00	150	Horizontal	Pass
2**	2064.500	35.59	-13.82	54.0	18.41	AV	151.00	150	Horizontal	Pass
3	4457.000	47.48	-3.69	74.0	26.52	Peak	128.00	150	Horizontal	Pass
3**	4457.000	35.97	-3.69	54.0	18.03	AV	128.00	150	Horizontal	Pass
4	5299.000	108.77	-2.01	74.0	-34.77	Peak	180.00	150	Horizontal	N/A
4**	5299.000	101.78	-2.01	54.0	-47.78	AV	180.00	150	Horizontal	N/A
5	8682.575	46.75	-5.66	74.0	27.25	Peak	197.00	150	Horizontal	Pass
5**	8682.575	35.64	-5.66	54.0	18.36	AV	197.00	150	Horizontal	Pass
6	17609.662	49.72	0.26	74.0	24.28	Peak	141.00	150	Horizontal	Pass
6**	17609.662	38.44	0.26	54.0	15.56	AV	141.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_04.56.49

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n40 CH54 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

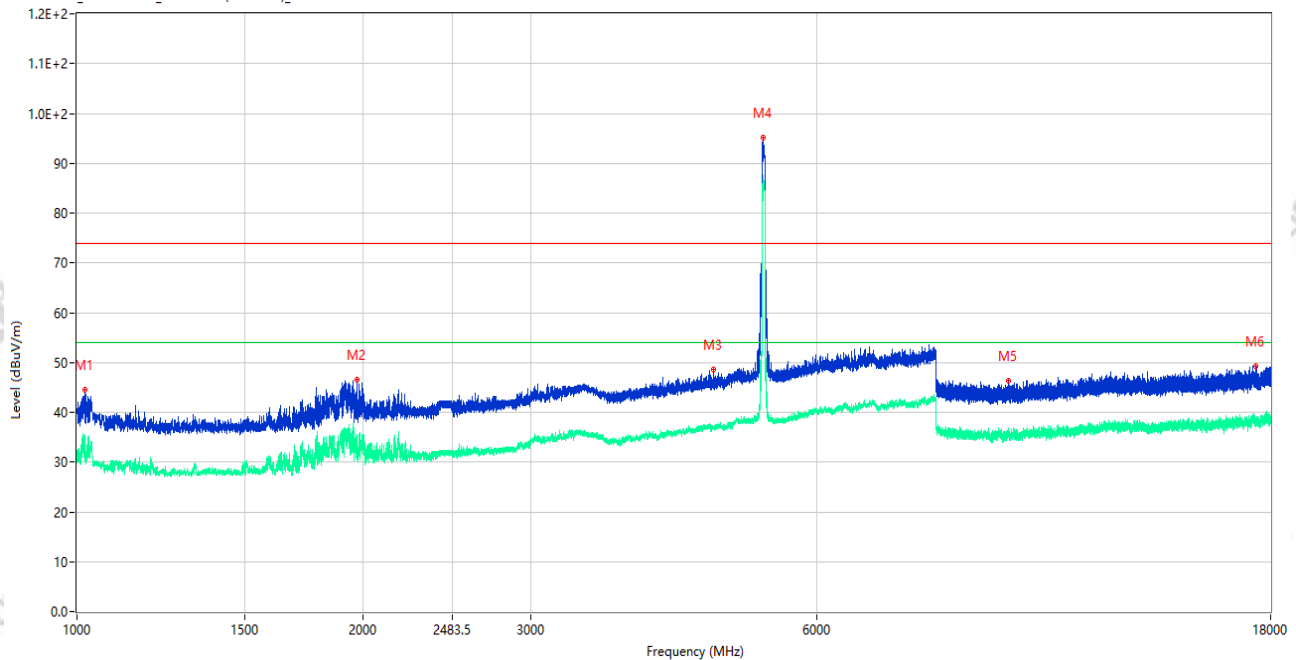

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1019.500	44.53	-15.07	74.0	29.47	Peak	205.00	150	Vertical	Pass
1**	1019.500	33.96	-15.07	54.0	20.04	AV	205.00	150	Vertical	Pass
2	1969.250	46.45	-14.82	74.0	27.55	Peak	132.00	150	Vertical	Pass
2**	1969.250	34.53	-14.82	54.0	19.47	AV	132.00	150	Vertical	Pass
3	4673.000	48.51	-3.62	74.0	25.49	Peak	348.00	150	Vertical	Pass
3**	4673.000	36.82	-3.62	54.0	17.18	AV	348.00	150	Vertical	Pass
4	5272.000	95.17	-2.42	74.0	-21.17	Peak	173.00	150	Vertical	N/A
4**	5272.000	87.27	-2.42	54.0	-33.27	AV	173.00	150	Vertical	N/A
5	9529.500	46.33	-3.23	74.0	27.67	Peak	6.00	150	Vertical	Pass
5**	9529.500	35.56	-3.23	54.0	18.44	AV	6.00	150	Vertical	Pass
6	17366.063	49.33	0.11	74.0	24.67	Peak	360.00	150	Vertical	Pass
6**	17366.063	38.64	0.11	54.0	15.36	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_04.50.34

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n40 CH54 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

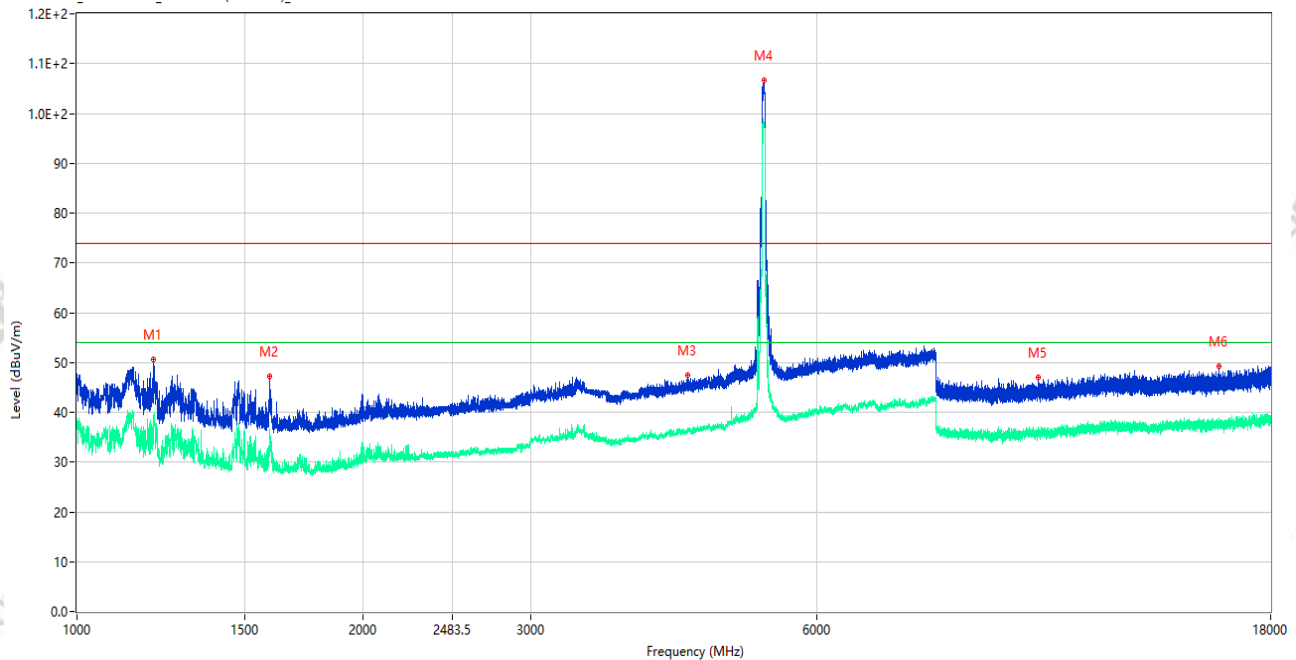

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1204.000	50.69	-15.77	74.0	23.31	Peak	144.00	150	Horizontal	Pass
1**	1204.000	36.85	-15.77	54.0	17.15	AV	144.00	150	Horizontal	Pass
2	1594.500	47.30	-16.23	74.0	26.70	Peak	154.00	150	Horizontal	Pass
2**	1594.500	35.20	-16.23	54.0	18.80	AV	154.00	150	Horizontal	Pass
3	4386.000	47.48	-3.70	74.0	26.52	Peak	144.00	150	Horizontal	Pass
3**	4386.000	36.09	-3.70	54.0	17.91	AV	144.00	150	Horizontal	Pass
4	5278.500	106.65	-2.34	74.0	-32.65	Peak	167.00	150	Horizontal	N/A
4**	5278.500	97.82	-2.34	54.0	-43.82	AV	167.00	150	Horizontal	N/A
5	10265.750	46.89	-3.11	74.0	27.11	Peak	212.00	150	Horizontal	Pass
5**	10265.750	36.50	-3.11	54.0	17.50	AV	212.00	150	Horizontal	Pass
6	15881.099	49.26	-1.44	74.0	24.74	Peak	65.00	150	Horizontal	Pass
6**	15881.099	37.98	-1.44	54.0	16.02	AV	65.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_05.16.30

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac80 CH58 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

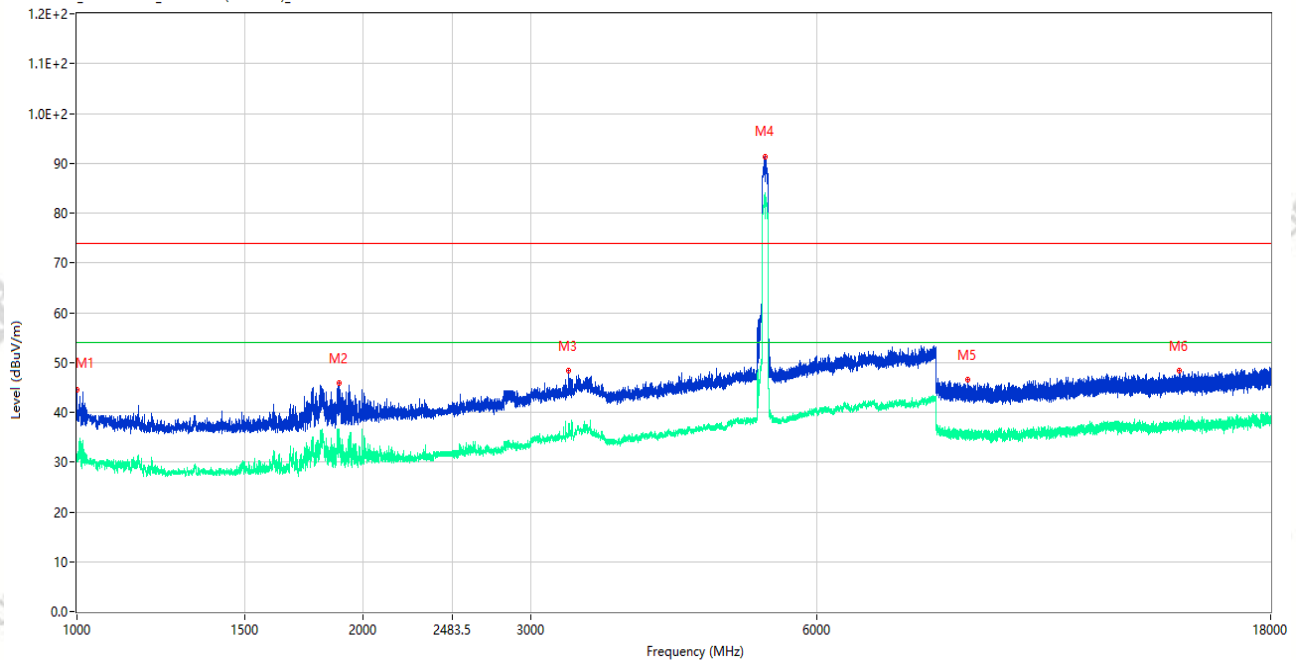

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1000.500	44.42	-14.41	74.0	29.58	Peak	205.00	150	Vertical	Pass
1**	1000.500	30.85	-14.41	54.0	23.15	AV	205.00	150	Vertical	Pass
2	1885.750	45.94	-15.31	74.0	28.06	Peak	147.00	150	Vertical	Pass
2**	1885.750	36.17	-15.31	54.0	17.83	AV	147.00	150	Vertical	Pass
3	3291.500	48.28	-6.77	74.0	25.72	Peak	210.00	150	Vertical	Pass
3**	3291.500	37.25	-6.77	54.0	16.75	AV	210.00	150	Vertical	Pass
4	5287.500	91.39	-2.07	74.0	-17.39	Peak	32.00	150	Vertical	N/A
4**	5287.500	83.54	-2.07	54.0	-29.54	AV	32.00	150	Vertical	N/A
5	8651.938	46.46	-5.61	74.0	27.54	Peak	20.00	150	Vertical	Pass
5**	8651.938	35.71	-5.61	54.0	18.29	AV	20.00	150	Vertical	Pass
6	14412.151	48.33	-2.64	74.0	25.67	Peak	360.00	150	Vertical	Pass
6**	14412.151	37.13	-2.64	54.0	16.87	AV	360.00	150	Vertical	Pass


Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_05.08.29

EUT Name:	Tablet	Temp.(°C):	23.2
Model Number:	PN500CC	Humidity (%RH):	51
Sample Number:	CC26090072-001-S02	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11ac80 CH58 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

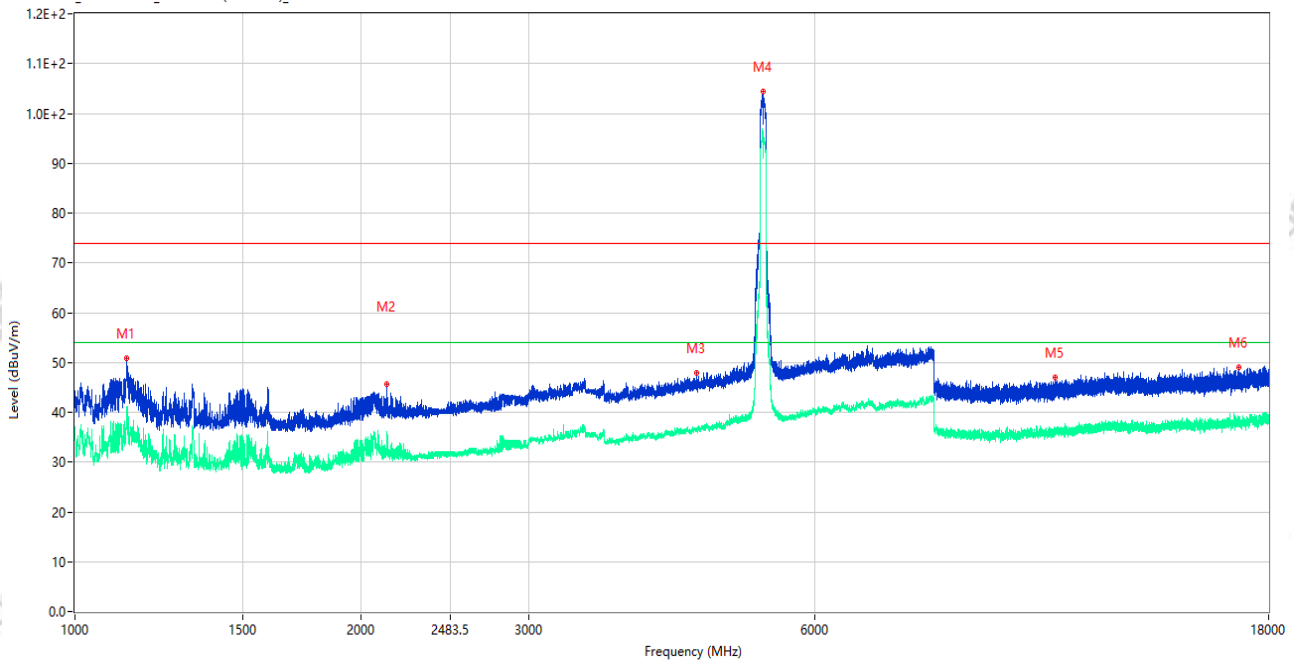

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1134.000	50.76	-15.56	74.0	23.24	Peak	179.00	150	Horizontal	Pass
1**	1134.000	40.11	-15.56	54.0	13.89	AV	179.00	150	Horizontal	Pass
2	2128.000	45.71	-13.25	74.0	28.29	Peak	154.00	150	Horizontal	Pass
2**	2128.000	32.30	-13.25	54.0	21.70	AV	154.00	150	Horizontal	Pass
3	4501.500	47.86	-3.25	74.0	26.14	Peak	357.00	150	Horizontal	Pass
3**	4501.500	36.56	-3.25	54.0	17.44	AV	357.00	150	Horizontal	Pass
4	5288.000	104.32	-2.05	74.0	-30.32	Peak	182.00	150	Horizontal	N/A
4**	5288.000	96.54	-2.05	54.0	-42.54	AV	182.00	150	Horizontal	N/A
5	10724.600	47.04	-3.78	74.0	26.96	Peak	0.00	150	Horizontal	Pass
5**	10724.600	36.67	-3.78	54.0	17.33	AV	0.00	150	Horizontal	Pass
6	16756.275	49.01	-1.48	74.0	24.99	Peak	0.00	150	Horizontal	Pass
6**	16756.275	38.00	-1.48	54.0	16.00	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_06.52.03

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11a CH116 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

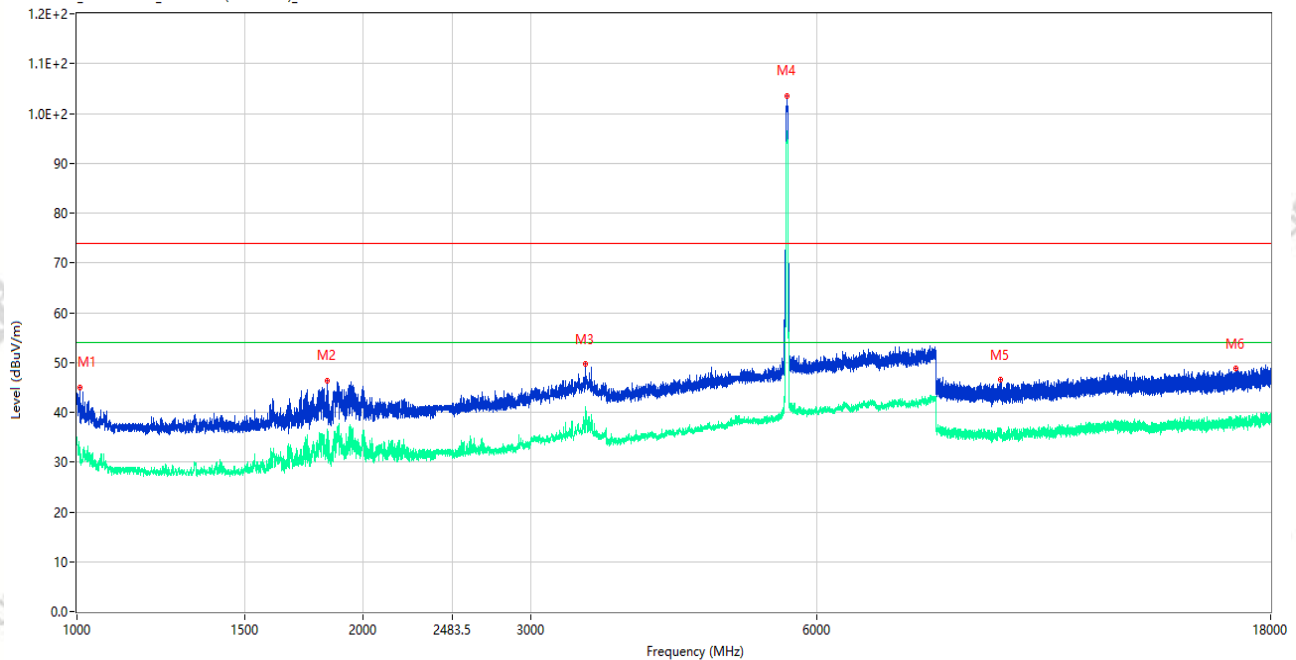

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1006.500	45.03	-14.20	74.0	28.97	Peak	198.00	150	Vertical	Pass
1**	1006.500	31.76	-14.20	54.0	22.24	AV	198.00	150	Vertical	Pass
2	1835.000	46.32	-16.03	74.0	27.68	Peak	120.00	150	Vertical	Pass
2**	1835.000	36.51	-16.03	54.0	17.49	AV	120.00	150	Vertical	Pass
3	3428.500	49.63	-4.96	74.0	24.37	Peak	93.00	150	Vertical	Pass
3**	3428.500	39.69	-4.96	54.0	14.31	AV	93.00	150	Vertical	Pass
4	5578.000	103.60	-2.89	74.0	-29.60	Peak	219.00	150	Vertical	N/A
4**	5578.000	95.94	-2.89	54.0	-41.94	AV	219.00	150	Vertical	N/A
5	9363.963	46.51	-4.98	74.0	27.49	Peak	161.00	150	Vertical	Pass
5**	9363.963	35.81	-4.98	54.0	18.19	AV	161.00	150	Vertical	Pass
6	16558.088	48.82	-0.91	74.0	25.18	Peak	267.00	150	Vertical	Pass
6**	16558.088	38.77	-0.91	54.0	15.23	AV	267.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_06.56.59

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11a CH116 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

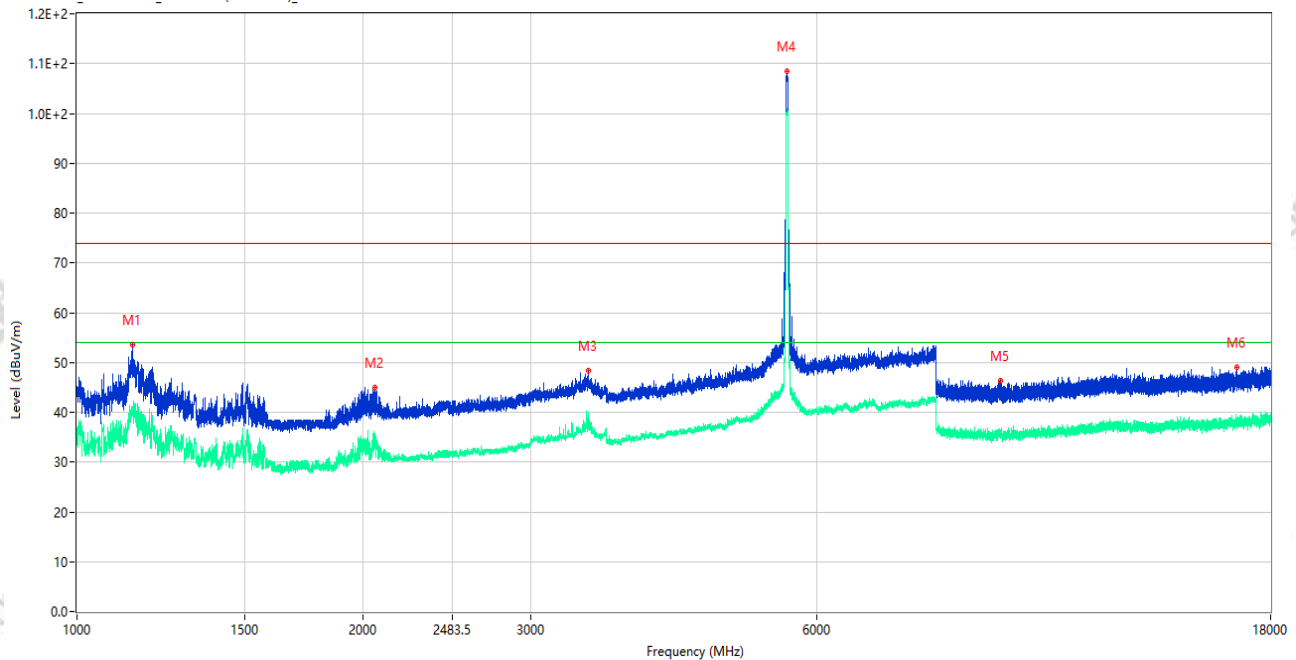

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1145.250	53.47	-15.62	74.0	20.53	Peak	135.00	150	Vertical	Pass
1**	1145.250	40.63	-15.62	54.0	13.37	AV	135.00	150	Vertical	Pass
2	2055.000	45.01	-13.79	74.0	28.99	Peak	150.00	150	Vertical	Pass
2**	2055.000	34.71	-13.79	54.0	19.29	AV	150.00	150	Vertical	Pass
3	3447.500	48.33	-5.14	74.0	25.67	Peak	114.00	150	Vertical	Pass
3**	3447.500	40.05	-5.14	54.0	13.95	AV	114.00	150	Vertical	Pass
4	5579.000	108.40	-2.87	74.0	-34.40	Peak	159.00	150	Vertical	N/A
4**	5579.000	100.70	-2.87	54.0	-46.70	AV	159.00	150	Vertical	N/A
5	9367.763	46.28	-4.96	74.0	27.72	Peak	360.00	150	Vertical	Pass
5**	9367.763	35.95	-4.96	54.0	18.05	AV	360.00	150	Vertical	Pass
6	16570.162	49.10	-0.86	74.0	24.90	Peak	0.00	150	Vertical	Pass
6**	16570.162	38.51	-0.86	54.0	15.49	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_07.04.00

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac20 CH116 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

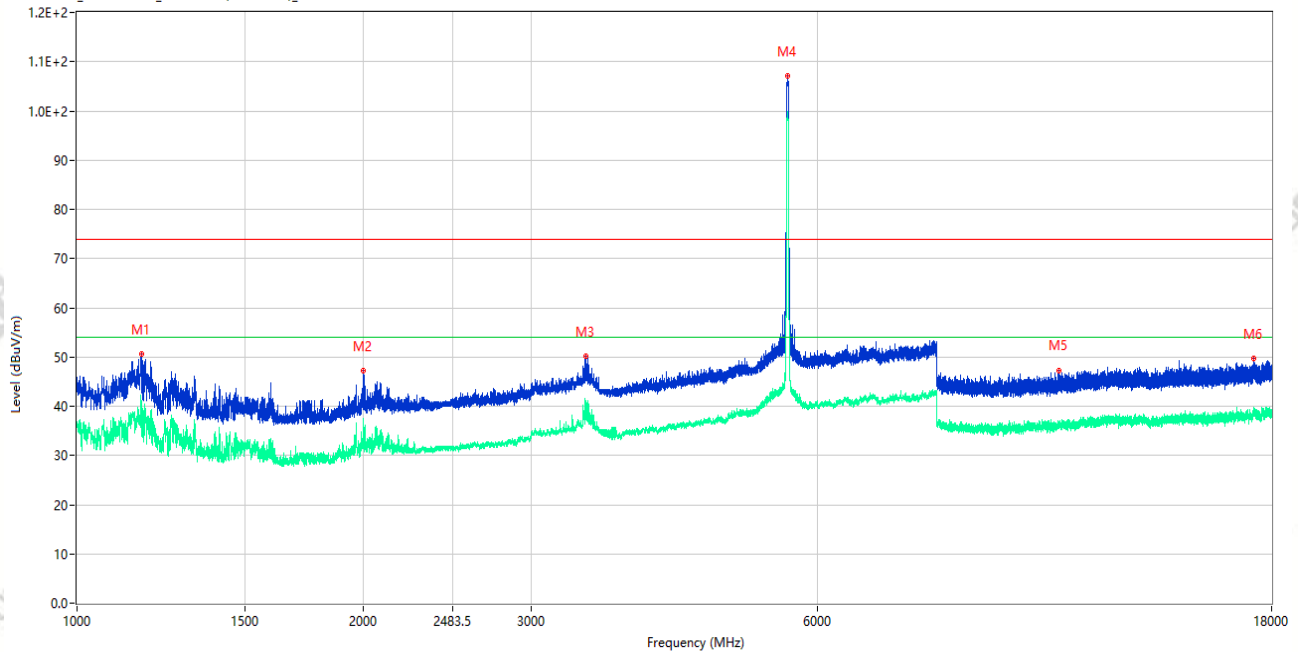

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1170.500	50.68	-15.52	74.0	23.32	Peak	146.00	150	Horizontal	Pass
1**	1170.500	39.41	-15.52	54.0	14.59	AV	146.00	150	Horizontal	Pass
2	1996.500	47.19	-14.47	74.0	26.81	Peak	161.00	150	Horizontal	Pass
2**	1996.500	32.13	-14.47	54.0	21.87	AV	161.00	150	Horizontal	Pass
3	3422.000	50.18	-4.91	74.0	23.82	Peak	70.00	150	Horizontal	Pass
3**	3422.000	41.24	-4.91	54.0	12.76	AV	70.00	150	Horizontal	Pass
4	5578.000	107.14	-2.89	74.0	-33.14	Peak	198.00	150	Horizontal	N/A
4**	5578.000	99.11	-2.89	54.0	-45.11	AV	198.00	150	Horizontal	N/A
5	10753.100	47.33	-3.46	74.0	26.67	Peak	74.00	150	Horizontal	Pass
5**	10753.100	35.74	-3.46	54.0	18.26	AV	74.00	150	Horizontal	Pass
6	17237.176	49.66	-0.71	74.0	24.34	Peak	0.00	150	Horizontal	Pass
6**	17237.176	38.56	-0.71	54.0	15.44	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_07.11.30

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac20 CH116 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

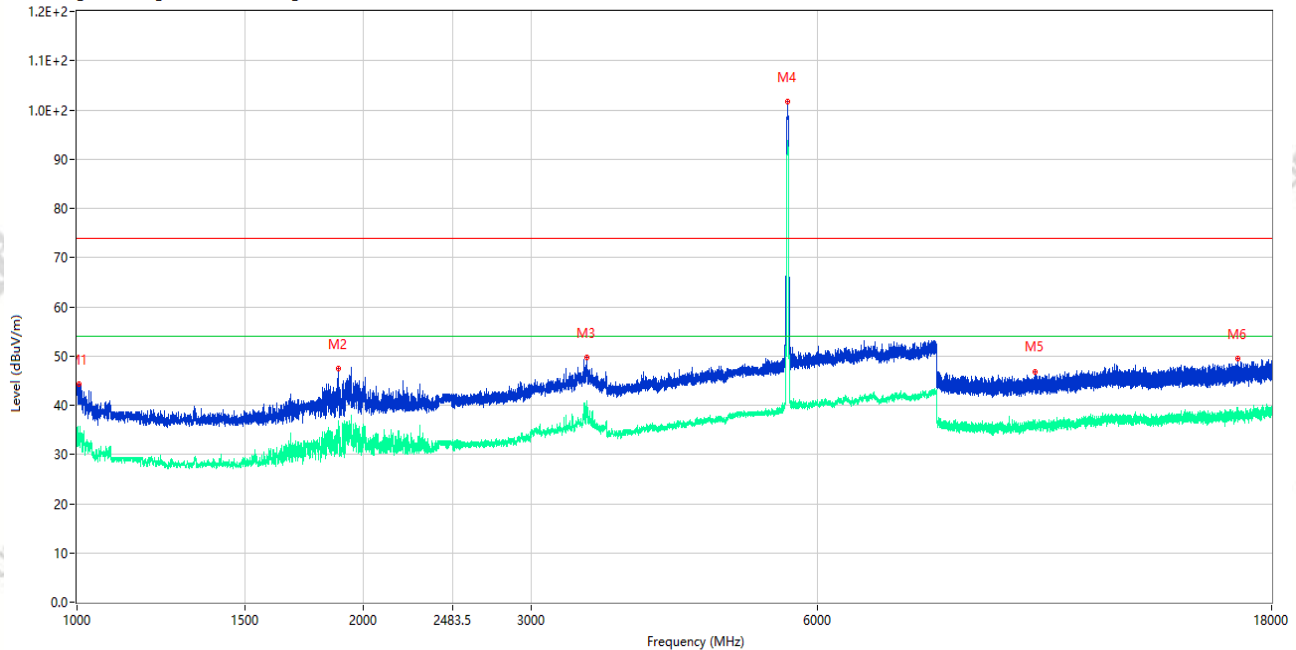

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1003.750	44.30	-14.33	74.0	29.70	Peak	186.00	150	Vertical	Pass
1**	1003.750	32.64	-14.33	54.0	21.36	AV	186.00	150	Vertical	Pass
2	1882.250	47.55	-15.32	74.0	26.45	Peak	148.00	150	Vertical	Pass
2**	1882.250	36.13	-15.32	54.0	17.87	AV	148.00	150	Vertical	Pass
3	3431.000	49.78	-5.03	74.0	24.22	Peak	0.00	150	Vertical	Pass
3**	3431.000	37.42	-5.03	54.0	16.58	AV	0.00	150	Vertical	Pass
4	5581.500	101.61	-2.85	74.0	-27.61	Peak	190.00	150	Vertical	N/A
4**	5581.500	93.43	-2.85	54.0	-39.43	AV	190.00	150	Vertical	N/A
5	10144.862	46.87	-4.24	74.0	27.13	Peak	354.00	150	Vertical	Pass
5**	10144.862	35.50	-4.24	54.0	18.50	AV	354.00	150	Vertical	Pass
6	16576.200	49.38	-0.73	74.0	24.62	Peak	217.00	150	Vertical	Pass
6**	16576.200	38.47	-0.73	54.0	15.53	AV	217.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_08.32.29

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac40 CH118 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

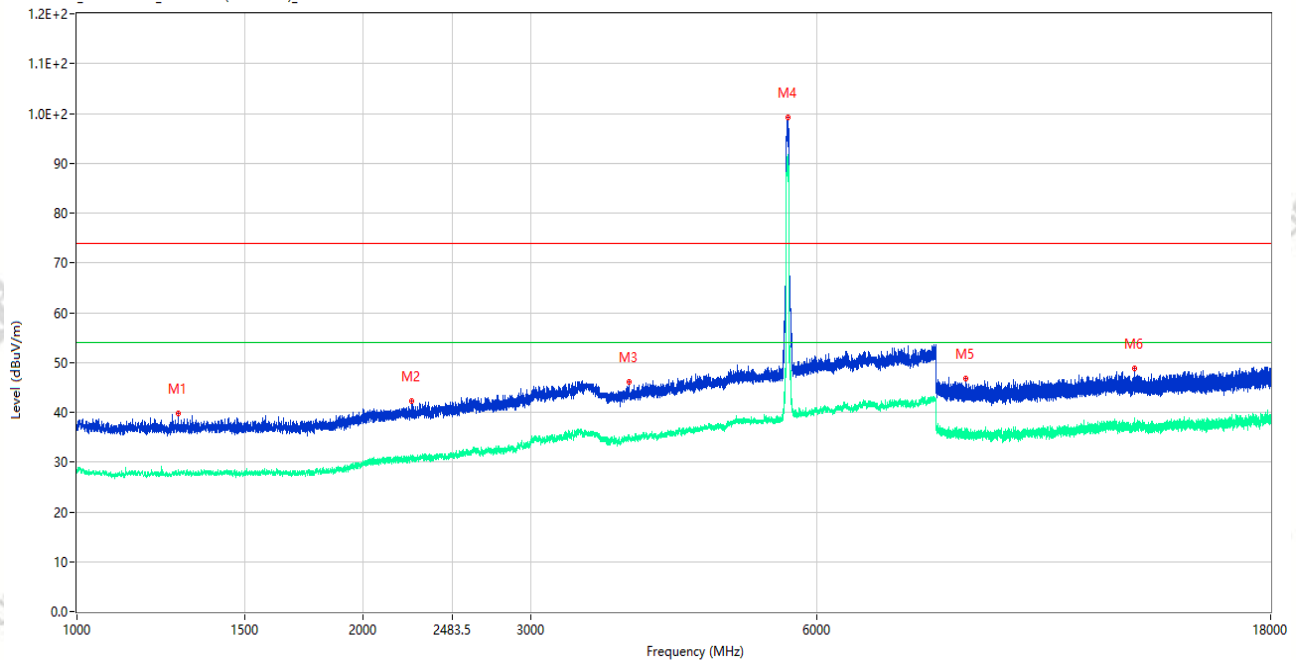

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1277.750	39.70	-15.88	74.0	34.30	Peak	268.00	150	Vertical	Pass
1**	1277.750	28.12	-15.88	54.0	25.88	AV	268.00	150	Vertical	Pass
2	2250.250	42.20	-12.90	74.0	31.80	Peak	201.00	150	Vertical	Pass
2**	2250.250	30.92	-12.90	54.0	23.08	AV	201.00	150	Vertical	Pass
3	3804.500	46.18	-4.36	74.0	27.82	Peak	270.00	150	Vertical	Pass
3**	3804.500	34.82	-4.36	54.0	19.18	AV	270.00	150	Vertical	Pass
4	5591.500	99.24	-2.79	74.0	-25.24	Peak	205.00	150	Vertical	N/A
4**	5591.500	91.13	-2.79	54.0	-37.13	AV	205.00	150	Vertical	N/A
5	8600.875	46.85	-5.02	74.0	27.15	Peak	57.00	150	Vertical	Pass
5**	8600.875	35.95	-5.02	54.0	18.05	AV	57.00	150	Vertical	Pass
6	12941.100	48.74	-2.04	74.0	25.26	Peak	360.00	150	Vertical	Pass
6**	12941.100	38.01	-2.04	54.0	15.99	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_08.27.55

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac40 CH118 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

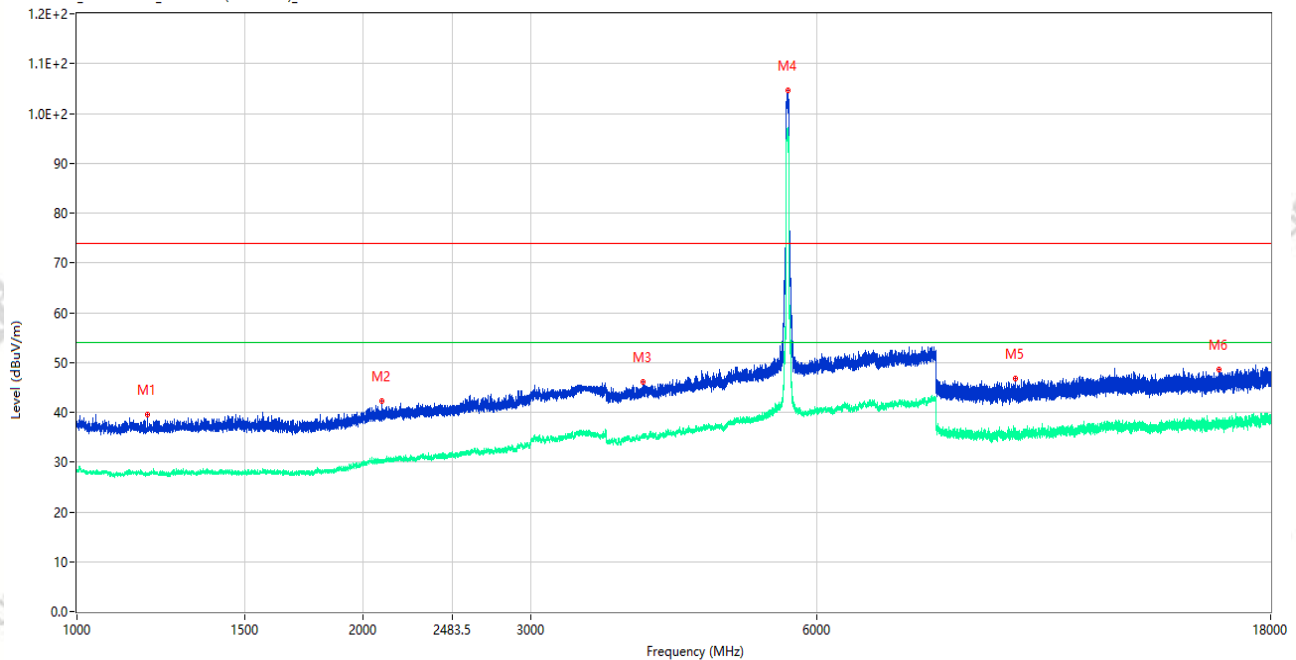

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1185.750	39.49	-15.88	74.0	34.51	Peak	335.00	150	Horizontal	Pass
1**	1185.750	27.39	-15.88	54.0	26.61	AV	335.00	150	Horizontal	Pass
2	2090.500	42.17	-13.68	74.0	31.83	Peak	46.00	150	Horizontal	Pass
2**	2090.500	30.15	-13.68	54.0	23.85	AV	46.00	150	Horizontal	Pass
3	3934.000	46.16	-3.59	74.0	27.84	Peak	359.00	150	Horizontal	Pass
3**	3934.000	35.23	-3.59	54.0	18.77	AV	359.00	150	Horizontal	Pass
4	5591.500	104.67	-2.79	74.0	-30.67	Peak	174.00	150	Horizontal	N/A
4**	5591.500	96.32	-2.79	54.0	-42.32	AV	174.00	150	Horizontal	N/A
5	9703.349	46.73	-3.45	74.0	27.27	Peak	249.00	150	Horizontal	Pass
5**	9703.349	36.28	-3.45	54.0	17.72	AV	249.00	150	Horizontal	Pass
6	15888.975	48.55	-1.50	74.0	25.45	Peak	114.00	150	Horizontal	Pass
6**	15888.975	37.77	-1.50	54.0	16.23	AV	114.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_08.41.10

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac80 CH106 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

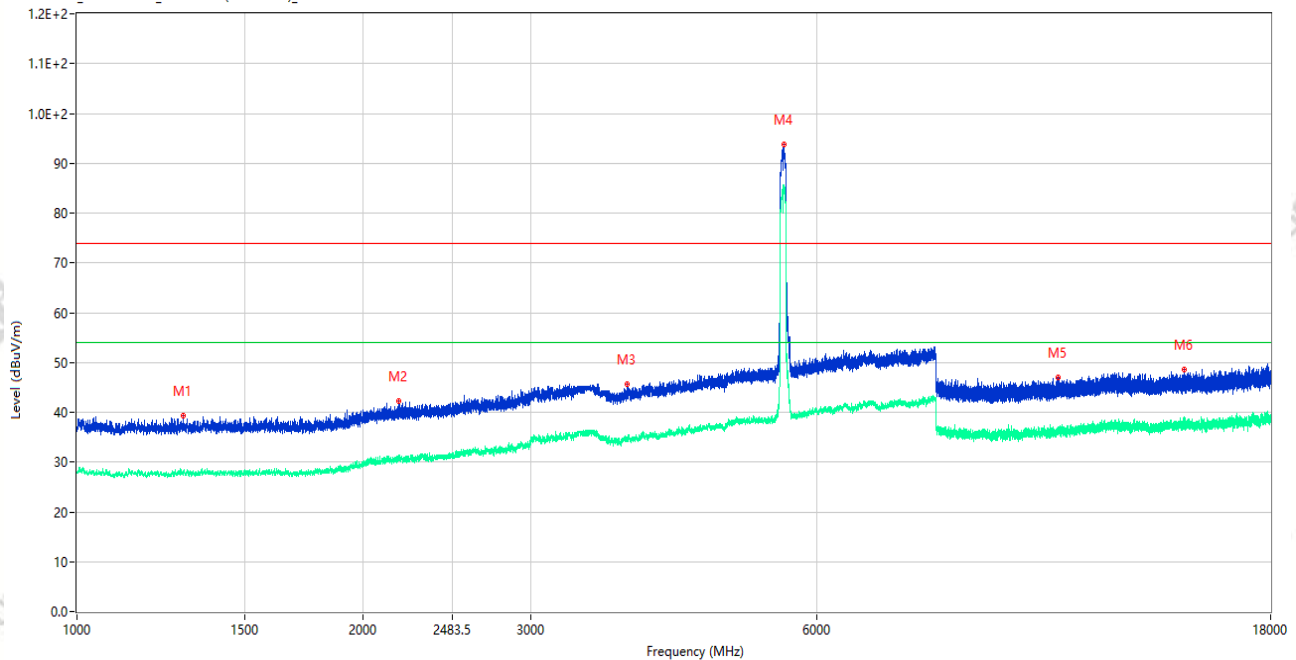

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1292.000	39.36	-15.81	74.0	34.64	Peak	71.00	150	Vertical	Pass
1**	1292.000	27.45	-15.81	54.0	26.55	AV	71.00	150	Vertical	Pass
2	2177.000	42.20	-12.87	74.0	31.80	Peak	321.00	150	Vertical	Pass
2**	2177.000	31.23	-12.87	54.0	22.77	AV	321.00	150	Vertical	Pass
3	3787.000	45.62	-5.34	74.0	28.38	Peak	40.00	150	Vertical	Pass
3**	3787.000	34.41	-5.34	54.0	19.59	AV	40.00	150	Vertical	Pass
4	5536.500	93.69	-2.64	74.0	-19.69	Peak	206.00	150	Vertical	N/A
4**	5536.500	84.69	-2.64	54.0	-30.69	AV	206.00	150	Vertical	N/A
5	10754.288	46.97	-3.51	74.0	27.03	Peak	128.00	150	Vertical	Pass
5**	10754.288	35.70	-3.51	54.0	18.30	AV	128.00	150	Vertical	Pass
6	14586.188	48.65	-2.41	74.0	25.35	Peak	0.00	150	Vertical	Pass
6**	14586.188	38.87	-2.41	54.0	15.13	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_08.46.14

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac80 CH106 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

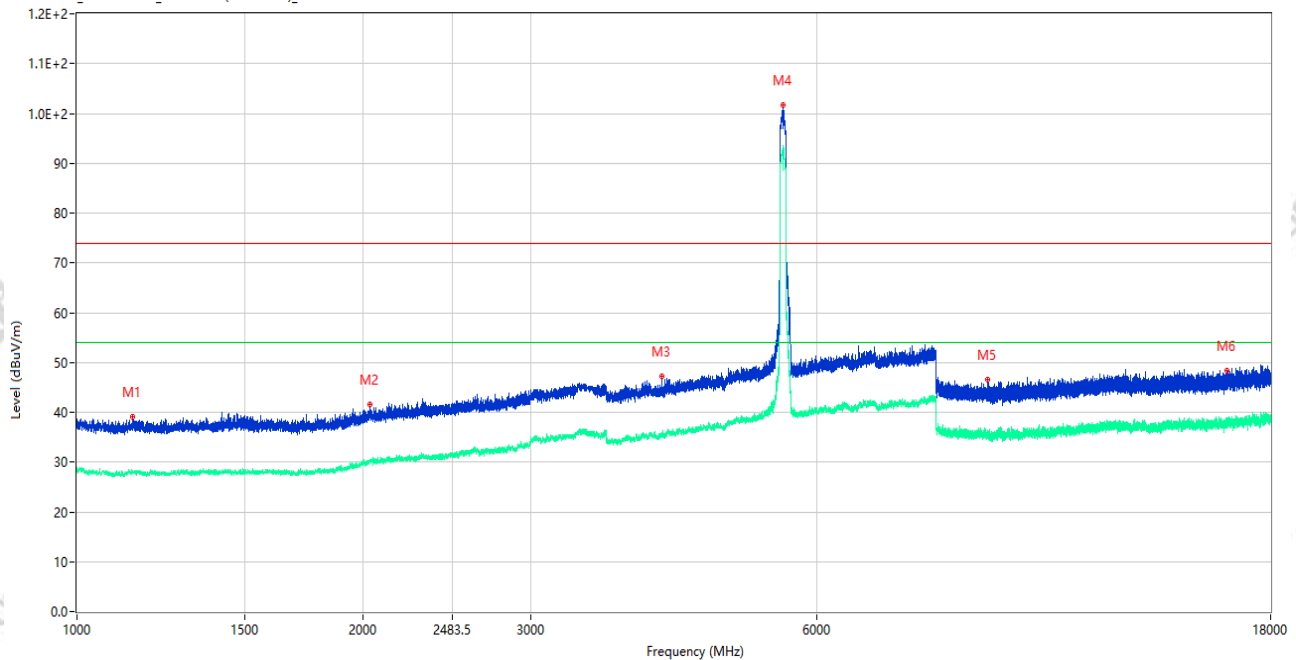

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1144.000	38.99	-15.61	74.0	35.01	Peak	264.00	150	Horizontal	Pass
1**	1144.000	28.29	-15.61	54.0	25.71	AV	264.00	150	Horizontal	Pass
2	2032.250	41.55	-13.48	74.0	32.45	Peak	352.00	150	Horizontal	Pass
2**	2032.250	30.51	-13.48	54.0	23.49	AV	352.00	150	Horizontal	Pass
3	4120.000	47.27	-4.28	74.0	26.73	Peak	78.00	150	Horizontal	Pass
3**	4120.000	35.52	-4.28	54.0	18.48	AV	78.00	150	Horizontal	Pass
4	5525.500	101.37	-2.45	74.0	-27.37	Peak	174.00	150	Horizontal	N/A
4**	5525.500	93.25	-2.45	54.0	-39.25	AV	174.00	150	Horizontal	N/A
5	9064.950	46.58	-4.59	74.0	27.42	Peak	321.00	150	Horizontal	Pass
5**	9064.950	35.38	-4.59	54.0	18.62	AV	321.00	150	Horizontal	Pass
6	16185.862	48.29	-1.30	74.0	25.71	Peak	0.00	150	Horizontal	Pass
6**	16185.862	37.40	-1.30	54.0	16.60	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_10.11.47

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=18.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

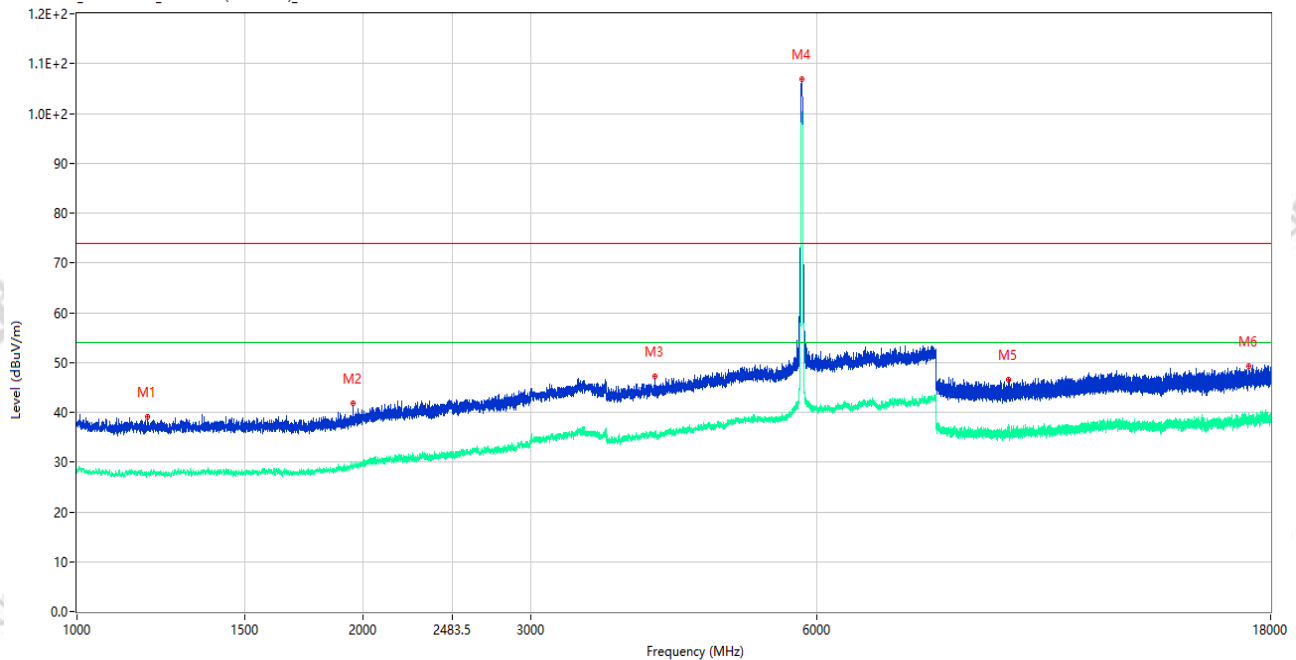

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1185.500	39.06	-15.89	74.0	34.94	Peak	250.00	150	Vertical	Pass
1**	1185.500	27.54	-15.89	54.0	26.46	AV	250.00	150	Vertical	Pass
2	1951.250	41.80	-14.84	74.0	32.20	Peak	360.00	150	Vertical	Pass
2**	1951.250	29.35	-14.84	54.0	24.65	AV	360.00	150	Vertical	Pass
3	4048.500	47.16	-4.19	74.0	26.84	Peak	331.00	150	Vertical	Pass
3**	4048.500	35.58	-4.19	54.0	18.42	AV	331.00	150	Vertical	Pass
4	5786.500	106.88	-1.53	74.0	-32.88	Peak	139.00	150	Vertical	N/A
4**	5786.500	99.61	-1.53	54.0	-45.61	AV	139.00	150	Vertical	N/A
5	9544.463	46.64	-2.67	74.0	27.36	Peak	71.00	150	Vertical	Pass
5**	9544.463	36.92	-2.67	54.0	17.08	AV	71.00	150	Vertical	Pass
6	17071.012	49.34	-0.70	74.0	24.66	Peak	114.00	150	Vertical	Pass
6**	17071.012	38.96	-0.70	54.0	15.04	AV	114.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_10.17.17

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=18.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

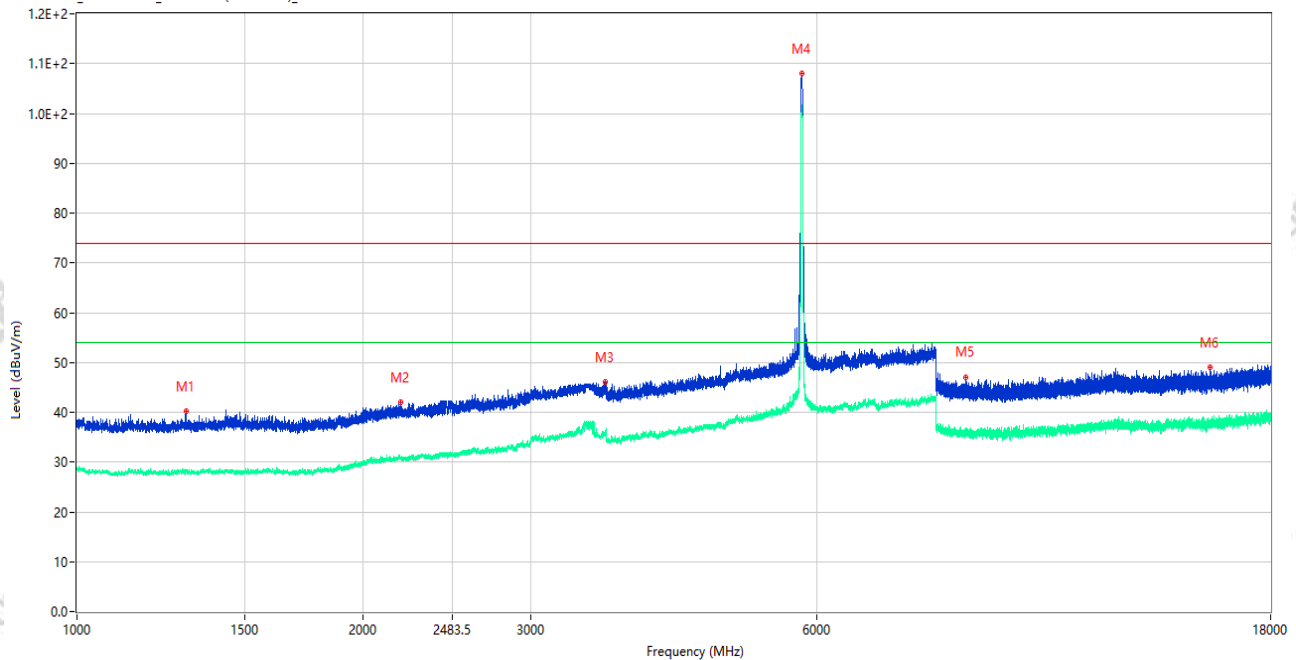

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1301.250	40.24	-15.58	74.0	33.76	Peak	1.00	150	Horizontal	Pass
1**	1301.250	28.29	-15.58	54.0	25.71	AV	1.00	150	Horizontal	Pass
2	2189.750	42.08	-13.31	74.0	31.92	Peak	322.00	150	Horizontal	Pass
2**	2189.750	31.07	-13.31	54.0	22.93	AV	322.00	150	Horizontal	Pass
3	3595.500	46.10	-5.38	74.0	27.90	Peak	77.00	150	Horizontal	Pass
3**	3595.500	36.13	-5.38	54.0	17.87	AV	77.00	150	Horizontal	Pass
4	5784.000	108.07	-1.54	74.0	-34.07	Peak	165.00	150	Horizontal	N/A
4**	5784.000	101.66	-1.54	54.0	-47.66	AV	165.00	150	Horizontal	N/A
5	8610.612	47.11	-5.31	74.0	26.89	Peak	302.00	150	Horizontal	Pass
5**	8610.612	35.64	-5.31	54.0	18.36	AV	302.00	150	Horizontal	Pass
6	15541.425	49.08	-2.51	74.0	24.92	Peak	190.00	150	Horizontal	Pass
6**	15541.425	37.64	-2.51	54.0	16.36	AV	190.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_10.28.08

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac20 CH157

P=17.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

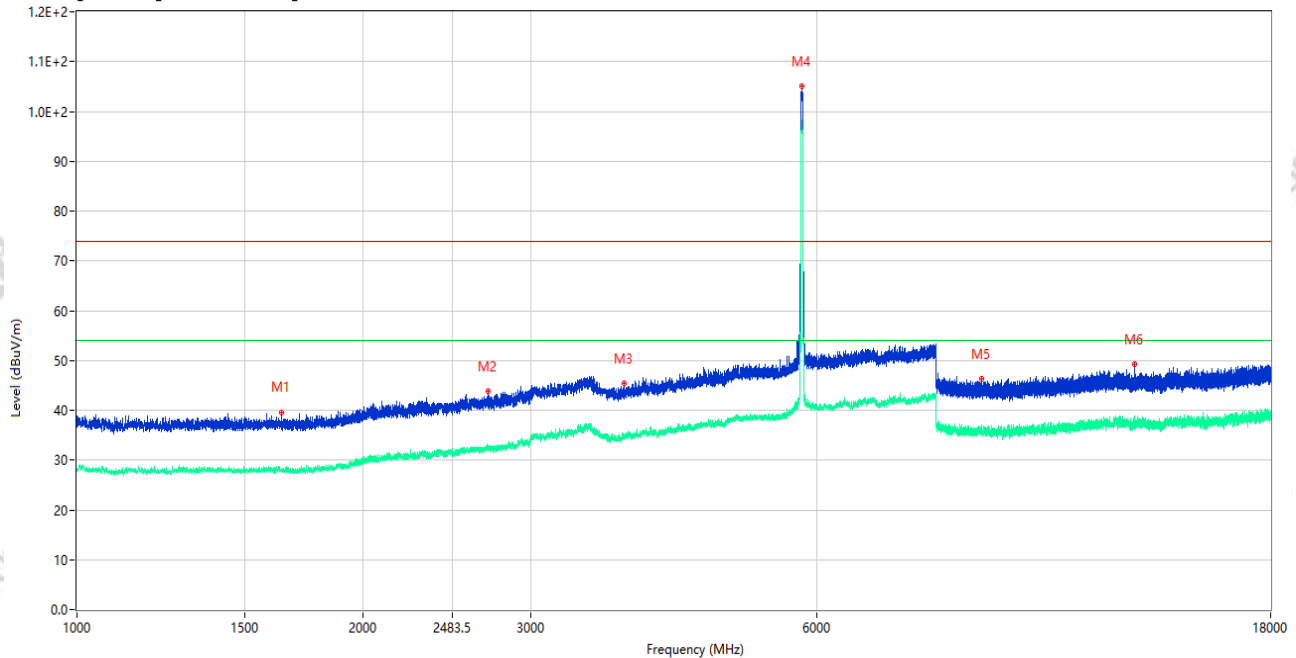

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1641.250	39.44	-16.28	74.0	34.56	Peak	193.00	150	Vertical	Pass
1**	1641.250	28.15	-16.28	54.0	25.85	AV	193.00	150	Vertical	Pass
2	2707.750	43.74	-10.37	74.0	30.26	Peak	57.00	150	Vertical	Pass
2**	2707.750	32.68	-10.37	54.0	21.32	AV	57.00	150	Vertical	Pass
3	3761.500	45.45	-4.60	74.0	28.55	Peak	165.00	150	Vertical	Pass
3**	3761.500	35.03	-4.60	54.0	18.97	AV	165.00	150	Vertical	Pass
4	5786.000	103.73	-1.53	74.0	-29.73	Peak	142.00	150	Vertical	N/A
4**	5786.000	95.66	-1.53	54.0	-41.66	AV	142.00	150	Vertical	N/A
5	8936.463	46.30	-4.29	74.0	27.70	Peak	0.00	150	Vertical	Pass
5**	8936.463	36.12	-4.29	54.0	17.88	AV	0.00	150	Vertical	Pass
6	12945.825	49.17	-2.42	74.0	24.83	Peak	88.00	150	Vertical	Pass
6**	12945.825	37.12	-2.42	54.0	16.88	AV	88.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_10.33.19

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac20 CH157

P=17.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

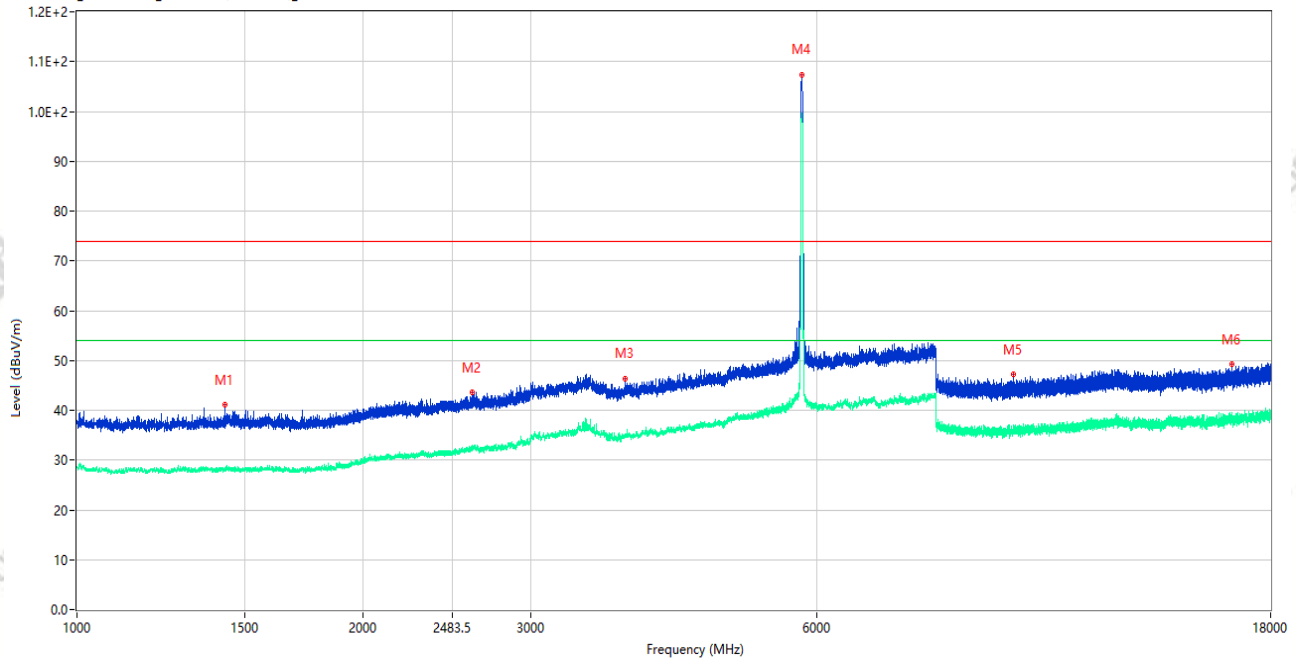

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1430.750	41.06	-15.99	74.0	32.94	Peak	138.00	150	Horizontal	Pass
1**	1430.750	28.09	-15.99	54.0	25.91	AV	138.00	150	Horizontal	Pass
2	2602.250	43.69	-11.32	74.0	30.31	Peak	161.00	150	Horizontal	Pass
2**	2602.250	32.00	-11.32	54.0	22.00	AV	161.00	150	Horizontal	Pass
3	3773.000	46.23	-5.05	74.0	27.77	Peak	4.00	150	Horizontal	Pass
3**	3773.000	34.58	-5.05	54.0	19.42	AV	4.00	150	Horizontal	Pass
4	5783.500	107.45	-1.54	74.0	-33.45	Peak	165.00	150	Horizontal	N/A
4**	5783.500	99.32	-1.54	54.0	-45.32	AV	165.00	150	Horizontal	N/A
5	9659.888	47.30	-3.18	74.0	26.70	Peak	248.00	150	Horizontal	Pass
5**	9659.888	36.15	-3.18	54.0	17.85	AV	248.00	150	Horizontal	Pass
6	16390.875	49.32	-1.31	74.0	24.68	Peak	317.00	150	Horizontal	Pass
6**	16390.875	38.25	-1.31	54.0	15.75	AV	317.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_10.46.37

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac40 CH151

P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

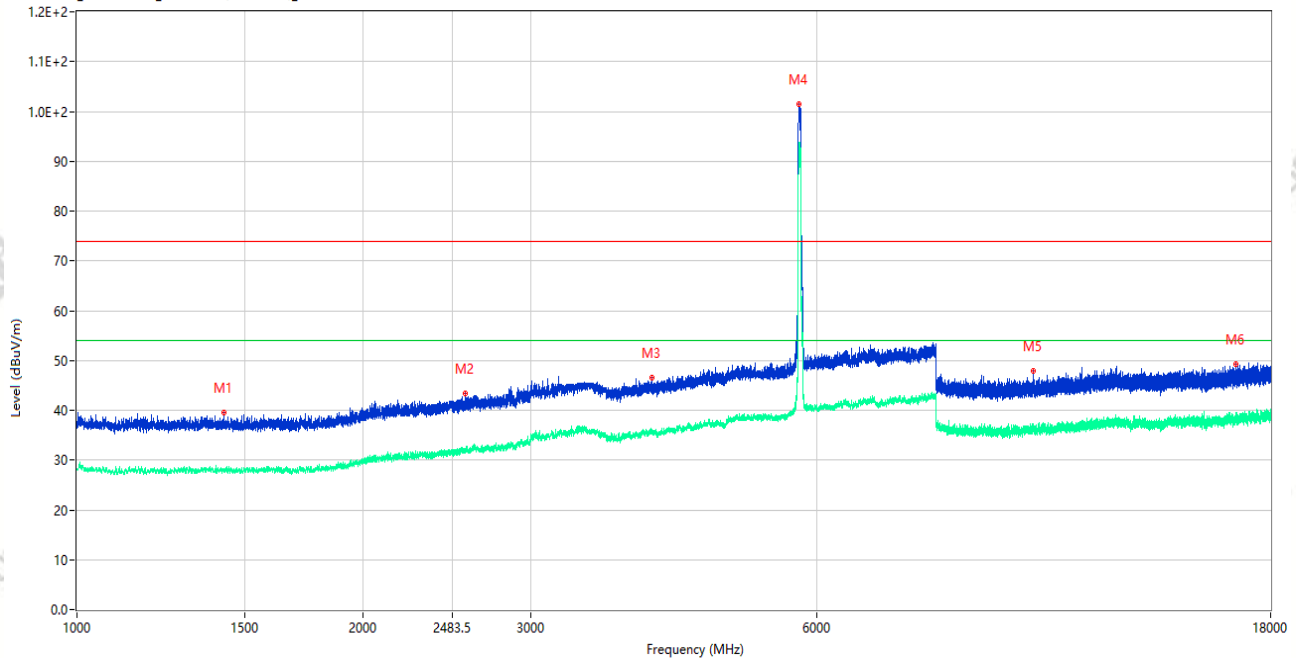

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1427.500	39.63	-15.98	74.0	34.37	Peak	208.00	150	Vertical	Pass
1**	1427.500	27.81	-15.98	54.0	26.19	AV	208.00	150	Vertical	Pass
2	2563.500	43.32	-11.10	74.0	30.68	Peak	360.00	150	Vertical	Pass
2**	2563.500	32.03	-11.10	54.0	21.97	AV	360.00	150	Vertical	Pass
3	4028.500	46.63	-3.94	74.0	27.37	Peak	152.00	150	Vertical	Pass
3**	4028.500	35.56	-3.94	54.0	18.44	AV	152.00	150	Vertical	Pass
4	5748.500	101.41	-2.11	74.0	-27.41	Peak	211.00	150	Vertical	N/A
4**	5748.500	93.41	-2.11	54.0	-39.41	AV	211.00	150	Vertical	N/A
5	10135.599	47.82	-3.92	74.0	26.18	Peak	178.00	150	Vertical	Pass
5**	10135.599	36.57	-3.92	54.0	17.43	AV	178.00	150	Vertical	Pass
6	16545.488	49.33	-1.29	74.0	24.67	Peak	0.00	150	Vertical	Pass
6**	16545.488	37.64	-1.29	54.0	16.36	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_10.41.42

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac40 CH151

P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

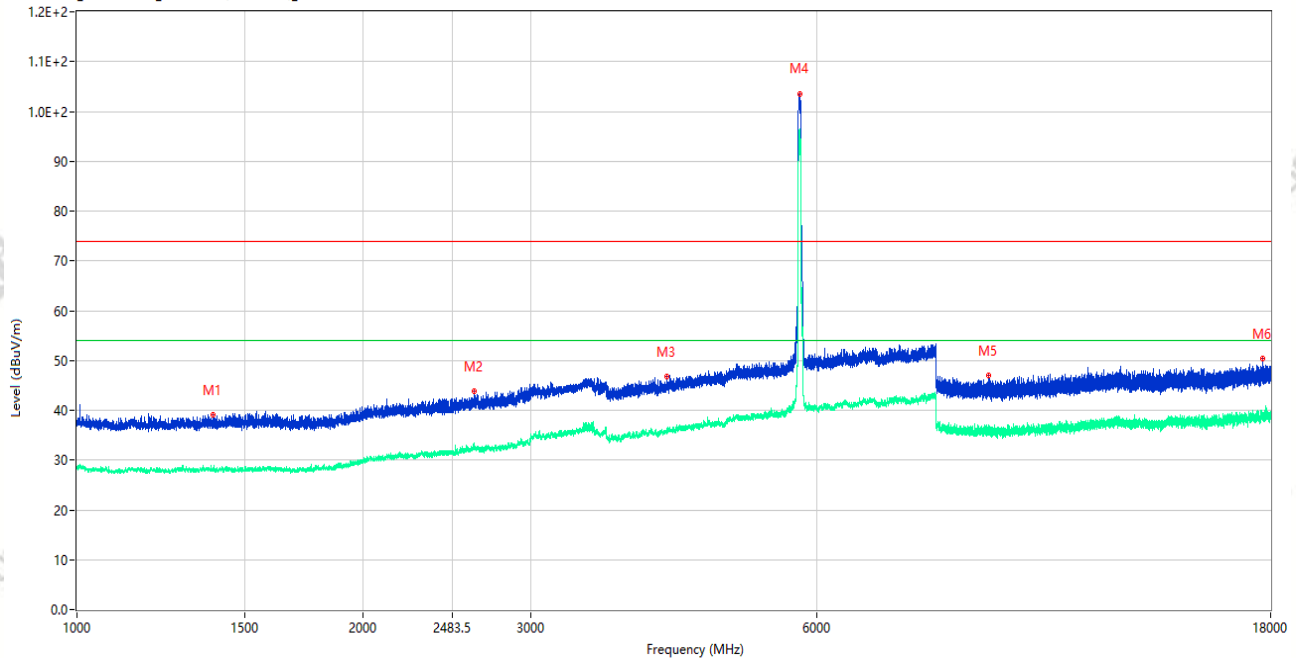

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1389.500	39.18	-15.98	74.0	34.82	Peak	360.00	150	Horizontal	Pass
1**	1389.500	28.02	-15.98	54.0	25.98	AV	360.00	150	Horizontal	Pass
2	2617.250	43.84	-10.34	74.0	30.16	Peak	7.00	150	Horizontal	Pass
2**	2617.250	32.29	-10.34	54.0	21.71	AV	7.00	150	Horizontal	Pass
3	4171.500	46.67	-4.29	74.0	27.33	Peak	320.00	150	Horizontal	Pass
3**	4171.500	35.70	-4.29	54.0	18.30	AV	320.00	150	Horizontal	Pass
4	5753.000	103.61	-2.09	74.0	-29.61	Peak	180.00	150	Horizontal	N/A
4**	5753.000	96.23	-2.09	54.0	-42.23	AV	180.00	150	Horizontal	N/A
5	9097.487	46.94	-4.81	74.0	27.06	Peak	213.00	150	Horizontal	Pass
5**	9097.487	35.71	-4.81	54.0	18.29	AV	213.00	150	Horizontal	Pass
6	17659.275	50.37	0.53	74.0	23.63	Peak	358.00	150	Horizontal	Pass
6**	17659.275	39.22	0.53	54.0	14.78	AV	358.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_11.02.54

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac80 CH155 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

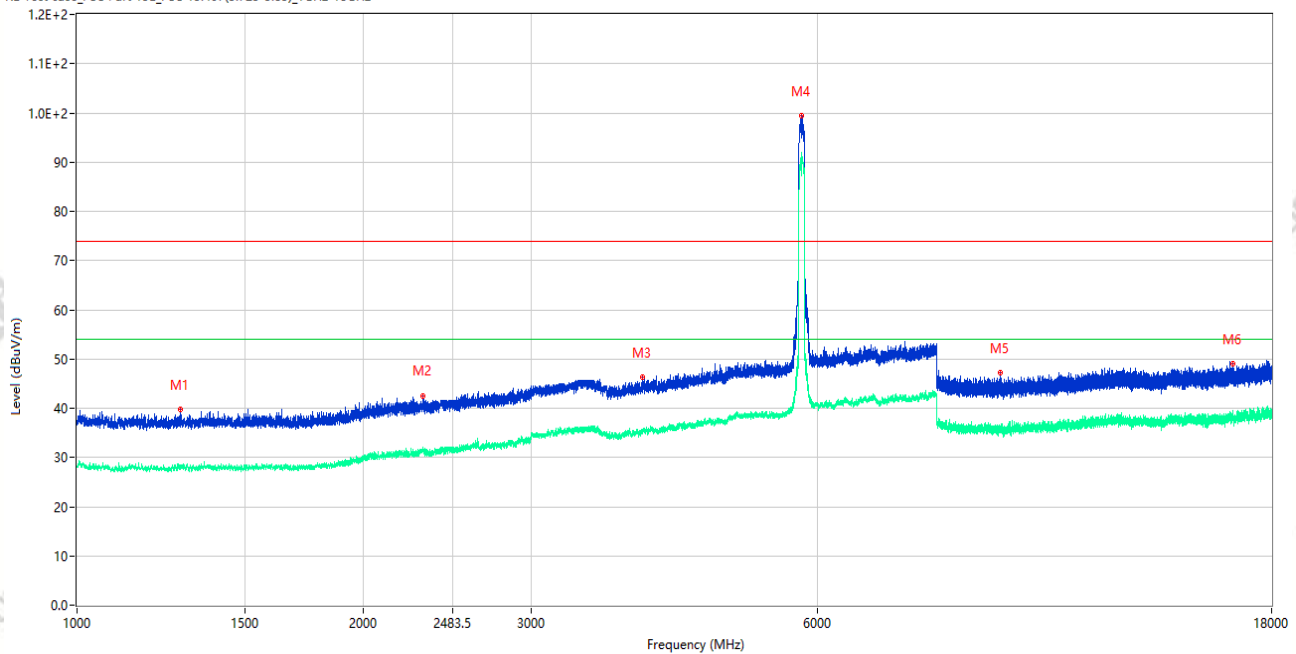

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1284.500	39.75	-15.92	74.0	34.25	Peak	252.00	150	Vertical	Pass
1**	1284.500	27.54	-15.92	54.0	26.46	AV	252.00	150	Vertical	Pass
2	2308.250	42.41	-12.54	74.0	31.59	Peak	51.00	150	Vertical	Pass
2**	2308.250	31.83	-12.54	54.0	22.17	AV	51.00	150	Vertical	Pass
3	3931.000	46.44	-3.53	74.0	27.56	Peak	359.00	150	Vertical	Pass
3**	3931.000	35.63	-3.53	54.0	18.37	AV	359.00	150	Vertical	Pass
4	5771.500	99.36	-1.65	74.0	-25.36	Peak	211.00	150	Vertical	N/A
4**	5771.500	91.71	-1.65	54.0	-37.71	AV	211.00	150	Vertical	N/A
5	9338.550	47.23	-5.15	74.0	26.77	Peak	266.00	150	Vertical	Pass
5**	9338.550	35.41	-5.15	54.0	18.59	AV	266.00	150	Vertical	Pass
6	16394.287	48.95	-1.13	74.0	25.05	Peak	64.00	150	Vertical	Pass
6**	16394.287	39.02	-1.13	54.0	14.98	AV	64.00	150	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-16_11.07.45

EUT Name: Tablet

Temp.(°C): 23.2

Model Number: PN500CC

Humidity (%RH): 51

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac80 CH155 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A02+数据线: A03

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

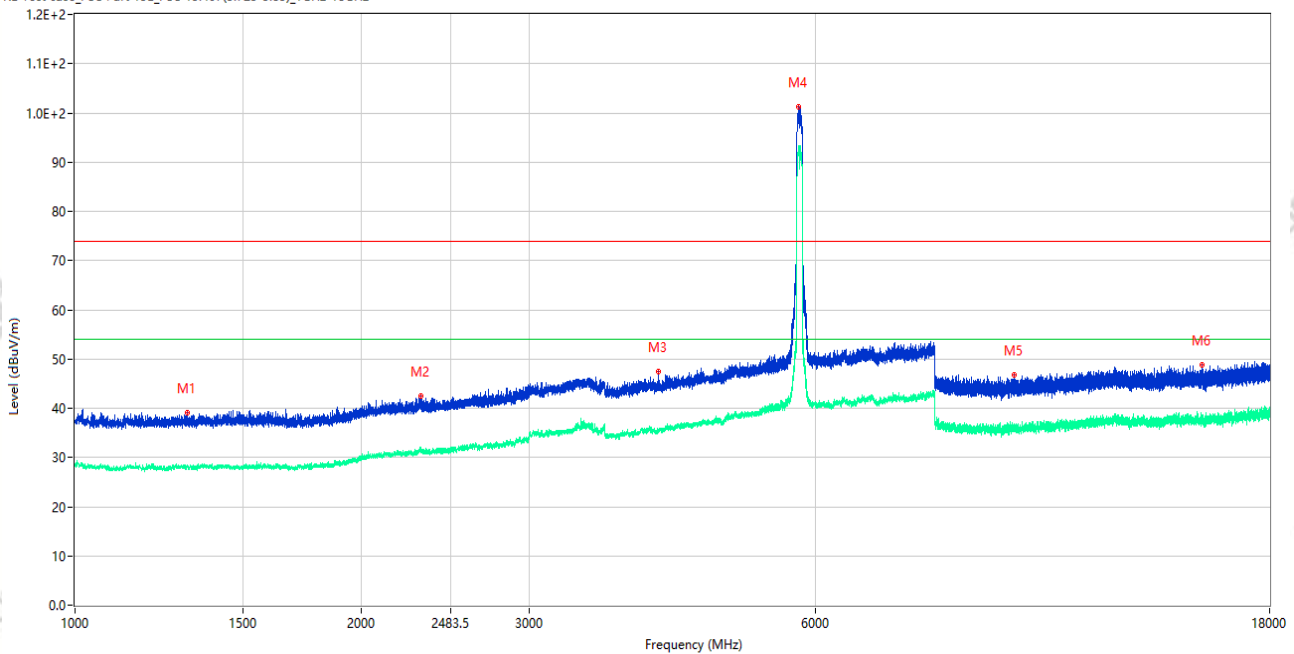

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1313.250	38.99	-15.83	74.0	35.01	Peak	151.00	150	Horizontal	Pass
1**	1313.250	28.38	-15.83	54.0	25.62	AV	151.00	150	Horizontal	Pass
2	2309.000	42.47	-12.52	74.0	31.53	Peak	34.00	150	Horizontal	Pass
2**	2309.000	31.11	-12.52	54.0	22.89	AV	34.00	150	Horizontal	Pass
3	4105.000	47.44	-4.48	74.0	26.56	Peak	189.00	150	Horizontal	Pass
3**	4105.000	35.24	-4.48	54.0	18.76	AV	189.00	150	Horizontal	Pass
4	5753.500	101.30	-2.09	74.0	-27.30	Peak	166.00	150	Horizontal	N/A
4**	5753.500	92.10	-2.09	54.0	-38.10	AV	166.00	150	Horizontal	N/A
5	9707.625	46.78	-3.54	74.0	27.22	Peak	355.00	150	Horizontal	Pass
5**	9707.625	36.54	-3.54	54.0	17.46	AV	355.00	150	Horizontal	Pass
6	15273.150	48.78	-1.40	74.0	25.22	Peak	64.00	150	Horizontal	Pass
6**	15273.150	37.74	-1.40	54.0	16.26	AV	64.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-17_14.39.52

EUT Name: Tablet

Temp.(°C): 23.3

Model Number: PN500CC

Humidity (%RH): 50

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C


Work Mode: Normal Linking(5.2G WIFI)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A02+数据线: A03

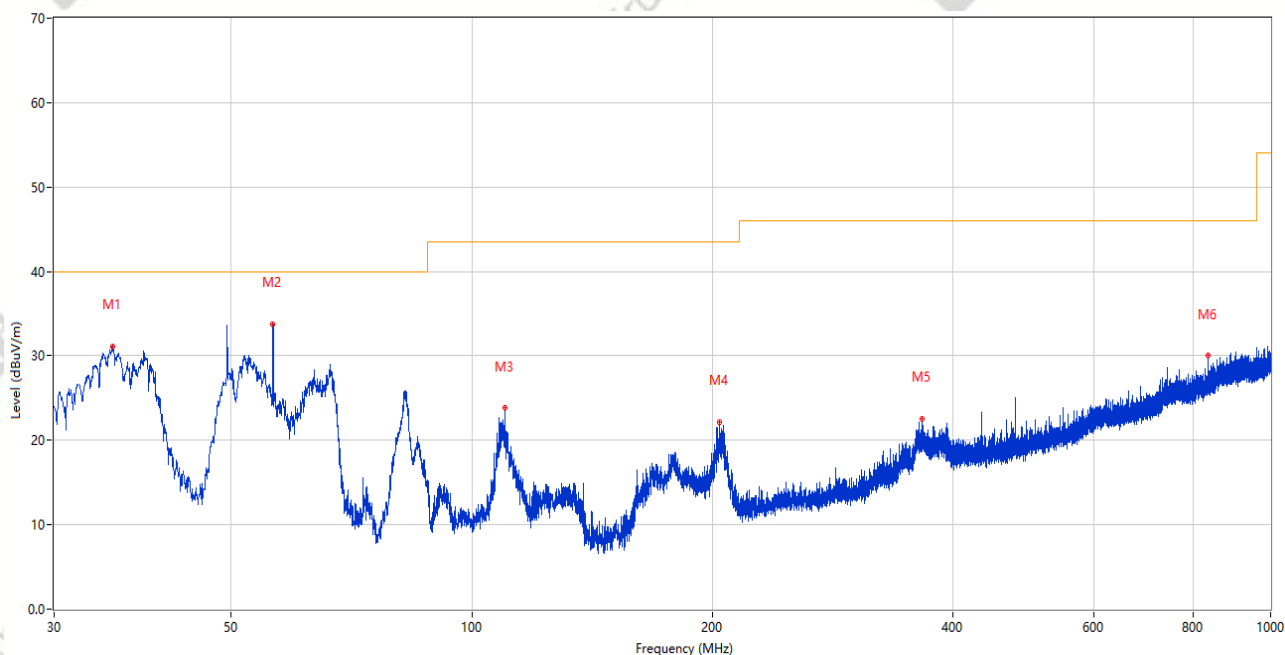

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	35.480	31.15	-27.57	40.0	8.85	Peak	108.00	100	Vertical	Pass
2	56.384	33.75	-25.28	40.0	6.25	Peak	345.00	100	Vertical	Pass
3	110.025	23.80	-26.57	43.5	19.70	Peak	137.00	200	Vertical	Pass
4	203.970	22.21	-26.28	43.5	21.29	Peak	158.00	100	Vertical	Pass
5	366.105	22.60	-21.57	46.0	23.40	Peak	281.00	100	Vertical	Pass
6	834.324	29.99	-10.82	46.0	16.01	Peak	14.00	100	Vertical	Pass

Test Result

Project Number: P-CC26090143

Test Time: 2026-09-17_14.36.46

EUT Name: Tablet

Temp.(°C): 23.3

Model Number: PN500CC

Humidity (%RH): 50

Sample Number: CC26090072-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C


Work Mode: Normal Linking(5.2G WIFI)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A02+数据线: A03

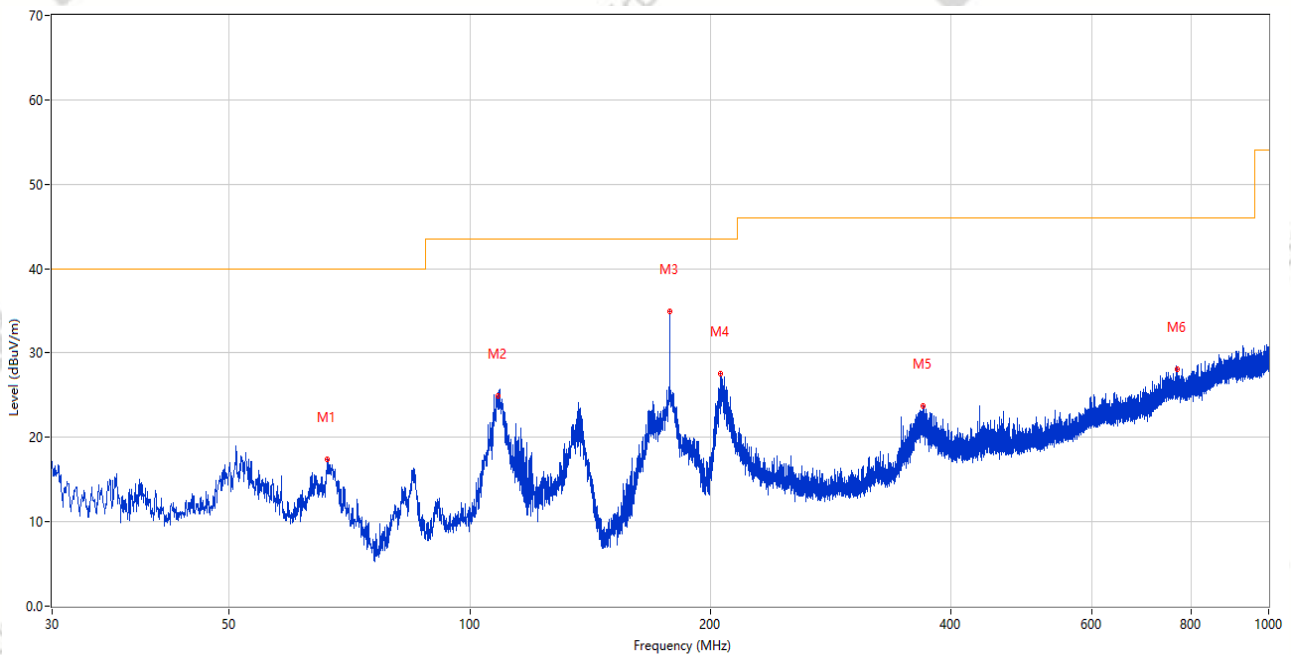

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	66.278	17.45	-27.76	40.0	22.55	Peak	82.00	100	Horizontal	Pass
2	108.570	24.87	-26.52	43.5	18.63	Peak	173.00	100	Horizontal	Pass
3	177.779	34.93	-28.03	43.5	8.57	Peak	191.00	100	Horizontal	Pass
4	206.249	27.52	-26.35	43.5	15.98	Peak	36.00	100	Horizontal	Pass
5	369.694	23.78	-21.45	46.0	22.22	Peak	225.00	100	Horizontal	Pass
6	768.703	28.05	-11.97	46.0	17.95	Peak	279.00	100	Horizontal	Pass