Certificate #5505.02

TEST REPORT FOR BLE TESTING

Report No.: SRTC2023-9004(F)-23032901(E)

Product Name: Smart Phone

Product ID: APYHRO00325

Applicant: Sharp Corporation

Manufacturer: Sharp Corporation

Specification: FCC Part 15 Subpart C (2022)

FCC ID: APYHRO00325

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30Shixing Street, Shijingshan District, Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

1. GENERAL INFORMATION 2

1.1 NOTES OF THE TEST REPORT 2
1.2 INFORMATION ABOUT THE TESTING LABORATORY 2
1.3 APPLICANT'S DETAILS 2
1.4 MANUFACTURER'S DETAILS 2
1.5 TEST ENVIRONMENT 3

2 DESCRIPTION OF THE DEVICE UNDER TEST 3

2.1FINAL EQUIPMENT BUILD STATUS 3
2.2DESCRIPTION OF TEST MODES 4
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL 4
2.3 DUTY CYCLE OF TEST SIGNAL 6
2.4 EUT OPERATING CONDITIONS 6
2.5 SUPPORT EQUIPMENT 6

3 REFERENCE SPECIFICATION 6

4 KEY TO NOTES AND RESULT CODES 6

5 RESULT SUMMARY 8

6 TEST RESULT 10

6.1 6DB BANDWIDTH 10
6.2 TRANSMITTER OUTPUT POWER 11
6.3 TRANSMITTER POWER SPECTRAL DENSITY 12
6.4 CONDUCTED OUT OF BAND EMISSION MEASUREMENT 13
6.5 BAND-EDGE MEASUREMENT 14
6.6 SPURIOUS RADIATED EMISSIONS 15
6.7 AC POWER LINE CONDUCTED EMISSION 20

7 MEASUREMENT UNCERTAINTIES 22

8 TEST EQUIPMENTS 23

APPENDIX A – TEST DATA OF CONDUCTED EMISSION 24

APPENDIX B – TEST DATA OF RADIATED EMISSION 74

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Test Site 1:	15th Building, No.30 Shixing Street, Shijingshan District
Test Site 2:	No.80, Zhaojiachang, Beizang, Daxing District
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn
Designation Number:	CN1267
Registration number:	239125

1.3 Applicant’s details

Company:	Sharp Corporation
Address:	1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan

1.4 Manufacturer’s details

Company:	Sharp Corporation
Address:	1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2023-03-29
Testing Start Date:	2023-03-30
Testing End Date:	2023-05-04

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	40
Maximum Extreme	55	---
Minimum Extreme	-10	---

Normal Supply Voltage (V d.c.):	4.0
Maximum Extreme Supply Voltage (V d.c.):	4.0
Minimum Extreme Supply Voltage (V d.c.):	3.7

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1Final Equipment Build Status

Frequency Range:	2.402GHz~2.480GHz
Number of Channel:	40
Modulation Type:	GFSK
Equipment Class:	DTS
Channel Spacing:	2MHz
Data Rate:	LE 1Mbps/2Mbps/ Coded 125K/coded 500K
Power Supply:	Battery/DC supply
Software Revision:	NA
Hardware Revision:	PVT(Remodeled to the equivalent of MP products)
IMEI:	004401231335633
Antenna type:	Refer to Note
Antenna connector:	Refer to Note

Antenna requirement (FCC part 15.203)

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

•The antenna(s) of the EUT is permanently attached.

•There are no provisions for connection to an external antenna.

Note: The antenna provides to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency band	Antenna type	Connecter Type
N/A	N/A	ANT4：-3.4dBi ANT8：-0.4dBi	2.4GHz~2.4835GHz	PIFA	N/A
The antenna gain is provided by the customer and involved in the calculation and influence of the test results. Our laboratory takes the value declared by the customer as the criterion, and the customer is responsible for the antenna gain value. Manufacturers ensure that their designs will not be modified by the user or third party's arbitrary antenna parameters and performance.					

2.2Description of Test Modes

40 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE ≥ 1G	RE<1G	PLC	APCM	-
GFSK	√	√	√	√	-

Where
RE ≥ 1G: Radiated Emission above 1GHz
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	19	GFSK	1

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	19	GFSK	1

Power Line Conducted Emission Test:
Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	19	GFSK	1

Antenna Port Conducted Measurement:
This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0, 19, 39	GFSK	1

2.3 Duty Cycle of Test Signal

Duty cycle of test signal is < 98 %, duty factor shall be considered.
ANT4：

Modulation Type	Duty Cycle	Correction factor(dB)
GFSK (LE 1Mbps)	64.50%	1.90
GFSK (LE 2Mbps)	58.90%	2.30
Coded 125K	97.60%	0.11
Coded 500K	91.50%	0.39

ANT8：

Modulation Type	Duty Cycle	Correction factor(dB)
GFSK (LE 1Mbps)	64.50%	1.90
GFSK (LE 2Mbps)	58.90%	2.30
Coded 125K	97.60%	0.11
Coded 500K	91.50%	0.39

2.4 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:
N/A

3 REFERENCE SPECIFICATION

Specification	Version	Title
FCC part15 Subpart C	2022	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 V05R02r02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

4 KEY TO NOTES AND RESULT CODES

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been

	met.
N/T	Test case is not tested.

5 RESULT SUMMARY

No.	Test case	Reference	Verdict	Test Site
1	6dB Bandwidth	15.247(a)(2)	Pass	1
2	Transmitter Output Power	15.247(b)(3))	Pass	1
3	Transmitter Power Spectral Density	15.247(e))	Pass	1
4	Conducted Out of band emission measurement	15.247(d)	Pass	1
5	Band-edge	15.247(d)	Pass	1
6	Antenna requirement	15.203	Pass(refer to section 2.1)	1

Test Site 1: 15th Building, No.30 Shixing Street, Shijingshan District

This Test Report Is Approved by: Mr. Peng Zhen	Review by: Mr. Li Bin
Tested and Issued by: Mr. Du Wei	Approved date: 20230509

No.	Test case	Reference	Verdict	Test Site
7	Band-edge	15.247(d)	Pass	2
8	Spurious Radiated Emissions	15.205/15.209/15.247(d)	Pass	2
9	AC Power line Conducted Emission	15.207	Pass	2

Test Site 2: No.80, Zhaojiachang, Beizang, Daxing District

This Test Report Is Approved by: Mr. Liu Wei	Review by: Mr. Guo Yu
Tested and Issued by: Mr. Dong Qifeng	Approved date: 20230509

6 TEST RESULT

6.1 6dB Bandwidth

6.1.1 Test limit

Part15.247 (a) (2)
The minimum permissible 6dB bandwidth is 500 kHz

6.1.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2
KDB 558074 D01 v05r02 – Section 8.2

6.1.3 Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW ≥ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

6.1.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.1.5 Test result

The test results are shown in Appendix A.

6.2 Transmitter Output Power

6.2.1 Test limit

Part15.247 (b) (3)
The maximum permissible conducted output power is 1 Watt.

6.2.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3
ANSI C63.10-2013 – Section 11.9.2.2.4
KDB 558074 D01 v05r02 – Section 8.3.1.3

6.2.3Test Settings

Peak Power Measurement
The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
Average Power Measurement
Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.2.4Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.2.5Test result

The test results are shown in Appendix A.

6.3 Transmitter Power Spectral Density

6.3.1Test limit

Part15.247 (e)
The maximum permissible power spectral density is 8.0dBm in any 3 kHz band.

6.3.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD
KDB 558074 D01 v05r02 – Section 8.4

6.3.3 Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3 kHz
4. VBW = 10 kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.3.4Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.3.5 Test result

The test results are shown in Appendix A.

6.4 Conducted Out of band emission measurement

6.4.1Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.4.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.5

6.4.3 Reference level measurement Settings

Establish a reference level by using the following procedure:
a) Set instrument center frequency to DTS channel center frequency.
b) Set the span to ≥ 1.5 MHz
c) Set the RBW = 100 kHz.
d) Set the VBW ≥ 300 kHz.
e) Detector = peak.
f) Sweep time = auto couple.
g) Trace mode = max hold.
h) Allow trace to fully stabilize.
i) Use the peak marker function to determine the maximum PSD level.

6.4.4Test Settings

a) Set the center frequency and span to encompass frequency range to be measured.
b) Set the RBW = 100 kHz.
c) Set the VBW ≥ 300 kHz.
d) Detector = peak.
e) Set span to encompass the spectrum to be examined
f) Sweep time = auto couple.
g) Trace mode = max hold.
h) Allow trace to fully stabilize.
i) Use the peak marker function to determine the maximum amplitude level.

6.4.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.4.6Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.5 Band-edge measurement

6.5.1Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.5.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

6.5.3 Reference level measurement Settings

Establish a reference level by using the following procedure:
a) Set instrument center frequency to DTS channel center frequency.
b) Set the span to ≥ 1.5 MHz
c) Set the RBW = 100 kHz.
d) Set the VBW ≥ 300 kHz.
e) Detector = peak.
f) Sweep time = auto couple.
g) Trace mode = max hold.
h) Allow trace to fully stabilize.
i) Use the peak marker function to determine the maximum PSD level.

6.5.4Test Settings

a) Set the center frequency and span to encompass frequency range to be measured.
b) Set the RBW = 100 kHz.
c) Set the VBW ≥ 300 kHz.
d) Detector = peak.
e) Set span to encompass the spectrum to be examined
f) Sweep time = auto couple.
g) Trace mode = max hold.
h) Allow trace to fully stabilize.
i) Use the peak marker function to determine the maximum amplitude level.

6.5.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.5.6Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.6 Spurious Radiated Emissions

6.6.1 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

6.6.2 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device

Frequency [MHz]	Field strength [μV/m]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30～88	100	3
88～216	150	3
216～960	200	3
Above 960	500	3

Radiated Limits

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dBμV/m) = 20 log (Limit (μV/m)/1μV/m)

Frequency [MHz]	Detector	Unit (dBμV/m)
30～88	Quasi-peak	40.0
88～216	Quasi-peak	43.5
216～960	Quasi-peak	46.0
960～1000	Quasi-peak	54.0
1000～5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits

6.6.3 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v05r02– Section 12.2.7

For Radiated emission below 30MHz

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
c. Both X and Y axes of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

NOTE:
1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

2. Signals below 30MHz are not recorded in the report because they are lower than the limits by more than 20dB.

For Radiated emission above 30MHz
a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
f. The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:
1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

6.6.4Test Settings

Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)

Frequency	Detector
＜1000MHz	Quasi-peak
>1000MHz	Peak and average

Peak Field Strength Measurements per Section 12.2.7of KDB 558074 (Part 15.35)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz

3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.5 Test Setup

For Radiated emission below 30MHz

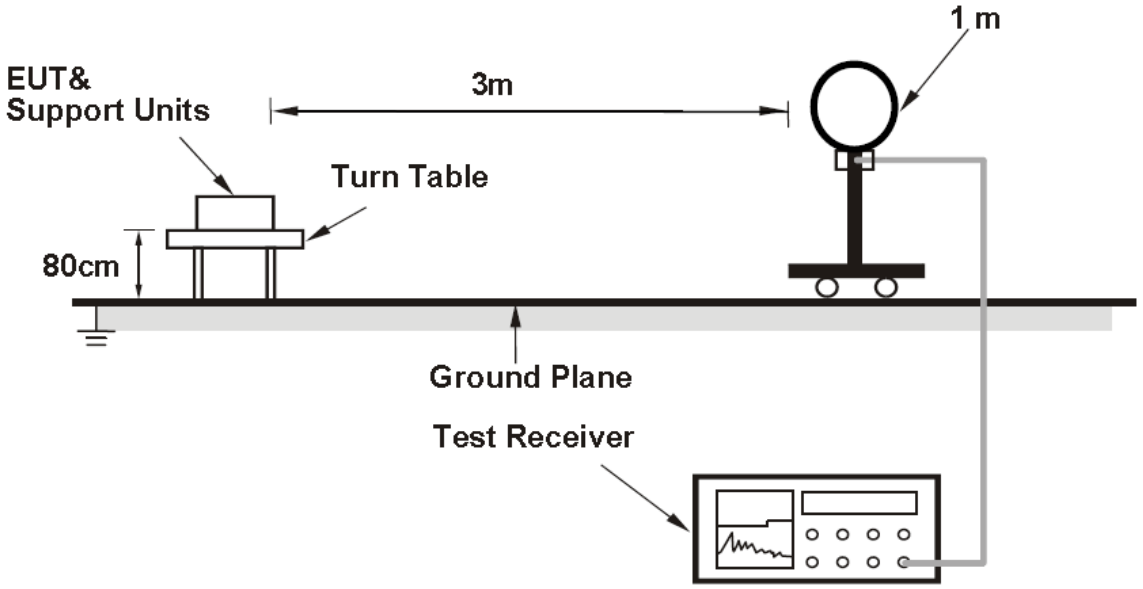

For Radiated emission 30MHz to 1GHz

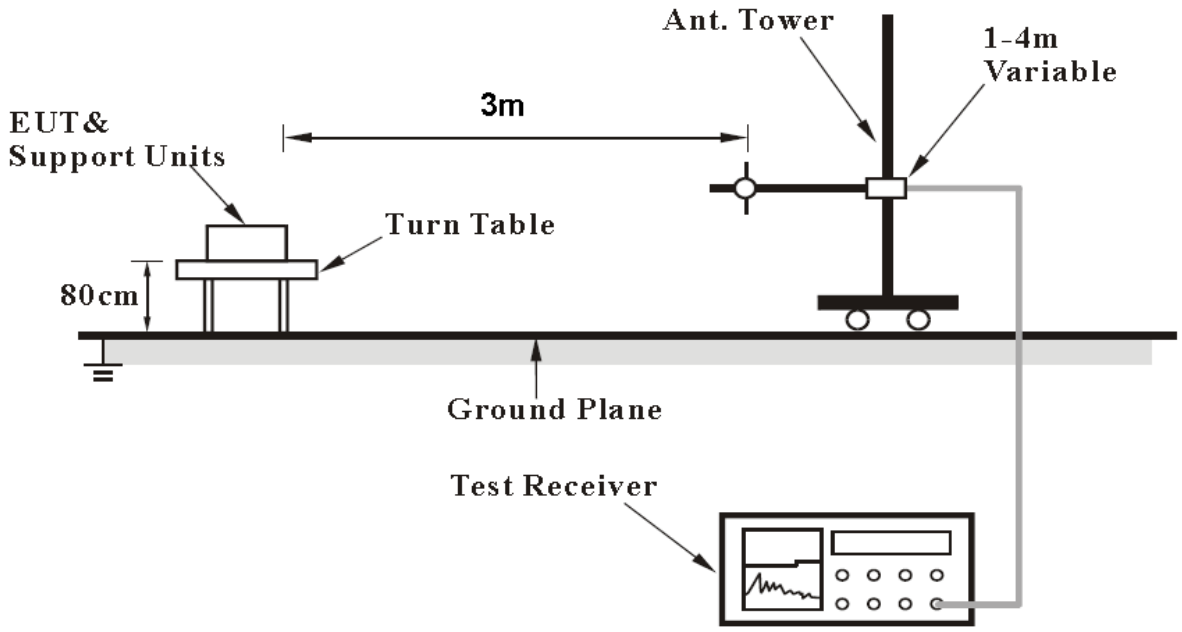

For Radiated emission above 1GHz

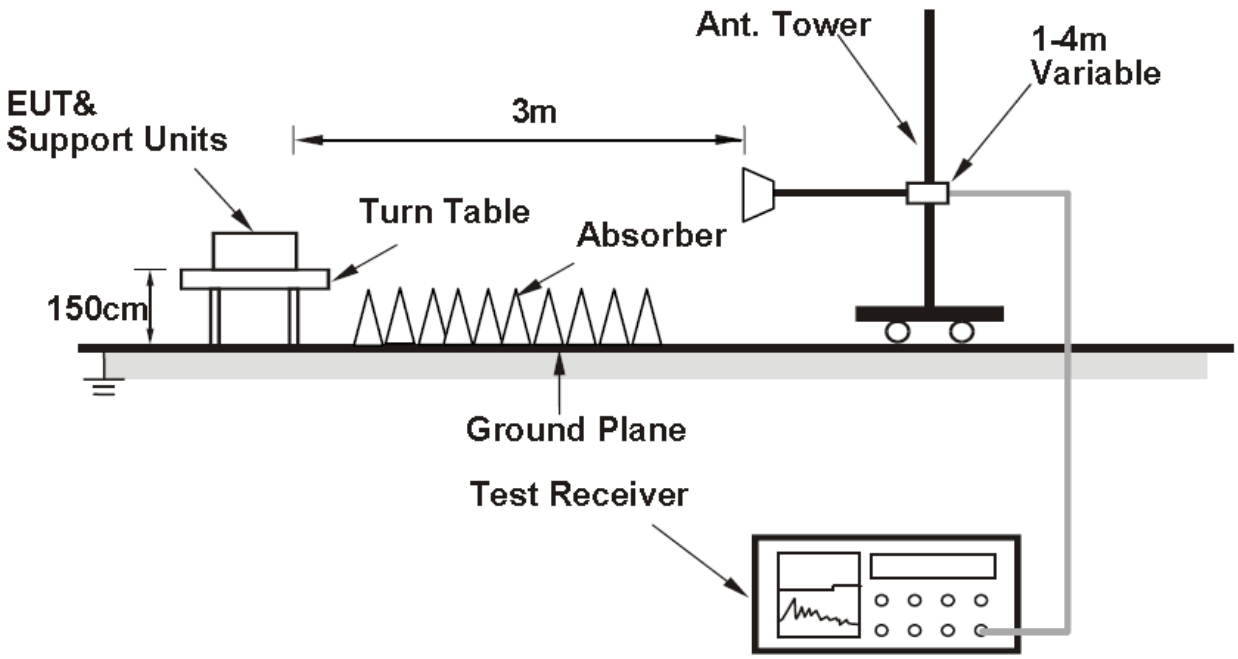

6.6.6 Test result

The test results are shown in Appendix B.

6.7 AC Power line Conducted Emission

6.7.1Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

6.7.2 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.

b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit -20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.
The EUT shall test under the power AC120V/60Hz.

6.7.3 Test Setup

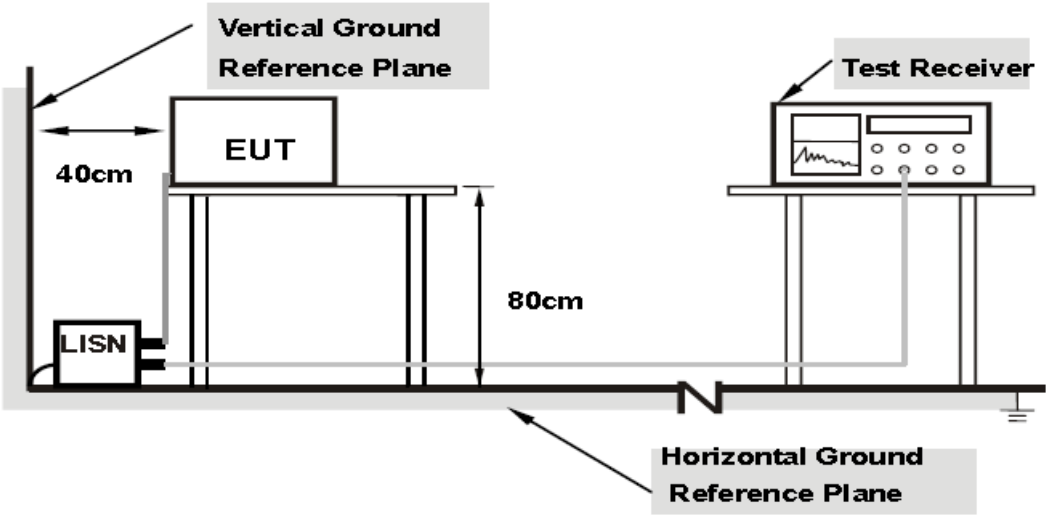

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.4 Test result

The test results are shown in AppendixB.

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
6dB Bandwidth	3kHz	
Peak power output	0.67dB	
Transmitter Power Spectral Density	0.75dB	
Band edge compliance	1.20dB	
Conducted Out of band emission measurement	30MHz～1GHz	2.83dB
	1GHz～12.75GHz	2.50dB
	12.75GHz～25GHz	2.75dB
Spurious Radiated Emissions	30MHz～200MHz	4.88dB
	200MHz～1GHz	4.87dB
	1GHz～18GHz	4.58dB
	18GHz~40GHz	4.35dB
AC Power line Conducted Emission	3.92dB	

8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer / FSV	ROHDE & SCHWARZ	101065	2022.06.21	2023.06.20
2.	Signal Analyzer / N9020A	Agilent	MY48010771	2022.05.18	2023.05.17
3.	Bluetooth Test Set / MT8852B	Anritsu	1329003	2022.06.21	2023.06.20
4.	Power Divider / 11667A	HP	19632	2022.06.21	2023.06.20
5.	Signal Generator / SMBV100A	R&S	260910	2022.06.21	2023.06.20
6.	Temperature chamber / SH241	ESPEC	92013758	2022.06.21	2023.06.20
7.	Power Meter E4416A	Agilent	MY52370013	2023.03.06	2024.03.05
8.	Power Sensor E9323A	Agilent	MY52150008	2023.03.06	2024.03.05
9.	Fully-Anechoic Chamber / 12.65m×8.03m×7.50m	FRANKONIA	-----	-----	-----
10.	Semi-Anechoic/Chamber / 23.18m×16.88m×9.60m	FRANKONIA	---	-----	-----
11.	Turn table Diameter:1m	FRANKONIA	-----	-----	-----
12.	Turn table Diameter:5m	FRANKONIA	-----	-----	-----
13.	Antenna master FAC(MA4.0)	MATURO	-----	-----	-----
14.	Antenna master SAC(MA4.0)	MATURO	-----	-----	-----
15.	Shielding room / 9.080m×5.255m×3.525m	FRANKONIA	-----	-----	-----
16.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100512	2022.06.21	2023.06.20
17.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100513	2022.06.21	2023.06.20
18.	Ultra log antenna / HL562	R&S	100016	2022.06.21	2023.06.20
19.	Receive antenna /3160-09	SCHWARZ-BECK	002058-002	2022.06.21	2023.06.20
20.	EMI test receiver / ESI 40	R&S	100015	2022.06.21	2023.06.20
21.	EMI test receiver / ESCS30	R&S	100029	2022.06.21	2023.06.20
22.	Receive antenna / HL562	R&S	100167	2022.06.21	2023.06.20
23.	AMN / ENV216	R&S	3560.6550.12	2022.06.21	2023.06.20
24.	WLAN AP WIA3300-20	SKSpruce	8152017060700339	---	---
25.	Notebook E470c	Lenovo	PF10UZW7	---	---
26.	Loop Antenna	R&S	100340	2022.08.21	2023.08.20
27.	FCC auto test system / RT9200BW-2	Radiosky	V2.05	/	/
28.	EMI test software / EMC32	R&S	V10.20.01	/	/

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

Offset 12.1dB = Attenuator + Temporary antenna connector loss + Cable loss

BLE（ANT4）

1 Duty Cycle and Antenna Gain

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK (LE 1Mbps)	2402	Fig.1	64.50%	1.90	-3.40

Note:Correction Factor=10*log(1/Duty Cycle)

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK (LE 2Mbps)	2402	Fig.2	58.90%	2.30	-3.40

Note:Correction Factor=10*log(1/Duty Cycle)

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
Coded 125K	2402	Fig.3	97.60%	0.11	-3.40

Note:Correction Factor=10*log(1/Duty Cycle)

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
Coded 500K	2402	Fig.4	91.50%	0.39	-3.40

Note:Correction Factor=10*log(1/Duty Cycle)

Test Mode: GFSK (LE 1Mbps)

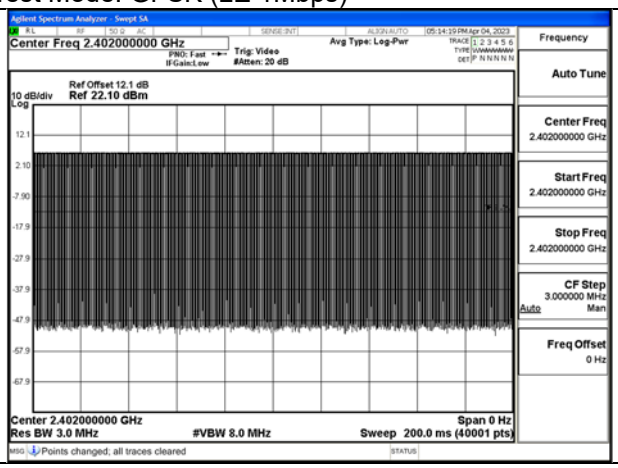

Fig.1

Test Mode: GFSK (LE 2Mbps)

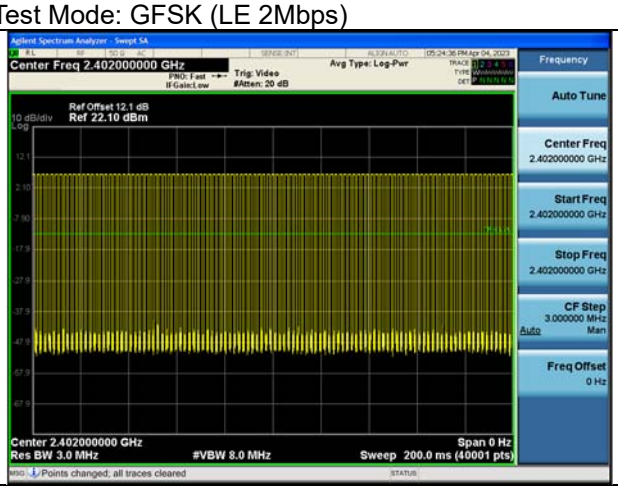

Fig.2

Test Mode: Coded 125K

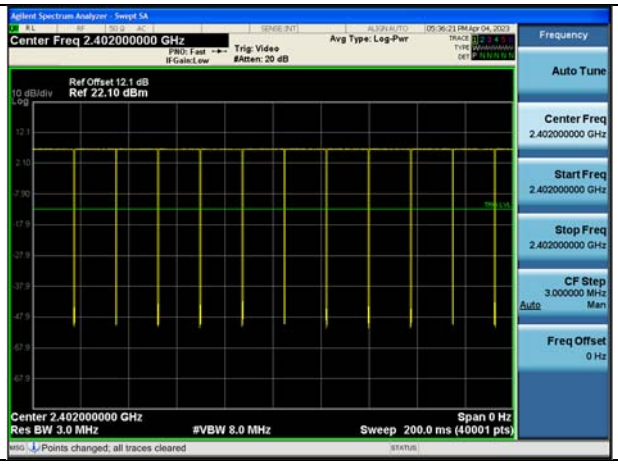

Fig.3

Test Mode: Coded 500K

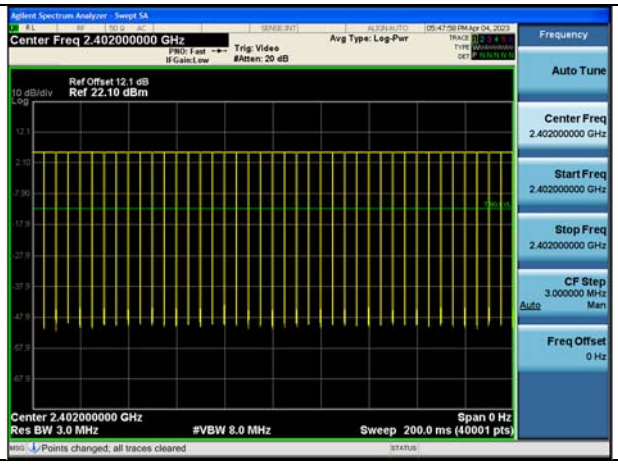

Fig.4

2 EIRP

Conducted Power

Modulation type	Conducted Peak Power(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	6.55	6.36	6.88
GFSK (LE 2Mbps)	6.59	6.64	6.94
Coded 125K	6.47	5.32	6.12
Coded 500K	5.69	5.47	5.99

Modulation type	Conducted Average Power(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	6.18	5.98	6.46
GFSK (LE 2Mbps)	6.19	6.10	6.42
Coded 125K	6.18	5.14	5.66
Coded 500K	5.20	5.22	5.59

EIRP

Modulation type	Peak EIRP(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	3.15	2.96	3.48
GFSK (LE 2Mbps)	3.19	3.24	3.55
Coded 125K	3.07	1.92	2.72
Coded 500K	2.29	2.07	2.59

Modulation type	Average EIRP(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	2.78	2.58	3.06
GFSK (LE 2Mbps)	2.79	2.70	3.02
Coded 125K	2.78	1.74	2.26
Coded 500K	1.80	1.82	2.19

EIRP (dBm)=Conducted Power(dBm)+Antenna Gain(dBi)

3 Occupied Bandwidth

6dB Bandwidth

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
GFSK (LE 1Mbps)	2402	673.2
GFSK (LE 1Mbps)	2440	683.8
GFSK (LE 1Mbps)	2480	678.9

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
GFSK (LE 2Mbps)	2402	1337.0
GFSK (LE 2Mbps)	2440	1352.0
GFSK (LE 2Mbps)	2480	1316.2

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
Coded 125K	2402	647.1
Coded 125K	2440	650.7
Coded 125K	2480	648.9

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
Coded 500K	2402	705.1
Coded 500K	2440	698.8
Coded 500K	2480	706.5

Test Mode: GFSK (LE 1Mbps)

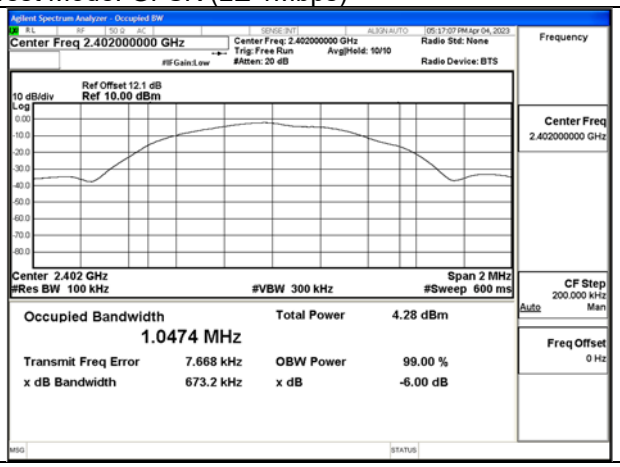

Test Mode:GFSK (LE 1Mbps) 2402MHz

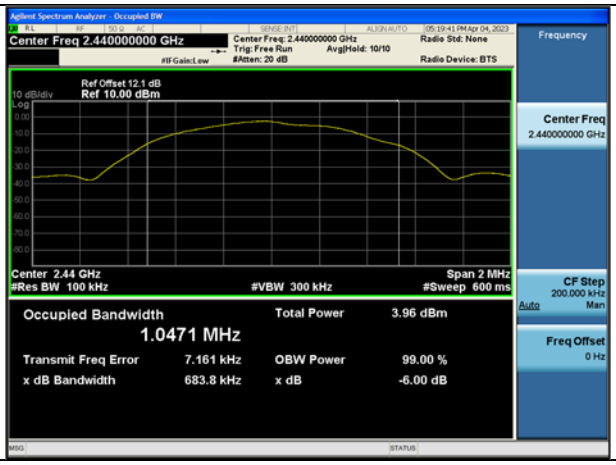

Test Mode:GFSK (LE 1Mbps) 2440MHz

Test Mode:GFSK (LE 1Mbps) 2480MHz

Test Mode: GFSK (LE 2Mbps)

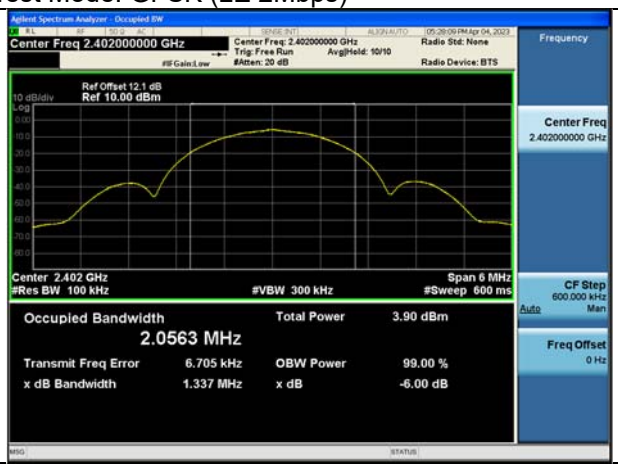

Test Mode:GFSK (LE 2Mbps) 2402MHz

Test Mode:GFSK (LE 2Mbps) 2440MHz

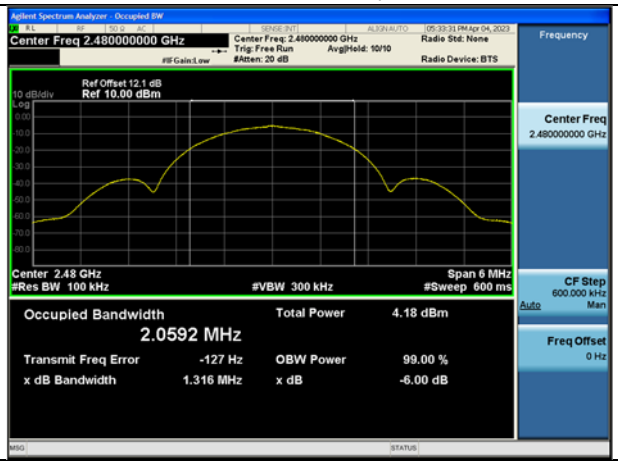

Test Mode:GFSK (LE 2Mbps) 2480MHz

Test Mode: Coded 125K

Test Mode:Coded 125K 2402MHz

Test Mode:Coded 125K 2440MHz

Test Mode:Coded 125K 2480MHz

Test Mode: Coded 500K

Test Mode:Coded 500K 2402MHz

Test Mode:Coded 500K 2440MHz

Test Mode:Coded 500K 2480MHz

99% Bandwidth

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
GFSK (LE 1Mbps)	2402	1023.4
GFSK (LE 1Mbps)	2440	1023.9
GFSK (LE 1Mbps)	2480	1024.7

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
GFSK (LE 2Mbps)	2402	2044.3
GFSK (LE 2Mbps)	2440	2048.9
GFSK (LE 2Mbps)	2480	2049.4

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
Coded 125K	2402	1019.7
Coded 125K	2440	1020.9
Coded 125K	2480	1020.6

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
Coded 500K	2402	1029.7
Coded 500K	2440	1030.0
Coded 500K	2480	1030.1

Test Mode: GFSK (LE 1Mbps)

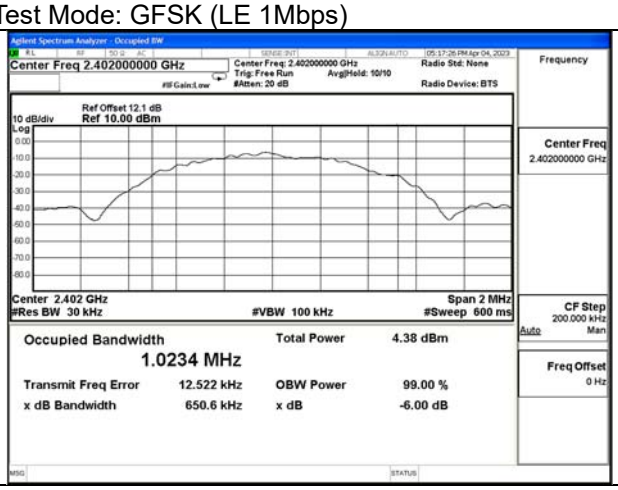

Test Mode:GFSK (LE 1Mbps) 2402MHz

Test Mode:GFSK (LE 1Mbps) 2440MHz

Test Mode:GFSK (LE 1Mbps) 2480MHz

Test Mode: GFSK (LE 2Mbps)

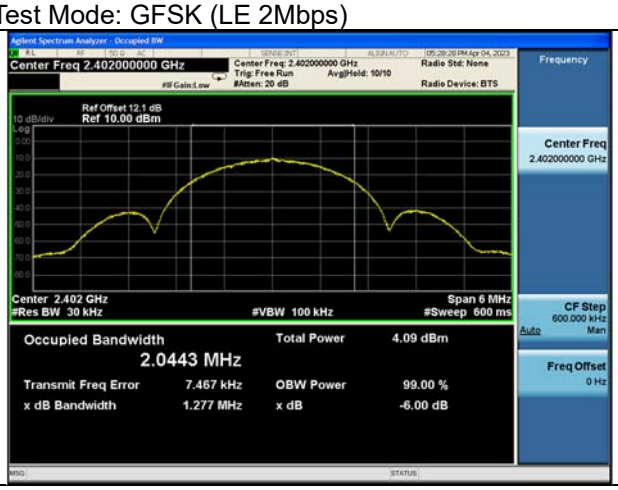

Test Mode:GFSK (LE 2Mbps) 2402MHz

Test Mode:GFSK (LE 2Mbps) 2440MHz

Test Mode:GFSK (LE 2Mbps) 2480MHz

Test Mode: Coded 125K

Test Mode:Coded 125K 2402MHz

Test Mode:Coded 125K 2440MHz

Test Mode:Coded 125K 2480MHz

Test Mode: Coded 500K

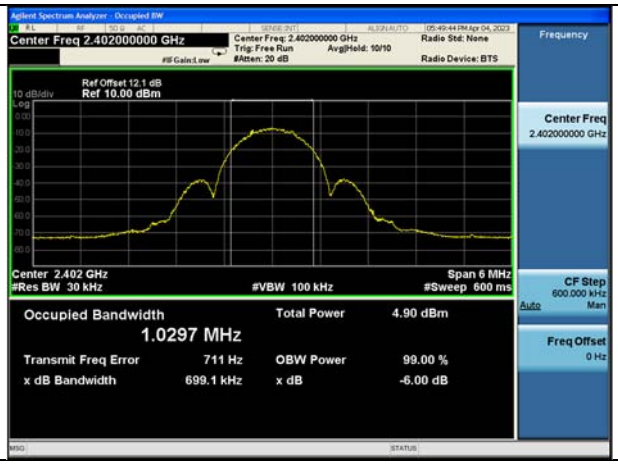

Test Mode:Coded 500K 2402MHz

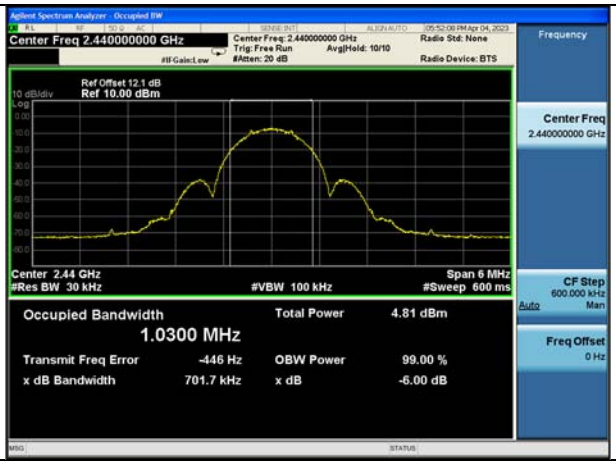

Test Mode:Coded 500K 2440MHz

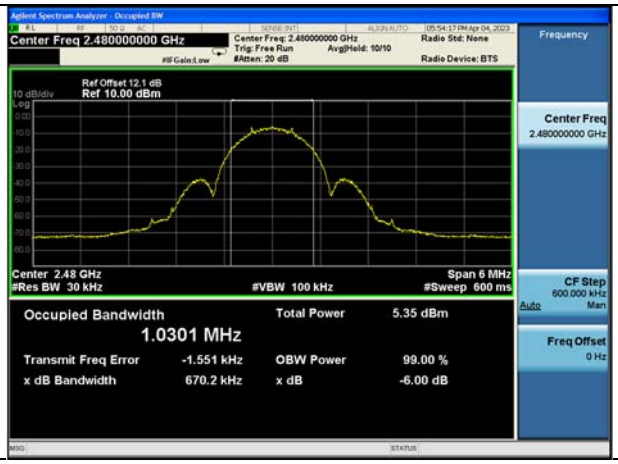

Test Mode:Coded 500K 2480MHz

4 Transmitter PowerSpectral Density

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
GFSK (LE 1Mbps)	2402	0	-9.2
GFSK (LE 1Mbps)	2440	19	-9.3
GFSK (LE 1Mbps)	2480	39	-8.8

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
GFSK (LE 2Mbps)	2402	0	-12.8
GFSK (LE 2Mbps)	2440	19	-12.9
GFSK (LE 2Mbps)	2480	39	-12.4

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
Coded 125K	2402	0	-0.6
Coded 125K	2440	19	-1.0
Coded 125K	2480	39	-0.3

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
Coded 500K	2402	0	-2.9
Coded 500K	2440	19	-1.9
Coded 500K	2480	39	-0.8

Test Mode: GFSK (LE 1Mbps)

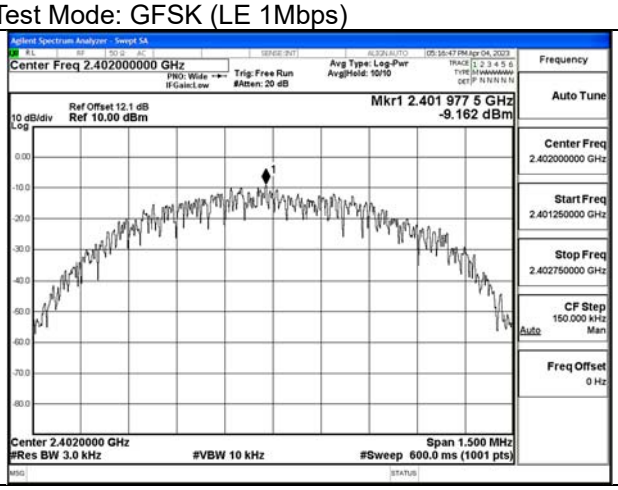

Test Mode:GFSK (LE 1Mbps) 2402MHz

Test Mode:GFSK (LE 1Mbps) 2440MHz

Test Mode:GFSK (LE 1Mbps) 2480MHz

Test Mode: GFSK (LE 2Mbps)

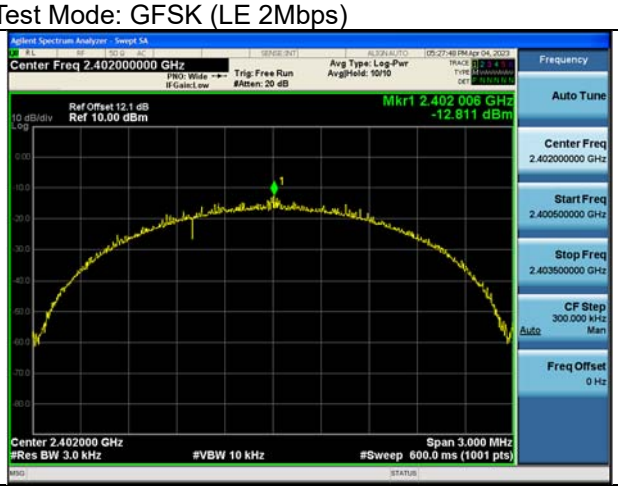

Test Mode:GFSK (LE 2Mbps) 2402MHz

Test Mode:GFSK (LE 2Mbps) 2440MHz

Test Mode:GFSK (LE 2Mbps) 2480MHz

Test Mode: Coded 125K

Test Mode:Coded 125K 2402MHz

Test Mode:Coded 125K 2440MHz

Test Mode:Coded 125K 2480MHz

Test Mode: Coded 500K

Test Mode:Coded 500K 2402MHz

Test Mode:Coded 500K 2440MHz

Test Mode:Coded 500K 2480MHz

5 Conducted Out of band emission measurement

Test Mode: GFSK (LE 1Mbps)

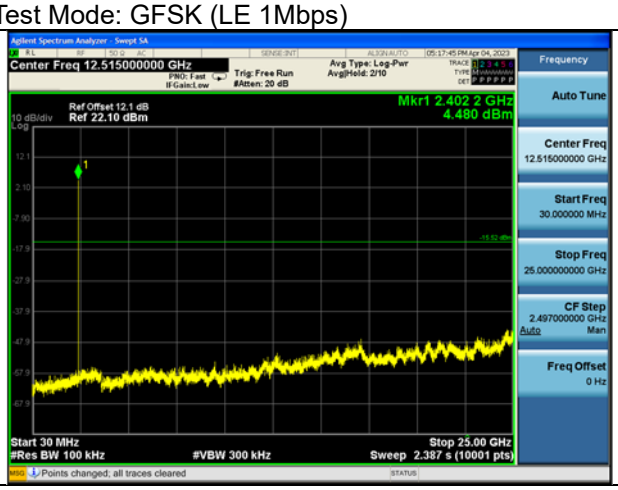

CH0

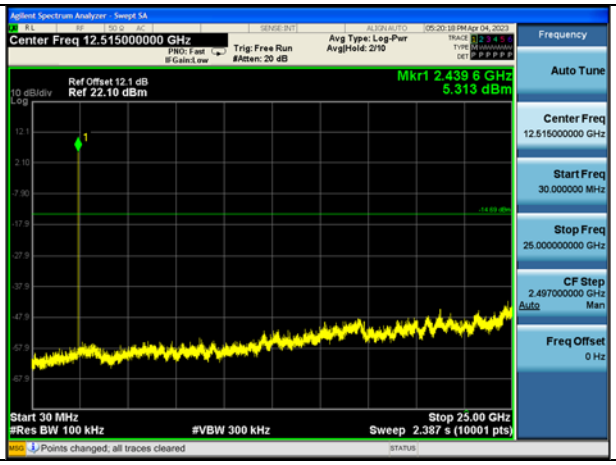

CH19

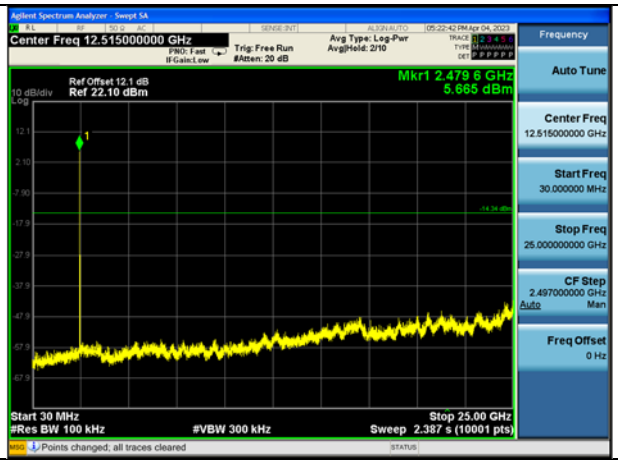

CH39

Test Mode: GFSK (LE 2Mbps)

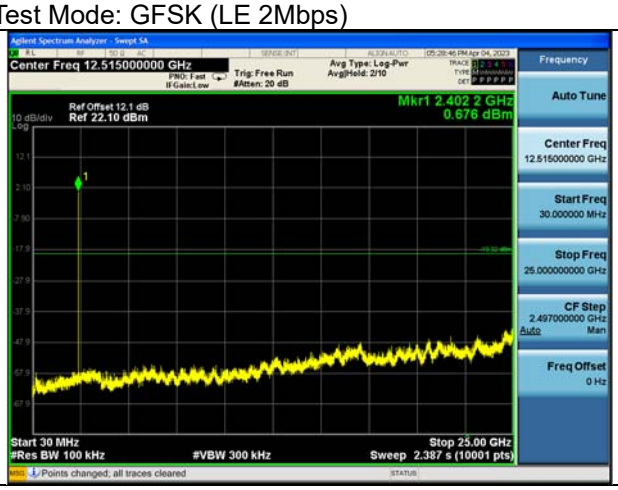

CH0

CH19

CH39

Test Mode: Coded 125K

CH0

CH19

CH39

Test Mode: Coded 500K

CH0

CH19

CH39

6 Band Edge measurement

Test Mode: GFSK (LE 1Mbps)

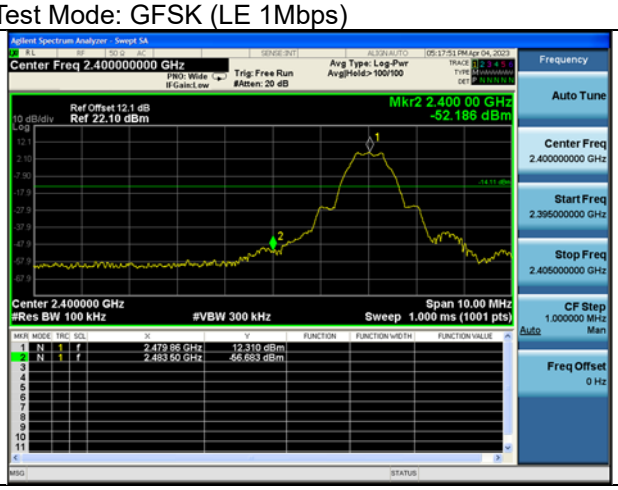

CH0

CH39

Test Mode: GFSK (LE 2Mbps)

CH0

CH39

Test Mode: Coded 125K

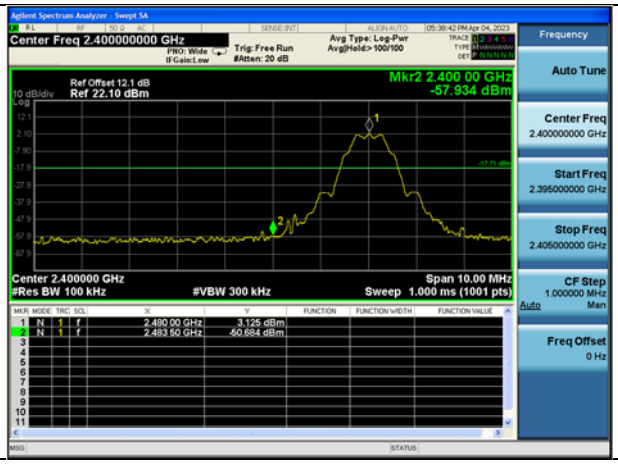

CH0

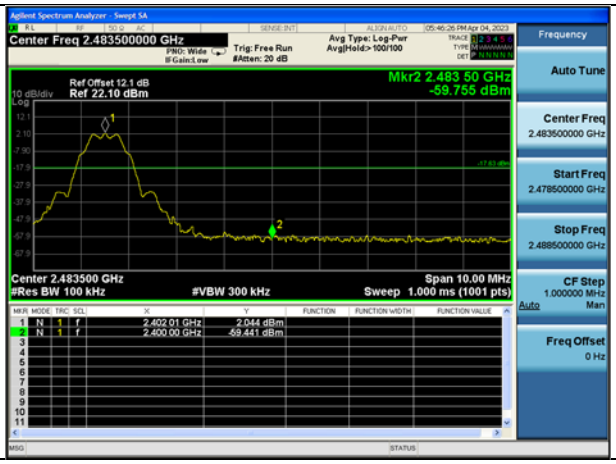

CH39

Test Mode: Coded 500K

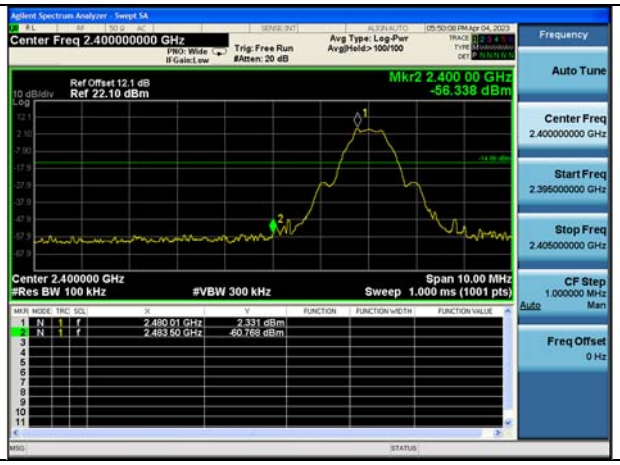	
CH0	CH39

BLE（ANT8）

1 Duty Cycle and Antenna Gain

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK (LE 1Mbps)	2402	Fig.1	64.50%	1.90	-0.40

Note:Correction Factor=10*log(1/Duty Cycle)

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK (LE 2Mbps)	2402	Fig.2	58.90%	2.30	-0.40

Note:Correction Factor=10*log(1/Duty Cycle)

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
Coded 125K	2402	Fig.3	97.60%	0.11	-0.40

Note:Correction Factor=10*log(1/Duty Cycle)

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
Coded 500K	2402	Fig.4	91.50%	0.39	-0.40

Note:Correction Factor=10*log(1/Duty Cycle)

Test Mode: GFSK (LE 1Mbps)

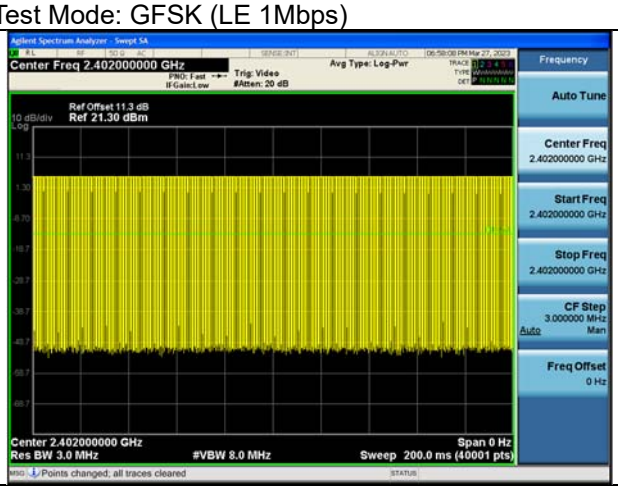

Fig.1

Test Mode: GFSK (LE 2Mbps)

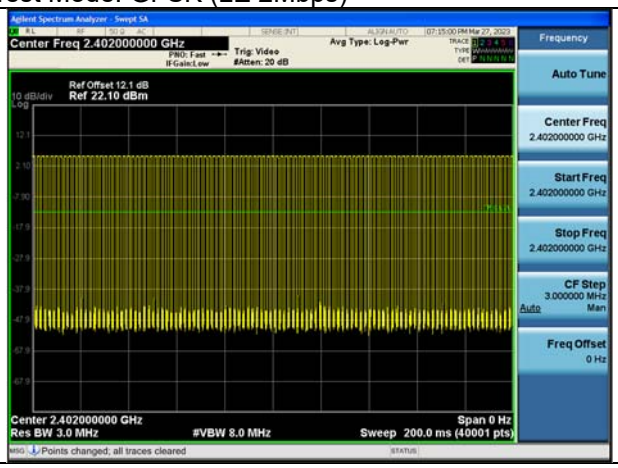

Fig.2

Test Mode: Coded 125K

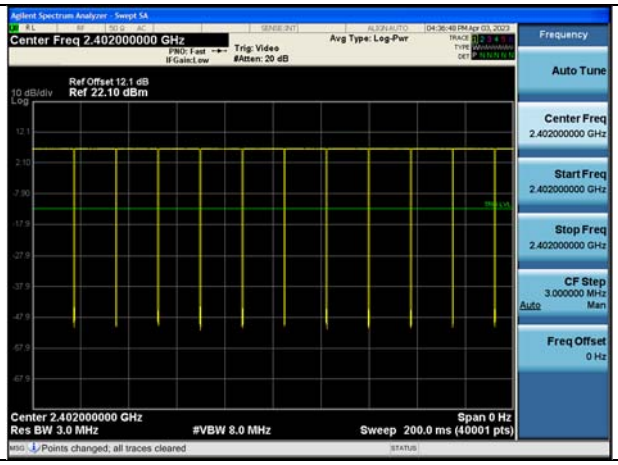

Fig.3

Test Mode: Coded 500K

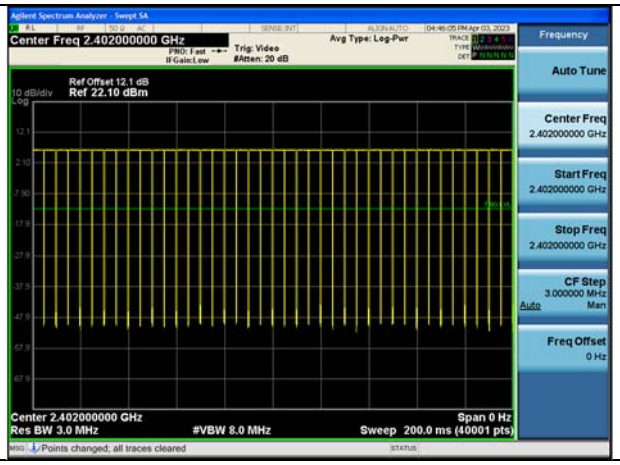	
Fig.4	

2 EIRP

Conducted Power

Modulation type	Conducted Peak Power(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	6.53	6.42	7.16
GFSK (LE 2Mbps)	5.69	5.69	6.07
Coded 125K	6.68	6.85	7.06
Coded 500K	6.70	6.62	7.12

Modulation type	Conducted Average Power(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	6.18	5.99	6.44
GFSK (LE 2Mbps)	5.29	5.06	5.52
Coded 125K	6.50	6.14	6.59
Coded 500K	6.37	6.25	6.53

EIRP

Modulation type	Peak EIRP(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	6.13	6.02	6.76
GFSK (LE 2Mbps)	5.29	5.29	5.67
Coded 125K	6.28	6.45	6.66
Coded 500K	6.30	6.22	6.72

Modulation type	Average EIRP(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	5.78	5.59	6.04
GFSK (LE 2Mbps)	4.89	4.66	5.12
Coded 125K	6.10	5.74	6.19
Coded 500K	5.97	5.85	6.13

EIRP (dBm)=Conducted Power(dBm)+Antenna Gain(dBi)

3 Occupied Bandwidth

6dB Bandwidth

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
GFSK (LE 1Mbps)	2402	680.7
GFSK (LE 1Mbps)	2440	680.3
GFSK (LE 1Mbps)	2480	686.7

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
GFSK (LE 2Mbps)	2402	1321.4
GFSK (LE 2Mbps)	2440	1313.0
GFSK (LE 2Mbps)	2480	1368.9

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
Coded 125K	2402	647.1
Coded 125K	2440	647.3
Coded 125K	2480	647.4

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
Coded 500K	2402	687.2
Coded 500K	2440	709.5
Coded 500K	2480	710.3

Test Mode: GFSK (LE 1Mbps)

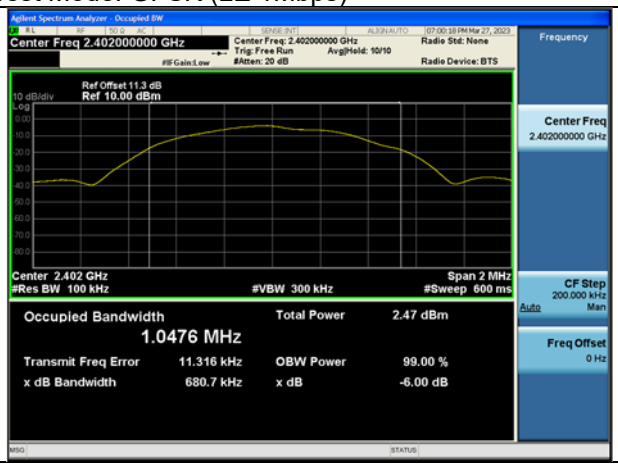

Test Mode:GFSK (LE 1Mbps) 2402MHz

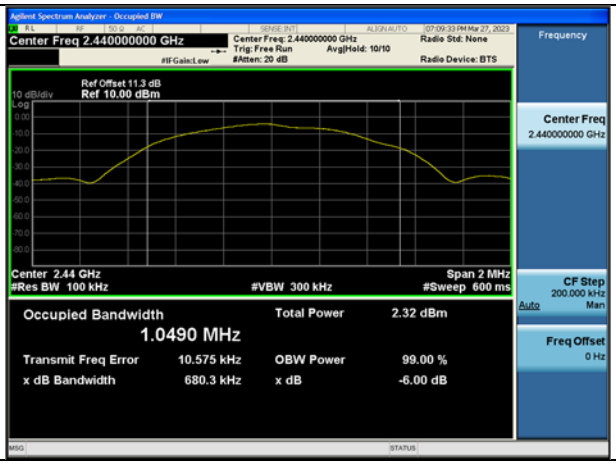

Test Mode:GFSK (LE 1Mbps) 2440MHz

Test Mode:GFSK (LE 1Mbps) 2480MHz

Test Mode: GFSK (LE 2Mbps)

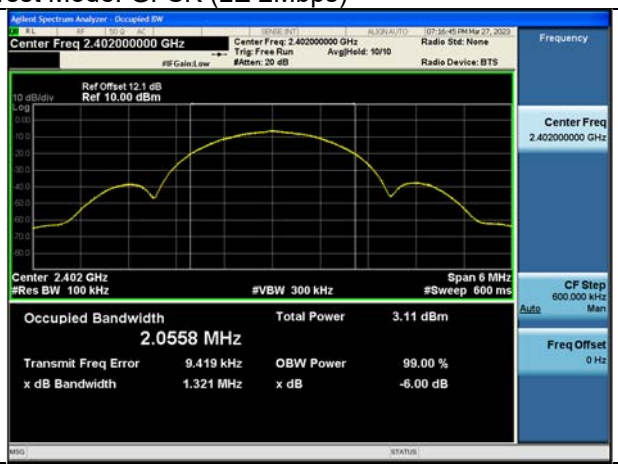

Test Mode:GFSK (LE 2Mbps) 2402MHz

Test Mode:GFSK (LE 2Mbps) 2440MHz

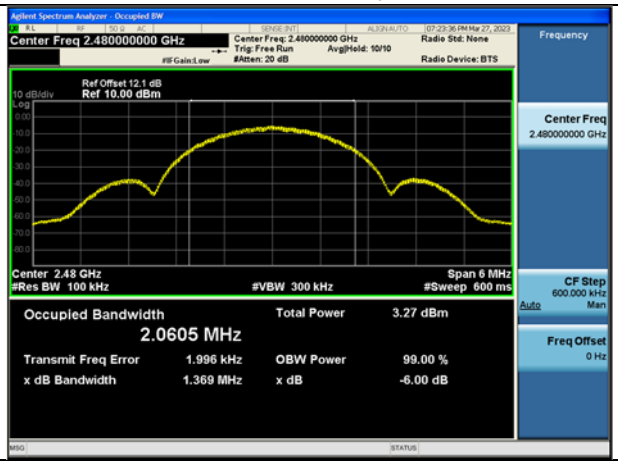

Test Mode:GFSK (LE 2Mbps) 2480MHz

Test Mode: Coded 125K

Test Mode:Coded 125K 2402MHz

Test Mode:Coded 125K 2440MHz

Test Mode:Coded 125K 2480MHz

Test Mode: Coded 500K

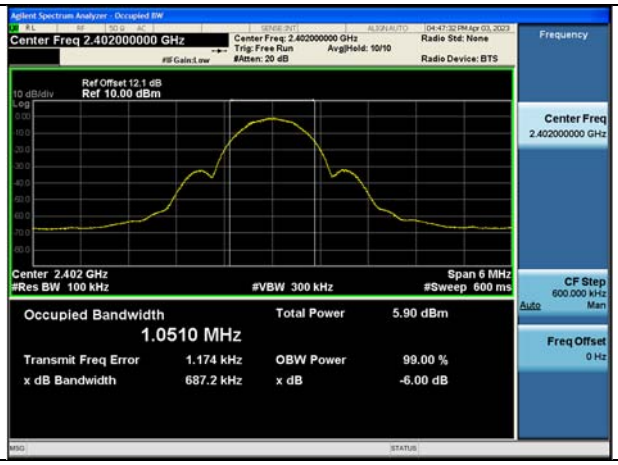

Test Mode:Coded 500K 2402MHz

Test Mode:Coded 500K 2440MHz

Test Mode:Coded 500K 2480MHz

99% Bandwidth

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
GFSK (LE 1Mbps)	2402	1024.2
GFSK (LE 1Mbps)	2440	1025.0
GFSK (LE 1Mbps)	2480	1025.1

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
GFSK (LE 2Mbps)	2402	2046.5
GFSK (LE 2Mbps)	2440	2049.3
GFSK (LE 2Mbps)	2480	2048.7

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
Coded 125K	2402	1018.0
Coded 125K	2440	1020.1
Coded 125K	2480	1015.8

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
Coded 500K	2402	1029.8
Coded 500K	2440	1030.4
Coded 500K	2480	1029.8

Test Mode: GFSK (LE 1Mbps)

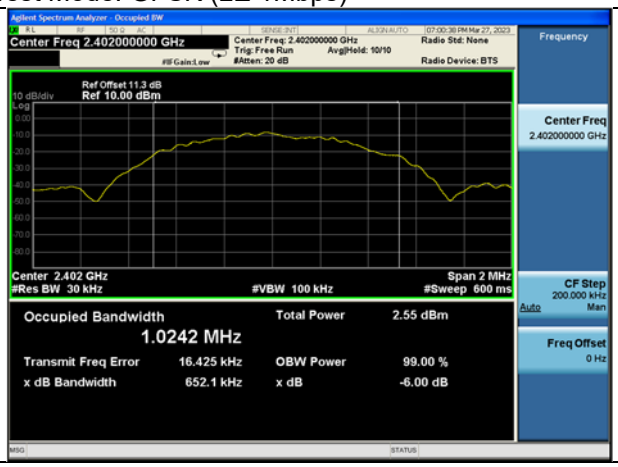

Test Mode:GFSK (LE 1Mbps) 2402MHz

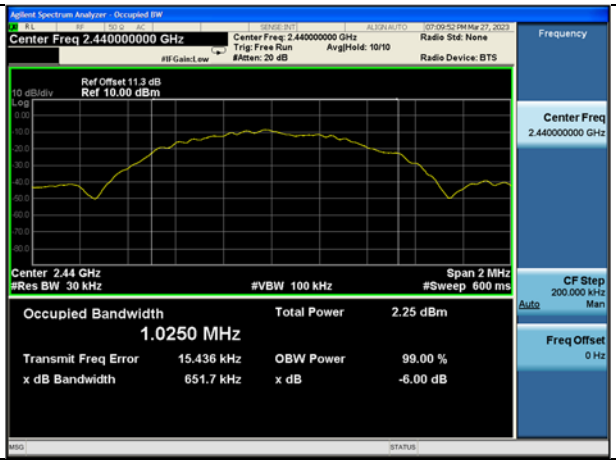

Test Mode:GFSK (LE 1Mbps) 2440MHz

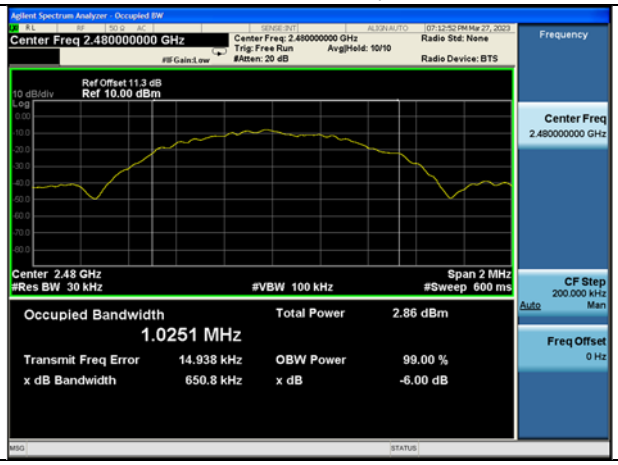

Test Mode:GFSK (LE 1Mbps) 2480MHz	

Test Mode: GFSK (LE 2Mbps)

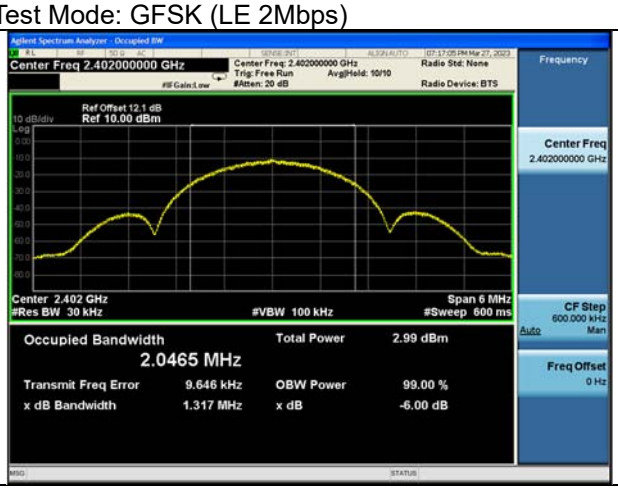

Test Mode:GFSK (LE 2Mbps) 2402MHz

Test Mode:GFSK (LE 2Mbps) 2440MHz

Test Mode:GFSK (LE 2Mbps) 2480MHz

Test Mode: Coded 125K

Test Mode:Coded 125K 2402MHz

Test Mode:Coded 125K 2440MHz

Test Mode:Coded 125K 2480MHz

Test Mode: Coded 500K

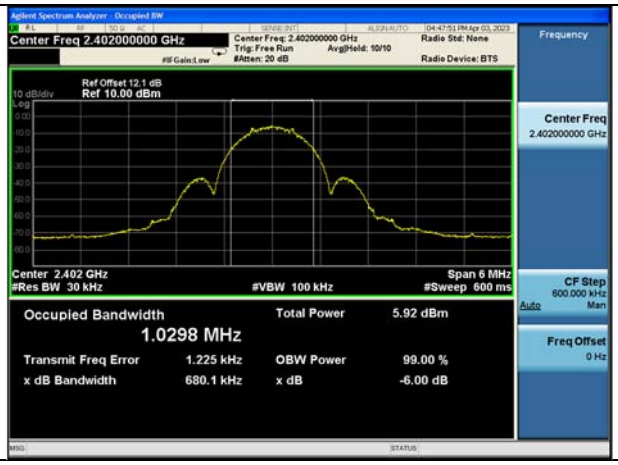

Test Mode:Coded 500K 2402MHz

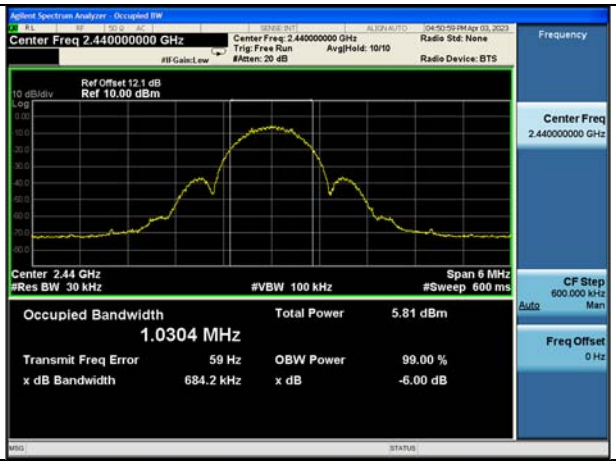

Test Mode:Coded 500K 2440MHz

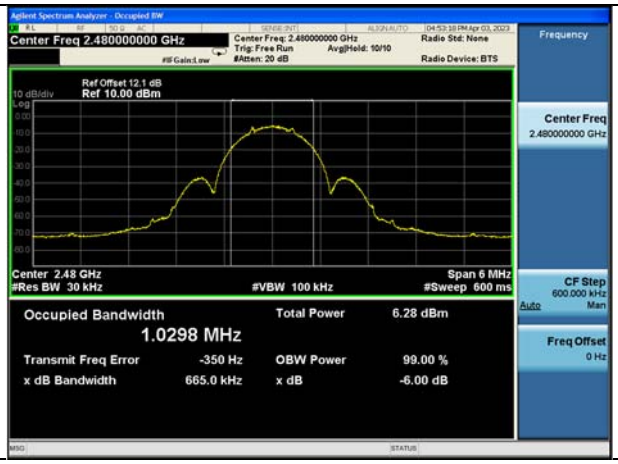

Test Mode:Coded 500K 2480MHz

4 Transmitter PowerSpectral Density

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
GFSK (LE 1Mbps)	2402	0	-10.9
GFSK (LE 1Mbps)	2440	19	-11.0
GFSK (LE 1Mbps)	2480	39	-10.4

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
GFSK (LE 2Mbps)	2402	0	-13.9
GFSK (LE 2Mbps)	2440	19	-14.2
GFSK (LE 2Mbps)	2480	39	-13.7

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
Coded 125K	2402	0	0.6
Coded 125K	2440	19	0.0
Coded 125K	2480	39	0.7

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
Coded 500K	2402	0	-0.2
Coded 500K	2440	19	-5.8
Coded 500K	2480	39	0.0

Test Mode: GFSK (LE 1Mbps)

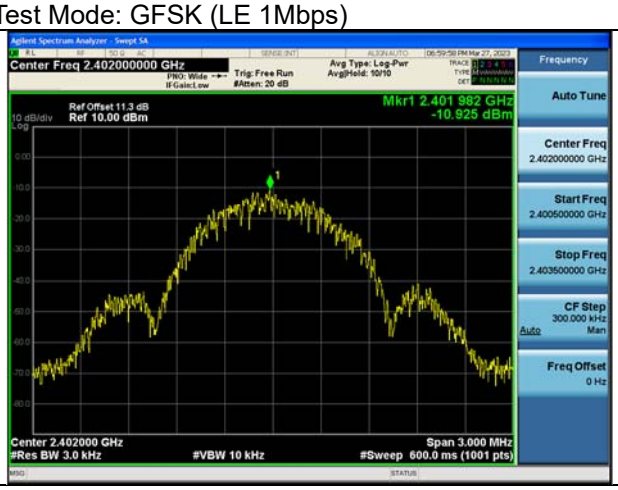

Test Mode:GFSK (LE 1Mbps) 2402MHz

Test Mode:GFSK (LE 1Mbps) 2440MHz

Test Mode:GFSK (LE 1Mbps) 2480MHz

Test Mode: GFSK (LE 2Mbps)

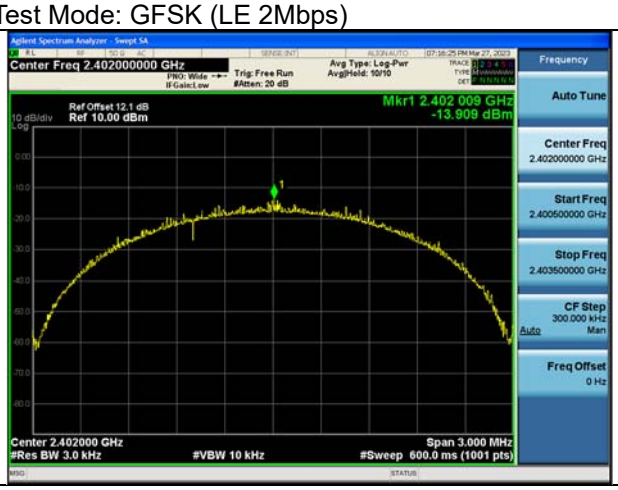

Test Mode:GFSK (LE 2Mbps) 2402MHz

Test Mode:GFSK (LE 2Mbps) 2440MHz

Test Mode:GFSK (LE 2Mbps) 2480MHz

Test Mode: Coded 125K

Test Mode:Coded 125K 2402MHz

Test Mode:Coded 125K 2440MHz

Test Mode:Coded 125K 2480MHz

Test Mode: Coded 500K

Test Mode:Coded 500K 2402MHz

Test Mode:Coded 500K 2440MHz

Test Mode:Coded 500K 2480MHz

5 Conducted Out of band emission measurement

Test Mode: GFSK (LE 1Mbps)

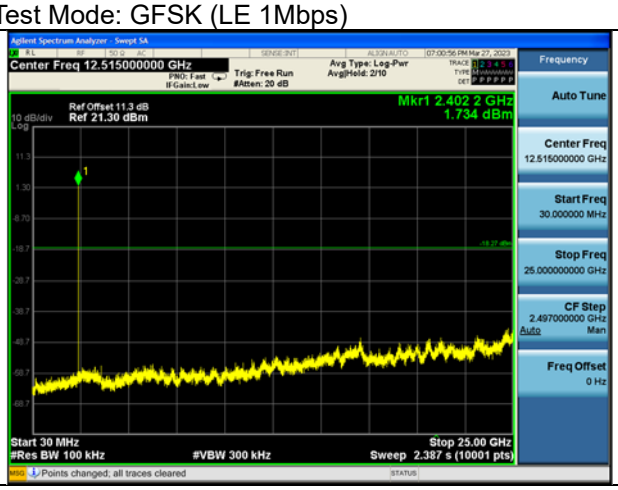

CH0

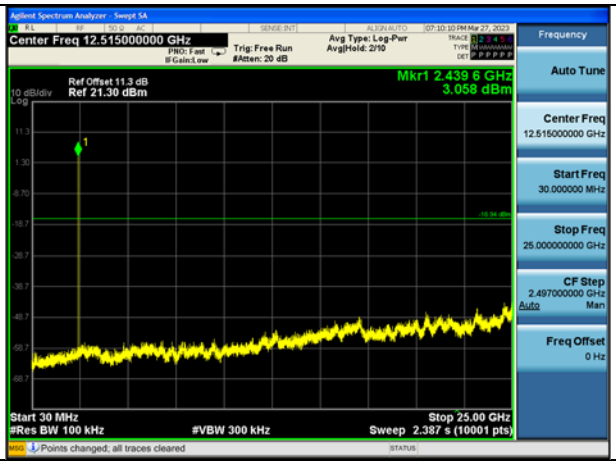

CH19

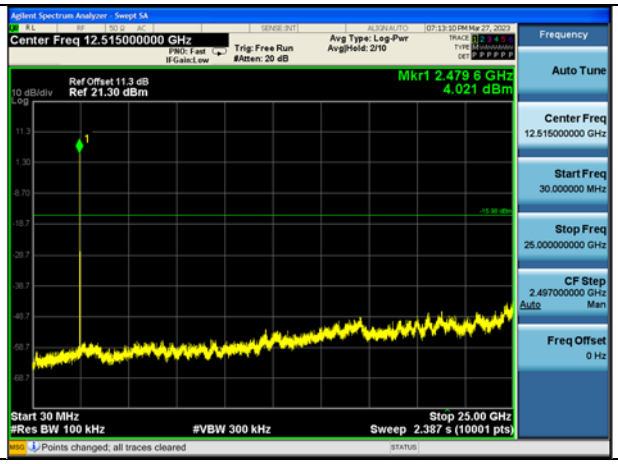

CH39

Test Mode: GFSK (LE 2Mbps)

CH0

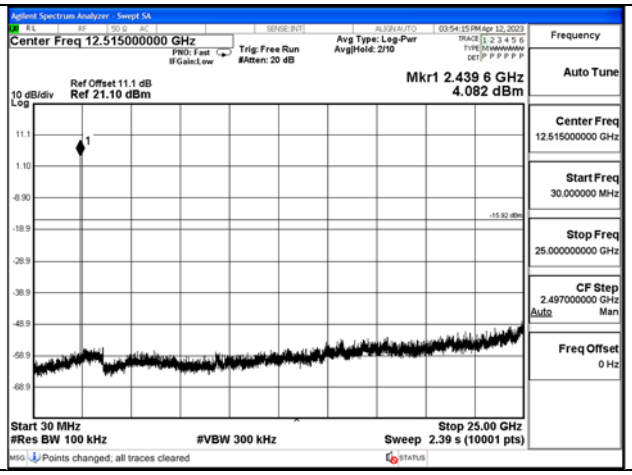

CH19

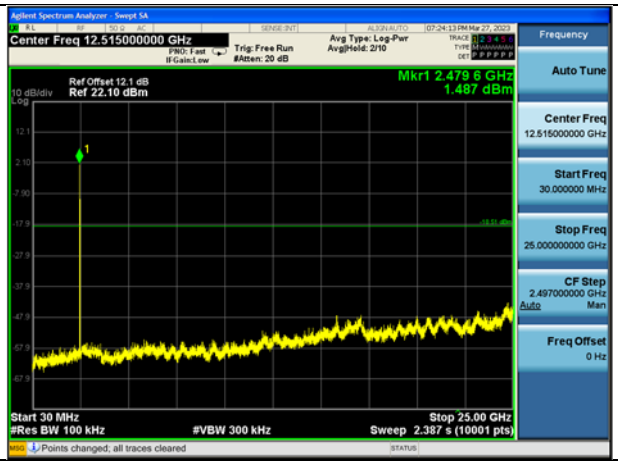

CH39

Test Mode: Coded 125K

CH0

CH19

CH39

Test Mode: Coded 500K

CH0

CH19

CH39

6 Band Edge measurement

Test Mode: GFSK (LE 1Mbps)

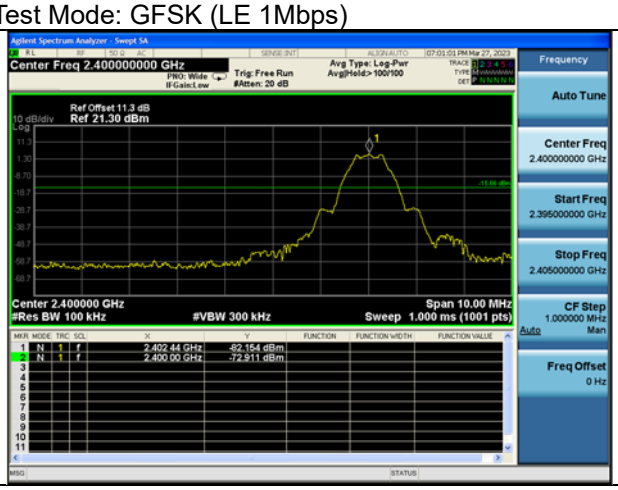

CH0

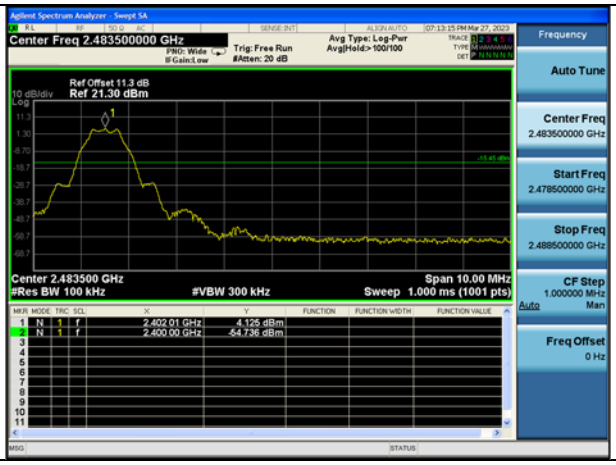

CH39

Test Mode: GFSK (LE 2Mbps)

CH0

CH39

Test Mode: Coded 125K

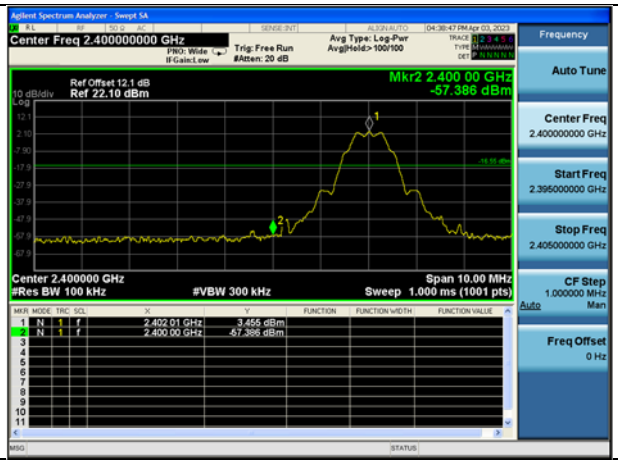

CH0

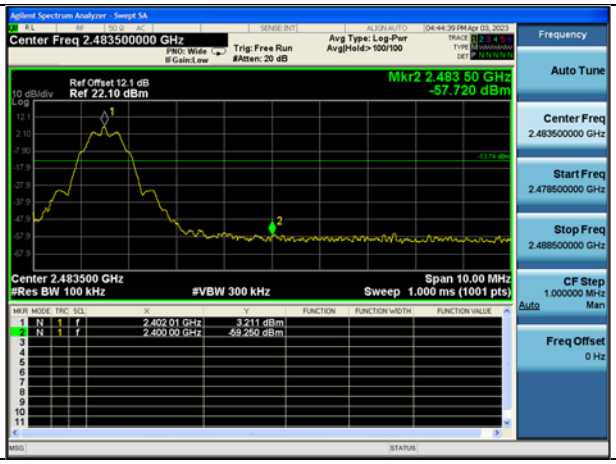

CH39

Test Mode: Coded 500K

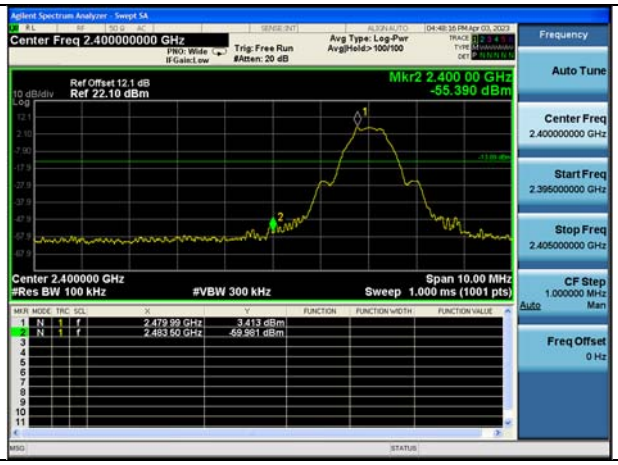	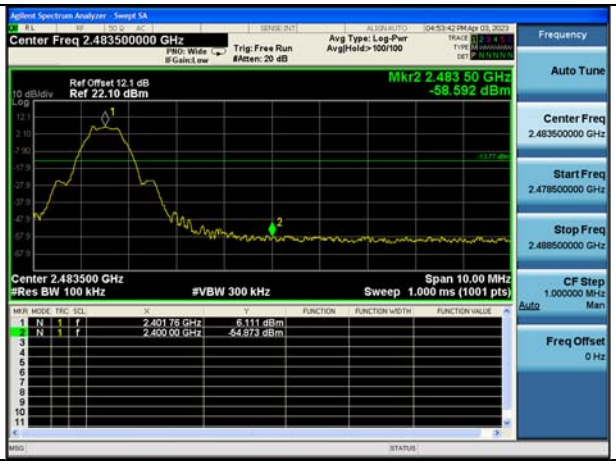
CH0	CH39

APPENDIX B – TEST DATA OF RADIATED EMISSION

Note：The worst channel results are reflected in the report.

Note: The scanned graph represents the maximum of both horizontal and vertical polarizations and is not a single horizontal or vertical polarization scan.

Radiated Emission Band Edge

After comparison,the worst case attitude is EUT lay down.

Carrier frequency (MHz): 2402
Channel No.:0
Modulation Type: LE-1Mbps

Dectector: Peak							
Frequency (MHz)	Reading MaxPeak (dBuV)	MaxPeak (dBuV/m)	Over Limt (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)	Polarity
2402.0	54.83	88.83	N/A	N/A	8.90	25.10	Vertical
2390.0	24.40	58.40	-15.60	74.00	8.90	25.10	Vertical

Dectector: Average							
Frequency (MHz)	Reading Average (dBuV)	Average (dBuV/m)	Over Limt (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)	Polarity
2402.0	49.36	83.36	N/A	N/A	8.90	25.10	Vertical
2390.0	11.61	45.61	-8.39	54.00	8.90	25.10	Vertical

Carrier frequency (MHz): 2480
Channel No.:39
Modulation Type: LE-1Mbps

Dectector: Peak							
Frequency (MHz)	Reading MaxPeak (dBuV)	MaxPeak (dBuV/m)	Over Limt (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)	Polarity
2480.0	53.83	87.83	N/A	N/A	8.90	25.10	Vertical
2483.5	25.35	59.35	-14.65	74.00	8.90	25.10	Vertical

Dectector: Average							
Frequency (MHz)	Reading Average (dBuV)	Average (dBuV/m)	Over Limt (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)	Polarity
2480.0	50.14	84.14	N/A	N/A	8.90	25.10	Vertical
2483.5	11.92	45.92	-8.08	54.00	8.90	25.10	Vertical

RE Sample Calculations

After comparison,the worst case attitude is EUT lay down.

CH19:

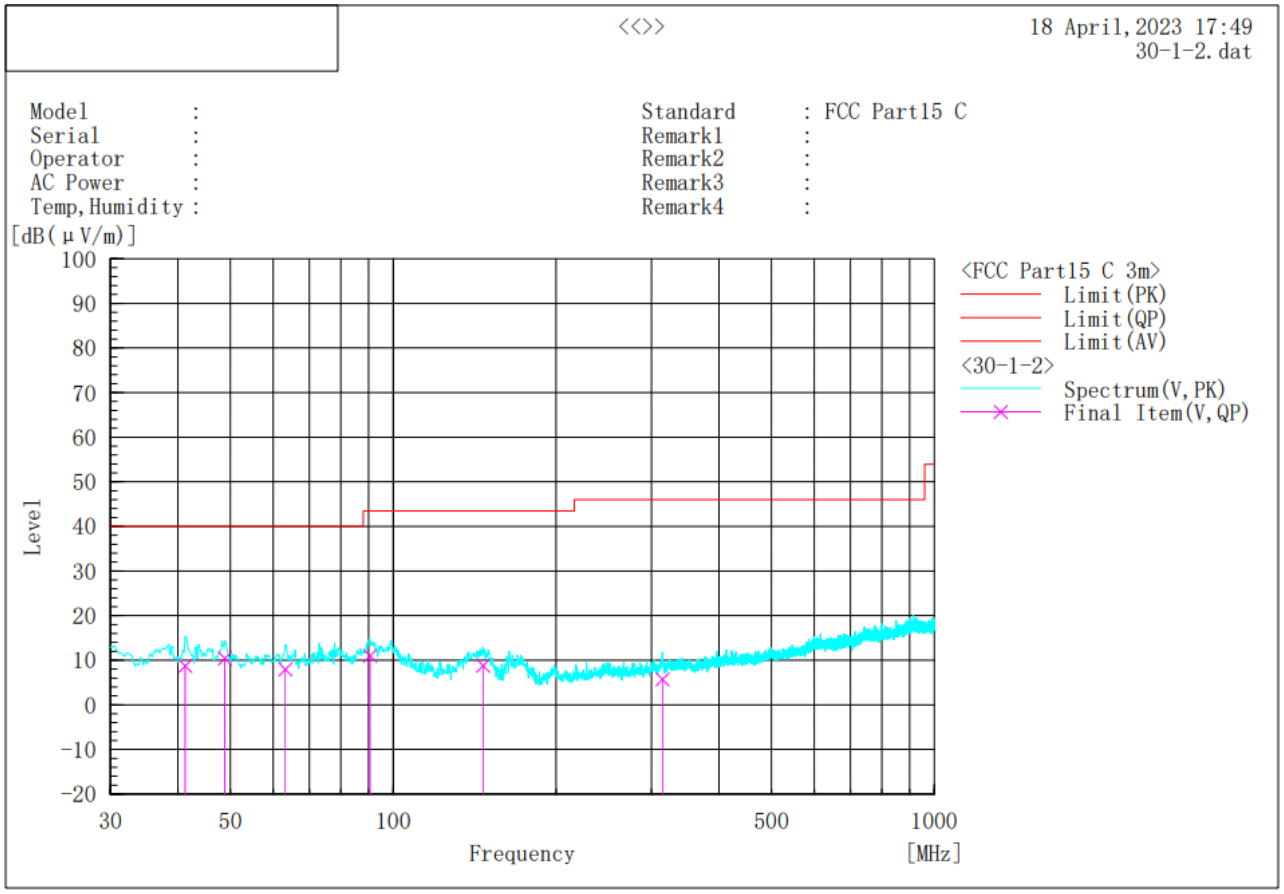

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	41.254	V	55.7	-46.9	8.8	40.0	31.2	100.0	254.8	
2	48.822	V	56.6	-46.2	10.4	40.0	29.6	100.0	178.1	
3	63.181	V	55.8	-47.9	7.9	40.0	32.1	251.0	119.1	
4	90.540	V	60.5	-49.5	11.0	43.5	32.5	196.0	55.6	
5	146.423	V	60.3	-51.5	8.8	43.5	34.7	250.0	27.9	
6	314.267	V	51.2	-45.4	5.8	46.0	40.2	198.0	228.2	

Frequency Range: 30MHz -1GHz

Full Spectrum

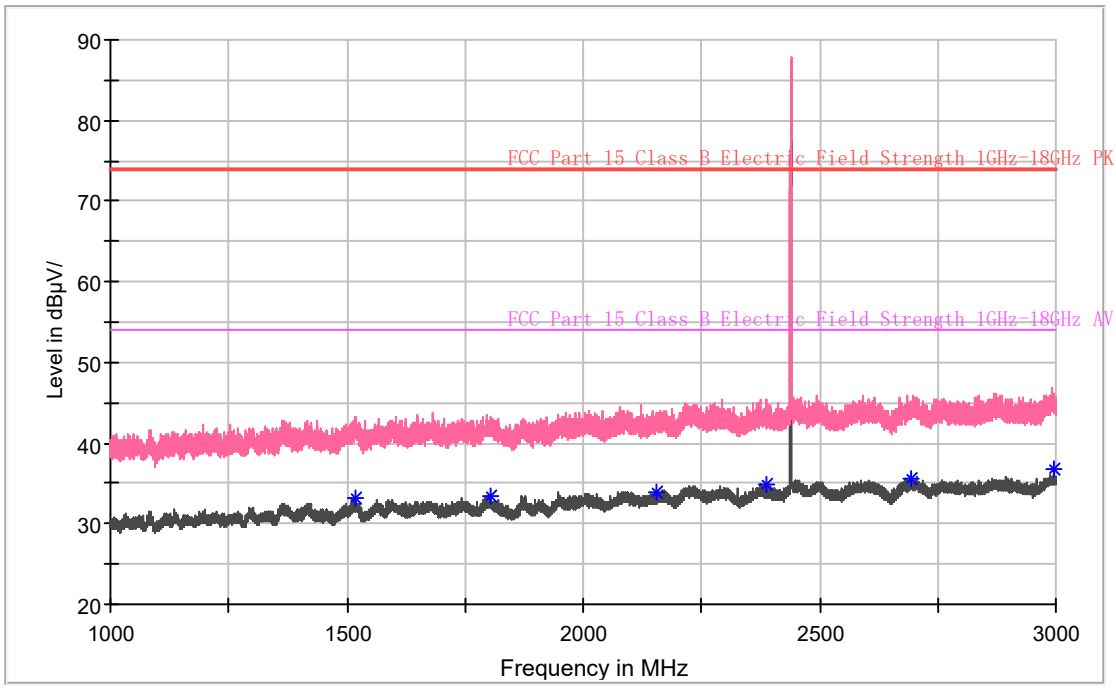

Full Spectrum

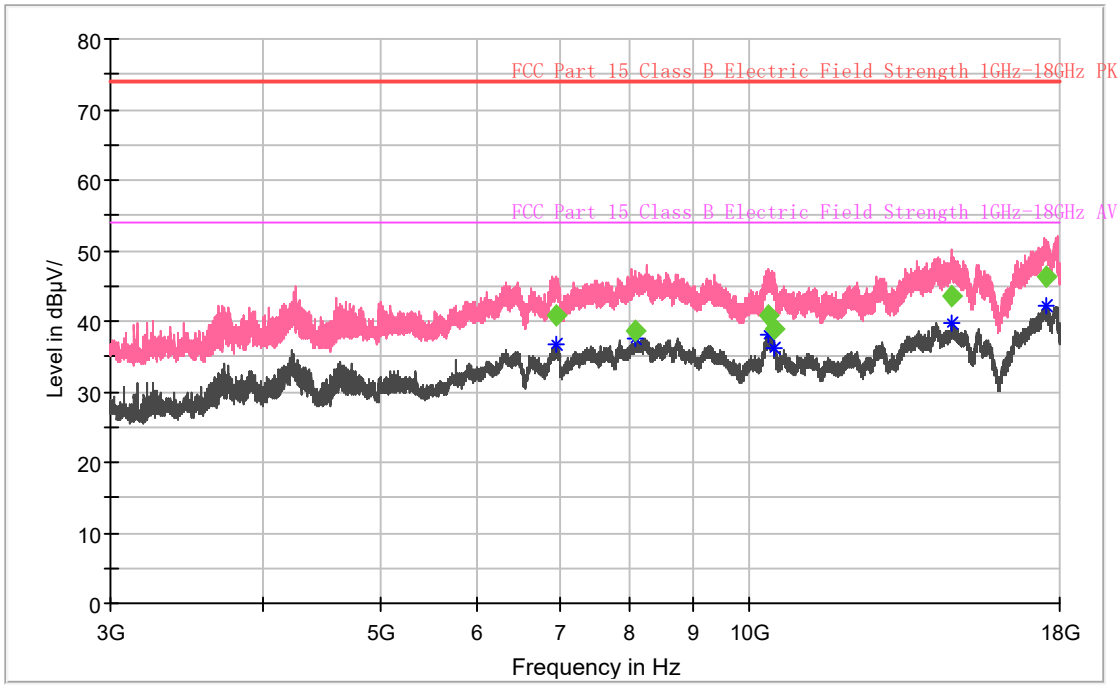

Frequency (MHz)	Reading (dBuV)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Arpl (dB)	Polarity
1518.50	51.71	33.21	54.00	20.79	-18.50	Vertical
1803.70	51.93	33.53	54.00	20.47	-18.40	Vertical
2154.80	51.99	33.99	54.00	20.01	-18.00	Vertical

2385.90	52.01	34.91	54.00	19.09	-17.10	Vertical
2695.20	51.78	35.68	54.00	18.32	-16.10	Vertical
2996.20	52.18	36.68	54.00	17.32	-15.50	Vertical

(MHz)	Reading (dBuV)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Arpl (dB)	Polarity
6970.00	58.11	40.91	54.00	13.09	-17.20	Vertical
8086.50	52.17	38.57	54.00	15.43	-13.60	Vertical
10400.50	52.73	40.83	54.00	13.17	-11.90	Vertical
10517.50	52.23	39.03	54.00	14.97	-13.20	Vertical
14696.50	54.05	43.55	54.00	10.45	-10.50	Vertical
17563.00	53.70	46.20	54.00	7.80	-7.50	Vertical

Frequency Range: 1GHz -18GHz

AC Power line Conducted Emission

A “reference path loss” Corr.(dB) is established and the L_{cable}+ATT+VDF is the attenuation of ” reference path loss”, and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$P_{result}=P_{mea}$+ Corr.(dB)

MEASUREMENT RESULT:

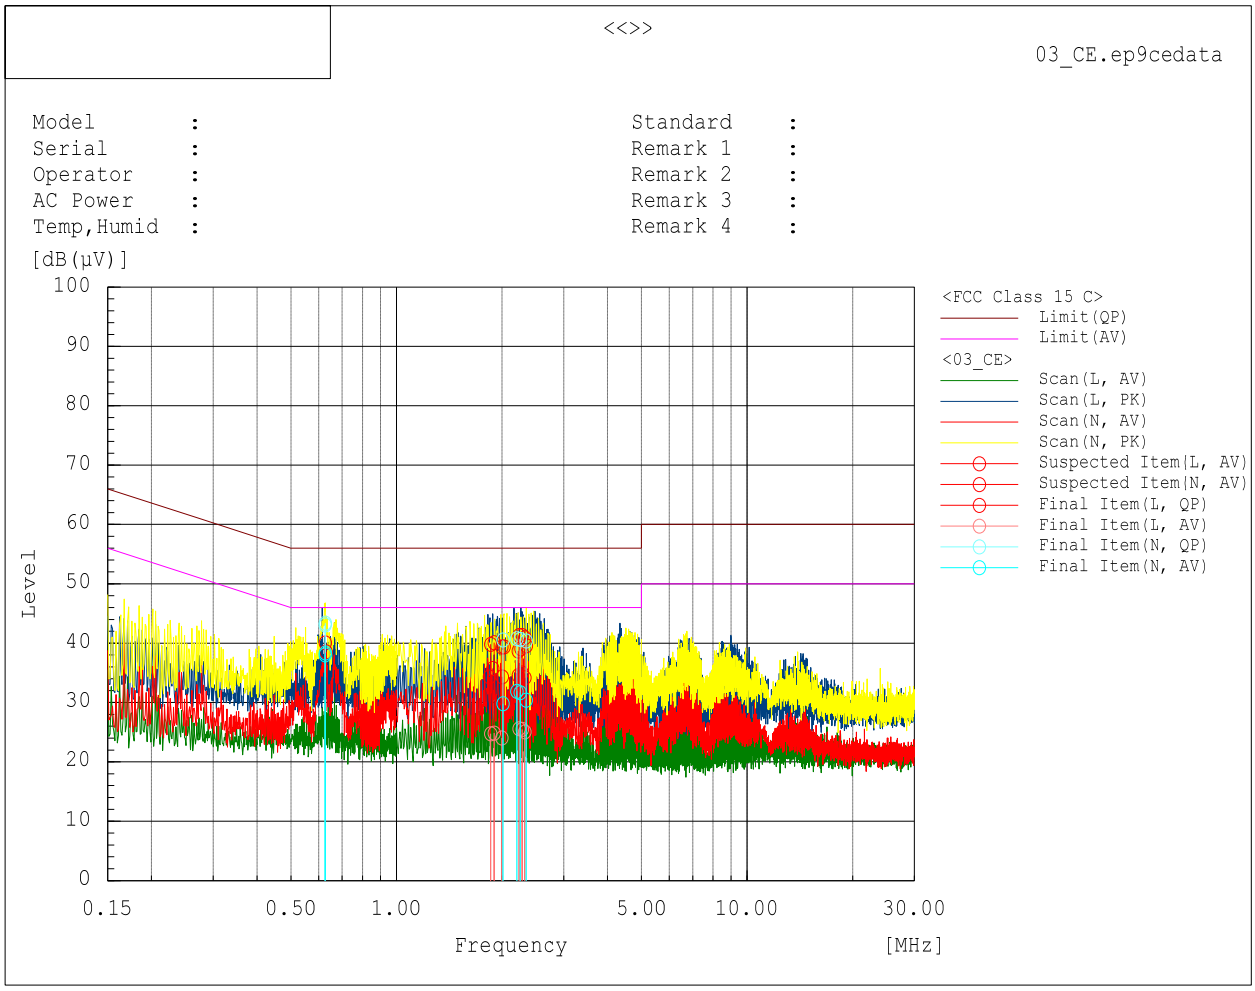

Range	Frequency	Line	Reading			Factor	Level			Limit	Limit			Margin			Pass/Fail	Remark
	MHz		dB(µV)			dB	dB(µV)			dB(µV)	dB(µV)			dB				
			QP	AV	PK		QP	AV	PK		QP	AV	PK	QP	AV	PK		
Band1	1.86	L	19.9	4.9		19.9	39.8	24.8			56	46		16.2	21.2		Pass	
Band1	1.9	L	20.2	5		19.9	40.1	24.9			56	46		15.9	21.1		Pass	
Band1	2	L	19.5	4.1		19.9	39.4	24			56	46		16.6	22		Pass	
Band1	2.24	L	21.4	5.7		19.9	41.3	25.6			56	46		14.7	20.4		Pass	
Band1	2.29	L	21.4	5.6		19.9	41.3	25.5			56	46		14.7	20.5		Pass	
Band1	2.32	L	21	5.2		19.9	40.9	25.1			56	46		15.1	20.9		Pass	
Band1	0.63	N	23.2	18		19.9	43.1	38.1			56	46		12.9	7.9		Pass	

Band1	0.63	N	23.5	19		19.9	43.4	38.4			56	46		12.6	7.6		Pass	
Band1	2.01	N	20.7	9.9		19.9	40.6	29.8			56	46		15.4	16.2		Pass	
Band1	2.21	N	20.9	12		19.9	40.8	31.9			56	46		15.2	14.1		Pass	
Band1	2.25	N	20.8	12		19.9	40.7	31.7			56	46		15.3	14.3		Pass	
Band1	2.34	N	20.5	11		19.9	40.4	30.4			56	46		15.6	15.6		Pass	

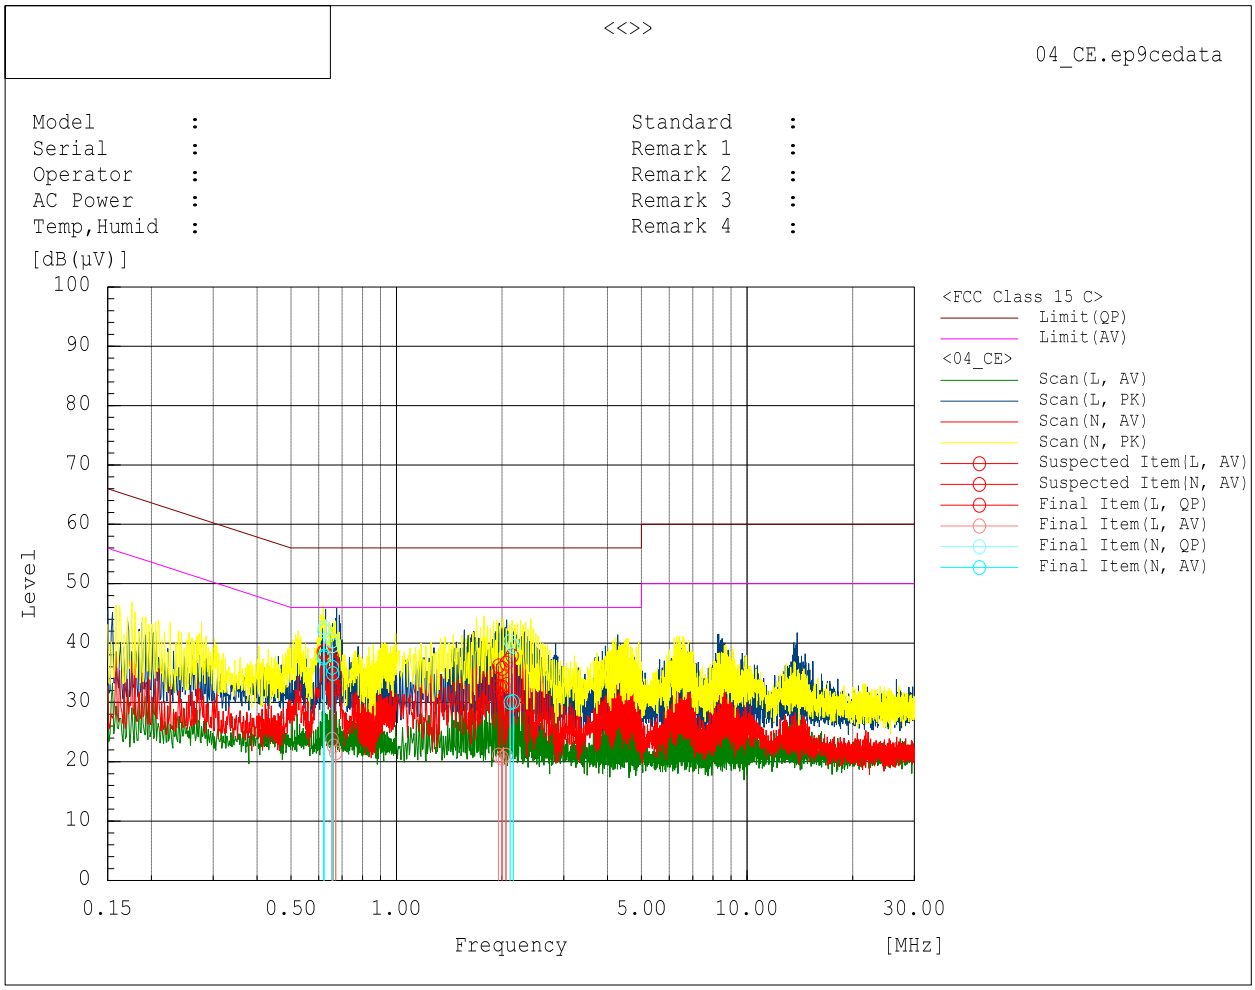

Range	Frequency	Line	Reading			Factor	Level			Limit	Limit			Margin			Pass/Fail	Remark
	MHz		dB(µV)			dB	dB(µV)			dB(µV)	dB(µV)			dB				
			QP	AV	PK		QP	AV	PK		QP	AV	PK	QP	AV	PK		
Band1	0.62	N	22.2	18		19.9	42.1	37.5			56	46		13.9	8.5		Pass	
Band1	0.62	N	22.7	18		19.9	42.6	37.8			56	46		13.4	8.2		Pass	
Band1	0.66	N	20.5	16		19.9	40.4	35.9			56	46		15.6	10.1		Pass	
Band1	0.66	N	19.7	15		19.9	39.6	34.9			56	46		16.4	11.1		Pass	
Band1	2.11	N	20.4	10		19.9	40.3	30			56	46		15.7	16		Pass	
Band1	2.15	N	19.6	10		19.9	39.5	30.2			56	46		16.5	15.8		Pass	
Band1	0.66	L	17.9	3.9		19.9	37.8	23.8			56	46		18.2	22.2		Pass	
Band1	0.66	L	16.5	2.8		19.9	36.4	22.7			56	46		19.6	23.3		Pass	

Band1	0.67	L	14.5	1.6		19.9	34.4	21.5			56	46		21.6	24.5		Pass	
Band1	1.95	L	16.2	1.2		19.9	36.1	21.1			56	46		19.9	24.9		Pass	
Band1	2	L	15.9	0.7		19.9	35.8	20.6			56	46		20.2	25.4		Pass	
Band1	2.05	L	16.7	1.2		19.9	36.6	21.1			56	46		19.4	24.9		Pass	

---End of Test Report---