

Meas1.Head Left Cheek GSM 850 Ch251

Date: 2026/9/15

Communication System Band: GPRS850; Frequency: 848.8 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 42.118$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.71, 8.71, 8.71); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch251/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.655 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.159 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.723 W/kg

SAR(1 g) = 0.541 W/kg; SAR(10 g) = 0.416 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 77.2%

Maximum value of SAR (measured) = 0.645 W/kg

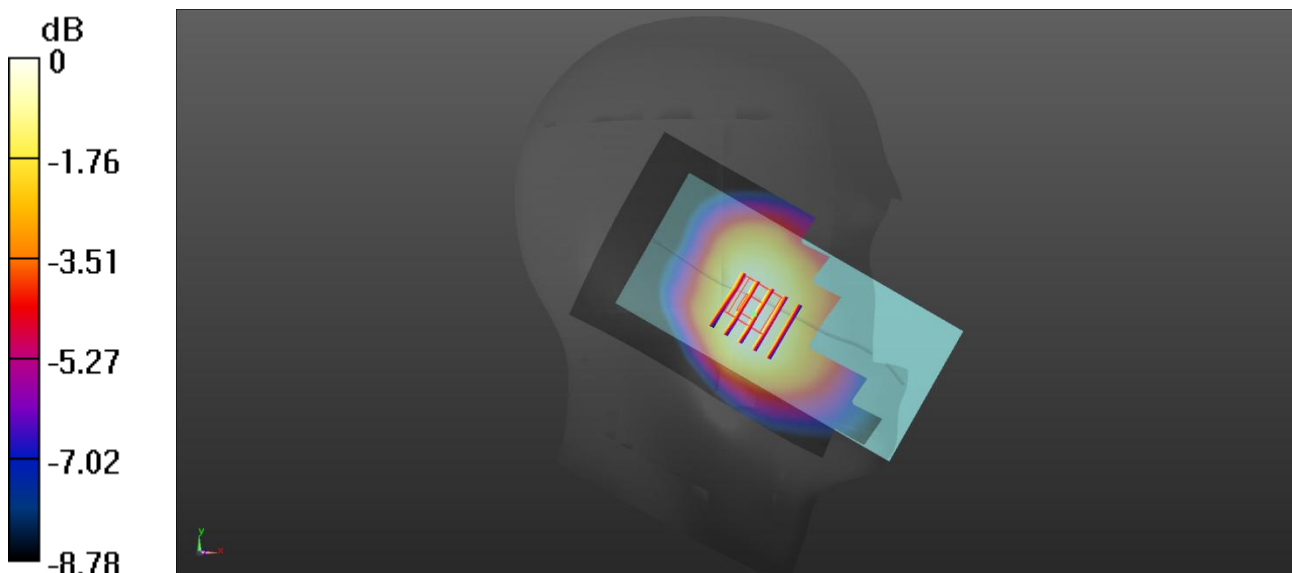

0 dB = 0.645 W/kg

Meas2.Body-wron& Hotspot Back Side 10mm GSM 850 Ch251

Date: 2026/9/15

Communication System Band: GPRS850; Frequency: 848.8 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 42.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.71, 8.71, 8.71); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch251/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.724 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.79 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.510 W/kg; SAR(10 g) = 0.332 W/kg

Smallest distance from peaks to all points 3 dB below = 17.6 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.701 W/kg

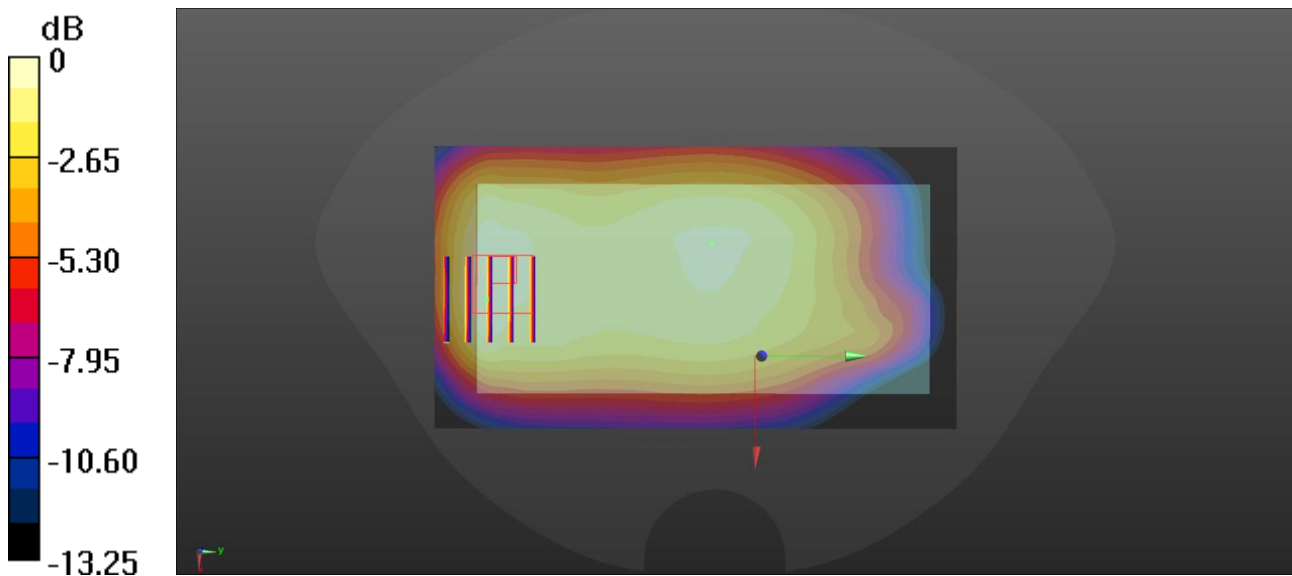

0 dB = 0.724 W/kg

Meas3.Head Right Cheek GSM 1900 Ch810

Date: 2026/9/16

Communication System Band: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 39.253$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.1°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch810/Area Scan (81x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.708 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.758 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.435 W/kg; SAR(10 g) = 0.233 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 0.655 W/kg

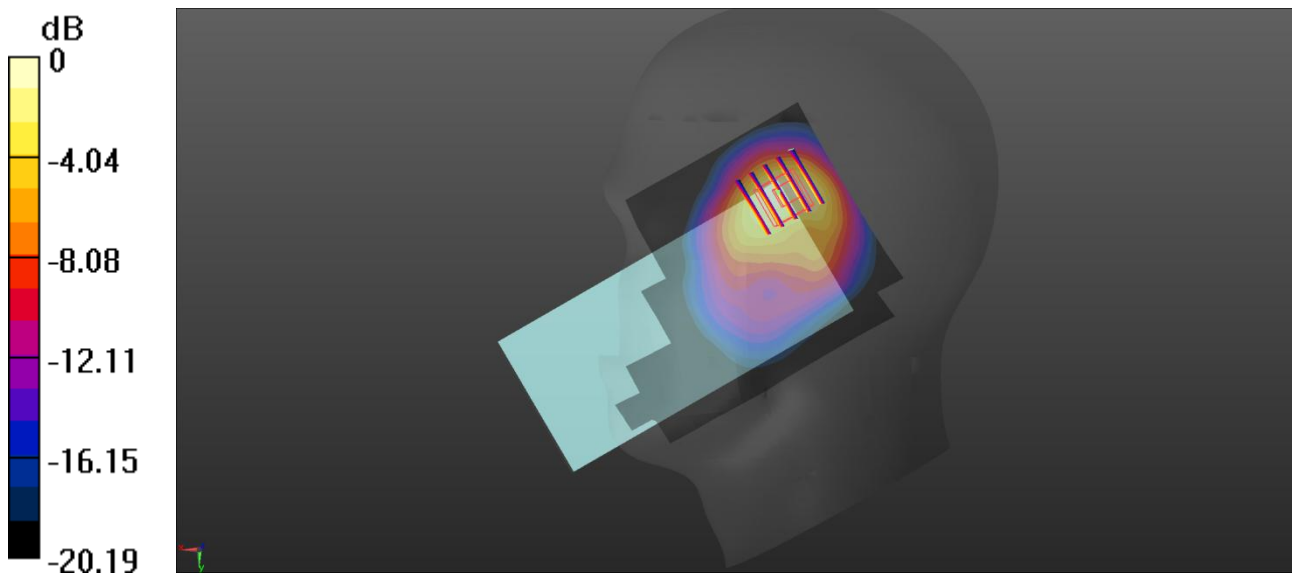

0 dB = 0.708 W/kg

Meas4.Body-wron& Hotspot Back Side GSM 1900 Ch810

Date: 2026/9/16

Communication System Band: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 39.253$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch810/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.685 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.170 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.972 W/kg

SAR(1 g) = 0.511 W/kg; SAR(10 g) = 0.269 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.4%

Maximum value of SAR (measured) = 0.791 W/kg

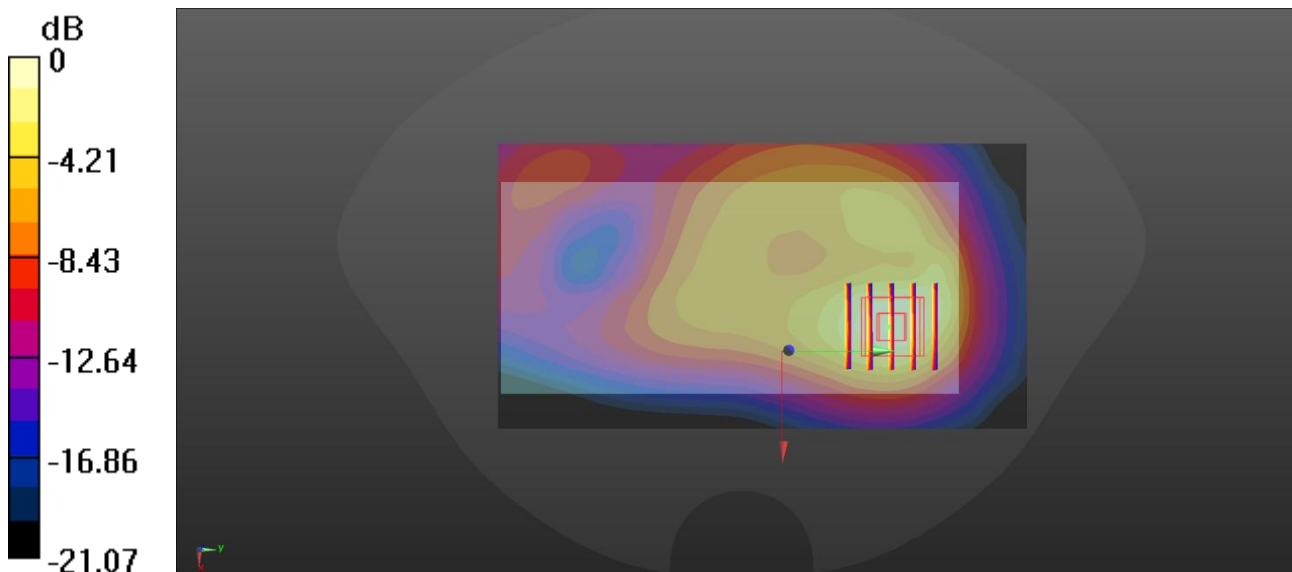

0 dB = 0.685 W/kg

Meas5.Head Right Cheek WCDMA B2 Ch9400

Date: 2026/9/16

Communication System Band: II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 39.309$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.1°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9400/Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.982 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.37 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.605 W/kg; SAR(10 g) = 0.324 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 49.9%

Maximum value of SAR (measured) = 0.959 W/kg

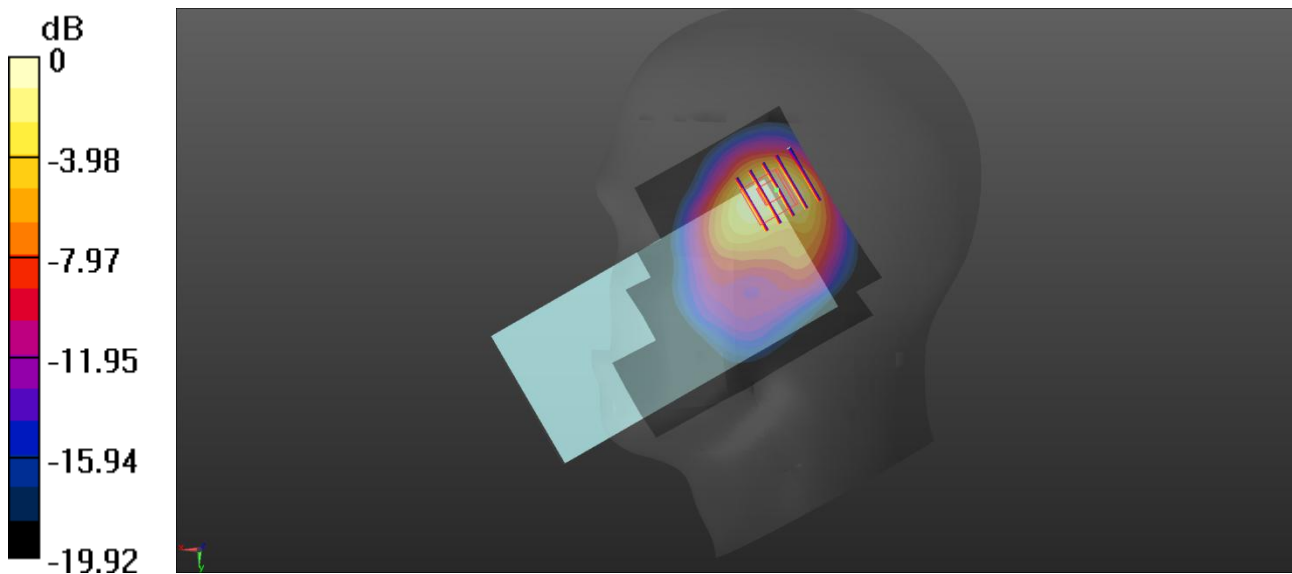

0 dB = 0.982 W/kg

Meas6.Body-wron& Hotspot Back Side WCDMA B2 Ch9400

Date: 2026/9/16

Communication System Band: II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 39.309$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9400/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.911 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.90 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.316 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 0.933 W/kg

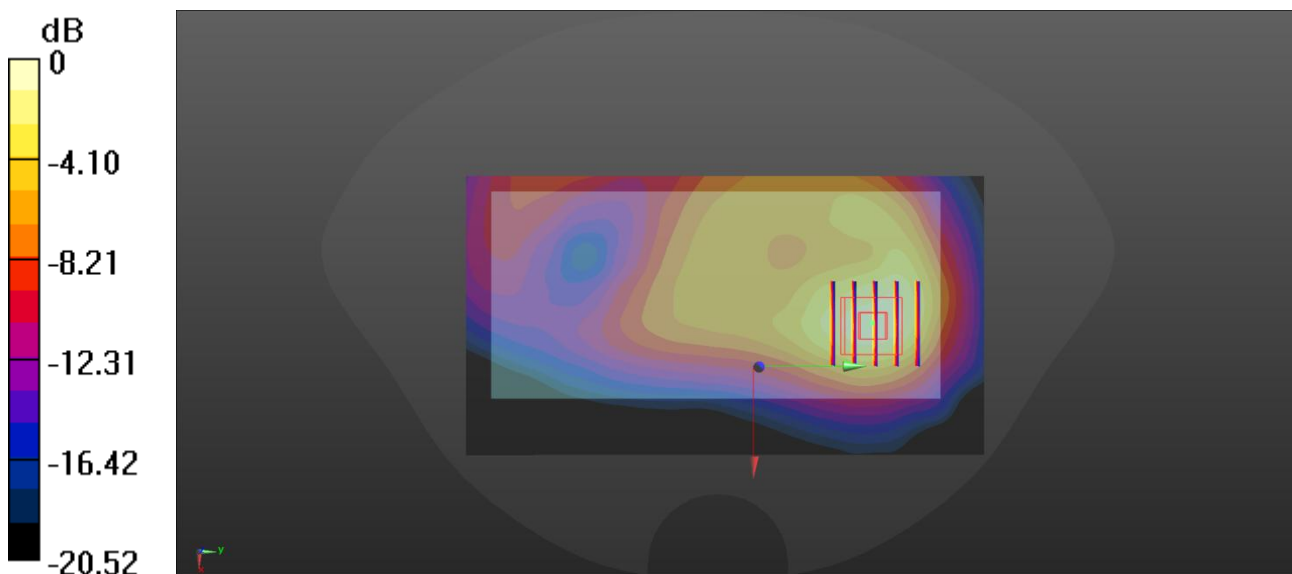

0 dB = 0.911 W/kg

Meas7.Head Right Cheek WCDMA B4 Ch1513

Date: 2026/9/17

Communication System Band: IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 39.54$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.65, 7.65, 7.65); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1513/Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.845 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.22 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.300 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 0.809 W/kg

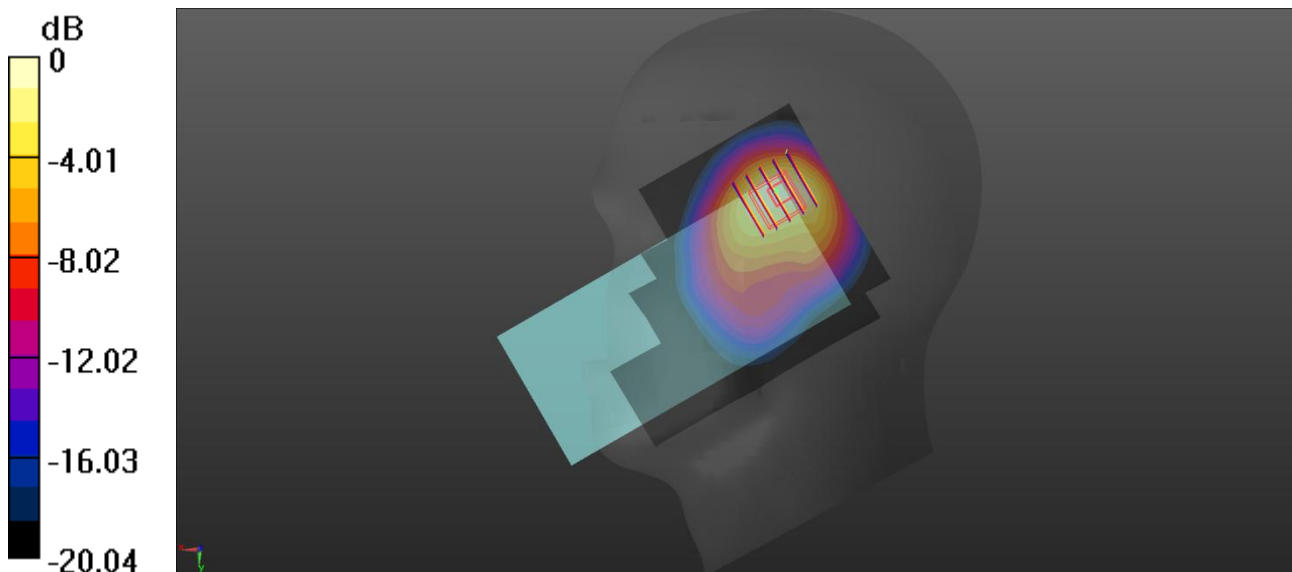

0 dB = 0.845 W/kg

Meas8.Body-wron& Hotspot Back Side WCDMA B4 Ch1513

Date: 2026/9/17

Communication System Band: IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 39.54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.65, 7.65, 7.65); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1513/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.672 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.08 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.878 W/kg

SAR(1 g) = 0.449 W/kg; SAR(10 g) = 0.233 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 53.1%

Maximum value of SAR (measured) = 0.701 W/kg

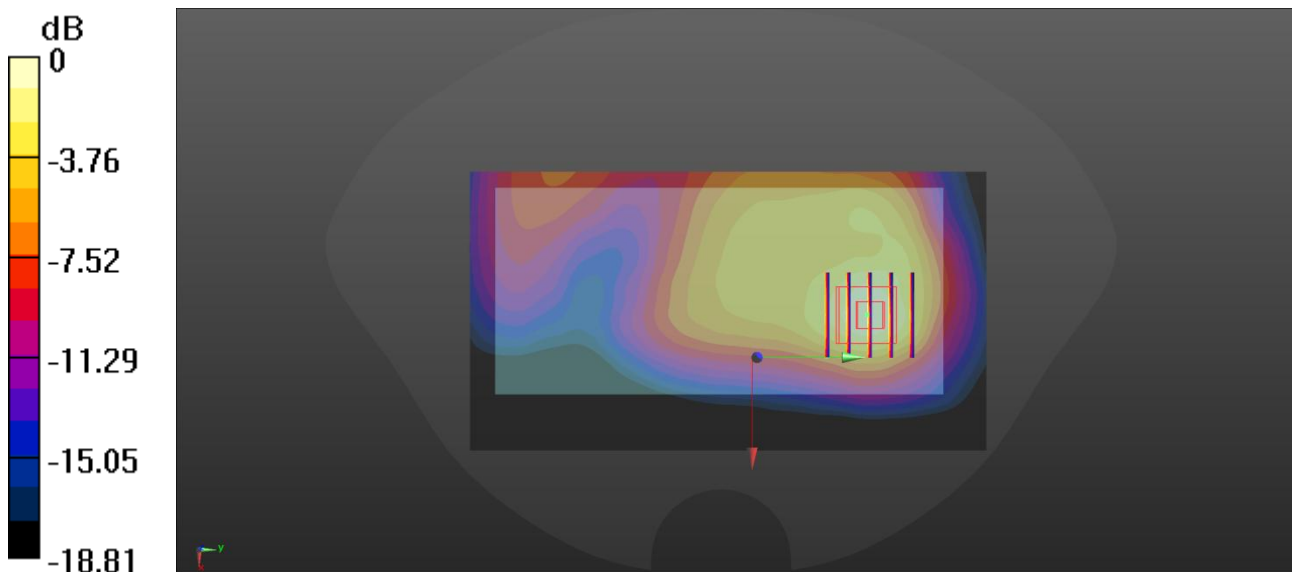

0 dB = 0.672 W/kg

Meas9.Head Left Cheek WCDMA B5 Ch4183

Date: 2026/9/15

Communication System Band: V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.192$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.71, 8.71, 8.71); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4183/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.325 W/kg

Ch4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.055 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.201 W/kg

Smallest distance from peaks to all points 3 dB below = 21 mm

Ratio of SAR at M2 to SAR at M1 = 75.5%

Maximum value of SAR (measured) = 0.321 W/kg

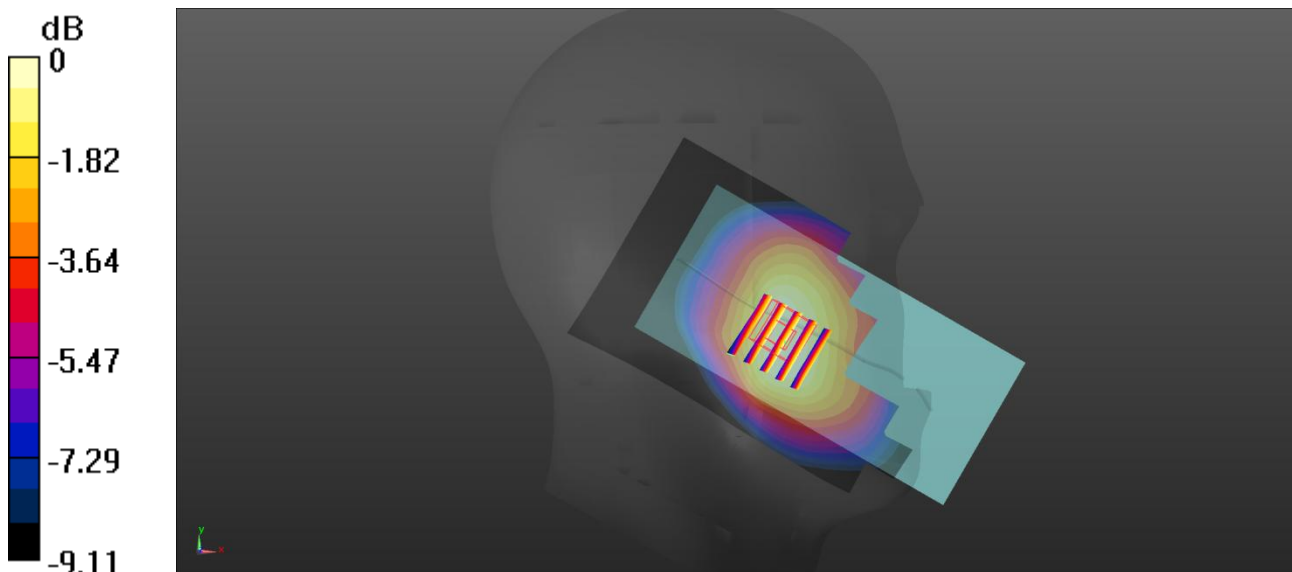

0 dB = 0.321 W/kg

Meas10.Body-wron& Hotspot Back Side 10mm WCDMA B5 Ch4183

Date: 2026/9/15

Communication System Band: V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.71, 8.71, 8.71); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4183/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.394 W/kg

Ch4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.84 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.481 W/kg

SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.183 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 0.402 W/kg

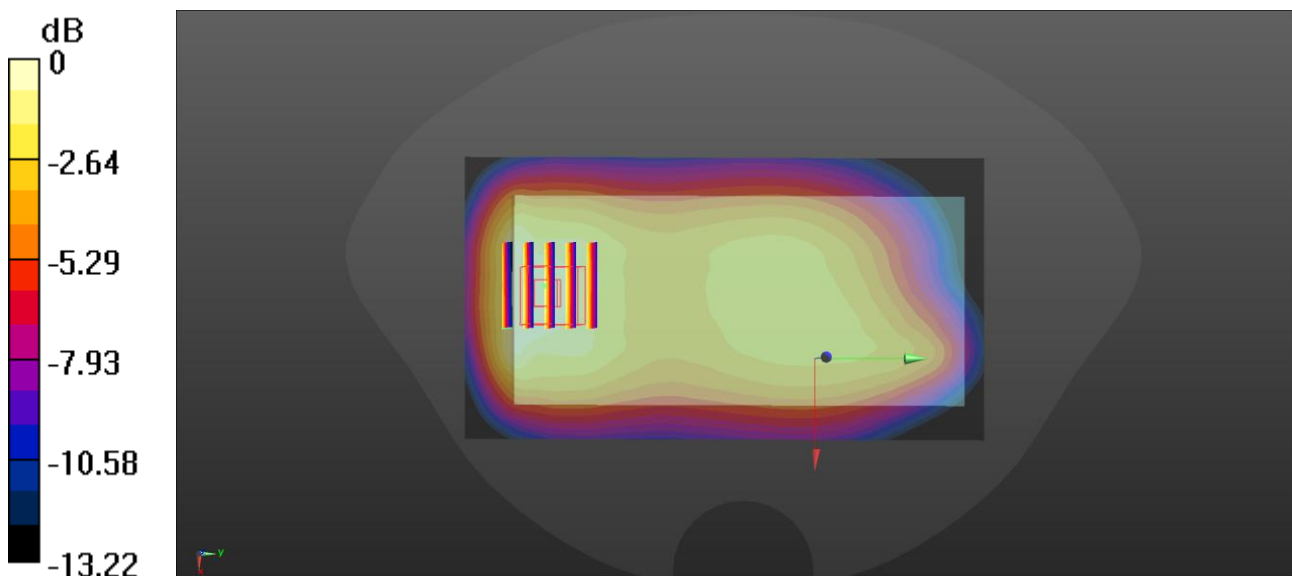

0 dB = 0.402 W/kg

Meas11.Head Left Cheek LTE B12 Ch23095

Date: 2026/9/14

Communication System Band: Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 42.643$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23095/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.361 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.963 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.394 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.239 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 78.4%

Maximum value of SAR (measured) = 0.356 W/kg

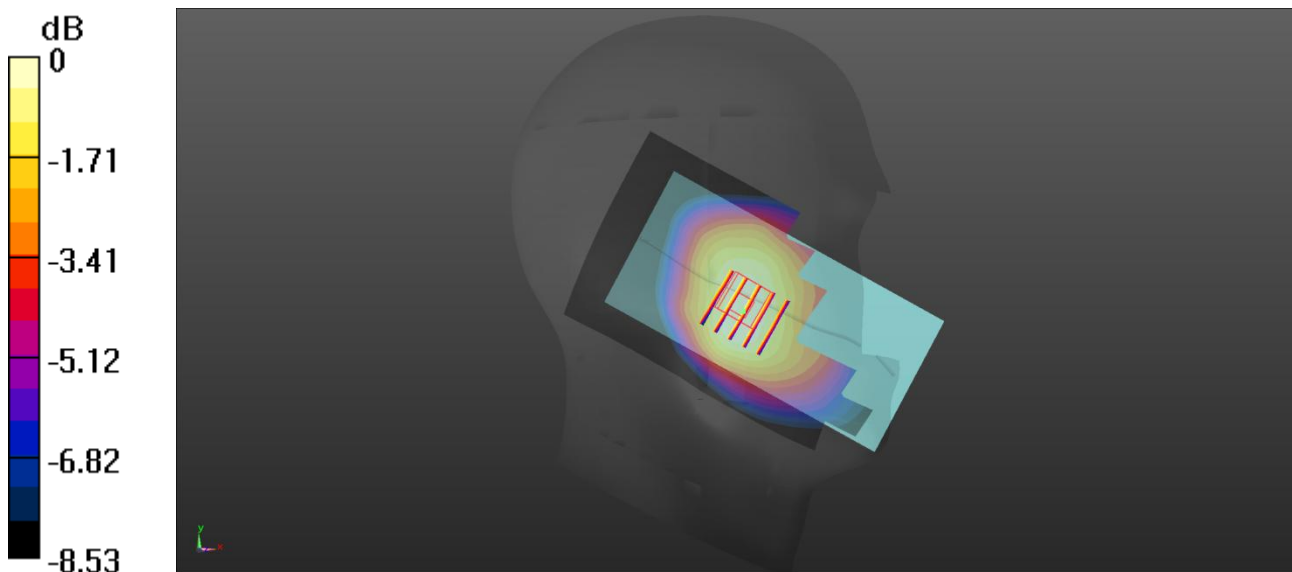

0 dB = 0.361 W/kg

Meas12.Body-wron& Hotspot Back Side 10mm LTE B12 Ch23095

Date: 2026/9/14

Communication System Band: Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 42.643$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23095/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.481 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.35 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.539 W/kg

SAR(1 g) = 0.393 W/kg; SAR(10 g) = 0.307 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 73.7%

Maximum value of SAR (measured) = 0.481 W/kg

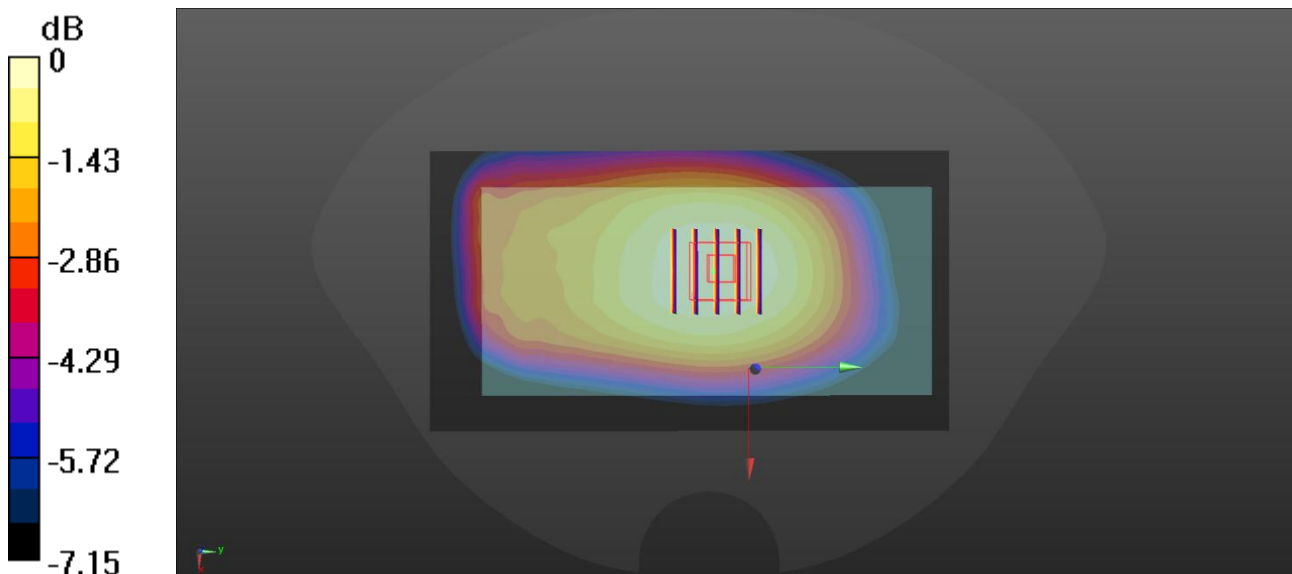

0 dB = 0.481 W/kg

Meas13.Head Left Cheek LTE B13 Ch23230

Date: 2026/9/14

Communication System Band: Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 42.377$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23230/Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.366 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.583 V/m ; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.399 W/kg

SAR(1 g) = 0.305 W/kg ; SAR(10 g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 77.4%

Maximum value of SAR (measured) = 0.364 W/kg

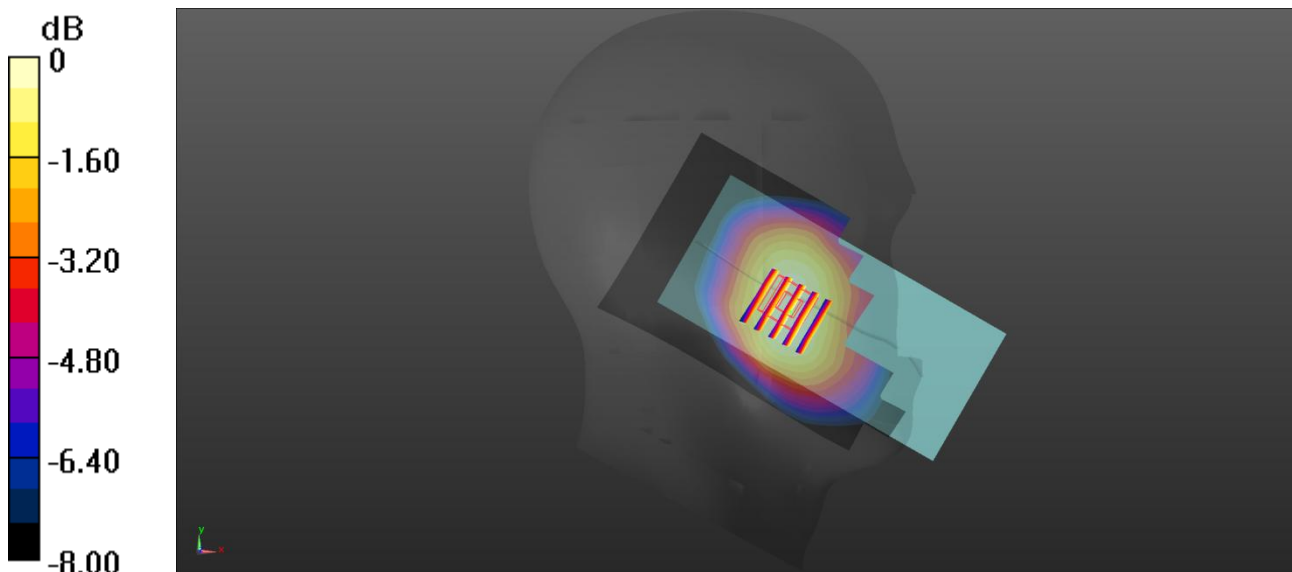

0 dB = 0.364 W/kg

Meas14.Body-wron& Hotspot Back Side 10mm LTE B13 Ch23230

Date: 2026/9/14

Communication System Band: Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 42.377$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23230/Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.476 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.87 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.391 W/kg; SAR(10 g) = 0.303 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 72.1%

Maximum value of SAR (measured) = 0.479 W/kg

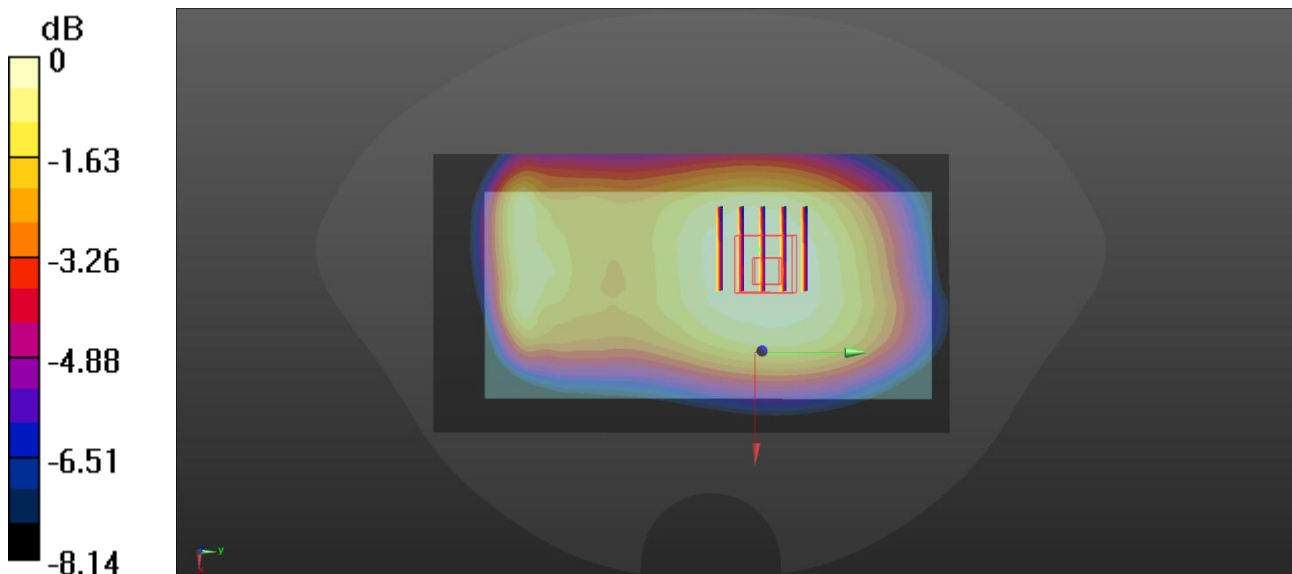

0 dB = 0.476 W/kg

Meas15.Head Right Cheek LTE B25 Ch26365

Date: 2026/9/16

Communication System Band: Band 25; Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 39.304$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.1°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26365/Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.02 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.93 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.335 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 1.03 W/kg

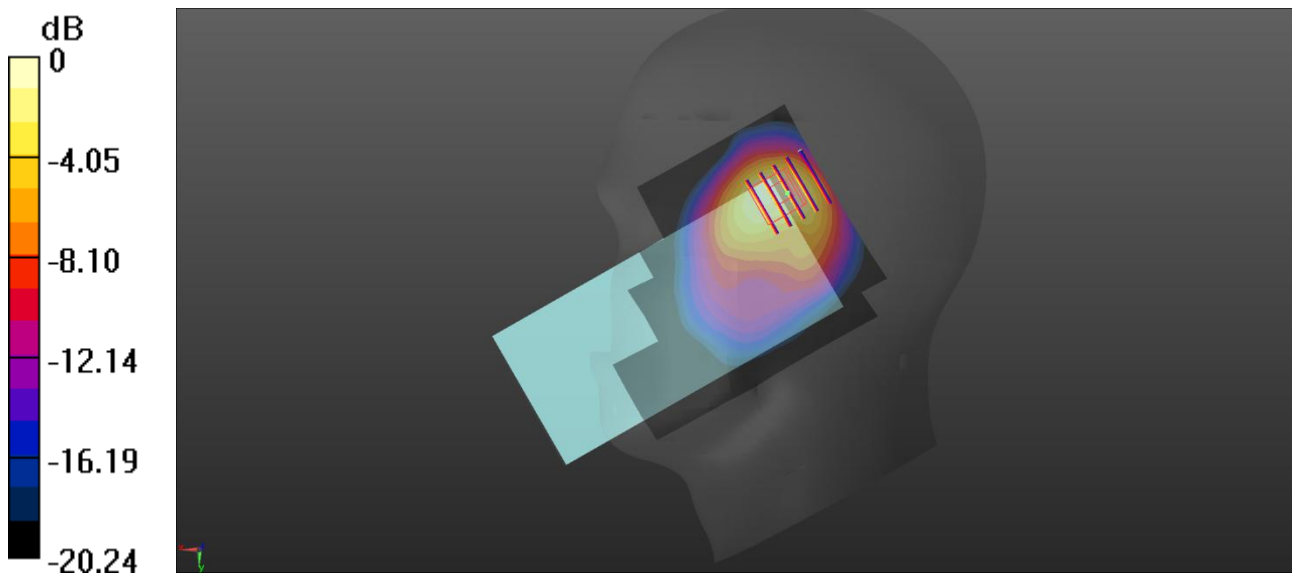

0 dB = 1.02 W/kg

Meas16.Body-wron& Hotspot Back Side LTE B25 Ch26365

Date: 2026/9/16

Communication System Band: Band 25; Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 39.304$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26365/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.832 W/kg

Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.96 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.295 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 0.868 W/kg

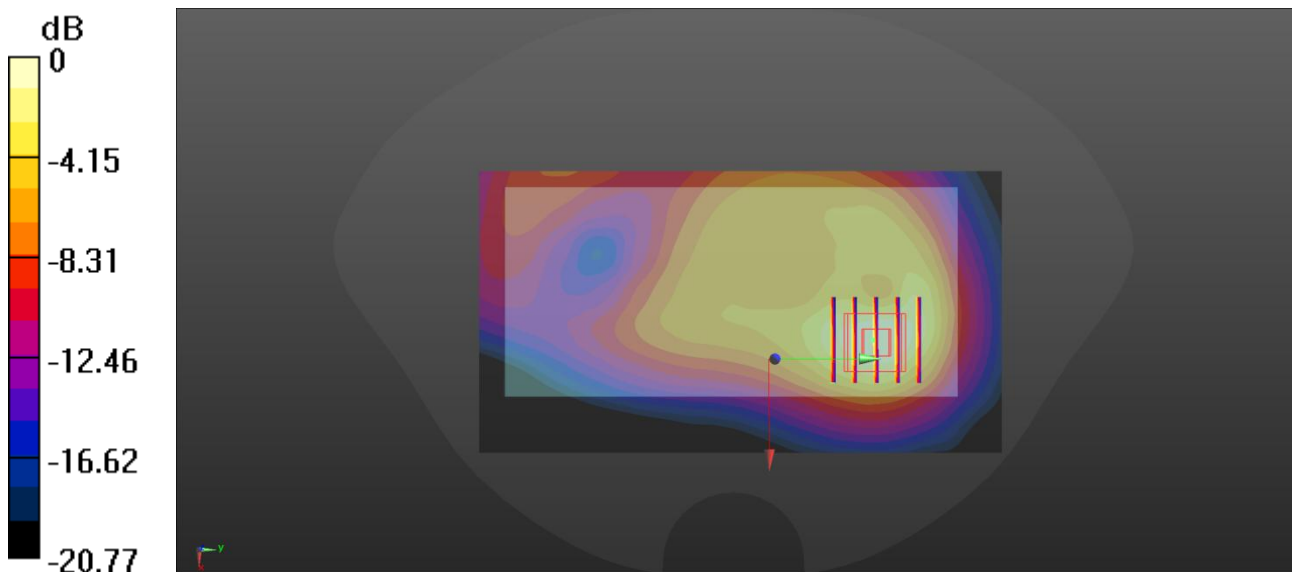

0 dB = 0.832 W/kg

Meas17.Head Left Cheek LTE B26 Ch26965

Date: 2026/9/15

Communication System Band: Band 26; Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.162$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.71, 8.71, 8.71); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26965/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.370 W/kg

Ch26965/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.082 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.407 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 77.2%

Maximum value of SAR (measured) = 0.370 W/kg

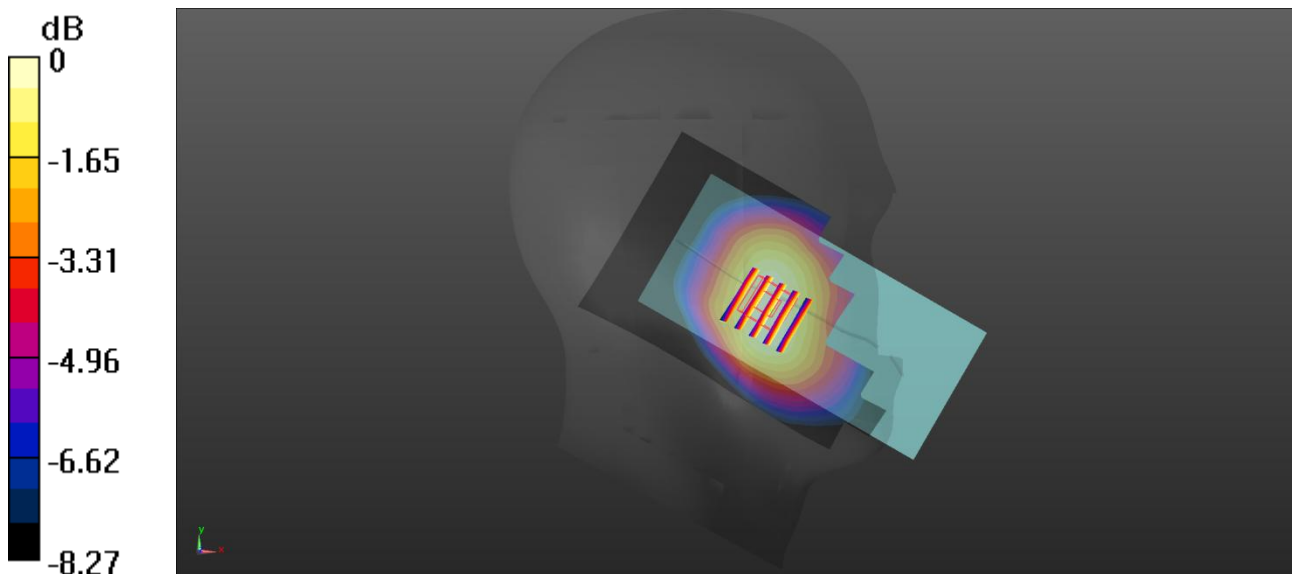

0 dB = 0.370 W/kg

Meas18.Body-wron& Hotspot Back Side 10mm LTE B26 Ch26965

Date: 2026/9/15

Communication System Band: Band 26; Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.162$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.71, 8.71, 8.71); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26965/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.514 W/kg

Ch26965/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.58 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.620 W/kg

SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.233 W/kg

Smallest distance from peaks to all points 3 dB below = 17.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.7%

Maximum value of SAR (measured) = 0.514 W/kg

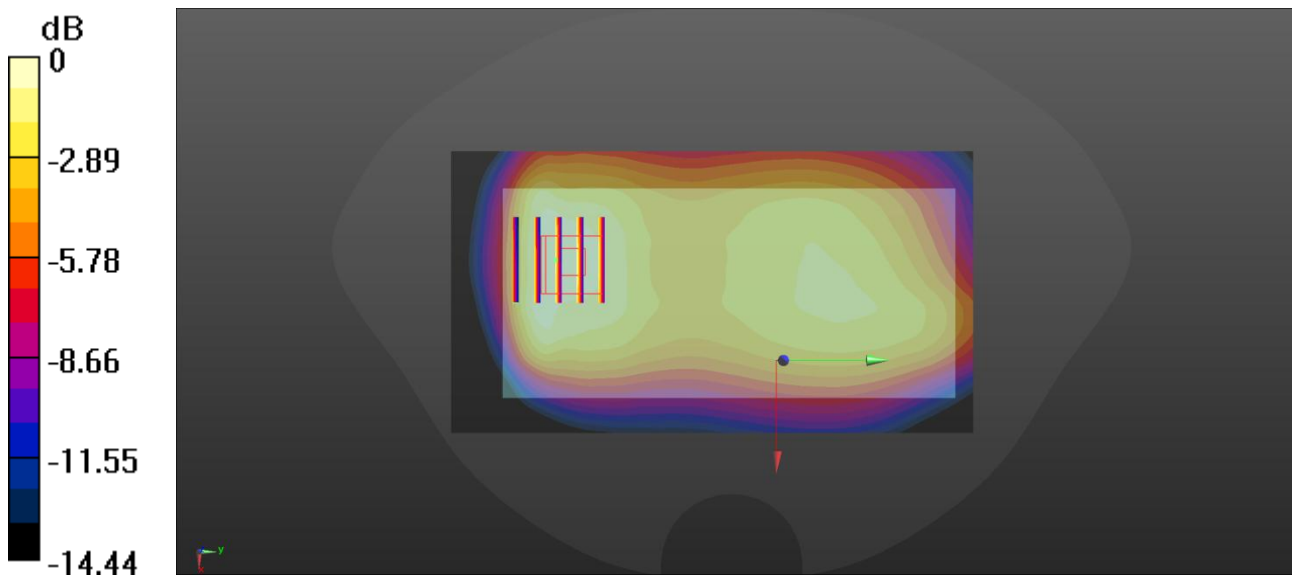

0 dB = 0.514 W/kg

Meas19.Head Right Cheek LTE B66 Ch132572

Date: 2026/9/17

Communication System Band: Band 66; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 39.501$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.65, 7.65, 7.65); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132572/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.984 W/kg

Ch132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.69 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 48.7%

Maximum value of SAR (measured) = 0.949 W/kg

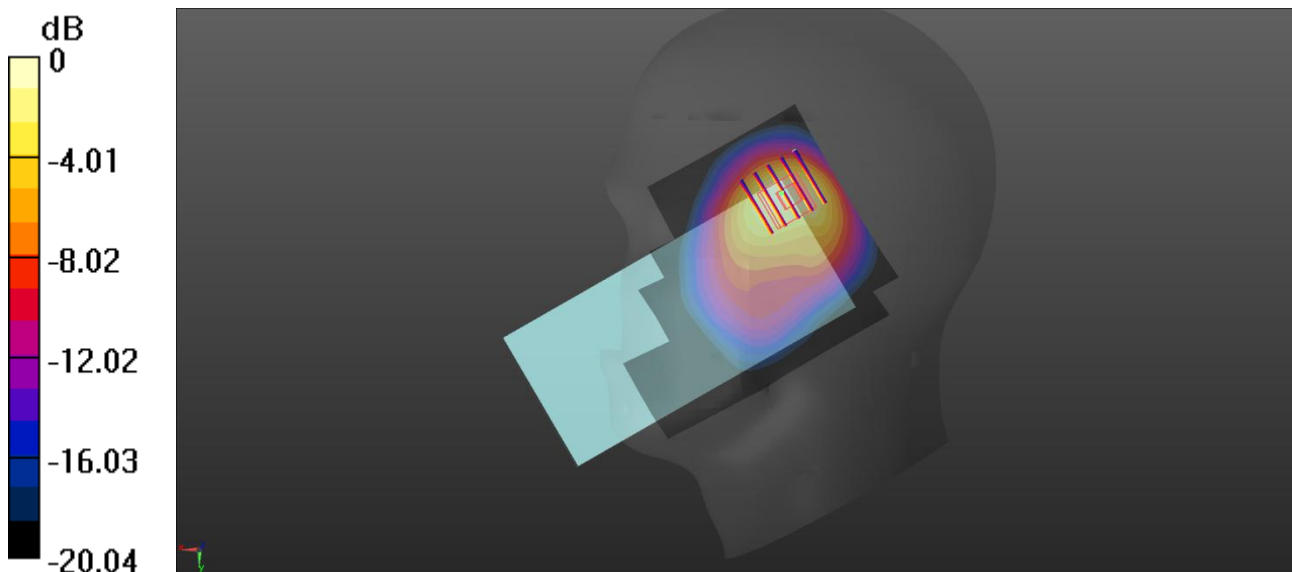

0 dB = 0.984 W/kg

Meas20.Body-wron& Hotspot Back Side LTE B66 Ch132322

Date: 2026/9/17

Communication System Band: Band 66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.335$ S/m; $\epsilon_r = 39.551$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.65, 7.65, 7.65); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132322/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.712 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.60 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.886 W/kg

SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.241 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 0.714 W/kg

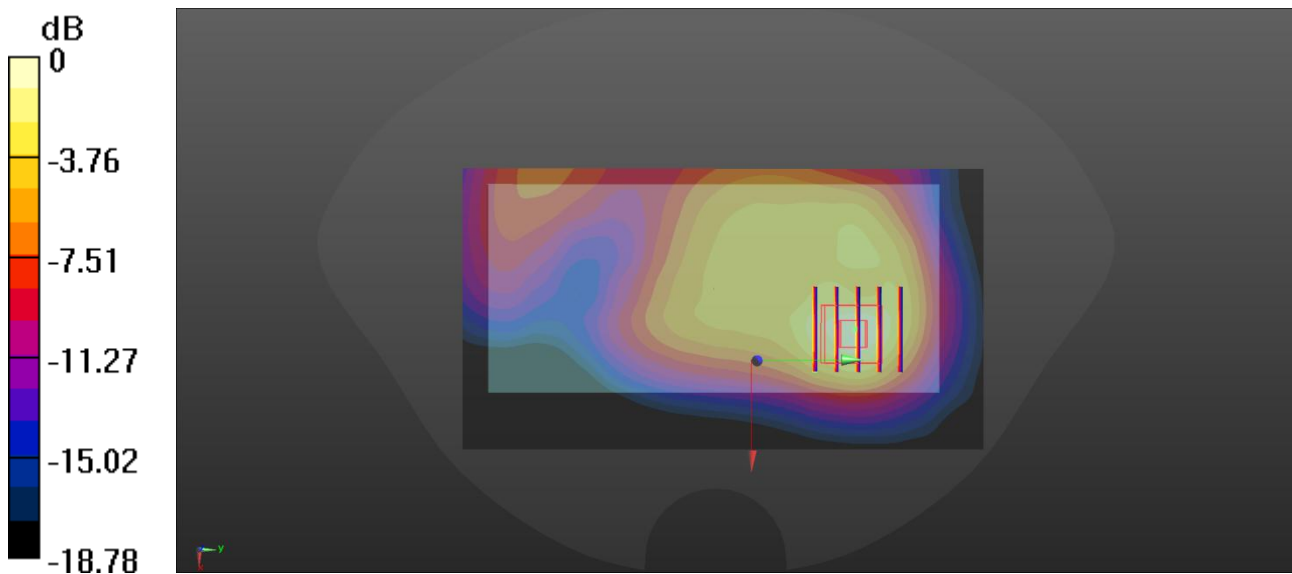

0 dB = 0.712 W/kg

Meas21.Head Left Cheek LTE B71 Ch133322

Date: 2026/9/14

Communication System Band: Band 71; Frequency: 683 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 683$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 42.72$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch133322/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.297 W/kg

Ch133322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.289 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.321 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.202 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 80.4%

Maximum value of SAR (measured) = 0.292 W/kg

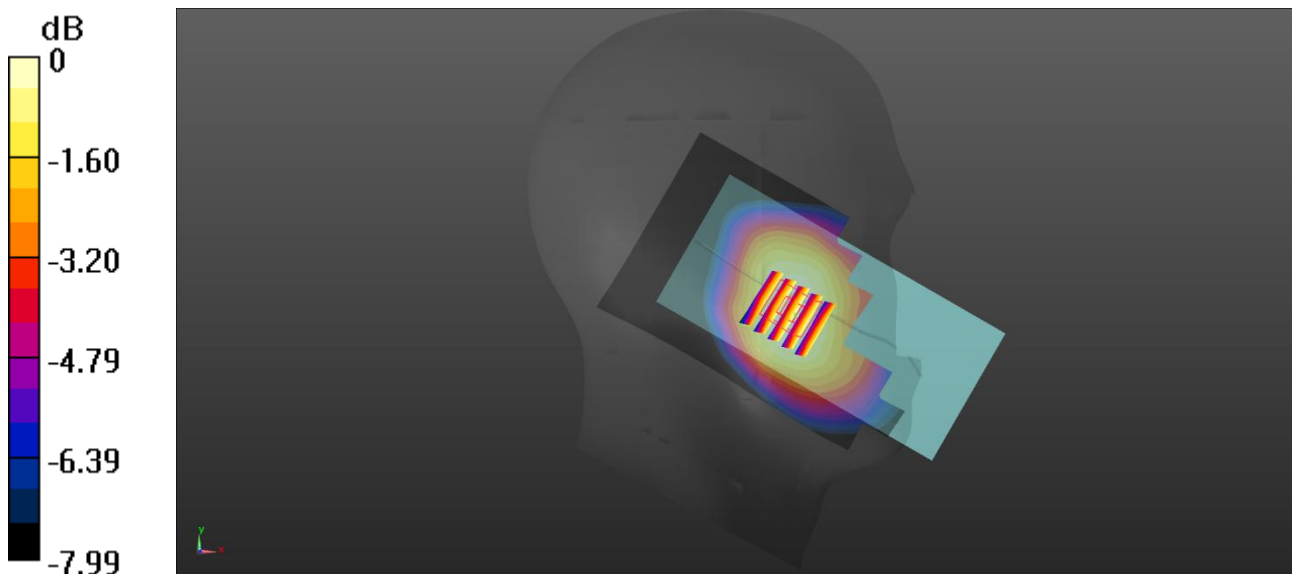

0 dB = 0.292 W/kg

Meas22.Body-wron& Hotspot Back Side 10mm LTE B71 Ch133322

Date: 2026/9/14

Communication System Band: Band 71; Frequency: 683 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 683$ MHz; $\sigma = 0.848$ S/m; $\epsilon_r = 42.72$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.11, 9.11, 9.11); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch133322/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.442 W/kg

Ch133322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.19 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.487 W/kg

SAR(1 g) = 0.359 W/kg; SAR(10 g) = 0.280 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 74.9%

Maximum value of SAR (measured) = 0.435 W/kg

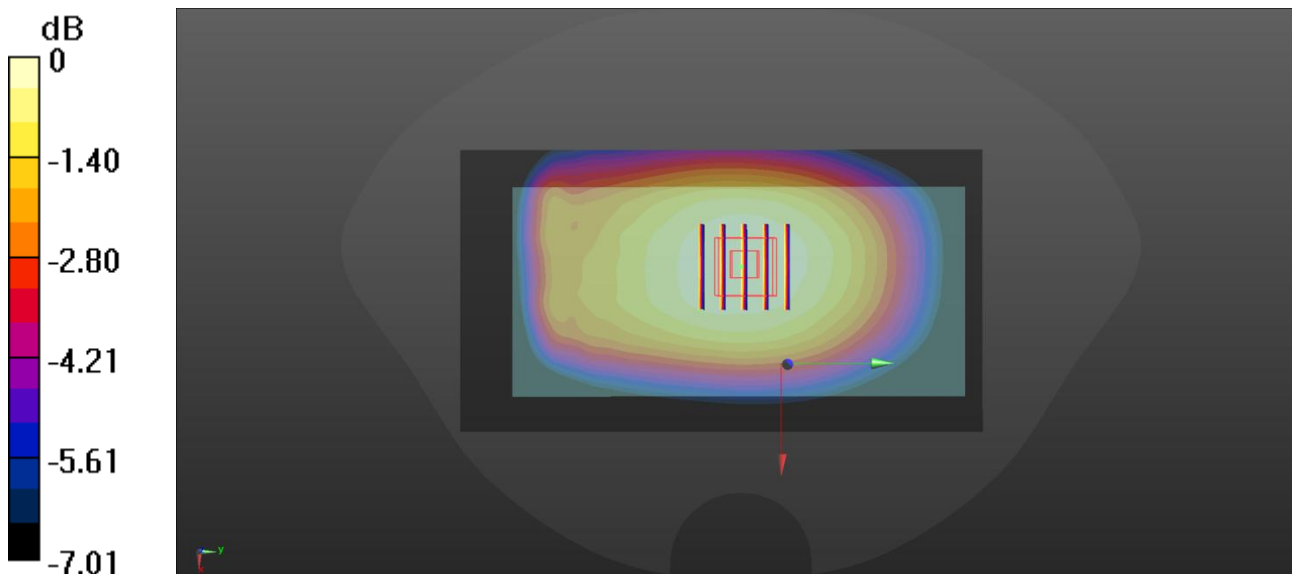

0 dB = 0.435 W/kg

Meas23.Head Left Cheek BT Ch39

Date: 2026/9/17

Communication System Band: BT; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.226$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39/Area Scan (91x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.183 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.562 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.200 W/kg

SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.051 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 45.8%

Maximum value of SAR (measured) = 0.154 W/kg

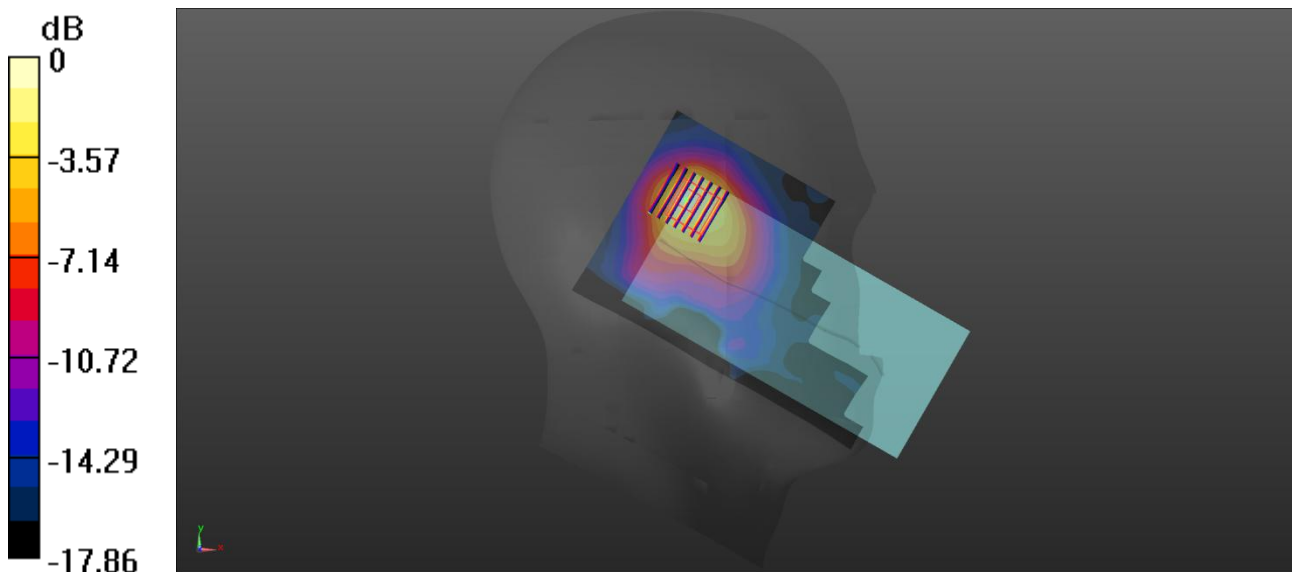

0 dB = 0.183 W/kg

Meas24.Body-wron& Hotspot Back Side 10mm BT Ch39

Date: 2026/9/17

Communication System Band: BT; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.777$ S/m; $\epsilon_r = 40.226$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39/Area Scan (91x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0518 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.487 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.0710 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.016 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 47.3%

Maximum value of SAR (measured) = 0.0536 W/kg

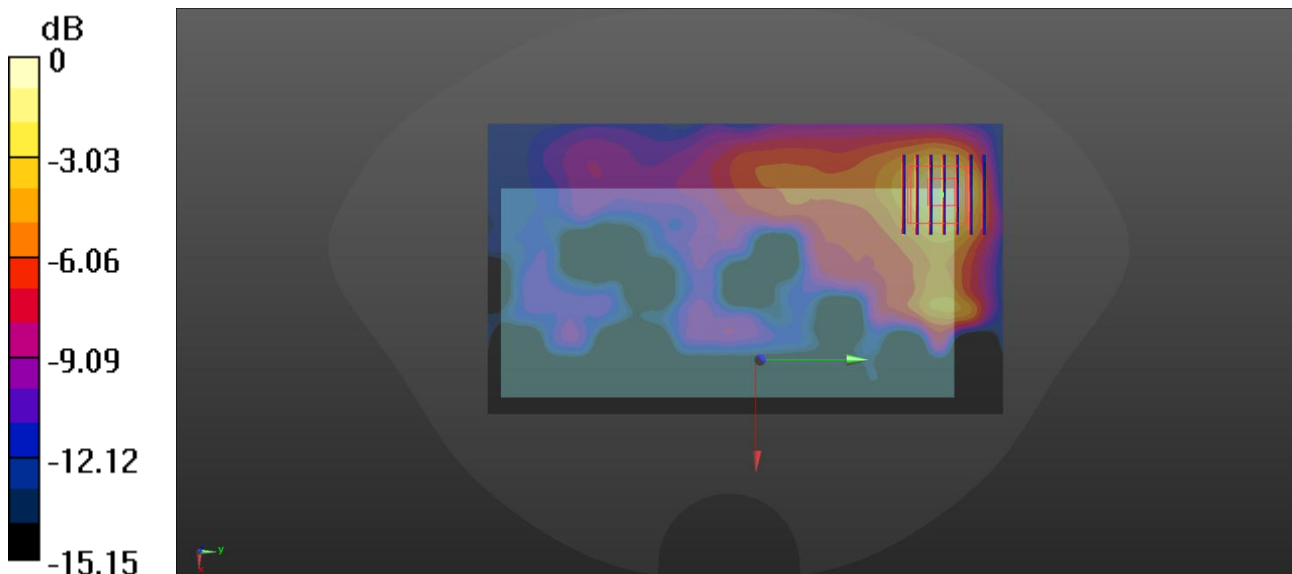

0 dB = 0.0536 W/kg

Meas25.Head Left Cheek WLAN 2.4G Ch6

Date: 2026/9/17

Communication System Band: WLAN(b); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.774$ S/m; $\epsilon_r = 40.233$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch6/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.440 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.882 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.564 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.129 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 45.1%

Maximum value of SAR (measured) = 0.444 W/kg

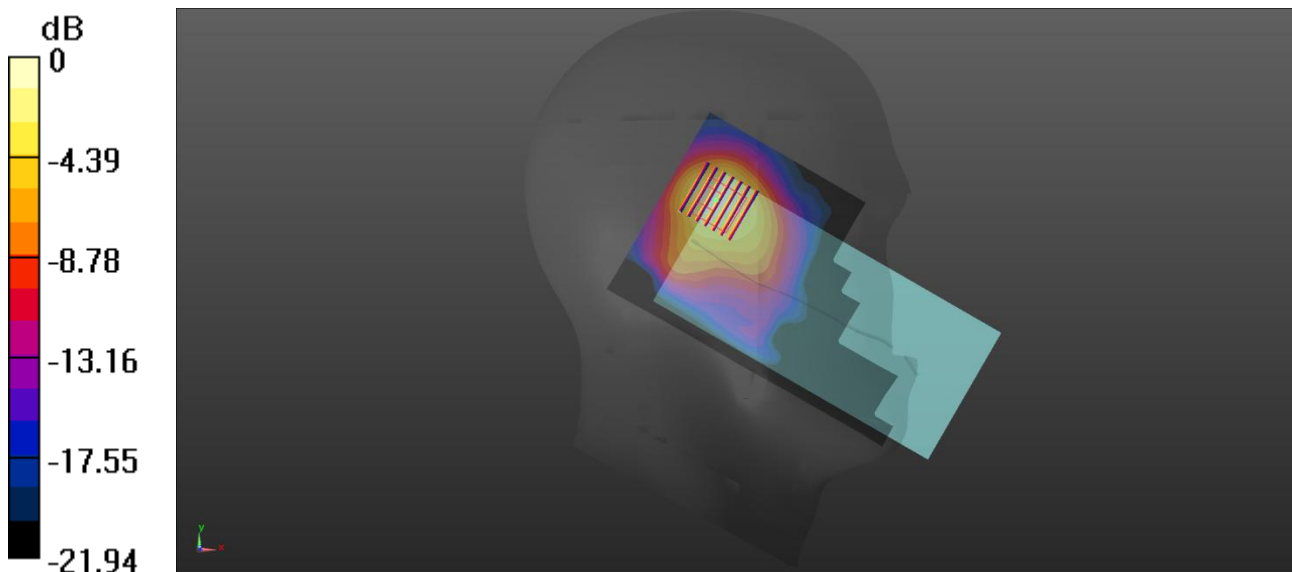

0 dB = 0.444 W/kg

Meas26.Body-wron& Hotspot Back Side WLAN 2.4G Ch6

Date: 2026/9/17

Communication System Band: WLAN(b); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.774$ S/m; $\epsilon_r = 40.233$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.95, 6.95, 6.95); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch6/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.399 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.978 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.498 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.117 W/kg

Smallest distance from peaks to all points 3 dB below = 12.6 mm

Ratio of SAR at M2 to SAR at M1 = 46.4%

Maximum value of SAR (measured) = 0.393 W/kg

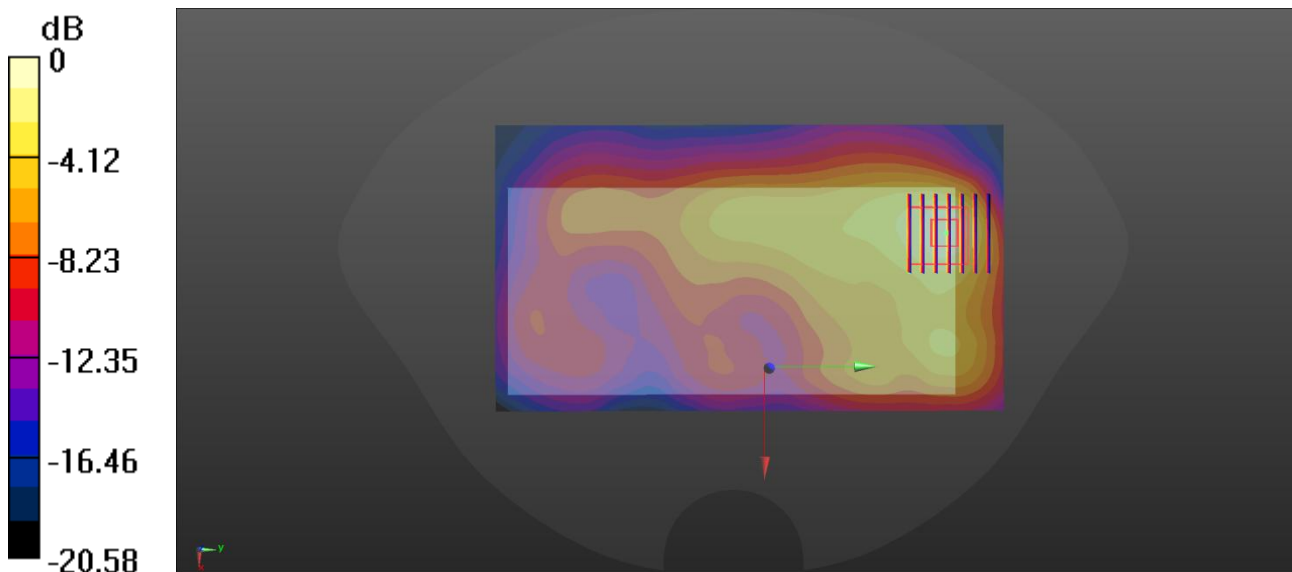

0 dB = 0.399 W/kg

Meas27.Head Right Tilt WLAN 5.2G Ch36

Date: 2026/9/18

Communication System Band: WLAN(a); Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.723$ S/m; $\epsilon_r = 36.31$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.9, 4.9, 4.9); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch36/Area Scan (101x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.574 W/kg

Ch36/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.634 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.817 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 0.523 W/kg

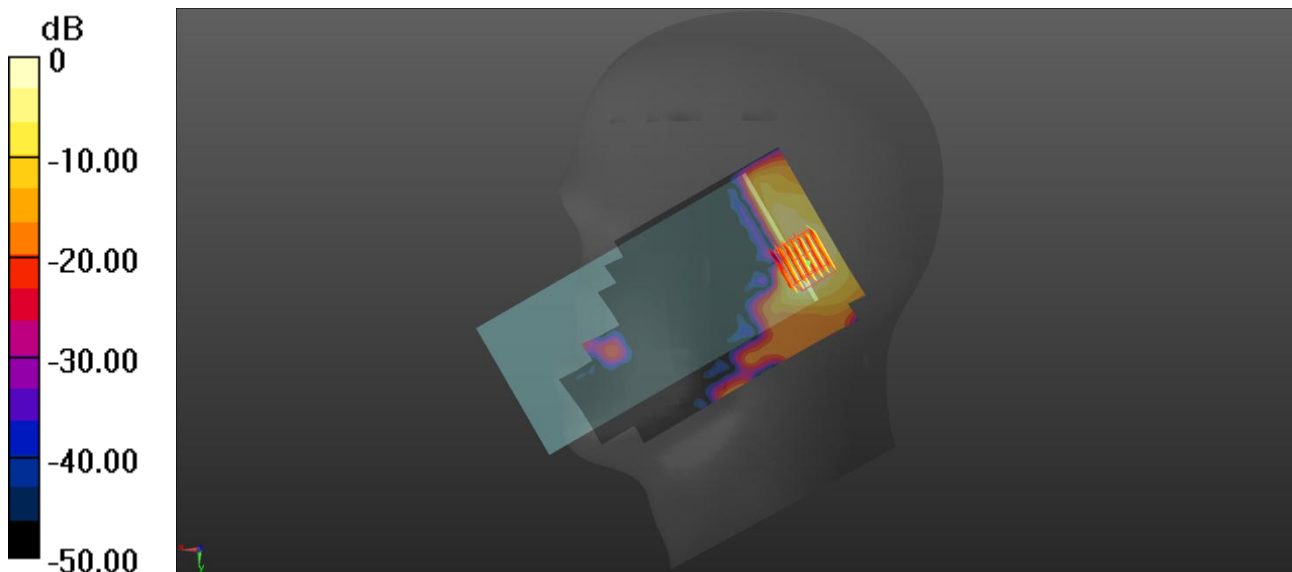

0 dB = 0.523 W/kg

Meas28.Head Right Tilt WLAN 5.3G Ch64

Date: 2026/9/18

Communication System Band: WLAN(a); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5320$ MHz; $\sigma = 4.896$ S/m; $\epsilon_r = 36.005$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.9, 4.9, 4.9); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch64/Area Scan (101x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.540 W/kg

Ch64/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.068 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 0.484 W/kg

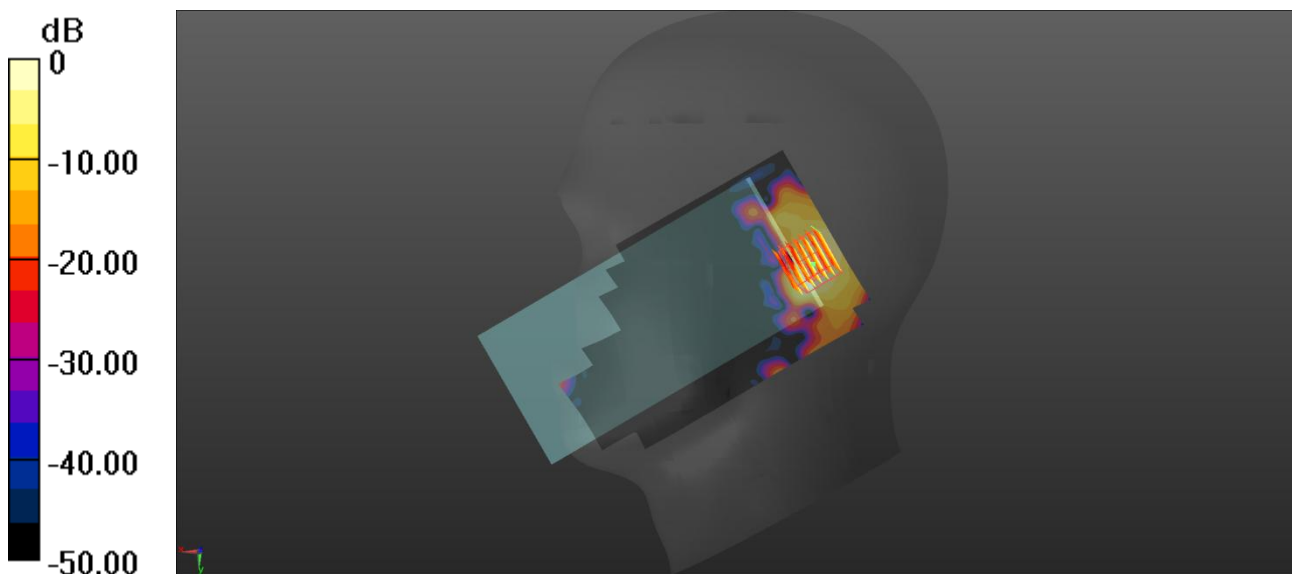

0 dB = 0.484 W/kg

Meas29.Head Right Tilt WLAN 5.6G Ch122

Date: 2026/9/19

Communication System Band: WLAN(ac) 80Mhz; Frequency: 5610 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.263$ S/m; $\epsilon_r = 35.352$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 21.8°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.3, 4.3, 4.3); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch122/Area Scan (101x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.614 W/kg

Ch122/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.4340 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.723 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.064 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 0.462 W/kg

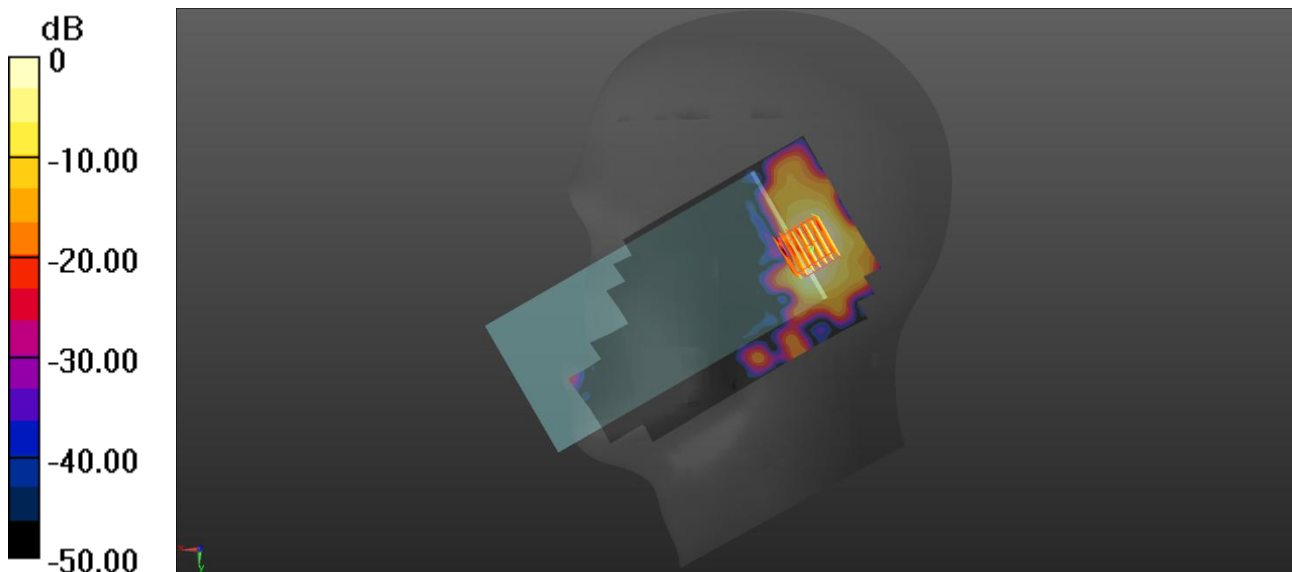

0 dB = 0.462 W/kg

Meas30.Head Right Tilt WLAN 5.8G Ch155

Date: 2026/9/19

Communication System Band: WLAN(ac) 80Mhz; Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.466$ S/m; $\epsilon_r = 35.004$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 21.8°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.45, 4.45, 4.45); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch155/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.881 W/kg

Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.025 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 0.580 W/kg

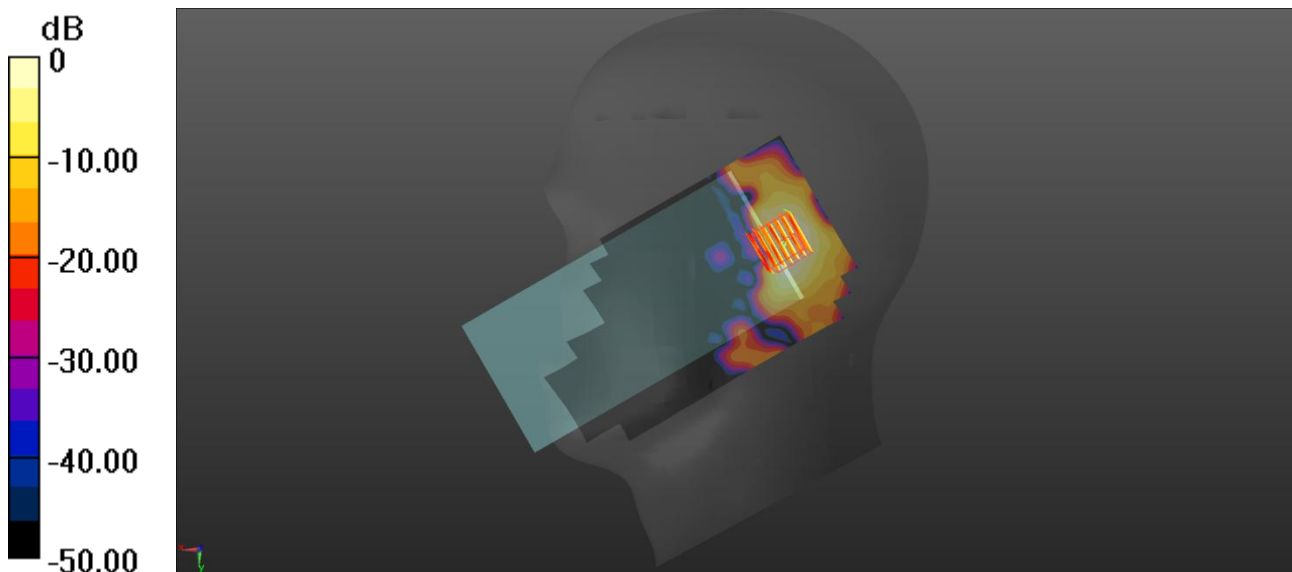

0 dB = 0.580 W/kg

Meas31.Body-wron& Hotspot Back Side 10mm WLAN 5.2G Ch48

Date: 2026/9/18

Communication System Band: WLAN(a); Frequency: 5240 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.796$ S/m; $\epsilon_r = 36.182$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.7°C Liquid Temperature:21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.9, 4.9, 4.9); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch48/Area Scan (101x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.571 W/kg

Ch48/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.4750 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.850 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.082 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 0.540 W/kg

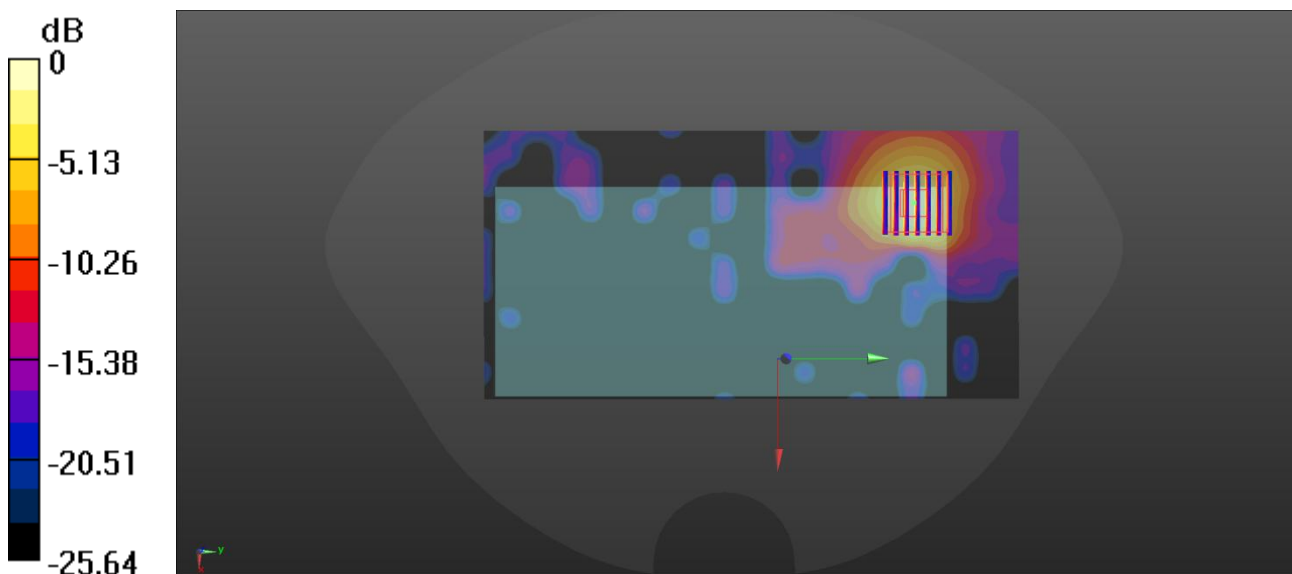

0 dB = 0.571 W/kg

Meas32.Body-wron& Hotspot Back Side 10mm WLAN 5.3G Ch52

Date: 2026/9/18

Communication System Band: WLAN(a); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 4.823$ S/m; $\epsilon_r = 36.133$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.9, 4.9, 4.9); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch52/Area Scan (101x201x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.585 W/kg

Ch52/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.887 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.083 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.6%

Maximum value of SAR (measured) = 0.558 W/kg

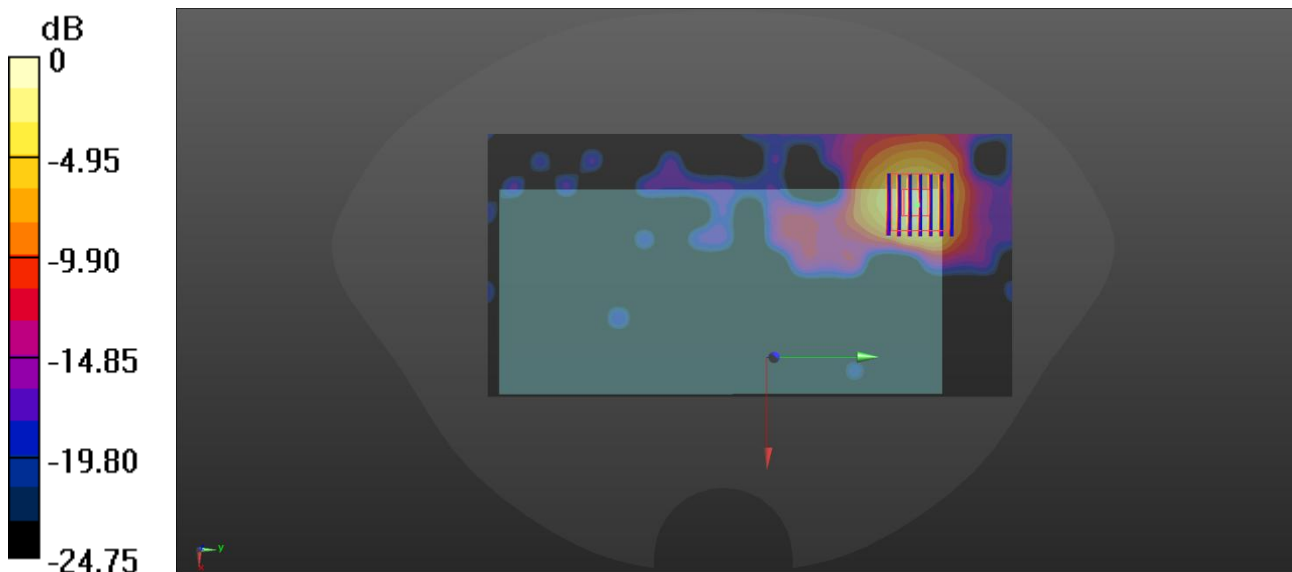

0 dB = 0.585 W/kg

Meas33.Body-wron& Hotspot Back Side 10mm WLAN 5.6G Ch122

Date: 2026/9/19

Communication System Band: WLAN(ac) 80Mhz; Frequency: 5610 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5610$ MHz; $\sigma = 5.263$ S/m; $\epsilon_r = 35.352$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:21.8°C Liquid Temperature:20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.3, 4.3, 4.3); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch122/Area Scan (101x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.608 W/kg

Ch122/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.948 W/kg

SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.087 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 0.574 W/kg

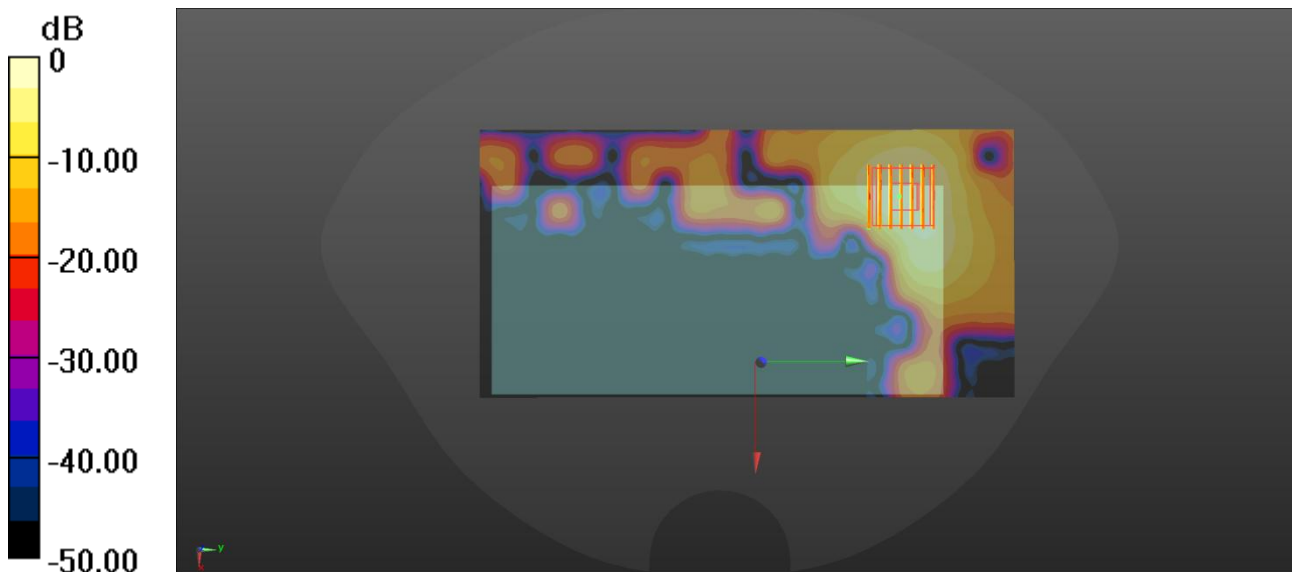

0 dB = 0.608 W/kg

Meas34.Body-wron& Hotspot Back Side 10mm WLAN 5.8G Ch155

Date: 2026/9/19

Communication System Band: WLAN(ac) 80Mhz; Frequency: 5775 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.466$ S/m; $\epsilon_r = 35.004$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:21.8°C Liquid Temperature:20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.45, 4.45, 4.45); Calibrated: 2026/7/13
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2026/7/13
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch155/Area Scan (101x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.546 W/kg

Ch155/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.825 W/kg

SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 0.461 W/kg

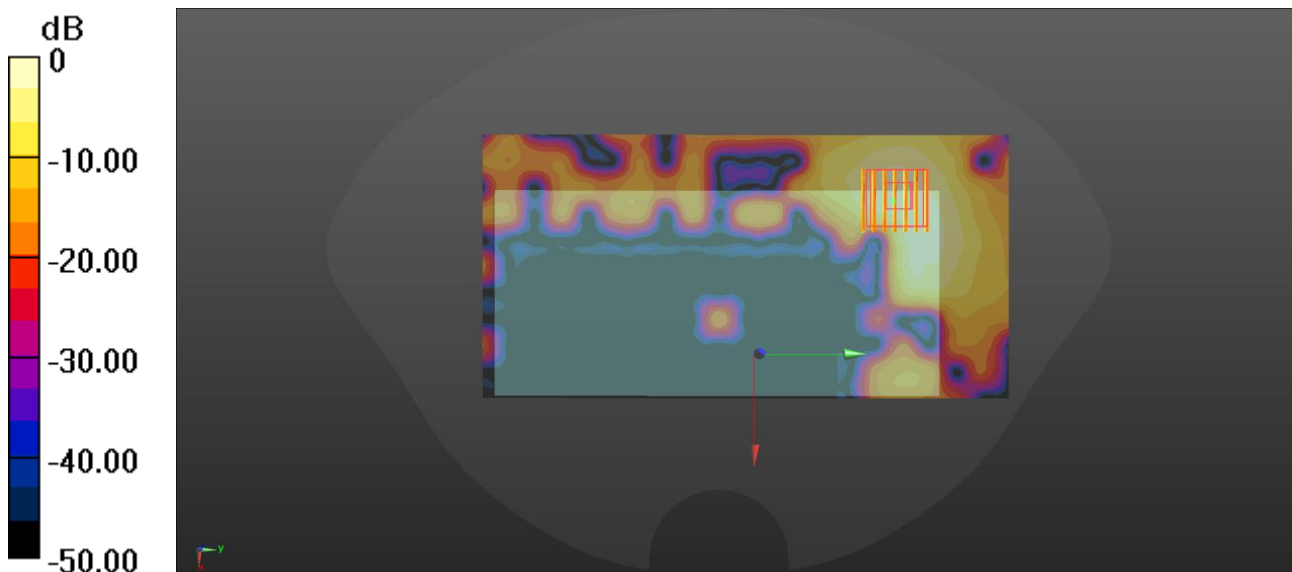

0 dB = 0.546 W/kg