

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_20.43.19

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIIIFI 11a CH44 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

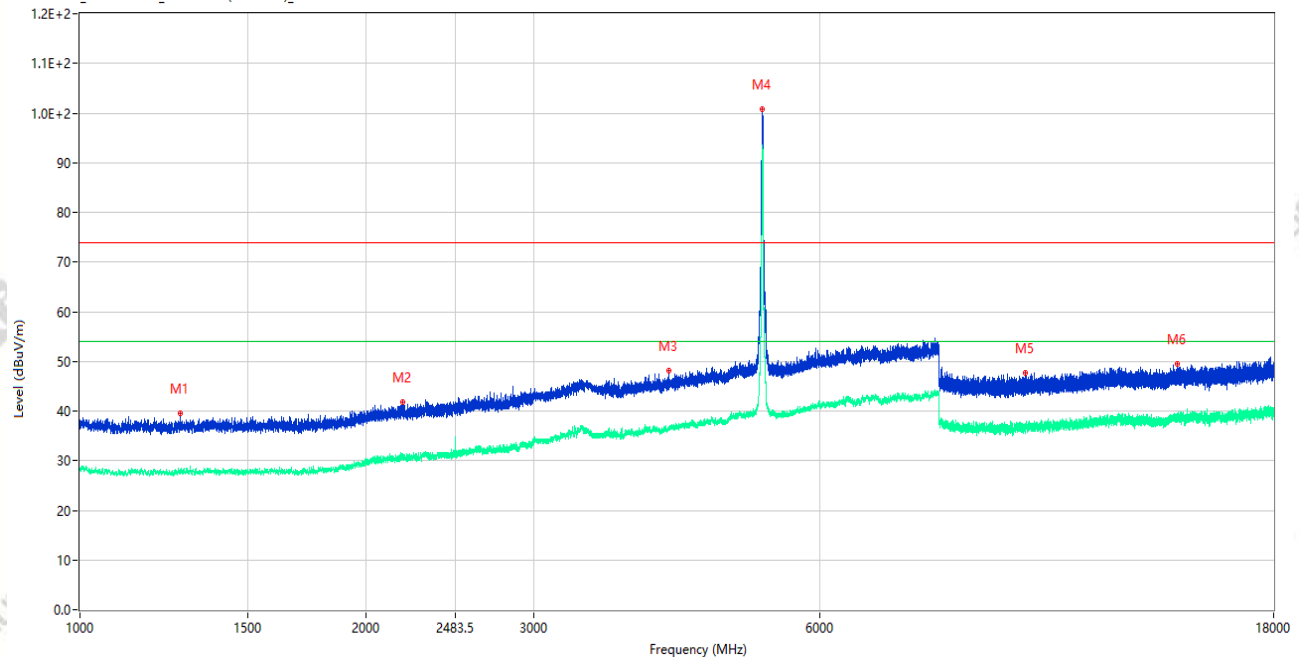

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1275.750	39.45	-15.83	74.0	34.55	Peak	340.00	150	Vertical	Pass
1**	1275.750	28.09	-15.83	54.0	25.91	AV	340.00	150	Vertical	Pass
2	2185.500	41.84	-13.18	74.0	32.16	Peak	83.00	150	Vertical	Pass
2**	2185.500	31.27	-13.18	54.0	22.73	AV	83.00	150	Vertical	Pass
3	4161.500	48.04	-4.53	74.0	25.96	Peak	360.00	150	Vertical	Pass
3**	4161.500	36.23	-4.53	54.0	17.77	AV	360.00	150	Vertical	Pass
4	5222.000	100.85	-2.36	74.0	-26.85	Peak	344.00	150	Vertical	N/A
4**	5222.000	93.30	-2.36	54.0	-39.30	AV	344.00	150	Vertical	N/A
5	9858.912	47.61	-4.13	74.0	26.39	Peak	6.00	150	Vertical	Pass
5**	9858.912	36.69	-4.13	54.0	17.31	AV	6.00	150	Vertical	Pass
6	14262.263	49.44	-2.35	74.0	24.56	Peak	347.00	150	Vertical	Pass
6**	14262.263	38.40	-2.35	54.0	15.60	AV	347.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_20.48.13

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIIIFI 11a CH44 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

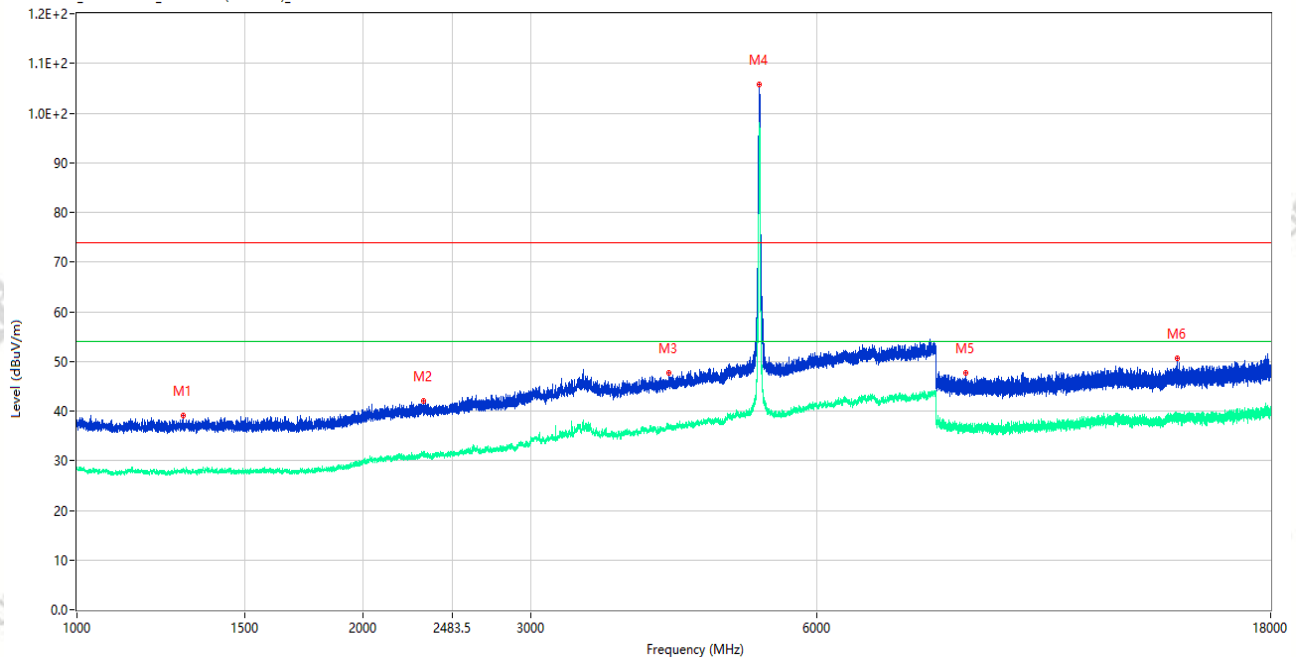

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1293.000	39.08	-15.77	74.0	34.92	Peak	0.00	150	Horizontal	Pass
1**	1293.000	28.25	-15.77	54.0	25.75	AV	0.00	150	Horizontal	Pass
2	2314.750	41.93	-12.43	74.0	32.07	Peak	0.00	150	Horizontal	Pass
2**	2314.750	30.90	-12.43	54.0	23.10	AV	0.00	150	Horizontal	Pass
3	4188.000	47.75	-3.79	74.0	26.25	Peak	17.00	150	Horizontal	Pass
3**	4188.000	37.03	-3.79	54.0	16.97	AV	17.00	150	Horizontal	Pass
4	5221.500	105.71	-2.37	74.0	-31.71	Peak	227.00	150	Horizontal	N/A
4**	5221.500	98.12	-2.37	54.0	-44.12	AV	227.00	150	Horizontal	N/A
5	8599.925	47.61	-4.97	74.0	26.39	Peak	239.00	150	Horizontal	Pass
5**	8599.925	36.97	-4.97	54.0	17.03	AV	239.00	150	Horizontal	Pass
6	14362.800	50.68	-1.45	74.0	23.32	Peak	0.00	150	Horizontal	Pass
6**	14362.800	38.50	-1.45	54.0	15.50	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_20.57.41

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIIFI 11n20 CH44 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

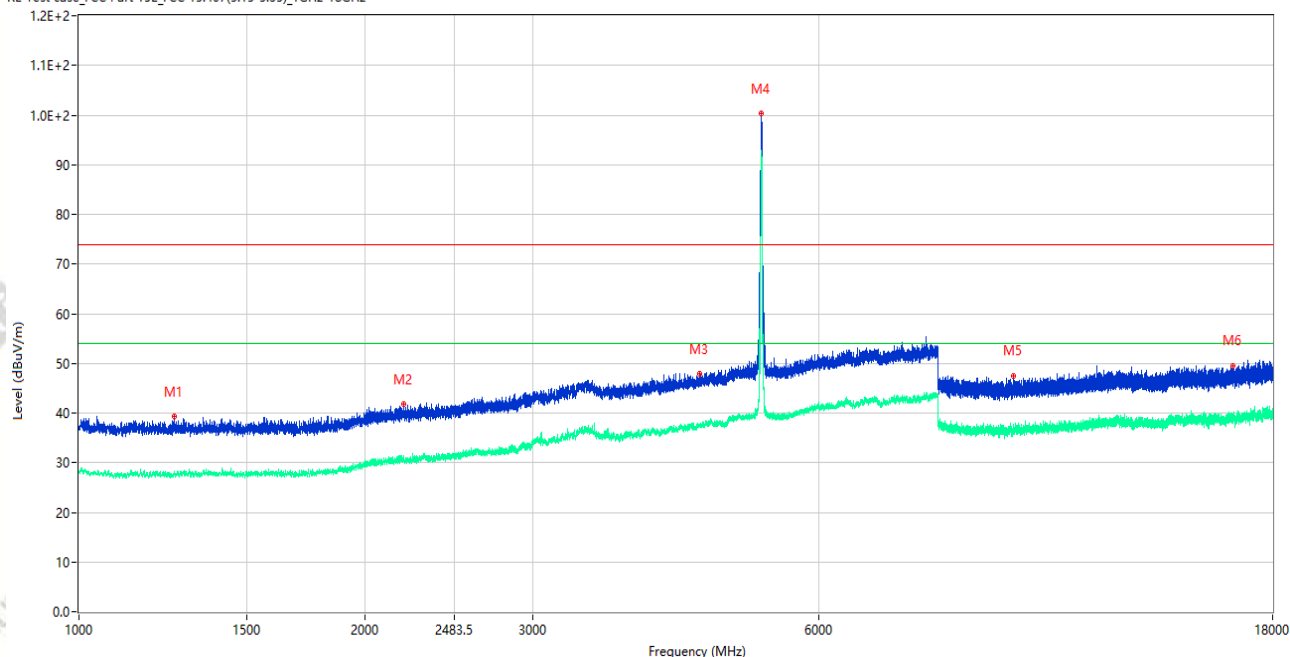

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1260.250	39.22	-16.02	74.0	34.78	Peak	225.00	150	Vertical	Pass
1**	1260.250	27.84	-16.02	54.0	26.16	AV	225.00	150	Vertical	Pass
2	2195.500	41.82	-13.32	74.0	32.18	Peak	3.00	150	Vertical	Pass
2**	2195.500	30.89	-13.32	54.0	23.11	AV	3.00	150	Vertical	Pass
3	4490.500	47.96	-3.33	74.0	26.04	Peak	35.00	150	Vertical	Pass
3**	4490.500	37.63	-3.33	54.0	16.37	AV	35.00	150	Vertical	Pass
4	5217.000	100.27	-2.34	74.0	-26.27	Peak	344.00	150	Vertical	N/A
4**	5217.000	91.92	-2.34	54.0	-37.92	AV	344.00	150	Vertical	N/A
5	9602.175	47.57	-3.41	74.0	26.43	Peak	0.00	150	Vertical	Pass
5**	9602.175	36.49	-3.41	54.0	17.51	AV	0.00	150	Vertical	Pass
6	16368.562	49.59	-1.65	74.0	24.41	Peak	1.00	150	Vertical	Pass
6**	16368.562	38.80	-1.65	54.0	15.20	AV	1.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_20.53.25

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIIFI 11n20 CH44 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

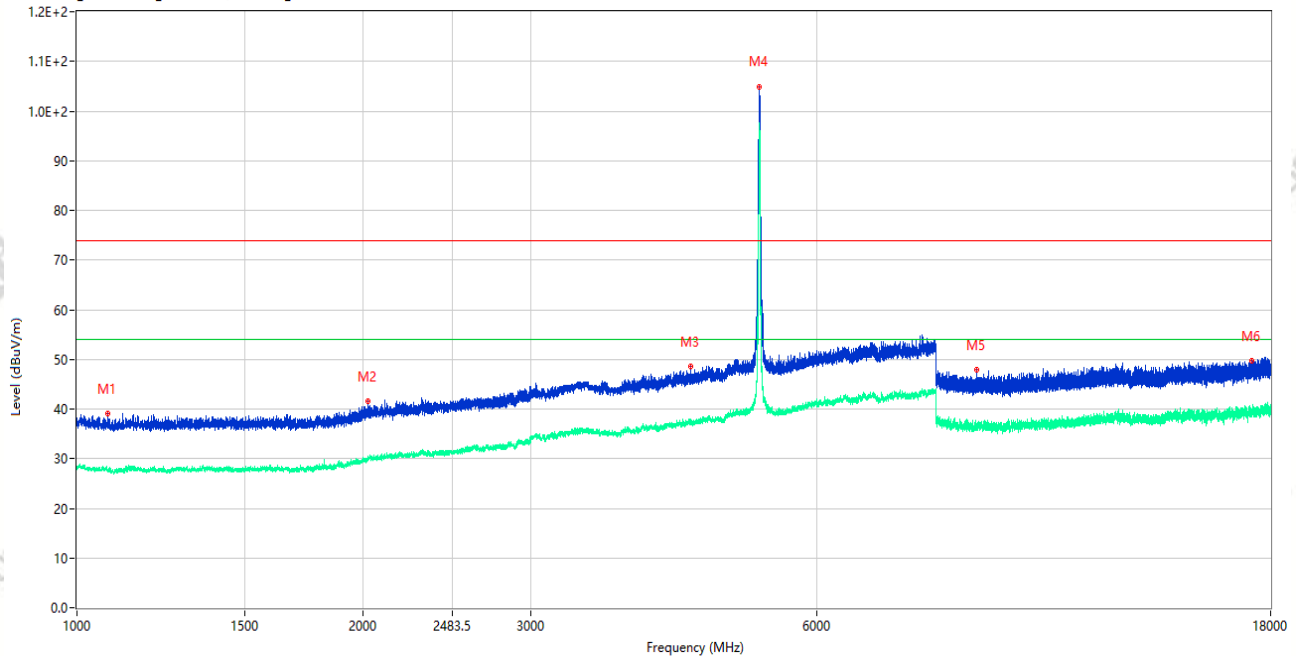

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1078.500	39.14	-15.53	74.0	34.86	Peak	77.00	150	Horizontal	Pass
1**	1078.500	27.53	-15.53	54.0	26.47	AV	77.00	150	Horizontal	Pass
2	2025.000	41.55	-13.96	74.0	32.45	Peak	284.00	150	Horizontal	Pass
2**	2025.000	29.82	-13.96	54.0	24.18	AV	284.00	150	Horizontal	Pass
3	4418.000	48.63	-2.83	74.0	25.37	Peak	1.00	150	Horizontal	Pass
3**	4418.000	37.18	-2.83	54.0	16.82	AV	1.00	150	Horizontal	Pass
4	5218.500	104.95	-2.37	74.0	-30.95	Peak	223.00	150	Horizontal	N/A
4**	5218.500	97.43	-2.37	54.0	-43.43	AV	223.00	150	Horizontal	N/A
5	8843.600	47.83	-4.59	74.0	26.17	Peak	360.00	150	Horizontal	Pass
5**	8843.600	36.25	-4.59	54.0	17.75	AV	360.00	150	Horizontal	Pass
6	17187.037	49.75	0.15	74.0	24.25	Peak	175.00	150	Horizontal	Pass
6**	17187.037	39.61	0.15	54.0	14.39	AV	175.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_21.05.41

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIIFI 11n40 CH38 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

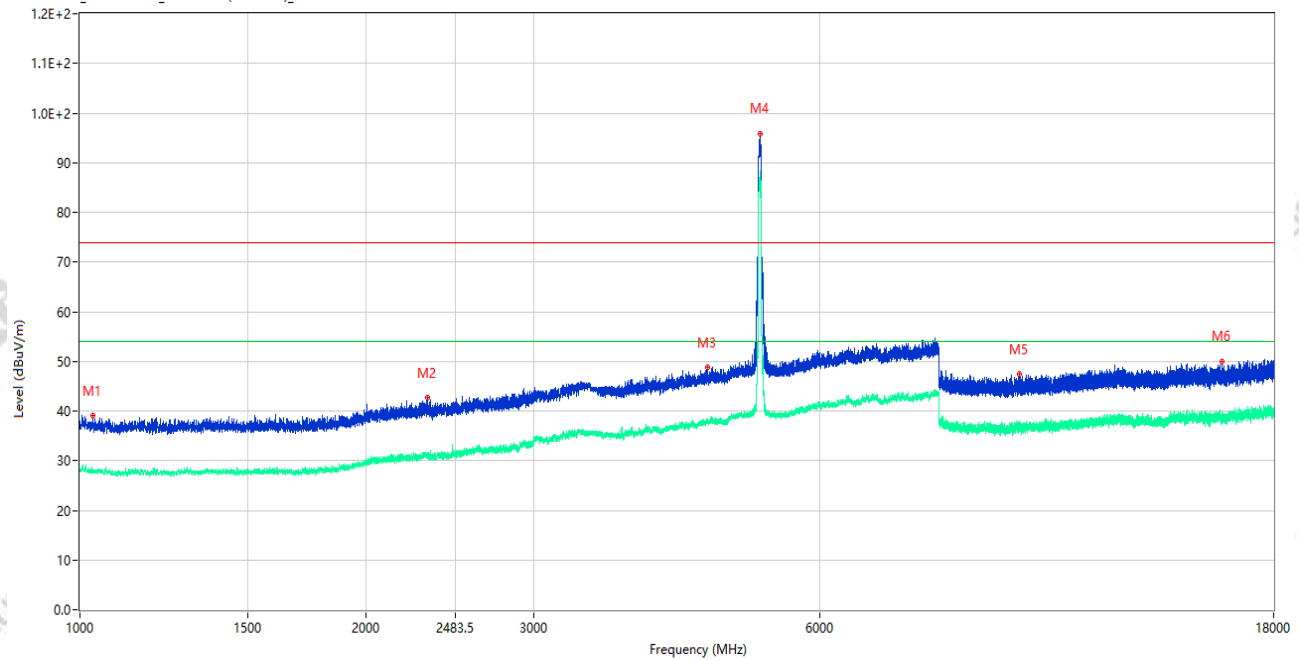

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1031.500	39.09	-15.38	74.0	34.91	Peak	89.00	150	Vertical	Pass
1**	1031.500	27.89	-15.38	54.0	26.11	AV	89.00	150	Vertical	Pass
2	2319.500	42.71	-12.39	74.0	31.29	Peak	0.00	150	Vertical	Pass
2**	2319.500	31.48	-12.39	54.0	22.52	AV	0.00	150	Vertical	Pass
3	4570.000	48.79	-3.19	74.0	25.21	Peak	360.00	150	Vertical	Pass
3**	4570.000	37.72	-3.19	54.0	16.28	AV	360.00	150	Vertical	Pass
4	5193.000	95.92	-2.32	74.0	-21.92	Peak	326.00	150	Vertical	N/A
4**	5193.000	88.25	-2.32	54.0	-34.25	AV	326.00	150	Vertical	N/A
5	9733.750	47.45	-4.10	74.0	26.55	Peak	261.00	150	Vertical	Pass
5**	9733.750	36.82	-4.10	54.0	17.18	AV	261.00	150	Vertical	Pass
6	15886.088	50.05	-1.55	74.0	23.95	Peak	175.00	150	Vertical	Pass
6**	15886.088	39.21	-1.55	54.0	14.79	AV	175.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_21.10.19

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIIFI 11n40 CH38 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

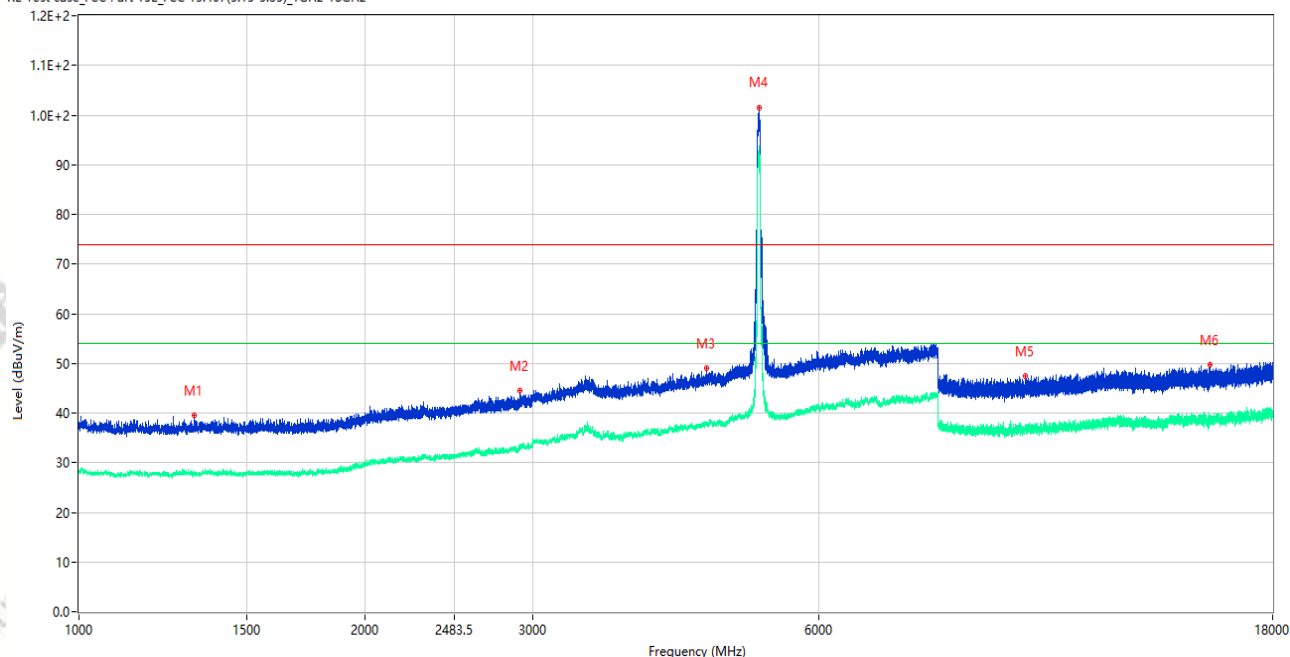

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1320.500	39.55	-15.86	74.0	34.45	Peak	2.00	150	Horizontal	Pass
1**	1320.500	28.05	-15.86	54.0	25.95	AV	2.00	150	Horizontal	Pass
2	2912.000	44.51	-9.22	74.0	29.49	Peak	332.00	150	Horizontal	Pass
2**	2912.000	33.27	-9.22	54.0	20.73	AV	332.00	150	Horizontal	Pass
3	4569.500	48.93	-3.16	74.0	25.07	Peak	13.00	150	Horizontal	Pass
3**	4569.500	37.72	-3.16	54.0	16.28	AV	13.00	150	Horizontal	Pass
4	5191.500	101.56	-2.30	74.0	-27.56	Peak	178.00	150	Horizontal	N/A
4**	5191.500	93.16	-2.30	54.0	-39.16	AV	178.00	150	Horizontal	N/A
5	9892.163	47.52	-4.29	74.0	26.48	Peak	360.00	150	Horizontal	Pass
5**	9892.163	37.07	-4.29	54.0	16.93	AV	360.00	150	Horizontal	Pass
6	15453.750	49.64	-2.18	74.0	24.36	Peak	360.00	150	Horizontal	Pass
6**	15453.750	38.42	-2.18	54.0	15.58	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_21.30.46

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIIFI 11ac80 CH42 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

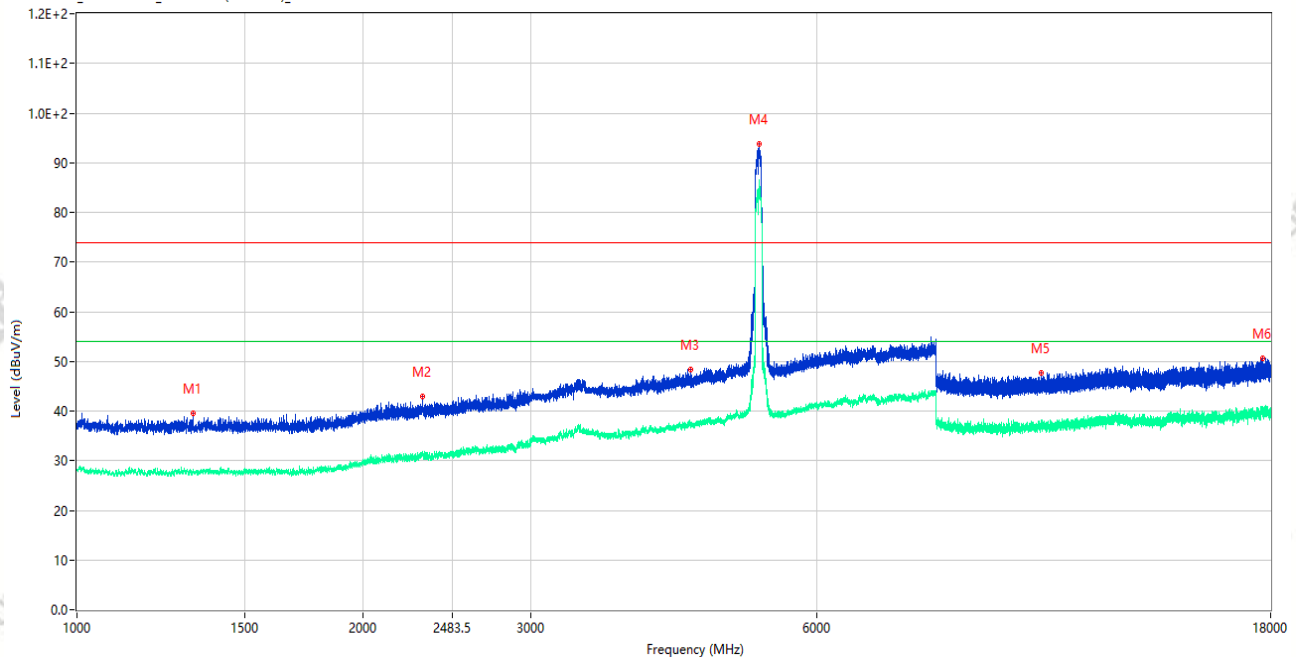

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1325.000	39.56	-15.89	74.0	34.44	Peak	205.00	150	Vertical	Pass
1**	1325.000	28.26	-15.89	54.0	25.74	AV	205.00	150	Vertical	Pass
2	2308.000	42.83	-12.56	74.0	31.17	Peak	58.00	150	Vertical	Pass
2**	2308.000	31.80	-12.56	54.0	22.20	AV	58.00	150	Vertical	Pass
3	4419.000	48.33	-2.83	74.0	25.67	Peak	212.00	150	Vertical	Pass
3**	4419.000	37.01	-2.83	54.0	16.99	AV	212.00	150	Vertical	Pass
4	5215.500	93.70	-2.32	74.0	-19.70	Peak	32.00	150	Vertical	N/A
4**	5215.500	85.48	-2.32	54.0	-31.48	AV	32.00	150	Vertical	N/A
5	10319.188	47.66	-3.20	74.0	26.34	Peak	352.00	150	Vertical	Pass
5**	10319.188	37.26	-3.20	54.0	16.74	AV	352.00	150	Vertical	Pass
6	17639.850	50.67	-0.06	74.0	23.33	Peak	310.00	150	Vertical	Pass
6**	17639.850	39.51	-0.06	54.0	14.49	AV	310.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_21.35.27

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIIFI 11ac80 CH42 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

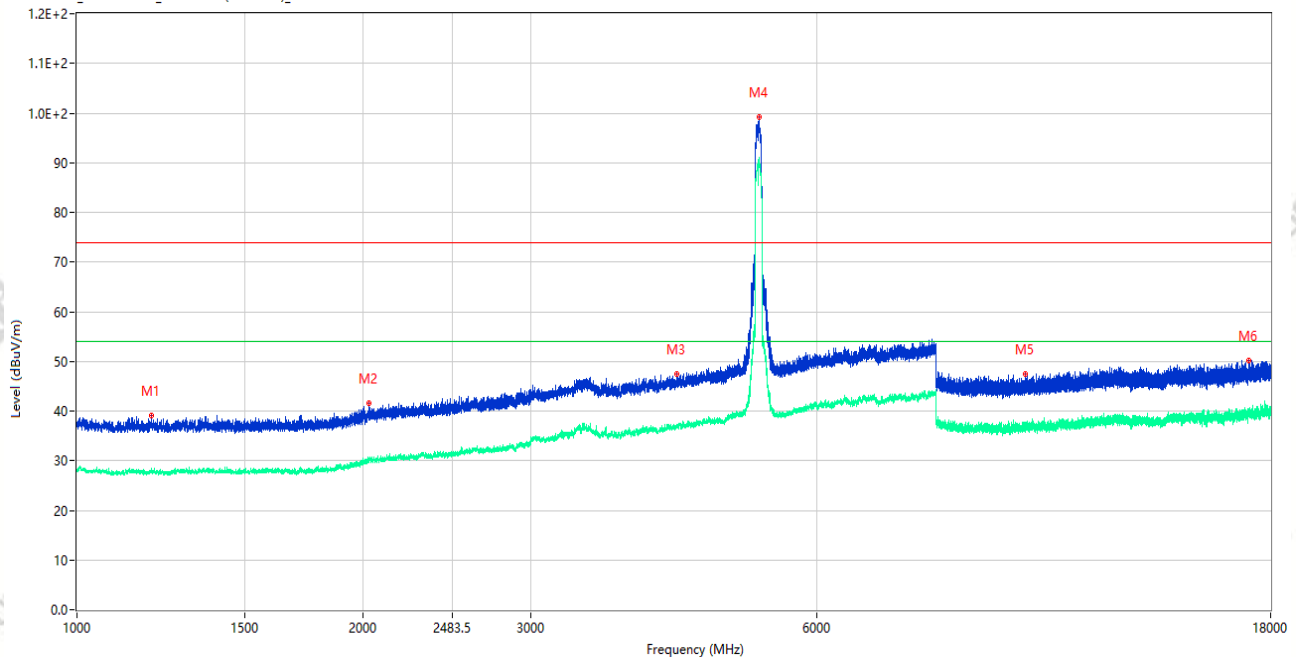

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.250	39.17	-15.72	74.0	34.83	Peak	0.00	150	Horizontal	Pass
1**	1197.250	28.11	-15.72	54.0	25.89	AV	0.00	150	Horizontal	Pass
2	2028.250	41.60	-13.77	74.0	32.40	Peak	240.00	150	Horizontal	Pass
2**	2028.250	29.80	-13.77	54.0	24.20	AV	240.00	150	Horizontal	Pass
3	4273.500	47.37	-3.26	74.0	26.63	Peak	6.00	150	Horizontal	Pass
3**	4273.500	36.77	-3.26	54.0	17.23	AV	6.00	150	Horizontal	Pass
4	5216.000	99.11	-2.32	74.0	-25.11	Peak	274.00	150	Horizontal	N/A
4**	5216.000	90.27	-2.32	54.0	-36.27	AV	274.00	150	Horizontal	N/A
5	9937.287	47.49	-4.10	74.0	26.51	Peak	75.00	150	Horizontal	Pass
5**	9937.287	37.13	-4.10	54.0	16.87	AV	75.00	150	Horizontal	Pass
6	17078.886	50.08	-1.06	74.0	23.92	Peak	345.00	150	Horizontal	Pass
6**	17078.886	39.18	-1.06	54.0	14.82	AV	345.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_19.19.11

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(5G WIFI)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

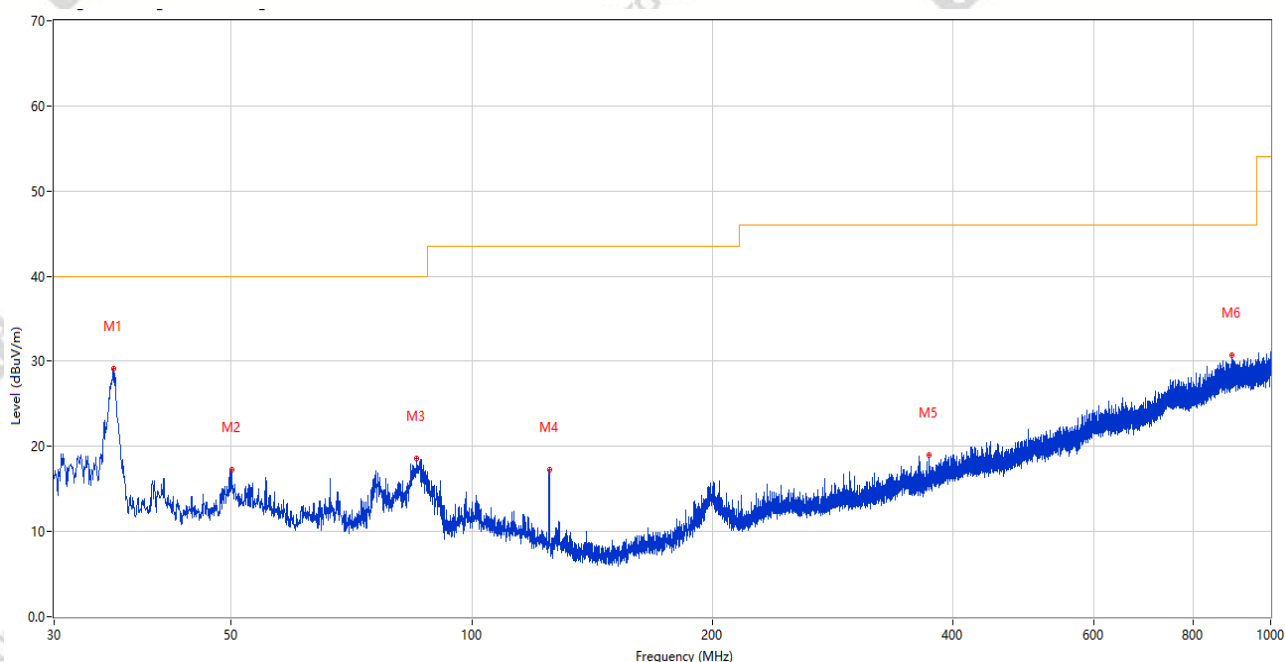

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	35.578	29.09	-27.54	40.0	10.91	Peak	338.00	100	Vertical	Pass
2	50.031	17.31	-24.51	40.0	22.69	Peak	106.00	200	Vertical	Pass
3	85.339	18.60	-29.64	40.0	21.40	Peak	291.00	100	Vertical	Pass
4	125.011	17.30	-28.74	43.5	26.20	Peak	360.00	200	Vertical	Pass
5	373.962	18.99	-21.25	46.0	27.01	Peak	87.00	200	Vertical	Pass
6	894.658	30.72	-9.52	46.0	15.28	Peak	96.00	200	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-29_19.22.54

EUT Name: SmartPhone

Temp.(°C): 23.2

Model Number: MC9C674S

Humidity (%RH): 51

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(5G WIFI)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A09+数据线: A14

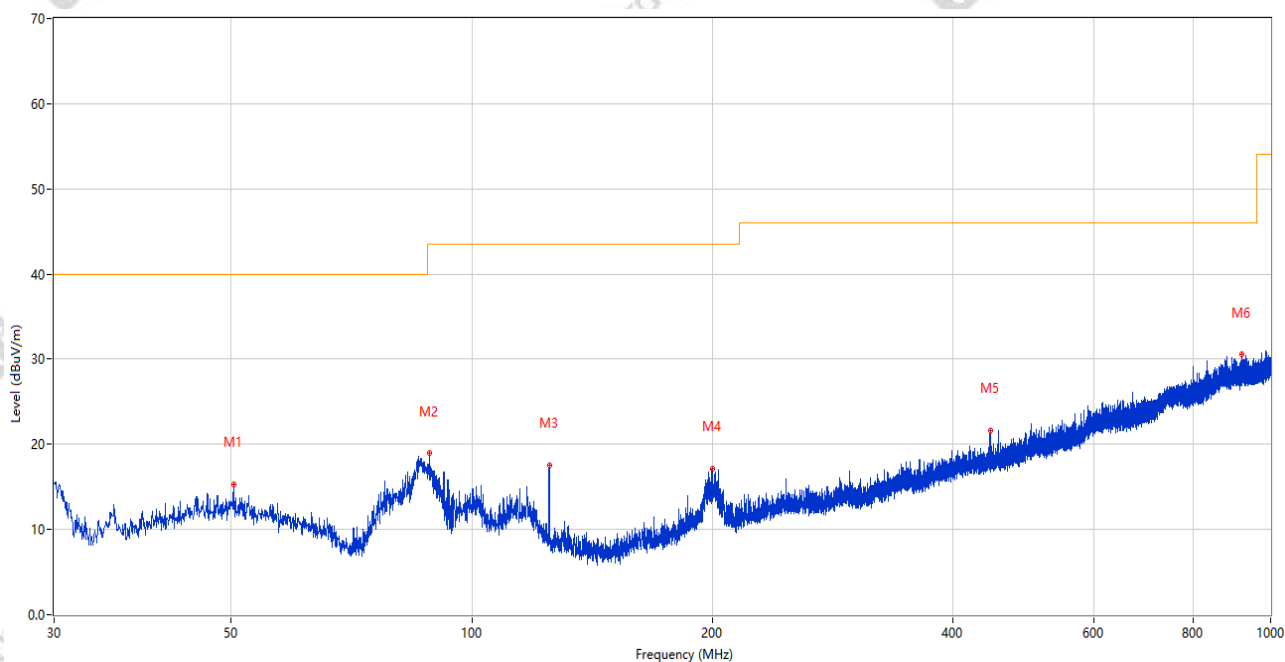

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	50.322	15.25	-24.53	40.0	24.75	Peak	206.00	200	Horizontal	Pass
2	88.491	18.93	-28.54	43.5	24.57	Peak	360.00	200	Horizontal	Pass
3	125.011	17.59	-28.74	43.5	25.91	Peak	15.00	200	Horizontal	Pass
4	200.041	17.18	-25.75	43.5	26.32	Peak	292.00	100	Horizontal	Pass
5	445.500	21.68	-19.49	46.0	24.32	Peak	360.00	200	Horizontal	Pass
6	920.848	30.53	-9.13	46.0	15.47	Peak	80.00	100	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_08.44.31

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIIFI 11a CH60 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

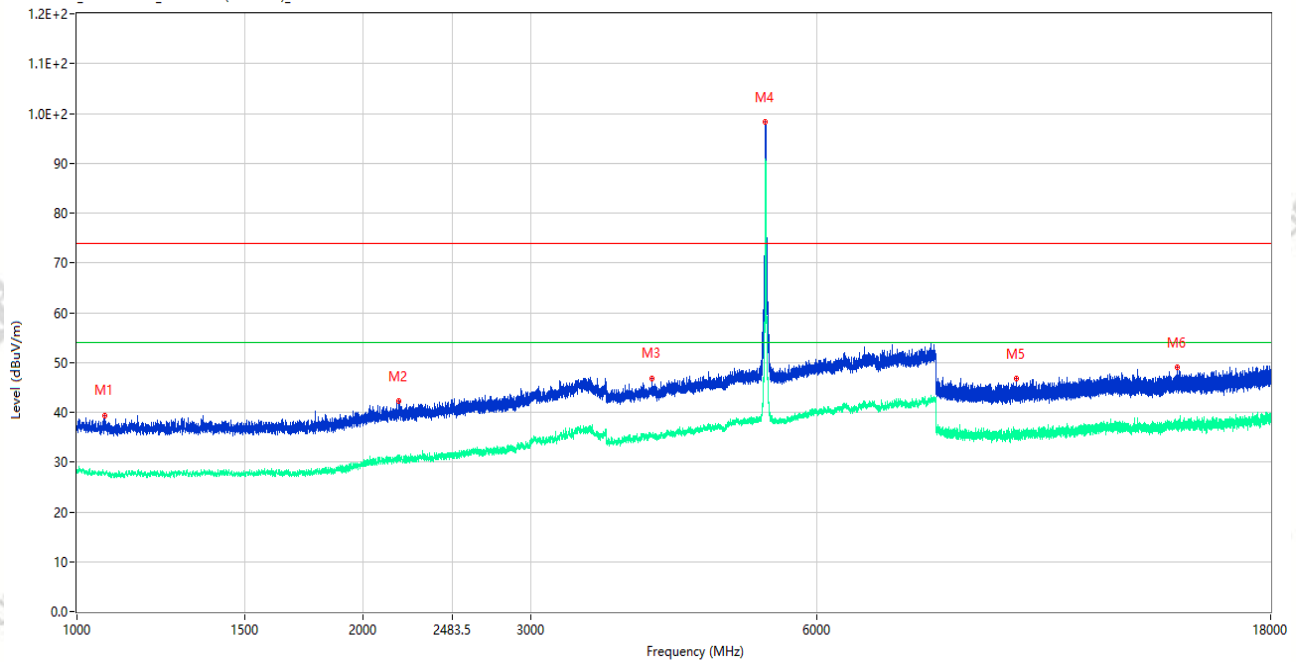

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1068.500	39.42	-15.18	74.0	34.58	Peak	68.00	150	Vertical	Pass
1**	1068.500	27.78	-15.18	54.0	26.22	AV	68.00	150	Vertical	Pass
2	2177.500	42.22	-12.85	74.0	31.78	Peak	0.00	150	Vertical	Pass
2**	2177.500	31.20	-12.85	54.0	22.80	AV	0.00	150	Vertical	Pass
3	4020.000	46.67	-4.01	74.0	27.33	Peak	81.00	150	Vertical	Pass
3**	4020.000	35.15	-4.01	54.0	18.85	AV	81.00	150	Vertical	Pass
4	5298.500	98.20	-2.03	74.0	-24.20	Peak	340.00	150	Vertical	N/A
4**	5298.500	90.58	-2.03	54.0	-36.58	AV	340.00	150	Vertical	N/A
5	9734.462	46.68	-4.12	74.0	27.32	Peak	215.00	150	Vertical	Pass
5**	9734.462	35.62	-4.12	54.0	18.38	AV	215.00	150	Vertical	Pass
6	14368.312	49.03	-1.36	74.0	24.97	Peak	312.00	150	Vertical	Pass
6**	14368.312	37.65	-1.36	54.0	16.35	AV	312.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_08.39.09

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIIFI 11a CH60 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

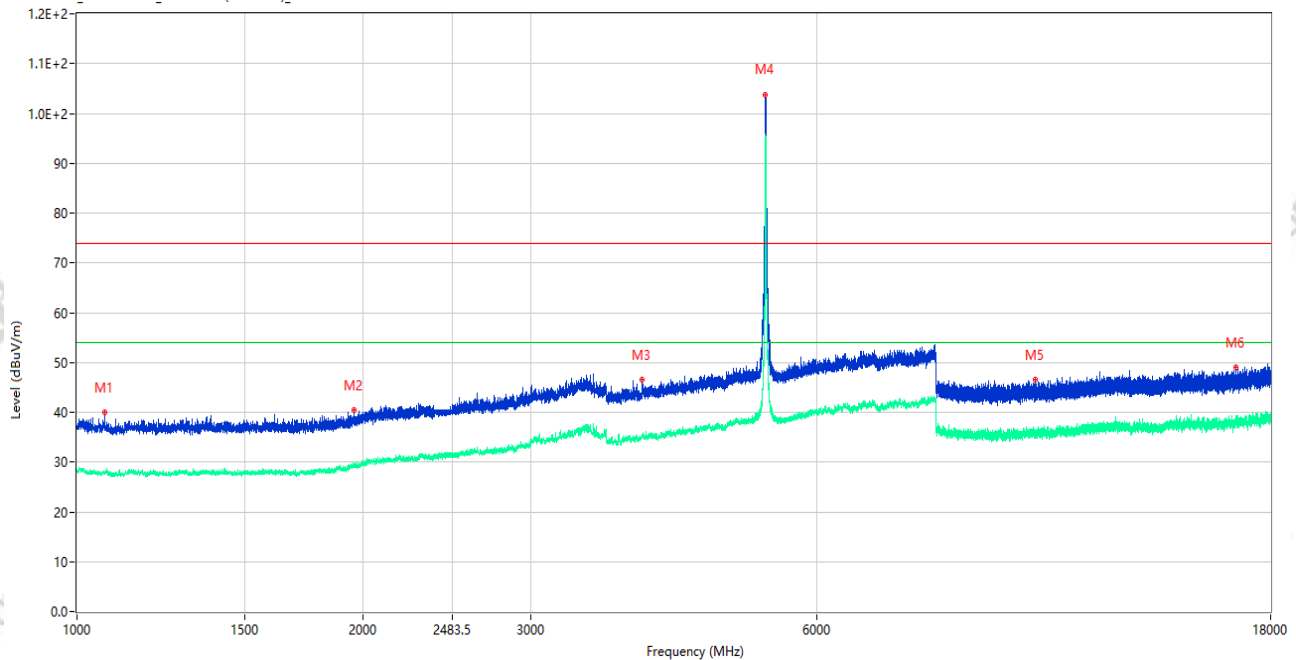

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1069.750	39.94	-15.20	74.0	34.06	Peak	30.00	150	Horizontal	Pass
1**	1069.750	27.70	-15.20	54.0	26.30	AV	30.00	150	Horizontal	Pass
2	1954.500	40.36	-14.91	74.0	33.64	Peak	254.00	150	Horizontal	Pass
2**	1954.500	28.86	-14.91	54.0	25.14	AV	254.00	150	Horizontal	Pass
3	3932.500	46.49	-3.54	74.0	27.51	Peak	360.00	150	Horizontal	Pass
3**	3932.500	35.37	-3.54	54.0	18.63	AV	360.00	150	Horizontal	Pass
4	5298.500	103.83	-2.03	74.0	-29.83	Peak	222.00	150	Horizontal	N/A
4**	5298.500	95.49	-2.03	54.0	-41.49	AV	222.00	150	Horizontal	N/A
5	10192.600	46.59	-3.56	74.0	27.41	Peak	360.00	150	Horizontal	Pass
5**	10192.600	35.98	-3.56	54.0	18.02	AV	360.00	150	Horizontal	Pass
6	16551.788	48.95	-0.99	74.0	25.05	Peak	360.00	150	Horizontal	Pass
6**	16551.788	38.92	-0.99	54.0	15.08	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_08.57.41

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIIFI 11n20 CH60 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

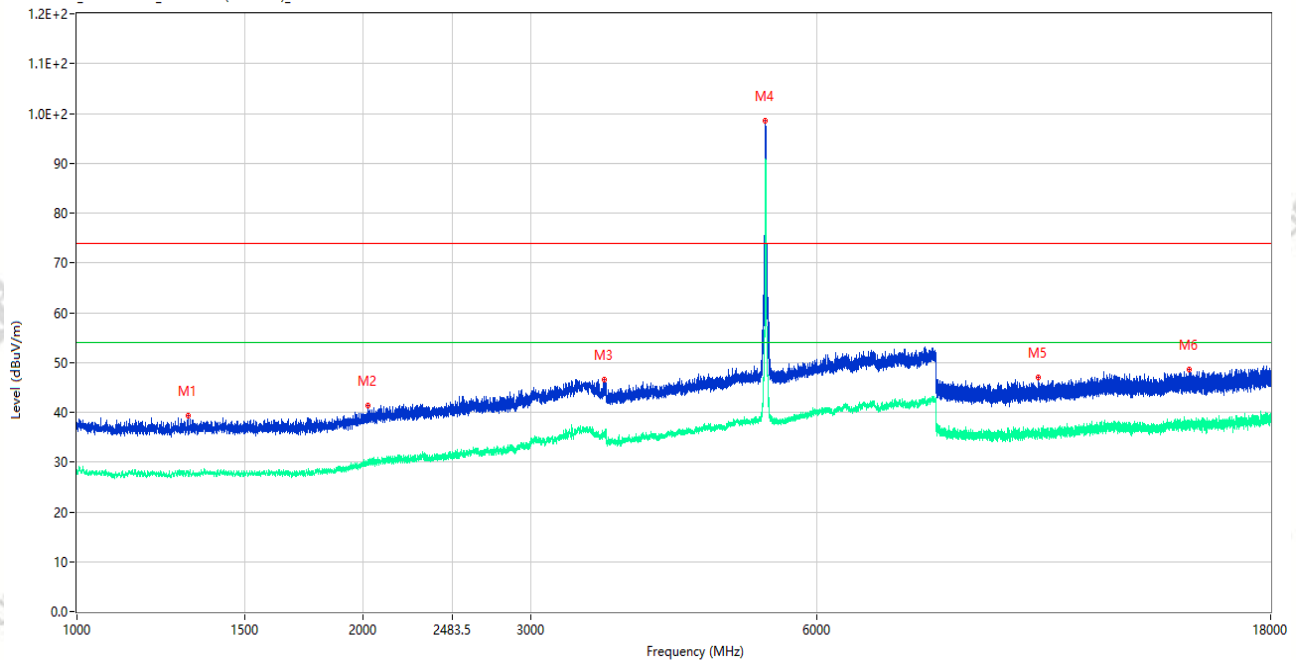

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1308.500	39.24	-15.69	74.0	34.76	Peak	149.00	150	Vertical	Pass
1**	1308.500	27.54	-15.69	54.0	26.46	AV	149.00	150	Vertical	Pass
2	2024.250	41.28	-14.00	74.0	32.72	Peak	253.00	150	Vertical	Pass
2**	2024.250	30.14	-14.00	54.0	23.86	AV	253.00	150	Vertical	Pass
3	3589.000	46.66	-6.24	74.0	27.34	Peak	205.00	150	Vertical	Pass
3**	3589.000	35.63	-6.24	54.0	18.37	AV	205.00	150	Vertical	Pass
4	5299.000	98.47	-2.01	74.0	-24.47	Peak	331.00	150	Vertical	N/A
4**	5299.000	90.54	-2.01	54.0	-36.54	AV	331.00	150	Vertical	N/A
5	10261.950	47.06	-3.22	74.0	26.94	Peak	145.00	150	Vertical	Pass
5**	10261.950	35.88	-3.22	54.0	18.12	AV	145.00	150	Vertical	Pass
6	14768.888	48.53	-1.15	74.0	25.47	Peak	314.00	150	Vertical	Pass
6**	14768.888	38.20	-1.15	54.0	15.80	AV	314.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_09.01.49

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIIFI 11n20 CH60 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

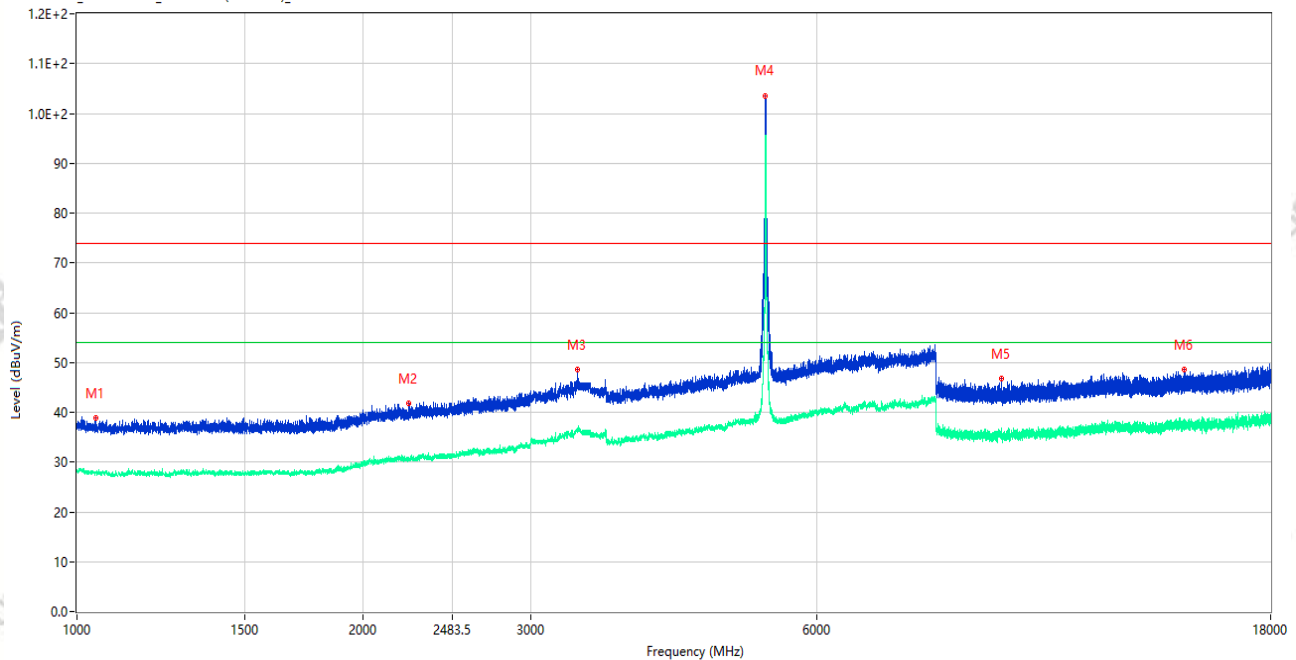

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1046.750	38.81	-15.38	74.0	35.19	Peak	86.00	150	Horizontal	Pass
1**	1046.750	27.87	-15.38	54.0	26.13	AV	86.00	150	Horizontal	Pass
2	2232.250	41.76	-13.09	74.0	32.24	Peak	58.00	150	Horizontal	Pass
2**	2232.250	30.92	-13.09	54.0	23.08	AV	58.00	150	Horizontal	Pass
3	3359.000	48.67	-5.94	74.0	25.33	Peak	360.00	150	Horizontal	Pass
3**	3359.000	35.96	-5.94	54.0	18.04	AV	360.00	150	Horizontal	Pass
4	5298.500	103.57	-2.03	74.0	-29.57	Peak	219.00	150	Horizontal	N/A
4**	5298.500	95.15	-2.03	54.0	-41.15	AV	219.00	150	Horizontal	N/A
5	9378.925	46.74	-4.57	74.0	27.26	Peak	98.00	150	Horizontal	Pass
5**	9378.925	35.91	-4.57	54.0	18.09	AV	98.00	150	Horizontal	Pass
6	14594.062	48.52	-2.22	74.0	25.48	Peak	108.00	150	Horizontal	Pass
6**	14594.062	38.19	-2.22	54.0	15.81	AV	108.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_09.36.21

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIIFI 11n40 CH54 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

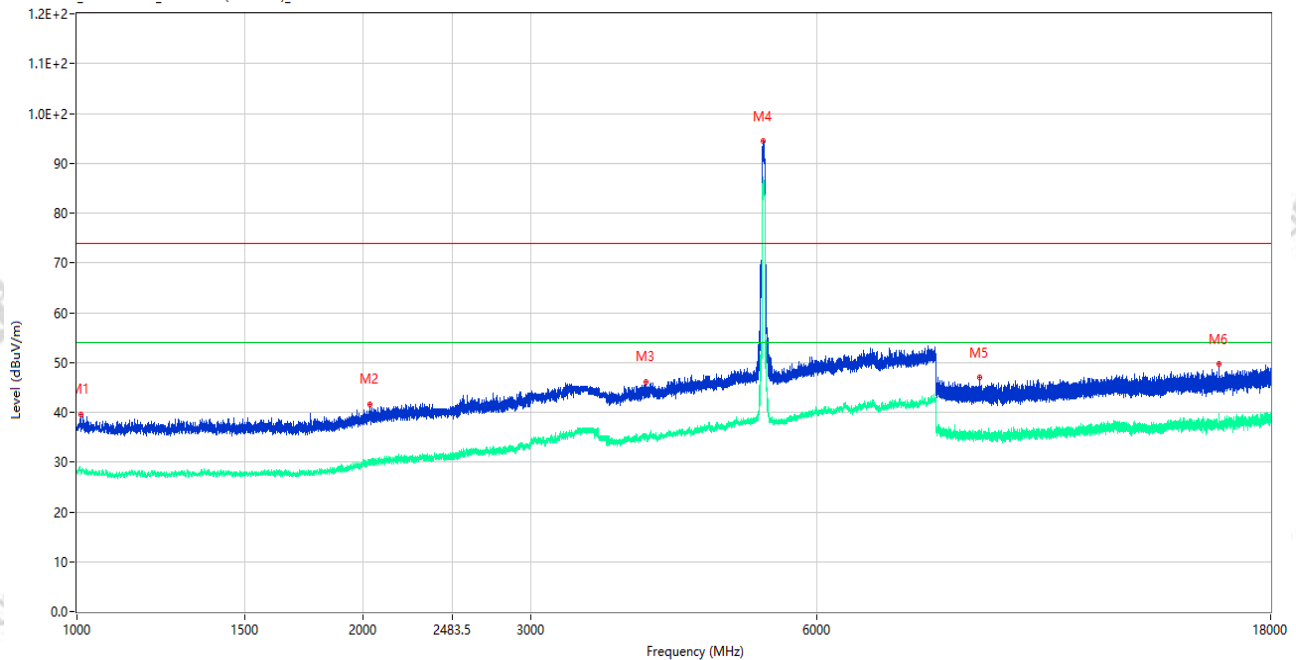

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1009.000	39.48	-14.23	74.0	34.52	Peak	0.00	150	Vertical	Pass
1**	1009.000	28.36	-14.23	54.0	25.64	AV	0.00	150	Vertical	Pass
2	2034.000	41.54	-13.43	74.0	32.46	Peak	22.00	150	Vertical	Pass
2**	2034.000	30.25	-13.43	54.0	23.75	AV	22.00	150	Vertical	Pass
3	3968.000	46.10	-3.91	74.0	27.90	Peak	360.00	150	Vertical	Pass
3**	3968.000	35.07	-3.91	54.0	18.93	AV	360.00	150	Vertical	Pass
4	5268.500	94.36	-2.44	74.0	-20.36	Peak	332.00	150	Vertical	N/A
4**	5268.500	87.12	-2.44	54.0	-33.12	AV	332.00	150	Vertical	N/A
5	8903.451	46.91	-4.76	74.0	27.09	Peak	6.00	150	Vertical	Pass
5**	8903.451	35.26	-4.76	54.0	18.74	AV	6.00	150	Vertical	Pass
6	15888.713	49.79	-1.48	74.0	24.21	Peak	174.00	150	Vertical	Pass
6**	15888.713	37.82	-1.48	54.0	16.18	AV	174.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_09.40.44

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIIFI 11n40 CH54 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

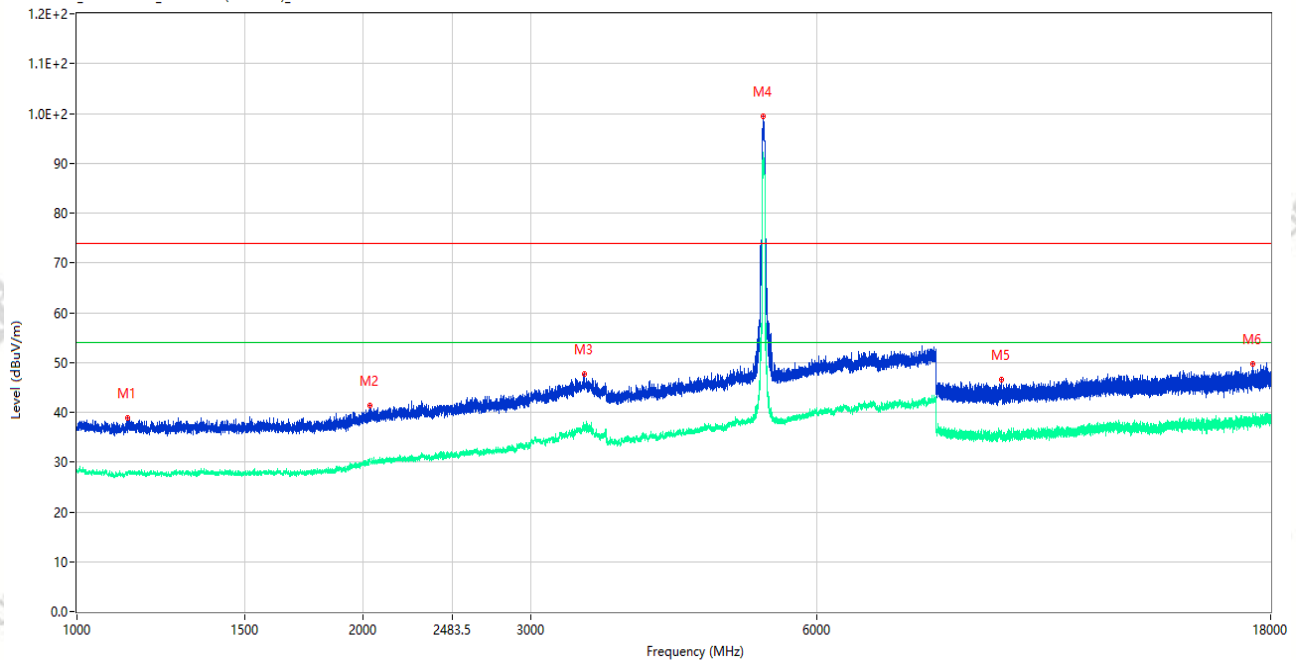

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1130.750	38.83	-15.55	74.0	35.17	Peak	15.00	150	Horizontal	Pass
1**	1130.750	27.69	-15.55	54.0	26.31	AV	15.00	150	Horizontal	Pass
2	2034.750	41.32	-13.40	74.0	32.68	Peak	351.00	150	Horizontal	Pass
2**	2034.750	30.03	-13.40	54.0	23.97	AV	351.00	150	Horizontal	Pass
3	3417.000	47.72	-5.12	74.0	26.28	Peak	360.00	150	Horizontal	Pass
3**	3417.000	37.01	-5.12	54.0	16.99	AV	360.00	150	Horizontal	Pass
4	5272.000	99.39	-2.42	74.0	-25.39	Peak	223.00	150	Horizontal	N/A
4**	5272.000	91.68	-2.42	54.0	-37.68	AV	223.00	150	Horizontal	N/A
5	9383.437	46.60	-4.56	74.0	27.40	Peak	310.00	150	Horizontal	Pass
5**	9383.437	36.37	-4.56	54.0	17.63	AV	310.00	150	Horizontal	Pass
6	17231.401	49.79	-0.39	74.0	24.21	Peak	72.00	150	Horizontal	Pass
6**	17231.401	38.66	-0.39	54.0	15.34	AV	72.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_10.02.31

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIIFI 11ac80 CH58 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

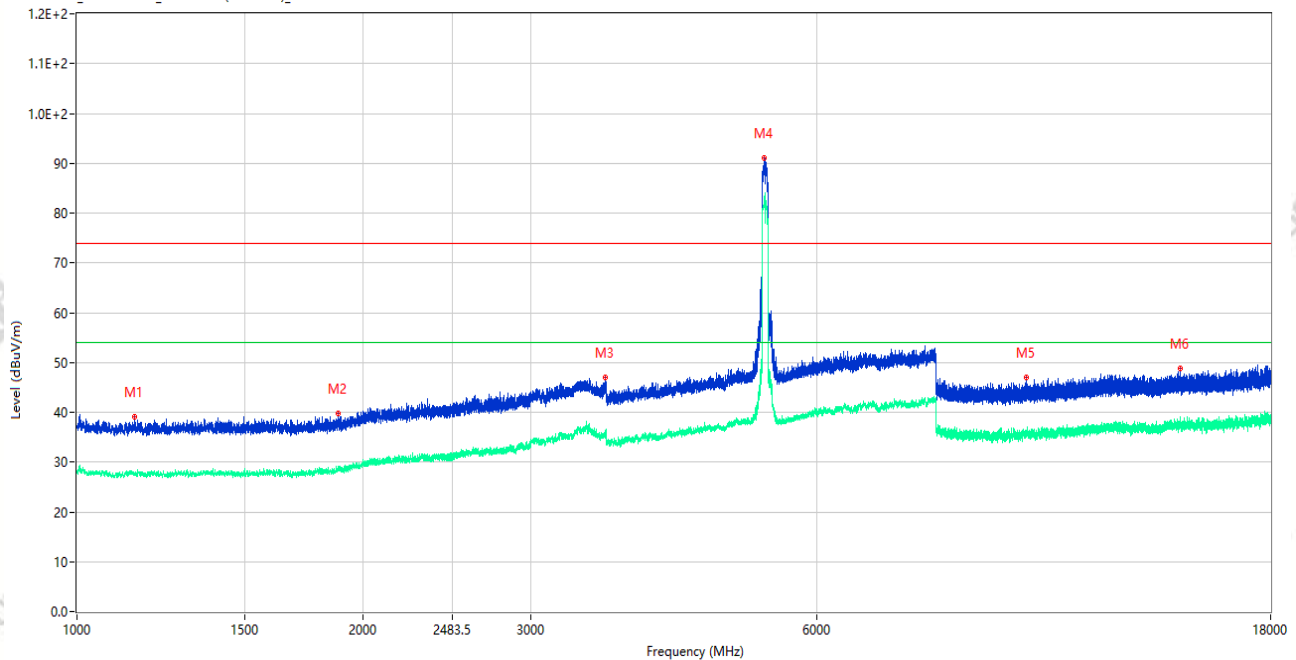

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1151.000	39.01	-15.65	74.0	34.99	Peak	197.00	150	Vertical	Pass
1**	1151.000	27.86	-15.65	54.0	26.14	AV	197.00	150	Vertical	Pass
2	1881.000	39.75	-15.33	74.0	34.25	Peak	22.00	150	Vertical	Pass
2**	1881.000	28.70	-15.33	54.0	25.30	AV	22.00	150	Vertical	Pass
3	3597.000	47.01	-5.11	74.0	26.99	Peak	143.00	150	Vertical	Pass
3**	3597.000	36.22	-5.11	54.0	17.78	AV	143.00	150	Vertical	Pass
4	5284.000	91.10	-2.17	74.0	-17.10	Peak	321.00	150	Vertical	N/A
4**	5284.000	83.28	-2.17	54.0	-29.28	AV	321.00	150	Vertical	N/A
5	9951.776	46.96	-3.95	74.0	27.04	Peak	50.00	150	Vertical	Pass
5**	9951.776	36.11	-3.95	54.0	17.89	AV	50.00	150	Vertical	Pass
6	14461.763	48.87	-2.80	74.0	25.13	Peak	178.00	150	Vertical	Pass
6**	14461.763	39.10	-2.80	54.0	14.90	AV	178.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_09.57.59

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIIFI 11ac80 CH58 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

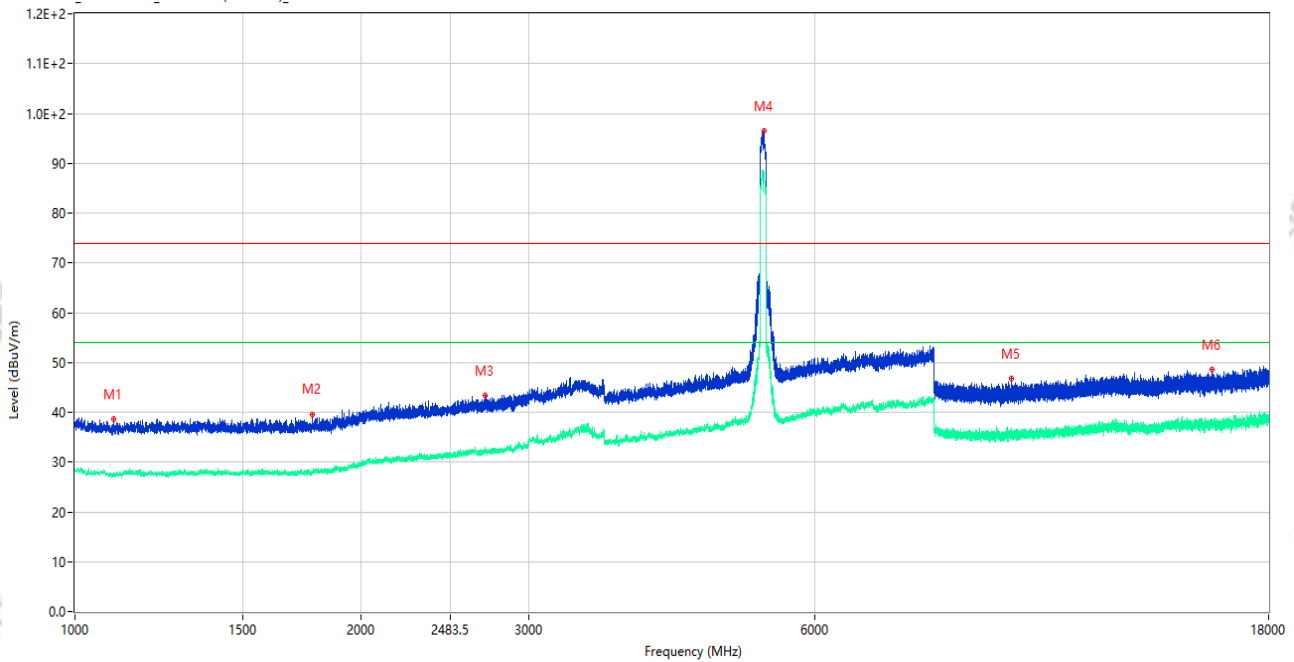

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1098.250	38.67	-15.73	74.0	35.33	Peak	358.00	150	Horizontal	Pass
1**	1098.250	27.19	-15.73	54.0	26.81	AV	358.00	150	Horizontal	Pass
2	1777.500	39.64	-16.14	74.0	34.36	Peak	134.00	150	Horizontal	Pass
2**	1777.500	28.06	-16.14	54.0	25.94	AV	134.00	150	Horizontal	Pass
3	2699.500	43.36	-10.51	74.0	30.64	Peak	138.00	150	Horizontal	Pass
3**	2699.500	32.48	-10.51	54.0	21.52	AV	138.00	150	Horizontal	Pass
4	5303.500	96.50	-2.02	74.0	-22.50	Peak	202.00	150	Horizontal	N/A
4**	5303.500	87.48	-2.02	54.0	-33.48	AV	202.00	150	Horizontal	N/A
5	9659.888	46.71	-3.18	74.0	27.29	Peak	97.00	150	Horizontal	Pass
5**	9659.888	36.28	-3.18	54.0	17.72	AV	97.00	150	Horizontal	Pass
6	15701.026	48.57	-1.89	74.0	25.43	Peak	110.00	150	Horizontal	Pass
6**	15701.026	37.95	-1.89	54.0	16.05	AV	110.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_10.13.07

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIIFI 11a CH116 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

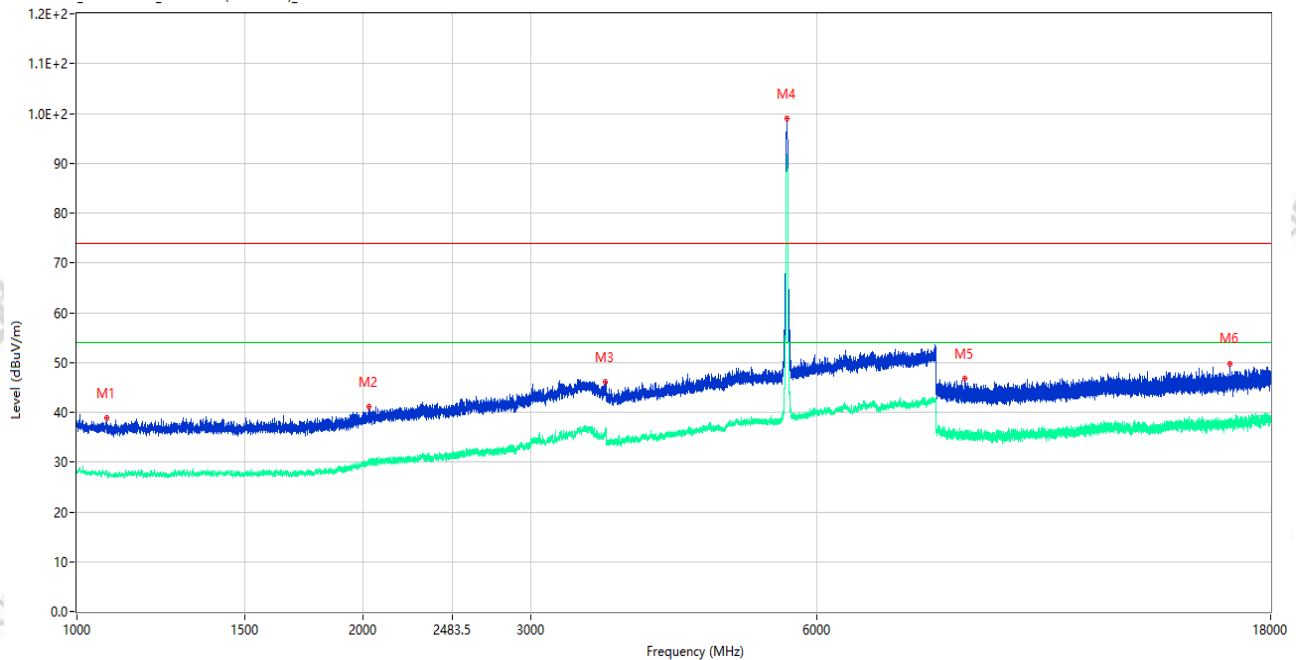

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1074.250	38.87	-15.35	74.0	35.13	Peak	352.00	150	Vertical	Pass
1**	1074.250	27.92	-15.35	54.0	26.08	AV	352.00	150	Vertical	Pass
2	2026.750	41.15	-13.86	74.0	32.85	Peak	40.00	150	Vertical	Pass
2**	2026.750	29.88	-13.86	54.0	24.12	AV	40.00	150	Vertical	Pass
3	3597.000	46.08	-5.11	74.0	27.92	Peak	301.00	150	Vertical	Pass
3**	3597.000	36.38	-5.11	54.0	17.62	AV	301.00	150	Vertical	Pass
4	5581.000	99.04	-2.85	74.0	-25.04	Peak	329.00	150	Vertical	N/A
4**	5581.000	91.48	-2.85	54.0	-37.48	AV	329.00	150	Vertical	N/A
5	8591.612	46.84	-4.89	74.0	27.16	Peak	120.00	150	Vertical	Pass
5**	8591.612	35.52	-4.89	54.0	18.48	AV	120.00	150	Vertical	Pass
6	16296.901	49.81	-1.46	74.0	24.19	Peak	360.00	150	Vertical	Pass
6**	16296.901	37.95	-1.46	54.0	16.05	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_10.17.41

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIIFI 11a CH116 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

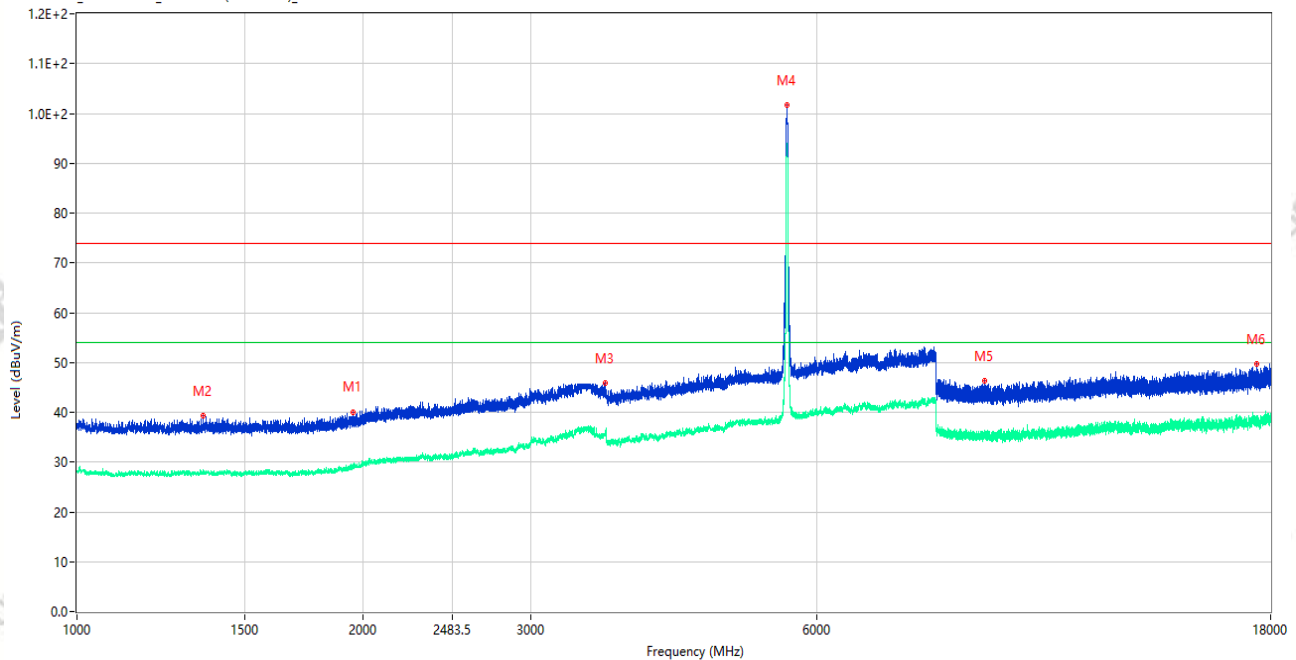

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1949.000	40.09	-14.84	74.0	33.91	Peak	0.00	150	Horizontal	Pass
1**	1949.000	29.00	-14.84	54.0	25.00	AV	0.00	150	Horizontal	Pass
2	1357.500	39.38	-15.83	74.0	34.62	Peak	97.00	150	Horizontal	Pass
2**	1357.500	27.94	-15.83	54.0	26.06	AV	97.00	150	Horizontal	Pass
3	3596.500	45.78	-5.11	74.0	28.22	Peak	45.00	150	Horizontal	Pass
3**	3596.500	36.38	-5.11	54.0	17.62	AV	45.00	150	Horizontal	Pass
4	5577.500	101.67	-2.89	74.0	-27.67	Peak	233.00	150	Horizontal	N/A
4**	5577.500	93.18	-2.89	54.0	-39.18	AV	233.00	150	Horizontal	N/A
5	9015.550	46.22	-4.65	74.0	27.78	Peak	52.00	150	Horizontal	Pass
5**	9015.550	35.35	-4.65	54.0	18.65	AV	52.00	150	Horizontal	Pass
6	17410.425	49.78	0.30	74.0	24.22	Peak	345.00	150	Horizontal	Pass
6**	17410.425	38.48	0.30	54.0	15.52	AV	345.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_10.41.04

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIIFI 11n20 CH116 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

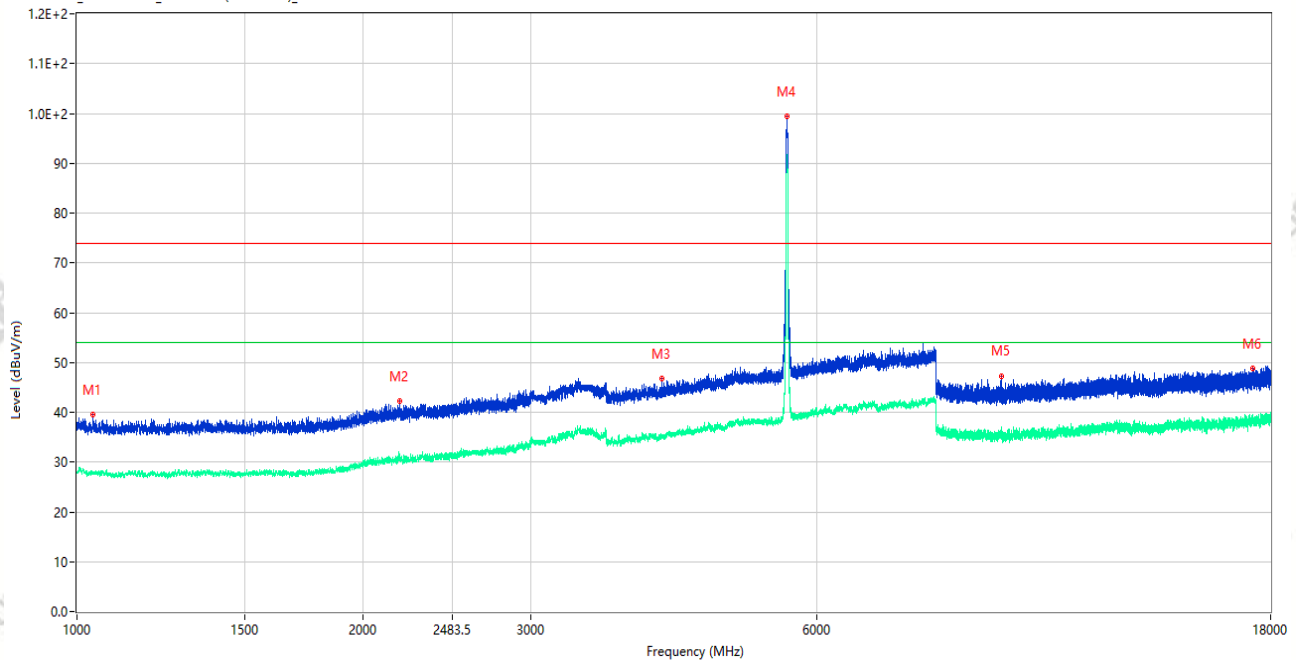

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1038.250	39.57	-15.38	74.0	34.43	Peak	360.00	150	Vertical	Pass
1**	1038.250	27.86	-15.38	54.0	26.14	AV	360.00	150	Vertical	Pass
2	2186.750	42.25	-13.24	74.0	31.75	Peak	2.00	150	Vertical	Pass
2**	2186.750	30.65	-13.24	54.0	23.35	AV	2.00	150	Vertical	Pass
3	4118.000	46.82	-4.21	74.0	27.18	Peak	294.00	150	Vertical	Pass
3**	4118.000	35.16	-4.21	54.0	18.84	AV	294.00	150	Vertical	Pass
4	5582.000	99.36	-2.85	74.0	-25.36	Peak	343.00	150	Vertical	N/A
4**	5582.000	91.81	-2.85	54.0	-37.81	AV	343.00	150	Vertical	N/A
5	9371.563	47.34	-4.89	74.0	26.66	Peak	28.00	150	Vertical	Pass
5**	9371.563	37.09	-4.89	54.0	16.91	AV	28.00	150	Vertical	Pass
6	17234.551	48.88	-0.50	74.0	25.12	Peak	286.00	150	Vertical	Pass
6**	17234.551	38.84	-0.50	54.0	15.16	AV	286.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_10.48.07

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIIFI 11n20 CH116 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

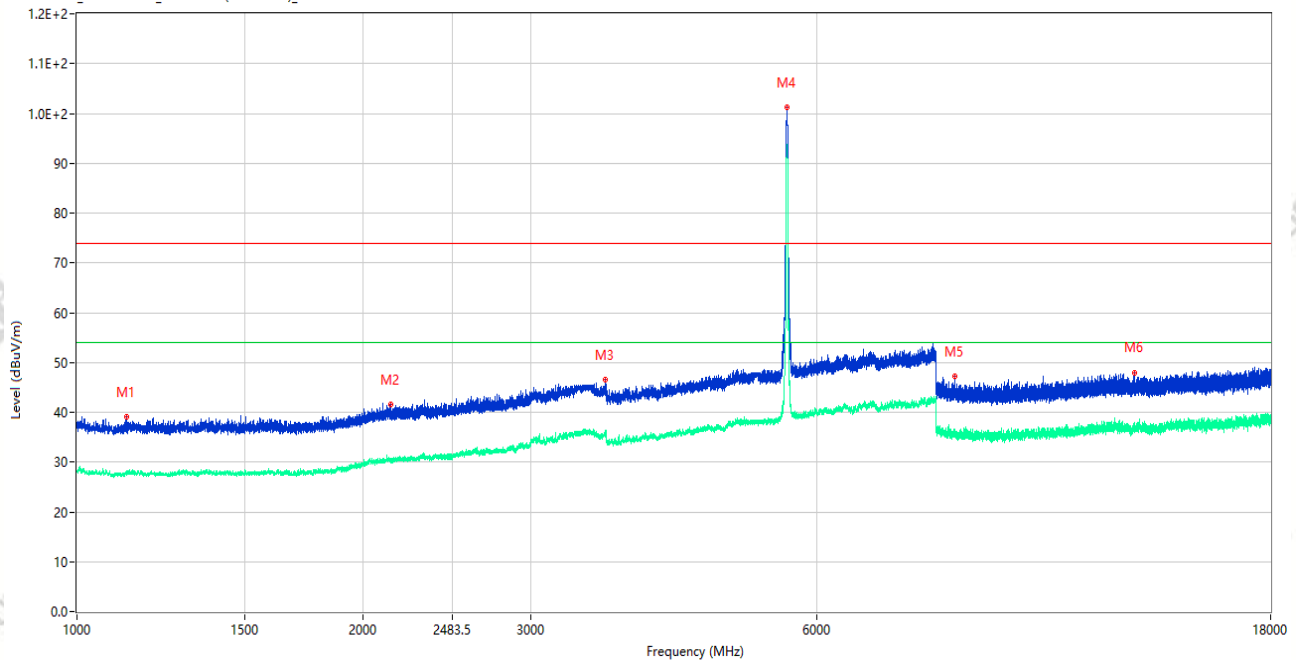

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1126.500	39.02	-15.62	74.0	34.98	Peak	360.00	150	Horizontal	Pass
1**	1126.500	27.60	-15.62	54.0	26.40	AV	360.00	150	Horizontal	Pass
2	2135.500	41.50	-13.49	74.0	32.50	Peak	69.00	150	Horizontal	Pass
2**	2135.500	30.60	-13.49	54.0	23.40	AV	69.00	150	Horizontal	Pass
3	3597.000	46.60	-5.11	74.0	27.40	Peak	0.00	150	Horizontal	Pass
3**	3597.000	35.96	-5.11	54.0	18.04	AV	0.00	150	Horizontal	Pass
4	5581.000	101.32	-2.85	74.0	-27.32	Peak	235.00	150	Horizontal	N/A
4**	5581.000	93.30	-2.85	54.0	-39.30	AV	235.00	150	Horizontal	N/A
5	8372.875	47.22	-4.42	74.0	26.78	Peak	310.00	150	Horizontal	Pass
5**	8372.875	35.60	-4.42	54.0	18.40	AV	310.00	150	Horizontal	Pass
6	12941.625	48.01	-2.06	74.0	25.99	Peak	182.00	150	Horizontal	Pass
6**	12941.625	37.28	-2.06	54.0	16.72	AV	182.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_11.55.58

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIIFI 11n40 CH118 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

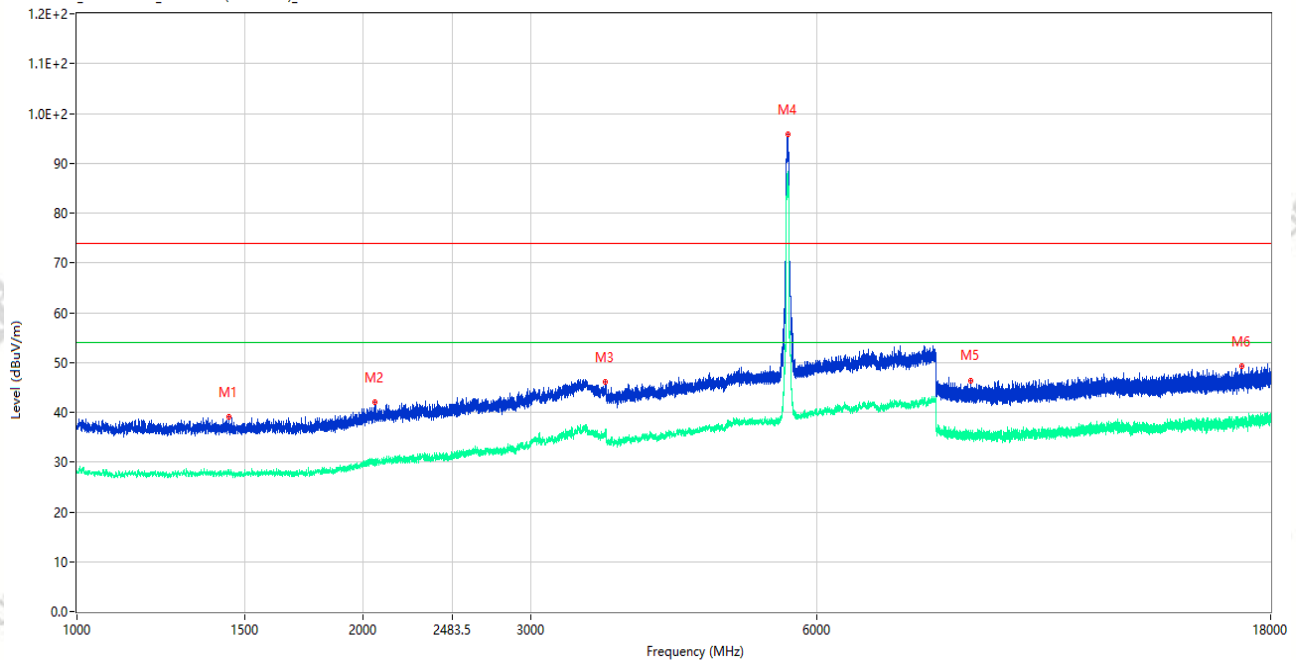

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1443.250	39.00	-15.93	74.0	35.00	Peak	0.00	150	Vertical	Pass
1**	1443.250	28.53	-15.93	54.0	25.47	AV	0.00	150	Vertical	Pass
2	2058.750	42.05	-13.87	74.0	31.95	Peak	242.00	150	Vertical	Pass
2**	2058.750	29.44	-13.87	54.0	24.56	AV	242.00	150	Vertical	Pass
3	3597.000	46.14	-5.11	74.0	27.86	Peak	74.00	150	Vertical	Pass
3**	3597.000	36.24	-5.11	54.0	17.76	AV	74.00	150	Vertical	Pass
4	5595.000	95.77	-2.82	74.0	-21.77	Peak	331.00	150	Vertical	N/A
4**	5595.000	87.16	-2.82	54.0	-33.16	AV	331.00	150	Vertical	N/A
5	8707.750	46.32	-5.36	74.0	27.68	Peak	145.00	150	Vertical	Pass
5**	8707.750	35.65	-5.36	54.0	18.35	AV	145.00	150	Vertical	Pass
6	16788.037	49.27	-1.55	74.0	24.73	Peak	245.00	150	Vertical	Pass
6**	16788.037	38.14	-1.55	54.0	15.86	AV	245.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_11.51.48

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIIFI 11n40 CH118 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

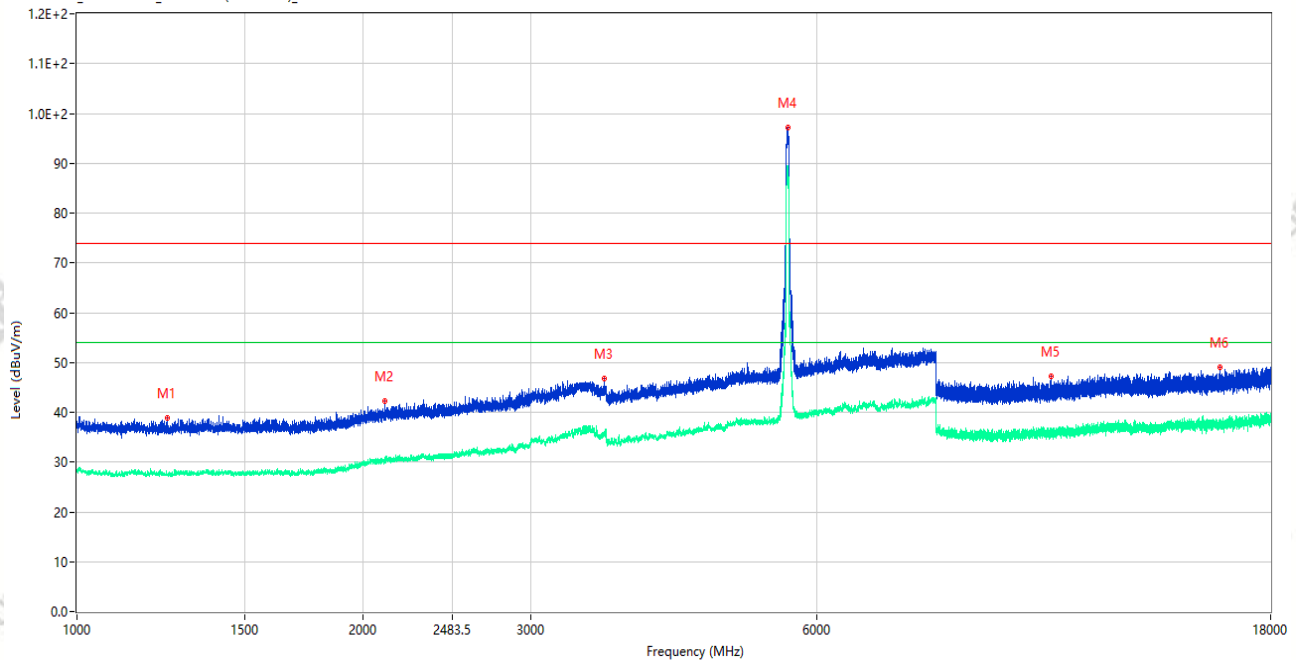

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1243.250	38.88	-16.08	74.0	35.12	Peak	17.00	150	Horizontal	Pass
1**	1243.250	27.43	-16.08	54.0	26.57	AV	17.00	150	Horizontal	Pass
2	2107.250	42.22	-13.58	74.0	31.78	Peak	148.00	150	Horizontal	Pass
2**	2107.250	30.67	-13.58	54.0	23.33	AV	148.00	150	Horizontal	Pass
3	3588.000	46.71	-6.25	74.0	27.29	Peak	56.00	150	Horizontal	Pass
3**	3588.000	35.39	-6.25	54.0	18.61	AV	56.00	150	Horizontal	Pass
4	5591.500	97.21	-2.79	74.0	-23.21	Peak	37.00	150	Horizontal	N/A
4**	5591.500	89.06	-2.79	54.0	-35.06	AV	37.00	150	Horizontal	N/A
5	10567.612	47.17	-3.31	74.0	26.83	Peak	360.00	150	Horizontal	Pass
5**	10567.612	36.02	-3.31	54.0	17.98	AV	360.00	150	Horizontal	Pass
6	15923.888	49.11	-2.36	74.0	24.89	Peak	279.00	150	Horizontal	Pass
6**	15923.888	36.87	-2.36	54.0	17.13	AV	279.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_13.23.52

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIIFI 11ac80 CH106 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

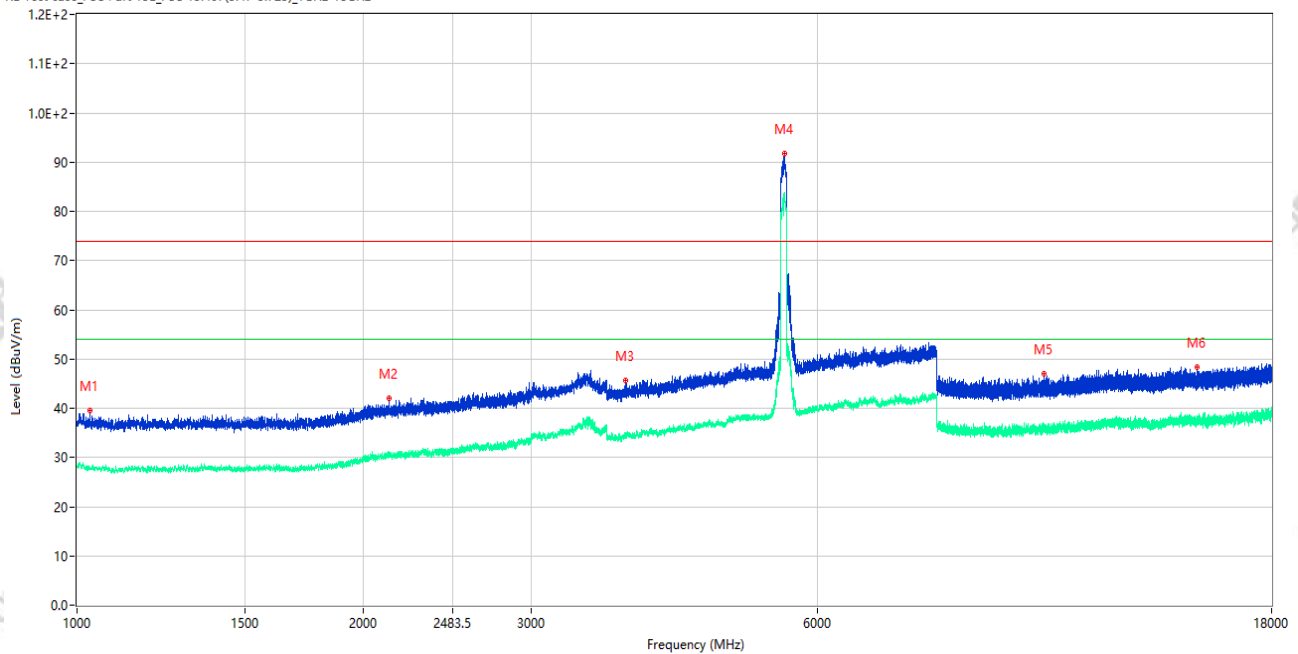

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1031.250	39.45	-15.38	74.0	34.55	Peak	167.00	150	Vertical	Pass
1**	1031.250	27.83	-15.38	54.0	26.17	AV	167.00	150	Vertical	Pass
2	2127.500	41.94	-13.26	74.0	32.06	Peak	234.00	150	Vertical	Pass
2**	2127.500	30.27	-13.26	54.0	23.73	AV	234.00	150	Vertical	Pass
3	3771.500	45.70	-4.93	74.0	28.30	Peak	143.00	150	Vertical	Pass
3**	3771.500	34.80	-4.93	54.0	19.20	AV	143.00	150	Vertical	Pass
4	5536.000	91.75	-2.63	74.0	-17.75	Peak	329.00	150	Vertical	N/A
4**	5536.000	82.98	-2.63	54.0	-28.98	AV	329.00	150	Vertical	N/A
5	10368.588	46.95	-3.31	74.0	27.05	Peak	99.00	150	Vertical	Pass
5**	10368.588	35.47	-3.31	54.0	18.53	AV	99.00	150	Vertical	Pass
6	15023.776	48.37	-2.72	74.0	25.63	Peak	0.00	150	Vertical	Pass
6**	15023.776	37.45	-2.72	54.0	16.55	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_13.29.10

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIIFI 11ac80 CH106 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

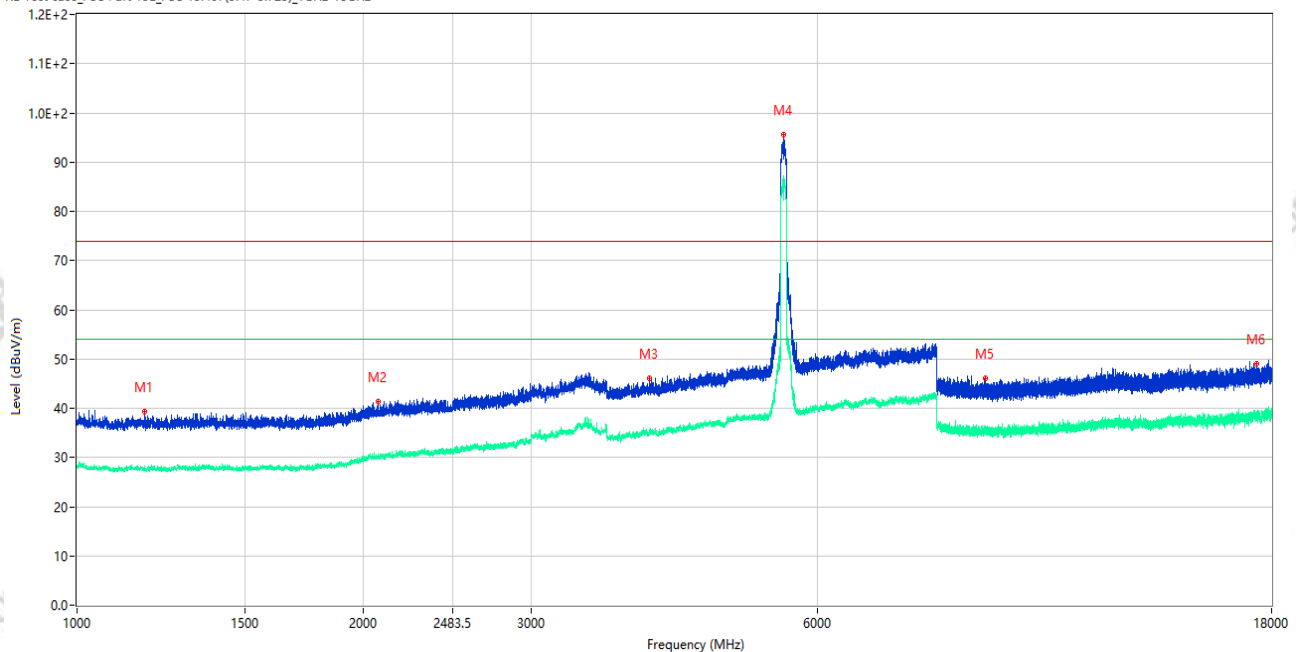

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1178.500	39.25	-15.75	74.0	34.75	Peak	279.00	150	Horizontal	Pass
1**	1178.500	27.51	-15.75	54.0	26.49	AV	279.00	150	Horizontal	Pass
2	2072.250	41.25	-13.74	74.0	32.75	Peak	92.00	150	Horizontal	Pass
2**	2072.250	30.13	-13.74	54.0	23.87	AV	92.00	150	Horizontal	Pass
3	3996.500	46.04	-4.81	74.0	27.96	Peak	5.00	150	Horizontal	Pass
3**	3996.500	35.26	-4.81	54.0	18.74	AV	5.00	150	Horizontal	Pass
4	5523.500	95.58	-2.47	74.0	-21.58	Peak	204.00	150	Horizontal	N/A
4**	5523.500	86.47	-2.47	54.0	-32.47	AV	204.00	150	Horizontal	N/A
5	8996.076	46.16	-4.46	74.0	27.84	Peak	50.00	150	Horizontal	Pass
5**	8996.076	35.44	-4.46	54.0	18.56	AV	50.00	150	Horizontal	Pass
6	17341.651	48.96	0.31	74.0	25.04	Peak	209.00	150	Horizontal	Pass
6**	17341.651	38.53	0.31	54.0	15.47	AV	209.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_13.50.23

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIIFI 11a CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

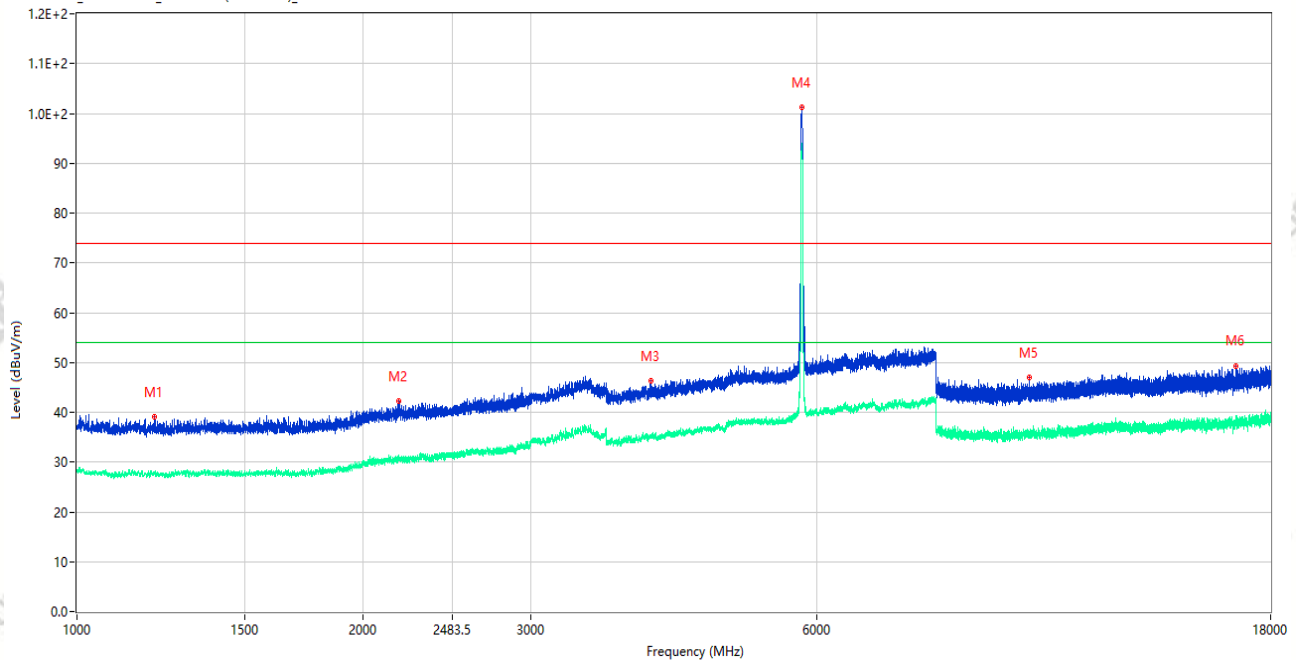

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1206.750	39.03	-15.79	74.0	34.97	Peak	355.00	150	Vertical	Pass
1**	1206.750	27.85	-15.79	54.0	26.15	AV	355.00	150	Vertical	Pass
2	2178.000	42.33	-12.84	74.0	31.67	Peak	257.00	150	Vertical	Pass
2**	2178.000	31.06	-12.84	54.0	22.94	AV	257.00	150	Vertical	Pass
3	4010.000	46.35	-4.36	74.0	27.65	Peak	0.00	150	Vertical	Pass
3**	4010.000	35.41	-4.36	54.0	18.59	AV	0.00	150	Vertical	Pass
4	5784.000	101.29	-1.54	74.0	-27.29	Peak	99.00	150	Vertical	N/A
4**	5784.000	93.92	-1.54	54.0	-39.92	AV	99.00	150	Vertical	N/A
5	10037.987	46.99	-4.16	74.0	27.01	Peak	2.00	150	Vertical	Pass
5**	10037.987	35.67	-4.16	54.0	18.33	AV	2.00	150	Vertical	Pass
6	16560.450	49.36	-0.99	74.0	24.64	Peak	48.00	150	Vertical	Pass
6**	16560.450	38.55	-0.99	54.0	15.45	AV	48.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_13.45.49

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIIFI 11a CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

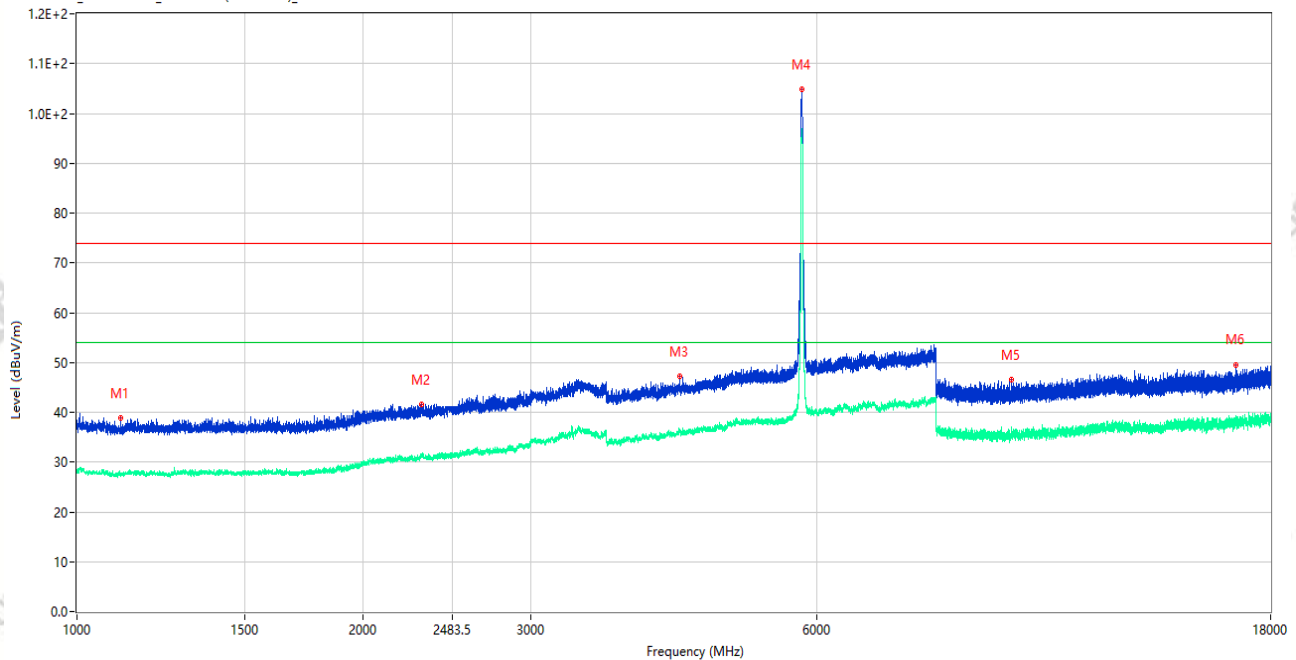

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1112.250	38.85	-15.78	74.0	35.15	Peak	21.00	150	Horizontal	Pass
1**	1112.250	27.20	-15.78	54.0	26.80	AV	21.00	150	Horizontal	Pass
2	2300.750	41.64	-13.02	74.0	32.36	Peak	121.00	150	Horizontal	Pass
2**	2300.750	30.91	-13.02	54.0	23.09	AV	121.00	150	Horizontal	Pass
3	4308.000	47.25	-3.53	74.0	26.75	Peak	139.00	150	Horizontal	Pass
3**	4308.000	35.92	-3.53	54.0	18.08	AV	139.00	150	Horizontal	Pass
4	5782.500	104.75	-1.53	74.0	-30.75	Peak	20.00	150	Horizontal	N/A
4**	5782.500	96.04	-1.53	54.0	-42.04	AV	20.00	150	Horizontal	N/A
5	9609.538	46.49	-3.21	74.0	27.51	Peak	75.00	150	Horizontal	Pass
5**	9609.538	35.55	-3.21	54.0	18.45	AV	75.00	150	Horizontal	Pass
6	16549.949	49.59	-1.07	74.0	24.41	Peak	217.00	150	Horizontal	Pass
6**	16549.949	38.48	-1.07	54.0	15.52	AV	217.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_14.05.42

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIIFI 11n20 CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

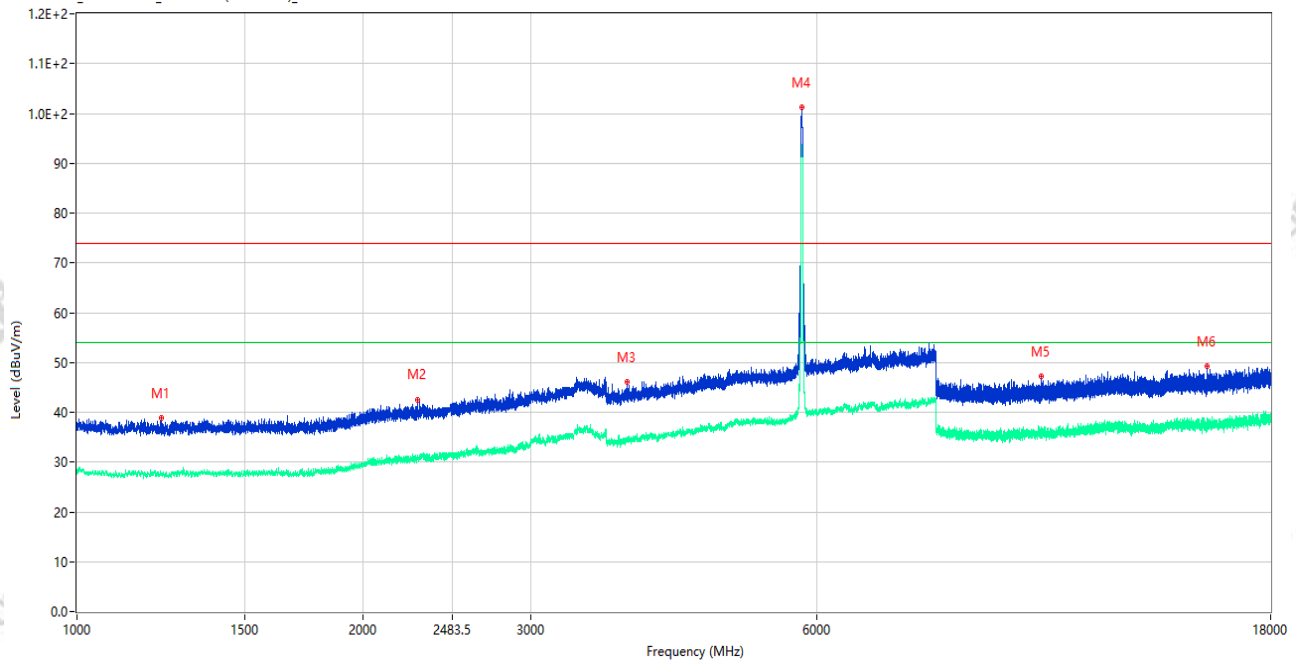

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1227.000	38.80	-15.99	74.0	35.20	Peak	166.00	150	Vertical	Pass
1**	1227.000	27.63	-15.99	54.0	26.37	AV	166.00	150	Vertical	Pass
2	2279.250	42.59	-12.74	74.0	31.41	Peak	84.00	150	Vertical	Pass
2**	2279.250	30.72	-12.74	54.0	23.28	AV	84.00	150	Vertical	Pass
3	3787.500	46.05	-5.31	74.0	27.95	Peak	0.00	150	Vertical	Pass
3**	3787.500	34.89	-5.31	54.0	19.11	AV	0.00	150	Vertical	Pass
4	5787.500	101.32	-1.56	74.0	-27.32	Peak	100.00	150	Vertical	N/A
4**	5787.500	93.22	-1.56	54.0	-39.22	AV	100.00	150	Vertical	N/A
5	10329.400	47.27	-3.18	74.0	26.73	Peak	354.00	150	Vertical	Pass
5**	10329.400	35.56	-3.18	54.0	18.44	AV	354.00	150	Vertical	Pass
6	15437.475	49.27	-1.71	74.0	24.73	Peak	285.00	150	Vertical	Pass
6**	15437.475	37.56	-1.71	54.0	16.44	AV	285.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_14.10.15

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIIFI 11n20 CH157 P=17


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

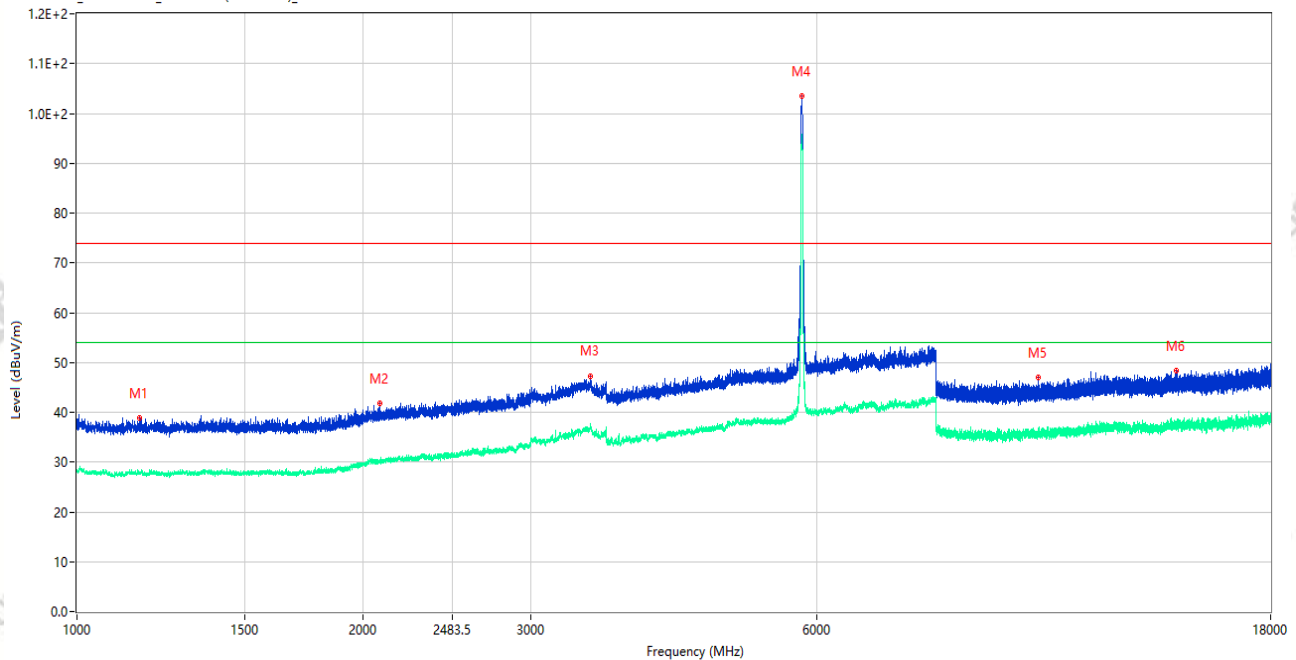

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1164.750	38.82	-15.44	74.0	35.18	Peak	68.00	150	Horizontal	Pass
1**	1164.750	27.62	-15.44	54.0	26.38	AV	68.00	150	Horizontal	Pass
2	2082.000	41.84	-13.80	74.0	32.16	Peak	150.00	150	Horizontal	Pass
2**	2082.000	30.09	-13.80	54.0	23.91	AV	150.00	150	Horizontal	Pass
3	3465.000	47.34	-5.10	74.0	26.66	Peak	87.00	150	Horizontal	Pass
3**	3465.000	37.21	-5.10	54.0	16.79	AV	87.00	150	Horizontal	Pass
4	5783.000	103.45	-1.53	74.0	-29.45	Peak	39.00	150	Horizontal	N/A
4**	5783.000	95.39	-1.53	54.0	-41.39	AV	39.00	150	Horizontal	N/A
5	10260.763	47.08	-3.16	74.0	26.92	Peak	96.00	150	Horizontal	Pass
5**	10260.763	36.05	-3.16	54.0	17.95	AV	96.00	150	Horizontal	Pass
6	14336.287	48.39	-2.16	74.0	25.61	Peak	184.00	150	Horizontal	Pass
6**	14336.287	37.70	-2.16	54.0	16.30	AV	184.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_14.30.09

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIIFI 11n40 CH151 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

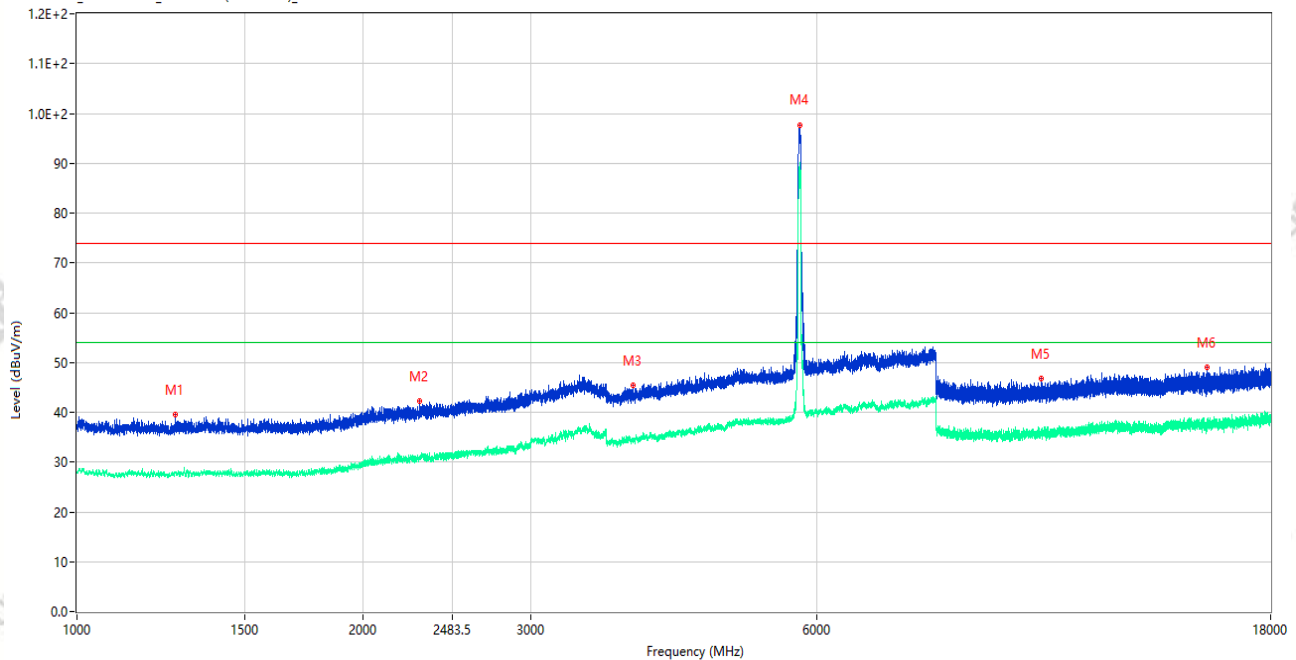

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1269.000	39.56	-15.91	74.0	34.44	Peak	228.00	150	Vertical	Pass
1**	1269.000	27.99	-15.91	54.0	26.01	AV	228.00	150	Vertical	Pass
2	2291.500	42.22	-13.13	74.0	31.78	Peak	186.00	150	Vertical	Pass
2**	2291.500	31.04	-13.13	54.0	22.96	AV	186.00	150	Vertical	Pass
3	3847.000	45.46	-5.33	74.0	28.54	Peak	206.00	150	Vertical	Pass
3**	3847.000	34.43	-5.33	54.0	19.57	AV	206.00	150	Vertical	Pass
4	5756.500	97.72	-2.04	74.0	-23.72	Peak	117.00	150	Vertical	N/A
4**	5756.500	89.34	-2.04	54.0	-35.34	AV	117.00	150	Vertical	N/A
5	10329.875	46.67	-3.17	74.0	27.33	Peak	310.00	150	Vertical	Pass
5**	10329.875	36.32	-3.17	54.0	17.68	AV	310.00	150	Vertical	Pass
6	15440.099	49.07	-1.75	74.0	24.93	Peak	0.00	150	Vertical	Pass
6**	15440.099	37.24	-1.75	54.0	16.76	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_14.34.13

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIIFI 11n40 CH151 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

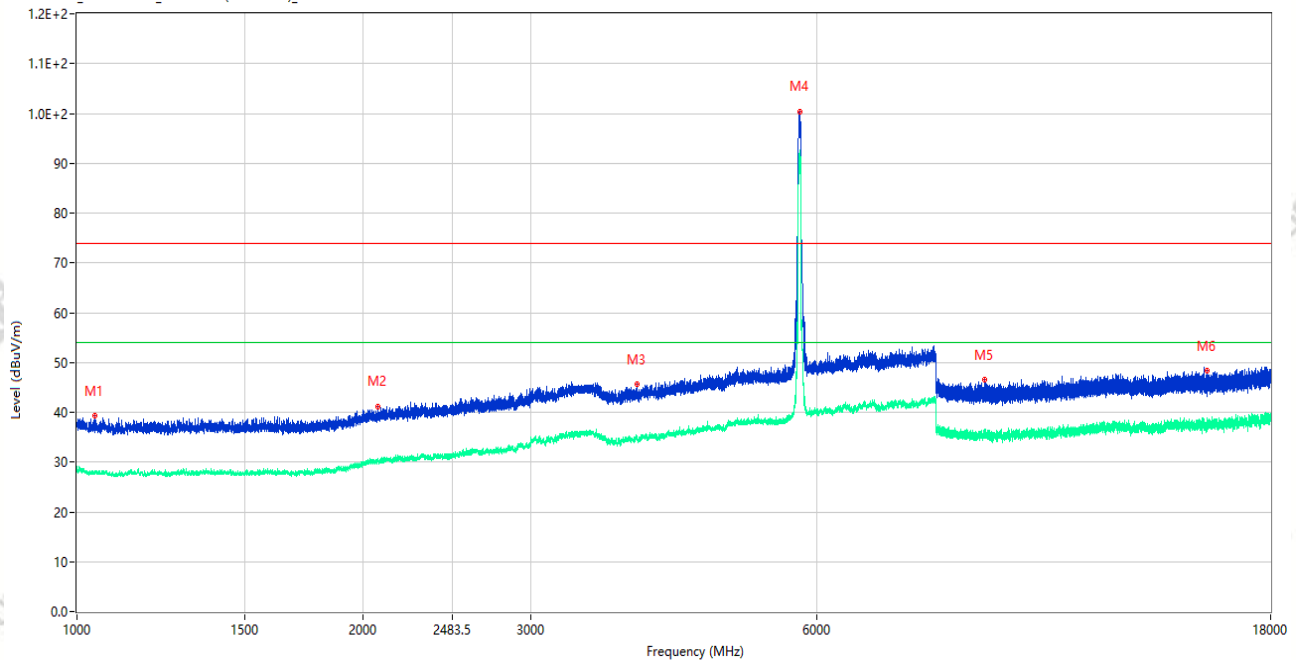

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1044.250	39.26	-15.43	74.0	34.74	Peak	66.00	150	Horizontal	Pass
1**	1044.250	27.70	-15.43	54.0	26.30	AV	66.00	150	Horizontal	Pass
2	2070.250	41.07	-13.75	74.0	32.93	Peak	270.00	150	Horizontal	Pass
2**	2070.250	30.12	-13.75	54.0	23.88	AV	270.00	150	Horizontal	Pass
3	3879.500	45.67	-4.69	74.0	28.33	Peak	218.00	150	Horizontal	Pass
3**	3879.500	34.73	-4.69	54.0	19.27	AV	218.00	150	Horizontal	Pass
4	5753.000	100.45	-2.09	74.0	-26.45	Peak	28.00	150	Horizontal	N/A
4**	5753.000	92.70	-2.09	54.0	-38.70	AV	28.00	150	Horizontal	N/A
5	9000.588	46.62	-4.49	74.0	27.38	Peak	261.00	150	Horizontal	Pass
5**	9000.588	35.98	-4.49	54.0	18.02	AV	261.00	150	Horizontal	Pass
6	15450.338	48.27	-1.94	74.0	25.73	Peak	47.00	150	Horizontal	Pass
6**	15450.338	38.08	-1.94	54.0	15.92	AV	47.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_14.53.04

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIIFI 11ac80 CH155 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

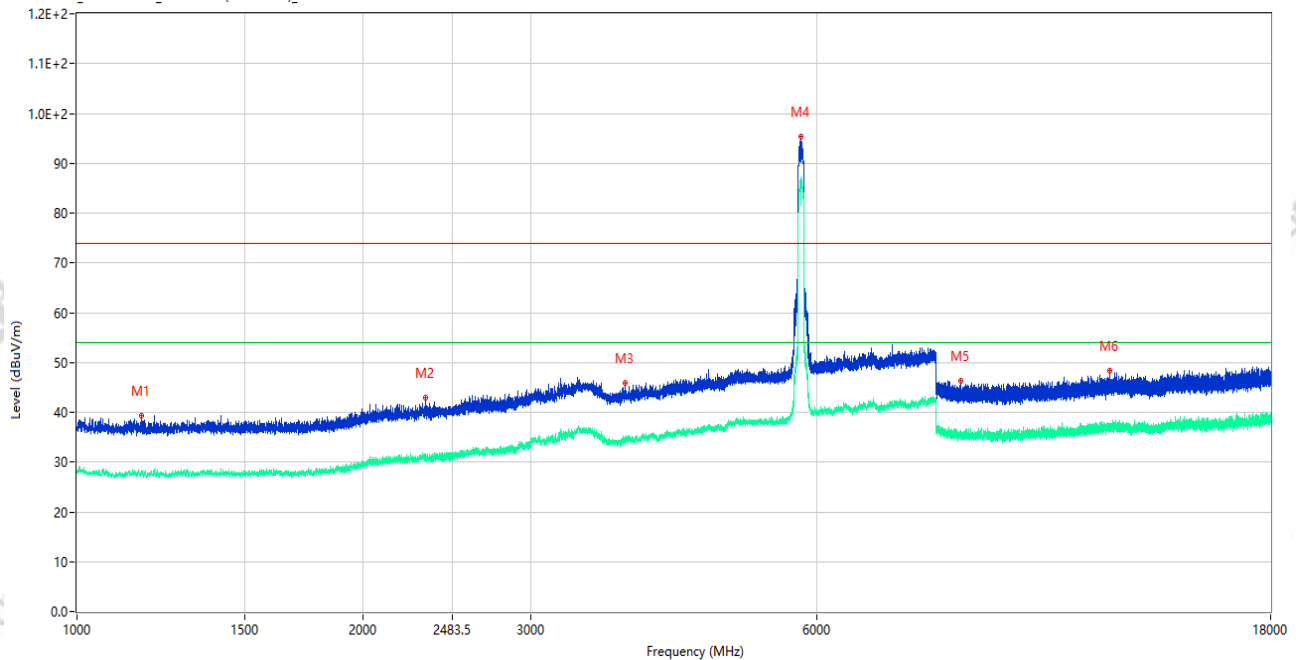

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1169.000	39.28	-15.50	74.0	34.72	Peak	16.00	150	Vertical	Pass
1**	1169.000	27.80	-15.50	54.0	26.20	AV	16.00	150	Vertical	Pass
2	2326.500	43.04	-12.13	74.0	30.96	Peak	242.00	150	Vertical	Pass
2**	2326.500	31.28	-12.13	54.0	22.72	AV	242.00	150	Vertical	Pass
3	3775.000	45.85	-5.16	74.0	28.15	Peak	345.00	150	Vertical	Pass
3**	3775.000	34.11	-5.16	54.0	19.89	AV	345.00	150	Vertical	Pass
4	5768.500	95.27	-1.70	74.0	-21.27	Peak	100.00	150	Vertical	N/A
4**	5768.500	86.78	-1.70	54.0	-32.78	AV	100.00	150	Vertical	N/A
5	8497.325	46.24	-4.57	74.0	27.76	Peak	52.00	150	Vertical	Pass
5**	8497.325	35.82	-4.57	54.0	18.18	AV	52.00	150	Vertical	Pass
6	12179.287	48.44	-2.74	74.0	25.56	Peak	147.00	150	Vertical	Pass
6**	12179.287	37.39	-2.74	54.0	16.61	AV	147.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080336

Test Time: 2026-08-31_14.48.18

EUT Name: SmartPhone

Temp.(°C): 21.5

Model Number: MC9C674S

Humidity (%RH): 47

Sample Number: CC26080200-001-S01

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIIFI 11ac80 CH155 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A09+数据线: A14

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

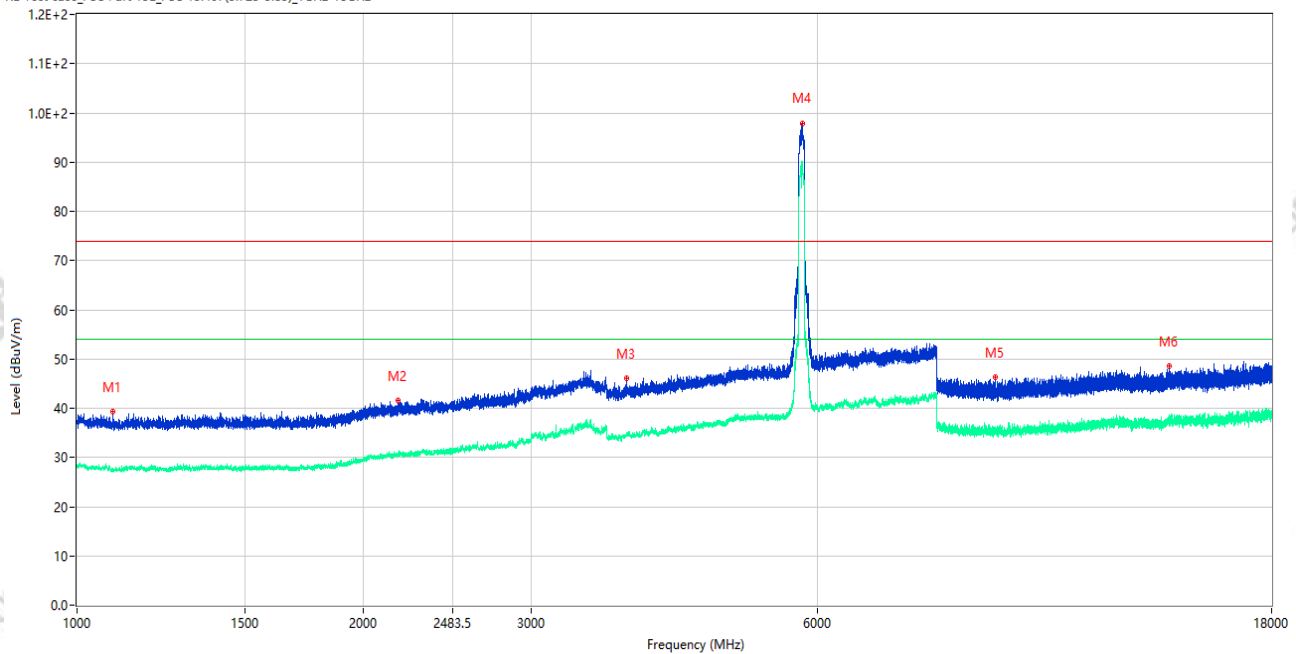

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1091.000	39.33	-15.84	74.0	34.67	Peak	1.00	150	Horizontal	Pass
1**	1091.000	27.41	-15.84	54.0	26.59	AV	1.00	150	Horizontal	Pass
2	2173.500	41.50	-12.94	74.0	32.50	Peak	199.00	150	Horizontal	Pass
2**	2173.500	30.82	-12.94	54.0	23.18	AV	199.00	150	Horizontal	Pass
3	3784.000	46.04	-5.34	74.0	27.96	Peak	359.00	150	Horizontal	Pass
3**	3784.000	34.33	-5.34	54.0	19.67	AV	359.00	150	Horizontal	Pass
4	5779.000	97.95	-1.52	74.0	-23.95	Peak	28.00	150	Horizontal	N/A
4**	5779.000	89.13	-1.52	54.0	-35.13	AV	28.00	150	Horizontal	N/A
5	9234.050	46.35	-5.59	74.0	27.65	Peak	26.00	150	Horizontal	Pass
5**	9234.050	34.82	-5.59	54.0	19.18	AV	26.00	150	Horizontal	Pass
6	14046.750	48.57	-1.79	74.0	25.43	Peak	251.00	150	Horizontal	Pass
6**	14046.750	37.58	-1.79	54.0	16.42	AV	251.00	150	Horizontal	Pass