

VARIANT FCC TEST REPORT

(PART 24)


Applicant:	COOSEA GROUP (HK) COMPANY LIMITED
Address:	UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL, HONG KONG, CHINA

Manufacturer or Supplier:	COOSEA GROUP (HK) COMPANY LIMITED
Address:	UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL, HONG KONG, CHINA
Product:	LTE Smartphone
Brand Name:	Cricket
Model Name:	SL100EA
FCC ID:	2A28USL100EA
Date of tests:	Oct. 27, 2021 ~ Jun. 08, 2022

The tests have been carried out according to the requirements of the following standard:

☒ **FCC PART 24, Subpart E** ☒ **FCC PART 2**
☒ **ANSI/TIA/EIA-603-D** ☒ **ANSI/TIA/EIA-603-E** ☒ **ANSI C63.26-2015**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
	
Date: Jun. 08, 2022	Date: Jun. 08, 2022

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	5
1.2 TEST SITE AND INSTRUMENTS	6
2 GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 CONFIGURATION OF SYSTEM UNDER TEST	11
2.3 DESCRIPTION OF SUPPORT UNITS	12
2.4 TEST ITEM AND TEST CONFIGURATION	12
2.5 EUT OPERATING CONDITIONS	15
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	15
3 TEST TYPES AND RESULTS	16
3.1 OUTPUT POWER MEASUREMENT	16
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	16
3.1.2 TEST PROCEDURES	16
3.1.3 TEST SETUP	17
3.1.4 TEST RESULTS	17
3.2 FREQUENCY STABILITY MEASUREMENT	30
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	30
3.2.2 TEST PROCEDURE	30
3.2.3 TEST SETUP	30
3.2.4 TEST RESULTS	31
3.3 OCCUPIED BANDWIDTH MEASUREMENT	32
3.3.1 TEST PROCEDURES	32
3.3.2 TEST SETUP	32
3.3.3 TEST RESULTS	33
3.4 BAND EDGE MEASUREMENT	34
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	34
3.4.2 TEST SETUP	34
3.4.3 TEST PROCEDURES	35
3.4.4 TEST RESULTS	35
3.5 CONDUCTED SPURIOUS EMISSIONS	36
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	36
3.5.2 TEST PROCEDURE	36
3.5.3 TEST SETUP	36
3.5.4 TEST RESULTS	37
3.6 RADIATED EMISSION MEASUREMENT	38
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	38
3.6.2 TEST PROCEDURES	38
3.6.3 DEVIATION FROM TEST STANDARD	38



Test Report No.: W7L-220503W001RF05

3.6.4 TEST SETUP	39
3.6.5 TEST RESULTS	41
3.7 PEAK TO AVERAGE RATIO	65
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	65
3.7.2 TEST SETUP	65
3.7.3 TEST PROCEDURES	65
3.7.4 TEST RESULTS	66
4 INFORMATION ON THE TESTING LABORATORIES	67
5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	68
6 APPENDIX A.....	69
WCDMA BAND 2.....	69
LTE BAND 2	80



Test Report No.: W7L-220503W001RF05

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P21100025RF05	Original release	Dec. 24, 2021
W7L-220503W001RF05	Based on the original report W7L-P21100025RF05 changing SW version and adding 3G function. Again Verify the RSE, Power and adding 3G data.	Jun. 08, 2022

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2		
STANDARD SECTION	TEST TYPE	RESULT
§2.1046	Coducted Output Power	Compliance
§24.232(c)	Equivalent Isotropic Radiated Power	Compliance
§2.1055 §24.235	Frequency Stability	Compliance
§2.1049	Occupied Bandwidth	Compliance
§24.232(d)	Peak to average ratio	Compliance
§24.238(a)(b)	Band Edge Measurements	Compliance
§2.1051 §24.238(a)(b)	Conducted Spurious Emissions	Compliance
§2.1053 §24.238(a)(b)	Radiated Spurious Emissions	Compliance

Note: Except the data of RSE and power, other data please refer to APPENDIX A.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	±76.97Hz
Radiated emissions & Radiated Power (30MHz~1GMHz)	±4.98dB
Radiated emissions & Radiated Power (1GMHz ~6GMHz)	±4.70dB
Radiated emissions (6GMHz ~18GMHz)	±4.60dB
Radiated emissions (18GMHz ~40GMHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Band Edge Measurements	±4.70dB
Peak to average ratio	±0.76dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 22,21	Apr. 21,22
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 21,22	Apr. 20,23
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Jun. 03,21	Jun. 02,22
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Jun. 02,22	Jun. 01,23
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-051	Feb. 14,20	Feb. 13,23
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 05,21	Mar. 04,22
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 04,22	Mar. 03,23
Horn Antenna	ETS-LINDGREN	3117	00168692	Apr. 02,21	Apr. 01,22
Horn Antenna	ETS-LINDGREN	3117	00168692	Apr. 01,22	Mar. 31,23
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Aug. 25, 21	Aug. 24, 22
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 25,21	Feb. 24,22
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 24,22	Feb. 23,23
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 01,22	May. 31,23
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 03,21	Jun. 02,22
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 02,22	Jun. 01,23
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 22,21	Apr. 21,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 21,22	Apr. 20,23
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 18,23
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V 7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 03,21	Jun. 02,22
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 02,22	Jun. 01,23
Power Meter	Anritsu	ML2495A	1506002	Apr. 07,21	Apr. 06,22
Power Meter	Anritsu	ML2495A	1506002	Apr. 06,22	Apr. 05,23
Power Sensor	Anritsu	MA2411B	1339352	May. 07,21	May. 06,22
Power Sensor	Anritsu	MA2411B	1339352	May. 06,22	May. 05,23
Temperature Chamber	ESPEC	SH-242	93000855	Jun. 02,21	Jun. 01,22
Temperature Chamber	ESPEC	SH-242	93000855	Jun. 01,22	May. 31,23
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 05,21	Mar. 04,22
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 04,22	Mar. 03,23
Power Divider	MCLI/USA	PS2-15	24880	N/A	N/A



Test Report No.: W7L-220503W001RF05

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	LTE Smartphone	
BRAND NAME	Cricket	
MODEL NAME	SL100EA	
NOMINAL VOLTAGE	5.0Vdc(adapter or host equipment) 3.85Vdc (Li-ion, battery)	
MODULATION TYPE	WCDMA: BPSK, QPSK LTE Band 2: QPSK, 16QAM, 64QAM	
FREQUENCY RANGE	WCDMA	1852.4MHz ~ 1907.6MHz
	LTE Band 2 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1909.3MHz
	LTE Band 2 Channel Bandwidth: 3MHz	1851.5MHz ~ 1908.5MHz
	LTE Band 2 Channel Bandwidth: 5MHz	1852.5MHz ~ 1907.5MHz
	LTE Band 2 Channel Bandwidth: 10MHz	1855.0MHz ~ 1905.0MHz
	LTE Band 2 Channel Bandwidth: 15MHz	1857.5MHz ~ 1902.5MHz
	LTE Band 2 Channel Bandwidth: 20MHz	1860.0MHz ~ 1900.0MHz
	WCDMA	143.22mW
MAX. EIRP POWER	LTE Band 2 Channel Bandwidth: 1.4MHz	222.84mW
	LTE Band 2 Channel Bandwidth: 3MHz	223.36mW
	LTE Band 2 Channel Bandwidth: 5MHz	220.80mW
	LTE Band 2 Channel Bandwidth: 10MHz	222.33mW
	LTE Band 2 Channel Bandwidth: 15MHz	223.36mW
	LTE Band 2 Channel Bandwidth: 20MHz	224.39mW
	WCDMA	143.22mW
	LTE Band 2 Channel Bandwidth: 1.4MHz	222.84mW

EMISSION DESIGNATOR	WCDMA	4M19F9W
	LTE Band 2 Channel Bandwidth: 1.4MHz	QPSK: 1M11G7D
		16QAM: 1M12W7D
		64QAM: 1M11W7D
	LTE Band 2 Channel Bandwidth: 3MHz	QPSK: 2M73G7D
		16QAM: 2M73W7D
		64QAM: 2M73W7D
	LTE Band 2 Channel Bandwidth: 5MHz	QPSK: 4M55G7D
		16QAM: 4M57W7D
		64QAM: 4M54W7D
	LTE Band 2 Channel Bandwidth: 10MHz	QPSK: 9M08G7D
		16QAM: 9M06W7D
		64QAM: 9M07W7D
	LTE Band 2 Channel Bandwidth: 15MHz	QPSK: 13M6G7D
		16QAM: 13M6W7D
		64QAM: 13M6W7D
	LTE Band 2 Channel Bandwidth: 20MHz	QPSK: 18M1G7D
		16QAM: 18M2W7D
		64QAM: 18M1W7D
ANTENNA TYPE	PIFA Antenna with -0.7dBi gain for WCDMA II/LTE B2	
HW VERSION	1.0	
SW VERSION	SL100EAC20101	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	USB cable: unshielded without ferrite, 1.0meter	
EXTREME TEMPERATURE	-10-55 °C	
EXTREME VOLTAGE	3.6V - 4.4V	

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
WCDMA	1TX/1RX
LTE	1TX/1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.


4. List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Battery	COOSEA	ZHONGSHAN TIANMAO BATTERY CO., LTD	BL-A32CT	Capacity : 3.85 Vdc, 3450mAh
AC Adapter	COOSEA	Guangdong Beicom Electronics Co., Ltd.	U312E0A05020 0	I/P:100-240V,50/60Hz,0.35A, O/P: 5.0V,2.0A 10.0W
USB Cable	COOSEA	Wivtak	TP-C0028-B3	Signal Line, 1.0meter



2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

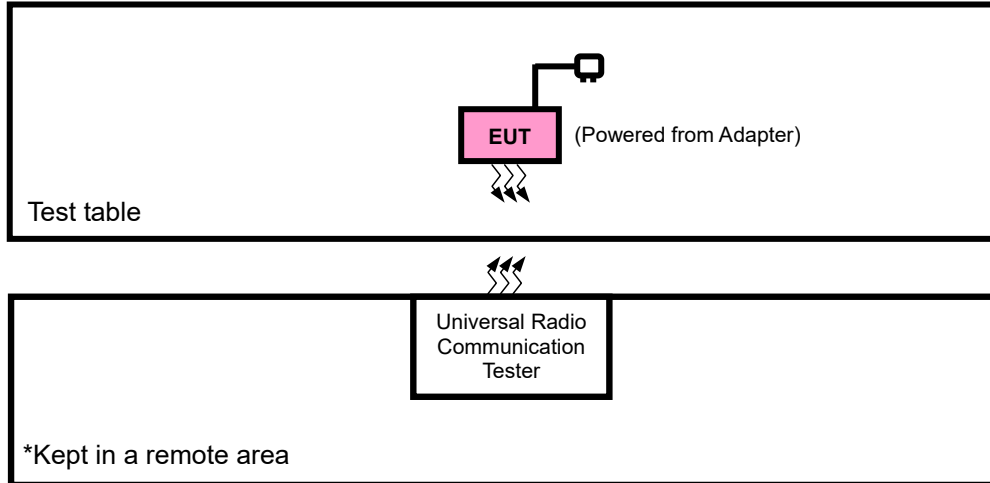



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	Kikusui/JP	PMX18-5A	0000001	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in EIRP and radiated emission was found when positioned on X-plane for LTE. Following channel(s) was (were) selected for the final test as listed below:

DESCRIPTION
EUT + Adapter with WCDMA or LTE



**BUREAU
VERITAS**

Test Report No.: W7L-220503W001RF05

WCDMA

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
FREQUENCY STABILITY	9262 to 9538	9262, 9400, 9538	WCDMA
OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA
PEAK TO AVERAGE RATIO	9262 to 9538	9262, 9400, 9538	WCDMA
BAND EDGE	9262 to 9538	9262, 9538	WCDMA
CONDCUDED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA
RADIATED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA

LTE BAND 2 MODE

TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
FREQUENCY STABILITY	18607 to 19193	18607, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
	18615 to 19185	18615, 19185	3MHz	QPSK	1 RB / 0 RB Offset
	18625 to 19175	18625, 19175	5MHz	QPSK	1 RB / 0 RB Offset
	18650 to 19150	18650, 19150	10MHz	QPSK	1 RB / 0 RB Offset
	18675 to 19125	18675, 19125	15MHz	QPSK	1 RB / 0 RB Offset
	18700 to 19100	18700, 19100	20MHz	QPSK	1 RB / 0 RB Offset
OCCUPIED BANDWIDTH	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM, 64QAM	6 RB / 0 RB Offset
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM, 64QAM	15 RB / 0 RB Offset
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM, 64QAM	25 RB / 0 RB Offset
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM, 64QAM	50 RB / 0 RB Offset
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM, 64QAM	75 RB / 0 RB Offset
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM, 64QAM	100 RB / 0 RB Offset
PEAK TO AVERAGE RATIO	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset

BAND EDGE	18607 to 19193	18607	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		19193	1.4MHz	QPSK,16QAM, 64QAM	6 RB / 0 RB Offset
	18615 to 19185	18615	3MHz	QPSK,16QAM, 64QAM	1 RB / 5 RB Offset
		19185	3MHz	QPSK,16QAM, 64QAM	6 RB / 0 RB Offset
	18625 to 19175	18625	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		19175	5MHz	QPSK,16QAM, 64QAM	15 RB / 0 RB Offset
	18650 to 19150	18650	10MHz	QPSK,16QAM, 64QAM	1 RB / 14 RB Offset
		19150	10MHz	QPSK,16QAM, 64QAM	15 RB / 0 RB Offset
	18675 to 19125	18675	15MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		19125	15MHz	QPSK,16QAM, 64QAM	25 RB / 0 RB Offset
	18700 to 19100	18700	20MHz	QPSK,16QAM, 64QAM	1 RB / 24 RB Offset
		19100	20MHz	QPSK,16QAM, 64QAM	25 RB / 0 RB Offset
CONDCUDED EMISSION	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK	1 RB / 0 RB Offset
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 0 RB Offset
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 0 RB Offset
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK	1 RB / 0 RB Offset
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK	1 RB / 0 RB Offset
RADIATED EMISSION	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 0 RB Offset
	18615 to 19185	18900	3MHz	QPSK	1 RB / 0 RB Offset
	18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset
	18650 to 19150	18607, 18900, 19193	10MHz	QPSK	1 RB / 0 RB Offset
	18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset
	18700 to 19100	18900	20MHz	QPSK	1 RB / 0 RB Offset

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 57%RH	DC 5V By Adapter	Jace Hu
FREQUENCY STABILITY	23deg. C, 61%RH	3.5/3.85/4.4V By Battery	James Fu
OCCUPIED BANDWIDTH	23deg. C, 61%RH	DC5V By Adapter	James Fu
PEAK TO AVERAGE RATIO	23deg. C, 61%RH	DC 5V By Adapter	James Fu
BAND EDGE	23deg. C, 61%RH	DC5V By Adapter	James Fu
CONDCUDED EMISSION	23deg. C, 61%RH	DC5V By Adapter	James Fu
RADIATED EMISSION	23deg. C, 70%RH	DC5V By Adapter	Jace Hu

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.


CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	WCDMA II			Max. Tune-up Power
Channel	9262	9400	9538	
Frequency	1852.4	1880	1907.6	
RMC 12.2K	22.21	22.26	22.18	23.5
HSDPA Subtest-1	21.23	21.27	21.13	22.5
HSDPA Subtest-2	21.13	21.17	21.11	22.5
HSDPA Subtest-3	20.65	20.67	20.63	22.0
HSDPA Subtest-4	20.63	20.63	20.57	22.0
DC-HSDPA Subtest-1	21.20	21.22	21.10	22.5
DC-HSDPA Subtest-2	21.15	21.20	21.07	22.5
DC-HSDPA Subtest-3	20.60	20.65	20.60	22.0
DC-HSDPA Subtest-4	20.58	20.63	20.55	22.0
HSUPA Subtest-1	21.20	21.23	21.21	22.5
HSUPA Subtest-2	19.36	19.35	19.34	20.5
HSUPA Subtest-3	20.22	20.31	20.22	21.5
HSUPA Subtest-4	19.38	19.37	19.36	20.5
HSUPA Subtest-5	21.19	21.25	21.21	22.5
HSPA+ Subtest-1	19.02	19.00	19.00	20.5



**BUREAU
VERITAS**

Test Report No.: W7L-220503W001RF05

LTE BAND 2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193	MPR
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz	
2/ 1.4	QPSK	1	0	23.77	23.82	23.76	0
		1	2	24.18	24.06	24.13	0
		1	5	23.77	23.73	23.70	0
		3	0	24.00	23.90	23.94	0
		3	1	24.13	24.06	24.00	0
		3	3	23.92	23.84	23.88	0
		6	0	23.04	22.95	22.89	1
	16QAM	1	0	22.87	22.81	22.81	1
		1	2	23.50	23.38	23.44	1
		1	5	23.05	22.94	22.99	1
		3	0	23.15	23.09	23.11	1
		3	1	23.06	23.04	23.03	1
		3	3	22.93	22.93	22.92	1
		6	0	22.02	21.97	21.97	2
	64QAM	1	0	21.47	21.47	21.50	2
		1	2	21.90	21.92	21.82	2
		1	5	21.50	21.42	21.49	2
		3	0	21.96	21.92	21.87	2
		3	1	21.93	21.96	21.83	2
		3	3	21.87	21.80	21.86	2
		6	0	20.92	20.83	20.83	3

Band/BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185	MPR
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz	
2 / 3	QPSK	1	0	23.80	23.79	23.76	0
		1	7	24.19	24.04	24.13	0
		1	14	23.74	23.72	23.74	0
		8	0	23.02	22.93	22.91	1
		8	3	23.06	23.07	23.03	1
		8	7	22.93	22.87	22.93	1
		15	0	22.99	22.99	22.86	1
	16QAM	1	0	22.85	22.83	22.84	1
		1	7	23.44	23.44	23.41	1
		1	14	23.08	22.94	22.98	1
		8	0	22.11	22.08	22.08	2
		8	3	22.08	22.03	22.02	2
		8	7	21.90	21.93	21.91	2
		15	0	22.02	21.92	21.97	2
	64QAM	1	0	21.47	21.47	21.50	2
		1	7	21.90	21.92	21.81	2
		1	14	21.44	21.49	21.49	2
		8	0	21.00	20.93	20.87	3
		8	3	20.91	20.97	20.87	3
		8	7	20.88	20.83	20.79	3
		15	0	20.90	20.86	20.85	3

Band/BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175	MPR
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz	
2/ 5	QPSK	1	0	23.79	23.84	23.75	0
		1	12	24.14	24.07	24.13	0
		1	24	23.73	23.73	23.70	0
		12	0	22.99	22.93	22.94	1
		12	6	23.06	23.06	23.02	1
		12	13	22.89	22.91	22.92	1
		25	0	23.01	22.96	22.83	1
	16QAM	1	0	22.84	22.87	22.84	1
		1	12	23.47	23.41	23.42	1
		1	24	23.08	22.94	22.99	1
		12	0	22.11	22.10	22.11	2
		12	6	22.11	21.99	22.06	2
		12	13	21.95	21.91	21.88	2
		25	0	22.02	21.91	22.00	2
	64QAM	1	0	21.53	21.50	21.44	2
		1	12	21.93	21.86	21.81	2
		1	24	21.51	21.44	21.49	2
		12	0	20.99	20.96	20.88	3
		12	6	20.97	20.90	20.88	3
		12	13	20.84	20.84	20.82	3
		25	0	20.94	20.80	20.87	3

Band/BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150	MPR
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz	
2/ 10	QPSK	1	0	23.84	23.82	23.73	0
		1	24	24.17	24.09	24.09	0
		1	49	23.77	23.79	23.71	0
		25	0	23.00	22.93	22.95	1
		25	12	23.13	23.06	23.03	1
		25	25	22.89	22.85	22.92	1
		50	0	23.04	22.97	22.88	1
	16QAM	1	0	22.89	22.87	22.80	1
		1	24	23.48	23.41	23.44	1
		1	49	23.04	23.00	22.97	1
		25	0	22.17	22.06	22.15	2
		25	12	22.06	22.01	22.03	2
		25	25	21.94	21.92	21.91	2
		50	0	22.07	21.94	21.94	2
	64QAM	1	0	21.48	21.49	21.48	2
		1	24	21.96	21.87	21.82	2
		1	49	21.46	21.42	21.49	2
		25	0	21.03	20.96	20.87	3
		25	12	20.92	20.90	20.83	3
		25	25	20.90	20.87	20.83	3
		50	0	20.94	20.80	20.87	3

Band/BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125	MPR
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz	
2/ 15	QPSK	1	0	23.77	23.82	23.76	0
		1	37	24.19	24.04	24.14	0
		1	74	23.71	23.76	23.70	0
		36	0	23.03	22.92	22.94	1
		36	19	23.12	23.01	23.03	1
		36	39	22.91	22.84	22.92	1
		75	0	23.04	22.99	22.83	1
	16QAM	1	0	22.85	22.80	22.80	1
		1	37	23.49	23.40	23.44	1
		1	74	23.08	22.95	22.95	1
		36	0	22.13	22.06	22.14	2
		36	19	22.12	21.97	22.07	2
		36	39	21.89	21.94	21.88	2
		75	0	22.06	21.91	22.01	2
	64QAM	1	0	21.48	21.47	21.51	2
		1	37	21.97	21.92	21.82	2
		1	74	21.44	21.43	21.49	2
		36	0	21.03	20.94	20.92	3
		36	19	20.96	20.97	20.83	3
		36	39	20.88	20.83	20.85	3
		75	0	20.95	20.82	20.86	3

Band/BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100	MPR
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz	
2/ 20	QPSK	1	0	23.85	23.86	23.81	0
		1	50	24.21	24.12	24.15	0
		1	99	23.79	23.80	23.75	0
		50	0	23.06	22.98	22.96	1
		50	25	23.14	23.08	23.08	1
		50	50	22.97	22.92	22.94	1
		100	0	23.05	23.01	22.91	1
	16QAM	1	0	22.92	22.88	22.86	1
		1	50	23.52	23.46	23.46	1
		1	99	23.10	23.02	23.00	1
		50	0	22.19	22.14	22.16	2
		50	25	22.14	22.05	22.08	2
		50	50	21.97	21.98	21.93	2
		100	0	22.08	21.99	22.02	2
	64QAM	1	0	21.54	21.52	21.52	2
		1	50	21.98	21.94	21.87	2
		1	99	21.52	21.50	21.51	2
		50	0	21.04	20.98	20.95	3
		50	25	20.99	20.98	20.89	3
		50	50	20.92	20.88	20.87	3
		100	0	20.96	20.88	20.88	3



**BUREAU
VERITAS**

Test Report No.: W7L-220503W001RF05

EIRP POWER (dBm)

WCDMA

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
9262	1852.4	22.21	-0.7	21.51	141.58	2
9400	1880	22.26	-0.7	21.56	143.22	2
9538	1907.6	22.18	-0.7	21.48	140.60	2

LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	24.18	-0.7	23.48	222.84	2
18900	1880.0	24.06	-0.7	23.36	216.77	2
19193	1909.3	24.13	-0.7	23.43	220.29	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	23.5	-0.7	22.8	190.55	2
18900	1880.0	23.38	-0.7	22.68	185.35	2
19193	1909.3	23.44	-0.7	22.74	187.93	2

CHANNEL BANDWIDTH: 1.4MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	21.96	-0.7	21.26	133.66	2
18900	1880.0	21.96	-0.7	21.26	133.66	2
19193	1909.3	21.87	-0.7	21.17	130.92	2

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	24.19	-0.7	23.49	223.36	2
18900	1880.0	24.04	-0.7	23.34	215.77	2
19185	1908.5	24.13	-0.7	23.43	220.29	2

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	23.44	-0.7	22.74	187.93	2
18900	1880.0	23.44	-0.7	22.74	187.93	2
19185	1908.5	23.41	-0.7	22.71	186.64	2

CHANNEL BANDWIDTH: 3MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	21.9	-0.7	21.2	131.83	2
18900	1880.0	21.92	-0.7	21.22	132.43	2
19185	1908.5	21.81	-0.7	21.11	129.12	2



**BUREAU
VERITAS**

Test Report No.: W7L-220503W001RF05

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	24.14	-0.7	23.44	220.80	2
18900	1880.0	24.07	-0.7	23.37	217.27	2
19175	1907.5	24.13	-0.7	23.43	220.29	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	23.47	-0.7	22.77	189.23	2
18900	1880.0	23.41	-0.7	22.71	186.64	2
19175	1907.5	23.42	-0.7	22.72	187.07	2

CHANNEL BANDWIDTH: 5MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	21.93	-0.7	21.23	132.74	2
18900	1880.0	21.86	-0.7	21.16	130.62	2
19175	1907.5	21.81	-0.7	21.11	129.12	2

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	24.17	-0.7	23.47	222.33	2
18900	1880.0	24.09	-0.7	23.39	218.27	2
19150	1905.0	24.09	-0.7	23.39	218.27	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	23.48	-0.7	22.78	189.67	2
18900	1880.0	23.41	-0.7	22.71	186.64	2
19150	1905.0	23.44	-0.7	22.74	187.93	2

CHANNEL BANDWIDTH: 10MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	21.96	-0.7	21.26	133.66	2
18900	1880.0	21.87	-0.7	21.17	130.92	2
19150	1905.0	21.82	-0.7	21.12	129.42	2



BUREAU
VERITAS

Test Report No.: W7L-220503W001RF05

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	24.19	-0.7	23.49	223.36	2
18900	1880.0	24.04	-0.7	23.34	215.77	2
19125	1902.5	24.14	-0.7	23.44	220.8	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	23.49	-0.7	22.79	190.11	2
18900	1880.0	23.4	-0.7	22.7	186.21	2
19125	1902.5	23.44	-0.7	22.74	187.93	2

CHANNEL BANDWIDTH: 15MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	21.97	-0.7	21.27	133.97	2
18900	1880.0	21.92	-0.7	21.22	132.43	2
19125	1902.5	21.82	-0.7	21.12	129.42	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	24.21	-0.7	23.51	224.39	2
18900	1880	24.12	-0.7	23.42	219.79	2
19100	1900	24.15	-0.7	23.45	221.31	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	23.52	-0.7	22.82	191.43	2
18900	1880	23.46	-0.7	22.76	188.8	2
19100	1900	23.46	-0.7	22.76	188.8	2

CHANNEL BANDWIDTH: 20MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	21.98	-0.7	21.28	134.28	2
18900	1880	21.94	-0.7	21.24	133.05	2
19100	1900	21.87	-0.7	21.17	130.92	2



3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

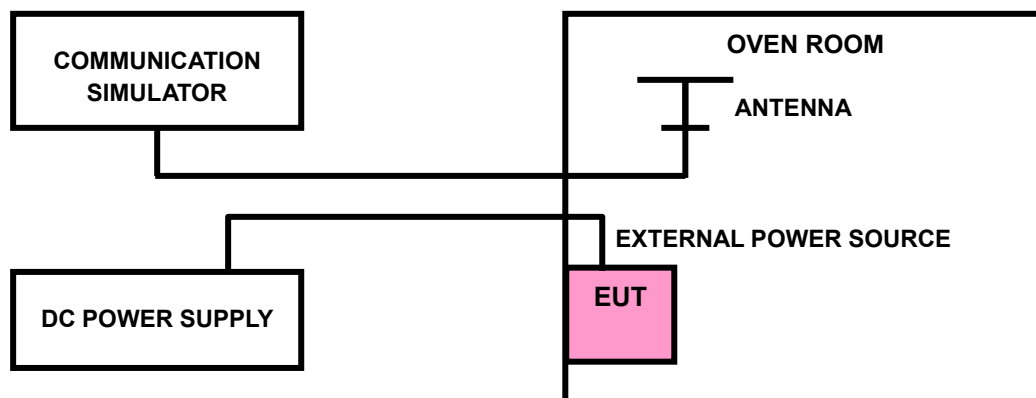



Test Report No.: W7L-220503W001RF05

3.2.4 TEST RESULTS

Please Refer to Appendix A Of this test report.




3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.2 TEST SETUP

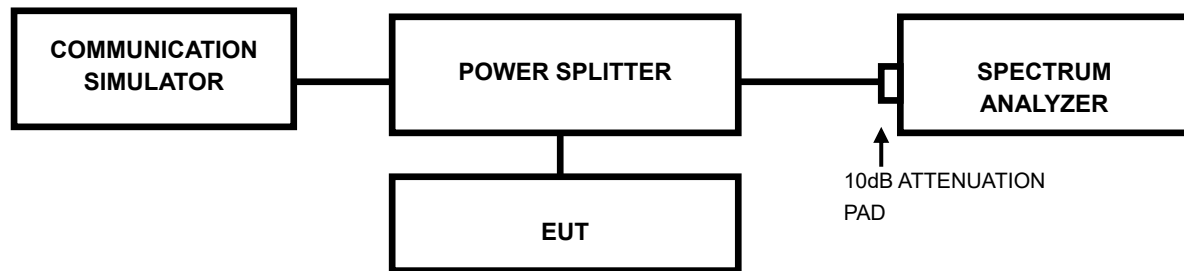



Test Report No.: W7L-220503W001RF05

3.3.3 TEST RESULTS

Please Refer to Appendix A Of this test report.




3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

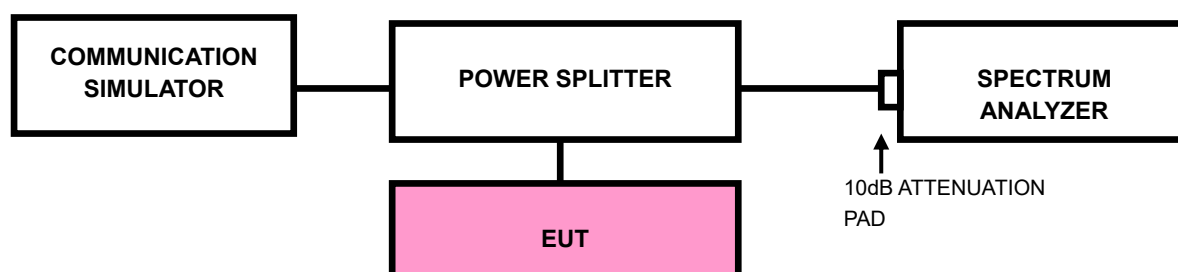

3.4.3 TEST PROCEDURES

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz.
- c. RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (GSM/GPRS/EDGE/LTE bandwidth for (1.4M/3M/5M/10M/15M/20M)1RB/0RB&1RB/MAXRB).
- d. The center frequency of spectrum is the band edge frequency and span is 10MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz (WCDMA).
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is $\geq 1\% \cdot \text{EBW}$ kHz and VBW of the spectrum is $3 \cdot \text{RBW}$ kHz. (LTE bandwidth 1.4M/3M/5M/10M/15M/20MHz).
- f. Record the max trace plot into the test report.

3.4.4. TEST RESULTS

Please Refer to Appendix A Of this test report.



3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

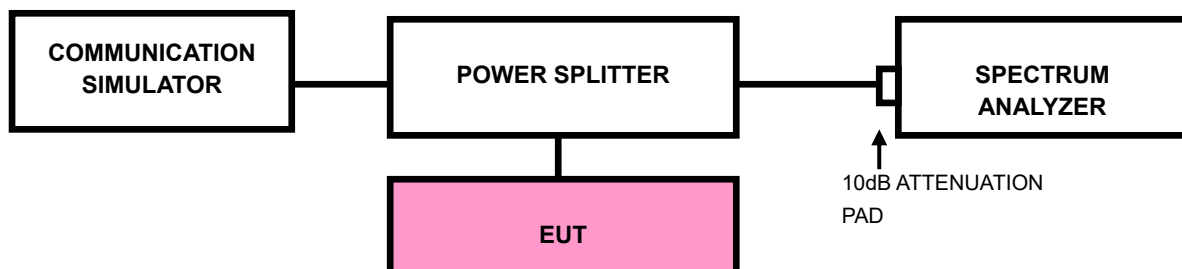



Test Report No.: W7L-220503W001RF05

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix A Of this test report.

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP


< Frequency Range below 30MHz >

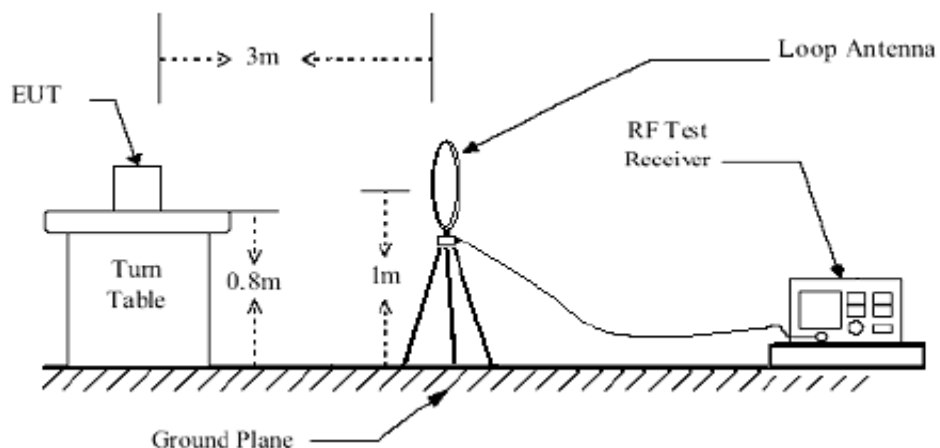

< Frequency Range 30MHz~1GHz >

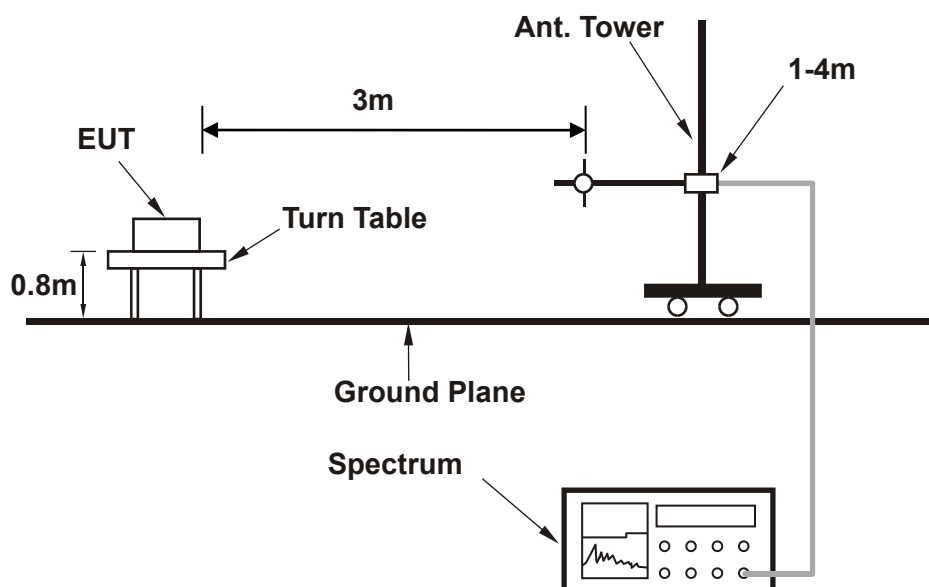

<Frequency Range above 1GHz>

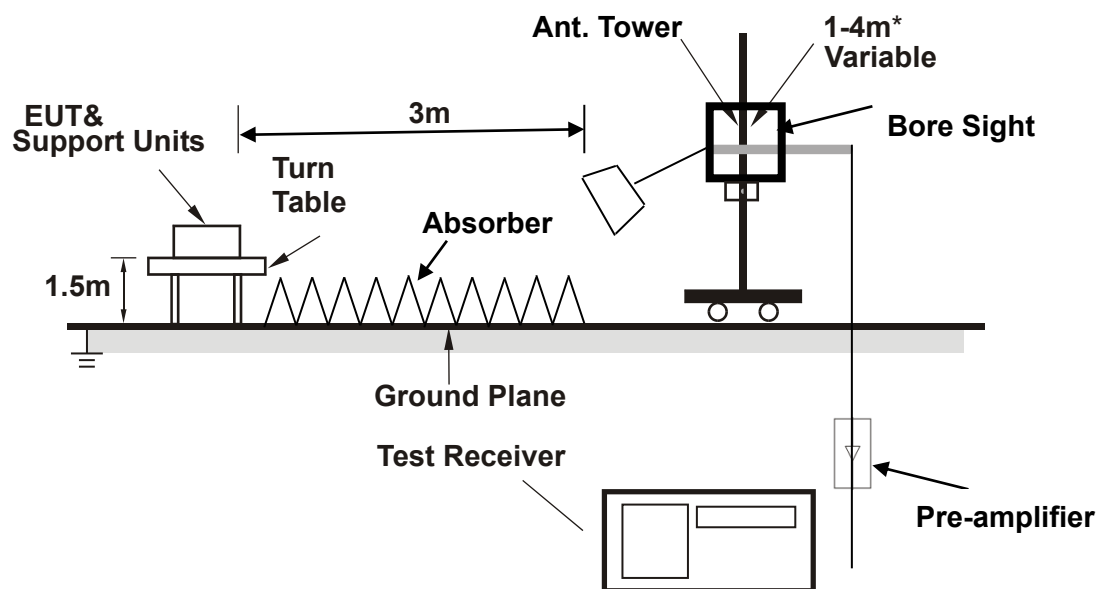

Note: Above 1G is a directional antenna Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 2

CHANNEL BANDWIDTH: 5MHz / QPSK


MODE	TX channel 18625	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	64.920	-33.54	-42.00	-13.00	-20.54	8.46	Peak	Horizontal
2 PP	161.920	-24.55	-35.50	-13.00	-11.55	10.95	Peak	Horizontal
3	237.580	-30.33	-43.28	-13.00	-17.33	12.95	Peak	Horizontal
4	351.070	-41.31	-56.43	-13.00	-28.31	15.12	Peak	Horizontal
5	422.850	-44.53	-61.16	-13.00	-31.53	16.63	Peak	Horizontal
6	542.160	-43.42	-62.19	-13.00	-30.42	18.77	Peak	Horizontal

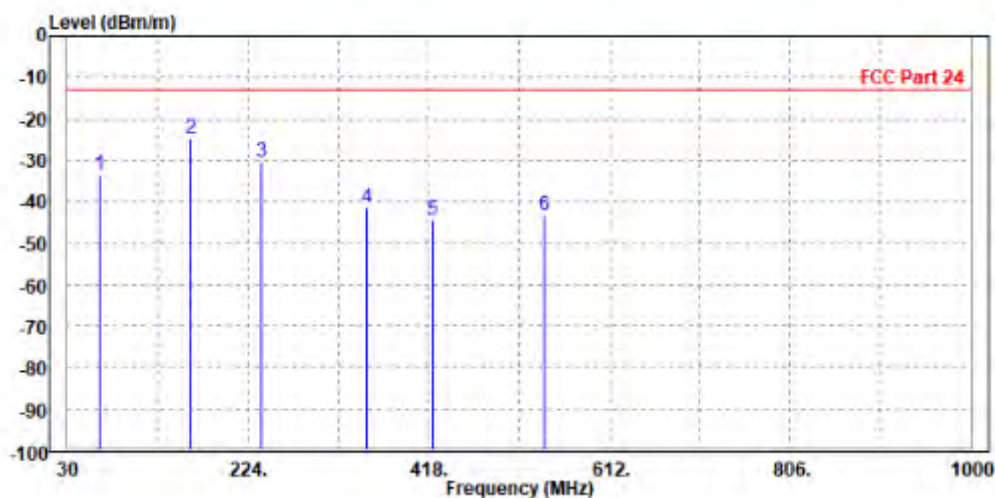

MODE	TX channel 18625	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	34.850	-30.29	-48.17	-13.00	-17.29	17.88	Peak	Vertical
2	70.740	-31.38	-39.44	-13.00	-18.38	8.06	Peak	Vertical
3 PP	165.800	-28.08	-39.07	-13.00	-15.08	10.99	Peak	Vertical
4	258.920	-38.60	-51.45	-13.00	-25.60	12.85	Peak	Vertical
5	406.360	-29.78	-46.16	-13.00	-16.78	16.38	Peak	Vertical
6	544.100	-43.05	-61.53	-13.00	-30.05	18.48	Peak	Vertical

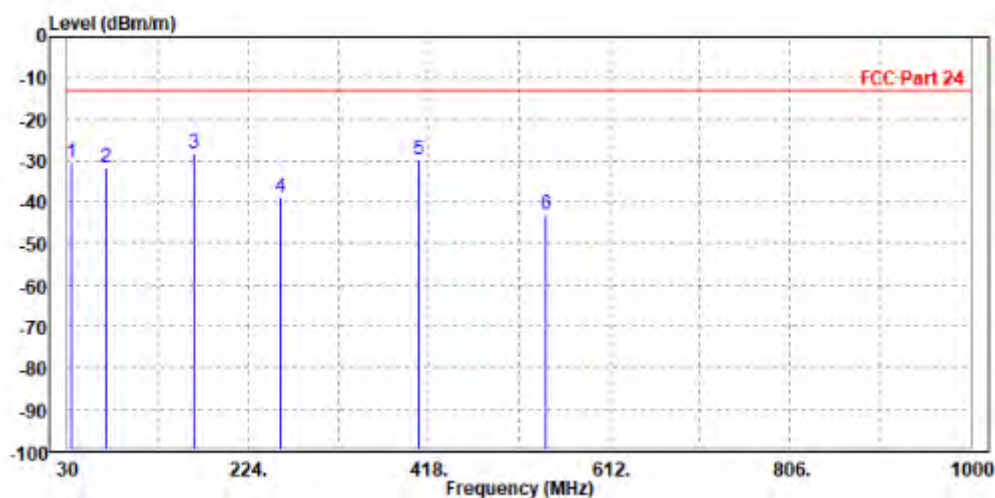



BUREAU
VERITAS

Test Report No.: W7L-220503W001RF05

ABOVE 1GHz DATA

Note: For higher frequency, the emission is too low to be detected.


WORST-CASE DATA

WCDMA Band II

CH 9262


MODE	TX channel 9262	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3698.000	-49.14	-57.92	-13.00	-36.14	8.78	Peak	Horizontal
2 PP	5557.200	-48.82	-59.03	-13.00	-35.82	10.21	Peak	Horizontal

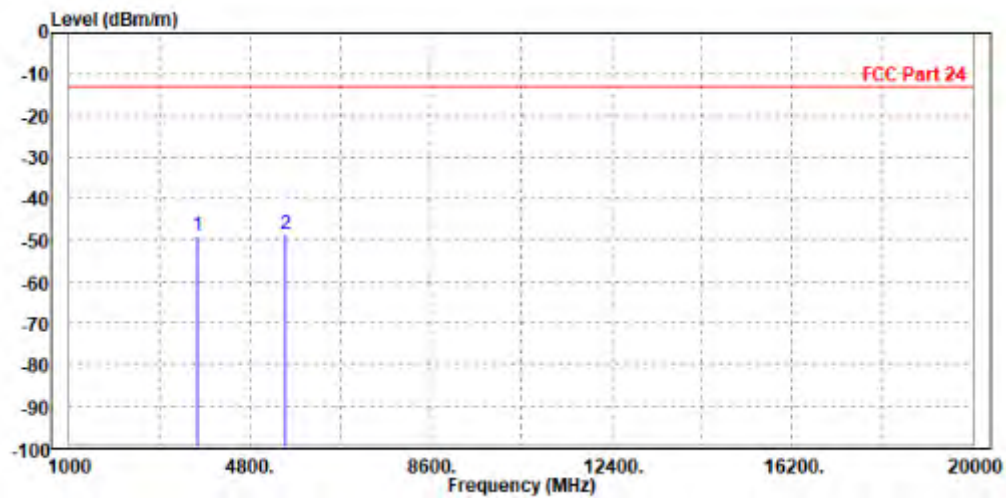

MODE	TX channel 9262	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3704.800	-48.24	-57.49	-13.00	-35.24	9.25	Peak	Vertical
2	5560.000	-49.94	-59.88	-13.00	-36.94	9.94	Peak	Vertical

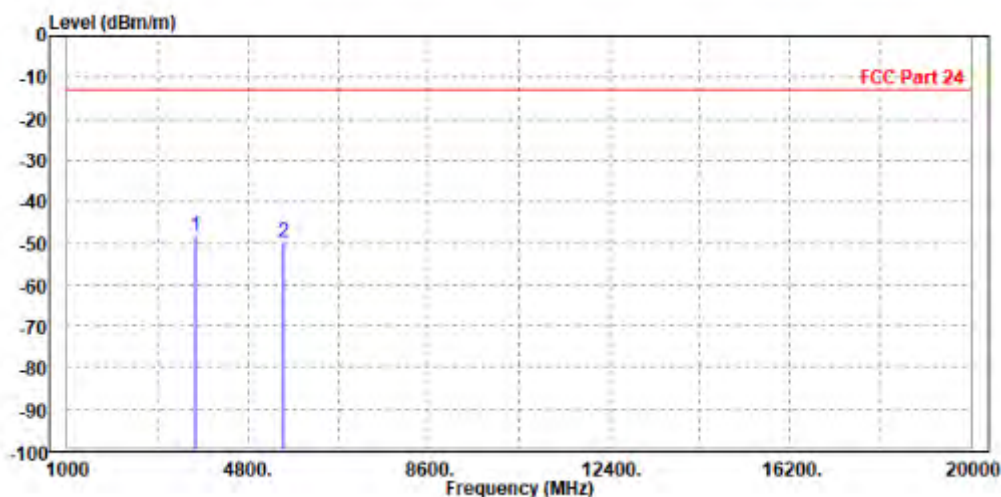

CH 9400


MODE	TX channel 9400	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-48.84	-57.69	-13.00	-35.84	8.85	Peak	Horizontal
2 PP	5636.000	-47.17	-57.64	-13.00	-34.17	10.47	Peak	Horizontal

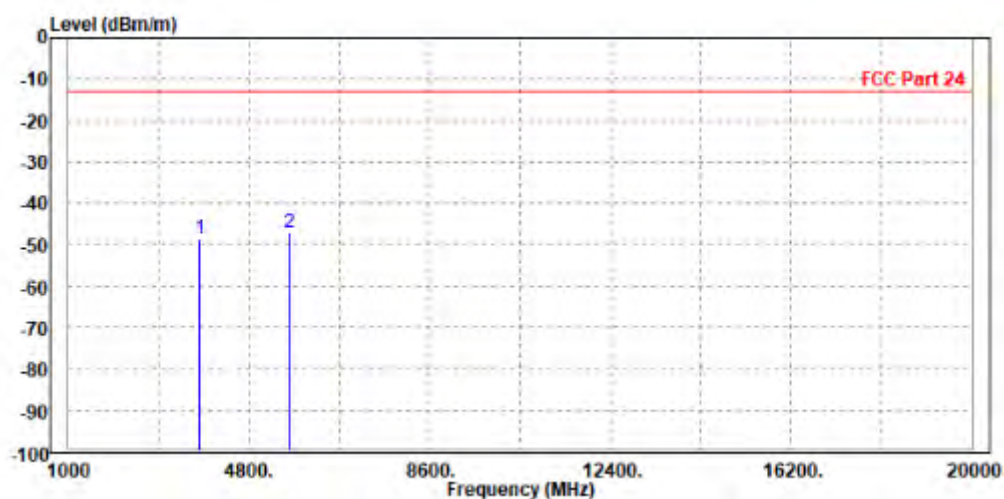

MODE	TX channel 9400	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3760.000	-48.74	-58.01	-13.00	-35.74	9.27	Peak	Vertical
2	5640.000	-48.92	-59.17	-13.00	-35.92	10.25	Peak	Vertical

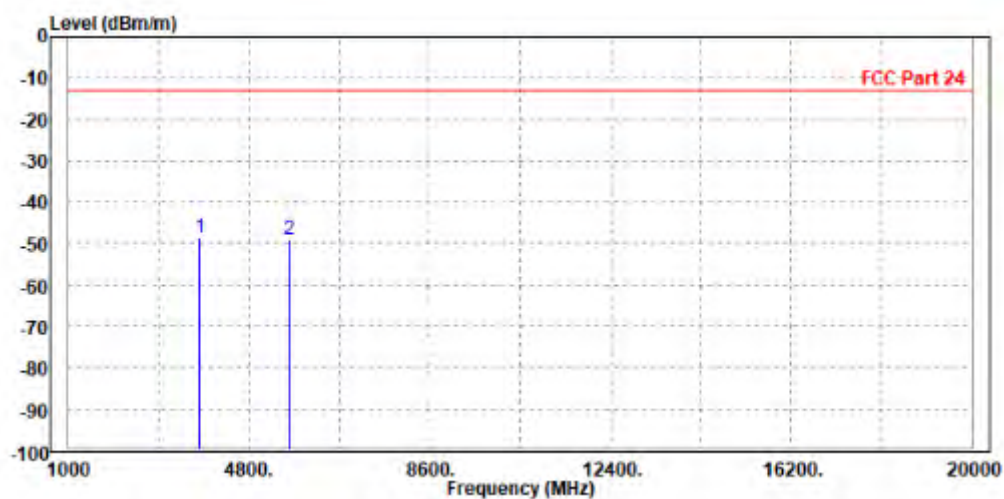

CH 9538


MODE	TX channel 9538	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3815.200	-49.22	-58.13	-13.00	-36.22	8.91	Peak	Horizontal
2 PP	5731.000	-37.79	-48.57	-13.00	-24.79	10.78	Peak	Horizontal

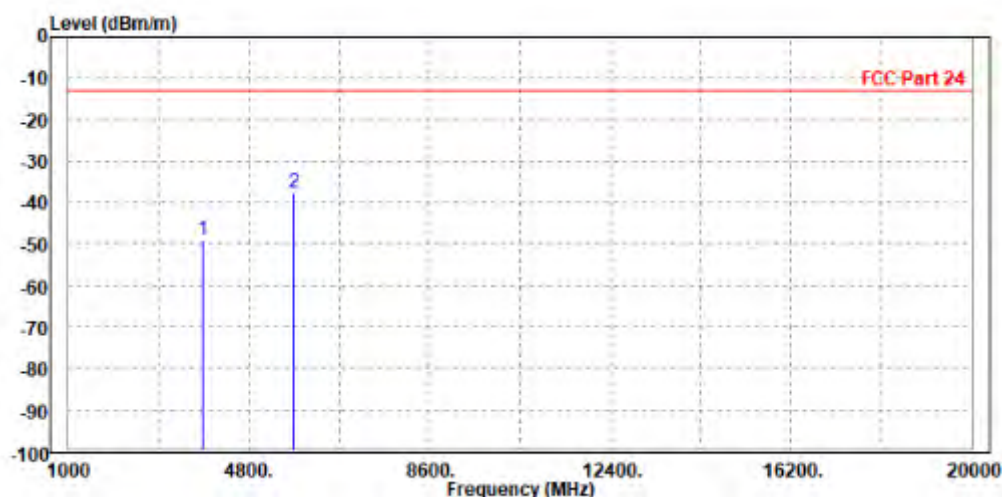

MODE	TX channel 9538	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3812.000	-48.81	-58.10	-13.00	-35.81	9.29	Peak	Vertical
2 PP	5722.800	-41.67	-52.24	-13.00	-28.67	10.57	Peak	Vertical

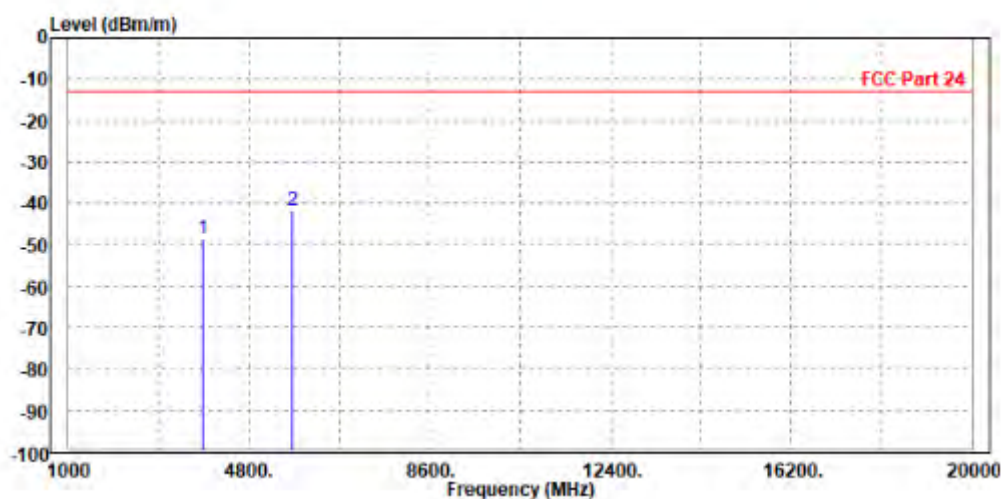


LTE Band 2

CHANNEL BANDWIDTH: 1.4MHz / QPSK


MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3755.000	-48.64	-57.49	-13.00	-35.64	8.85	Peak	Horizontal
2	5640.000	-49.45	-59.93	-13.00	-36.45	10.48	Peak	Horizontal

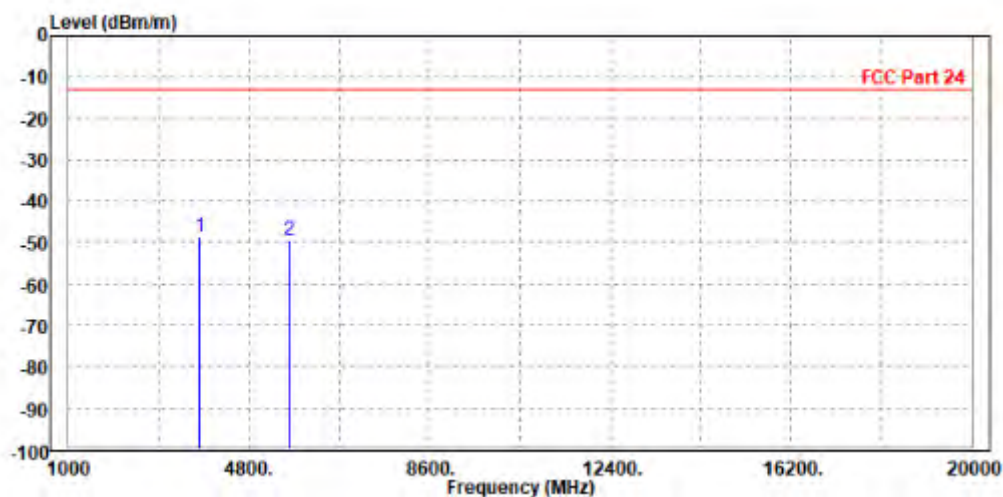

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-48.47	-57.74	-13.00	-35.47	9.27	Peak	Vertical
2	5640.000	-49.50	-59.75	-13.00	-36.50	10.25	Peak	Vertical

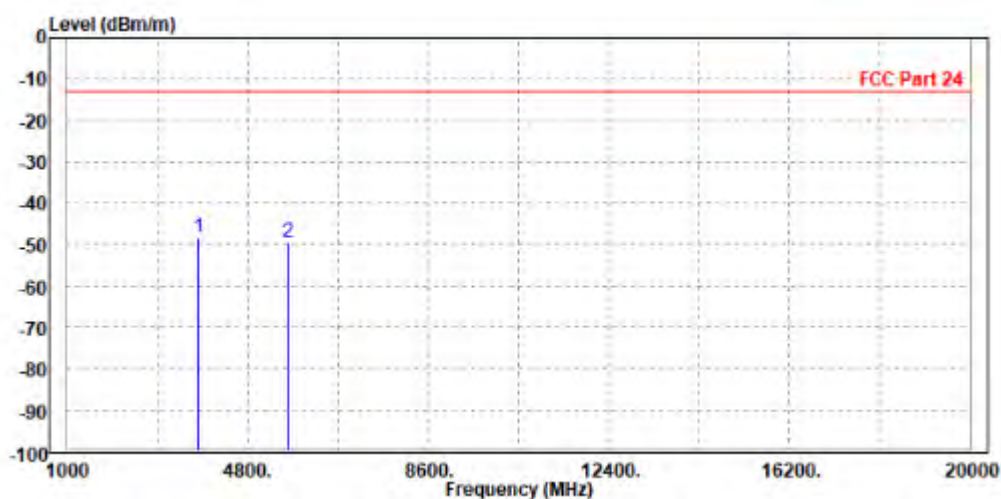




BUREAU
VERITAS

Test Report No.: W7L-220503W001RF05

CHANNEL BANDWIDTH: 3MHz / QPSK


MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3755.000	-44.34	-53.19	-13.00	-31.34	8.85	Peak	Horizontal
2		5640.000	-49.52	-60.00	-13.00	-36.52	10.48	Peak	Horizontal

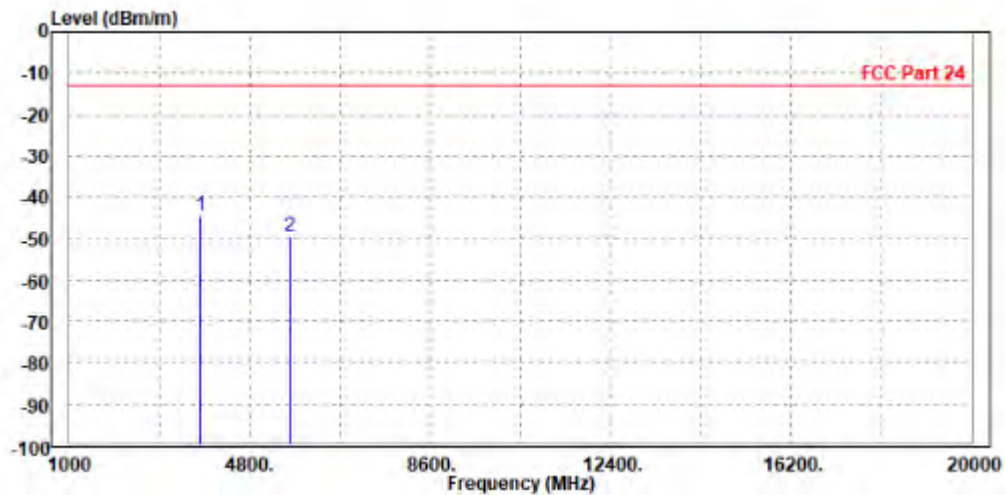

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3755.000	-48.97	-58.24	-13.00	-35.97	9.27	Peak	Vertical
2	5640.000	-49.28	-59.53	-13.00	-36.28	10.25	Peak	Vertical

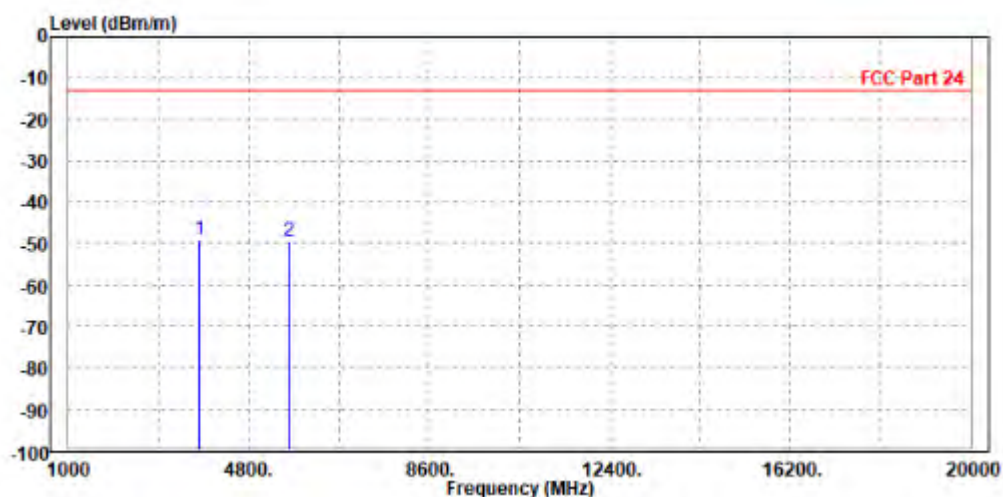



**BUREAU
VERITAS**


Test Report No.: W7L-220503W001RF05

CHANNEL BANDWIDTH: 5MHz / QPSK

CH18625


MODE	TX channel 18625	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3698.000	-49.37	-58.15	-13.00	-36.37	8.78	Peak	Horizontal
2		5557.500	-49.91	-60.12	-13.00	-36.91	10.21	Peak	Horizontal

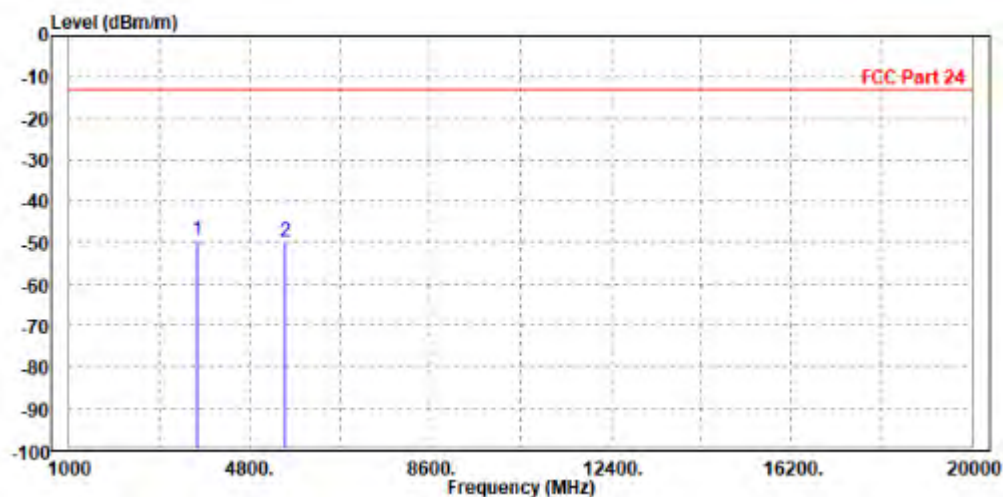

MODE	TX channel 18625	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3698.000	-48.86	-58.11	-13.00	-35.86	9.25	Peak	Vertical
2	5557.500	-50.73	-60.66	-13.00	-37.73	9.93	Peak	Vertical

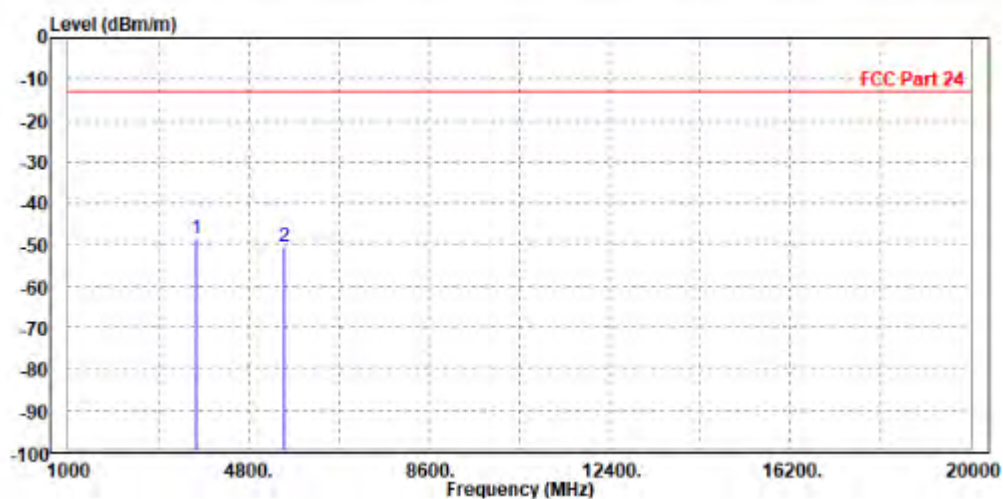




BUREAU
VERITAS

Test Report No.: W7L-220503W001RF05

CH18900


MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3755.000	-43.39	-52.24	-13.00	-30.39	8.85	Peak	Horizontal
2		5640.000	-49.60	-60.08	-13.00	-36.60	10.48	Peak	Horizontal

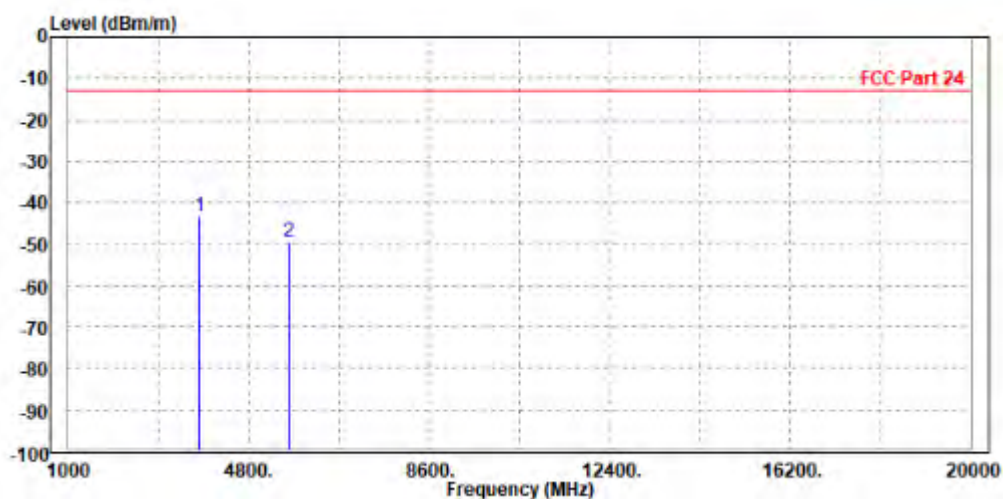

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-48.26	-57.53	-13.00	-35.26	9.27	Peak	Vertical
2	5640.000	-49.15	-59.40	-13.00	-36.15	10.25	Peak	Vertical

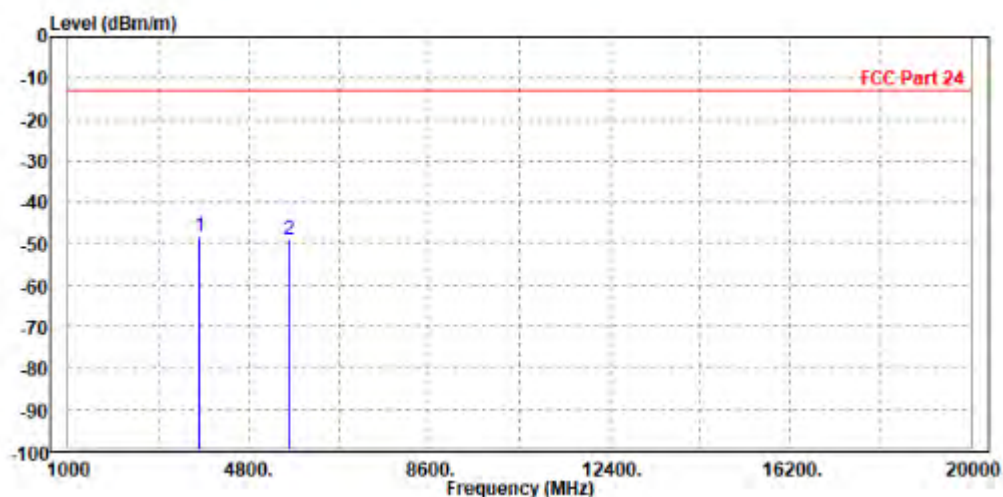




**BUREAU
VERITAS**

Test Report No.: W7L-220503W001RF05

CH19175


MODE	TX channel 19175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3815.000	-48.26	-57.17	-13.00	-35.26	8.91	Peak	Horizontal
2 PP	5722.500	-46.42	-57.18	-13.00	-33.42	10.76	Peak	Horizontal

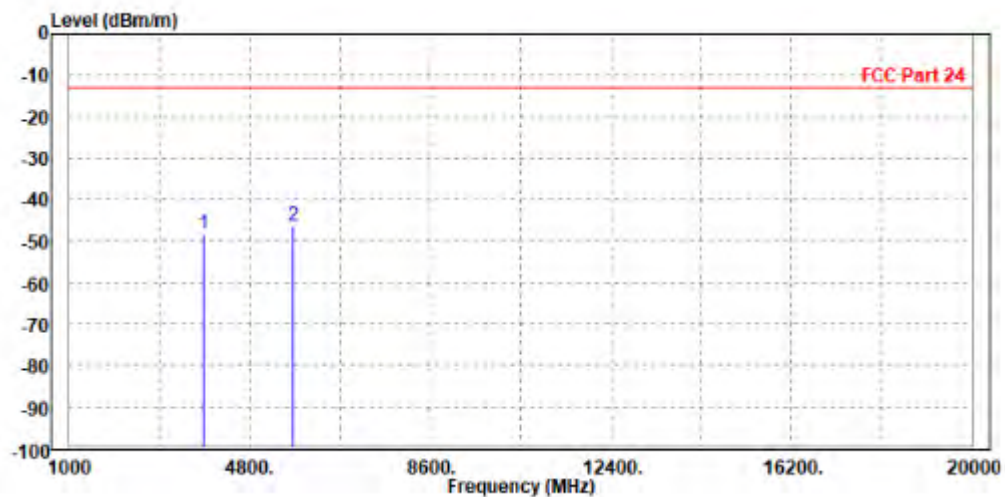

MODE	TX channel 19175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3815.000	-48.13	-57.42	-13.00	-35.13	9.29	Peak	Vertical
2 PP	5722.500	-43.68	-54.25	-13.00	-30.68	10.57	Peak	Vertical

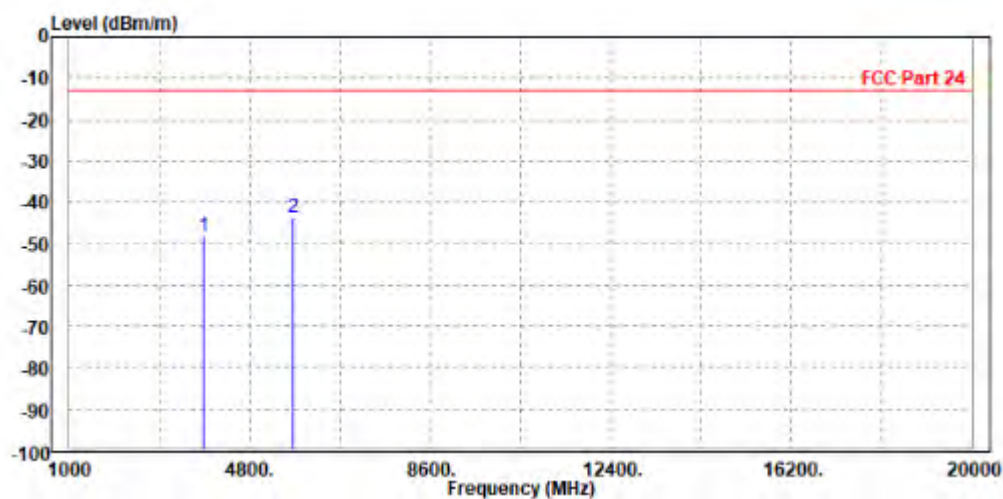




BUREAU
VERITAS

Test Report No.: W7L-220503W001RF05

CHANNEL BANDWIDTH: 10MHz / QPSK


MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3755.000	-48.47	-57.32	-13.00	-35.47	8.85	Peak	Horizontal
2		5640.000	-48.81	-59.29	-13.00	-35.81	10.48	Peak	Horizontal

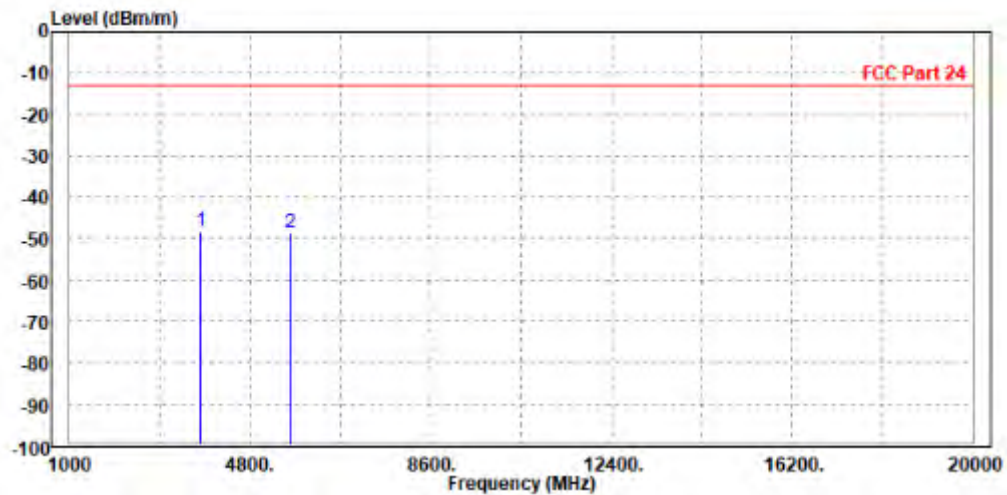

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-48.12	-57.39	-13.00	-35.12	9.27	Peak	Vertical
2	5640.000	-49.07	-59.32	-13.00	-36.07	10.25	Peak	Vertical

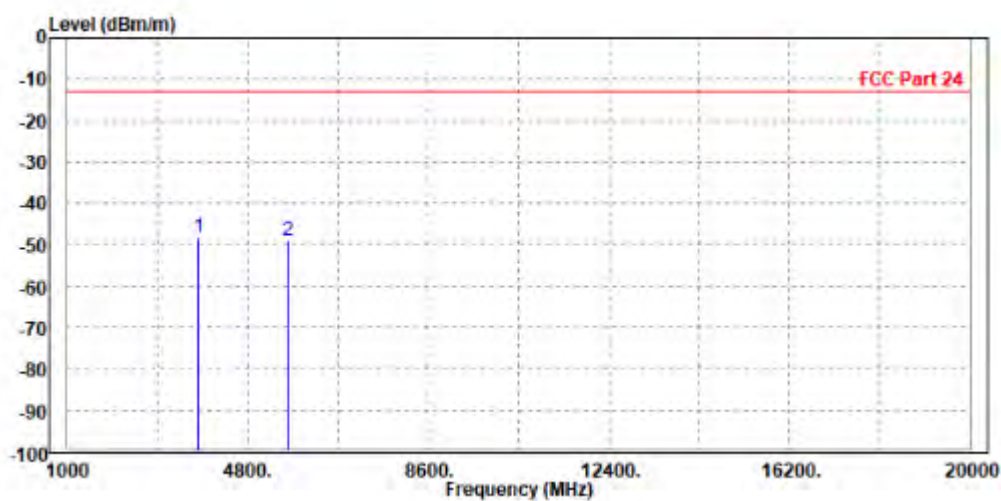




BUREAU
VERITAS

Test Report No.: W7L-220503W001RF05

CHANNEL BANDWIDTH: 15MHz / QPSK


MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-48.18	-57.03	-13.00	-35.18	8.85	Peak	Horizontal
2	5640.000	-49.54	-60.02	-13.00	-36.54	10.48	Peak	Horizontal

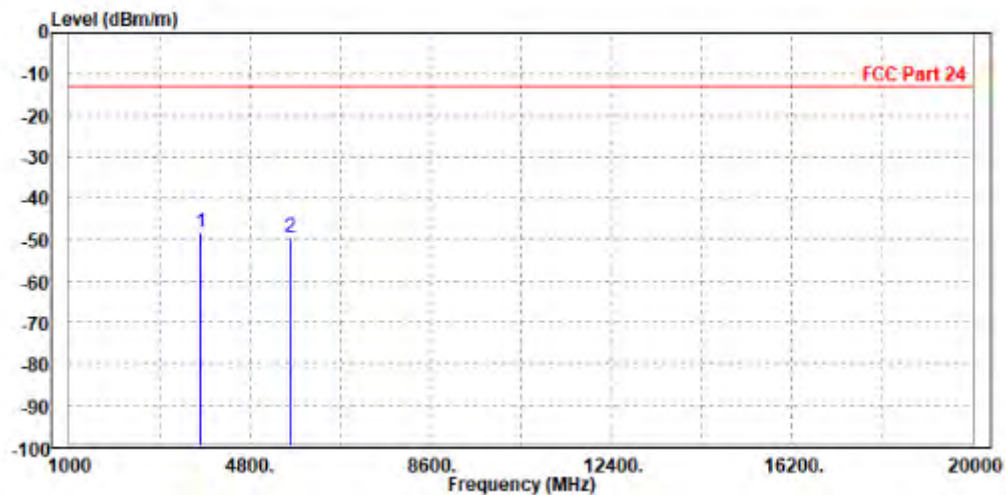

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3755.000	-49.32	-58.59	-13.00	-36.32	9.27	Peak	Vertical
2		5640.000	-49.33	-59.58	-13.00	-36.33	10.25	Peak	Vertical

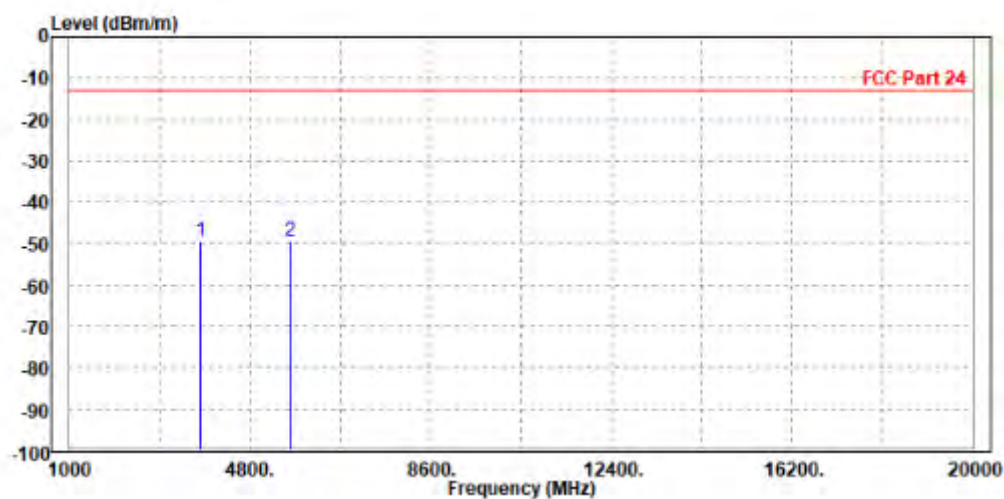

CHANNEL BANDWIDTH: 20MHz / QPSK


MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3755.000	-49.01	-57.86	-13.00	-36.01	8.85	Peak	Horizontal
2	5640.000	-49.31	-59.79	-13.00	-36.31	10.48	Peak	Horizontal

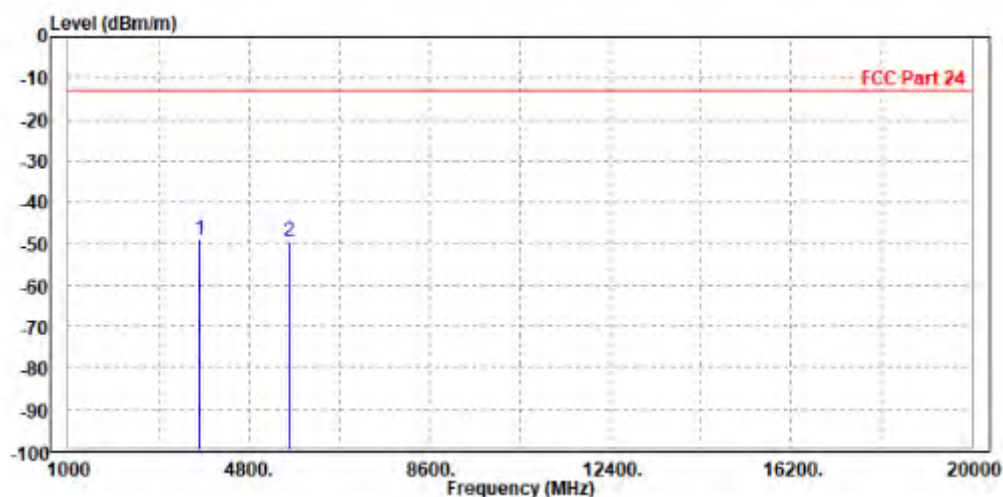

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.40	-58.67	-13.00	-36.40	9.27	Peak	Vertical
2 PP	5640.000	-48.92	-59.17	-13.00	-35.92	10.25	Peak	Vertical

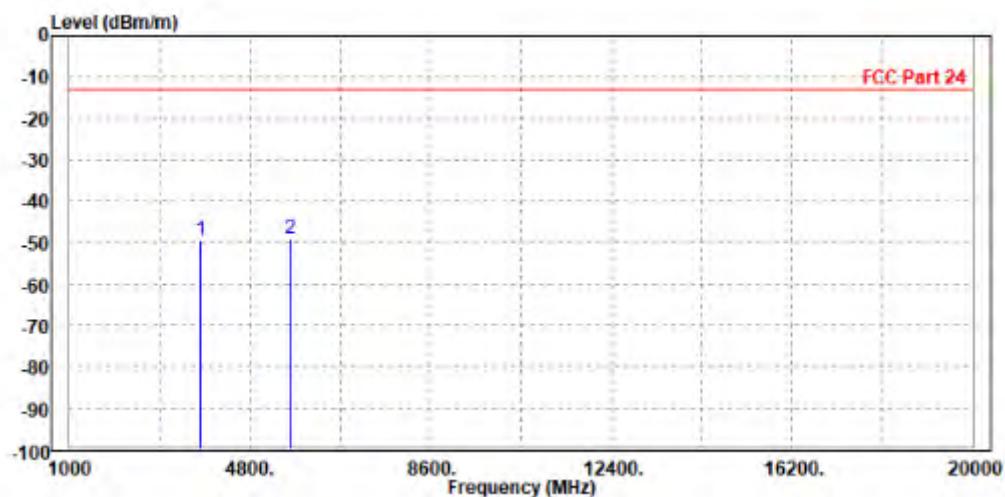


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

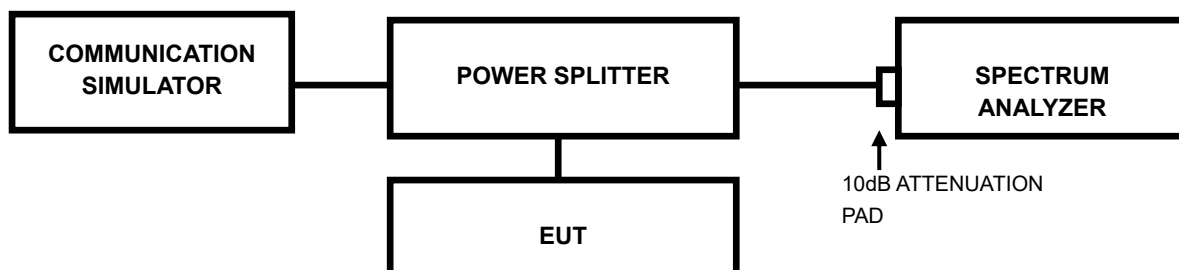

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



Test Report No.: W7L-220503W001RF05

3.7.4 TEST RESULTS

Please Refer to Appendix A Of this test report.



BUREAU
VERITAS

Test Report No.: W7L-220503W001RF05

4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.sw@bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



Test Report No.: W7L-220503W001RF05

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

6 Appendix A

WCDMA BAND 2


PEAK-TO-AVERAGE RATIO

Test Result


Band	Channel	Peak-to-Average Ratio(dB)	Limit(dBm)	Verdict
Band2	9262	2.98	13	PASS
Band2	9400	3.00	13	PASS
Band2	9538	2.99	13	PASS

Test Graphs

Band2-9262

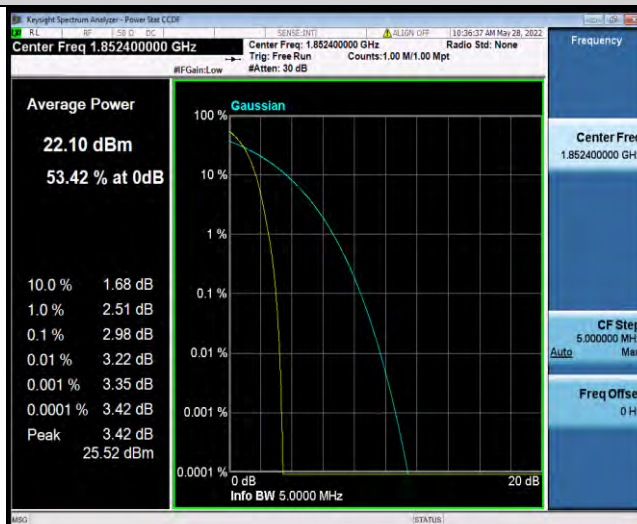

Band2-9400

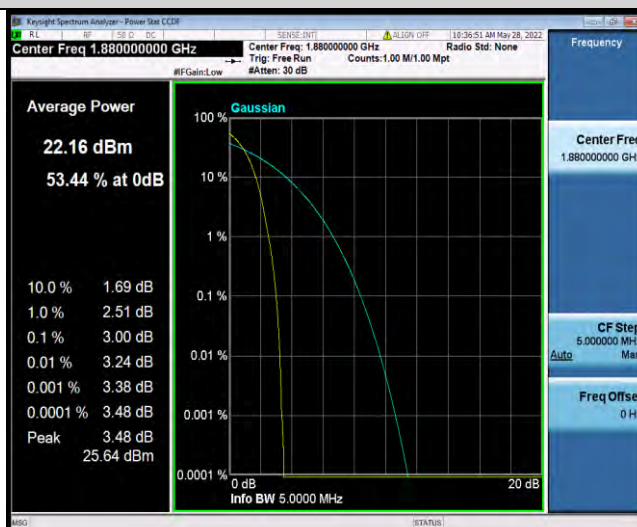

Band2-9538



**BUREAU
VERITAS**

Test Report No.: W7L-220503W001RF05




26DB BANDWIDTH AND OCCUPIED BANDWIDTH

Test Result

Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit(MHz)	Verdict
Band2	9262	4.1871	4.731	---	PASS
Band2	9400	4.1925	4.732	---	PASS
Band2	9538	4.1836	4.727	---	PASS

Test Graphs

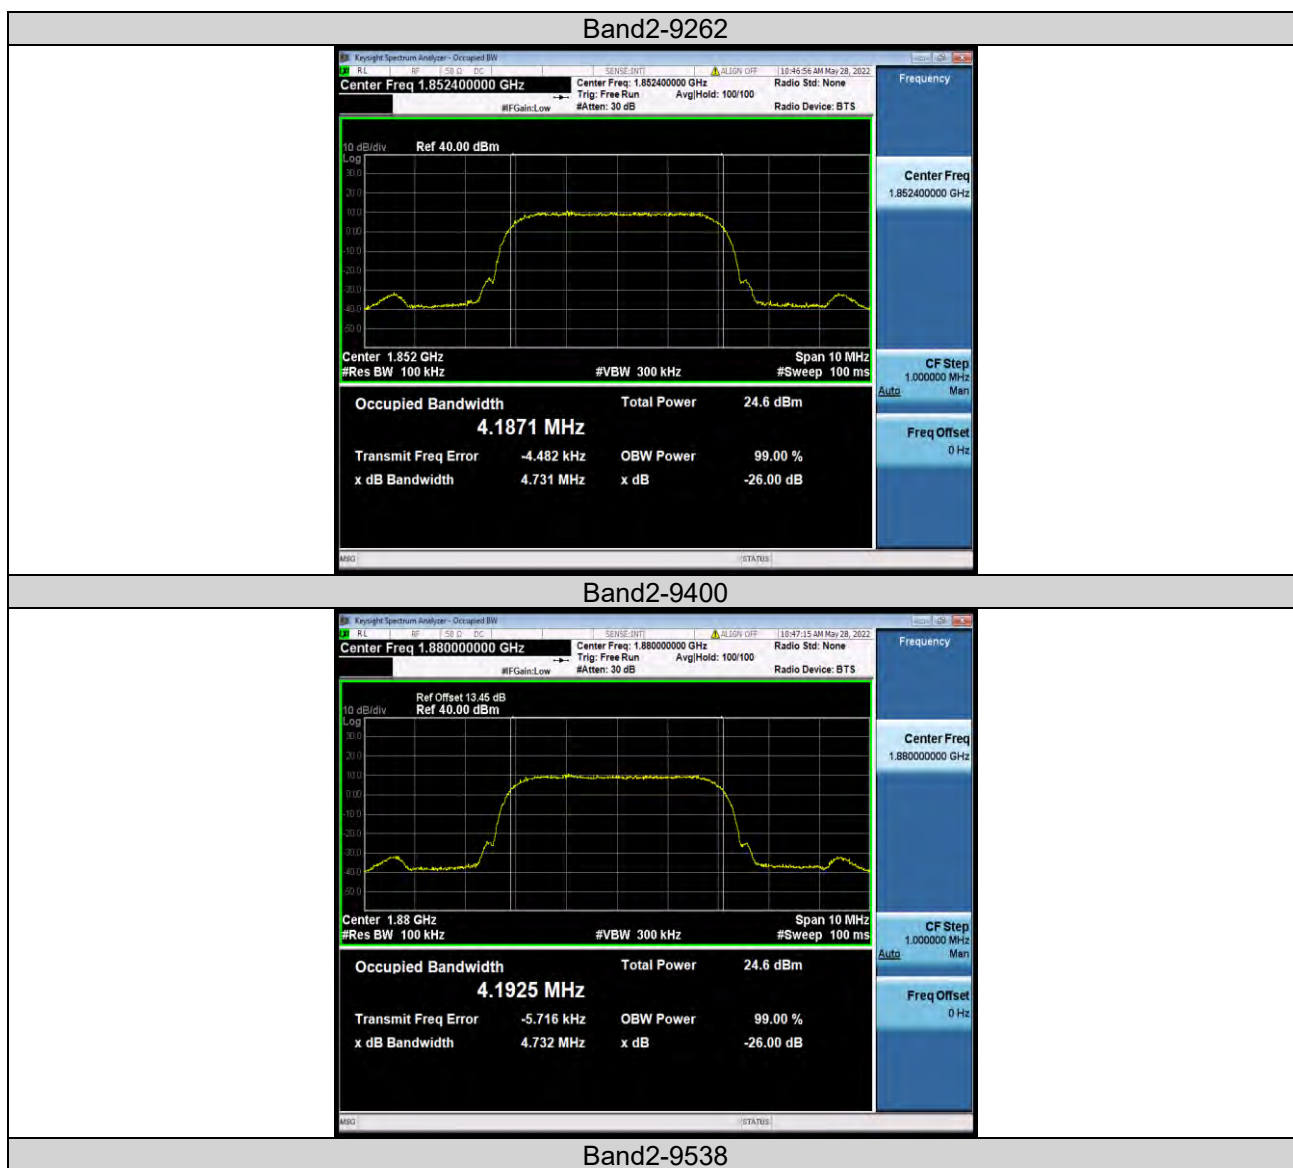



BUREAU
VERITAS

Test Report No.: W7L-220503W001RF05



BAND EDGE

Test Result

Band	Channel	Frequency (MHz)	Result (dBm)	Limit(dBm)	Verdict
Band2	9262	1849.87	-29.45	-13	PASS
Band2	9538	1910.12	-30.64	-13	PASS

Test Graphs




CONDUCTED SPURIOUS EMISSION

Test Result

Band	Channel	Frequency Range (Mhz)	Frequency (dBm)	Result (dBm)	Limit (dBm)	Verdict
Band2	9262	30~1000MHz	327.69	-41.31	-13	PASS
Band2	9262	1000~20000MHz	19062.67	-32.56	-13	PASS
Band2	9400	30~1000MHz	922.85	-39.81	-13	PASS
Band2	9400	1000~20000MHz	19024.03	-32.81	-13	PASS
Band2	9538	30~1000MHz	929.03	-41.31	-13	PASS
Band2	9538	1000~20000MHz	13627.4	-32.44	-13	PASS


Test Graphs

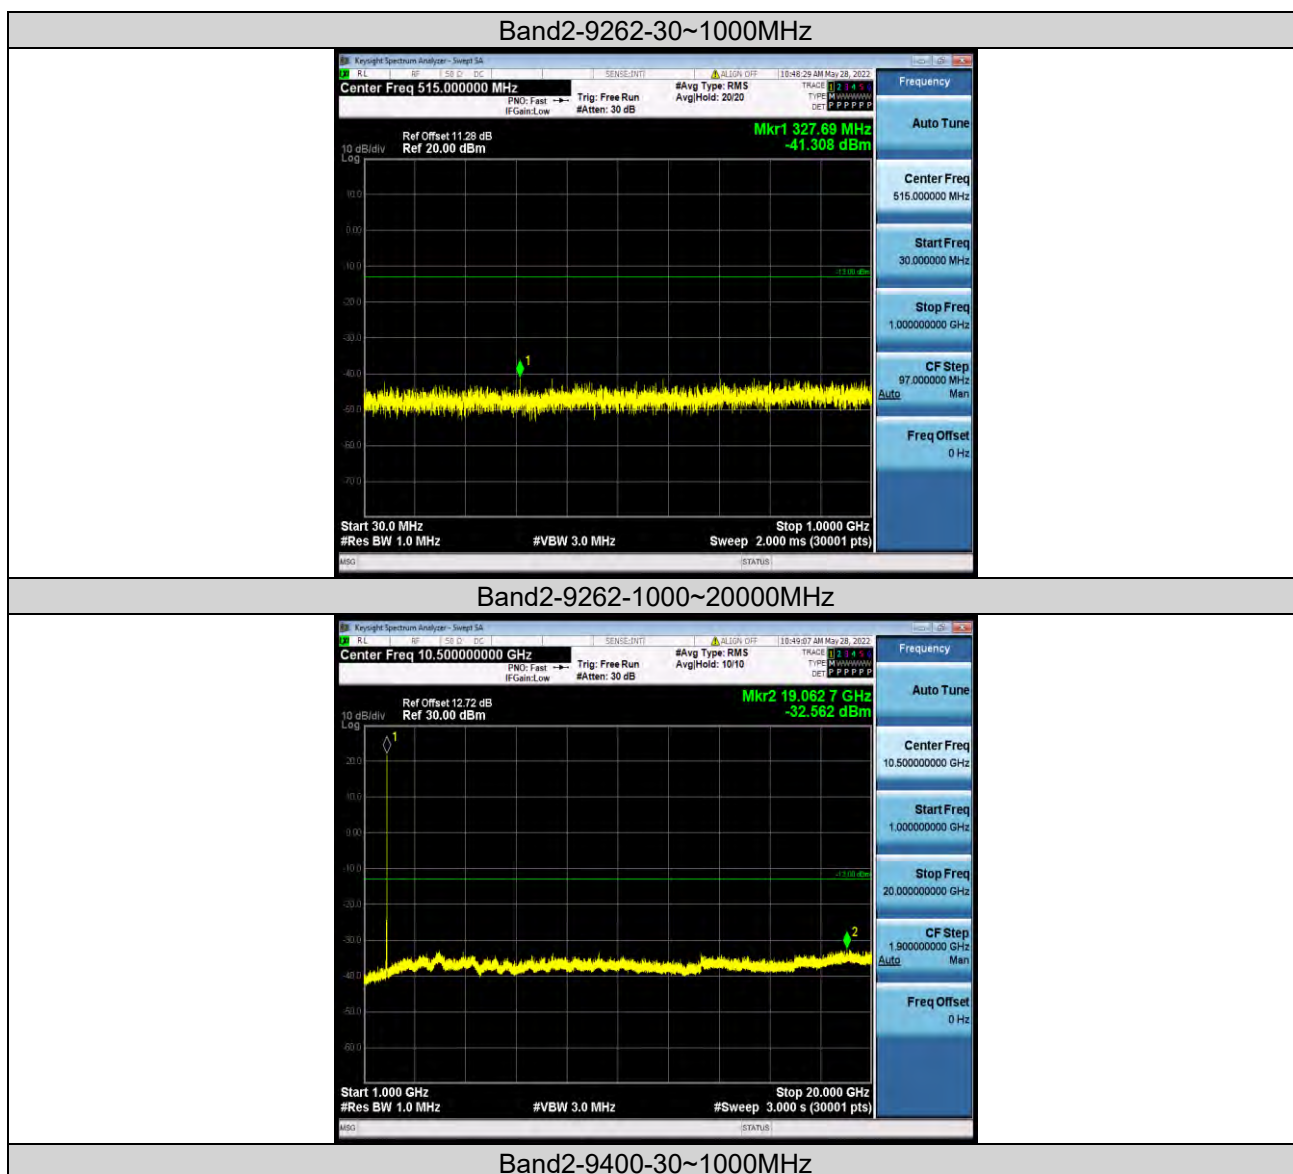



BUREAU
VERITAS


Test Report No.: W7L-220503W001RF05

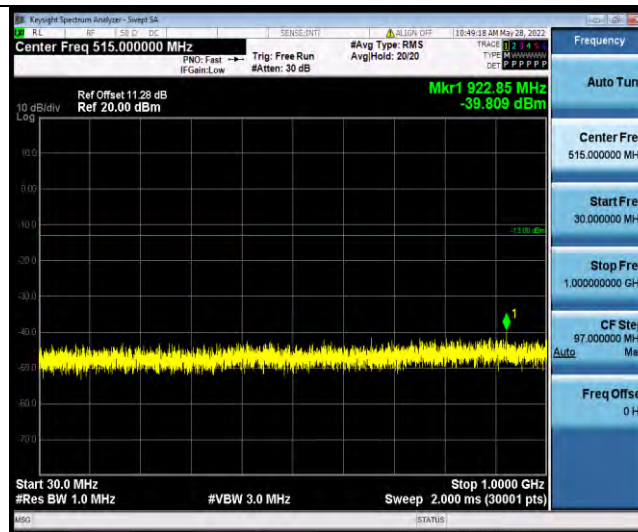

Band2-9400-1000~20000MHz



Band2-9538-30~1000MHz

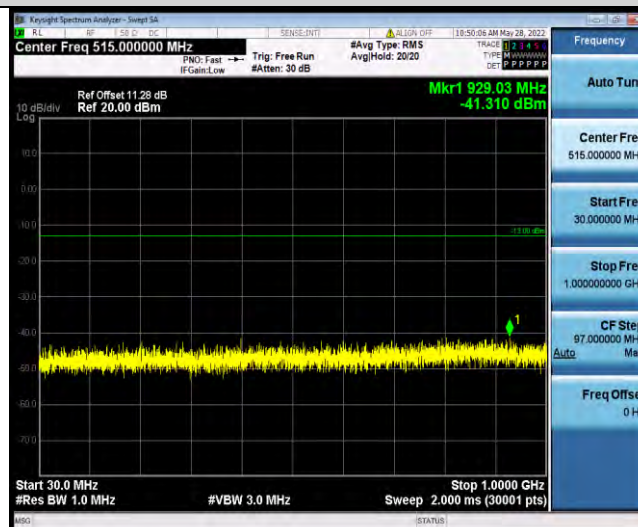

Band2-9538-1000~20000MHz



**BUREAU
VERITAS**

Test Report No.: W7L-220503W001RF05



FREQUENCY STABILITY

Test Result

Voltage							
Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band2	9262	VL	NT	-13.38	-0.007223	±2.5	PASS
Band2	9262	VN	NT	-11.47	-0.006192	±2.5	PASS
Band2	9262	VH	NT	-13.54	-0.007309	±2.5	PASS
Band2	9400	VL	NT	-12.65	-0.006729	±2.5	PASS
Band2	9400	VN	NT	-14.41	-0.007665	±2.5	PASS
Band2	9400	VH	NT	-10.86	-0.005777	±2.5	PASS
Band2	9538	VL	NT	-12.37	-0.006485	±2.5	PASS
Band2	9538	VN	NT	-15.36	-0.008052	±2.5	PASS
Band2	9538	VH	NT	-11.94	-0.006259	±2.5	PASS

Temperature							
Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band2	9262	NV	-30	-13.04	-0.007040	±2.5	PASS
Band2	9262	NV	-20	-12.10	-0.006532	±2.5	PASS
Band2	9262	NV	0	-11.21	-0.006052	±2.5	PASS
Band2	9262	NV	10	-11.09	-0.005987	±2.5	PASS
Band2	9262	NV	20	-11.19	-0.006041	±2.5	PASS
Band2	9262	NV	30	-10.84	-0.005852	±2.5	PASS
Band2	9262	NV	40	-12.33	-0.006656	±2.5	PASS
Band2	9262	NV	50	-12.86	-0.006942	±2.5	PASS
Band2	9400	NV	-30	-11.18	-0.005947	±2.5	PASS



BUREAU
VERITAS

Test Report No.: W7L-220503W001RF05

Band2	9400	NV	-20	-13.10	-0.006968	±2.5	PASS
Band2	9400	NV	0	-12.65	-0.006729	±2.5	PASS
Band2	9400	NV	10	-10.76	-0.005723	±2.5	PASS
Band2	9400	NV	20	-12.93	-0.006878	±2.5	PASS
Band2	9400	NV	30	-10.91	-0.005803	±2.5	PASS
Band2	9400	NV	40	-12.81	-0.006814	±2.5	PASS
Band2	9400	NV	50	-10.29	-0.005473	±2.5	PASS
Band2	9538	NV	-30	-11.11	-0.005824	±2.5	PASS
Band2	9538	NV	-20	-13.61	-0.007135	±2.5	PASS
Band2	9538	NV	0	-11.12	-0.005829	±2.5	PASS
Band2	9538	NV	10	-13.06	-0.006846	±2.5	PASS
Band2	9538	NV	20	-9.90	-0.005190	±2.5	PASS
Band2	9538	NV	30	-11.67	-0.006118	±2.5	PASS
Band2	9538	NV	40	-12.76	-0.006689	±2.5	PASS
Band2	9538	NV	50	-7.57	-0.003968	±2.5	PASS

LTE BAND 2

Frequency Stability

B2_1.4MHz

Test Result

Band: 2 / Bandwidth: 1.4MHz									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
		Size	Offset				Result	Limit	
QPSK	1850.7	6	0	20	3.27	-10.70	-0.01	-2.5 to 2.5	Pass
					3.85	-22.50	-0.01	-2.5 to 2.5	Pass
					4.43	-9.74	-0.01	-2.5 to 2.5	Pass
				-10	3.85	-6.91	-0.00	-2.5 to 2.5	Pass
				0	3.85	-6.74	-0.00	-2.5 to 2.5	Pass
				10	3.85	-12.40	-0.01	-2.5 to 2.5	Pass
				30	3.85	-7.07	-0.00	-2.5 to 2.5	Pass
				40	3.85	-7.04	-0.00	-2.5 to 2.5	Pass
				50	3.85	-10.87	-0.01	-2.5 to 2.5	Pass
	1880	6	0	20	3.27	3.10	0.00	-2.5 to 2.5	Pass
					3.85	-14.92	-0.01	-2.5 to 2.5	Pass
					4.43	-16.62	-0.01	-2.5 to 2.5	Pass
				-10	3.85	-1.92	-0.00	-2.5 to 2.5	Pass
				0	3.85	-6.34	-0.00	-2.5 to 2.5	Pass
				10	3.85	-12.14	-0.01	-2.5 to 2.5	Pass
				30	3.85	-13.19	-0.01	-2.5 to 2.5	Pass
				40	3.85	-5.99	-0.00	-2.5 to 2.5	Pass
				50	3.85	-7.60	-0.00	-2.5 to 2.5	Pass
	1909.3	6	0	20	3.27	-5.98	-0.00	-2.5 to 2.5	Pass
					3.85	-23.40	-0.01	-2.5 to 2.5	Pass
					4.43	-17.39	-0.01	-2.5 to 2.5	Pass
				-10	3.85	-5.57	-0.00	-2.5 to 2.5	Pass
				0	3.85	-2.83	-0.00	-2.5 to 2.5	Pass
				10	3.85	1.99	0.00	-2.5 to 2.5	Pass
				30	3.85	-2.85	-0.00	-2.5 to 2.5	Pass
				40	3.85	-1.54	-0.00	-2.5 to 2.5	Pass
				50	3.85	-11.39	-0.01	-2.5 to 2.5	Pass
16QAM	1850.7	6	0	20	3.27	-11.70	-0.01	-2.5 to 2.5	Pass
					3.85	-4.48	-0.00	-2.5 to 2.5	Pass
					4.43	-3.00	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-3.40	-0.00	-2.5 to 2.5	Pass
				0	3.85	-6.95	-0.00	-2.5 to 2.5	Pass
				10	3.85	-9.61	-0.01	-2.5 to 2.5	Pass
				30	3.85	-8.25	-0.00	-2.5 to 2.5	Pass
				40	3.85	-3.52	-0.00	-2.5 to 2.5	Pass
				50	3.85	-5.61	-0.00	-2.5 to 2.5	Pass
	1880	6	0	20	3.27	-10.13	-0.01	-2.5 to 2.5	Pass
					3.85	-1.12	-0.00	-2.5 to 2.5	Pass



BUREAU
VERITAS

Test Report No.: W7L-220503W001RF05

64QAM	1909.3	6	0		4.43	-3.96	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-9.31	-0.01	-2.5 to 2.5	Pass
				0	3.85	-3.98	-0.00	-2.5 to 2.5	Pass
				10	3.85	-1.96	-0.00	-2.5 to 2.5	Pass
				30	3.85	-5.94	-0.00	-2.5 to 2.5	Pass
				40	3.85	-7.91	-0.00	-2.5 to 2.5	Pass
				50	3.85	-7.01	-0.00	-2.5 to 2.5	Pass
				20	3.27	-0.32	-0.00	-2.5 to 2.5	Pass
					3.85	-2.06	-0.00	-2.5 to 2.5	Pass
					4.43	-4.38	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-8.35	-0.00	-2.5 to 2.5	Pass
				0	3.85	3.48	0.00	-2.5 to 2.5	Pass
				10	3.85	2.89	0.00	-2.5 to 2.5	Pass
	1850.7	6	0	30	3.85	-10.71	-0.01	-2.5 to 2.5	Pass
				40	3.85	-3.30	-0.00	-2.5 to 2.5	Pass
				50	3.85	-11.62	-0.01	-2.5 to 2.5	Pass
				20	3.27	-5.95	-0.00	-2.5 to 2.5	Pass
					3.85	-4.96	-0.00	-2.5 to 2.5	Pass
					4.43	-6.31	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-10.03	-0.01	-2.5 to 2.5	Pass
				0	3.85	-4.63	-0.00	-2.5 to 2.5	Pass
				10	3.85	-3.38	-0.00	-2.5 to 2.5	Pass
				30	3.85	-3.13	-0.00	-2.5 to 2.5	Pass
				40	3.85	-7.83	-0.00	-2.5 to 2.5	Pass
				50	3.85	-6.37	-0.00	-2.5 to 2.5	Pass
	1880	6	0	20	3.27	-2.70	-0.00	-2.5 to 2.5	Pass
					3.85	-3.30	-0.00	-2.5 to 2.5	Pass
					4.43	-6.57	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-0.40	-0.00	-2.5 to 2.5	Pass
				0	3.85	-1.54	-0.00	-2.5 to 2.5	Pass
				10	3.85	-7.68	-0.00	-2.5 to 2.5	Pass
				30	3.85	-8.86	-0.00	-2.5 to 2.5	Pass
				40	3.85	-11.63	-0.01	-2.5 to 2.5	Pass
				50	3.85	-3.99	-0.00	-2.5 to 2.5	Pass
	1909.3	6	0	20	3.27	0.71	0.00	-2.5 to 2.5	Pass
					3.85	-7.77	-0.00	-2.5 to 2.5	Pass
					4.43	-2.75	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-5.96	-0.00	-2.5 to 2.5	Pass
				0	3.85	-9.27	-0.00	-2.5 to 2.5	Pass
				10	3.85	-6.17	-0.00	-2.5 to 2.5	Pass
				30	3.85	-16.61	-0.01	-2.5 to 2.5	Pass
				40	3.85	-13.20	-0.01	-2.5 to 2.5	Pass
				50	3.85	-7.17	-0.00	-2.5 to 2.5	Pass

B2_3MHz

Test Result

Band: 2 / Bandwidth: 3MHz									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
		Size	Offset				Result	Limit	
QPSK	1851.5	15	0	20	3.27	-41.57	-0.02	-2.5 to 2.5	Pass

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan
Avenue, North Area, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: W7L-220503W001RF05

					3.85	11.92	0.01	-2.5 to 2.5	Pass
					4.43	-9.73	-0.01	-2.5 to 2.5	Pass
				-10	3.85	-9.96	-0.01	-2.5 to 2.5	Pass
				0	3.85	-4.06	-0.00	-2.5 to 2.5	Pass
				10	3.85	-7.14	-0.00	-2.5 to 2.5	Pass
				30	3.85	-9.41	-0.01	-2.5 to 2.5	Pass
				40	3.85	-3.86	-0.00	-2.5 to 2.5	Pass
				50	3.85	-8.31	-0.00	-2.5 to 2.5	Pass
	1880	15	0	20	3.27	-1.45	-0.00	-2.5 to 2.5	Pass
					3.85	-19.24	-0.01	-2.5 to 2.5	Pass
					4.43	-19.63	-0.01	-2.5 to 2.5	Pass
				-10	3.85	-19.67	-0.01	-2.5 to 2.5	Pass
				0	3.85	-12.37	-0.01	-2.5 to 2.5	Pass
				10	3.85	-9.64	-0.01	-2.5 to 2.5	Pass
				30	3.85	-12.40	-0.01	-2.5 to 2.5	Pass
				40	3.85	-9.31	-0.01	-2.5 to 2.5	Pass
				50	3.85	-10.53	-0.01	-2.5 to 2.5	Pass
	1908.5	15	0	20	3.27	1.53	0.00	-2.5 to 2.5	Pass
					3.85	-22.53	-0.01	-2.5 to 2.5	Pass
					4.43	-20.46	-0.01	-2.5 to 2.5	Pass
				-10	3.85	-17.38	-0.01	-2.5 to 2.5	Pass
				0	3.85	-10.90	-0.01	-2.5 to 2.5	Pass
				10	3.85	-7.57	-0.00	-2.5 to 2.5	Pass
				30	3.85	-9.56	-0.01	-2.5 to 2.5	Pass
				40	3.85	-6.87	-0.00	-2.5 to 2.5	Pass
				50	3.85	-7.27	-0.00	-2.5 to 2.5	Pass
16QAM	1851.5	15	0	20	3.27	-2.27	-0.00	-2.5 to 2.5	Pass
					3.85	-6.97	-0.00	-2.5 to 2.5	Pass
					4.43	-6.42	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-5.67	-0.00	-2.5 to 2.5	Pass
				0	3.85	-1.73	-0.00	-2.5 to 2.5	Pass
				10	3.85	-10.50	-0.01	-2.5 to 2.5	Pass
				30	3.85	-7.32	-0.00	-2.5 to 2.5	Pass
				40	3.85	-7.74	-0.00	-2.5 to 2.5	Pass
				50	3.85	-7.02	-0.00	-2.5 to 2.5	Pass
	1880	15	0	20	3.27	-7.47	-0.00	-2.5 to 2.5	Pass
					3.85	-1.33	-0.00	-2.5 to 2.5	Pass
					4.43	2.23	0.00	-2.5 to 2.5	Pass
				-10	3.85	0.00	0.00	-2.5 to 2.5	Pass
				0	3.85	-14.21	-0.01	-2.5 to 2.5	Pass
				10	3.85	-6.44	-0.00	-2.5 to 2.5	Pass
				30	3.85	-4.43	-0.00	-2.5 to 2.5	Pass
				40	3.85	-10.56	-0.01	-2.5 to 2.5	Pass
				50	3.85	-5.92	-0.00	-2.5 to 2.5	Pass
	1908.5	15	0	20	3.27	-13.49	-0.01	-2.5 to 2.5	Pass
					3.85	-8.30	-0.00	-2.5 to 2.5	Pass
					4.43	-3.09	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-10.59	-0.01	-2.5 to 2.5	Pass
				0	3.85	-0.99	-0.00	-2.5 to 2.5	Pass
				10	3.85	-2.93	-0.00	-2.5 to 2.5	Pass
				30	3.85	-12.19	-0.01	-2.5 to 2.5	Pass
				40	3.85	-5.79	-0.00	-2.5 to 2.5	Pass
				50	3.85	-9.27	-0.00	-2.5 to 2.5	Pass



**BUREAU
VERITAS**

Test Report No.: W7L-220503W001RF05

64QAM	1851.5	15	0	20	3.27	-11.99	-0.01	-2.5 to 2.5	Pass
					3.85	-4.68	-0.00	-2.5 to 2.5	Pass
					4.43	-10.36	-0.01	-2.5 to 2.5	Pass
				-10	3.85	-12.12	-0.01	-2.5 to 2.5	Pass
				0	3.85	-6.42	-0.00	-2.5 to 2.5	Pass
				10	3.85	-14.40	-0.01	-2.5 to 2.5	Pass
				30	3.85	-11.14	-0.01	-2.5 to 2.5	Pass
				40	3.85	-11.59	-0.01	-2.5 to 2.5	Pass
				50	3.85	-9.26	-0.01	-2.5 to 2.5	Pass
	1880	15	0	20	3.27	-9.04	-0.00	-2.5 to 2.5	Pass
					3.85	0.97	0.00	-2.5 to 2.5	Pass
					4.43	-1.25	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-7.92	-0.00	-2.5 to 2.5	Pass
				0	3.85	-5.95	-0.00	-2.5 to 2.5	Pass
				10	3.85	-1.57	-0.00	-2.5 to 2.5	Pass
				30	3.85	-4.85	-0.00	-2.5 to 2.5	Pass
				40	3.85	-4.11	-0.00	-2.5 to 2.5	Pass
				50	3.85	-2.58	-0.00	-2.5 to 2.5	Pass
	1908.5	15	0	20	3.27	-12.42	-0.01	-2.5 to 2.5	Pass
					3.85	3.55	0.00	-2.5 to 2.5	Pass
					4.43	-1.09	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-5.57	-0.00	-2.5 to 2.5	Pass
				0	3.85	-4.61	-0.00	-2.5 to 2.5	Pass
				10	3.85	-2.02	-0.00	-2.5 to 2.5	Pass
				30	3.85	-6.77	-0.00	-2.5 to 2.5	Pass
				40	3.85	-10.84	-0.01	-2.5 to 2.5	Pass
				50	3.85	-9.87	-0.01	-2.5 to 2.5	Pass

B2_5MHz

Test Result

Band: 2 / Bandwidth: 5MHz									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
		Size	Offset				Result	Limit	
QPSK	1852.5	25	0	20	3.27	-17.44	-0.01	-2.5 to 2.5	Pass
					3.85	-27.74	-0.01	-2.5 to 2.5	Pass
					4.43	-17.77	-0.01	-2.5 to 2.5	Pass
				-10	3.85	-9.01	-0.00	-2.5 to 2.5	Pass
				0	3.85	-5.09	-0.00	-2.5 to 2.5	Pass
				10	3.85	-6.72	-0.00	-2.5 to 2.5	Pass
				30	3.85	-7.97	-0.00	-2.5 to 2.5	Pass
				40	3.85	-6.64	-0.00	-2.5 to 2.5	Pass
				50	3.85	-6.59	-0.00	-2.5 to 2.5	Pass
	1880	25	0	20	3.27	-4.02	-0.00	-2.5 to 2.5	Pass
					3.85	-15.62	-0.01	-2.5 to 2.5	Pass
					4.43	-11.85	-0.01	-2.5 to 2.5	Pass
				-10	3.85	-5.78	-0.00	-2.5 to 2.5	Pass
				0	3.85	-7.35	-0.00	-2.5 to 2.5	Pass
				10	3.85	-3.81	-0.00	-2.5 to 2.5	Pass
				30	3.85	-5.15	-0.00	-2.5 to 2.5	Pass
				40	3.85	-3.19	-0.00	-2.5 to 2.5	Pass



BUREAU
VERITAS

Test Report No.: W7L-220503W001RF05

	1907.5	25	0	50	3.85	-2.20	-0.00	-2.5 to 2.5	Pass
				20	3.27	-1.73	-0.00	-2.5 to 2.5	Pass
					3.85	-20.39	-0.01	-2.5 to 2.5	Pass
					4.43	-15.81	-0.01	-2.5 to 2.5	Pass
				-10	3.85	-4.46	-0.00	-2.5 to 2.5	Pass
				0	3.85	-5.09	-0.00	-2.5 to 2.5	Pass
				10	3.85	-5.11	-0.00	-2.5 to 2.5	Pass
				30	3.85	-0.32	-0.00	-2.5 to 2.5	Pass
				40	3.85	-6.84	-0.00	-2.5 to 2.5	Pass
16QAM	1852.5	25	0	50	3.85	-5.39	-0.00	-2.5 to 2.5	Pass
				20	3.27	-4.85	-0.00	-2.5 to 2.5	Pass
					3.85	-7.01	-0.00	-2.5 to 2.5	Pass
					4.43	-0.81	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-8.22	-0.00	-2.5 to 2.5	Pass
				0	3.85	-6.91	-0.00	-2.5 to 2.5	Pass
				10	3.85	-10.36	-0.01	-2.5 to 2.5	Pass
				30	3.85	-8.88	-0.00	-2.5 to 2.5	Pass
				40	3.85	-3.25	-0.00	-2.5 to 2.5	Pass
	1880	25	0	50	3.85	-12.27	-0.01	-2.5 to 2.5	Pass
				20	3.27	-6.05	-0.00	-2.5 to 2.5	Pass
					3.85	-5.64	-0.00	-2.5 to 2.5	Pass
					4.43	1.03	0.00	-2.5 to 2.5	Pass
				-10	3.85	-8.81	-0.00	-2.5 to 2.5	Pass
				0	3.85	-5.92	-0.00	-2.5 to 2.5	Pass
				10	3.85	-12.09	-0.01	-2.5 to 2.5	Pass
				30	3.85	-9.21	-0.00	-2.5 to 2.5	Pass
				40	3.85	0.24	0.00	-2.5 to 2.5	Pass
	1907.5	25	0	50	3.85	-6.78	-0.00	-2.5 to 2.5	Pass
				20	3.27	-7.48	-0.00	-2.5 to 2.5	Pass
					3.85	13.09	0.01	-2.5 to 2.5	Pass
					4.43	-3.92	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-6.44	-0.00	-2.5 to 2.5	Pass
				0	3.85	-12.29	-0.01	-2.5 to 2.5	Pass
				10	3.85	-9.03	-0.00	-2.5 to 2.5	Pass
				30	3.85	2.85	0.00	-2.5 to 2.5	Pass
				40	3.85	-10.00	-0.01	-2.5 to 2.5	Pass
64QAM	1852.5	25	0	50	3.85	-11.62	-0.01	-2.5 to 2.5	Pass
				20	3.27	-5.18	-0.00	-2.5 to 2.5	Pass
					3.85	-4.96	-0.00	-2.5 to 2.5	Pass
					4.43	-4.05	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-6.74	-0.00	-2.5 to 2.5	Pass
				0	3.85	-11.52	-0.01	-2.5 to 2.5	Pass
				10	3.85	-5.79	-0.00	-2.5 to 2.5	Pass
				30	3.85	-6.67	-0.00	-2.5 to 2.5	Pass
				40	3.85	-6.87	-0.00	-2.5 to 2.5	Pass
	1880	25	0	50	3.85	-7.04	-0.00	-2.5 to 2.5	Pass
				20	3.27	2.65	0.00	-2.5 to 2.5	Pass
					3.85	-3.02	-0.00	-2.5 to 2.5	Pass
					4.43	-6.12	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-6.14	-0.00	-2.5 to 2.5	Pass
				0	3.85	-7.54	-0.00	-2.5 to 2.5	Pass
				10	3.85	-4.11	-0.00	-2.5 to 2.5	Pass
				30	3.85	-6.29	-0.00	-2.5 to 2.5	Pass



**BUREAU
VERITAS**

Test Report No.: W7L-220503W001RF05

	1907.5	25	0	40	3.85	-1.80	-0.00	-2.5 to 2.5	Pass
				50	3.85	0.79	0.00	-2.5 to 2.5	Pass
				20	3.27	-0.93	-0.00	-2.5 to 2.5	Pass
					3.85	0.79	0.00	-2.5 to 2.5	Pass
					4.43	-3.66	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-5.34	-0.00	-2.5 to 2.5	Pass
				0	3.85	-8.78	-0.00	-2.5 to 2.5	Pass
				10	3.85	-4.81	-0.00	-2.5 to 2.5	Pass
				30	3.85	-8.38	-0.00	-2.5 to 2.5	Pass
				40	3.85	-6.38	-0.00	-2.5 to 2.5	Pass
				50	3.85	-7.85	-0.00	-2.5 to 2.5	Pass

B2_10MHz

Test Result

Band: 2 / Bandwidth: 10MHz									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
		Size	Offset				Result	Limit	
QPSK	1855	50	0	20	3.27	-12.49	-0.01	-2.5 to 2.5	Pass
					3.85	-6.01	-0.00	-2.5 to 2.5	Pass
					4.43	-5.49	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-6.07	-0.00	-2.5 to 2.5	Pass
				0	3.85	-6.18	-0.00	-2.5 to 2.5	Pass
				10	3.85	-6.25	-0.00	-2.5 to 2.5	Pass
				30	3.85	-12.60	-0.01	-2.5 to 2.5	Pass
				40	3.85	-3.88	-0.00	-2.5 to 2.5	Pass
				50	3.85	-5.45	-0.00	-2.5 to 2.5	Pass
	1880	50	0	20	3.27	-12.53	-0.01	-2.5 to 2.5	Pass
					3.85	-10.01	-0.01	-2.5 to 2.5	Pass
					4.43	-5.99	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-6.05	-0.00	-2.5 to 2.5	Pass
				0	3.85	-4.35	-0.00	-2.5 to 2.5	Pass
				10	3.85	-8.65	-0.00	-2.5 to 2.5	Pass
				30	3.85	-5.01	-0.00	-2.5 to 2.5	Pass
				40	3.85	-5.74	-0.00	-2.5 to 2.5	Pass
				50	3.85	-7.22	-0.00	-2.5 to 2.5	Pass
	1905	50	0	20	3.27	-9.70	-0.01	-2.5 to 2.5	Pass
					3.85	-12.20	-0.01	-2.5 to 2.5	Pass
					4.43	-4.46	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-8.44	-0.00	-2.5 to 2.5	Pass
				0	3.85	-6.94	-0.00	-2.5 to 2.5	Pass
				10	3.85	-9.08	-0.00	-2.5 to 2.5	Pass
				30	3.85	-4.95	-0.00	-2.5 to 2.5	Pass
				40	3.85	-6.07	-0.00	-2.5 to 2.5	Pass
				50	3.85	-7.21	-0.00	-2.5 to 2.5	Pass
16QAM	1855	50	0	20	3.27	-5.09	-0.00	-2.5 to 2.5	Pass
					3.85	-5.18	-0.00	-2.5 to 2.5	Pass
					4.43	-6.08	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-2.92	-0.00	-2.5 to 2.5	Pass



**BUREAU
VERITAS**

Test Report No.: W7L-220503W001RF05

				0	3.85	-0.69	-0.00	-2.5 to 2.5	Pass
				10	3.85	-9.64	-0.01	-2.5 to 2.5	Pass
				30	3.85	-7.98	-0.00	-2.5 to 2.5	Pass
				40	3.85	-11.52	-0.01	-2.5 to 2.5	Pass
				50	3.85	-7.18	-0.00	-2.5 to 2.5	Pass
	1880	50	0	20	3.27	-6.58	-0.00	-2.5 to 2.5	Pass
					3.85	-6.58	-0.00	-2.5 to 2.5	Pass
					4.43	-5.48	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-10.93	-0.01	-2.5 to 2.5	Pass
				0	3.85	-6.04	-0.00	-2.5 to 2.5	Pass
				10	3.85	-5.39	-0.00	-2.5 to 2.5	Pass
				30	3.85	-5.64	-0.00	-2.5 to 2.5	Pass
				40	3.85	-6.12	-0.00	-2.5 to 2.5	Pass
				50	3.85	-4.39	-0.00	-2.5 to 2.5	Pass
				20	3.27	-4.65	-0.00	-2.5 to 2.5	Pass
					3.85	-7.68	-0.00	-2.5 to 2.5	Pass
					4.43	-5.78	-0.00	-2.5 to 2.5	Pass
	1905	50	0	-10	3.85	-6.27	-0.00	-2.5 to 2.5	Pass
				0	3.85	-4.51	-0.00	-2.5 to 2.5	Pass
				10	3.85	-2.13	-0.00	-2.5 to 2.5	Pass
				30	3.85	-3.08	-0.00	-2.5 to 2.5	Pass
				40	3.85	-8.10	-0.00	-2.5 to 2.5	Pass
				50	3.85	-3.65	-0.00	-2.5 to 2.5	Pass
64QAM	1855	50	0	20	3.27	-8.54	-0.00	-2.5 to 2.5	Pass
					3.85	-5.25	-0.00	-2.5 to 2.5	Pass
					4.43	-3.08	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-5.12	-0.00	-2.5 to 2.5	Pass
				0	3.85	-7.21	-0.00	-2.5 to 2.5	Pass
				10	3.85	-8.30	-0.00	-2.5 to 2.5	Pass
				30	3.85	-3.85	-0.00	-2.5 to 2.5	Pass
				40	3.85	-1.90	-0.00	-2.5 to 2.5	Pass
				50	3.85	-1.77	-0.00	-2.5 to 2.5	Pass
	1880	50	0	20	3.27	-3.48	-0.00	-2.5 to 2.5	Pass
					3.85	-3.76	-0.00	-2.5 to 2.5	Pass
					4.43	-4.76	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-4.49	-0.00	-2.5 to 2.5	Pass
				0	3.85	-4.00	-0.00	-2.5 to 2.5	Pass
				10	3.85	-7.14	-0.00	-2.5 to 2.5	Pass
				30	3.85	-4.75	-0.00	-2.5 to 2.5	Pass
				40	3.85	-9.73	-0.01	-2.5 to 2.5	Pass
				50	3.85	-8.43	-0.00	-2.5 to 2.5	Pass
	1905	50	0	20	3.27	-1.52	-0.00	-2.5 to 2.5	Pass
					3.85	-3.03	-0.00	-2.5 to 2.5	Pass
					4.43	-5.65	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-6.72	-0.00	-2.5 to 2.5	Pass
				0	3.85	-5.75	-0.00	-2.5 to 2.5	Pass
				10	3.85	-8.77	-0.00	-2.5 to 2.5	Pass
				30	3.85	-5.29	-0.00	-2.5 to 2.5	Pass
				40	3.85	-6.97	-0.00	-2.5 to 2.5	Pass
				50	3.85	-8.54	-0.00	-2.5 to 2.5	Pass

B2_15MHz



**BUREAU
VERITAS**

Test Report No.: W7L-220503W001RF05

Test Result

Band: 2 / Bandwidth: 15MHz									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
		Size	Offset				Result	Limit	
QPSK	1857.5	75	0	20	3.27	-13.82	-0.01	-2.5 to 2.5	Pass
					3.85	-4.22	-0.00	-2.5 to 2.5	Pass
					4.43	-3.26	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-4.71	-0.00	-2.5 to 2.5	Pass
				0	3.85	-8.53	-0.00	-2.5 to 2.5	Pass
				10	3.85	-4.92	-0.00	-2.5 to 2.5	Pass
				30	3.85	-1.26	-0.00	-2.5 to 2.5	Pass
				40	3.85	-5.42	-0.00	-2.5 to 2.5	Pass
				50	3.85	-1.25	-0.00	-2.5 to 2.5	Pass
	1880	75	0	20	3.27	-13.07	-0.01	-2.5 to 2.5	Pass
					3.85	-8.35	-0.00	-2.5 to 2.5	Pass
					4.43	-5.95	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-2.38	-0.00	-2.5 to 2.5	Pass
				0	3.85	-3.79	-0.00	-2.5 to 2.5	Pass
				10	3.85	-4.82	-0.00	-2.5 to 2.5	Pass
				30	3.85	-5.11	-0.00	-2.5 to 2.5	Pass
				40	3.85	-11.41	-0.01	-2.5 to 2.5	Pass
				50	3.85	-12.72	-0.01	-2.5 to 2.5	Pass
	1902.5	75	0	20	3.27	-10.14	-0.01	-2.5 to 2.5	Pass
					3.85	-9.10	-0.00	-2.5 to 2.5	Pass
					4.43	-6.02	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-9.47	-0.01	-2.5 to 2.5	Pass
				0	3.85	-8.48	-0.00	-2.5 to 2.5	Pass
				10	3.85	-1.70	-0.00	-2.5 to 2.5	Pass
				30	3.85	-6.95	-0.00	-2.5 to 2.5	Pass
				40	3.85	-1.75	-0.00	-2.5 to 2.5	Pass
				50	3.85	-2.98	-0.00	-2.5 to 2.5	Pass
16QAM	1857.5	75	0	20	3.27	0.73	0.00	-2.5 to 2.5	Pass
					3.85	-2.12	-0.00	-2.5 to 2.5	Pass
					4.43	-0.76	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-1.69	-0.00	-2.5 to 2.5	Pass
				0	3.85	-3.63	-0.00	-2.5 to 2.5	Pass
				10	3.85	-3.60	-0.00	-2.5 to 2.5	Pass
				30	3.85	-1.52	-0.00	-2.5 to 2.5	Pass
				40	3.85	-7.48	-0.00	-2.5 to 2.5	Pass
				50	3.85	-4.21	-0.00	-2.5 to 2.5	Pass
	1880	75	0	20	3.27	-10.30	-0.01	-2.5 to 2.5	Pass
					3.85	-9.76	-0.01	-2.5 to 2.5	Pass
					4.43	-11.17	-0.01	-2.5 to 2.5	Pass
				-10	3.85	-9.36	-0.01	-2.5 to 2.5	Pass
				0	3.85	-8.51	-0.00	-2.5 to 2.5	Pass
				10	3.85	-12.95	-0.01	-2.5 to 2.5	Pass
				30	3.85	-2.35	-0.00	-2.5 to 2.5	Pass
				40	3.85	-6.24	-0.00	-2.5 to 2.5	Pass
				50	3.85	-7.92	-0.00	-2.5 to 2.5	Pass
	1902.5	75	0	20	3.27	-4.72	-0.00	-2.5 to 2.5	Pass
					3.85	-4.76	-0.00	-2.5 to 2.5	Pass



**BUREAU
VERITAS**

Test Report No.: W7L-220503W001RF05

64QAM	1857.5	75	0		4.43	-2.53	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-1.53	-0.00	-2.5 to 2.5	Pass
				0	3.85	-4.95	-0.00	-2.5 to 2.5	Pass
				10	3.85	-4.31	-0.00	-2.5 to 2.5	Pass
				30	3.85	-4.15	-0.00	-2.5 to 2.5	Pass
				40	3.85	-1.06	-0.00	-2.5 to 2.5	Pass
				50	3.85	-6.79	-0.00	-2.5 to 2.5	Pass
	1880	75	0	20	3.27	-3.00	-0.00	-2.5 to 2.5	Pass
					3.85	-4.06	-0.00	-2.5 to 2.5	Pass
					4.43	-4.21	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-1.67	-0.00	-2.5 to 2.5	Pass
				0	3.85	-0.77	-0.00	-2.5 to 2.5	Pass
				10	3.85	-5.75	-0.00	-2.5 to 2.5	Pass
				30	3.85	-1.50	-0.00	-2.5 to 2.5	Pass
				40	3.85	-1.06	-0.00	-2.5 to 2.5	Pass
				50	3.85	-2.58	-0.00	-2.5 to 2.5	Pass
				20	3.27	-3.35	-0.00	-2.5 to 2.5	Pass
					3.85	-11.36	-0.01	-2.5 to 2.5	Pass
					4.43	-7.67	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-6.52	-0.00	-2.5 to 2.5	Pass
				0	3.85	-5.38	-0.00	-2.5 to 2.5	Pass
	1902.5	75	0	10	3.85	-9.88	-0.01	-2.5 to 2.5	Pass
				30	3.85	-7.72	-0.00	-2.5 to 2.5	Pass
				40	3.85	-3.65	-0.00	-2.5 to 2.5	Pass
				50	3.85	-8.17	-0.00	-2.5 to 2.5	Pass
				20	3.27	0.09	0.00	-2.5 to 2.5	Pass
					3.85	-5.79	-0.00	-2.5 to 2.5	Pass
					4.43	-6.68	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-0.93	-0.00	-2.5 to 2.5	Pass
				0	3.85	-3.66	-0.00	-2.5 to 2.5	Pass
				10	3.85	-7.25	-0.00	-2.5 to 2.5	Pass
				30	3.85	-6.82	-0.00	-2.5 to 2.5	Pass
				40	3.85	-8.24	-0.00	-2.5 to 2.5	Pass
				50	3.85	-8.17	-0.00	-2.5 to 2.5	Pass

B2_20MHz

Test Result

Band: 2 / Bandwidth: 20MHz									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
		Size	Offset				Result	Limit	
QPSK	1860	100	0	20	3.27	-17.22	-0.01	-2.5 to 2.5	Pass
					3.85	-1.06	-0.00	-2.5 to 2.5	Pass
					4.43	1.42	0.00	-2.5 to 2.5	Pass
				-10	3.85	-7.92	-0.00	-2.5 to 2.5	Pass
				0	3.85	-6.47	-0.00	-2.5 to 2.5	Pass
				10	3.85	-9.08	-0.00	-2.5 to 2.5	Pass
				30	3.85	-4.85	-0.00	-2.5 to 2.5	Pass
				40	3.85	-5.64	-0.00	-2.5 to 2.5	Pass
				50	3.85	-7.70	-0.00	-2.5 to 2.5	Pass
	1880	100	0	20	3.27	-14.72	-0.01	-2.5 to 2.5	Pass



BUREAU
VERITAS

Test Report No.: W7L-220503W001RF05

					3.85	-3.85	-0.00	-2.5 to 2.5	Pass
					4.43	-7.71	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-12.30	-0.01	-2.5 to 2.5	Pass
				0	3.85	-9.64	-0.01	-2.5 to 2.5	Pass
				10	3.85	-8.60	-0.00	-2.5 to 2.5	Pass
				30	3.85	-7.01	-0.00	-2.5 to 2.5	Pass
				40	3.85	-7.58	-0.00	-2.5 to 2.5	Pass
				50	3.85	-6.31	-0.00	-2.5 to 2.5	Pass
	1900	100	0	20	3.27	-10.54	-0.01	-2.5 to 2.5	Pass
					3.85	-6.02	-0.00	-2.5 to 2.5	Pass
				4.43	-6.09	-0.00	-2.5 to 2.5	Pass	
				-10	3.85	-3.49	-0.00	-2.5 to 2.5	Pass
				0	3.85	-6.18	-0.00	-2.5 to 2.5	Pass
				10	3.85	-4.93	-0.00	-2.5 to 2.5	Pass
				30	3.85	-6.38	-0.00	-2.5 to 2.5	Pass
				40	3.85	-6.95	-0.00	-2.5 to 2.5	Pass
50	3.85	-7.57	-0.00	-2.5 to 2.5	Pass				
16QAM	1860	100	0	20	3.27	-4.11	-0.00	-2.5 to 2.5	Pass
					3.85	-7.91	-0.00	-2.5 to 2.5	Pass
				4.43	-1.06	-0.00	-2.5 to 2.5	Pass	
				-10	3.85	-4.46	-0.00	-2.5 to 2.5	Pass
				0	3.85	-5.58	-0.00	-2.5 to 2.5	Pass
				10	3.85	-2.65	-0.00	-2.5 to 2.5	Pass
				30	3.85	-2.30	-0.00	-2.5 to 2.5	Pass
				40	3.85	-5.11	-0.00	-2.5 to 2.5	Pass
	50	3.85	-8.90	-0.00	-2.5 to 2.5	Pass			
	1880	100	0	20	3.27	-7.22	-0.00	-2.5 to 2.5	Pass
					3.85	-5.01	-0.00	-2.5 to 2.5	Pass
				4.43	-6.88	-0.00	-2.5 to 2.5	Pass	
				-10	3.85	-8.30	-0.00	-2.5 to 2.5	Pass
				0	3.85	-4.62	-0.00	-2.5 to 2.5	Pass
				10	3.85	-4.48	-0.00	-2.5 to 2.5	Pass
				30	3.85	-5.69	-0.00	-2.5 to 2.5	Pass
				40	3.85	-10.89	-0.01	-2.5 to 2.5	Pass
	50	3.85	-6.61	-0.00	-2.5 to 2.5	Pass			
	1900	100	0	20	3.27	-8.80	-0.00	-2.5 to 2.5	Pass
					3.85	-6.78	-0.00	-2.5 to 2.5	Pass
				4.43	-7.78	-0.00	-2.5 to 2.5	Pass	
				-10	3.85	-6.81	-0.00	-2.5 to 2.5	Pass
				0	3.85	-3.49	-0.00	-2.5 to 2.5	Pass
				10	3.85	-5.69	-0.00	-2.5 to 2.5	Pass
30				3.85	-4.68	-0.00	-2.5 to 2.5	Pass	
40				3.85	-9.56	-0.01	-2.5 to 2.5	Pass	
50	3.85	-5.31	-0.00	-2.5 to 2.5	Pass				
64QAM	1860	100	0	20	3.27	-6.37	-0.00	-2.5 to 2.5	Pass
					3.85	-3.32	-0.00	-2.5 to 2.5	Pass
				4.43	-7.07	-0.00	-2.5 to 2.5	Pass	
				-10	3.85	-7.54	-0.00	-2.5 to 2.5	Pass
				0	3.85	-4.26	-0.00	-2.5 to 2.5	Pass
				10	3.85	-0.66	-0.00	-2.5 to 2.5	Pass
				30	3.85	-0.83	-0.00	-2.5 to 2.5	Pass
				40	3.85	-2.30	-0.00	-2.5 to 2.5	Pass
50	3.85	-2.58	-0.00	-2.5 to 2.5	Pass				



	1880	100	0	20	3.27	-5.29	-0.00	-2.5 to 2.5	Pass
					3.85	-5.36	-0.00	-2.5 to 2.5	Pass
					4.43	-8.04	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-6.54	-0.00	-2.5 to 2.5	Pass
				0	3.85	-5.78	-0.00	-2.5 to 2.5	Pass
				10	3.85	-10.53	-0.01	-2.5 to 2.5	Pass
				30	3.85	-8.63	-0.00	-2.5 to 2.5	Pass
				40	3.85	-9.48	-0.01	-2.5 to 2.5	Pass
				50	3.85	-10.30	-0.01	-2.5 to 2.5	Pass
	1900	100	0	20	3.27	-4.89	-0.00	-2.5 to 2.5	Pass
					3.85	-5.36	-0.00	-2.5 to 2.5	Pass
					4.43	-6.22	-0.00	-2.5 to 2.5	Pass
				-10	3.85	-8.04	-0.00	-2.5 to 2.5	Pass
				0	3.85	-6.82	-0.00	-2.5 to 2.5	Pass
				10	3.85	-8.70	-0.00	-2.5 to 2.5	Pass
				30	3.85	-9.83	-0.01	-2.5 to 2.5	Pass
				40	3.85	-4.39	-0.00	-2.5 to 2.5	Pass
				50	3.85	-5.62	-0.00	-2.5 to 2.5	Pass

99% & 26dB Bandwidth

Band2_OBW

Test Result

Band: 2 / NTNV						
Bandwidth (MHz)	Modulation	Frequency (MHz)	RB Allocation		99% Occupied Bandwidth (MHz)	Verdict
			Size	Offset	Result	
1.4	QPSK	1850.7	6	0	1.114	Pass
		1880	6	0	1.110	Pass
		1909.3	6	0	1.111	Pass
	16QAM	1850.7	6	0	1.108	Pass
		1880	6	0	1.115	Pass
		1909.3	6	0	1.117	Pass
	64QAM	1850.7	6	0	1.113	Pass
		1880	6	0	1.111	Pass
		1909.3	6	0	1.112	Pass
3	QPSK	1851.5	15	0	2.719	Pass
		1880	15	0	2.731	Pass
		1908.5	15	0	2.729	Pass
	16QAM	1851.5	15	0	2.730	Pass
		1880	15	0	2.727	Pass
		1908.5	15	0	2.720	Pass
	64QAM	1851.5	15	0	2.720	Pass
		1880	15	0	2.723	Pass
		1908.5	15	0	2.731	Pass
5	QPSK	1852.5	25	0	4.554	Pass