



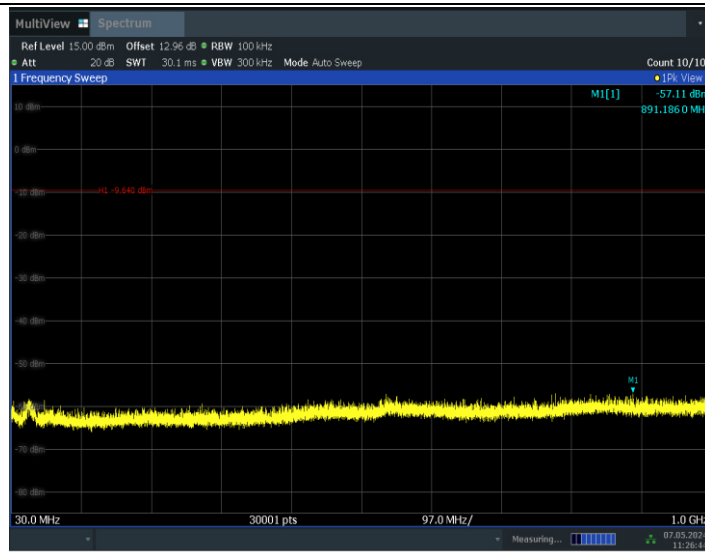


11:26:44 07.05.2024

11B_Ant1_2437_1000~26500

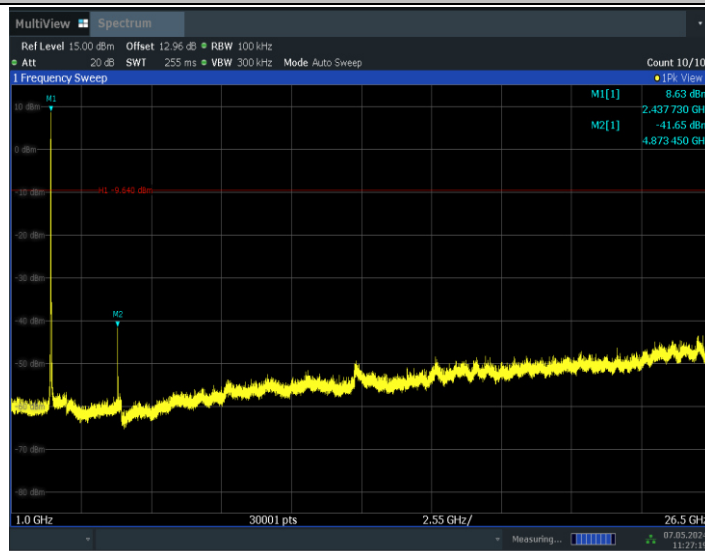


11:27:20 07.05.2024

11B_Ant1_2462_0~Reference

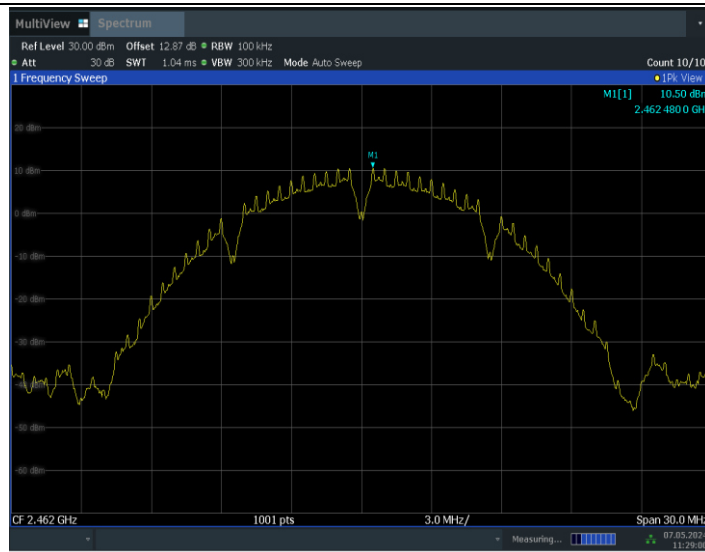


11:29:00 07.05.2024

11B_Ant1_2462_30~1000

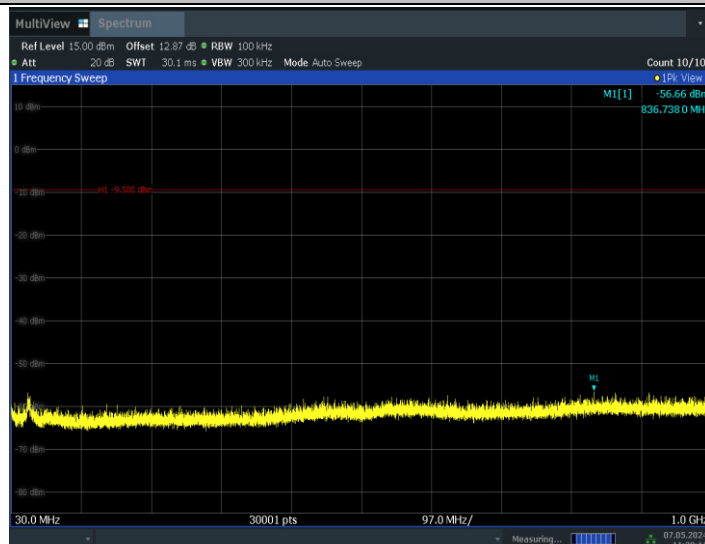


11:29:11 07.05.2024

11B_Ant1_2462_1000~26500

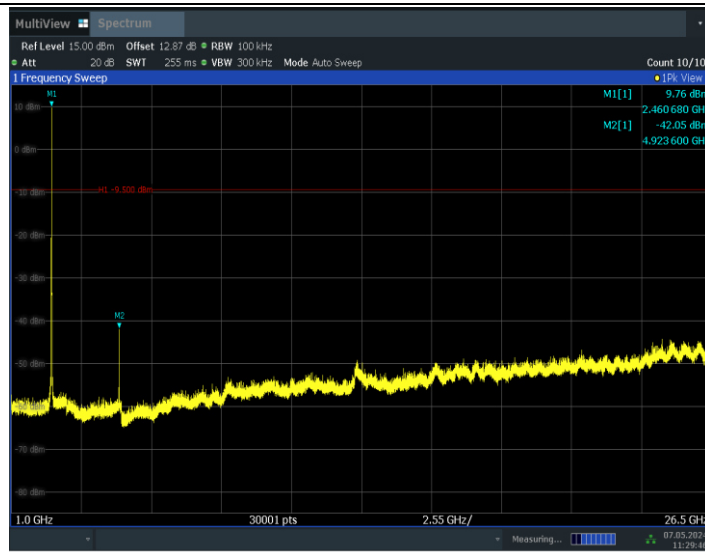


11:29:47 07.05.2024

11G_Ant1_2412_0~Reference

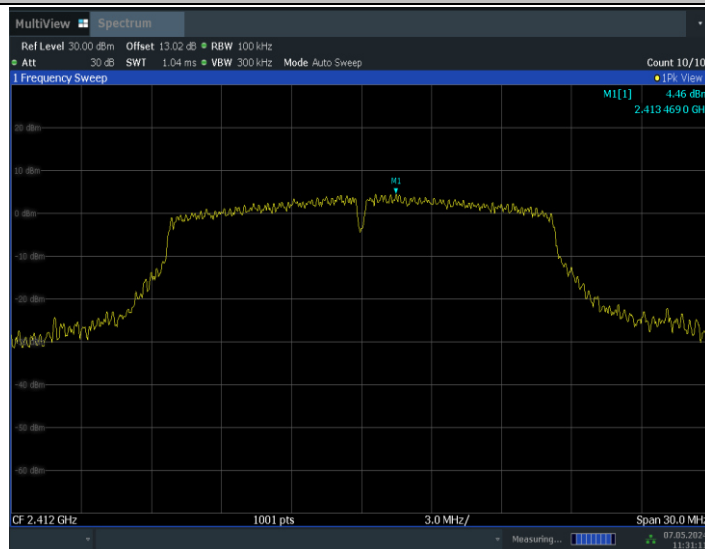


11:31:12 07.05.2024

11G_Ant1_2412_30~1000

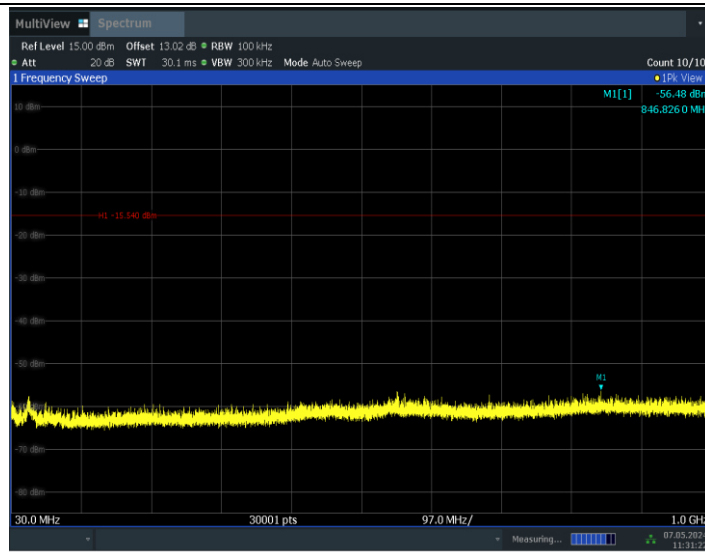


11:31:22 07.05.2024

11G_Ant1_2412_1000~26500

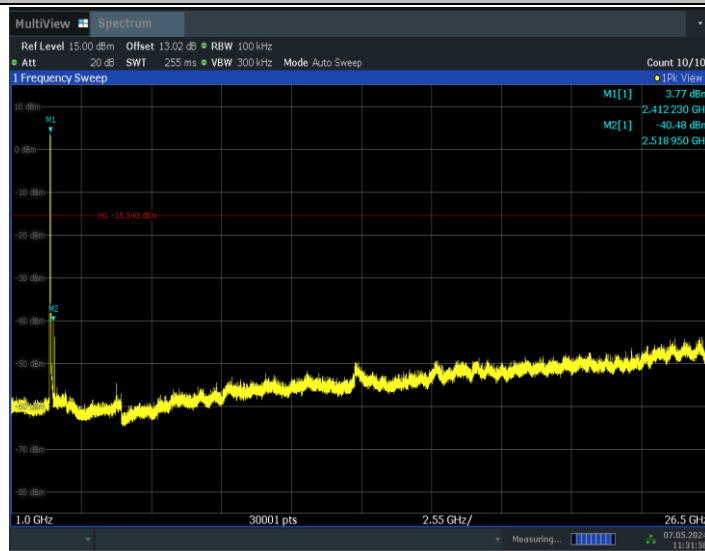


11:31:58 07.05.2024

11G_Ant1_2437_0~Reference

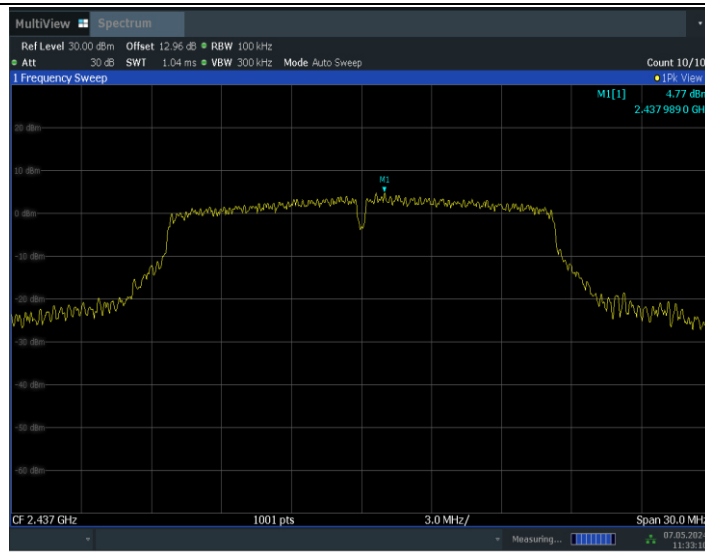


11:33:11 07.05.2024

11G_Ant1_2437_30~1000

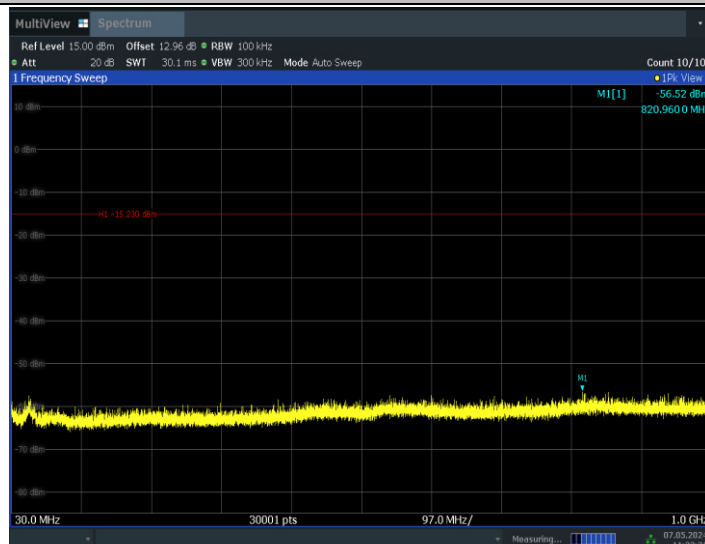


11:33:22 07.05.2024


11G_Ant1_2437_1000~26500

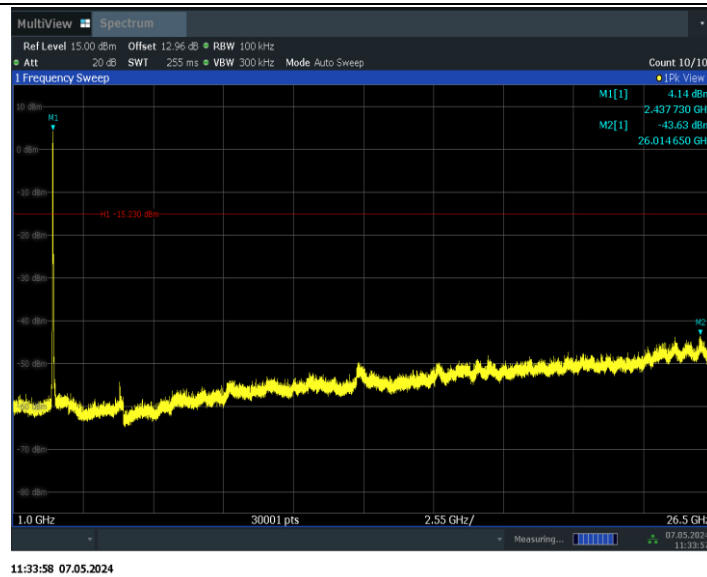

11G_Ant1_2462_0~Reference

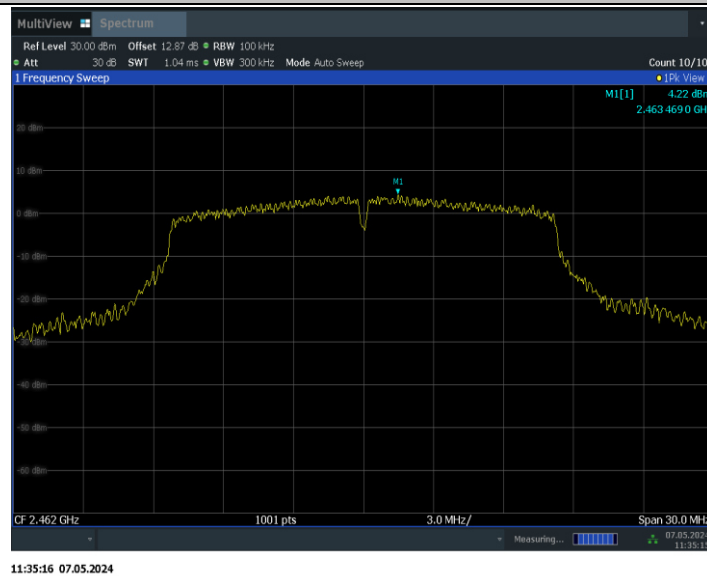


11G_Ant1_2462_30~1000

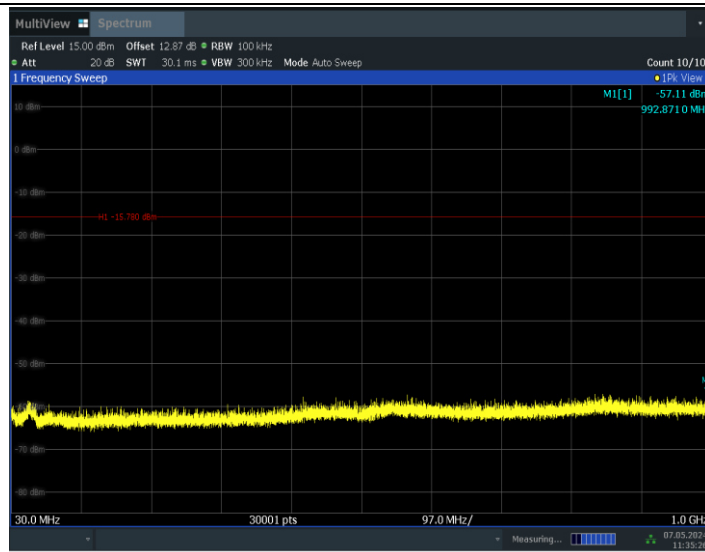


11:35:26 07.05.2024

11G_Ant1_2462_1000~26500

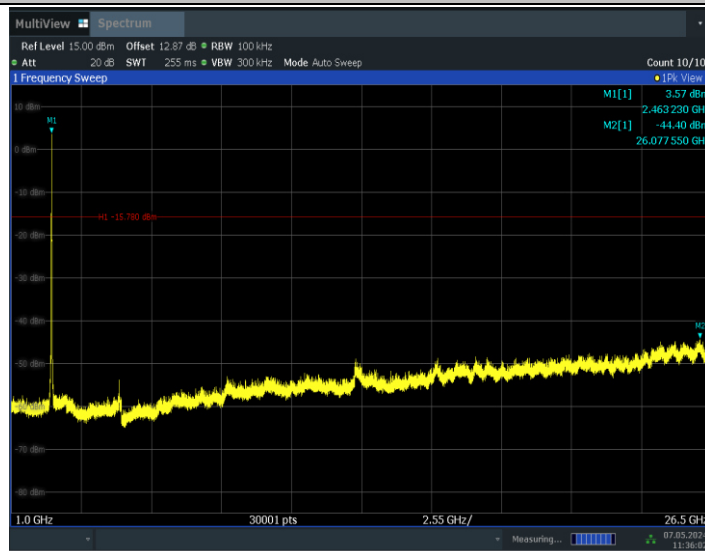


11:36:02 07.05.2024

11N20SISO_Ant1_2412_0~Reference

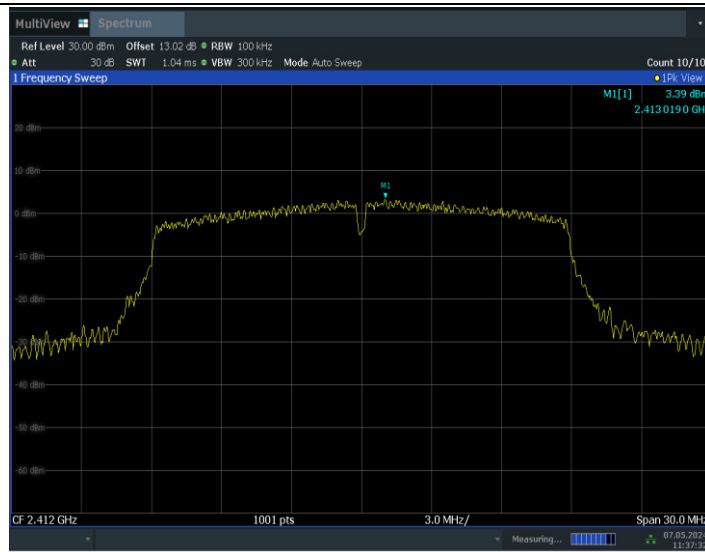


11:37:32 07.05.2024

11N20SISO_Ant1_2412_30~1000

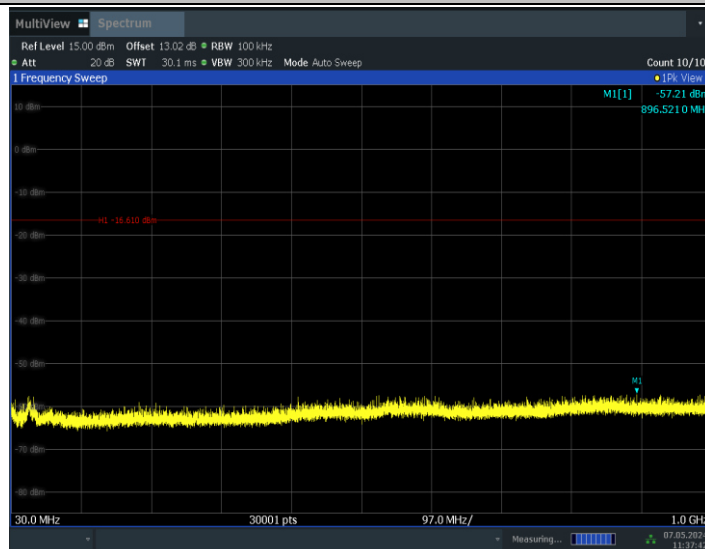


11:37:43 07.05.2024


11N20SISO_Ant1_2412_1000~26500

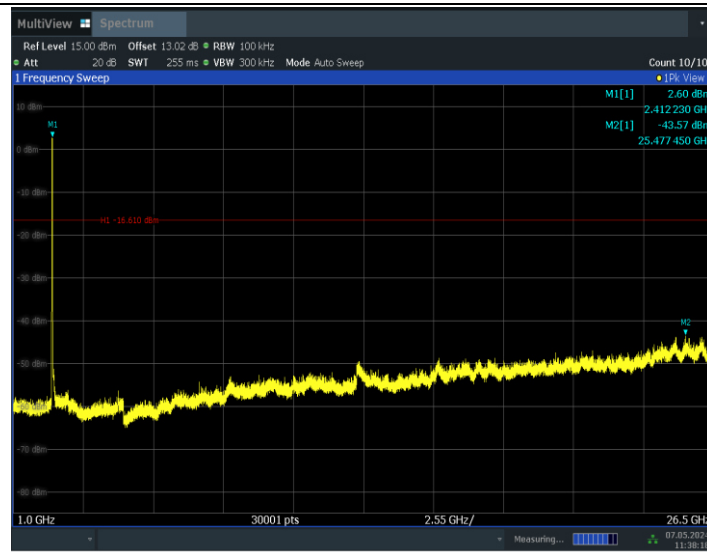

11N20SISO_Ant1_2437_0~Reference

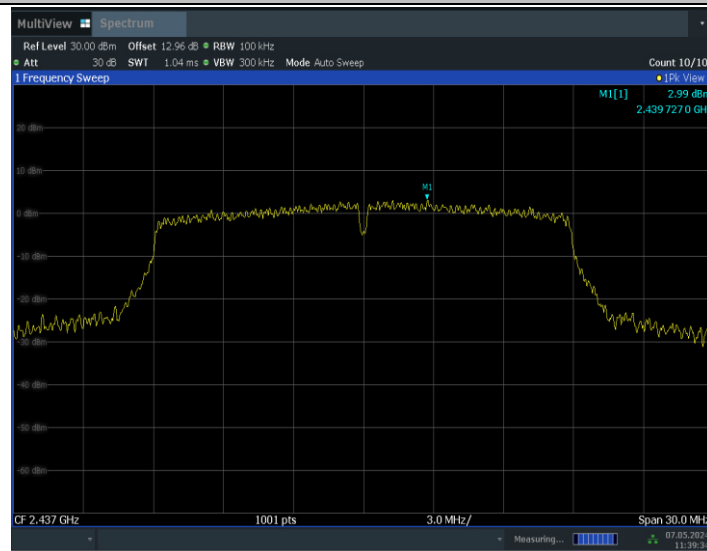


11N20SISO_Ant1_2437_30~1000

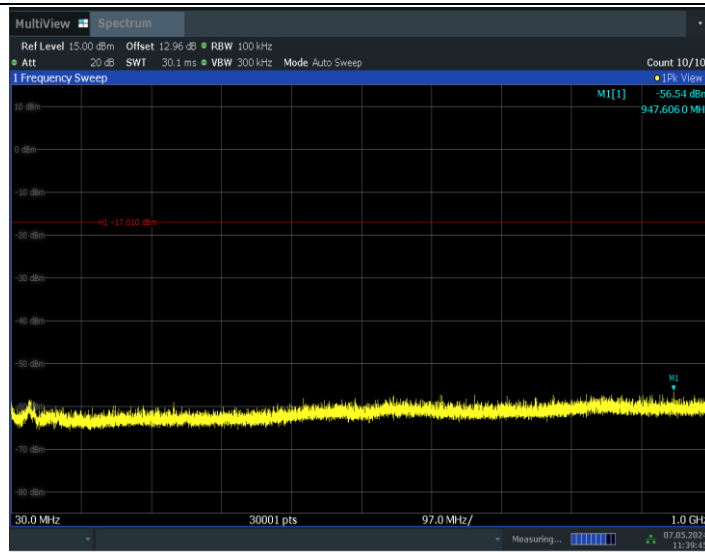


11:39:45 07.05.2024

11N20SISO_Ant1_2437_1000~26500

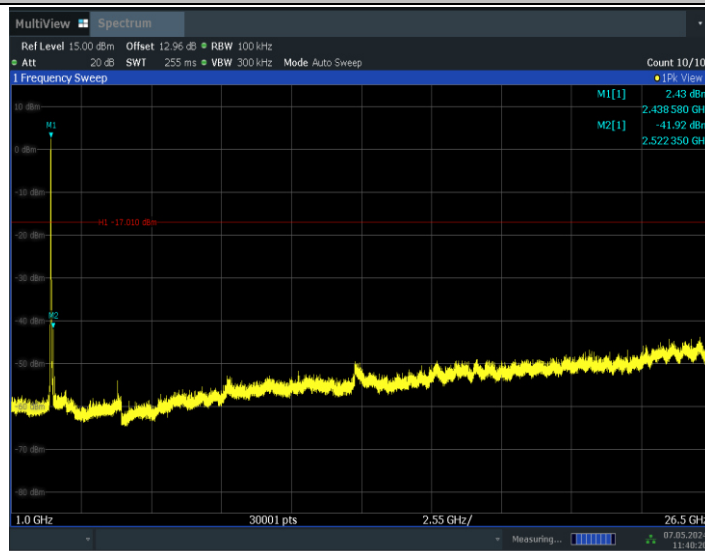


11:40:21 07.05.2024

11N20SISO_Ant1_2462_0~Reference

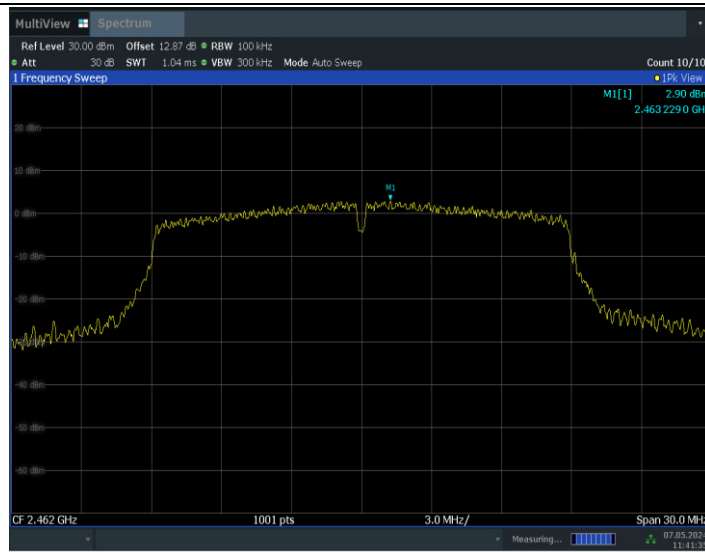


11:41:36 07.05.2024

11N20SISO_Ant1_2462_30~1000

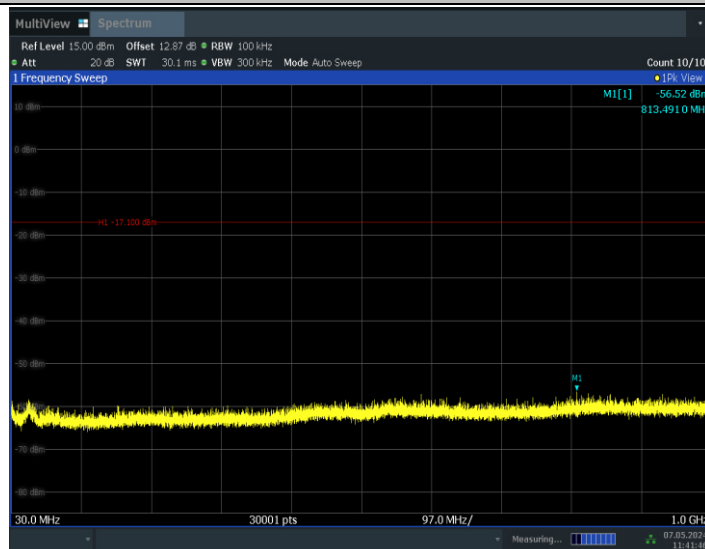


11:41:46 07.05.2024

11N20SISO_Ant1_2462_1000~26500

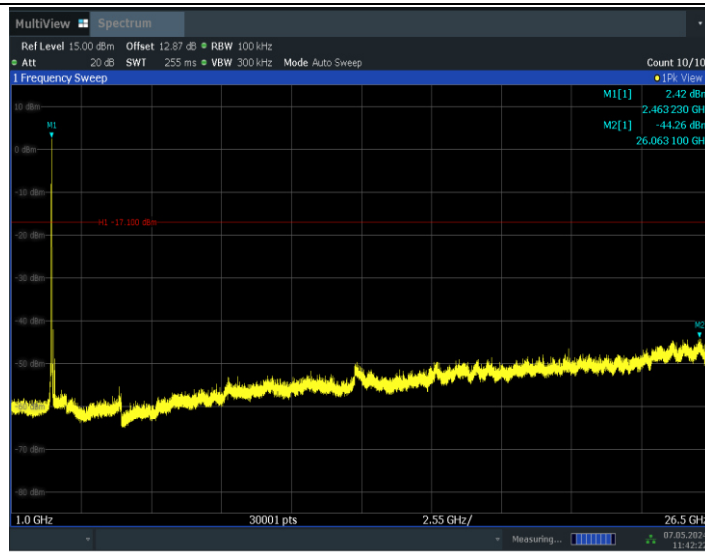


11:42:23 07.05.2024

11N40SISO_Ant1_2422_0~Reference

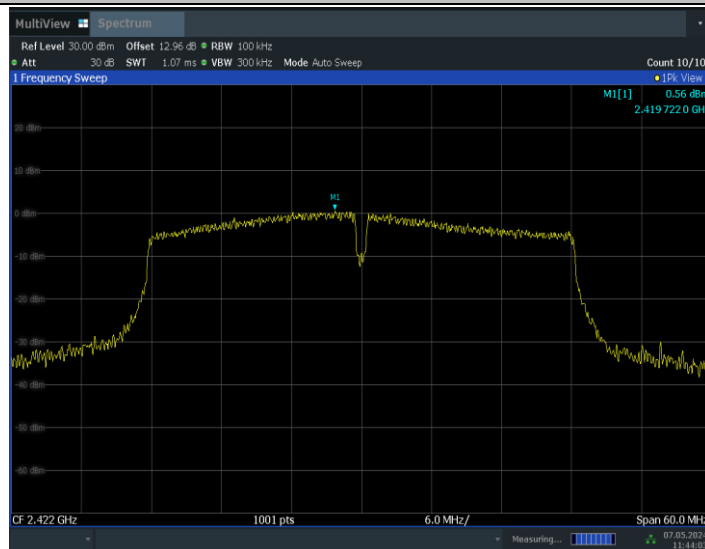


11:44:03 07.05.2024

11N40SISO_Ant1_2422_30~1000

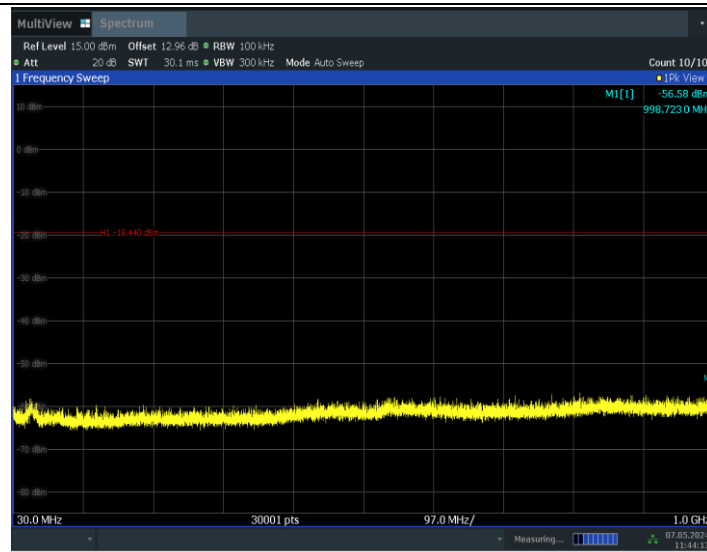


11:44:14 07.05.2024

11N40SISO_Ant1_2422_1000~26500

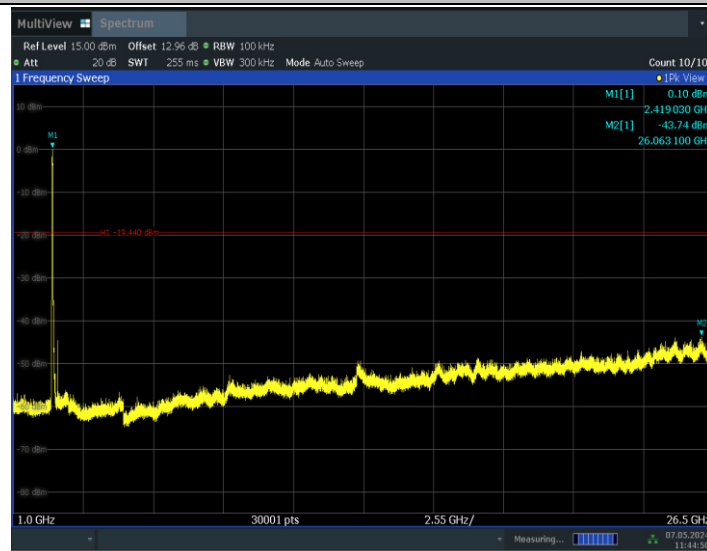


11:44:50 07.05.2024

11N40SISO_Ant1_2437_0~Reference

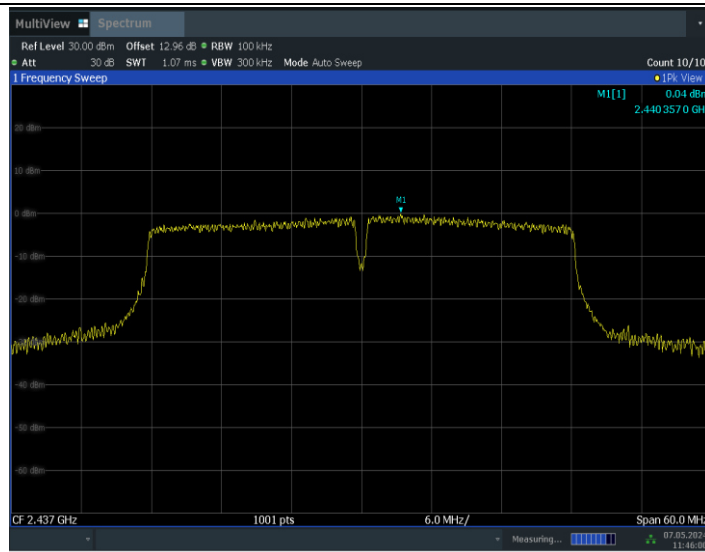


11:46:00 07.05.2024

11N40SISO_Ant1_2437_30~1000

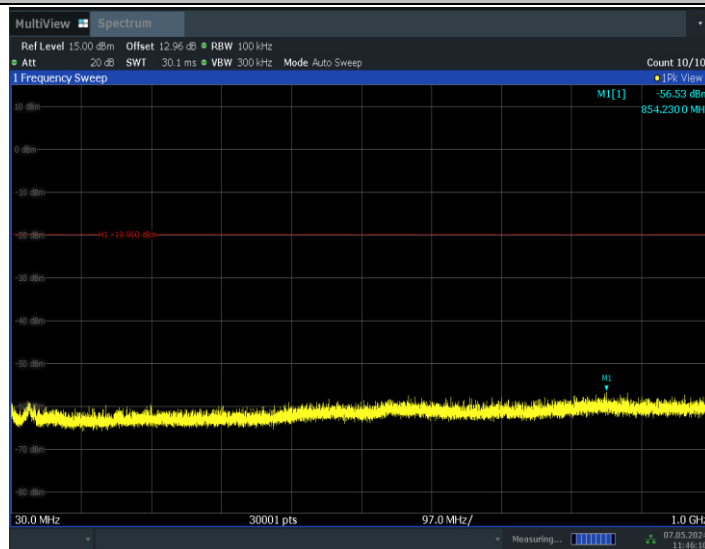


11:46:11 07.05.2024

11N40SISO_Ant1_2437_1000~26500

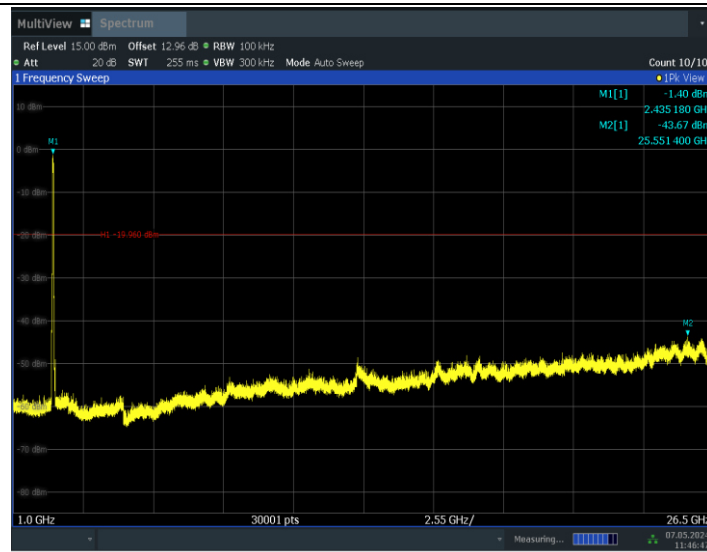


11:46:47 07.05.2024

11N40SISO_Ant1_2452_0~Reference

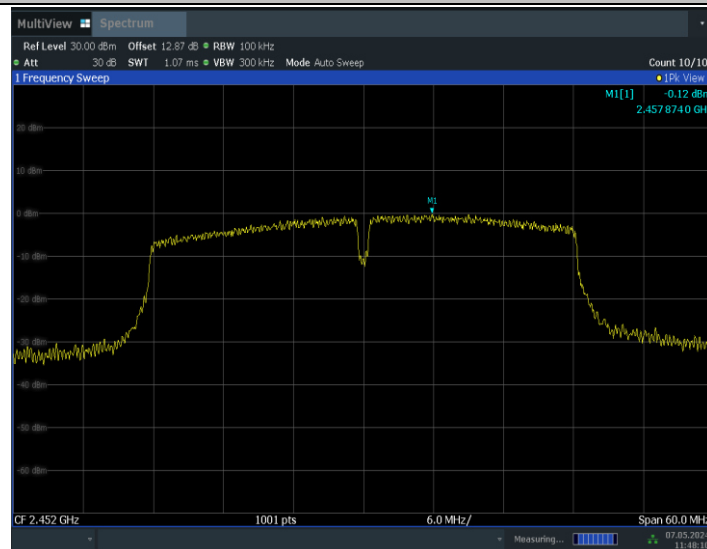


11:48:11 07.05.2024

11N40SISO_Ant1_2452_30~1000

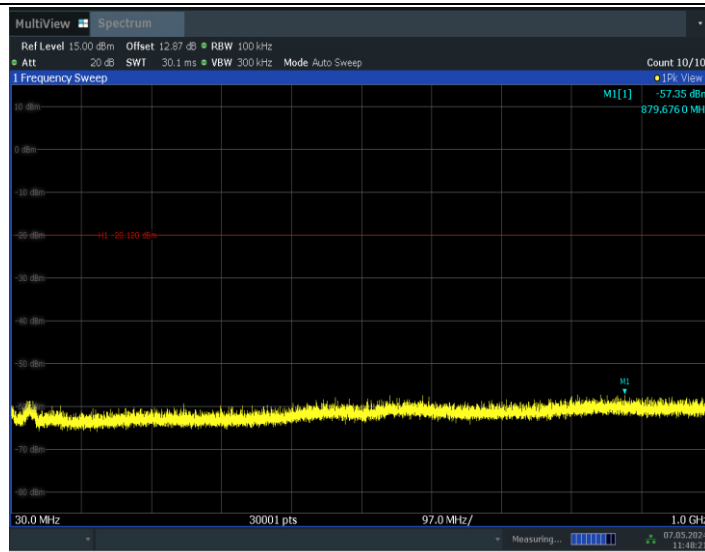

11:48:22 07.05.2024

11N40SISO_Ant1_2452_1000~26500

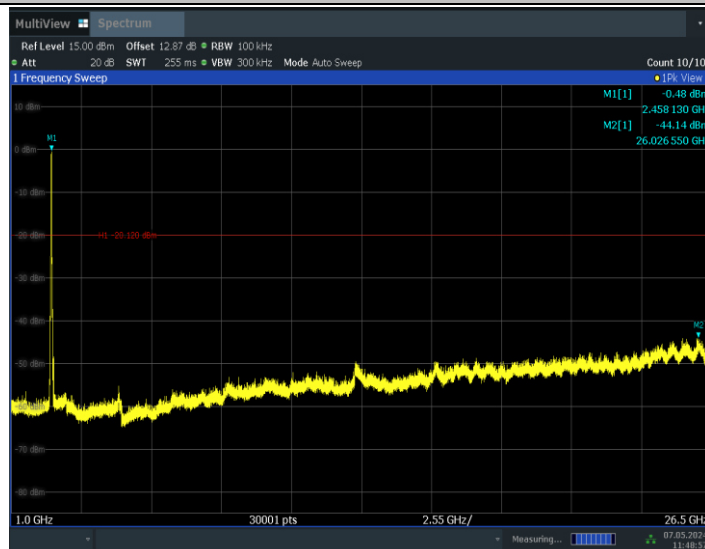

11:48:58 07.05.2024

Conclusion: Pass

A.7. Radiated Unwanted Emission

Limits

Measurement Limit

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band

Frequency (MHz)	Field strength($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength ($\mu\text{V/m}$)	Field strength (dB $\mu\text{V/m}$)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Note: When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor.

Test setup

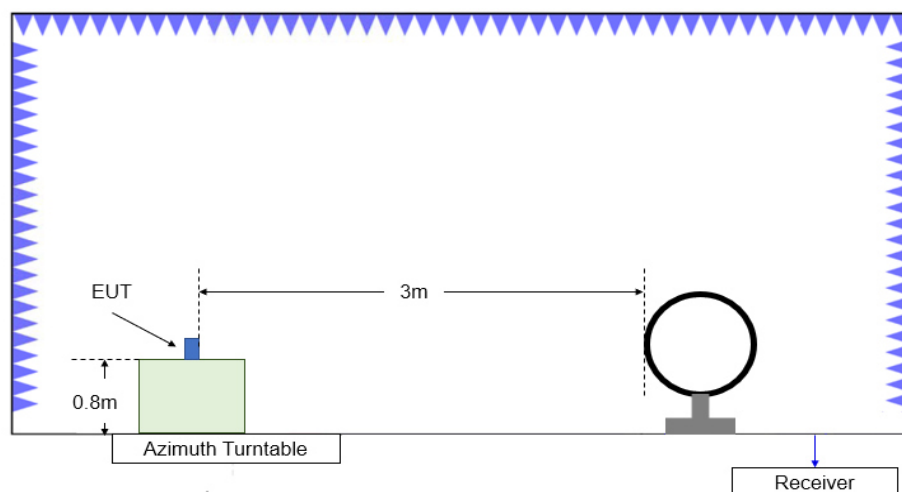


Figure A.2.1. Test Site Diagram (9kHz-30MHz)

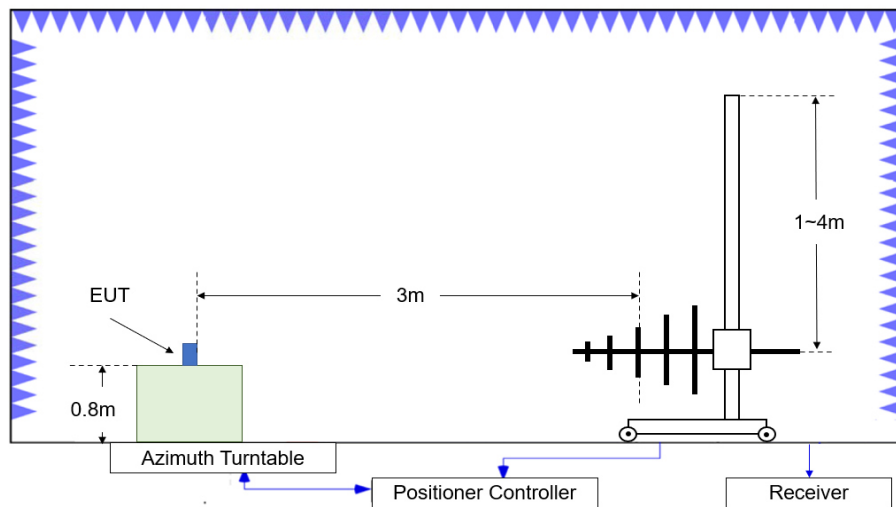


Figure A.2.2. Test Site Diagram (30MHz-1GHz)

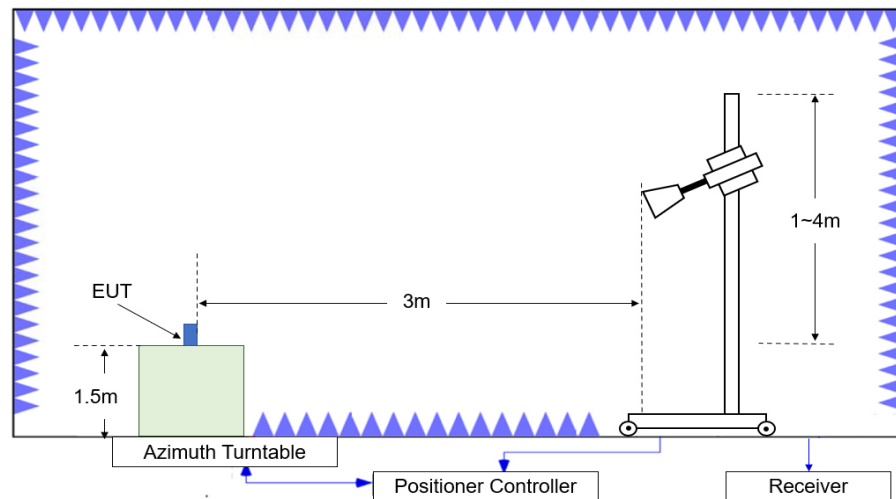


Figure A.2.3. Test Site Diagram (1GHz-40GHz)

Test Procedures

Radiated unwanted emissions from the EUT were measured according to ANSI C63.10.

Test setting

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100kHz/300kHz	5
1000-3000	1MHz/3MHz	15
3000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Sample Calculation

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

©Copyright. All rights reserved by CTTL.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + \text{Cable Loss} + \text{Antenna Factor}$$

Test note

1. The EUT is operating at its maximum duty cycle and its maximum power control level.
2. Investigation has been done on all modes and modulations/data rates. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
3. Spurious emissions for all channels were investigated and almost the same below 1GHz. According to FCC 47 CFR §15.31, emission levels are not report much lower than the limit by over 20dB
4. Measurement frequencies were performed from 9 kHz to the 10th harmonic of highest fundamental frequency or 40GHz, whichever is lower.

Test Result

Peak

802.11b

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17603.500	50.78	-29.60	45.10	35.18	74.00	23.22	V
13743.000	46.46	-31.00	41.10	36.36	74.00	27.54	V
4824.000	44.06	-37.70	33.00	48.76	74.00	29.94	H
11791.000	43.91	-32.00	39.20	36.71	74.00	30.09	V
9394.500	42.20	-34.10	37.90	38.40	74.00	31.80	V
2379.700	55.27	-19.80	28.20	46.87	74.00	18.73	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
4873.500	54.96	-37.50	33.40	59.06	74.00	19.04	H
17628.000	50.76	-29.50	45.40	34.86	74.00	23.24	V
13728.500	47.91	-31.00	41.10	37.81	74.00	26.09	V
12841.500	43.87	-31.90	39.90	35.87	74.00	30.13	V
8934.000	42.18	-33.90	37.70	38.38	74.00	31.82	V
7405.500	41.13	-35.10	36.60	39.63	74.00	32.87	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.500	51.13	-29.40	46.00	34.53	74.00	22.87	H
13762.500	47.49	-30.90	41.20	37.19	74.00	26.51	H
4923.500	44.40	-37.60	33.30	48.70	74.00	29.60	H
12780.500	43.25	-31.50	39.80	34.95	74.00	30.75	V
9486.000	41.97	-34.60	37.70	38.87	74.00	32.03	V
2487.600	58.12	-19.70	28.20	49.62	74.00	15.88	H

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17613.500	50.43	-29.60	45.10	34.83	74.00	23.57	H
13731.000	47.31	-31.00	41.10	37.21	74.00	26.69	H
12572.000	44.34	-31.20	39.20	36.34	74.00	29.66	H
9493.500	42.71	-34.60	37.70	39.61	74.00	31.29	H
7703.000	41.69	-35.90	36.30	41.29	74.00	32.31	H
2388.100	72.37	-19.80	28.20	63.97	74.00	1.63	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17614.000	50.81	-29.60	45.10	35.21	74.00	23.19	V
13717.000	46.96	-31.00	41.10	36.86	74.00	27.04	V
4873.000	46.76	-37.50	33.40	50.86	74.00	27.24	H
12905.500	43.47	-31.50	40.00	34.97	74.00	30.53	V
9582.500	43.00	-34.30	37.50	39.80	74.00	31.00	V
7315.000	41.34	-35.40	36.60	40.14	74.00	32.66	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17981.000	50.93	-29.40	46.00	34.33	74.00	23.07	H
13746.500	46.84	-31.00	41.10	36.74	74.00	27.16	H
4916.500	44.58	-37.60	33.30	48.88	74.00	29.42	H
11811.000	43.65	-32.00	39.20	36.45	74.00	30.35	V
7604.500	42.53	-35.60	36.30	41.83	74.00	31.47	V
2485.200	67.76	-19.70	28.20	59.26	74.00	6.24	H

802.11n-HT20

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17992.000	50.36	-29.40	46.00	33.76	74.00	23.64	V
13946.500	47.85	-30.60	41.40	37.05	74.00	26.15	V
12753.000	44.77	-31.80	39.60	36.87	74.00	29.23	V
8881.000	42.27	-34.80	37.80	39.27	74.00	31.73	V
4823.000	41.60	-37.70	33.00	46.30	74.00	32.40	H
2389.700	72.64	-19.80	28.20	64.24	74.00	1.36	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17618.000	51.23	-29.60	45.10	35.63	74.00	22.77	V
4873.000	48.90	-37.50	33.40	53.00	74.00	25.10	H
13718.000	47.06	-31.00	41.10	36.96	74.00	26.94	V
12655.000	43.75	-31.80	39.40	36.15	74.00	30.25	V
9482.500	42.30	-34.60	37.70	39.20	74.00	31.70	V
7198.500	41.18	-35.40	36.20	40.38	74.00	32.82	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17605.000	50.22	-29.60	45.10	34.62	74.00	23.78	H
13697.000	47.04	-31.00	41.00	37.04	74.00	26.96	V
11884.000	44.21	-32.40	39.10	37.51	74.00	29.79	H
4918.500	43.47	-37.60	33.30	47.77	74.00	30.53	H
9205.000	42.41	-34.70	37.70	39.41	74.00	31.59	V
2485.000	67.05	-19.70	28.20	58.55	74.00	6.95	H

802.11n-HT40

Ch3

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17894.000	50.77	-29.40	46.00	34.17	74.00	23.23	H
13760.000	47.35	-31.00	41.10	37.25	74.00	26.65	V
12848.500	44.09	-31.90	39.90	36.09	74.00	29.91	H
8996.000	43.00	-34.70	37.70	40.00	74.00	31.00	V
4842.500	42.35	-37.70	33.00	47.05	74.00	31.65	H
2388.900	71.02	-19.80	28.20	62.62	74.00	2.98	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17621.500	50.77	-29.60	45.10	35.17	74.00	23.23	H
13616.000	46.86	-31.30	40.90	37.26	74.00	27.14	H
12936.500	44.07	-31.40	40.00	35.47	74.00	29.93	V
4885.000	43.75	-37.50	33.40	47.85	74.00	30.25	H
8985.000	42.37	-34.70	37.70	39.37	74.00	31.63	V
7205.500	41.33	-35.40	36.20	40.53	74.00	32.67	V

Ch9

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17625.500	50.66	-29.50	45.40	34.76	74.00	23.34	V
13714.500	47.22	-31.00	41.10	37.12	74.00	26.78	V
12809.500	43.67	-31.50	39.80	35.37	74.00	30.33	V
9205.000	43.37	-34.70	37.70	40.37	74.00	30.63	V
4904.000	43.26	-37.60	33.30	47.56	74.00	30.74	H
2485.100	72.39	-19.70	28.20	63.89	74.00	1.61	H

Average
802.11b
Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
4824.000	41.51	-37.70	33.00	46.21	54.00	12.49	H
17496.000	41.03	-29.20	44.50	25.63	54.00	12.97	V
13693.500	38.18	-31.00	41.00	28.18	54.00	15.82	H
12654.000	34.17	-31.80	39.40	26.57	54.00	19.83	V
9488.000	32.45	-34.60	37.70	29.35	54.00	21.55	V
2383.500	45.20	-19.80	28.20	36.80	54.00	8.80	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
4874.000	52.86	-37.50	33.40	56.96	54.00	1.14	H
17991.500	41.16	-29.40	46.00	24.56	54.00	12.84	H
13753.500	37.30	-31.00	41.10	27.20	54.00	16.70	V
11898.000	34.01	-32.40	39.10	27.31	54.00	19.99	V
9000.000	32.28	-34.70	37.70	29.28	54.00	21.72	H
7310.500	32.23	-35.40	36.60	31.03	54.00	21.77	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
4924.000	41.66	-37.60	33.30	45.96	54.00	12.34	H
17603.500	40.88	-29.60	45.10	25.28	54.00	13.12	V
13694.500	37.66	-31.00	41.00	27.66	54.00	16.34	V
12667.000	35.08	-31.80	39.40	27.48	54.00	18.92	V
8989.000	32.39	-34.70	37.70	29.39	54.00	21.61	H
2487.600	50.62	-19.70	28.20	42.12	54.00	3.38	H

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17971.500	41.14	-29.40	46.00	24.54	54.00	12.86	V
13716.500	37.99	-31.00	41.10	27.89	54.00	16.01	H
12282.000	34.39	-32.10	39.00	27.49	54.00	19.61	H
8992.000	32.68	-34.70	37.70	29.68	54.00	21.32	V
7306.000	31.79	-35.40	36.60	30.59	54.00	22.21	V
2389.200	52.26	-19.80	28.20	43.86	54.00	1.74	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17499.500	40.98	-29.20	44.50	25.58	54.00	13.02	V
4877.000	37.98	-37.50	33.40	42.08	54.00	16.02	H
13679.500	37.65	-31.00	41.00	27.65	54.00	16.35	H
12775.000	34.57	-31.50	39.80	26.27	54.00	19.43	H
8875.000	32.47	-34.80	37.80	29.47	54.00	21.53	H
7220.000	31.75	-35.40	36.20	30.95	54.00	22.25	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17611.500	41.12	-29.60	45.10	25.52	54.00	12.88	V
13746.500	37.37	-31.00	41.10	27.27	54.00	16.63	V
12649.000	34.23	-31.80	39.40	26.63	54.00	19.77	V
9007.500	32.87	-34.70	37.70	29.87	54.00	21.13	V
4917.000	32.61	-37.60	33.30	36.91	54.00	21.39	H
2485.800	51.01	-19.70	28.20	42.51	54.00	2.99	H

802.11n-HT20

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17951.000	41.38	-29.40	46.00	24.78	54.00	12.62	H
13699.000	37.85	-31.00	41.00	27.85	54.00	16.15	V
12268.500	34.49	-32.50	39.00	27.99	54.00	19.51	H
9492.500	33.24	-34.60	37.70	30.14	54.00	20.76	H
7325.000	32.48	-35.40	36.60	31.28	54.00	21.52	V
2389.900	48.40	-19.80	28.20	40.00	54.00	5.60	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17629.000	40.92	-29.50	45.40	25.02	54.00	13.08	H
4877.500	39.21	-37.50	33.40	43.31	54.00	14.79	H
13708.000	37.43	-31.00	41.00	27.43	54.00	16.57	V
12738.500	34.43	-31.80	39.60	26.53	54.00	19.57	V
8981.500	32.77	-34.70	37.70	29.77	54.00	21.23	H
7517.500	32.04	-35.10	36.40	30.74	54.00	21.96	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17580.500	41.23	-29.60	45.10	25.63	54.00	12.77	V
14096.500	37.74	-30.20	41.70	26.24	54.00	16.26	H
12786.500	34.42	-31.50	39.80	26.12	54.00	19.58	V
4914.000	33.95	-37.60	33.30	38.25	54.00	20.05	H
9411.500	32.68	-33.60	37.90	28.38	54.00	21.32	V
2485.200	49.27	-19.70	28.20	40.77	54.00	4.73	H

802.11n-HT40

Ch3

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17505.500	41.59	-29.20	44.50	26.19	54.00	12.41	H
13697.500	37.76	-31.00	41.00	27.76	54.00	16.24	V
12649.000	34.21	-31.80	39.40	26.61	54.00	19.79	V
4842.500	33.46	-37.70	33.00	38.16	54.00	20.54	H
9407.500	33.13	-33.60	37.90	28.83	54.00	20.87	V
2389.700	52.93	-19.80	28.20	44.53	54.00	1.07	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17988.000	41.33	-29.40	46.00	24.73	54.00	12.67	V
13755.500	37.65	-31.00	41.10	27.55	54.00	16.35	V
12269.000	34.36	-32.50	39.00	27.86	54.00	19.64	H
4879.500	34.33	-37.50	33.40	38.43	54.00	19.67	H
8996.500	33.21	-34.70	37.70	30.21	54.00	20.79	V
7309.000	32.48	-35.40	36.60	31.28	54.00	21.52	V

Ch9

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.000	40.98	-29.40	46.00	24.38	54.00	13.02	H
13779.000	37.48	-30.90	41.20	27.18	54.00	16.52	V
12639.500	34.83	-31.80	39.40	27.23	54.00	19.17	V
4904.000	34.50	-37.60	33.30	38.80	54.00	19.50	H
8728.500	33.12	-34.80	37.90	30.02	54.00	20.88	V
2485.100	50.02	-19.70	28.20	41.52	54.00	3.98	H

Band edge compliance

802.11b mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.31GHz~2.43GHz---L	Fig.A.7.1	P
	11	2.45GHz~2.50GHz---H	Fig.A.7.2	P

802.11g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	1	2.31GHz~2.43GHz---L	Fig.A.7.3	P
	11	2.45GHz~2.50GHz---H	Fig.A.7.4	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	1	2.31GHz~2.43GHz---L	Fig.A.7.5	P
	11	2.45GHz~2.50GHz---H	Fig.A.7.6	P

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT40)	3	2.31GHz~2.43GHz---L	Fig.A.7.7	P
	9	2.45GHz~2.50GHz---H	Fig.A.7.8	P

Test graphs as below:

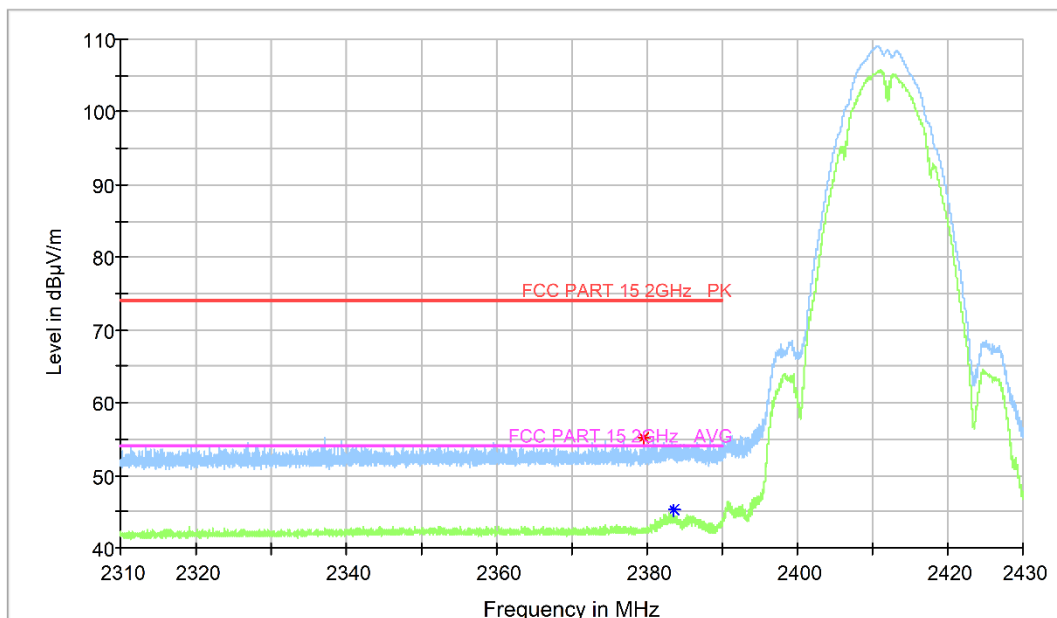


Fig. 7.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.31 GHz – 2.43GHz

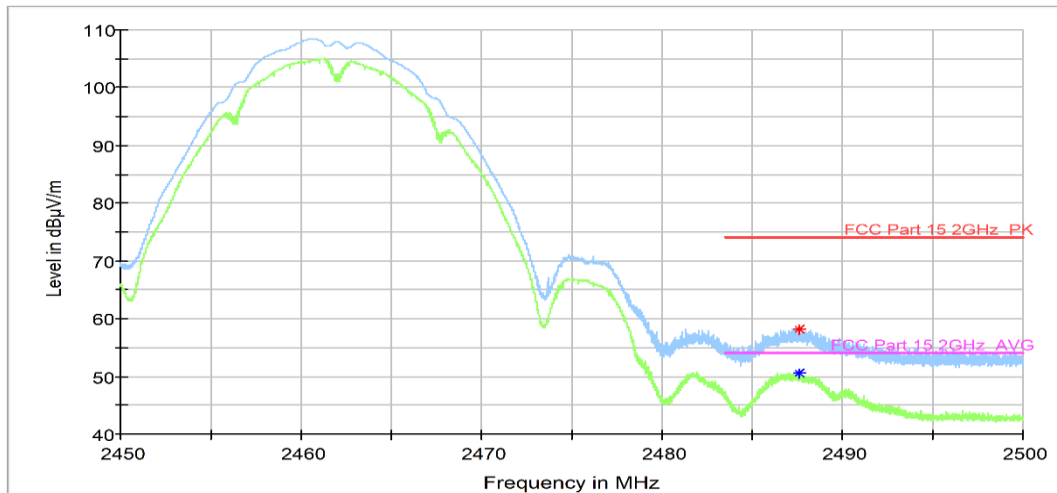


Fig. 7.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

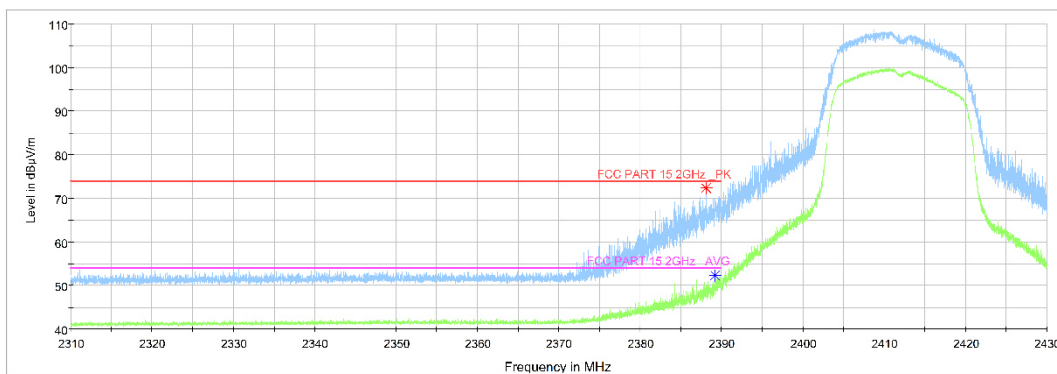


Fig. 7.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.31 GHz - 2.43GHz

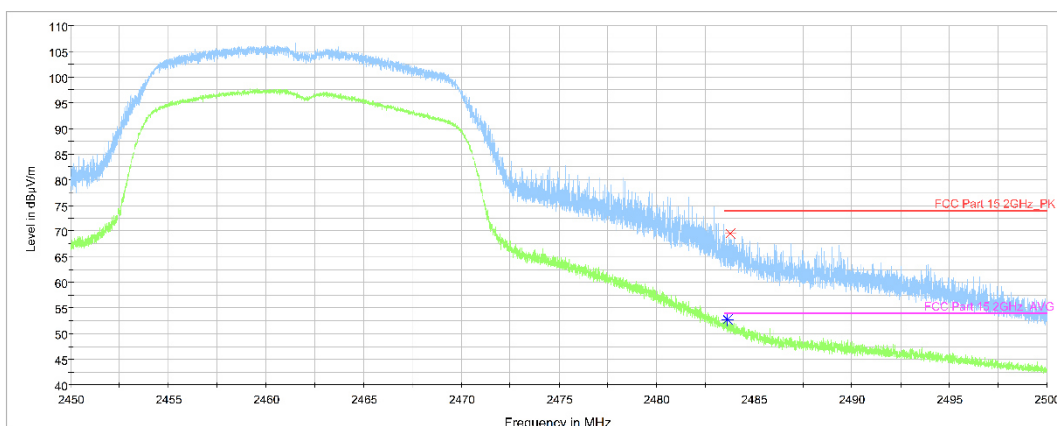


Fig. 7.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz