

Date: 2026-01-02

01_LTE Band 12_10M_QPSK_1RB_0Offset_Left Cheek_Ch23095


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
AntennaCfg:SISO; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 44.0$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.173 W/kg; SAR (10g) = 0.120 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.12 dB
SAR (1g) = 0.174 W/kg; SAR (10g) = 0.110 W/kg
Smallest distance from peaks to all points 3 dB below = 13.2 mm
Ratio of SAR at M2 to SAR at M1 = 88.0 %

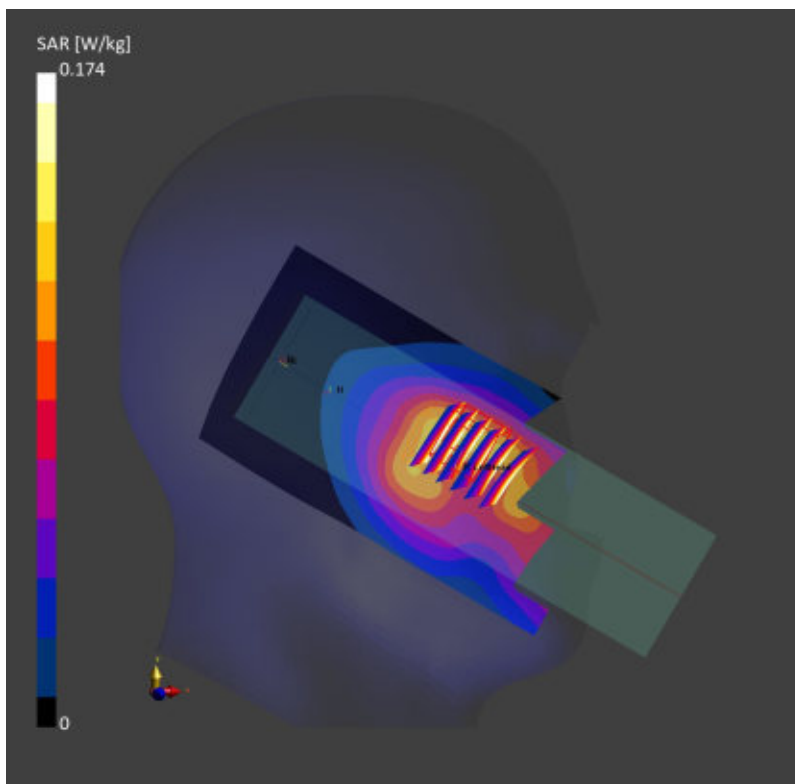

Date: 2026-01-02

02_LTE Band 14_10M_QPSK_1RB_0Offset_Left Cheek_Ch23330

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 793.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 793.0$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 43.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.365 W/kg; SAR (10g) = 0.250 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.378 W/kg; SAR (10g) = 0.285 W/kg

Smallest distance from peaks to all points 3 dB below = 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 94.5 %

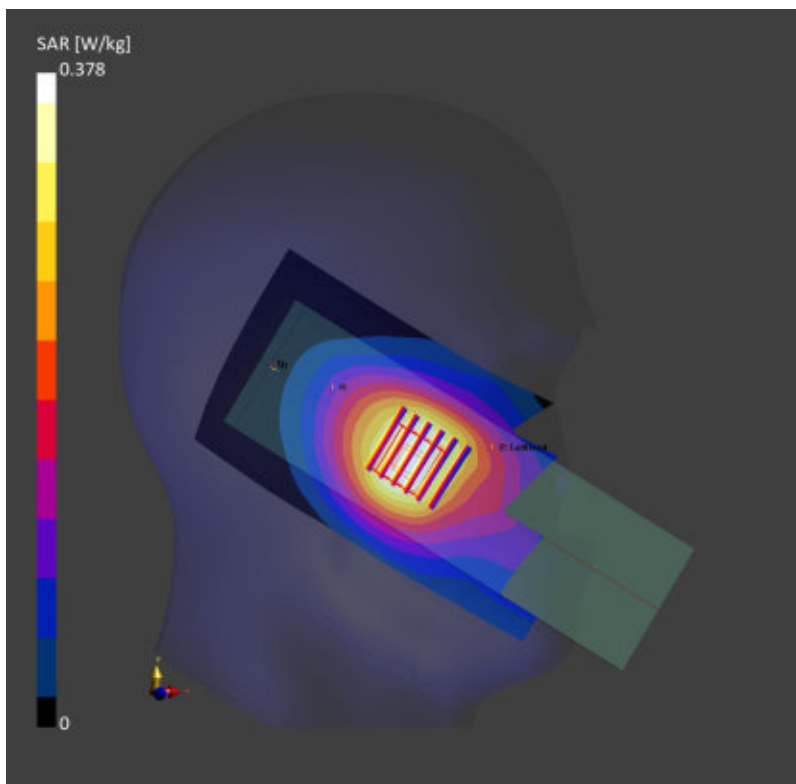

Date: 2026-01-03

03_WCDMA V_RMC 12.2Kbps_Left Cheek_Ch4182


Communication System: UMTS-FDD (WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.606 W/kg; SAR (10g) = 0.412 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.13 dB
SAR (1g) = 0.635 W/kg; SAR (10g) = 0.483 W/kg
Smallest distance from peaks to all points 3 dB below = 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 95.6 %

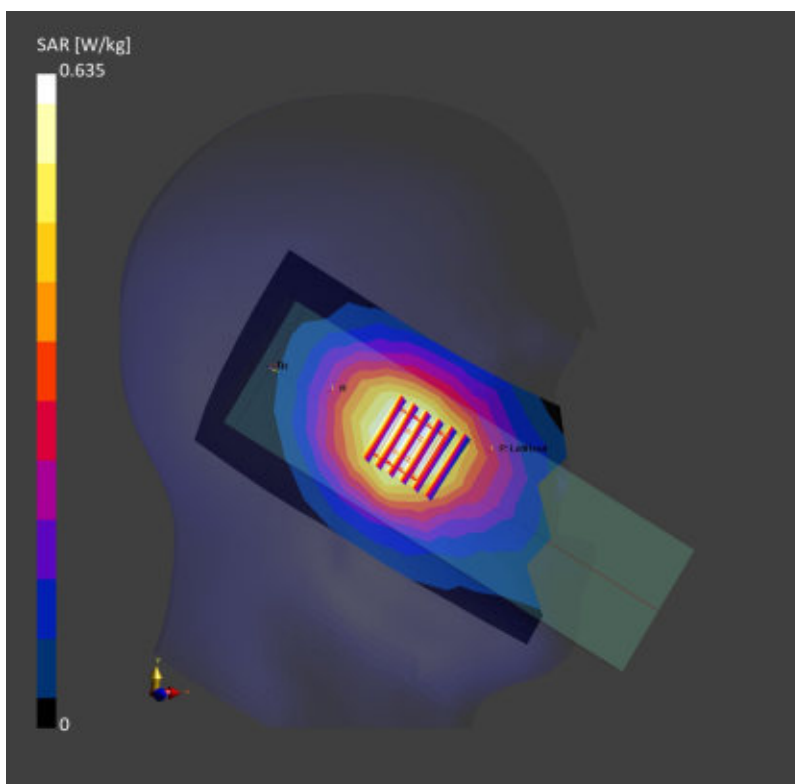

Date: 2026-01-03

04_LTE Band 5_10M_QPSK_1RB_0Offset_Left Cheek_Ch20525


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
AntennaCfg:SISO; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.620 W/kg; SAR (10g) = 0.421 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.13 dB
SAR (1g) = 0.648 W/kg; SAR (10g) = 0.493 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 96.0 %

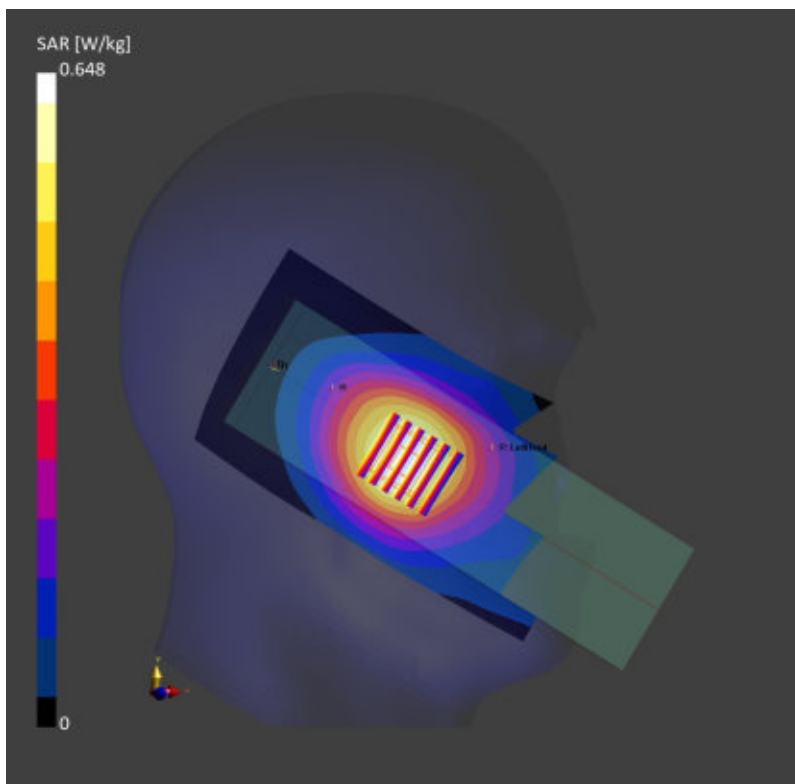

Date: 2026-01-03

05_FR1 n5_20M_QPSK_1RB_53Offset_DFT-15_Left Cheek_Ch167300


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (90.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.607 W/kg; SAR (10g) = 0.413 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.13 dB
SAR (1g) = 0.627 W/kg; SAR (10g) = 0.477 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 95.9 %

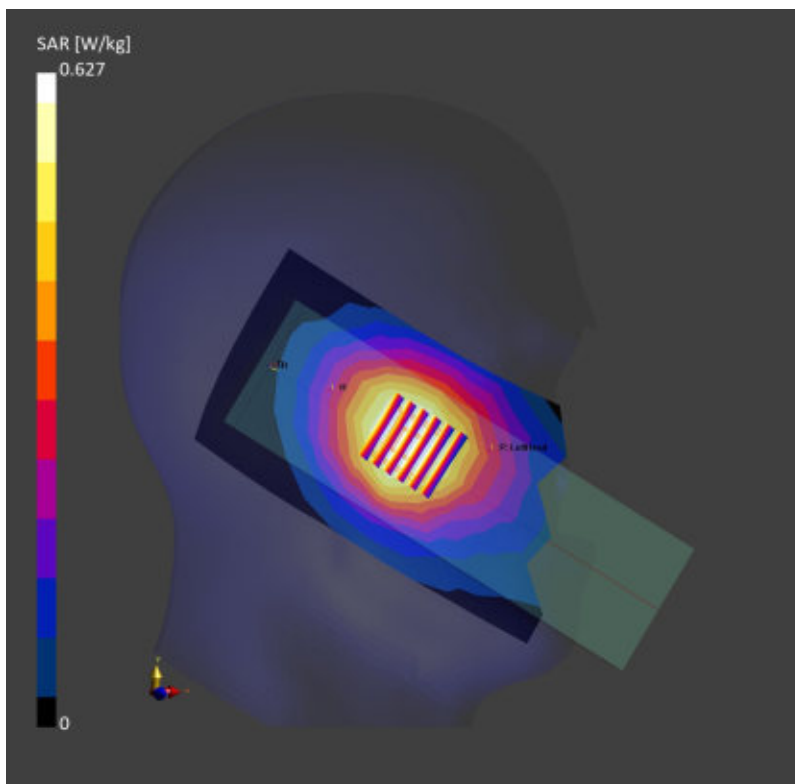

Date: 2026-01-05

06_WCDMA IV_RMC 12.2Kbps_Left Cheek_Ch1413


Communication System: UMTS-FDD (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.147 W/kg; SAR (10g) = 0.094 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = 0.12 dB
 SAR (1g) = 0.159 W/kg; SAR (10g) = 0.112 W/kg
 Smallest distance from peaks to all points 3 dB below = 17.2 mm
 Ratio of SAR at M2 to SAR at M1 = 93.5 %

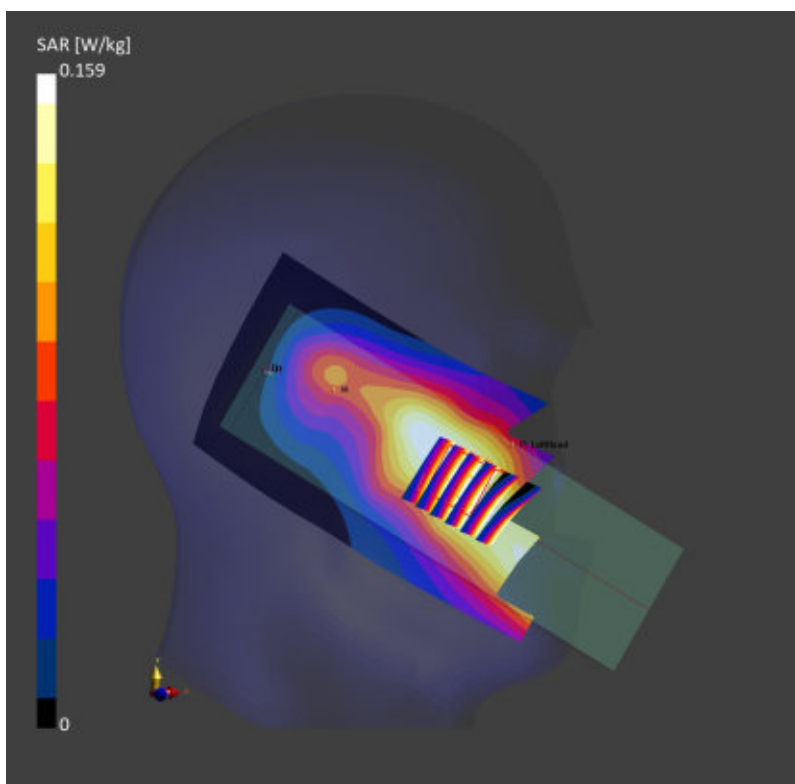

Date: 2026-01-05

07_LTE Band 66_20M_QPSK_1RB_0Offset_Left Cheek_Ch132322

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1745.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1745.0$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.158 W/kg; SAR (10g) = 0.097 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.170 W/kg; SAR (10g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 24.9 mm

Ratio of SAR at M2 to SAR at M1 = 94.9 %

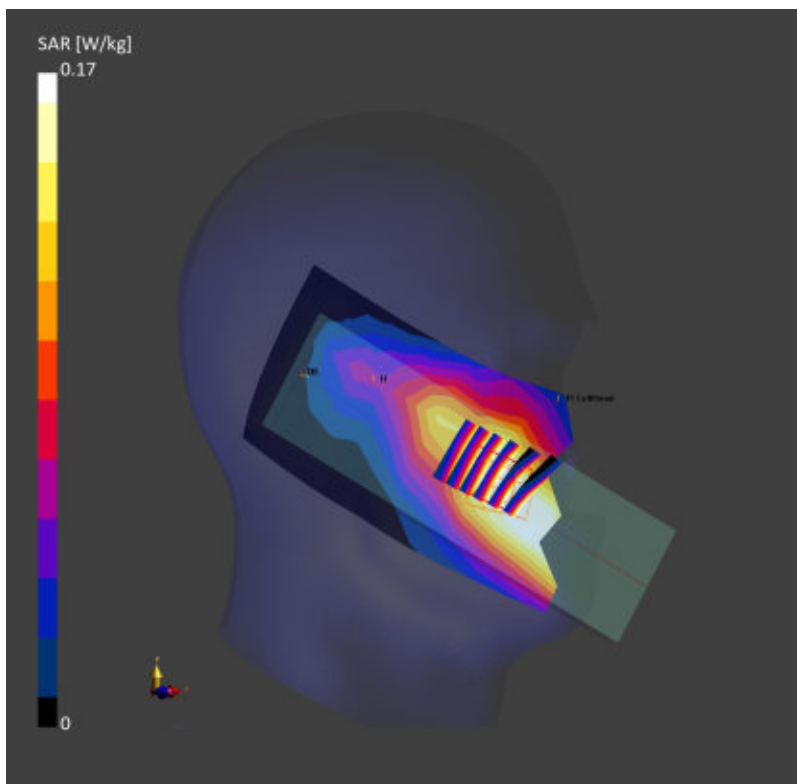

Date: 2026-01-05

08_FR1 n66_40M_QPSK_1RB_1Offset_DFT-15_Left Cheek_Ch349000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 1745.0 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1745.0$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (90.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.152 W/kg; SAR (10g) = 0.096 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.163 W/kg; SAR (10g) = 0.112 W/kg
Smallest distance from peaks to all points 3 dB below = 18.2 mm
Ratio of SAR at M2 to SAR at M1 = 93.5 %

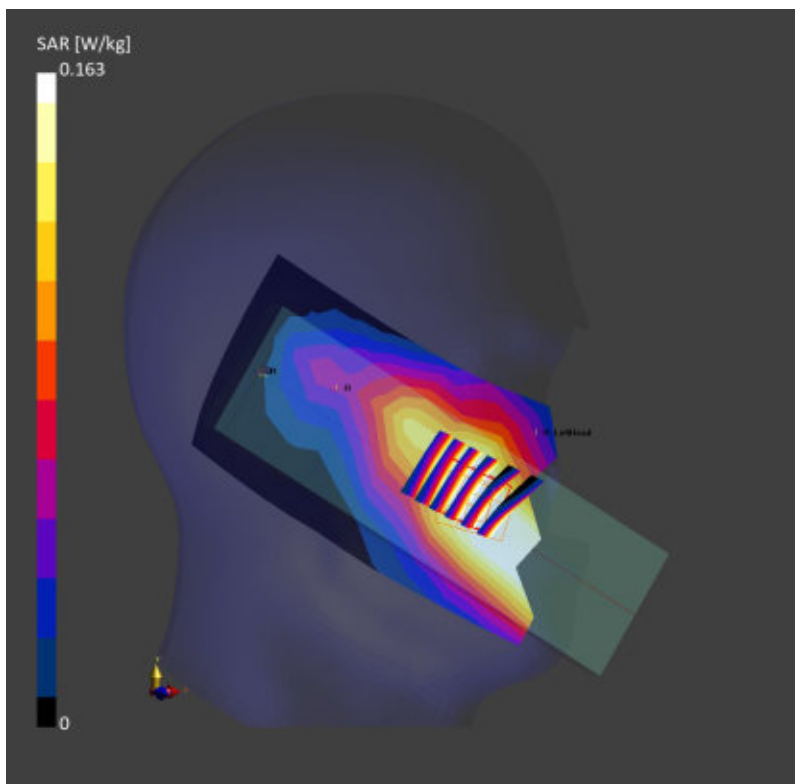

Date: 2026-01-07

09_WCDMA II_RMC 12.2Kbps_Left Cheek_Ch9400


Communication System: UMTS-FDD (WCDMA); Frequency: 1880.0 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.162 W/kg; SAR (10g) = 0.102 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = 0.12 dB
 SAR (1g) = 0.176 W/kg; SAR (10g) = 0.123 W/kg
 Smallest distance from peaks to all points 3 dB below = 17.7 mm
 Ratio of SAR at M2 to SAR at M1 = 93.4 %

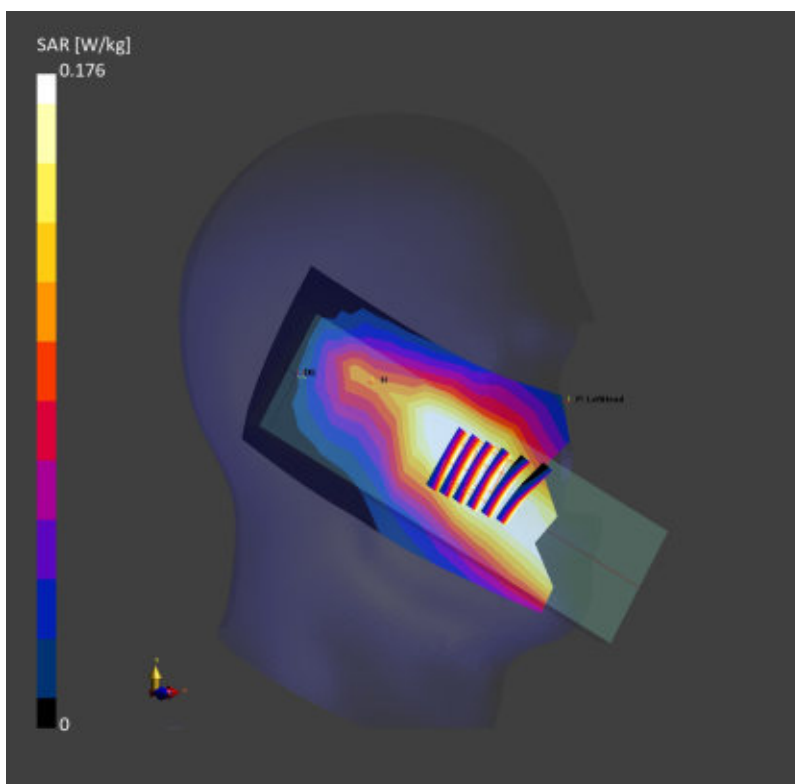

Date: 2026-01-07

10_LTE Band 2_20M_QPSK_1RB_0Offset_Left Cheek_Ch18900

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1880.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.169 W/kg; SAR (10g) = 0.104 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 0.192 W/kg; SAR (10g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 16.1 mm

Ratio of SAR at M2 to SAR at M1 = 93.0 %

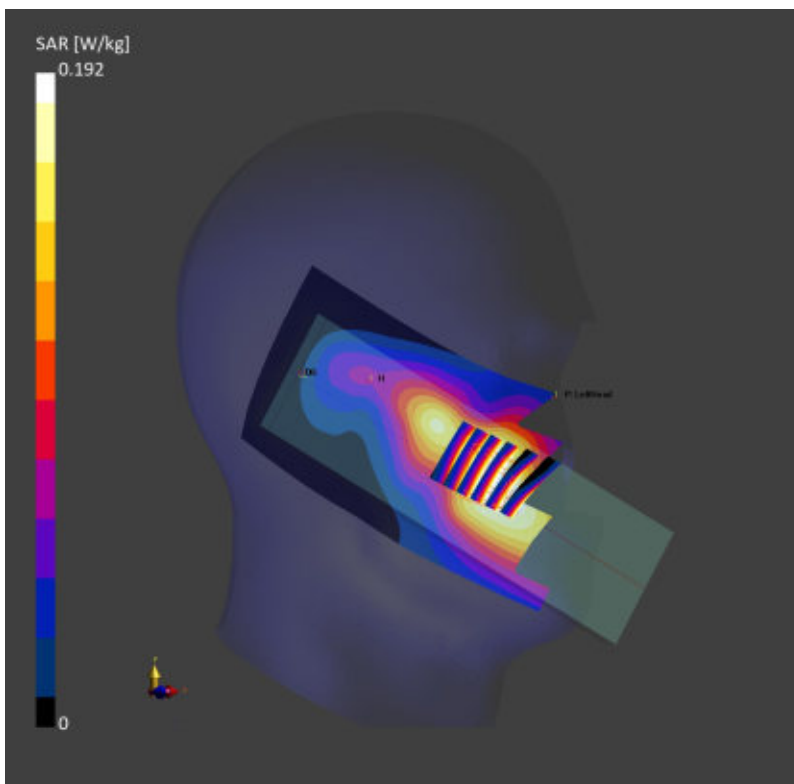

Date: 2026-01-07

11_FR1 n2_40M_QPSK_1RB_1Offset_DFT-15_Right Cheek_Ch376000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 1880.0 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (90.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.194 W/kg; SAR (10g) = 0.116 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.08 dB
SAR (1g) = 0.223 W/kg; SAR (10g) = 0.145 W/kg
Smallest distance from peaks to all points 3 dB below = 16.0 mm
Ratio of SAR at M2 to SAR at M1 = 84.1 %

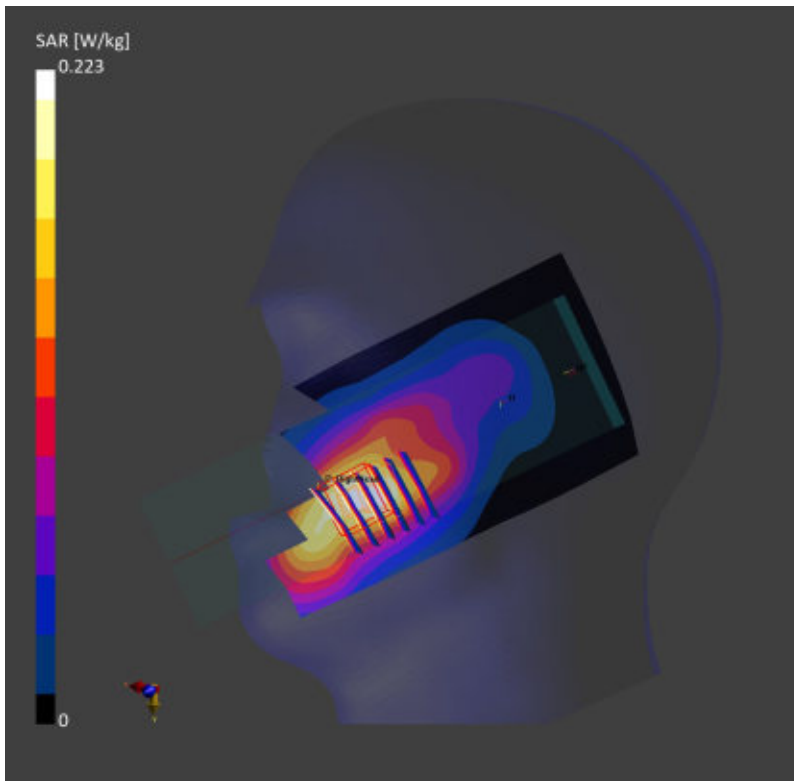

Date: 2026-01-06

12_LTE Band 30_10M_QPSK_1RB_0Offset_Left Cheek_Ch27710

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2310.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2310.0$ MHz; $\sigma = 1.71$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.24, 8.09, 8.13); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (100.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.440 W/kg; SAR (10g) = 0.244 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.453 W/kg; SAR (10g) = 0.265 W/kg

Smallest distance from peaks to all points 3 dB below = 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 87.0 %

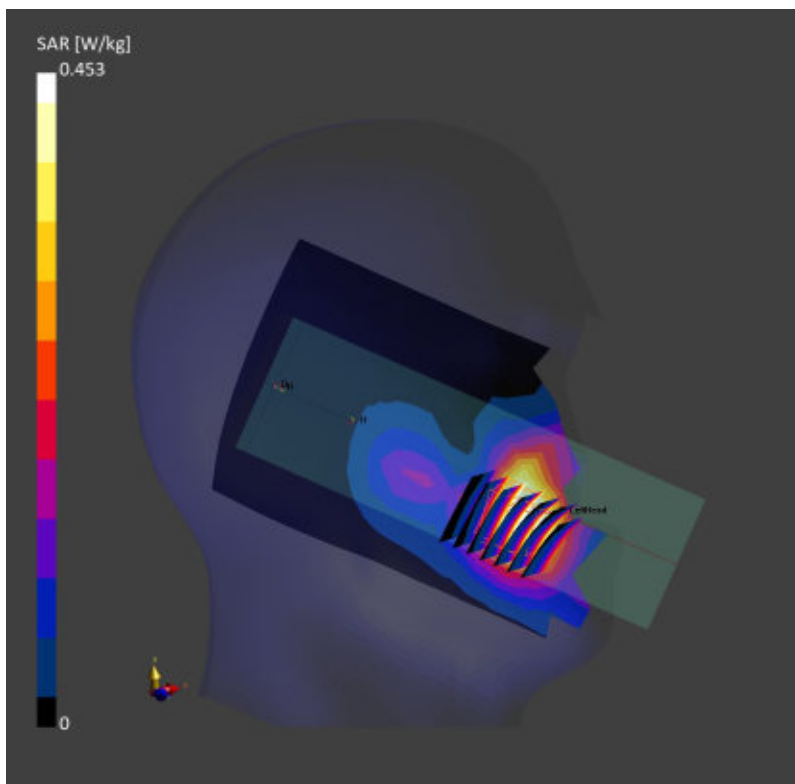

Date: 2026-01-06

13_FR1 n30_10M_QPSK_1RB_1Offset_DFT-15_Left Cheek_Ch462000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 2310.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2310.0$ MHz; $\sigma = 1.71$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.24, 8.09, 8.13); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (100.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.375 W/kg; SAR (10g) = 0.206 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.384 W/kg; SAR (10g) = 0.224 W/kg

Smallest distance from peaks to all points 3 dB below = 15.4 mm

Ratio of SAR at M2 to SAR at M1 = 87.5 %

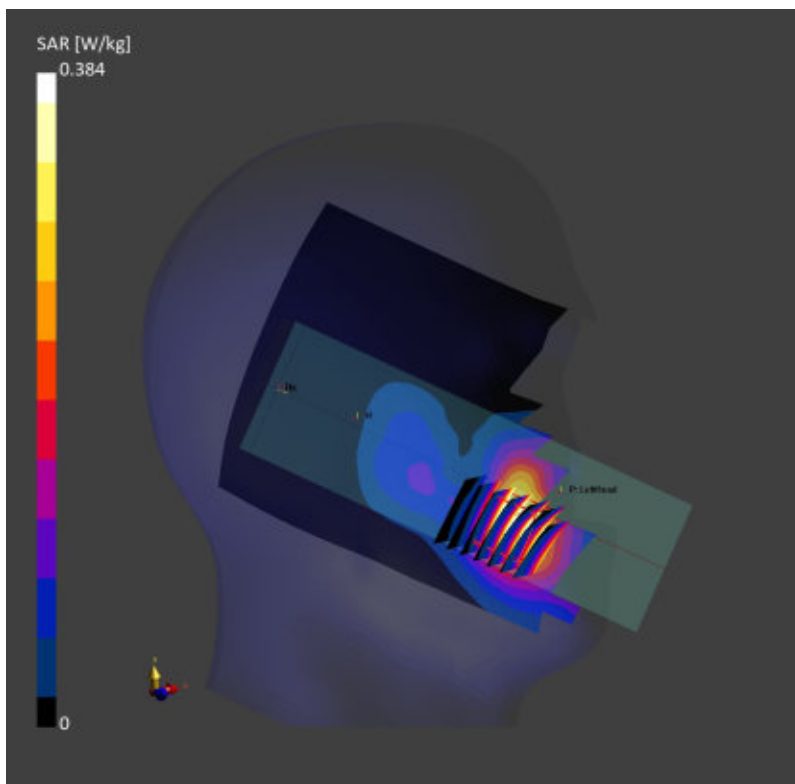

Date: 2026-01-05

14_LTE Band 7_20M_QPSK_1RB_0Offset_Left Cheek_Ch21100

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2535.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2535.0$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.9, 7.75, 7.79); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (100.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.078 W/kg; SAR (10g) = 0.042 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.079 W/kg; SAR (10g) = 0.044 W/kg

Smallest distance from peaks to all points 3 dB below = 14.7 mm

Ratio of SAR at M2 to SAR at M1 = 88.0 %

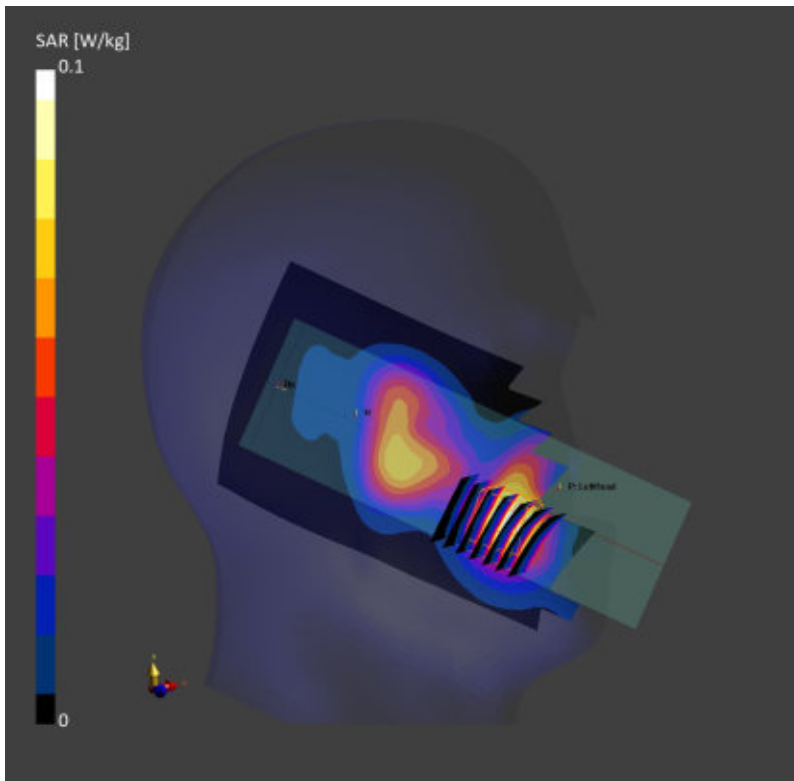

Date: 2026-01-04

15_FR1 n77_100M_QPSK_1RB_1Offset_DFT-30_Left Cheek_Ch650000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)

AntennaCfg:SISO; Frequency: 3750.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 3750.0$ MHz; $\sigma = 2.95$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.85, 6.72, 6.76); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (100.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.681 W/kg; SAR (10g) = 0.286 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 0.736 W/kg; SAR (10g) = 0.301 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 78.9 %

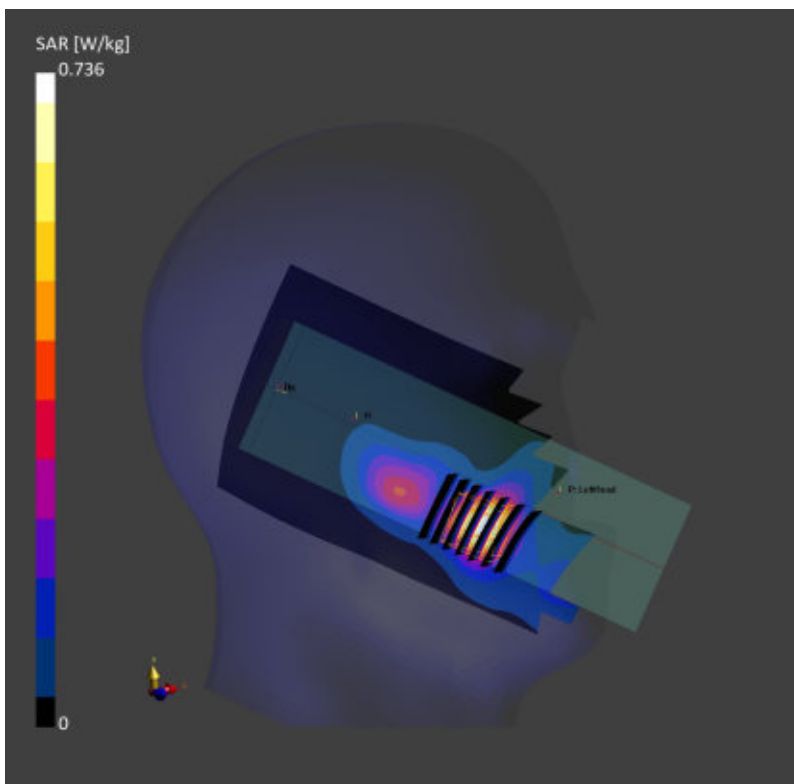

Date: 2026-01-03

16_Bluetooth_DH5 1Mbps_Right Cheek_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2441.0 MHz; Duty Cycle: 1:1.544

Medium: HSL Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: Bluetooth, 10032-CAA

Area Scan (100.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.035 W/kg; SAR (10g) = 0.017 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.16 dB

SAR (1g) = 0.036 W/kg; SAR (10g) = 0.018 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.7 %

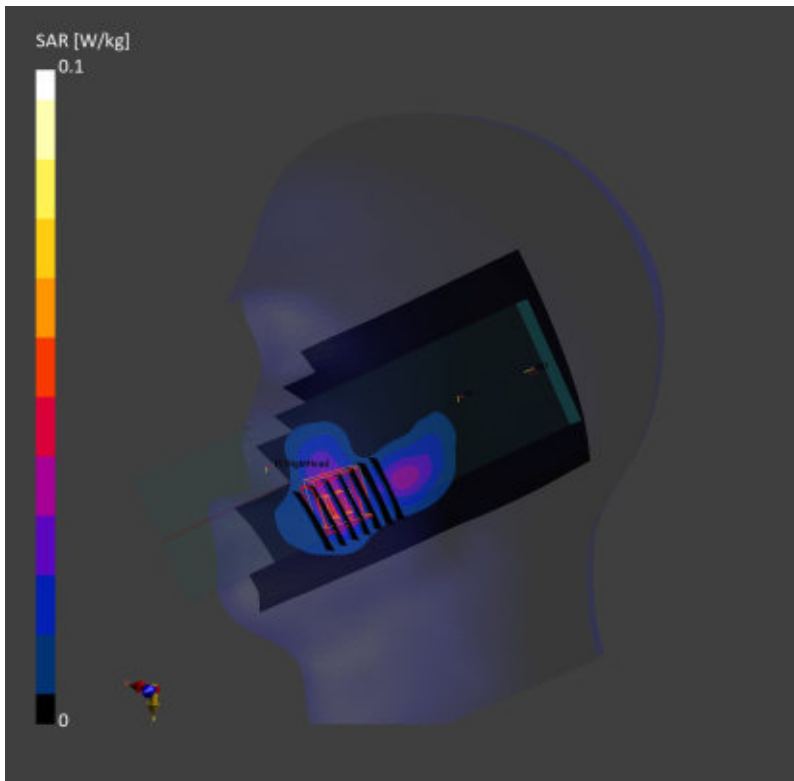

Date: 2026-01-03

17_WLAN2.4GHz_802.11b 1Mbps_Right Cheek_Ch6


Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437.0 MHz;
Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2437.0$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 41.0$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10415-AAA

Area Scan (100.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.301 W/kg; SAR (10g) = 0.147 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.10 dB
SAR (1g) = 0.312 W/kg; SAR (10g) = 0.160 W/kg
Smallest distance from peaks to all points 3 dB below = 9.9 mm
Ratio of SAR at M2 to SAR at M1 = 87.7 %

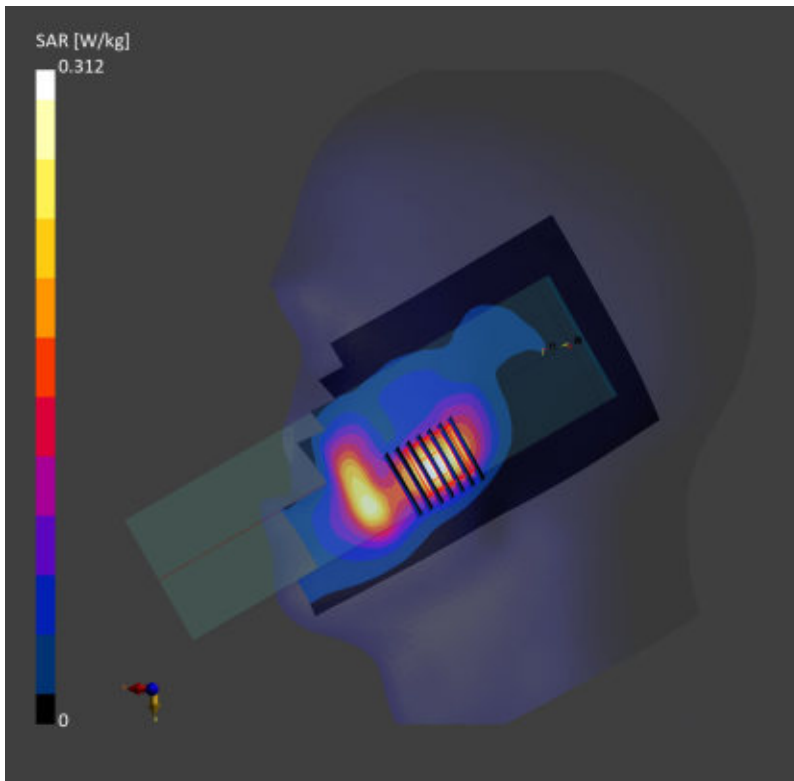

Date: 2026-01-07

18_WLAN5GHz_802.11a 6Mbps_Right Cheek_Ch52


Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5260.0 MHz; Duty Cycle: 1:1.026
Medium: HSL Medium parameters used: $f = 5260.0$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 36.2$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.0); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10417-AAC

Area Scan (100.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.332 W/kg; SAR (10g) = 0.112 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.05 dB
SAR (1g) = 0.345 W/kg; SAR (10g) = 0.121 W/kg
Smallest distance from peaks to all points 3 dB below = 7.1 mm
Ratio of SAR at M2 to SAR at M1 = 70.6 %

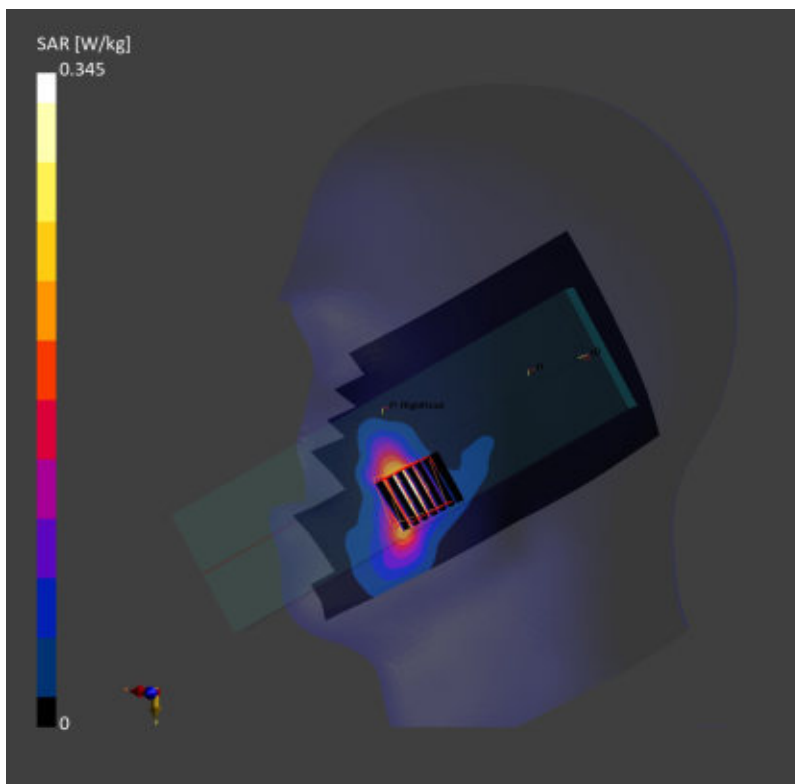

Date: 2026-01-09

19_WLAN5GHz_802.11n-HT40 MCS0_Right Cheek_Ch110

Communication System: IEEE 802.11n (HT Mixed, 40MHz, MCS0, 99pc duty cycle);

Frequency: 5550.0 MHz; Duty Cycle: 1:1.054

Medium: HSL Medium parameters used: $f = 5550.0$ MHz; $\sigma = 4.94$ S/m; $\epsilon_r = 35.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.54, 5.44, 5.47); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10599-AAC

Area Scan (100.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.288 W/kg; SAR (10g) = 0.093 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.12 dB

SAR (1g) = 0.305 W/kg; SAR (10g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.7 %

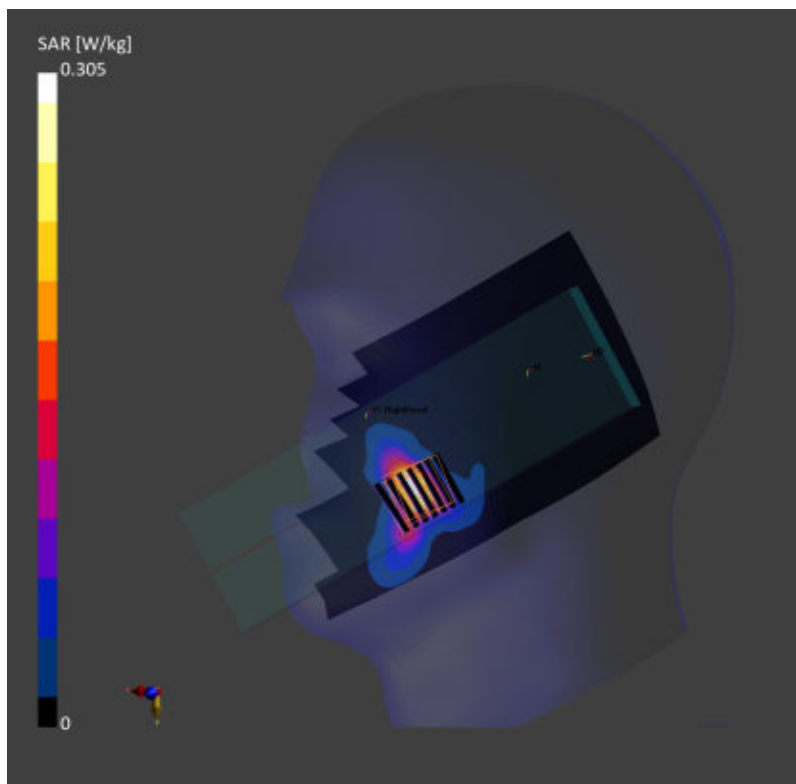

Date: 2026-01-08

20_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_Ch155


Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5775.0 MHz; Duty Cycle: 1:1.107
Medium: HSL Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 35.3$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.52, 5.42, 5.44); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10544-AAC

Area Scan (100.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.270 W/kg; SAR (10g) = 0.077 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.15 dB
SAR (1g) = 0.285 W/kg; SAR (10g) = 0.078 W/kg
Smallest distance from peaks to all points 3 dB below = 5.8 mm
Ratio of SAR at M2 to SAR at M1 = 62.5 %

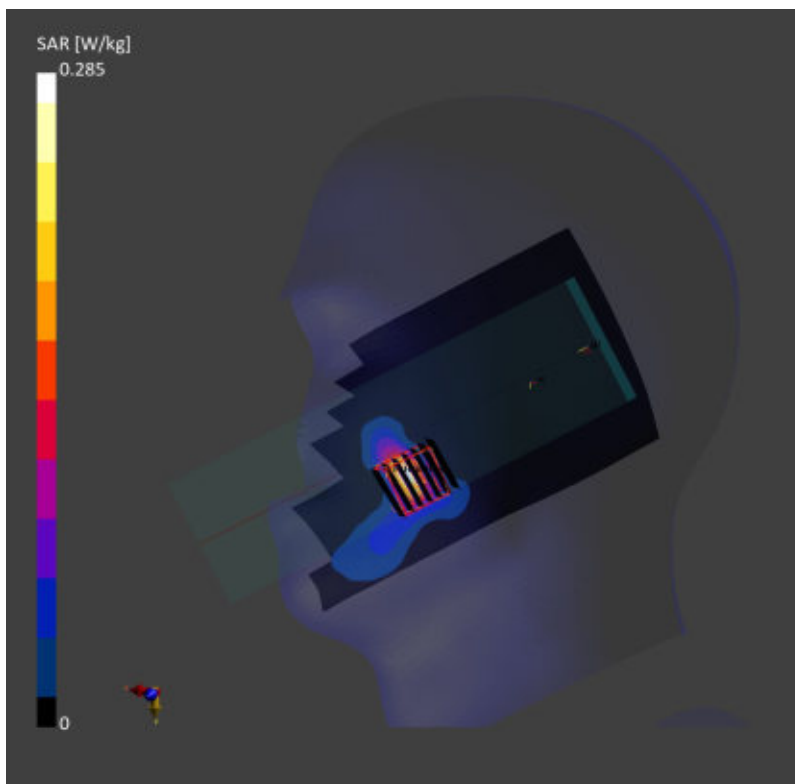

Date: 2026-01-02

21_LTE Band 12_10M_QPSK_1RB_0Offset_Back_10mm_Ch23095


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
 AntennaCfg:SISO; Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 44.0$
 Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.745 W/kg; SAR (10g) = 0.513 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.05 dB
 SAR (1g) = 0.760 W/kg; SAR (10g) = 0.530 W/kg
 Smallest distance from peaks to all points 3 dB below = > 15.0 mm
 Ratio of SAR at M2 to SAR at M1 = 88.3 %

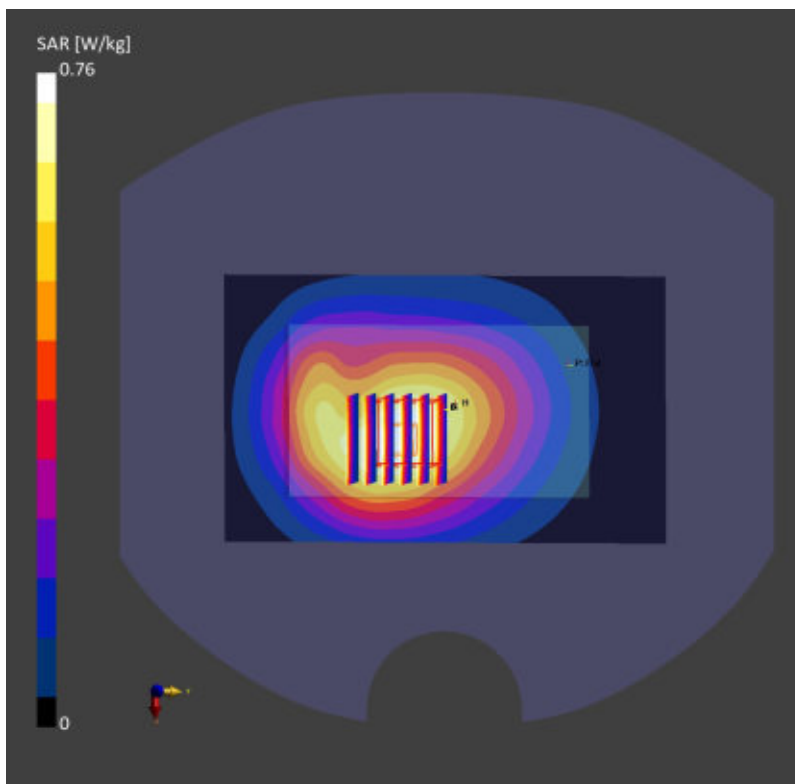

Date: 2026-01-02

22_LTE Band 14_10M_QPSK_1RB_0Offset_Back_10mm_Ch23330


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
 AntennaCfg:SISO; Frequency: 793.0 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 793.0$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 43.7$
 Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.833 W/kg; SAR (10g) = 0.573 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = 0.05 dB
 SAR (1g) = 0.875 W/kg; SAR (10g) = 0.628 W/kg
 Smallest distance from peaks to all points 3 dB below = > 15.0 mm
 Ratio of SAR at M2 to SAR at M1 = 90.0 %

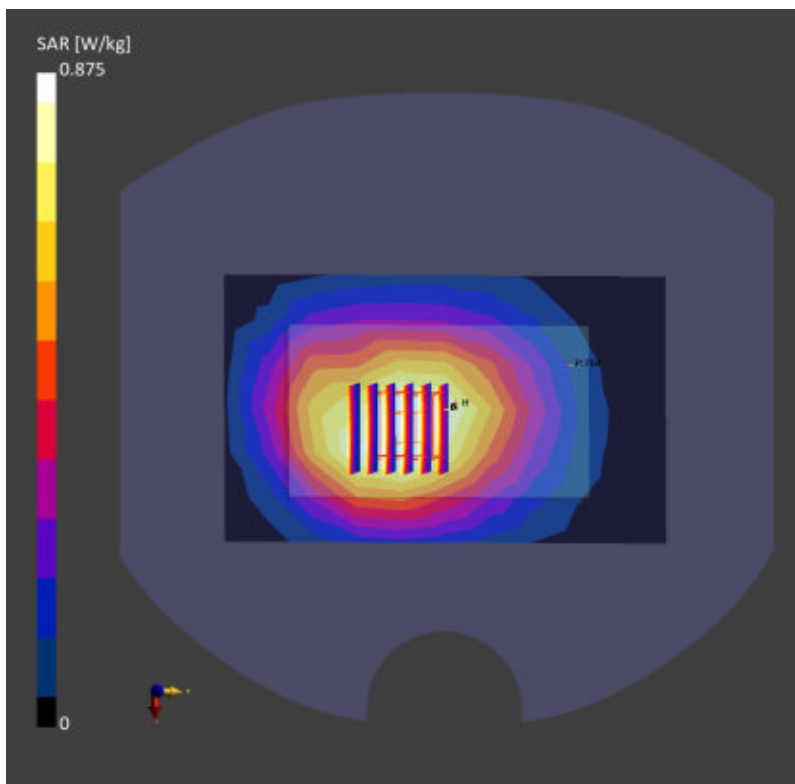

Date: 2026-01-03

23_WCDMA V_RMC 12.2Kbps_Back_10mm_Ch4132


Communication System: UMTS-FDD (WCDMA); Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.713 W/kg; SAR (10g) = 0.490 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.09 dB
SAR (1g) = 0.802 W/kg; SAR (10g) = 0.547 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 90.5 %

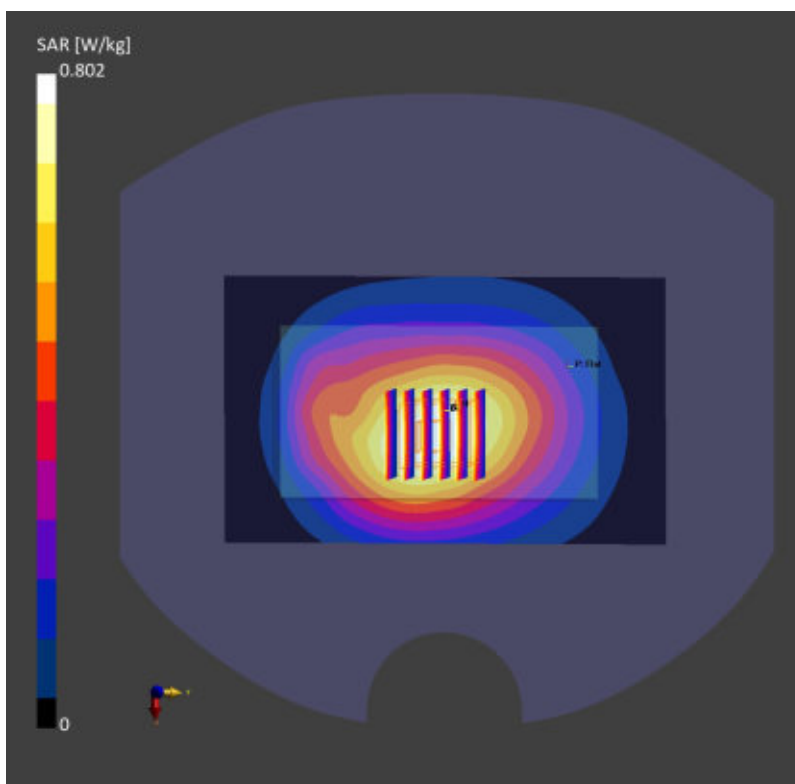

Date: 2026-01-03

24_LTE Band 5_10M_QPSK_1RB_0Offset_Back_10mm_Ch20525


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
 AntennaCfg:SISO; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
 Ambient Temperature: 23.6°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.678 W/kg; SAR (10g) = 0.464 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = 0.04 dB
 SAR (1g) = 0.710 W/kg; SAR (10g) = 0.513 W/kg
 Smallest distance from peaks to all points 3 dB below = > 15.0 mm
 Ratio of SAR at M2 to SAR at M1 = 90.2 %

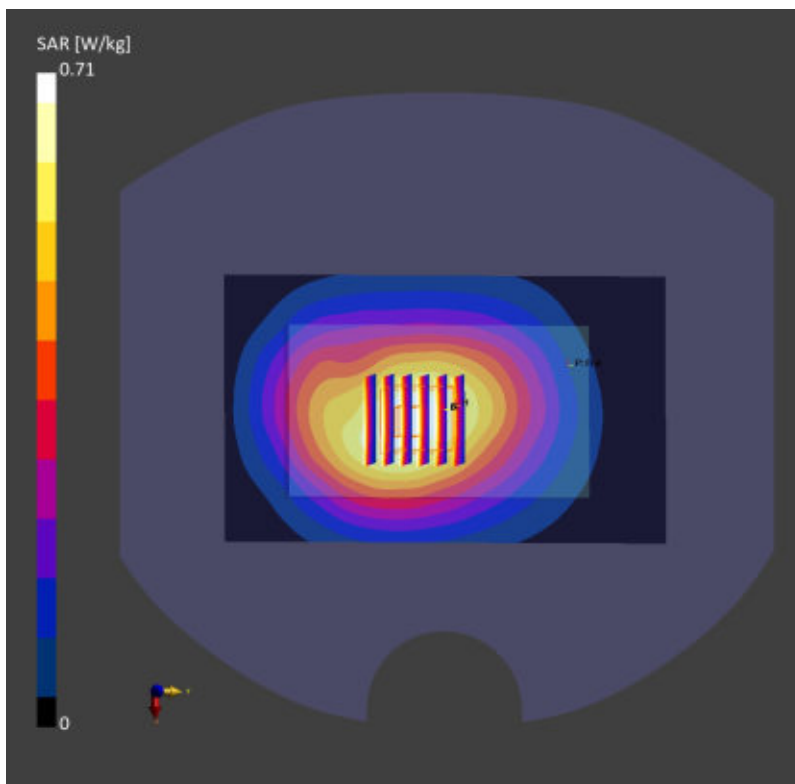

Date: 2026-01-03

25_FR1 n5_20M_QPSK_1RB_53Offset_DFT-15_Back_10mm_Ch167300


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)
 AntennaCfg:SISO; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
 Ambient Temperature: 23.6°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.746 W/kg; SAR (10g) = 0.512 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.02 dB
 SAR (1g) = 0.782 W/kg; SAR (10g) = 0.489 W/kg
 Smallest distance from peaks to all points 3 dB below = > 15.0 mm
 Ratio of SAR at M2 to SAR at M1 = 91.4 %

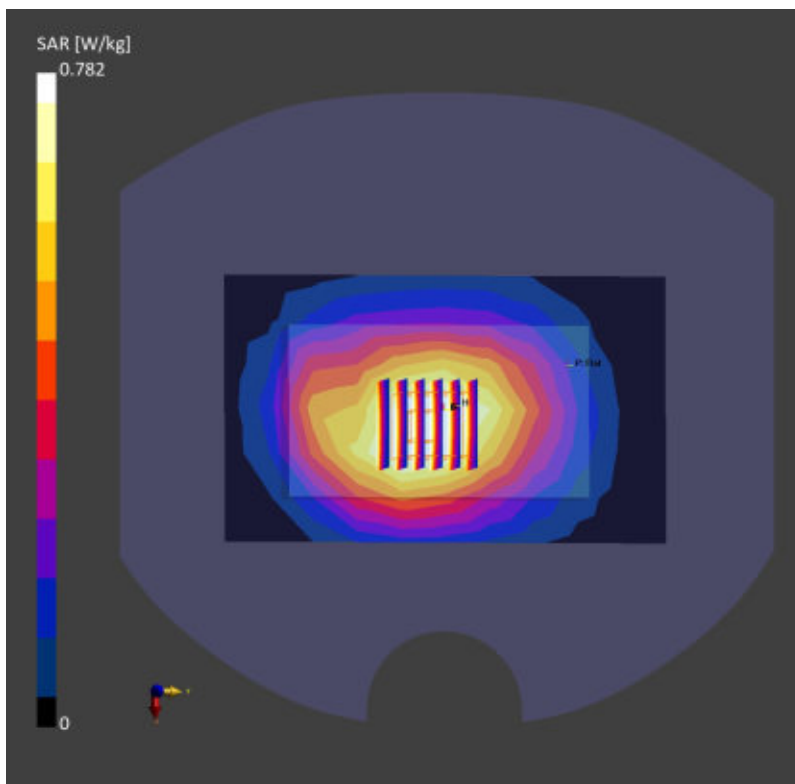

Date: 2026-01-05

26_WCDMA IV_RMC 12.2Kbps_Bottom Side_10mm_Ch1413


Communication System: UMTS-FDD (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (48.0 mm x 90.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.820 W/kg; SAR (10g) = 0.452 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.06 dB
SAR (1g) = 0.846 W/kg; SAR (10g) = 0.477 W/kg
Smallest distance from peaks to all points 3 dB below = 13.0 mm
Ratio of SAR at M2 to SAR at M1 = 86.9 %

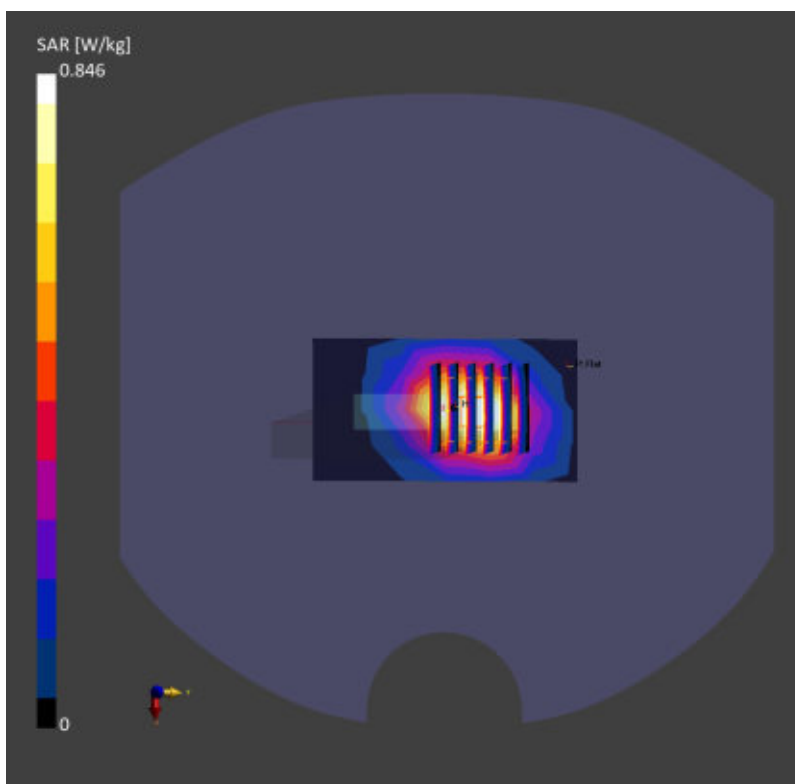

Date: 2026-01-05

27_LTE Band 66_20M_QPSK_1RB_0Offset_Bottom Side_10mm_Ch132572


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 1770.0 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f=1770.0$ MHz; $\sigma=1.34$ S/m; $\epsilon_r=41.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 90.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.645 W/kg; SAR (10g) = 0.364 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.08 dB
SAR (1g) = 0.757 W/kg; SAR (10g) = 0.385 W/kg
Smallest distance from peaks to all points 3 dB below = 12.0 mm
Ratio of SAR at M2 to SAR at M1 = 86.3 %

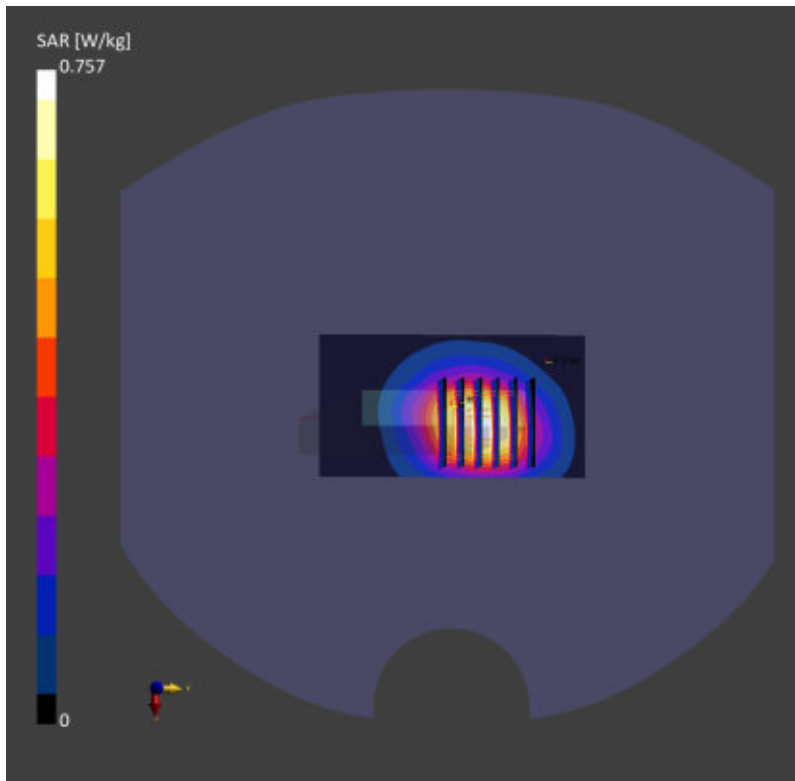

Date: 2026-01-05

28_FR1 n66_40M_QPSK_108RB_54Offset_DFT-15_Bottom Side_10mm_Ch349000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)
 AntennaCfg:SISO; Frequency: 1745.0 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 1745.0$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (48.0 mm x 90.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
 SAR (1g) = 0.720 W/kg; SAR (10g) = 0.398 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = 0.15 dB
 SAR (1g) = 0.734 W/kg; SAR (10g) = 0.411 W/kg
 Smallest distance from peaks to all points 3 dB below = 13.0 mm
 Ratio of SAR at M2 to SAR at M1 = 86.5 %

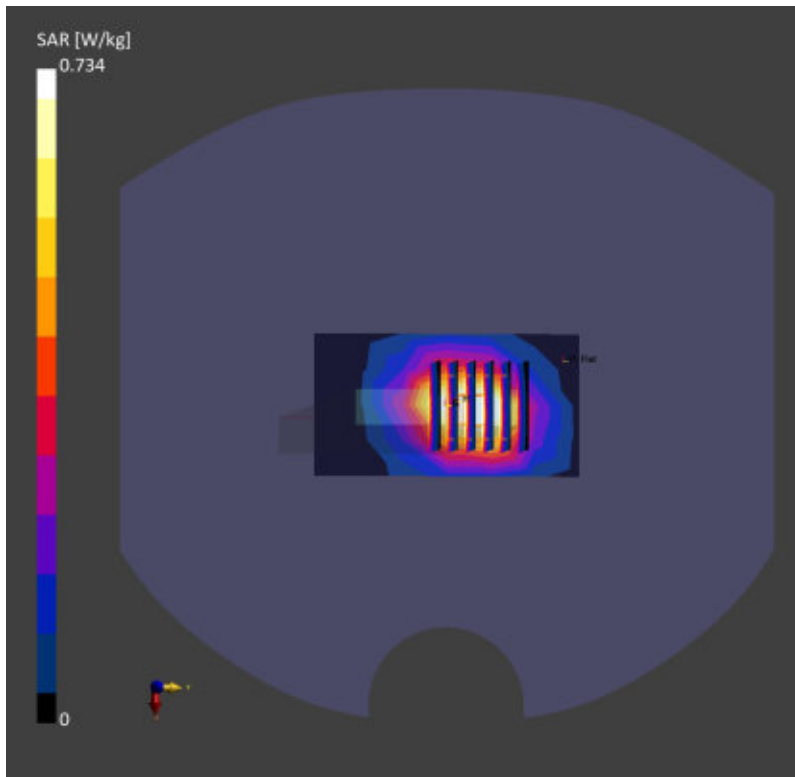

Date: 2026-01-07

29_WCDMA II_RMC 12.2Kbps_Bottom Side_10mm_Ch9538


Communication System: UMTS-FDD (WCDMA); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (48.0 mm x 90.0 mm): Measurement Grid: 12.0 mm x 15.0 mm
SAR (1g) = 0.826 W/kg; SAR (10g) = 0.443 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.12 dB
SAR (1g) = 0.856 W/kg; SAR (10g) = 0.471 W/kg
Smallest distance from peaks to all points 3 dB below = 13.0 mm
Ratio of SAR at M2 to SAR at M1 = 85.8 %

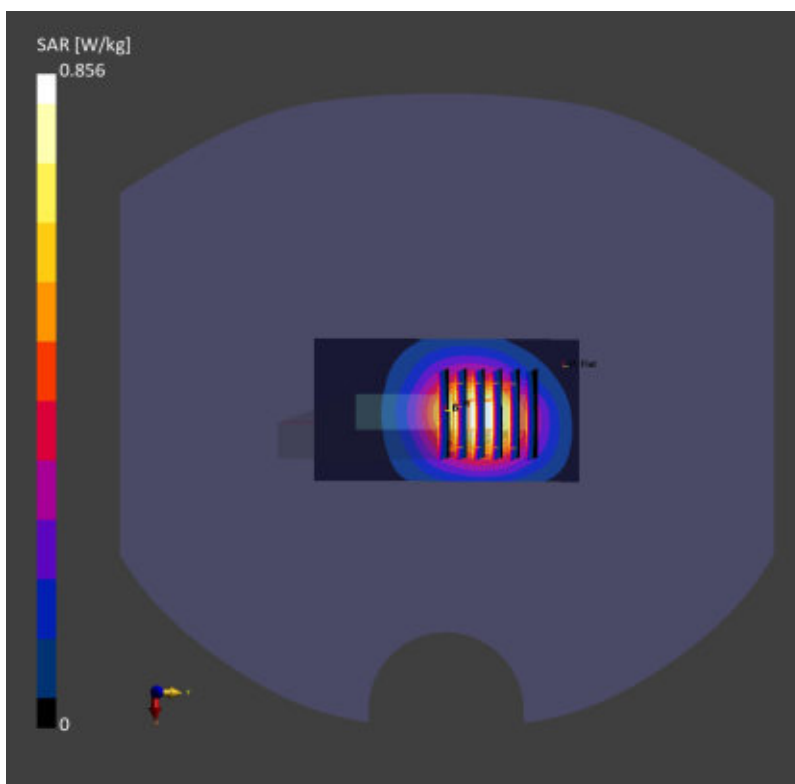

Date: 2026-01-07

30_LTE Band 2_20M_QPSK_1RB_0Offset_Bottom Side_10mm_Ch18700

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1860.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1860.0$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 41.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 90.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 0.640 W/kg; SAR (10g) = 0.355 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.713 W/kg; SAR (10g) = 0.372 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 86.4 %

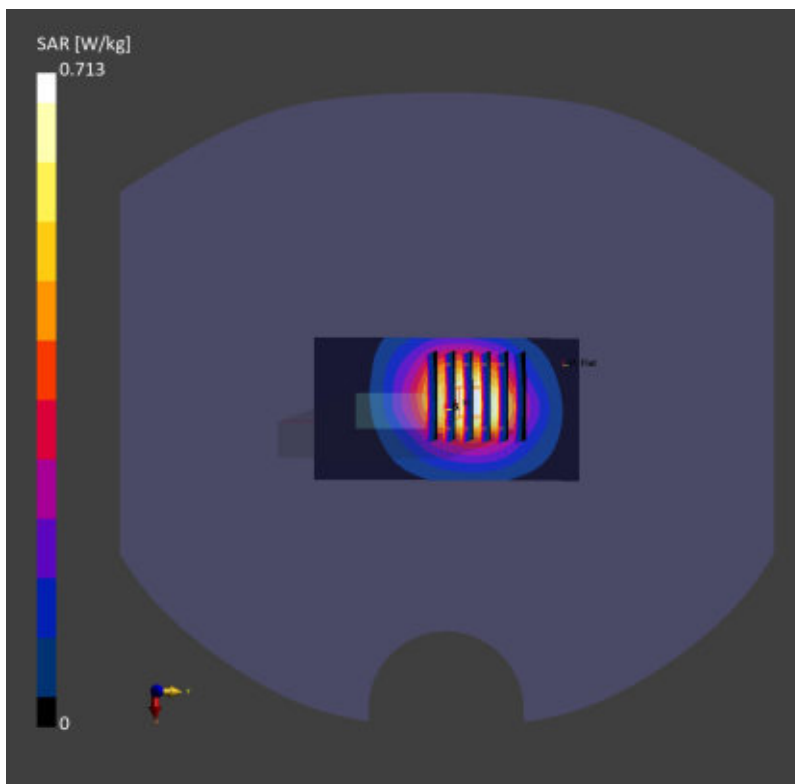

Date: 2026-01-07

31_FR1 n2_40M_QPSK_1RB_1Offset_DFT-15_Bottom Side_10mm_Ch376000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 1880.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (48.0 mm x 90.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 0.698 W/kg; SAR (10g) = 0.388 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.14 dB

SAR (1g) = 0.723 W/kg; SAR (10g) = 0.402 W/kg

Smallest distance from peaks to all points 3 dB below = 13.0 mm

Ratio of SAR at M2 to SAR at M1 = 86.4 %

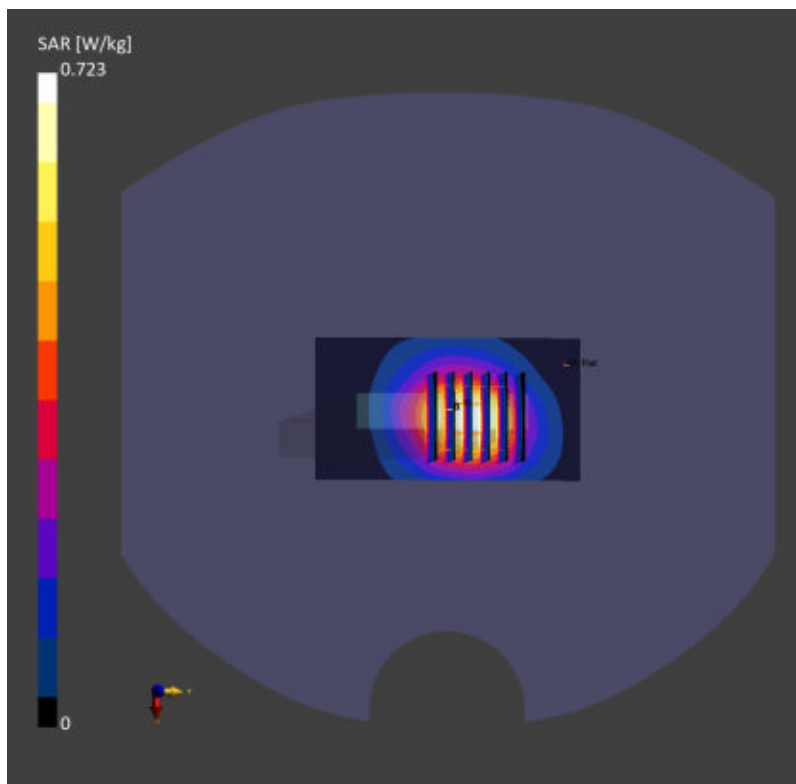

Date: 2026-01-06

32_LTE Band 30_10M_QPSK_1RB_0Offset_Front_10mm_Ch27710


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
 AntennaCfg:SISO; Frequency: 2310.0 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 2310.0$ MHz; $\sigma = 1.71$ S/m; $\epsilon_r = 41.2$
 Ambient Temperature: 23.4°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.24, 8.09, 8.13); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (100.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
 SAR (1g) = 0.767 W/kg; SAR (10g) = 0.414 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
 Power Drift = 0.13 dB
 SAR (1g) = 0.817 W/kg; SAR (10g) = 0.440 W/kg
 Smallest distance from peaks to all points 3 dB below = 12.6 mm
 Ratio of SAR at M2 to SAR at M1 = 83.7 %

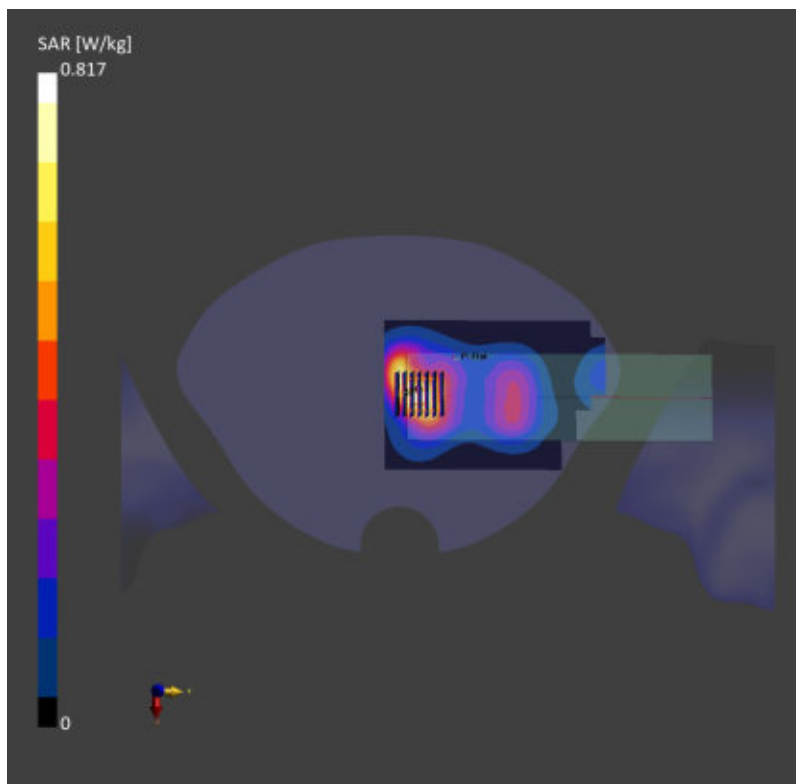

Date: 2026-01-06

33_FR1 n30_10M_QPSK_25RB_14Offset_DFT-15_Front_10mm_Ch462000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 2310.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2310.0$ MHz; $\sigma = 1.71$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.24, 8.09, 8.13); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (100.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.737 W/kg; SAR (10g) = 0.396 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.763 W/kg; SAR (10g) = 0.404 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 83.3 %

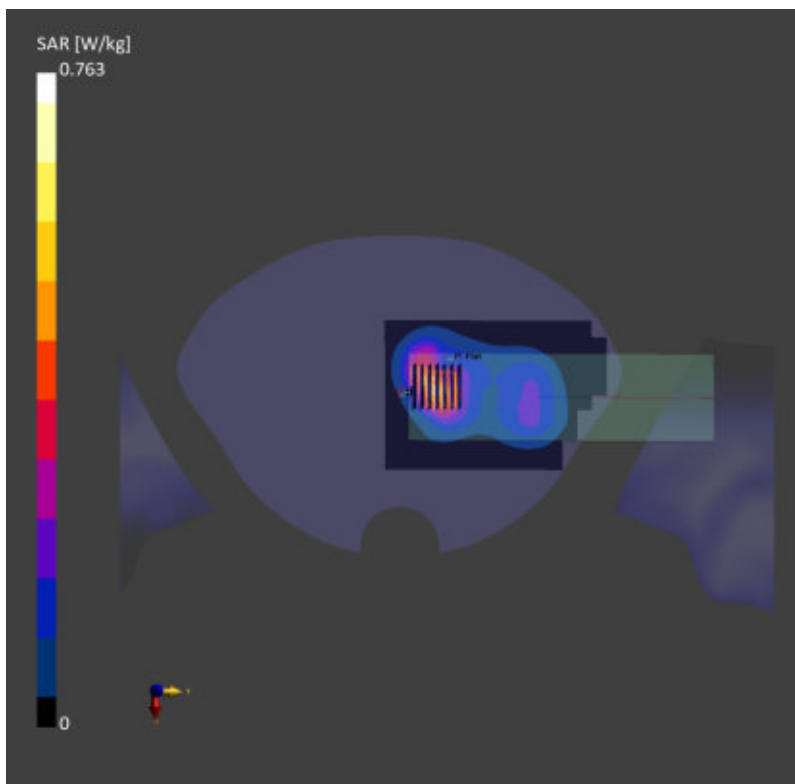

Date: 2026-01-05

34_LTE Band 7_20M_QPSK_1RB_0Offset_Back_10mm_Ch21100

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2535.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2535.0$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.9, 7.75, 7.79); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (100.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.422 W/kg; SAR (10g) = 0.201 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.10 dB

SAR (1g) = 0.431 W/kg; SAR (10g) = 0.207 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 82.0 %

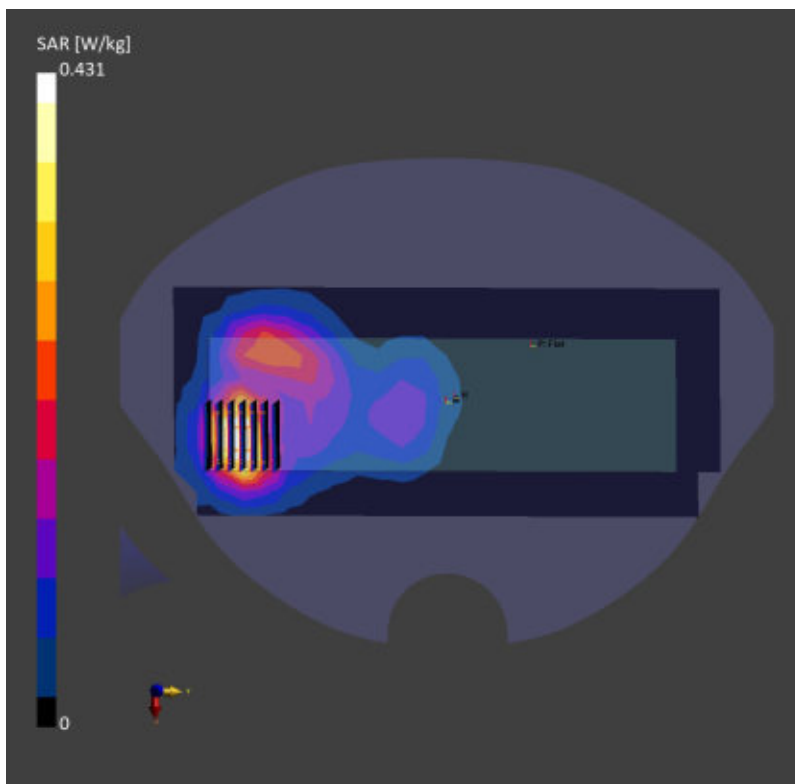

Date: 2026-01-04

35_FR1 n77_100M_QPSK_1RB_1Offset_DFT-30_Left Side_10mm_Ch650000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)
 AntennaCfg:SISO; Frequency: 3750.0 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 3750.0$ MHz; $\sigma = 2.95$ S/m; $\epsilon_r = 38.8$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.85, 6.72, 6.76); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (60.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
 SAR (1g) = 0.670 W/kg; SAR (10g) = 0.290 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
 Power Drift = -0.12 dB
 SAR (1g) = 0.731 W/kg; SAR (10g) = 0.309 W/kg
 Smallest distance from peaks to all points 3 dB below = 11.1 mm
 Ratio of SAR at M2 to SAR at M1 = 75.5 %

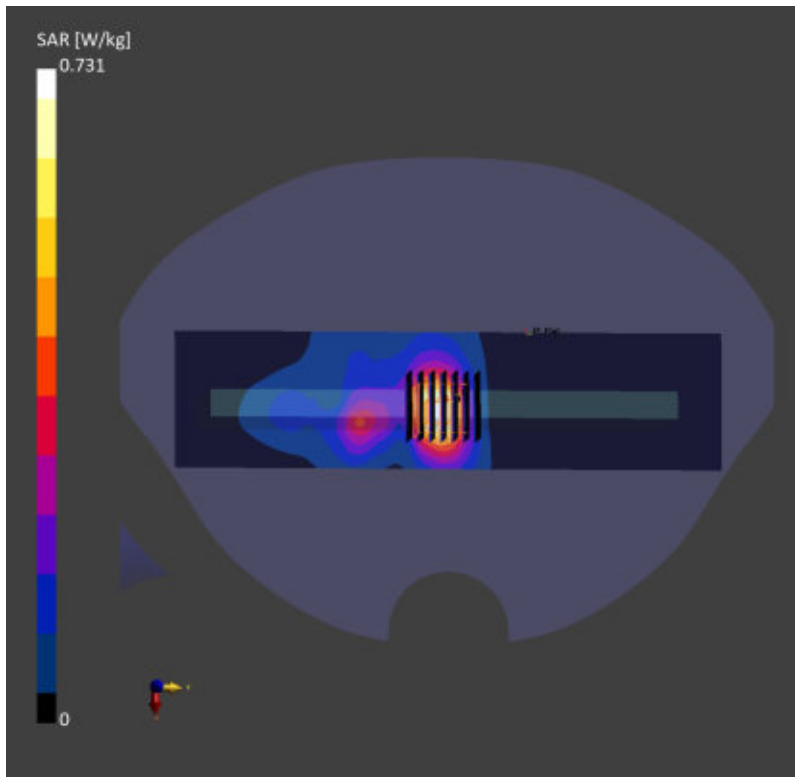

Date: 2026-01-03

36_Bluetooth_DH5 1Mbps_Back_10mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2441.0 MHz; Duty Cycle: 1:1.544

Medium: HSL Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: Bluetooth, 10032-CAA

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.029 W/kg; SAR (10g) = 0.016 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.029 W/kg; SAR (10g) = 0.016 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 86.1 %

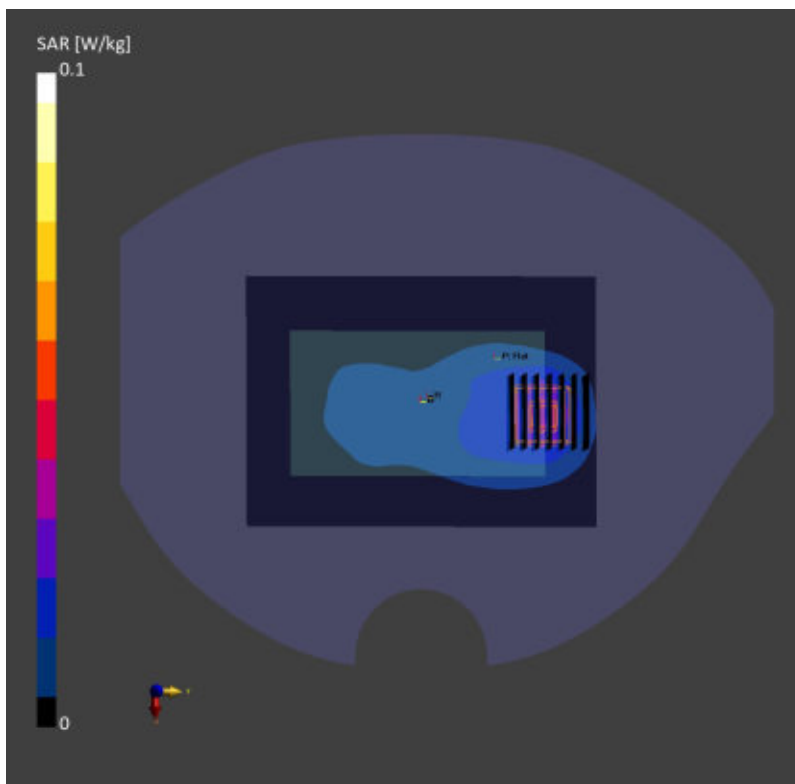

Date: 2026-01-03

37_WLAN2.4GHz_802.11b 1Mbps_Back_10mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437.0 MHz;

Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2437.0$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10415-AAA

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.247 W/kg; SAR (10g) = 0.130 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.247 W/kg; SAR (10g) = 0.136 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 85.0 %

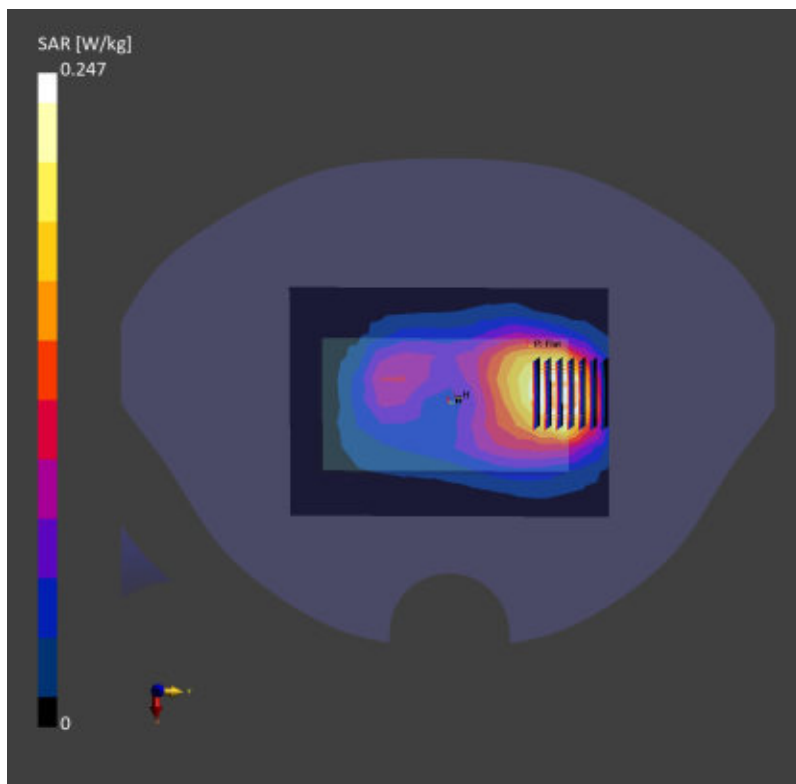

Date: 2026-01-07

38_WLAN5GHz_802.11ac-VHT80 MCS0_Back_10mm_Ch42

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5210.0 MHz; Duty Cycle: 1:1.107

Medium: HSL Medium parameters used: $f = 5210.0$ MHz; $\sigma = 4.54$ S/m; $\epsilon_r = 36.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.0); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10544-AAC

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.327 W/kg; SAR (10g) = 0.120 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.317 W/kg; SAR (10g) = 0.118 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 61.6 %

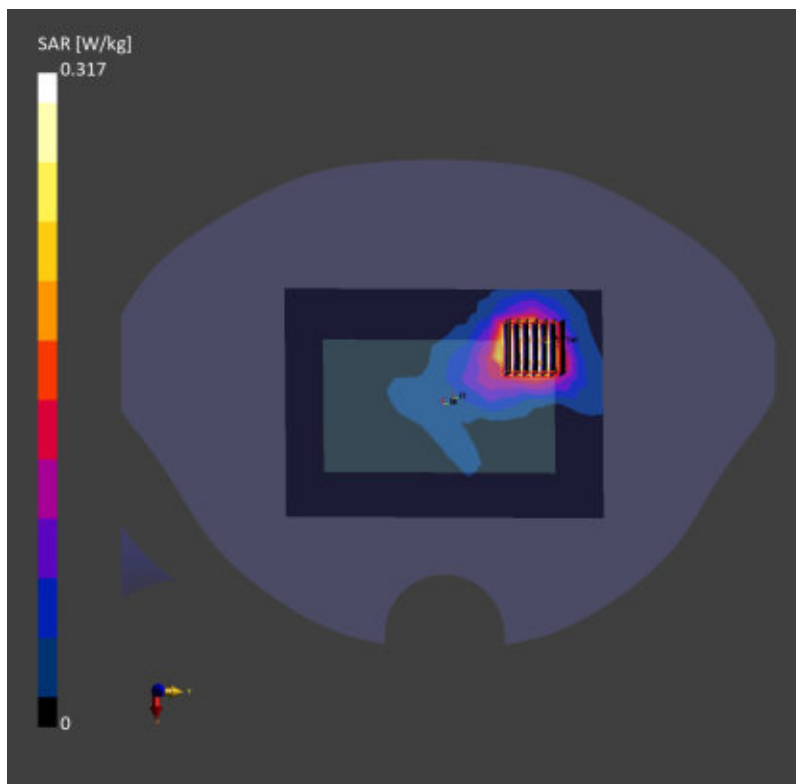

Date: 2026-01-08

39_WLAN5GHz_802.11ac-VHT80 MCS0_Back_10mm_Ch155

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5775.0 MHz; Duty Cycle: 1:1.107

Medium: HSL Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 35.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.52, 5.42, 5.44); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10544-AAC

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.275 W/kg; SAR (10g) = 0.101 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.15 dB

SAR (1g) = 0.299 W/kg; SAR (10g) = 0.103 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.4 %

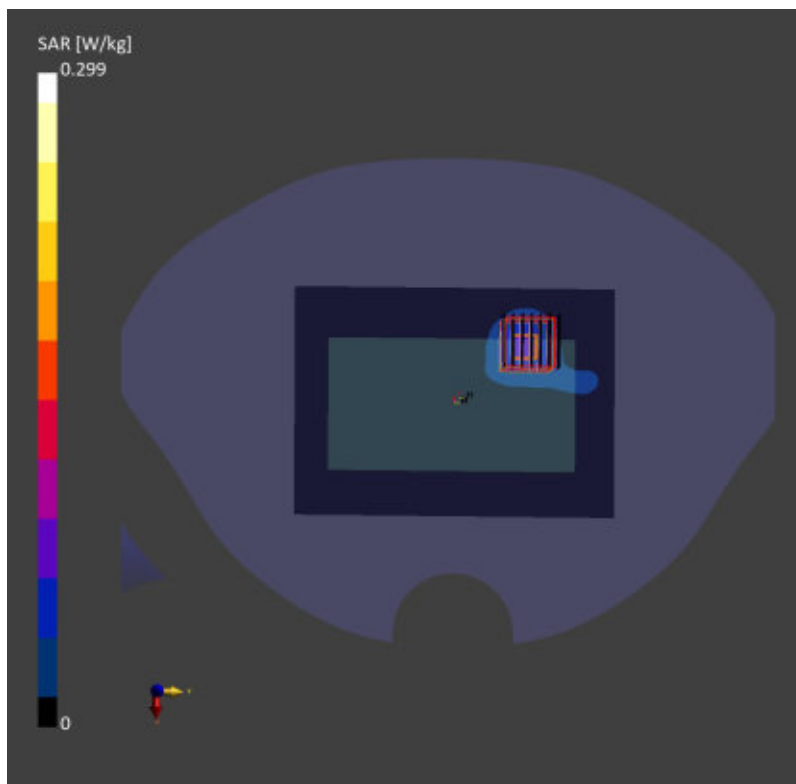

Date: 2026-01-02

40_LTE Band 12_10M_QPSK_1RB_0Offset_Back_15mm_Ch23095

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 44.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.499 W/kg; SAR (10g) = 0.344 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.12 dB

SAR (1g) = 0.490 W/kg; SAR (10g) = 0.348 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 89.2 %

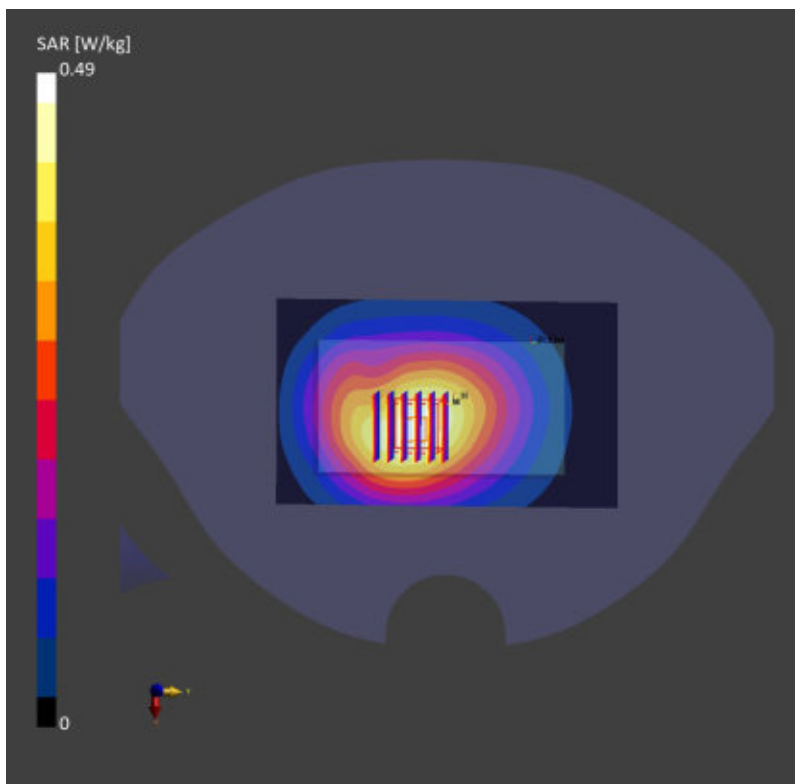

Date: 2026-01-02

41_LTE Band 14_10M_QPSK_1RB_0Offset_Back_15mm_Ch23330


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
 AntennaCfg:SISO; Frequency: 793.0 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 793.0$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 43.7$
 Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.600 W/kg; SAR (10g) = 0.414 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.07 dB
 SAR (1g) = 0.628 W/kg; SAR (10g) = 0.452 W/kg
 Smallest distance from peaks to all points 3 dB below = > 15.0 mm
 Ratio of SAR at M2 to SAR at M1 = 90.0 %

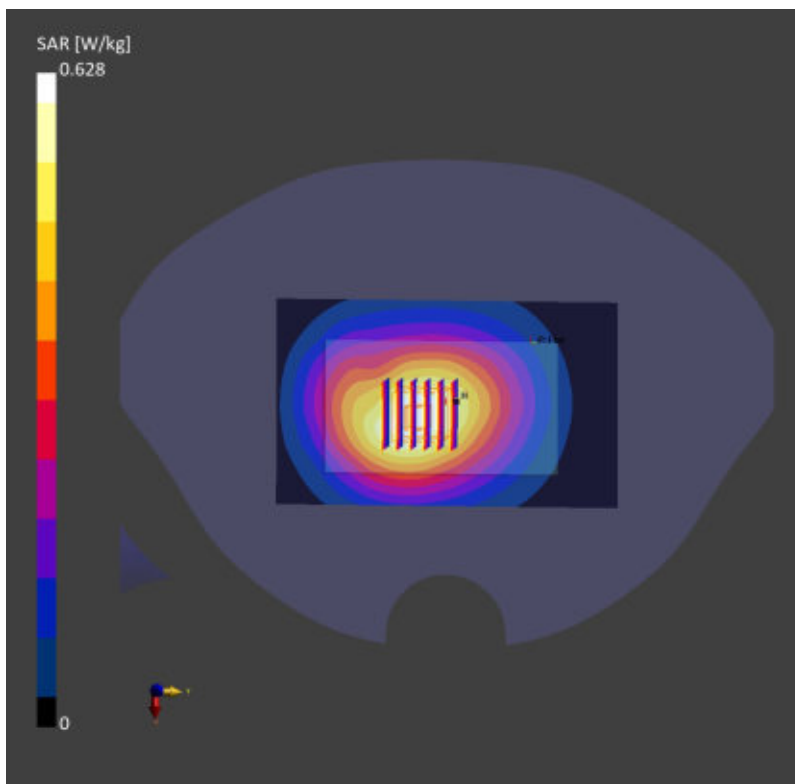

Date: 2026-01-03

42_WCDMA V_RMC 12.2Kbps_Back_15mm_Ch4182


Communication System: UMTS-FDD (WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
 Ambient Temperature: 23.6°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.469 W/kg; SAR (10g) = 0.322 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.05 dB
 SAR (1g) = 0.500 W/kg; SAR (10g) = 0.362 W/kg
 Smallest distance from peaks to all points 3 dB below = > 15.0 mm
 Ratio of SAR at M2 to SAR at M1 = 90.0 %

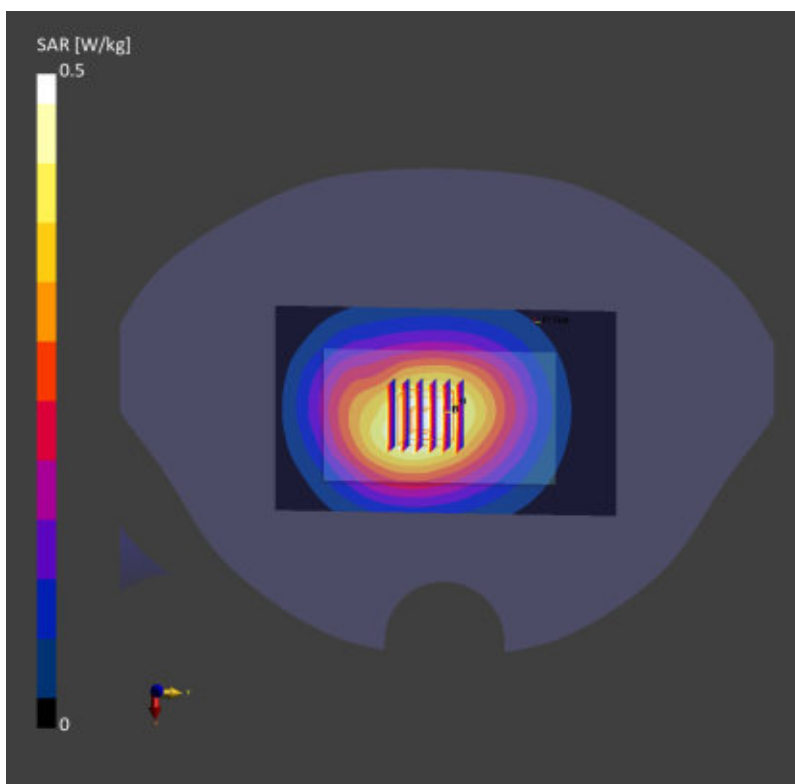

Date: 2026-01-03

43_LTE Band 5_10M_QPSK_1RB_0Offset_Back_15mm_Ch20525

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCf: SISO; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.531 W/kg; SAR (10g) = 0.364 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.17 dB

SAR (1g) = 0.545 W/kg; SAR (10g) = 0.395 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 89.6 %

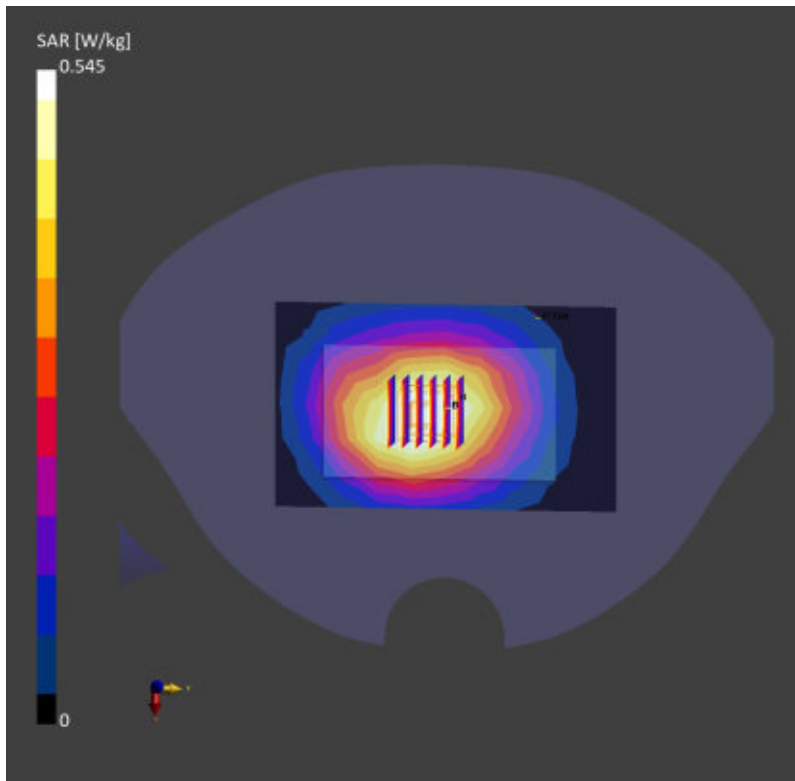

Date: 2026-01-03

44_FR1 n5_20M_QPSK_1RB_53Offset_DFT-15_Back_15mm_Ch167300


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)
 AntennaCfg:SISO; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
 Ambient Temperature: 23.6°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.530 W/kg; SAR (10g) = 0.365 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.15 dB
 SAR (1g) = 0.561 W/kg; SAR (10g) = 0.405 W/kg
 Smallest distance from peaks to all points 3 dB below = > 15.0 mm
 Ratio of SAR at M2 to SAR at M1 = 89.9 %

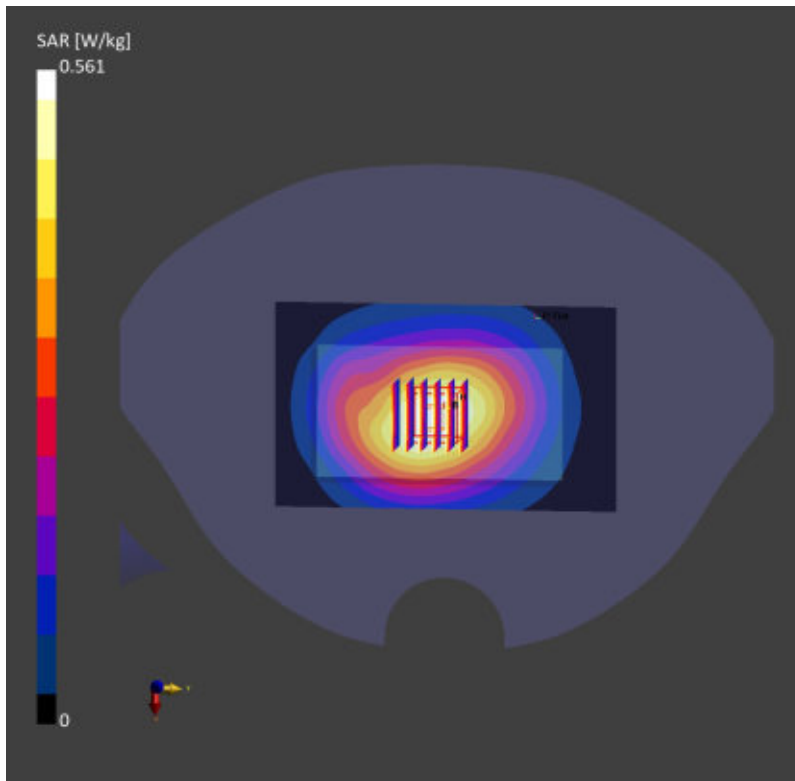

Date: 2026-01-05

45_WCDMA IV_RMC 12.2Kbps_Back_15mm_Ch1413


Communication System: UMTS-FDD (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.330 W/kg; SAR (10g) = 0.194 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = 0.05 dB
 SAR (1g) = 0.360 W/kg; SAR (10g) = 0.216 W/kg
 Smallest distance from peaks to all points 3 dB below = 14.4 mm
 Ratio of SAR at M2 to SAR at M1 = 87.1 %

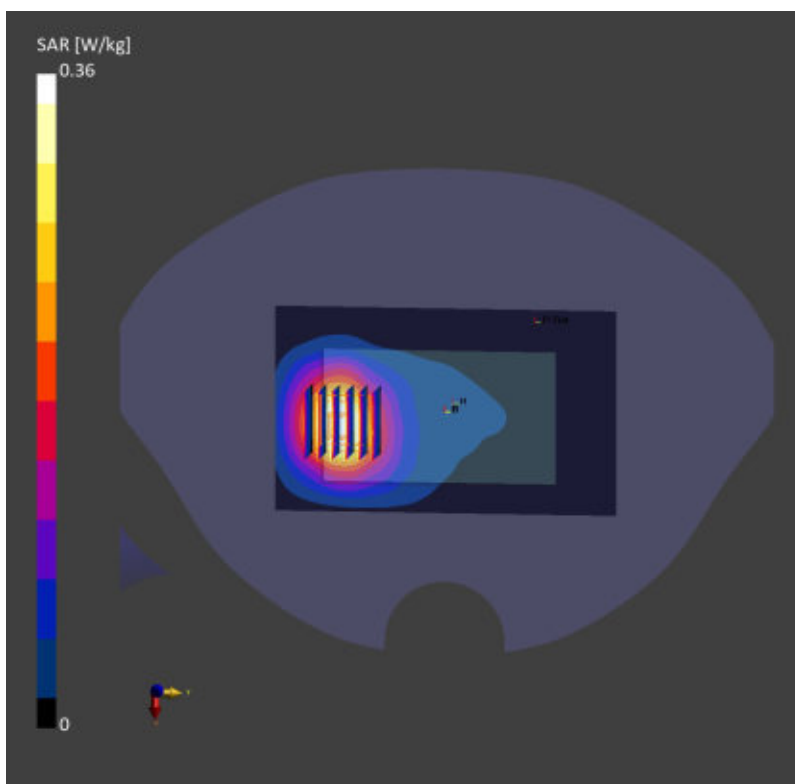

Date: 2026-01-05

46_LTE Band 66_20M_QPSK_1RB_0Offset_Back_15mm_Ch132322

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1745.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1745.0$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.270 W/kg; SAR (10g) = 0.157 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.13 dB

SAR (1g) = 0.279 W/kg; SAR (10g) = 0.168 W/kg

Smallest distance from peaks to all points 3 dB below = 15.6 mm

Ratio of SAR at M2 to SAR at M1 = 88.0 %

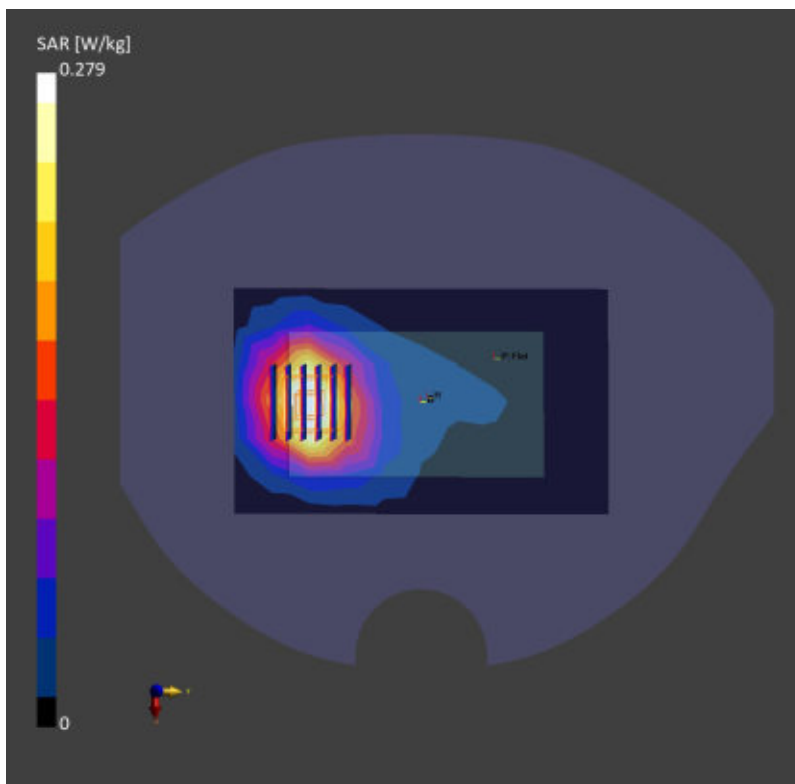

Date: 2026-01-05

47_FR1 n66_40M_QPSK_1RB_1Offset_DFT-15_Back_15mm_Ch349000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 1745.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1745.0$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.291 W/kg; SAR (10g) = 0.170 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.283 W/kg; SAR (10g) = 0.170 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 86.5 %

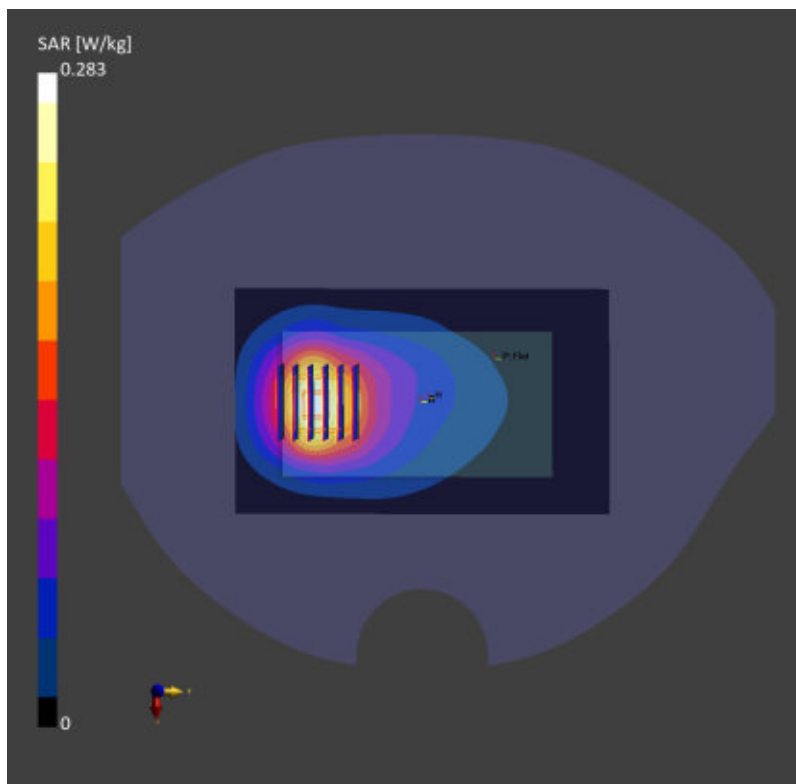

Date: 2026-01-07

48_WCDMA II_RMC 12.2Kbps_Back_15mm_Ch9400


Communication System: UMTS-FDD (WCDMA); Frequency: 1880.0 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.400 W/kg; SAR (10g) = 0.239 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.08 dB
SAR (1g) = 0.412 W/kg; SAR (10g) = 0.255 W/kg
Smallest distance from peaks to all points 3 dB below = 19.6 mm
Ratio of SAR at M2 to SAR at M1 = 87.3 %

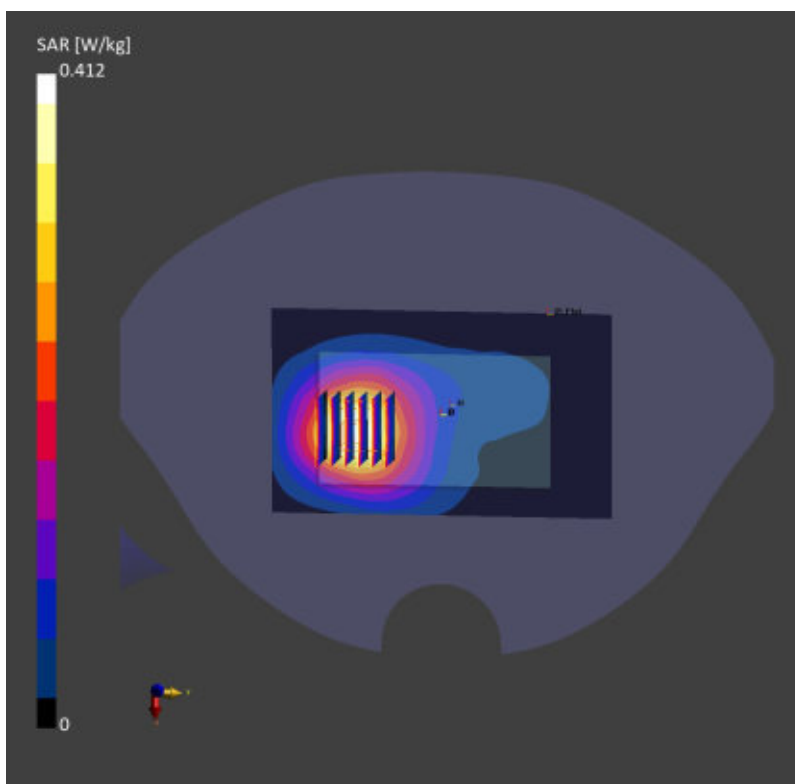

Date: 2026-01-07

49_LTE Band 2_20M_QPSK_1RB_0Offset_Back_15mm_Ch18900


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)
 AntennaCfg:SISO; Frequency: 1880.0 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.279 W/kg; SAR (10g) = 0.144 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = 0.10 dB
 SAR (1g) = 0.259 W/kg; SAR (10g) = 0.141 W/kg
 Smallest distance from peaks to all points 3 dB below = 19.6 mm
 Ratio of SAR at M2 to SAR at M1 = 87.3 %

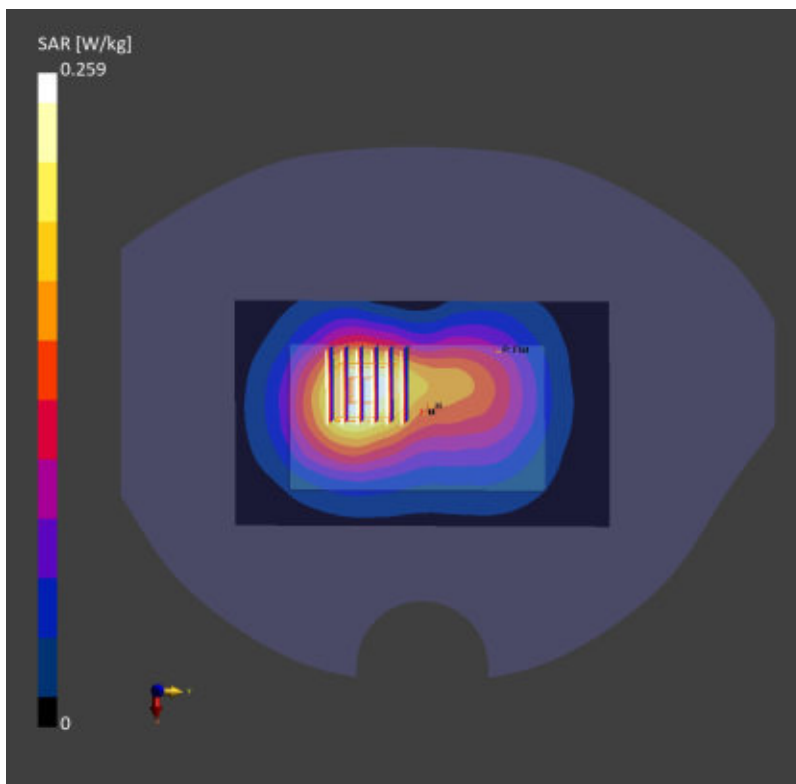

Date: 2026-01-07

50_FR1 n2_40M_QPSK_1RB_1Offset_DFT-15_Back_15mm_Ch376000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)
 AntennaCfg:SISO; Frequency: 1880.0 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (90.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.259 W/kg; SAR (10g) = 0.146 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = 0.06 dB
 SAR (1g) = 0.249 W/kg; SAR (10g) = 0.132 W/kg
 Smallest distance from peaks to all points 3 dB below = 20.5 mm
 Ratio of SAR at M2 to SAR at M1 = 87.6 %

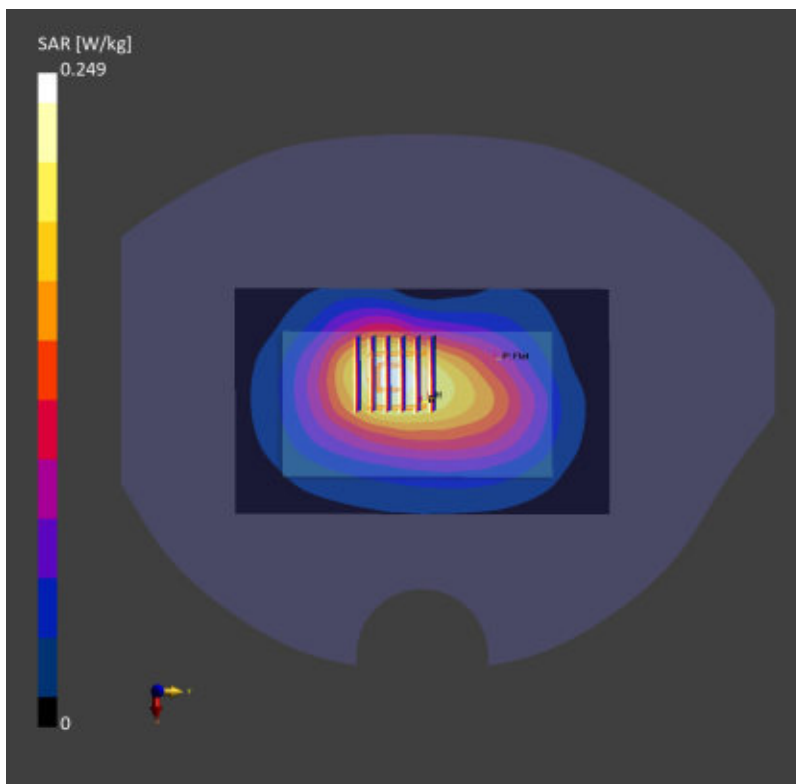

Date: 2026-01-06

51_LTE Band 30_10M_QPSK_1RB_0Offset_Back_15mm_Ch27710

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2310.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2310.0$ MHz; $\sigma = 1.71$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.24, 8.09, 8.13); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.404 W/kg; SAR (10g) = 0.235 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 0.410 W/kg; SAR (10g) = 0.245 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 84.8 %

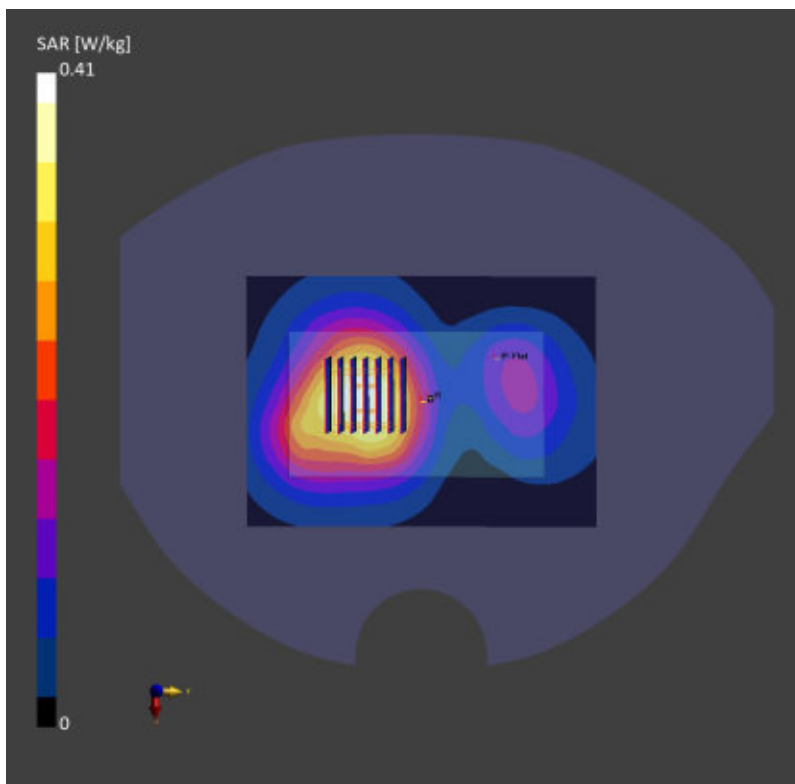

Date: 2026-01-06

52_FR1 n30_10M_QPSK_1RB_1Offset_Back_15mm_Ch462000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)
 AntennaCfg:SISO; Frequency: 2310.0 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 2310.0$ MHz; $\sigma = 1.71$ S/m; $\epsilon_r = 41.2$
 Ambient Temperature: 23.4°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.24, 8.09, 8.13); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
 SAR (1g) = 0.412 W/kg; SAR (10g) = 0.241 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
 Power Drift = 0.02 dB
 SAR (1g) = 0.427 W/kg; SAR (10g) = 0.257 W/kg
 Smallest distance from peaks to all points 3 dB below = > 15.0 mm
 Ratio of SAR at M2 to SAR at M1 = 84.7 %

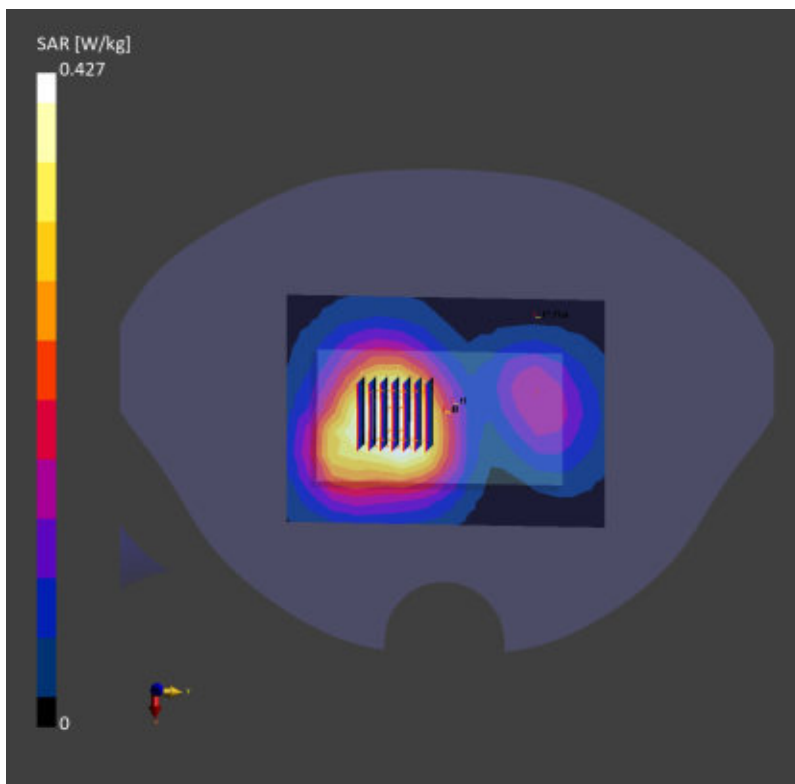

Date: 2026-01-05

53_LTE Band 7_20M_QPSK_1RB_0Offset_Back_15mm_Ch21100

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2535.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2535.0$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.9, 7.75, 7.79); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.119 W/kg; SAR (10g) = 0.064 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.17 dB

SAR (1g) = 0.122 W/kg; SAR (10g) = 0.060 W/kg

Smallest distance from peaks to all points 3 dB below = 10.5 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

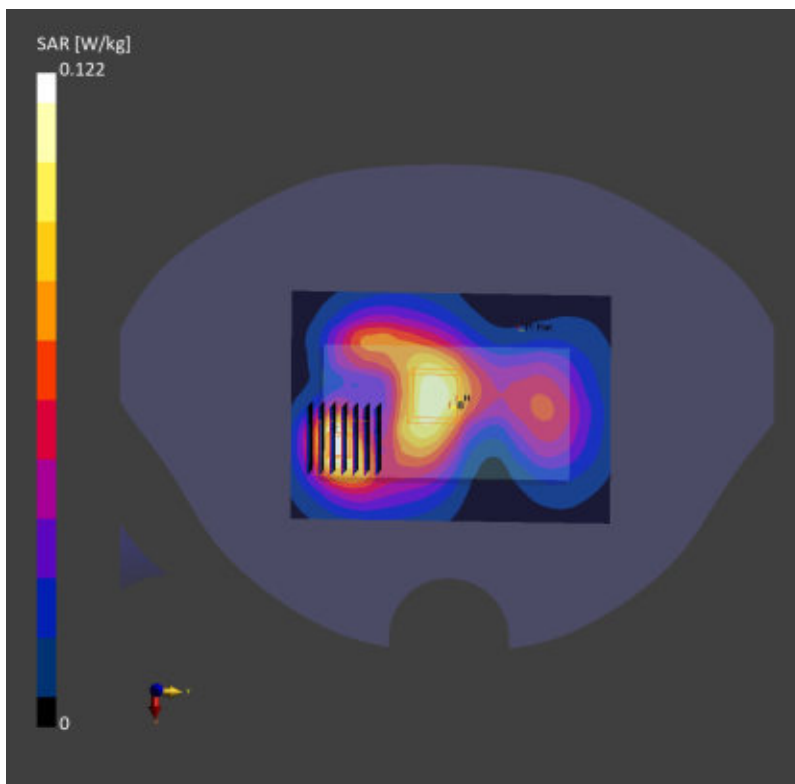

Date: 2026-01-14

54_FR1 n77_100M_QPSK_1RB_1Offset_DFT-30_Back_15mm_Ch656000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)

AntennaCfg:SISO; Frequency: 3840.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 3840.0$ MHz; $\sigma = 3.05$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.88, 6.76, 6.79); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.281 W/kg; SAR (10g) = 0.129 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.06 dB

SAR (1g) = 0.289 W/kg; SAR (10g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 73.4 %

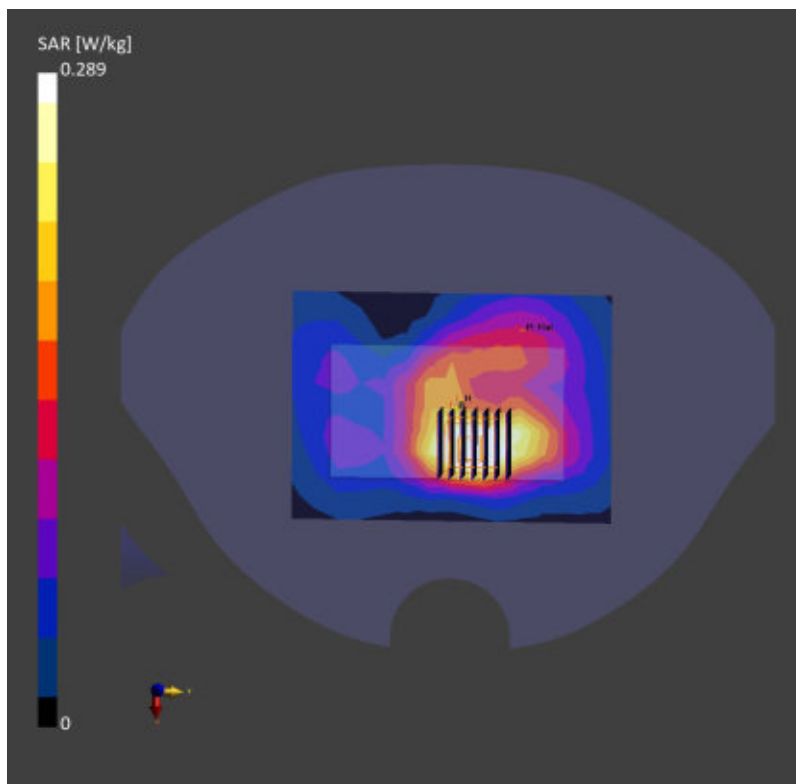

Date: 2026-01-03

55_Bluetooth_DH5 1Mbps_Back_15mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2441.0 MHz; Duty Cycle: 1:1.544

Medium: HSL Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: Bluetooth, 10032-CAA

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.010 W/kg; SAR (10g) = 0.006 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.13 dB

SAR (1g) = 0.011 W/kg; SAR (10g) = 0.006 W/kg

Smallest distance from peaks to all points 3 dB below = 13.4 mm

Ratio of SAR at M2 to SAR at M1 = 85.5 %

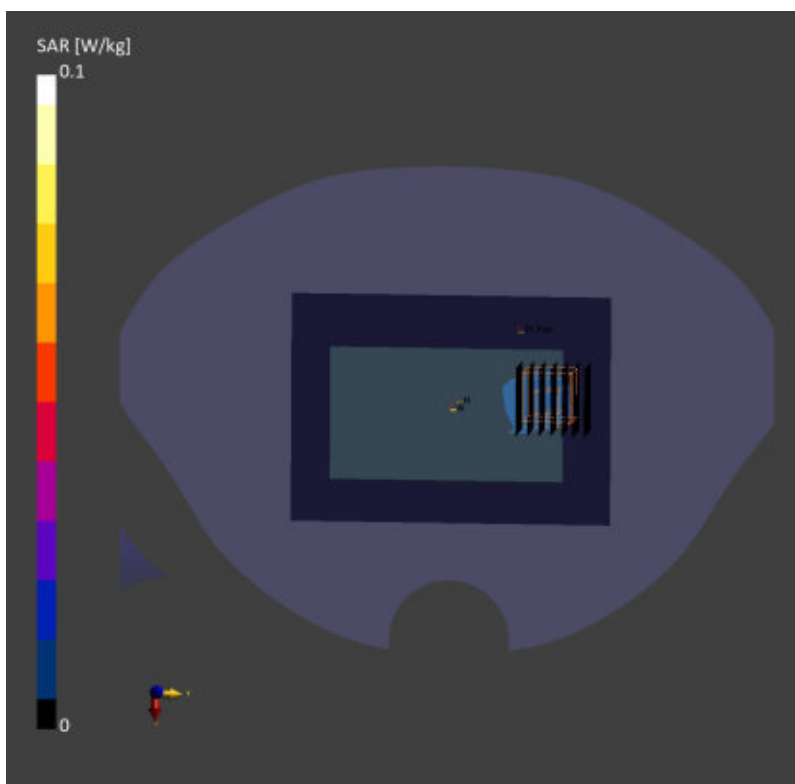

Date: 2026-01-03

56_WLAN2.4GHz_802.11b 1Mbps_Back_15mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437.0 MHz;

Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2437.0$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10415-AAA

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.171 W/kg; SAR (10g) = 0.092 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.169 W/kg; SAR (10g) = 0.096 W/kg

Smallest distance from peaks to all points 3 dB below = 14.6 mm

Ratio of SAR at M2 to SAR at M1 = 82.9 %

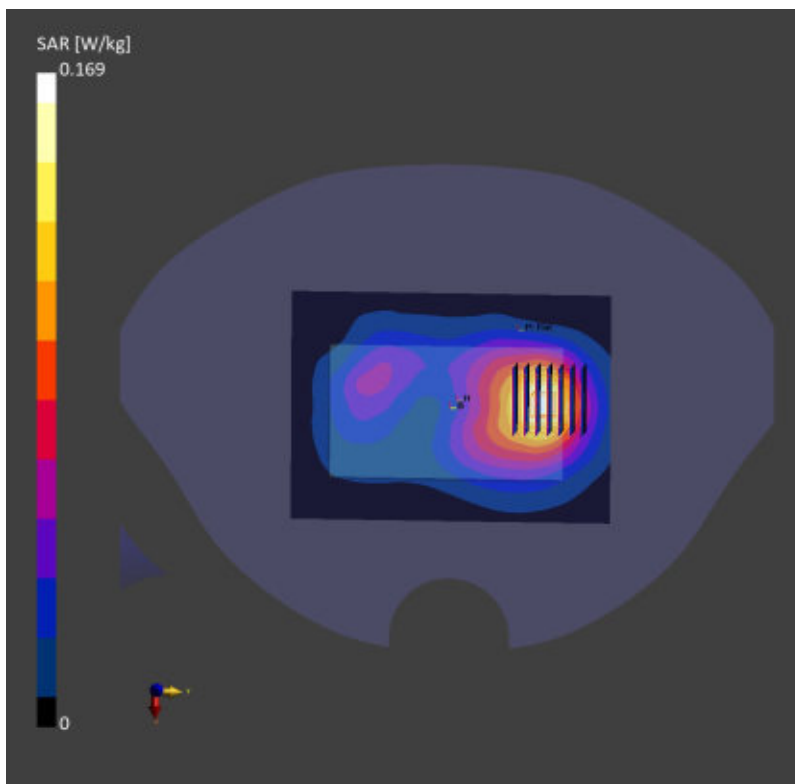

Date: 2026-01-07

57_WLAN5GHz_802.11ac-VHT80 MCS0_Back_15mm_Ch58

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5290.0 MHz; Duty Cycle: 1:1.107

Medium: HSL Medium parameters used: $f = 5290.0$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 36.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.0); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10544-AAC

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.189 W/kg; SAR (10g) = 0.077 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.201 W/kg; SAR (10g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 13.3 mm

Ratio of SAR at M2 to SAR at M1 = 63.1 %

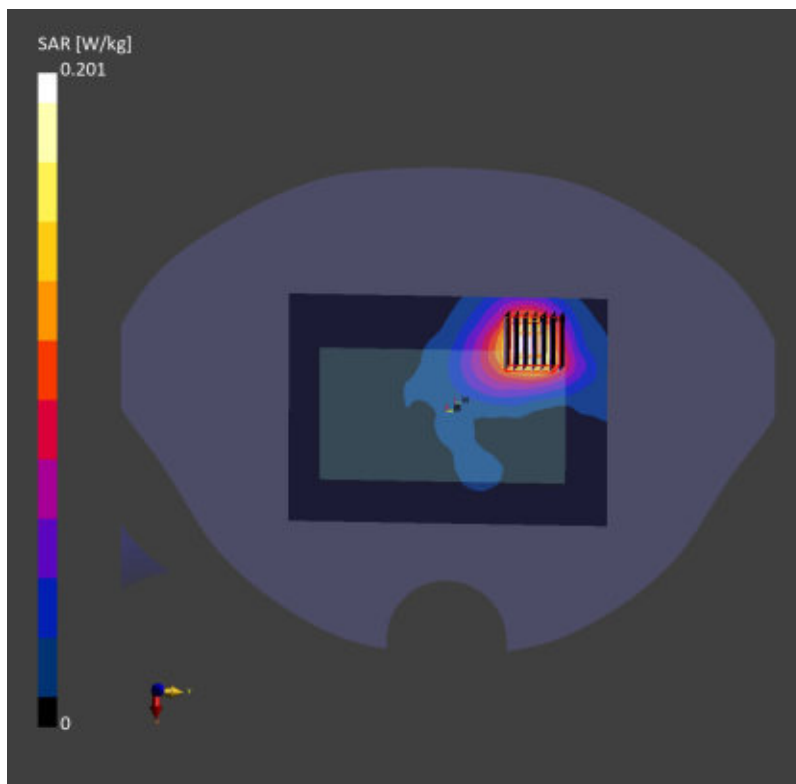

Date: 2026-01-09

58_WLAN5GHz_802.11n-HT40 MCS0_Back_15mm_Ch110


Communication System: IEEE 802.11n (HT Mixed, 40MHz, MCS0, 99pc duty cycle);
Frequency: 5550.0 MHz; Duty Cycle: 1:1.054
Medium: HSL Medium parameters used: $f = 5550.0$ MHz; $\sigma = 4.94$ S/m; $\epsilon_r = 35.7$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.54, 5.44, 5.47); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10599-AAC

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.215 W/kg; SAR (10g) = 0.085 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.08 dB
SAR (1g) = 0.240 W/kg; SAR (10g) = 0.089 W/kg
Smallest distance from peaks to all points 3 dB below = 12.5 mm
Ratio of SAR at M2 to SAR at M1 = 60.4 %

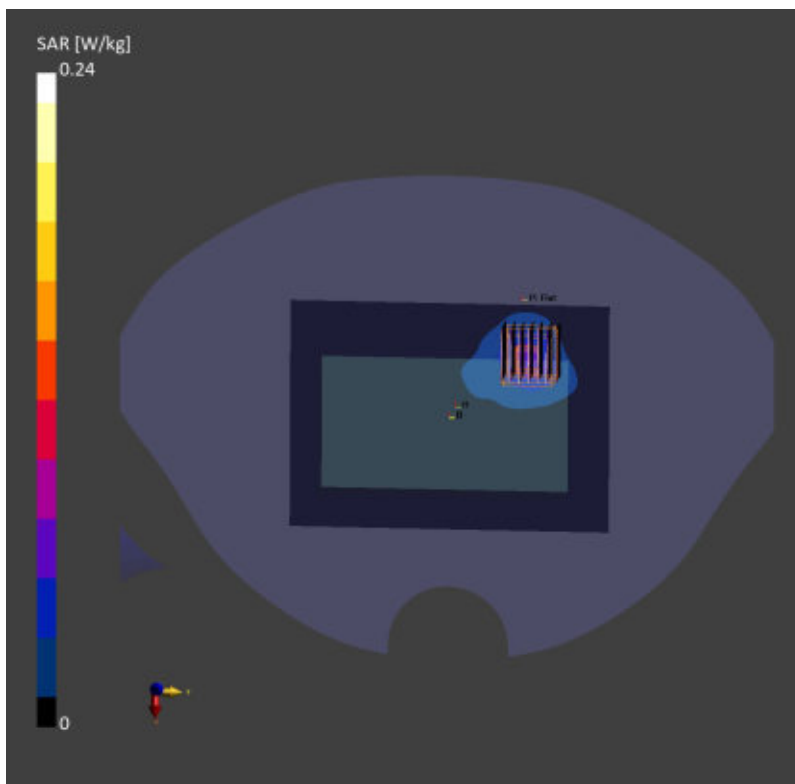

Date: 2026-01-08

59_WLAN5GHz_802.11ac-VHT80 MCS0_Back_15mm_Ch155

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5775.0 MHz; Duty Cycle: 1:1.107

Medium: HSL Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 35.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.52, 5.42, 5.44); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10544-AAC

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.216 W/kg; SAR (10g) = 0.085 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.17 dB

SAR (1g) = 0.232 W/kg; SAR (10g) = 0.089 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 54.7 %

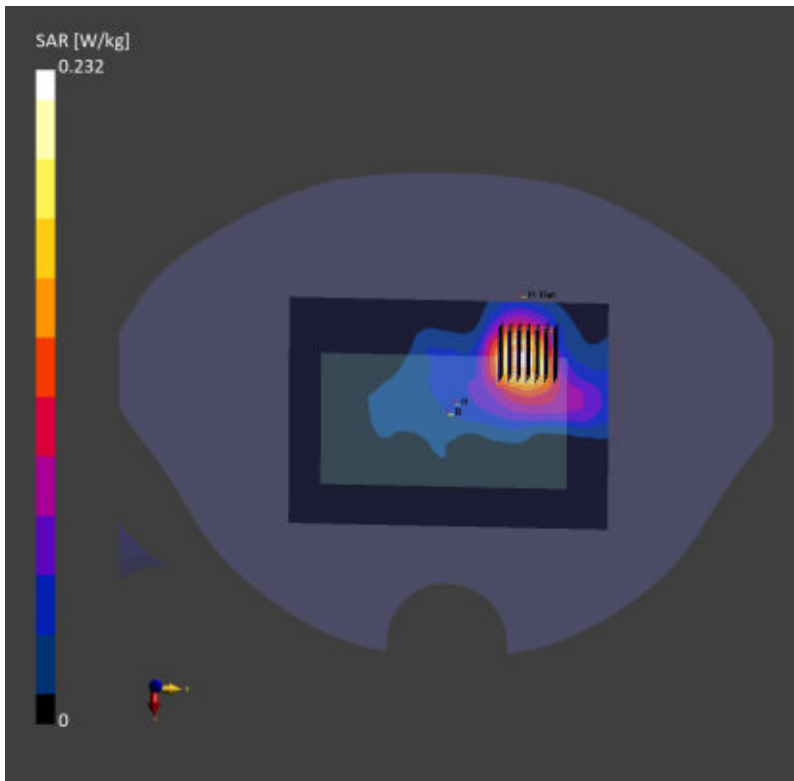

Date: 2026-01-07

60_WLAN5GHz_802.11ac-VHT80 MCS0_Back_0mm_Ch58

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5290.0 MHz; Duty Cycle: 1:1.107

Medium: HSL Medium parameters used: $f = 5290.0$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 36.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.0); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10544-AAC

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.13 W/kg; SAR (10g) = 0.677 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.09 dB

SAR (1g) = 3.86 W/kg; SAR (10g) = 0.755 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.7 %

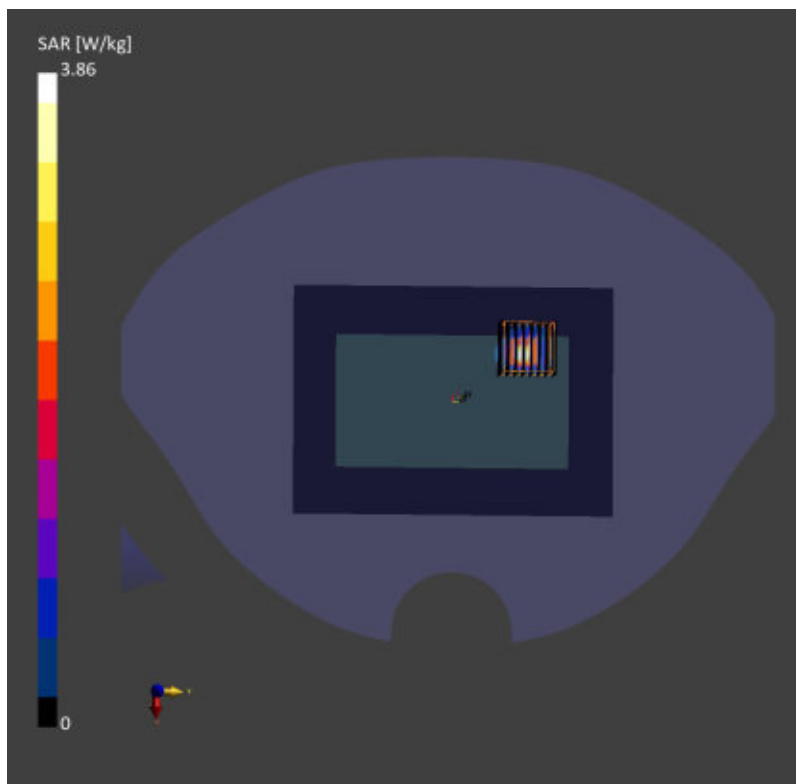

Date: 2026-01-09

61_WLAN5GHz_802.11n-HT40 MCS0_Back_0mm_Ch110

Communication System: IEEE 802.11n (HT Mixed, 40MHz, MCS0, 99pc duty cycle);

Frequency: 5550.0 MHz; Duty Cycle: 1:1.054

Medium: HSL Medium parameters used: $f = 5550.0$ MHz; $\sigma = 4.94$ S/m; $\epsilon_r = 35.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.54, 5.44, 5.47); Calibrated: 2025-06-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10599-AAC

Area Scan (100.0 mm x 240.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.56 W/kg; SAR (10g) = 0.670 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm

Power Drift = -0.16 dB

SAR (1g) = 4.03 W/kg; SAR (10g) = 0.793 W/kg

Smallest distance from peaks to all points 3 dB below = 3.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.6 %

