



Wireless NVR ZR08WS Quick Start Guide

For more information of your new system, please refer to www.zositech.com

V2 .I.01.Z




Contents

EN	01
ES	12



For more product information, scan the QR code using your phone's browser or camera.

① Package Content




NVR



Quick Start Guide


NOTE: Actual product and accessories vary by different models.

② Product Structure

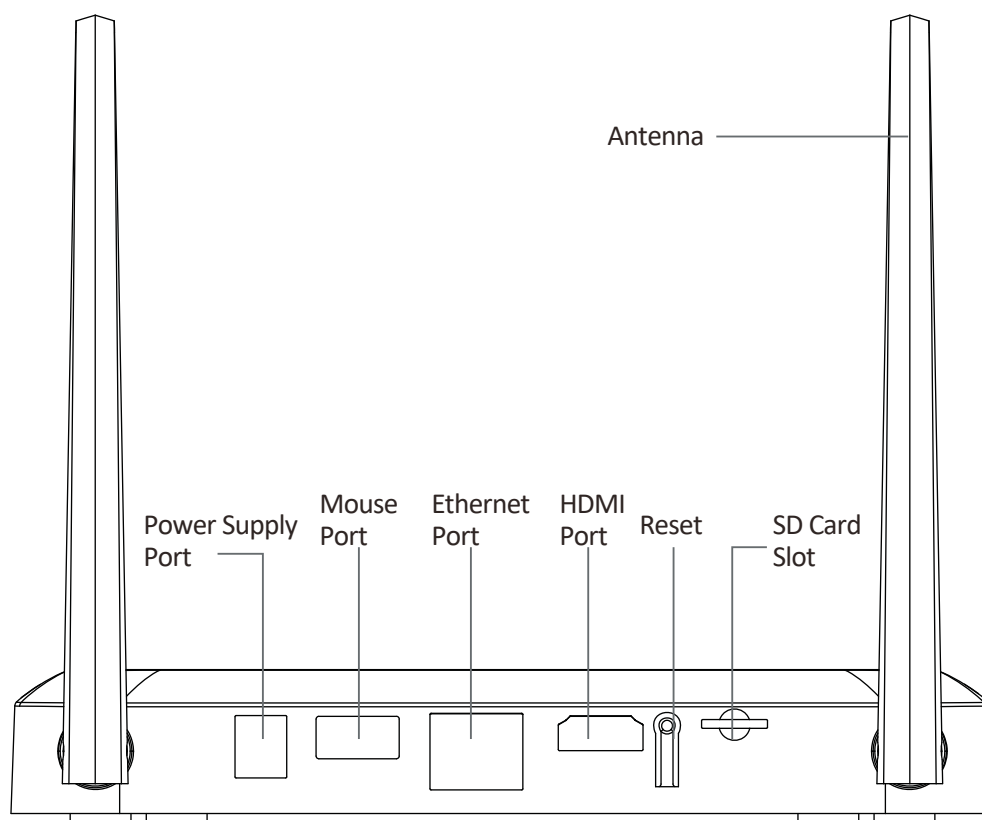

NOTE: Actual product may vary in appearance.

3 Connection Diagram

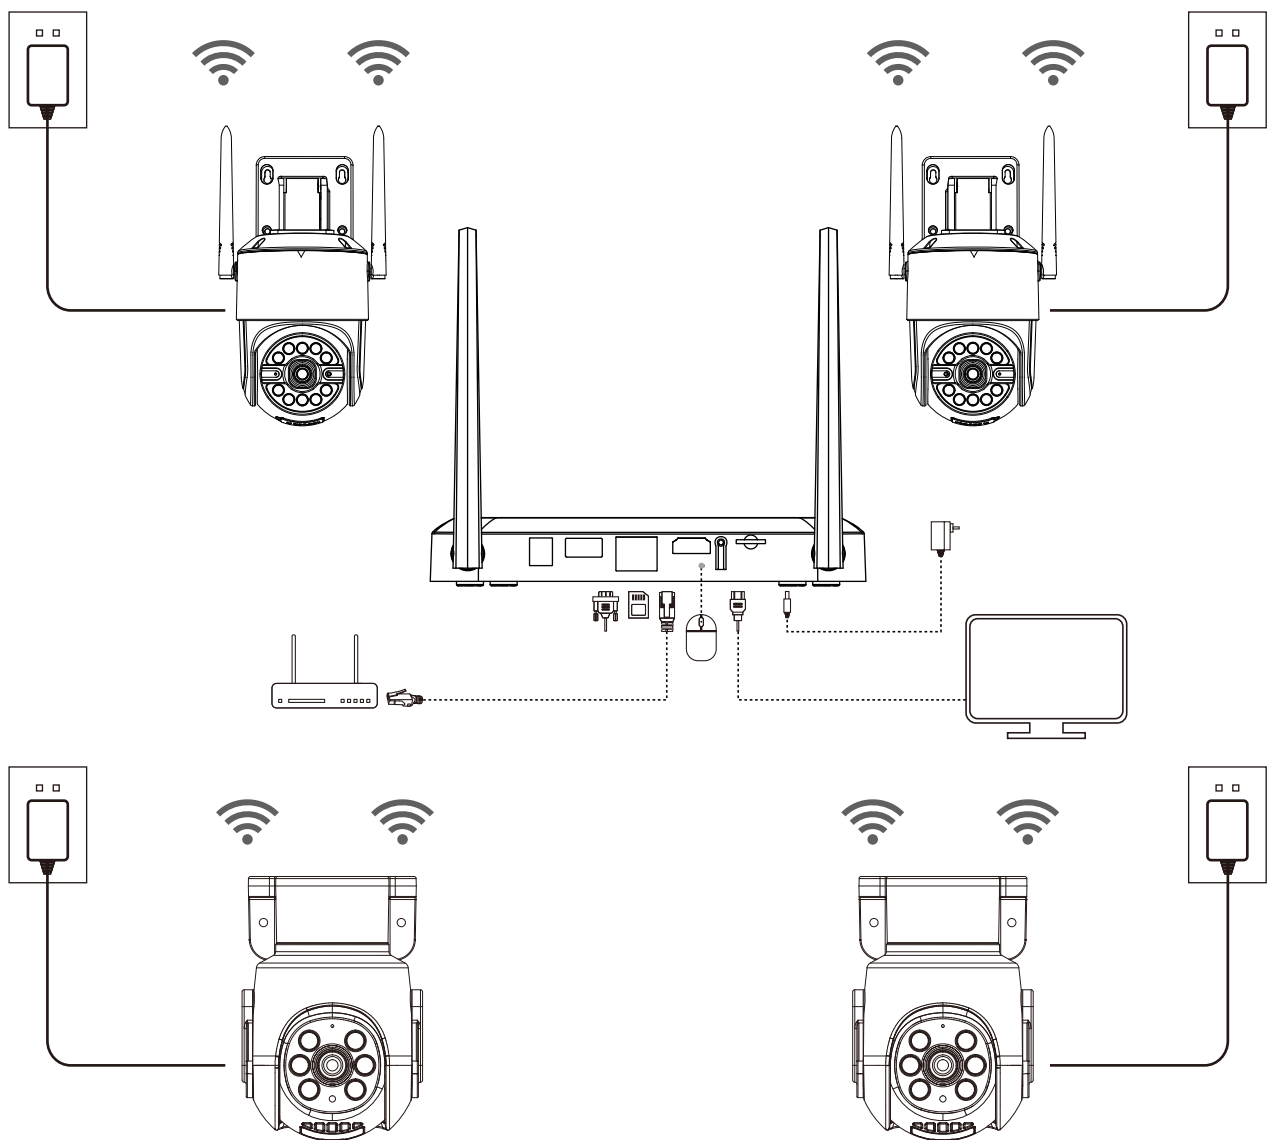

- ① Connect the NVR to Router with an Ethernet cable
- ② Connect Monitor to the NVR with HDMI.
- ③ Plug the Mouse to the USB port
- ④ Connect the NVR to a power source (12V 2A power adapter)
- ⑤ After the system starts, power on the IP camera and wait for the camera to be paired and connected with the NVR (8 channels at most).
- ⑥ The monitor will display the real-time monitoring image of the camera

NOTE: The diagram is for reference only, actual product varies by different models. Before installation, please power on to test the product.

4 Access the NVR from your smartphone or PC

4.1. View on Smartphone

Search Zosi Smart in App store or scan the QR Code to download the App.

Follow the prompts to install, register and log in to the APP. When configuring and using the device, please update the APP to the latest.



Zosi Smart



App(IOS/Android)



App video operation link

Note: During APP installation and use, please allow the APP to obtain all required permissions; otherwise, device network configuration fails to be added.

4.2. View on PC Client

Please download AVSS Client in <https://www.zositech.com/app/>.

5 System Setting


5.1. Mouse Use:

Left Button:

- When the monitor displays live and playback images in split screens, Double-click a split screen to make it full, and double-click again to return to the split screen.
- When navigating the menu, Click to open an option.

Right Button:

- On the live preview screen, click to bring up the main menu.
- When navigating the menu, Click to exit the menu or return to the previous one.

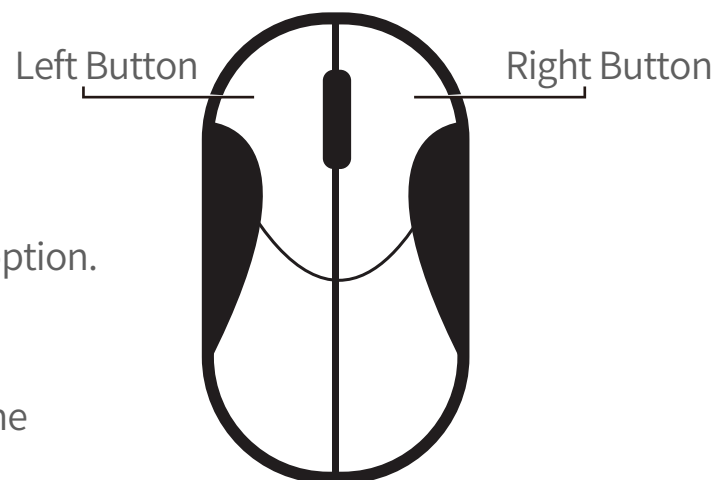


5.2. Menu Introduction:

Right-click anywhere on the live view screen to open the menu.

 Single	>	• Select single screen for live preview
 Multi	>	• Select multi-screen for live preview
 Start Scan		• Start/stop a live preview of the scan
 Colour		• Set the colour of the camera image
 E-Zoom		• Zoom in the live preview screen
 Audio		• Set the volume of the camera
 PTZ		• Control the rotation of the PTZ camera
 Snap		• Capture and save the live preview screen
 Stop Record		• Start/stop full-time record
 Time Playback		• Query and play back the videos/play back quickly
 Intelligent Detect	>	• Set up intelligent detection and light & siren alarm
 IPC Channel Config		• IPC channel config management
 Main Menu		• Open the main menu

5.3. System Password


The default user name is admin and the default password is blank. You can directly log in to the system for the first time with power on.

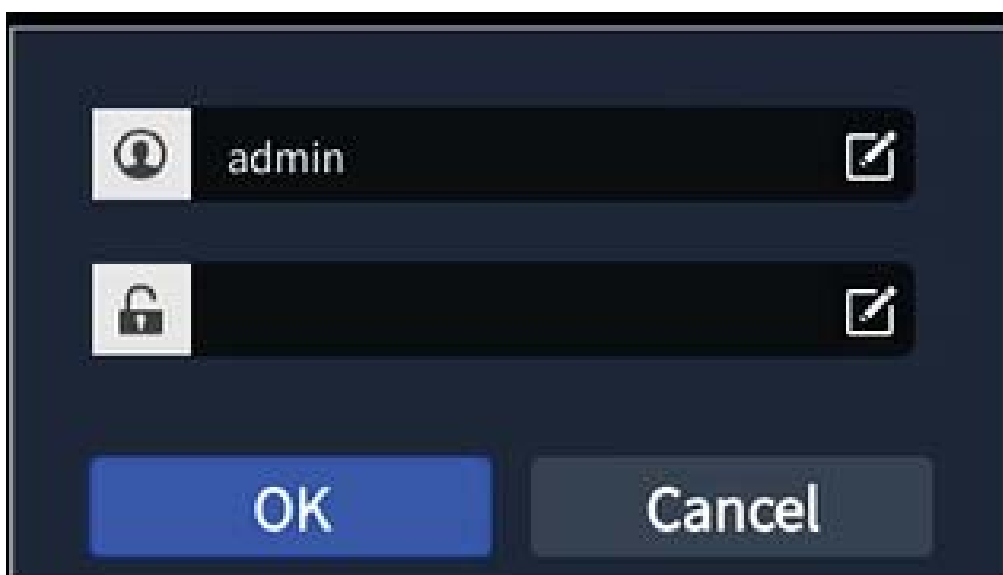

A login dialog box with a dark blue background. It contains two input fields: the first is for the username, with a user icon on the left and the text 'admin' entered; the second is for the password, with a lock icon on the left and is currently empty. Both fields have a small edit icon (a square with a diagonal line) on the right. At the bottom, there are two buttons: a blue 'OK' button and a grey 'Cancel' button.

Password change path: Right click the mouse > go to Main Menu > Config Management > User Management > Change Password.


Note: The new password cannot be less than 6 characters. Please keep it safe.

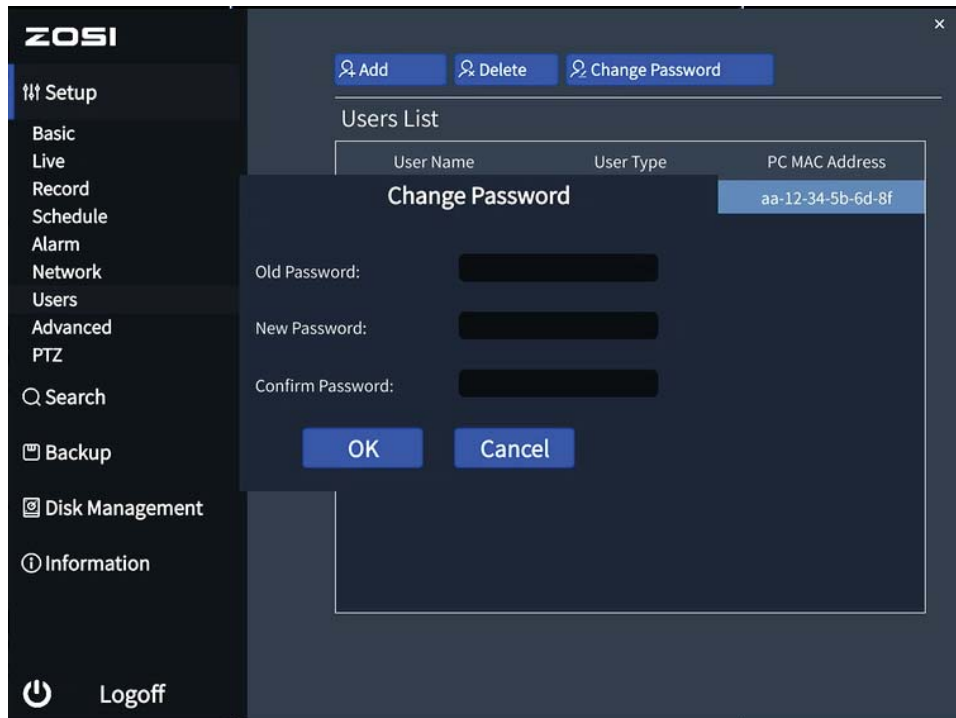

6 System Time Setting

Right click the mouse > go to Main Menu > Config Management > Basic Config > Date and Time > Select the appropriate time zone based on your location, and click Apply.

Note: GMT is the default time zone. Please select the time zone based on your location.

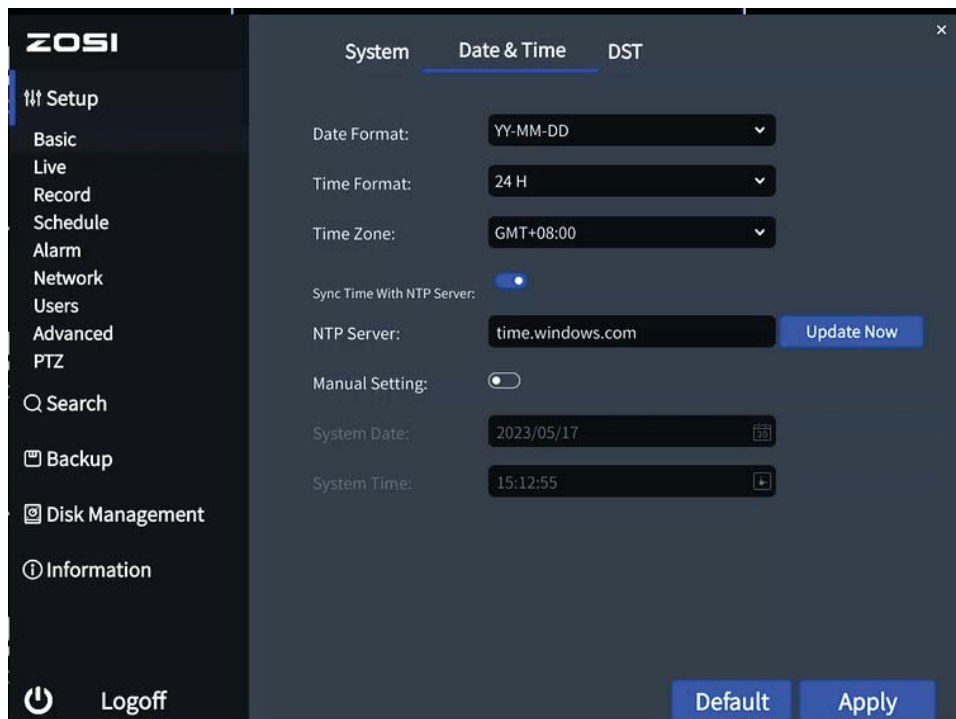


7 Video Playback

Right click the mouse > Video Playback, you can choose Video Playback/Quick Playback.

Video Playback: Search the video you want via Time or Event, then play it.


Quick Playback: You can quickly play back the previous 30 minutes of the video.

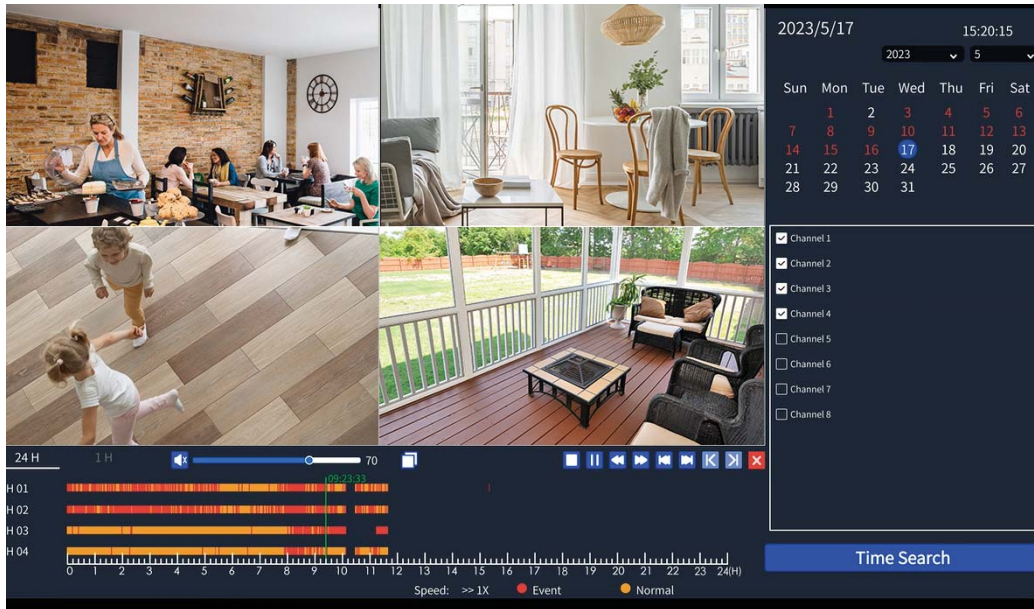

8 Video Backup

① Plug a USB flash drive into the USB port of the NVR.

② Right click the mouse > go to Main Menu > Data Backup > Select the channel and time period > Search > Select the video clip you want to back up > Click “Backup”.

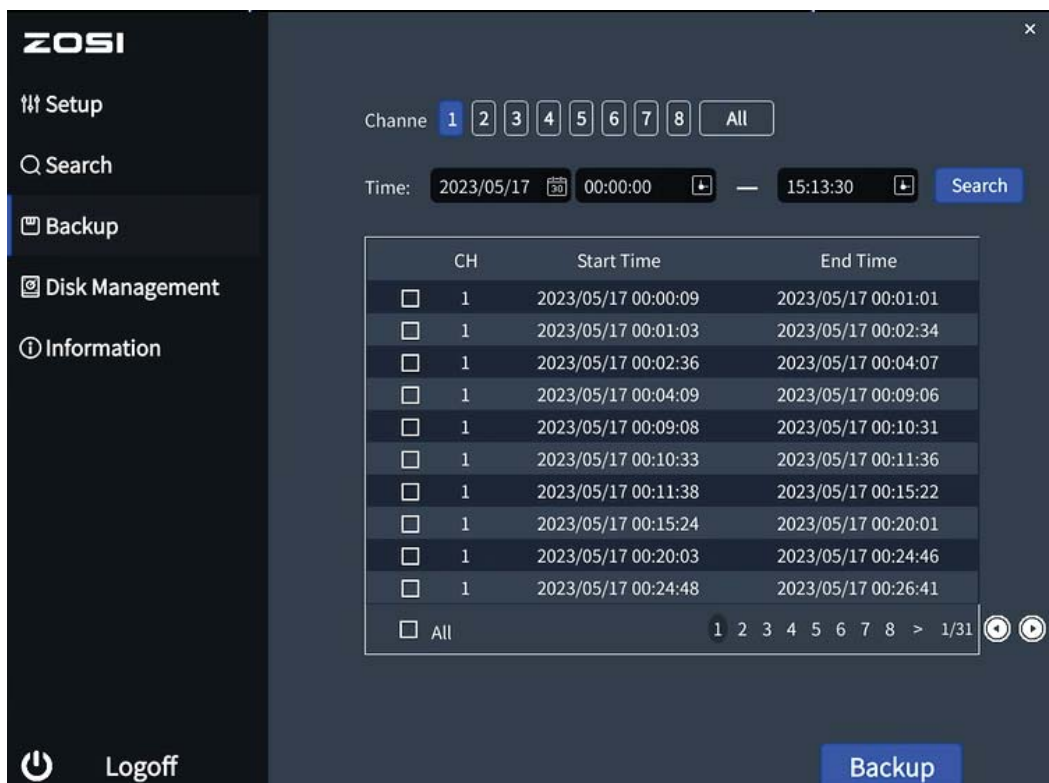

9 Usage Specification

- Use the camera only with compatible ZOSI NVRs.
- Read this guide carefully and keep it for future reference.
- Follow all instructions for safe use of the product and handle with care.
- Use the product within given temperature, humidity, voltage level noted in the device's specifications.
- Do not disassemble the product.
- Use only a regulated power supply with the product (optional). Use of a non-regulated, non-conforming power supply can damage the product and void the warranty.
- Periodic cleaning may be required. Use a damp cloth only. Do not use any harsh, chemical-based cleaners.
- Do not use the product in a sealed, humid environment. It is recommended to place it in a location that is easily ventilated for installation.
- Do not disassemble the device while power is on.

10 FAQ

Q: No Video Output on the Monitor?

- Ensure the lowest resolution of the monitor is no less than 720p.
- Ensure the NVR is powered on normally.
- Check the connection of the HDMI/VGA cable or use another cable to try again.

Q: Failed to Remotely Access the Camera via Mobile Phone or Computer?

- Ensure the NVR is connected to the network normally, you can go to the NVR Menu-Network-Test.
- Test and verify whether you can access the Internet by connecting your phone or computer to the same network as the NVR.
- Reboot your NVR or router.

Q: Does the system support motion detection and image capture?

- It captures images automatically when people, cars, are detected or when there is a change in detected images. Users can also manually capture images using our ZOSI Smart APP.

11 Notification of Compliance

FCC Compliance Statement

This device complies with Part 15 of FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Simplified EU Declaration of Conformity

ZOSI declares that the device is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.



Correct Disposal of this Product

This marking indicates that this product cannot be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal and promote the sustainable reuse of material resources, please recycle it responsibly. To return your used device, please visit the Return and Collection System or contact the retailer from whom the product was purchased. They can take this product away for environmentally safe recycling.

WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours**.
- **KEEP** new and used batteries **OUT OF REACH of CHILDREN**
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.



- a) Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do NOT dispose of batteries in household trash or incinerate.
- b) Even used batteries may cause severe injury or death.
- c) Call a local poison control center for treatment information.
- d) The compatible battery type: CR2032
- e) The nominal battery voltage: 3V
- f) Non-rechargeable batteries are not to be recharged.
- g) Do not force discharge, recharge, disassemble, heat above 60°C (manufacturer's specified temperature rating) or incinerate. Doing so may result in injury due to venting, leakage or explosion resulting in chemical burns.

Products with non-replaceable button/coin cell batteries shall additionally include a statement indicating the product contains non-replaceable batteries

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Warning Statements:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment shall be installed and operated with minimum distance 20cm between the radiator & body.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) L'appareil ne doit pas produire de brouillage;
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.


ISED Radio Frequency Exposure Statement:

The device has been evaluated to meet general RF exposure requirements. The device can be used in mobile exposure conditions. The min separation distance is 20 cm.

ISED Déclaration d'exposition aux radiofréquences:

L'appareil a été évalué pour répondre aux exigences générales en matière d'exposition aux RF. L'appareil peut être utilisé dans des conditions d'exposition mobiles. La distance de séparation minimale est de 20 cm.

1 Lista de empaque




Grabador NVR



Manual de instrucciones


NOTA: Los productos y accesorios varían por diferentes modelos, por favor consulte el producto específico.

2 Introducción del producto

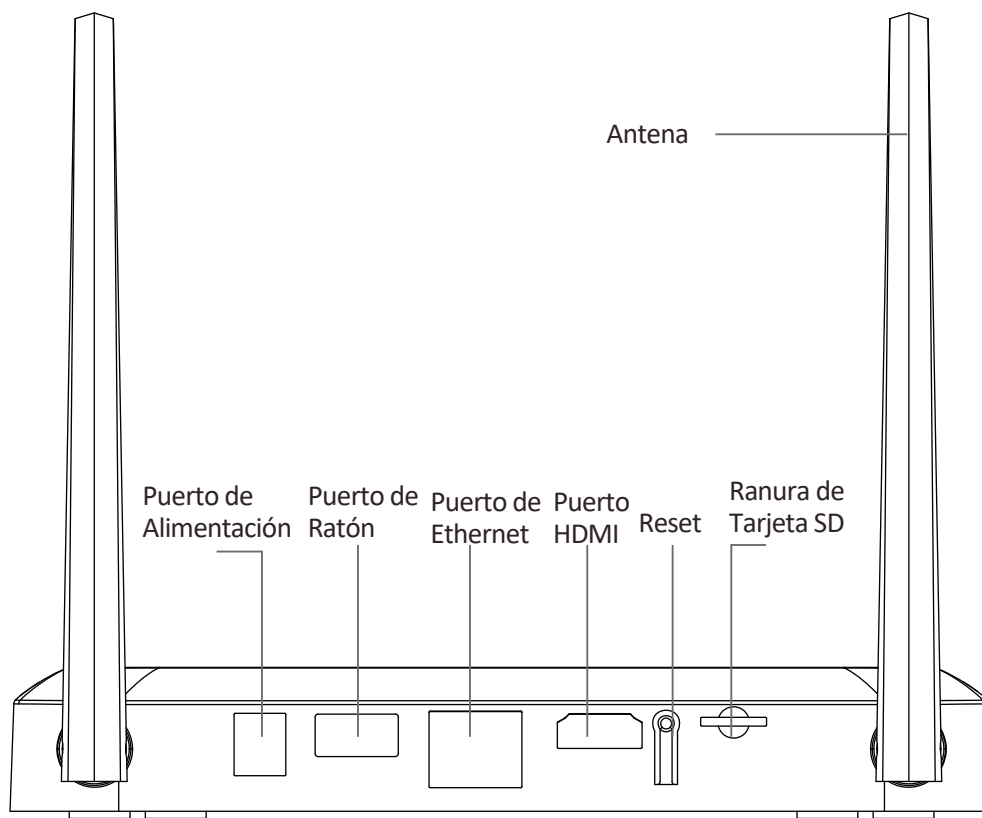

NOTA: El aspecto del producto se varían por diferentes modelos, por favor consulte el producto específico.

3 Diagrama de conexión

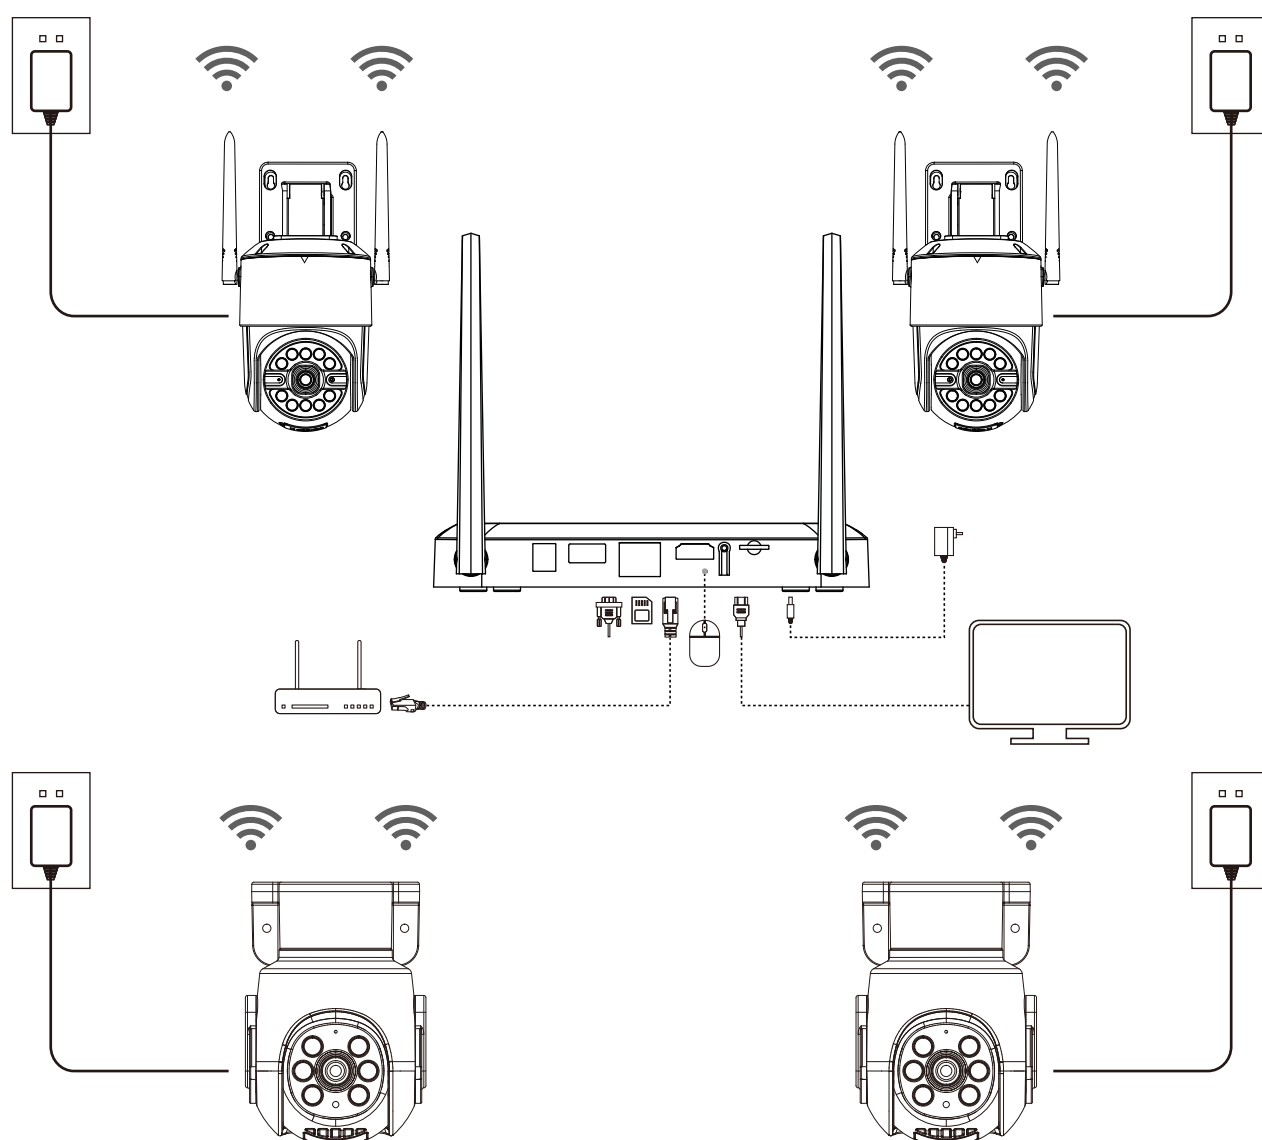

- ① Conecte el NVR al router mediante un cable de red.
- ② Conecte el NVR al monitor a través del puerto HDMI.
- ③ Conecte el ratón USB al puerto USB del NVR.
- ④ Alimente el NVR con la fuente de alimentación 12A 2A.
- ⑤ Después de arranque el sistema, alimente la cámara IP y espere a que se empareje con el NVR (se admite hasta 8 canales).
- ⑥ El monitor producirá la imagen de la cámara en tiempo real.

NOTA: Se recomienda que pruebe el NVR y todas las cámaras antes de la instalación del dispositivo.

4 Acceso del sistema a través del Móvil inteligente o PC

4.1. Móvil Inteligente

Busque Zosi Smart en App Store o escanee el código QR para descargar e instalar la aplicación.

Siga las instrucciones para registrar una cuenta. Por favor actualice la aplicación a la última versión.



Zosi Smart



App(IOS/Android)



Video de operación de App

Nota: Durante la instalación y el uso de la aplicación, por favor permita que la aplicación obtenga todos los permisos necesarios. Si no los permite, podrá fallar al añadir la configuración de red del dispositivo.

4.2. PC

Enlace de descarga: <https://www.zositech.com/app/>

5 Configuración del sistema NVR

5.1. Uso del ratón:

Botón izquierdo del ratón:

- Interfaz de vista previa o reproducción:

Haga doble clic en único canal para ingresar en la pantalla completa y haga doble clic de nuevo para salir de la pantalla completa.

- Menú de navegación:


Haga clic con el botón izquierdo para seleccionar una opción en el menú.

Botón derecho del ratón:

- Haga clic con el botón derecho para ingresar en el menú principal cuando el ratón esté en la interfaz de vista previa.

- Menú de navegación:

Haga clic con el botón derecho para salir del menú o volver a la opción anterior.

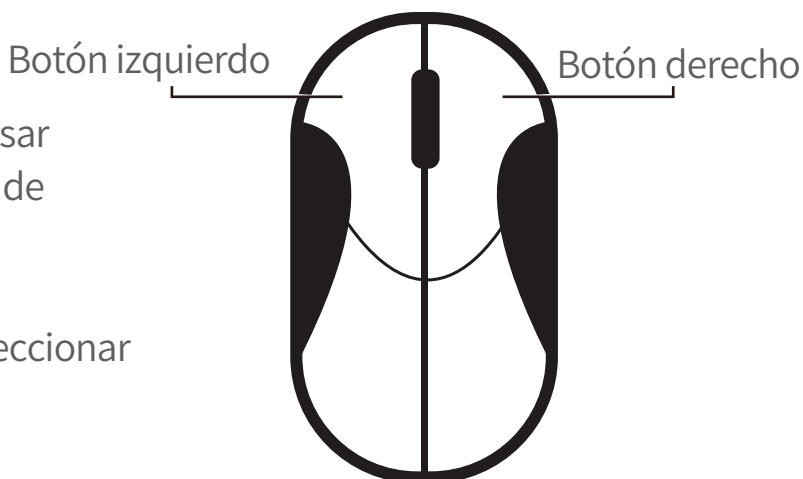

5.2. Introducción del menú:


Haga clic derecho en cualquier lugar de la pantalla para abrir el menú.



- Único: Seleccione un solo canal para vista en vivo
- Múltiples: Seleccione múlti-canales para vista en vivo
- Iniciar escaneo: Iniciar/Detener escaneo
- Color: Ajuste la configuración de color e imagen
- Zoom: Agrande la interfaz de vista previa
- Audio: Ajuste el volumen de la cámara
- Foto: Capture y guarde imágenes de vista en vivo
- Detener la grabación: Iniciar/Detener las grabaciones
- Reproducir: Busque reproducción de video y reproducción rápida
- Alarma inteligente: Configure Detección Humana y Alarma de Sonido&Luz
- Config canal IPC: Gestione la configuración de canal de IPC
- Menú principal: Entre al Menú principal


5.3. Contraseña del sistema

El nombre de usuario por defecto es "admin" y la contraseña está vacía, así que los usuarios pueden iniciar sesión en el sistema directamente por la primera vez.

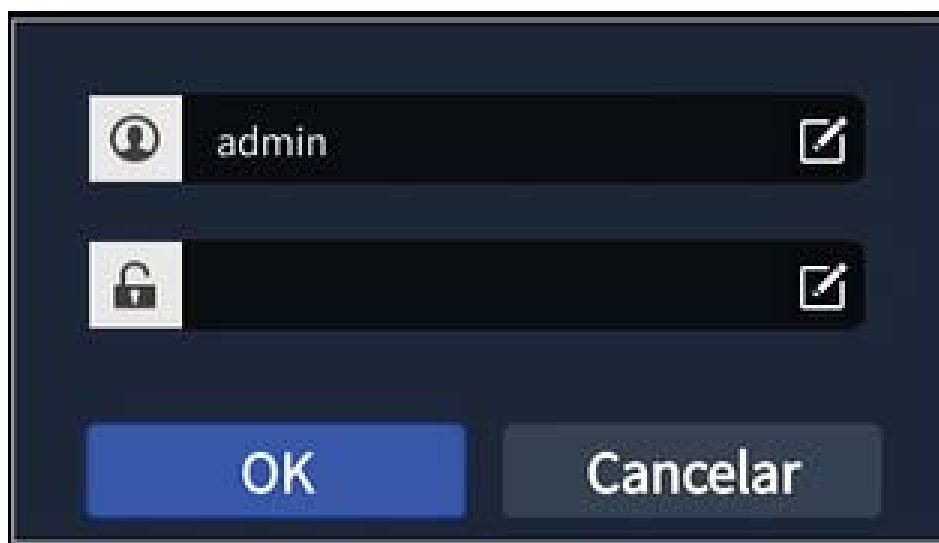

Método de cambiar contraseña: haga clic con el botón derecho del ratón - Menú principal - Configuración - Usuarios - Cambiar contraseña.

NOTA: La nueva contraseña no puede ser menos de 6 caracteres, por favor conserve la contraseña correctamente.

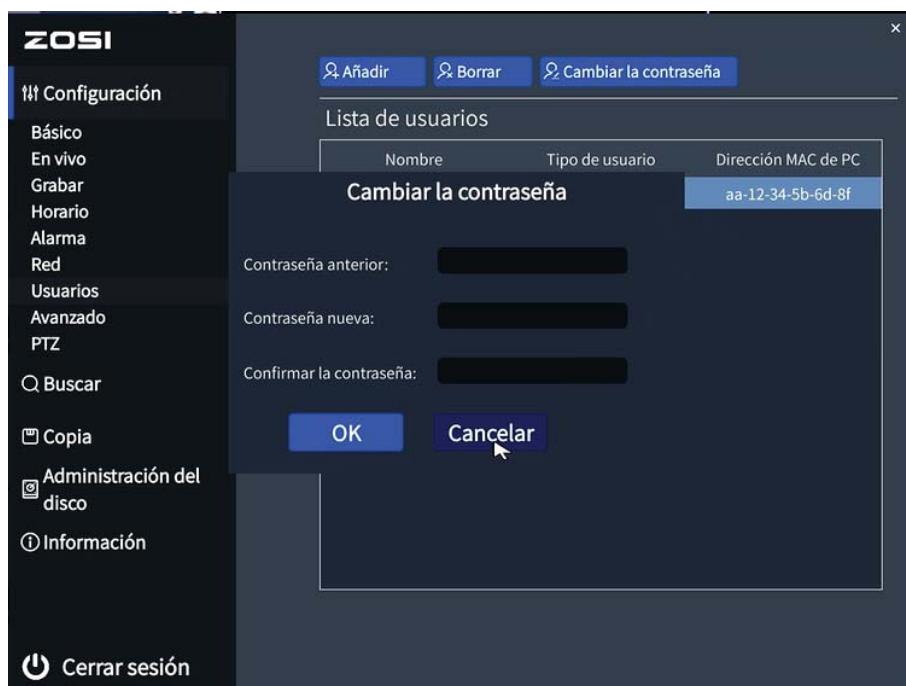

6 Configuración de la fecha y hora

Haga clic con el botón derecho del ratón - Menú principal - Configuración - Básico - Fecha y hora - Elija la hora correspondiente según su región y luego haga clic en "Aplicar" para guardar.


NOTA: El horario predeterminado es GMT, por favor elija la hora correspondiente según su región.



7 Reproducción de vídeos

Haga clic derecho del ratón - Reproducir - Reproducción de video/Reproducción rápida, Reproducción de video: reproduzca videos a través de la búsqueda de tiempo o la búsqueda de evento.


Reproducción rápida: reproduzca rápidamente los primeros 30 minutos del video.

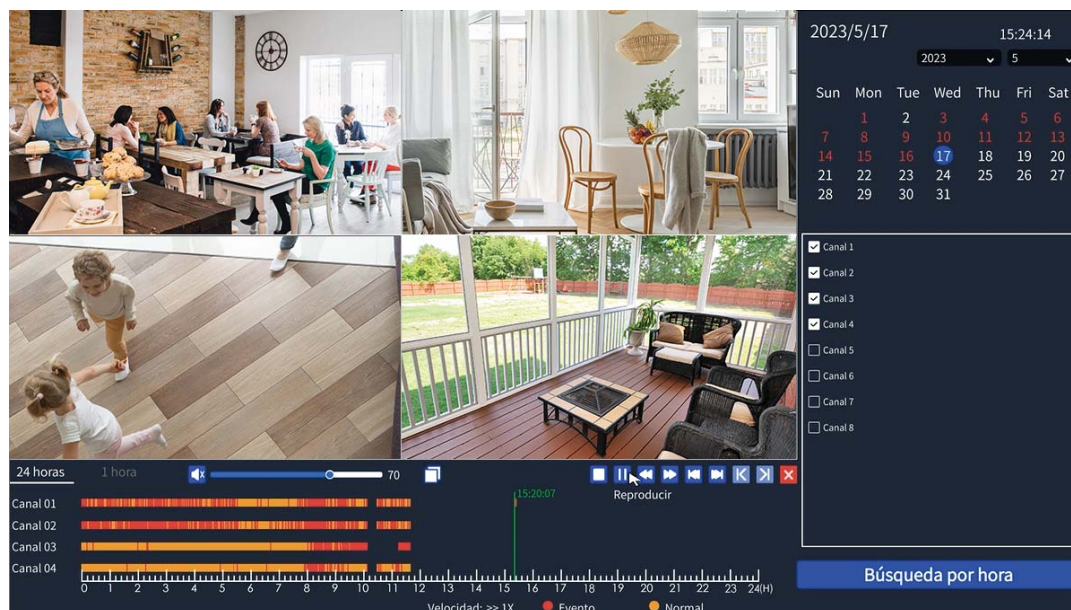

8 Copia de seguridad

① Inserte un pendrive USB en el puerto USB del NVR.

② Haga clic derecho del ratón - Menú principal - Copia de seguridad - Elija el canal y el período de tiempo - Buscar - Elija los videos que desea copiar > Haga clic en "Aplicar".

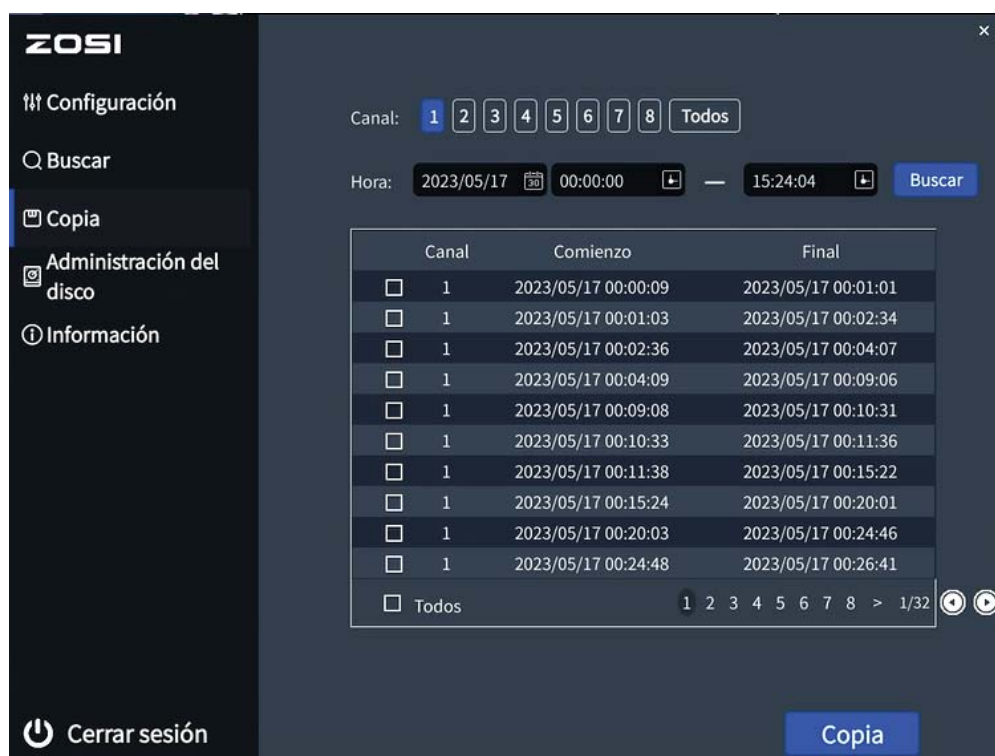

9 Especificación de uso

- Use cámara con ZOSI NVRs compatibles solamente.
- Lea esta guía detenidamente y consérvela para consultarla en el futuro.
- Siga todas las instrucciones para un uso seguro del producto y manéjelo con cuidado.
- Utilice el producto dentro de la temperatura, la humedad y el nivel de voltaje indicados en las especificaciones del dispositivo.
- No desmonte el producto.
- Use una fuente de alimentación regulada con el producto (opcional) solamente. El uso de una fuente de alimentación no regulada y no conforme puede dañar el producto y anular la garantía.
- Es posible que se requiera una limpieza periódica. Utilice únicamente un paño húmedo. No utilice limpiadores agresivos a base de productos químicos.
- No utilice el producto en un entorno húmedo y sellado. Se recomienda colocarlo en un lugar que sea fácilmente ventilado para su instalación.
- No desmonte el dispositivo mientras esté encendido.

10 Preguntas frecuentes

Q: ¿No hay salida de vídeo en el monitor?

- Asegúrese de que la resolución mínima del monitor no es inferior a 720p;
- Asegúrese de que el grabador está encendido correctamente;
- Por favor compruebe la conexión del cable HDMI/VGA o cambie un otro cable de conexión/ monitor y vuelva a intentarlo;

Q: ¿No se puede acceder al dispositivo de forma remota por teléfono móvil o PC?

- Asegúrese de que el grabador está correctamente conectado a la red, Menú principal - Red - Prueba;
- Por favor compruebe el estado de la red conectándose a la misma red que el grabador por teléfono móvil o PC para la prueba;
- Reinicie el grabador o el router;

Q: ¿Soporta la detección de movimiento y la captura de imágenes el sistema?

- Habilitarán la detección de movimiento y la captura de imágenes instantánea si la cámara está conectada a un DVR compatible. Capturará imágenes automáticamente cuando se detectan personas, vehículos o cuando el objetivo detectado mueve. Los usuarios también pueden capturar imágenes manualmente en la aplicación Zosi Smart.

11 Notificación de Cumplimiento

Declaración de Cumplimiento de la FCC

Este dispositivo cumple con la Parte 15 de las Normas de la FCC.

La operación está sujeta a las siguientes dos condiciones:

- (1) Este dispositivo no puede causar interferencias perjudiciales.
- (2) Este dispositivo debe aceptar cualquier interferencia recibida, incluidas las inferencias que puedan provocar una operación no deseada.

Declaración de Conformidad de UE Simplificada

ZOSI declara que el dispositivo cumple con los requisitos esenciales y otras disposiciones relevantes de la Directiva 2014/53/UE.



Eliminación Correcta de este Producto

Esta marca indica que este producto no se puede desechar con otros residuos domésticos en toda la UE. Para evitar posibles daños al medio ambiente o la salud humana por la eliminación descontrolada de desechos y promover la reutilización sostenible de los recursos materiales, recíclelo de manera responsable. Para devolver su dispositivo usado, visite el Sistema de Devolución y Recolección o comuníquese con el minorista donde compró el producto. Pueden llevarse este producto para un reciclaje seguro para el medio ambiente.

⚠ ADVERTENCIA

- **RIESGO DE INGESTIÓN:** Este producto contiene una pila botón o batería de moneda.
- En caso de ingestión puede producirse la MUERTE o lesiones graves.
- A la ingestión de una pila de botón o batería de moneda puede provocar **Quemaduras Químicas Internas** en tan sólo **2 horas**.
- **MANTENGA** pilas nuevas y usadas **FUERA DEL ALCANCE DE LOS NIÑOS**.
- **Busque Atención médica inmediata** si se sospecha que se ha tragado o introducido una pila en cualquier parte del cuerpo.



- a) Retire las pilas usadas y recíclelas o deséchelas inmediatamente de acuerdo con la normativa local y manténgalas fuera del alcance de los niños. NO tire las pilas a la basura doméstica ni las incinere.
- b) Incluso las pilas usadas pueden causar lesiones graves o la muerte.
- c) Llame a un centro de toxicología local para obtener información sobre el tratamiento.
- d) El tipo de pila compatible: CR2032
- e) El voltaje nominal de la pila: 3V
- f) Las pilas no recargables no deben recargarse.
- g) No fuerce la descarga, la recarga, el desmontaje, el calentamiento por encima de 60°C (temperatura nominal especificada por el fabricante) ni la incineración. De lo contrario, podrían producirse lesiones por ventilación, fuga o explosión que provoque quemaduras químicas.

Los productos con pilas de botón/batería de moneda no sustituibles deberán además incluir una declaración que indique que el producto contiene pilas no sustituibles.

ZOSI



www.zositech.com

Support Email: service@zositech.com

Facebook: <https://www.facebook.com/ZosiTechnology/>

Whatsapp: +1-866-841-6932

UK Whatsapp: +86 18675610962

Responsible Party: Ansjer Electronics Co., Ltd

Company name : Loocam Technology LLC

Address: 2205 Hutton Dr, Unit 100, Carrollton TX 75006

Tel: 657-223-3477

E-mail: lavenderl@loocam.com

Copyright © 2024 ZOSI Technology Co., Ltd.

No part of this publication may be reproduced in any way without the written permission of ZOSI. The information in this publication is believed to be accurate in all respects. ZOSI assumes no responsibility for any consequences resulting from their use. As our products require continuous improvement, ZOSI reserves the right to modify product designs, specifications and prices without notice and without any obligation. All rights reserved, and ZOSI reserves the final interpretation right of this manual.



F92101400009460