


Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Max Variation (%)
NVNT	a	5260	Ant1	1.398	1.496	93.45	0.29	0.72	0.22
NVNT	a	5300	Ant1	1.396	1.494	93.44	0.29	0.72	0.19
NVNT	a	5320	Ant1	1.396	1.494	93.44	0.29	0.72	0.20
NVNT	a	5260	Ant2	1.396	1.496	93.32	0.3	0.72	0.18
NVNT	a	5300	Ant2	1.398	1.494	93.57	0.29	0.72	0.18
NVNT	a	5320	Ant2	1.396	1.496	93.32	0.3	0.72	0.20
NVNT	n20	5260	MIMO	1.308	1.407	92.96	0.32	0.76	0.19
NVNT	n20	5300	MIMO	1.308	1.407	92.96	0.32	0.76	0.20
NVNT	n20	5320	MIMO	1.308	1.731	75.56	1.22	0.76	0.17
NVNT	n40	5270	MIMO	0.651	0.747	87.15	0.6	1.54	0.15
NVNT	n40	5310	MIMO	0.648	0.747	86.75	0.62	1.54	0.15
NVNT	ac20	5260	MIMO	1.317	1.416	93.01	0.31	0.76	0.20
NVNT	ac20	5300	MIMO	1.317	1.416	93.01	0.31	0.76	0.18
NVNT	ac20	5320	MIMO	1.314	1.413	92.99	0.32	0.76	0.22
NVNT	ac40	5270	MIMO	0.66	0.756	87.3	0.59	1.52	0.22
NVNT	ac40	5310	MIMO	0.657	0.756	86.9	0.61	1.52	0.17
NVNT	ac80	5290	MIMO	0.324	0.423	76.6	1.16	3.09	0.19
NVNT	ax20	5260	MIMO	1.02	1.119	91.15	0.4	0.98	0.19
NVNT	ax20	5300	MIMO	1.02	1.119	91.15	0.4	0.98	0.20
NVNT	ax20	5320	MIMO	1.023	1.119	91.42	0.39	0.98	0.19
NVNT	ax40	5270	MIMO	0.543	0.639	84.98	0.71	1.84	0.19
NVNT	ax40	5310	MIMO	0.543	0.639	84.98	0.71	1.84	0.18
NVNT	ax80	5290	MIMO	0.292	0.396	73.74	1.32	3.42	0.14

Test Graphs


Duty Cycle NVNT a 5260MHz Ant1

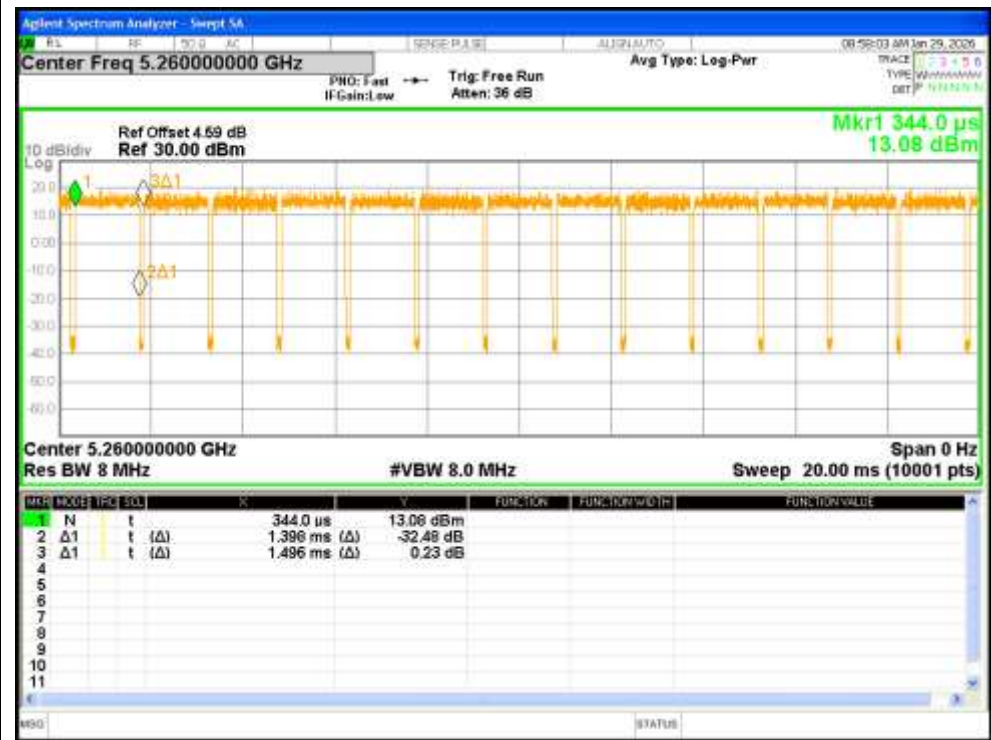


Duty Cycle NVNT a 5300MHz Ant1

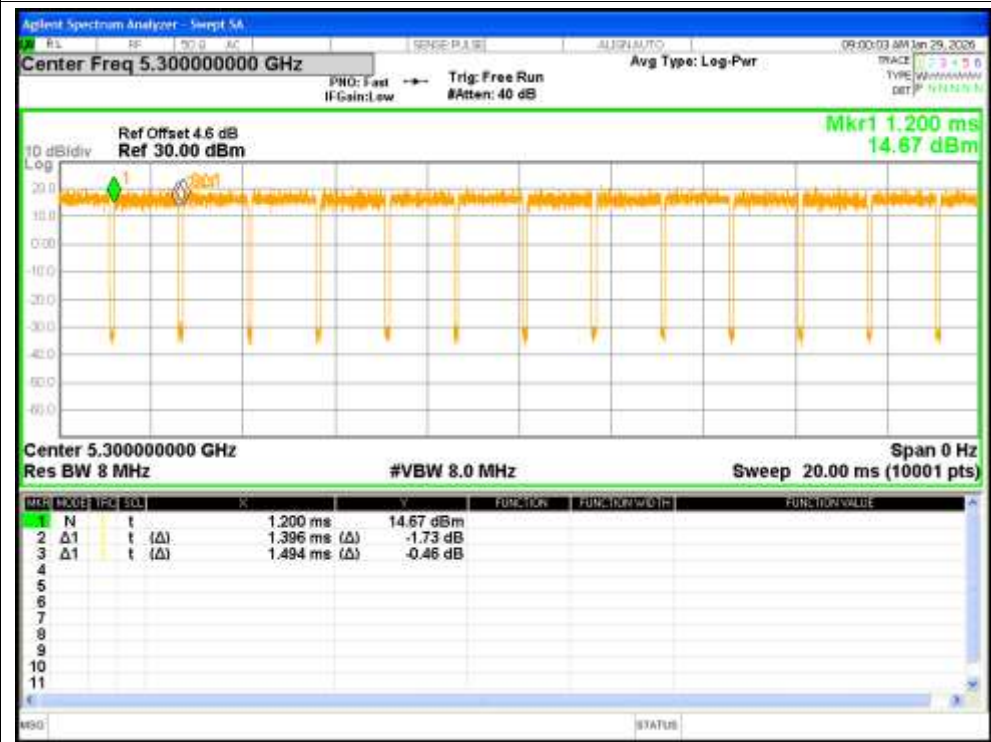


Duty Cycle NVNT a 5320MHz Ant1

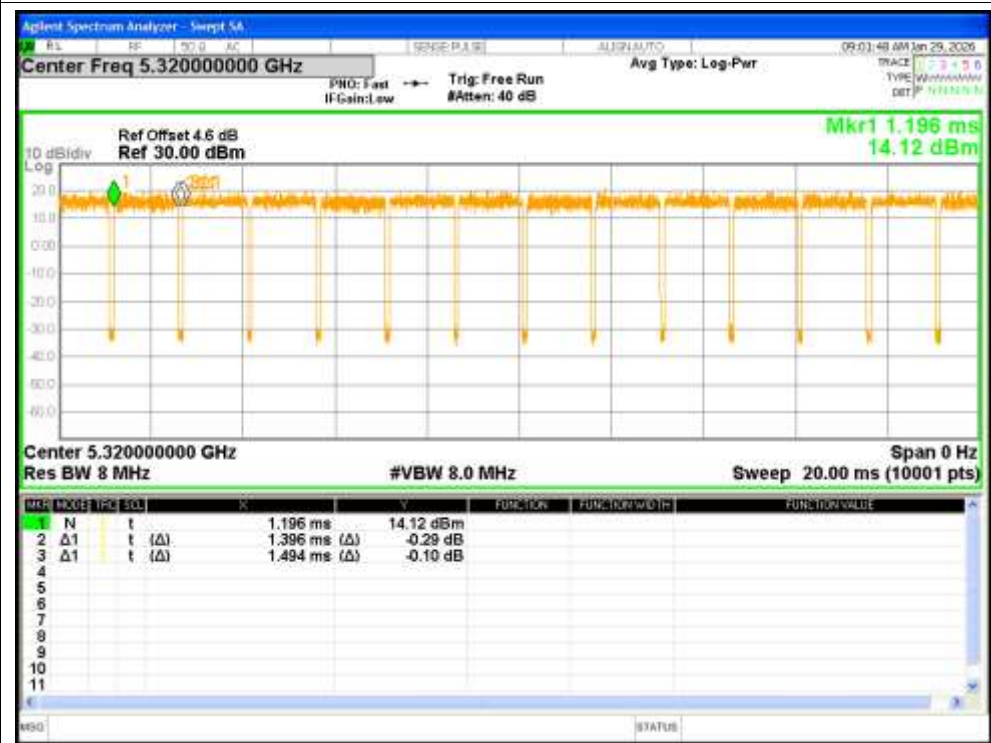


Duty Cycle NVNT a 5260MHz Ant2

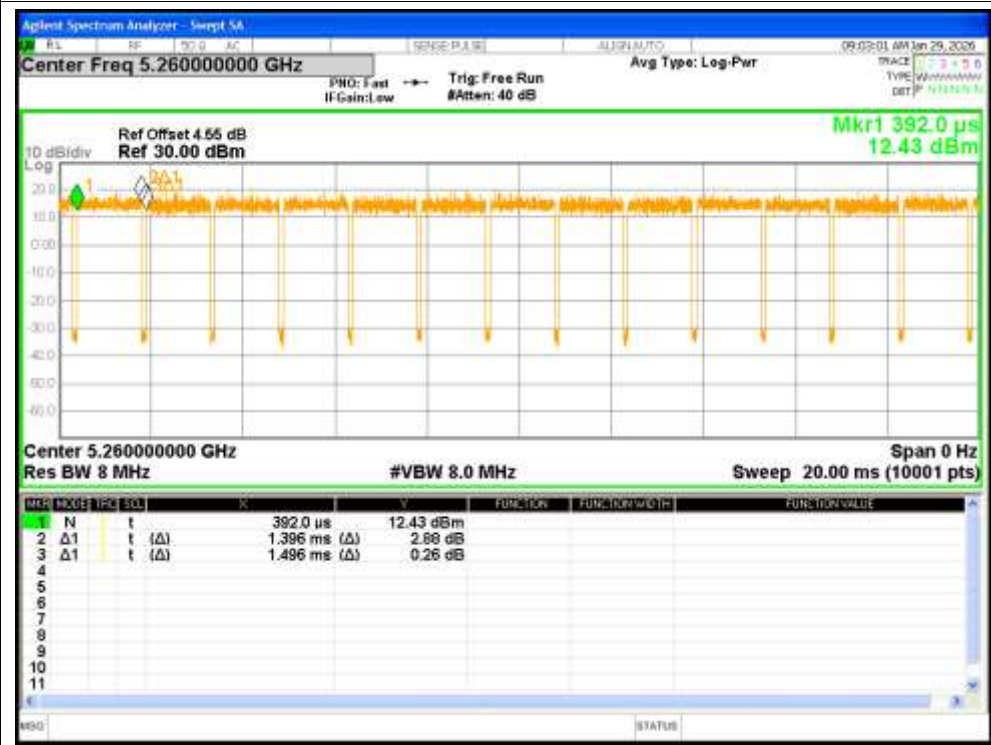

Duty Cycle NVNT a 5300MHz Ant2

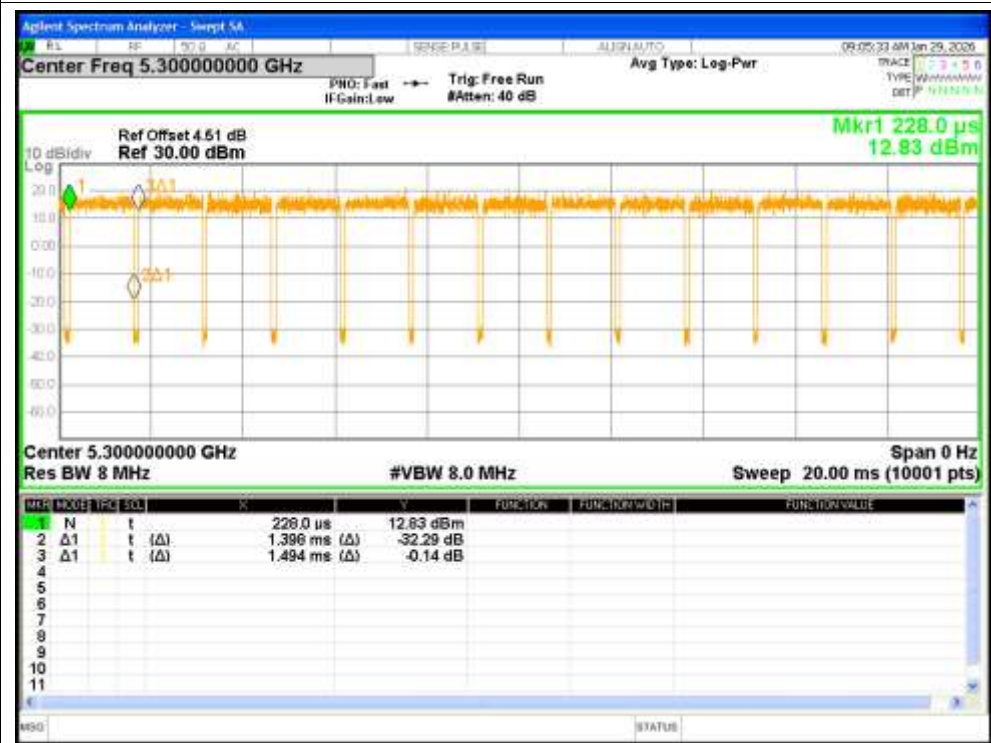


Duty Cycle NVNT a 5320MHz Ant2

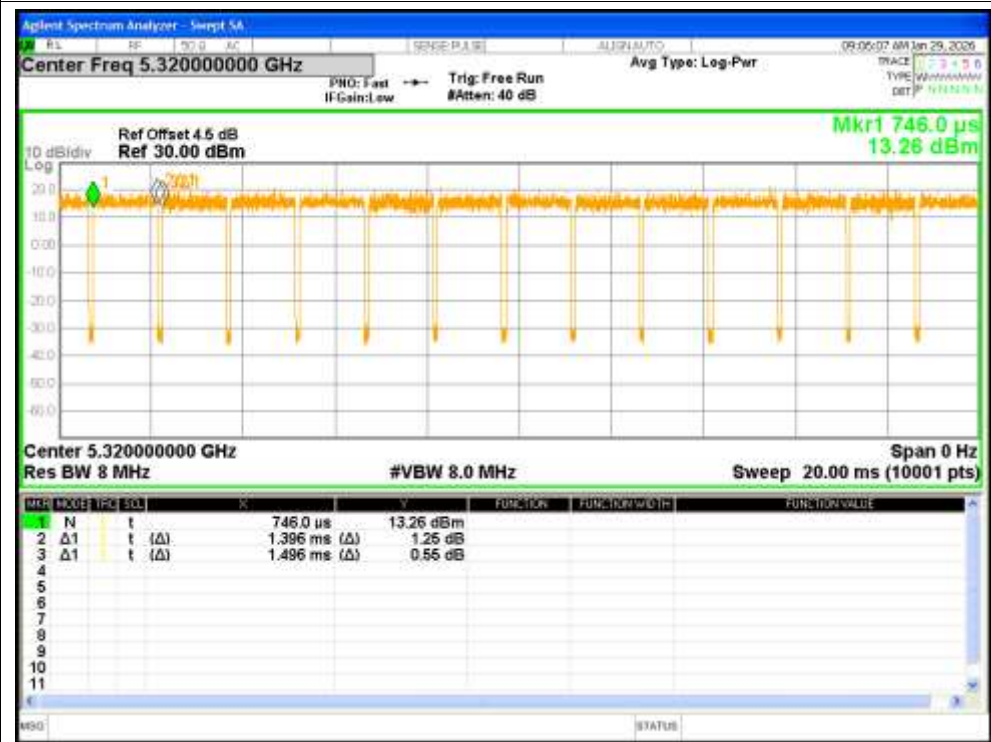


Duty Cycle NVNT n20 5260MHz MIMO


Duty Cycle NVNT n20 5320MHz MIMO

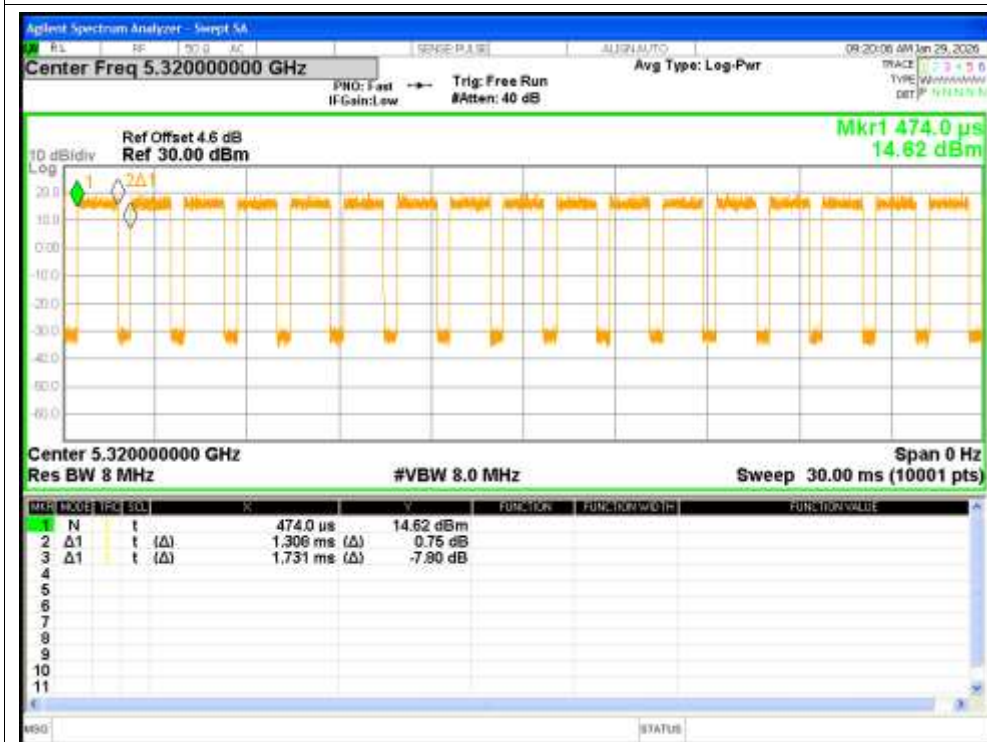


Duty Cycle NVNT n40 5270MHz MIMO

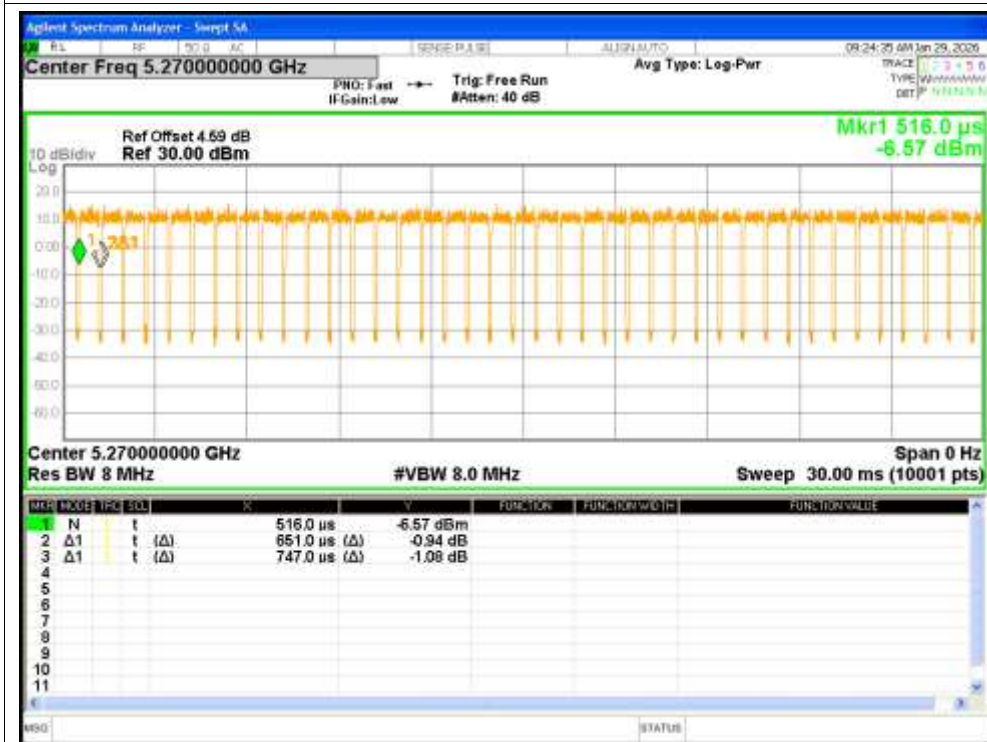


Duty Cycle NVNT ac20 5300MHz MIMO

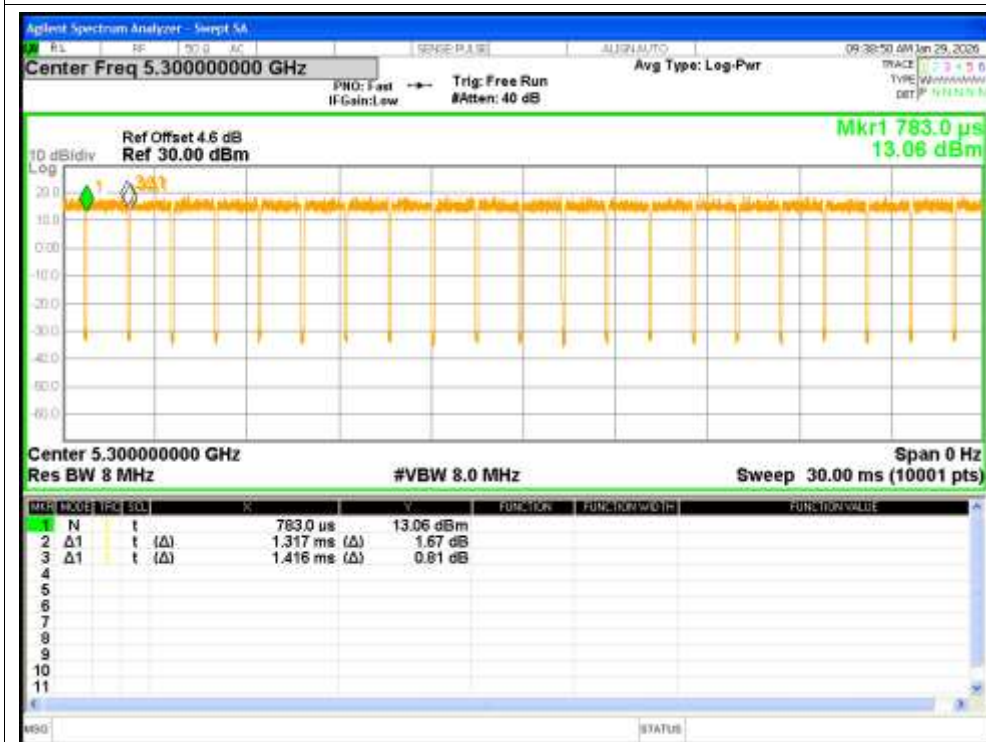


Duty Cycle NVNT ac20 5320MHz MIMO

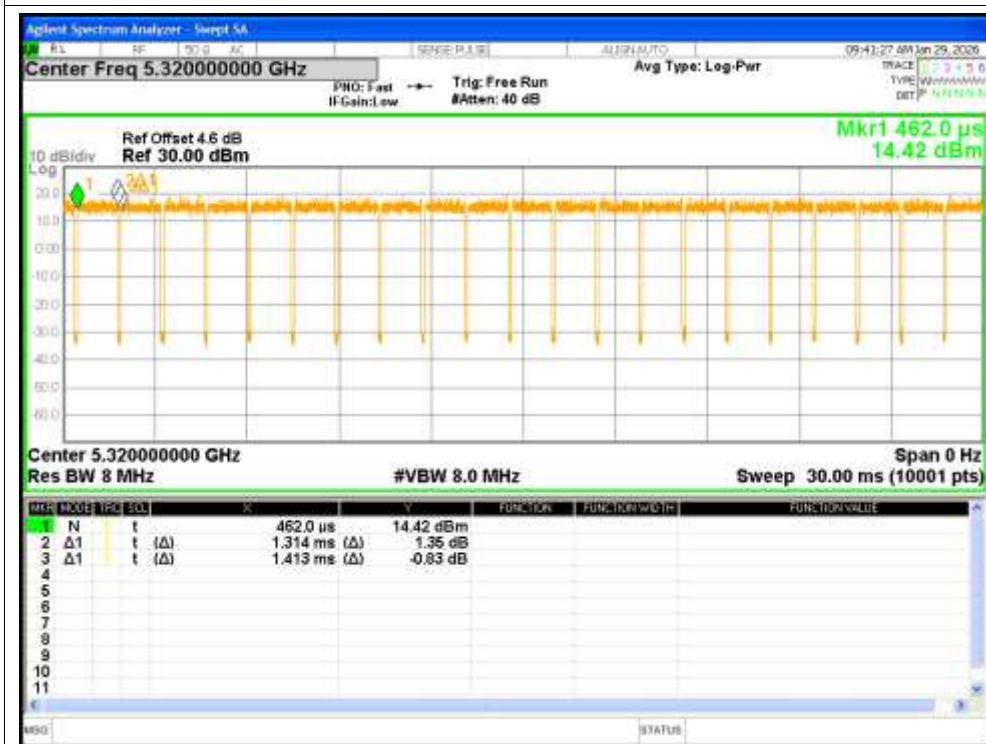


Duty Cycle NVNT ac40 5270MHz MIMO

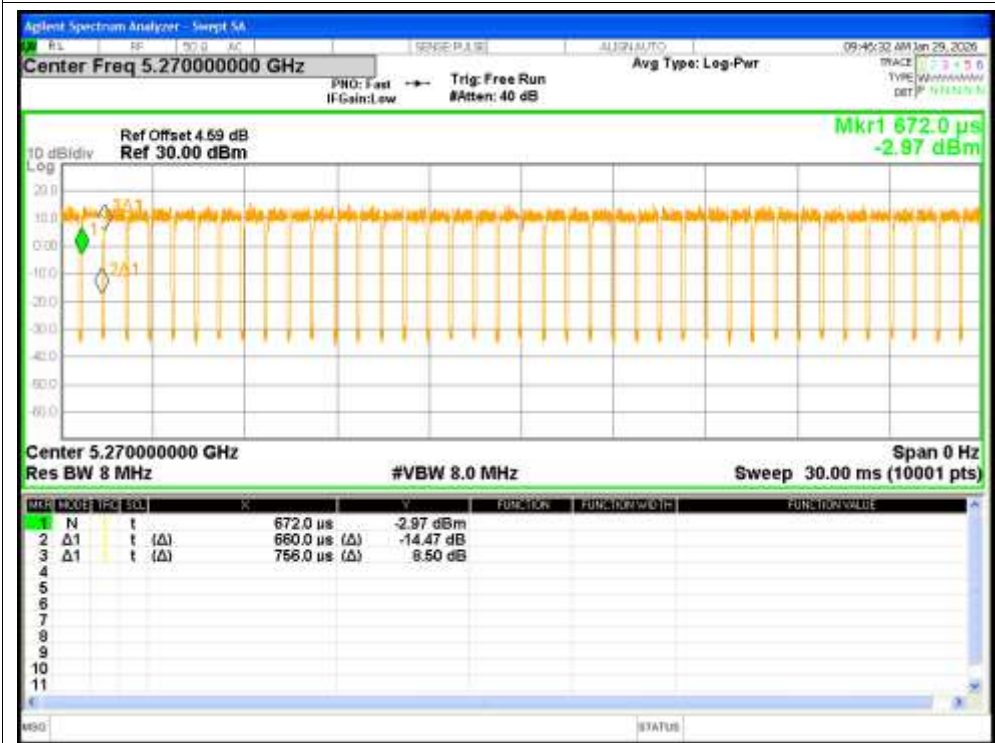


Duty Cycle NVNT ac40 5310MHz MIMO

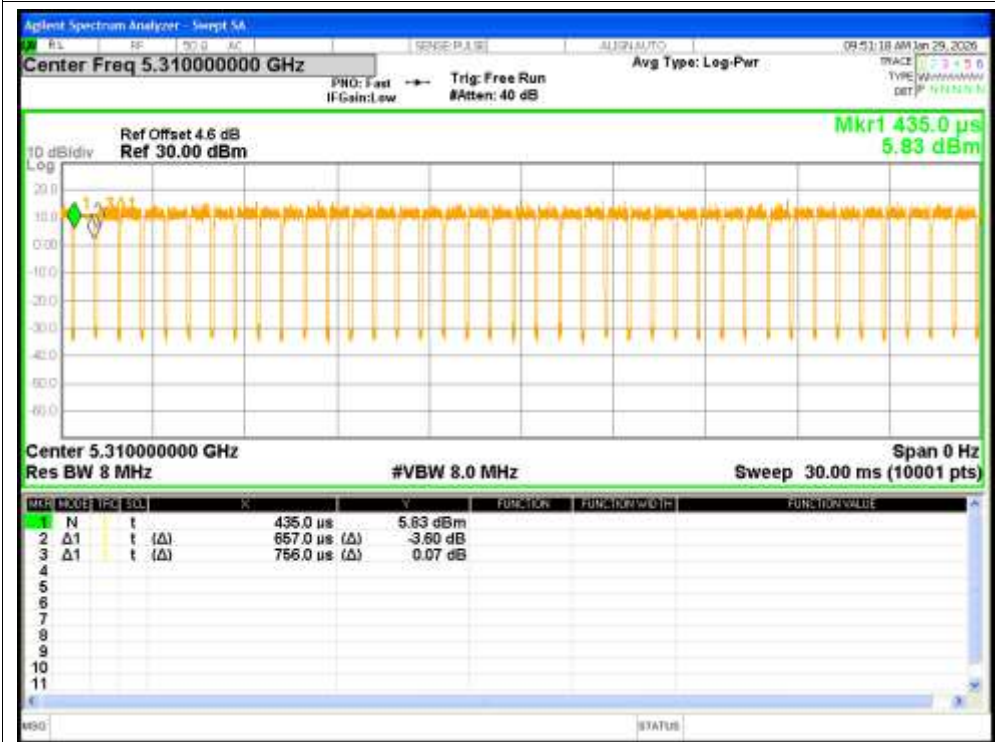


Duty Cycle NVNT ac80 5290MHz MIMO

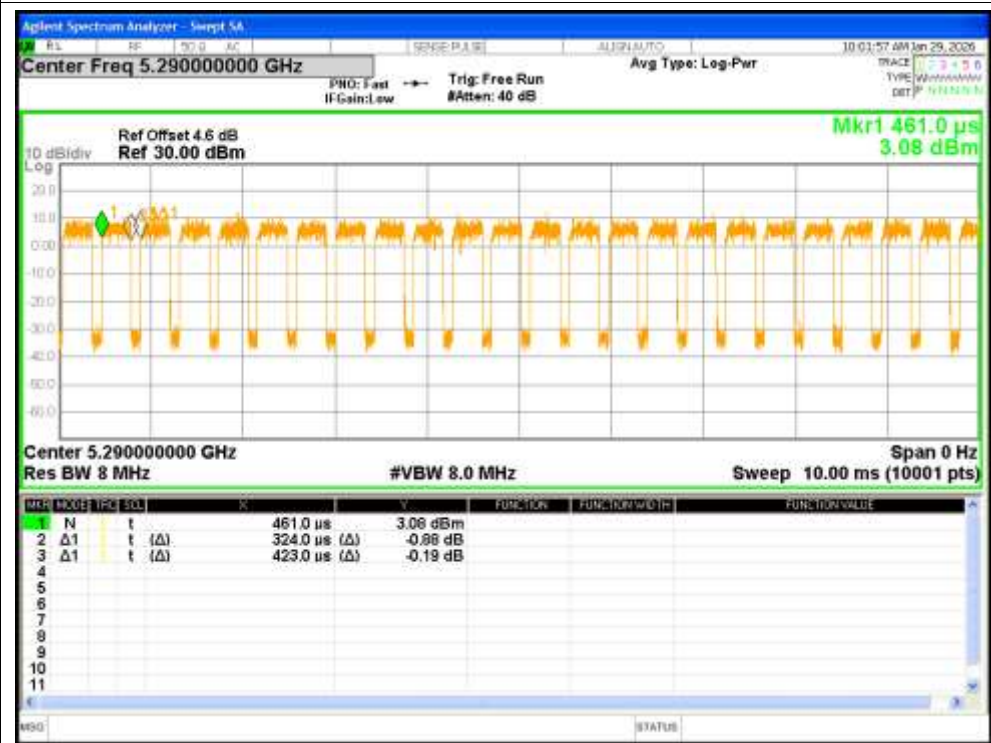


Duty Cycle NVNT ax20 5260MHz MIMO

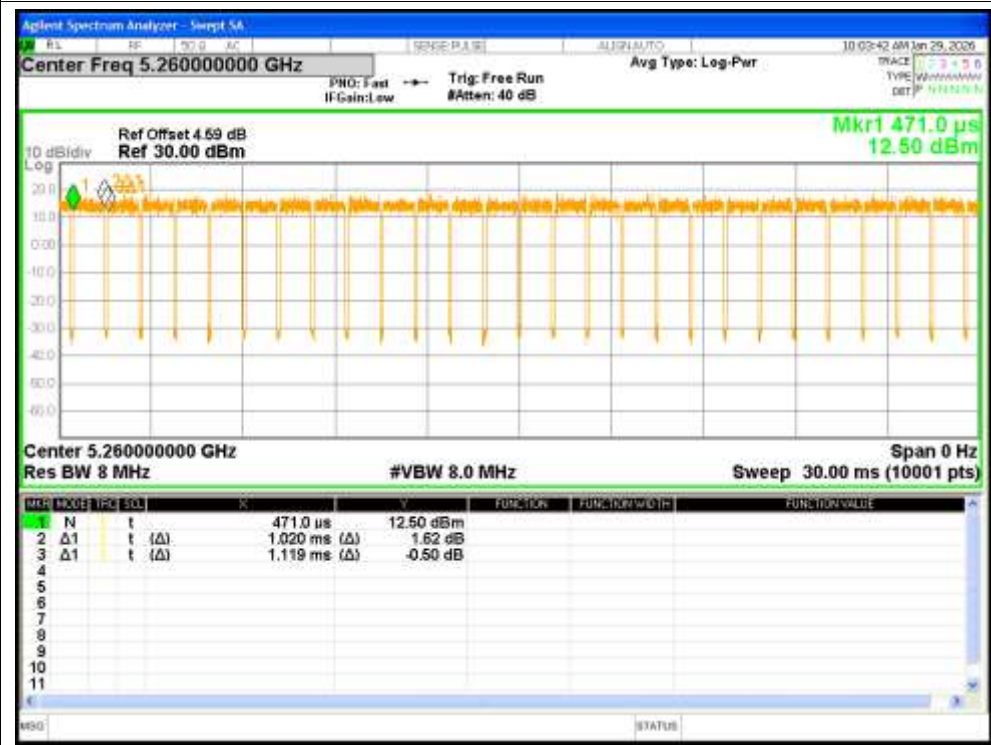


Duty Cycle NVNT ax20 5300MHz MIMO

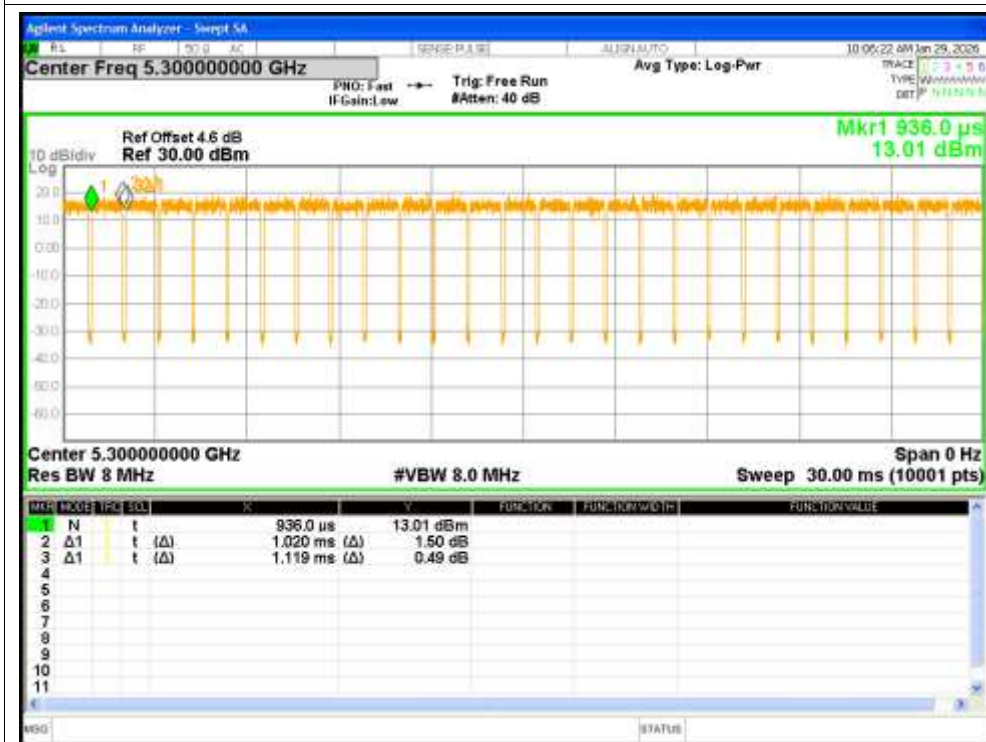


Duty Cycle NVNT ax20 5320MHz MIMO

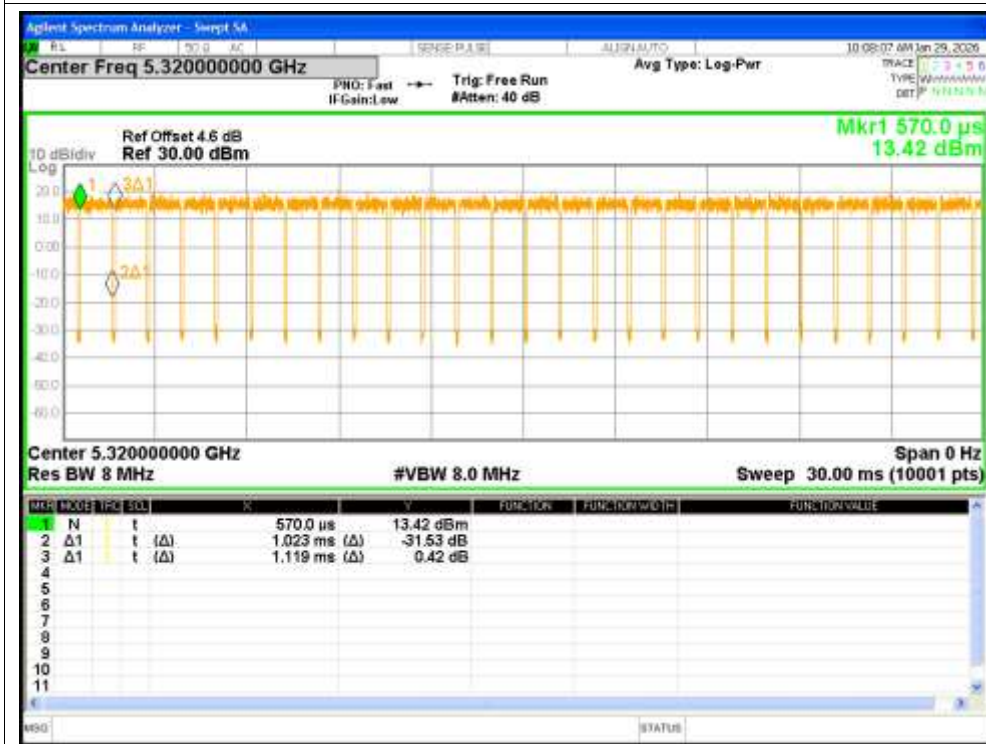

Duty Cycle NVNT ax40 5270MHz MIMO

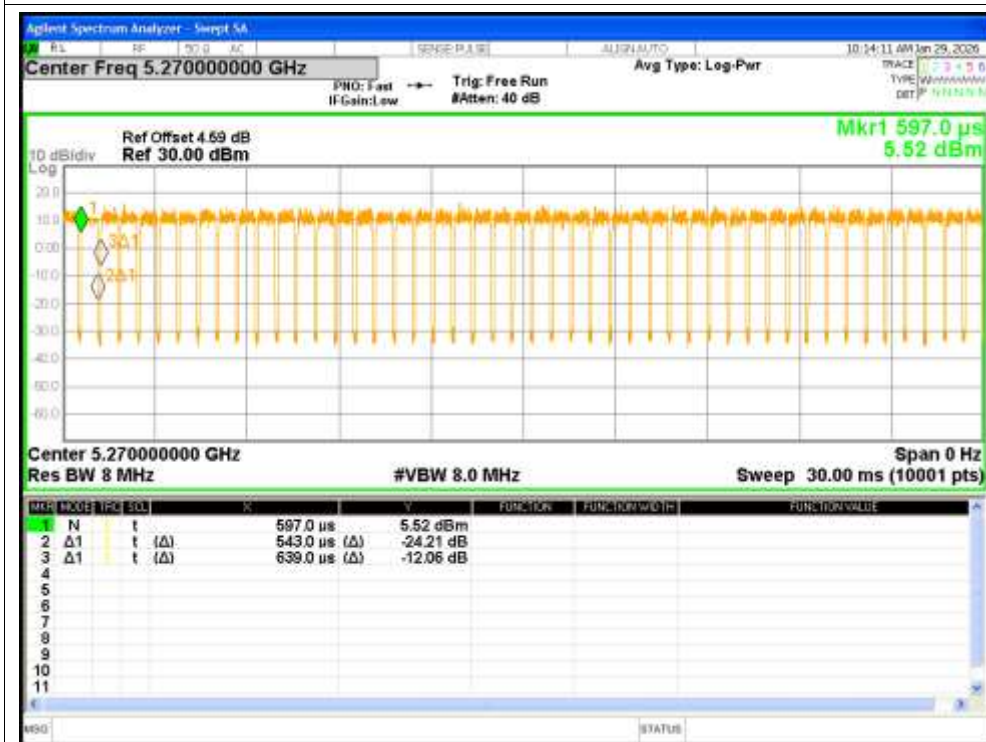

Duty Cycle NVNT ax40 5310MHz MIMO

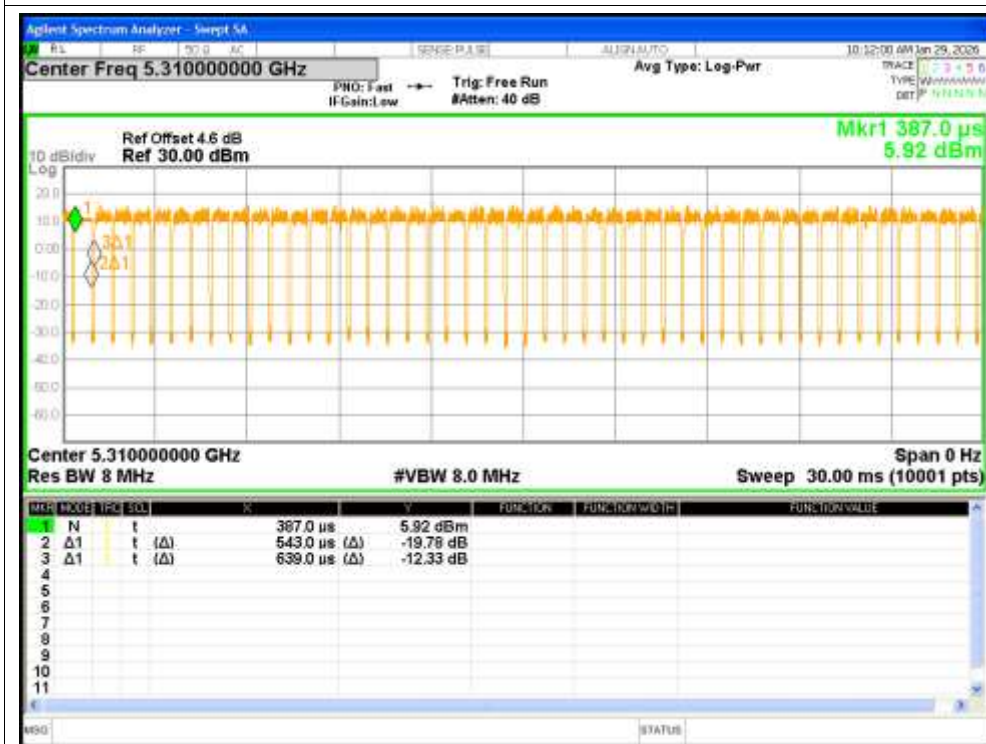


Maximum Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	11.68	0.29	11.97	<=24	Pass
NVNT	a	5300	Ant1	12.79	0.29	13.08	<=24	Pass
NVNT	a	5320	Ant1	12.82	0.29	13.11	<=24	Pass
NVNT	a	5260	Ant2	11.26	0.3	11.56	<=24	Pass
NVNT	a	5300	Ant2	11.86	0.29	12.15	<=24	Pass
NVNT	a	5320	Ant2	12.14	0.3	12.44	<=24	Pass
NVNT	n20	5260	Ant1	11.9	0.32	12.22	<=24	Pass
NVNT	n20	5260	Ant2	11.33	0.32	11.65	<=24	Pass
NVNT	n20	5260	MIMO	-	-	14.95	<=24	Pass
NVNT	n20	5300	Ant1	12.53	0.32	12.85	<=24	Pass
NVNT	n20	5300	Ant2	11.68	0.32	12	<=24	Pass
NVNT	n20	5300	MIMO	-	-	15.46	<=24	Pass
NVNT	n20	5320	Ant1	11.64	1.22	12.86	<=24	Pass
NVNT	n20	5320	Ant2	10.92	1.22	12.14	<=24	Pass
NVNT	n20	5320	MIMO	-	-	15.53	<=24	Pass
NVNT	n40	5270	Ant1	11.04	0.6	11.64	<=24	Pass
NVNT	n40	5270	Ant2	10.08	0.6	10.68	<=24	Pass
NVNT	n40	5270	MIMO	-	-	14.2	<=24	Pass
NVNT	n40	5310	Ant1	11.73	0.62	12.35	<=24	Pass
NVNT	n40	5310	Ant2	10.39	0.62	11.01	<=24	Pass
NVNT	n40	5310	MIMO	-	-	14.74	<=24	Pass
NVNT	ac20	5260	Ant1	9.75	0.31	10.06	<=24	Pass
NVNT	ac20	5260	Ant2	9.43	0.31	9.74	<=24	Pass
NVNT	ac20	5260	MIMO	-	-	12.91	<=24	Pass
NVNT	ac20	5300	Ant1	11.17	0.31	11.48	<=24	Pass
NVNT	ac20	5300	Ant2	10.29	0.31	10.6	<=24	Pass
NVNT	ac20	5300	MIMO	-	-	14.07	<=24	Pass
NVNT	ac20	5320	Ant1	11.31	0.32	11.63	<=24	Pass
NVNT	ac20	5320	Ant2	9.61	0.32	9.93	<=24	Pass
NVNT	ac20	5320	MIMO	-	-	13.87	<=24	Pass
NVNT	ac40	5270	Ant1	10.97	0.59	11.56	<=24	Pass
NVNT	ac40	5270	Ant2	9.97	0.59	10.56	<=24	Pass
NVNT	ac40	5270	MIMO	-	-	14.1	<=24	Pass
NVNT	ac40	5310	Ant1	11.68	0.61	12.29	<=24	Pass
NVNT	ac40	5310	Ant2	10.49	0.61	11.1	<=24	Pass
NVNT	ac40	5310	MIMO	-	-	14.75	<=24	Pass
NVNT	ac80	5290	Ant1	10.44	1.16	11.6	<=24	Pass
NVNT	ac80	5290	Ant2	9.62	1.16	10.78	<=24	Pass
NVNT	ac80	5290	MIMO	-	-	14.22	<=24	Pass
NVNT	ax20	5260	Ant1	10.31	0.4	10.71	<=24	Pass


NVNT	ax20	5260	Ant2	9.81	0.4	10.21	<=24	Pass
NVNT	ax20	5260	MIMO	-	-	13.48	<=24	Pass
NVNT	ax20	5300	Ant1	11.25	0.4	11.65	<=24	Pass
NVNT	ax20	5300	Ant2	9.73	0.4	10.13	<=24	Pass
NVNT	ax20	5300	MIMO	-	-	13.97	<=24	Pass
NVNT	ax20	5320	Ant1	11.54	0.39	11.93	<=24	Pass
NVNT	ax20	5320	Ant2	9.34	0.39	9.73	<=24	Pass
NVNT	ax20	5320	MIMO	-	-	13.98	<=24	Pass
NVNT	ax40	5270	Ant1	11.08	0.71	11.79	<=24	Pass
NVNT	ax40	5270	Ant2	10.31	0.71	11.02	<=24	Pass
NVNT	ax40	5270	MIMO	-	-	14.43	<=24	Pass
NVNT	ax40	5310	Ant1	12	0.71	12.71	<=24	Pass
NVNT	ax40	5310	Ant2	10.12	0.71	10.83	<=24	Pass
NVNT	ax40	5310	MIMO	-	-	14.88	<=24	Pass
NVNT	ax80	5290	Ant1	10.68	1.32	12	<=24	Pass
NVNT	ax80	5290	Ant2	9.79	1.32	11.11	<=24	Pass
NVNT	ax80	5290	MIMO	-	-	14.59	<=24	Pass

Test Graphs

Power NVNT a 5260MHz Ant1

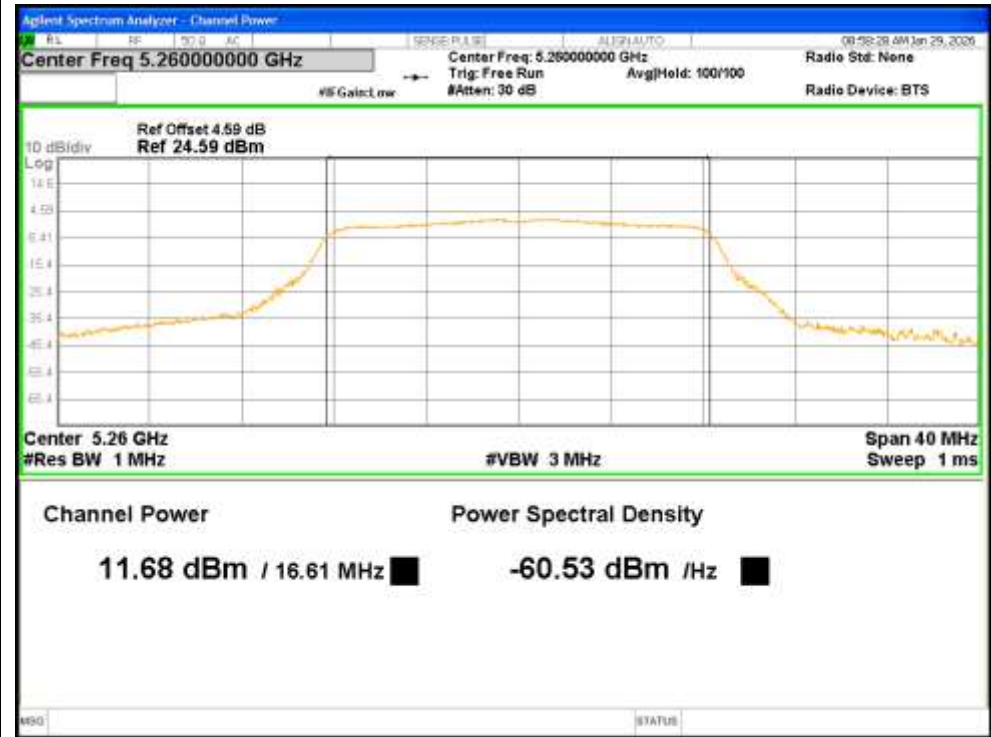

Power NVNT a 5300MHz Ant1

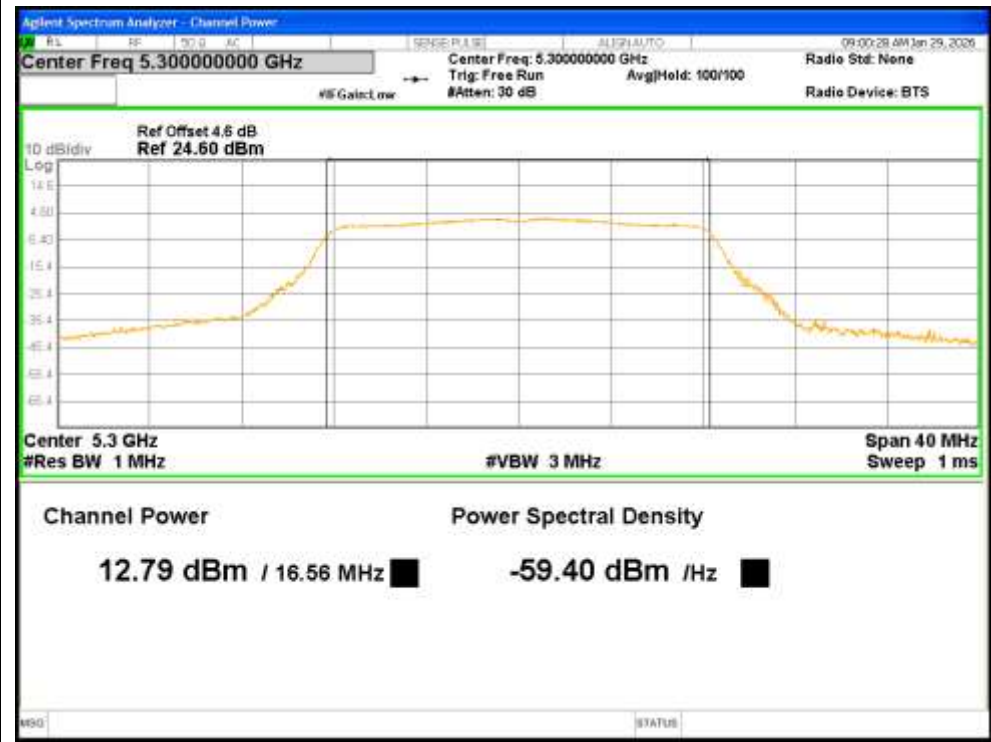


Power NVNT a 5320MHz Ant1



Power NVNT a 5260MHz Ant2



Power NVNT a 5300MHz Ant2

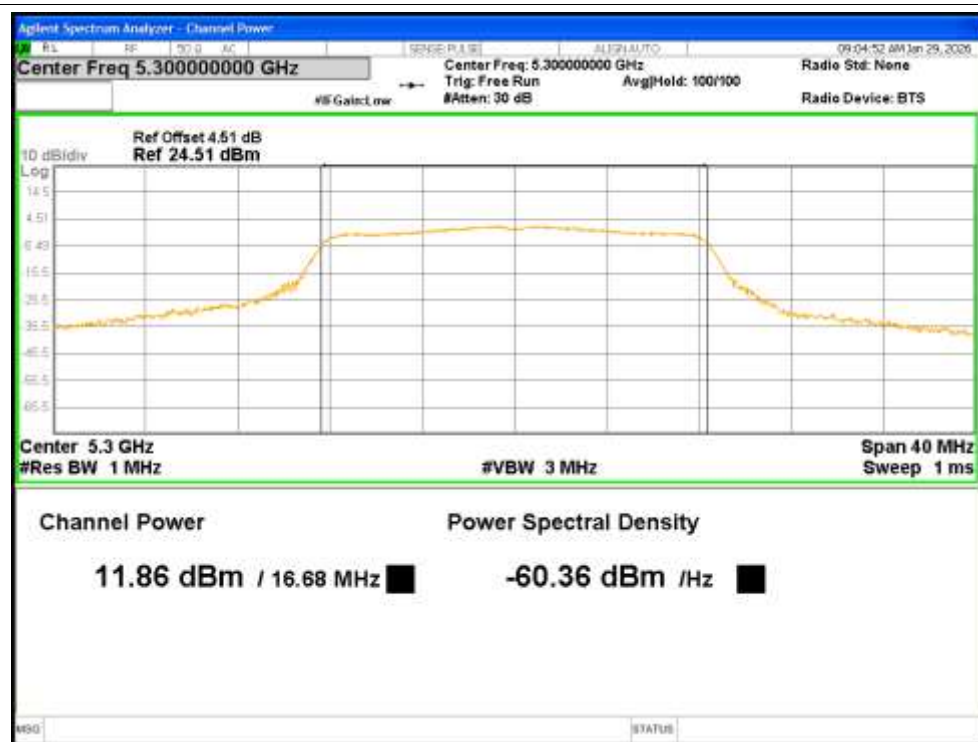

Power NVNT a 5320MHz Ant2



Power NVNT n20 5260MHz Ant1



Power NVNT n20 5260MHz Ant2




Power NVNT n20 5300MHz Ant1




Power NVNT n20 5300MHz Ant2



Power NVNT n20 5320MHz Ant1

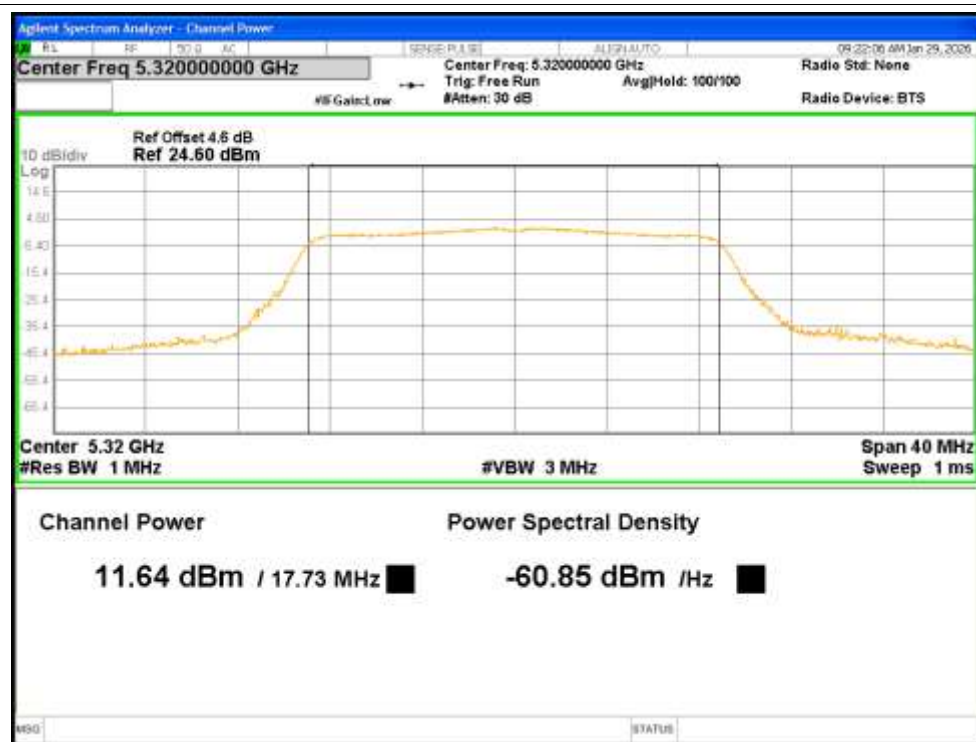

Power NVNT n20 5320MHz Ant2

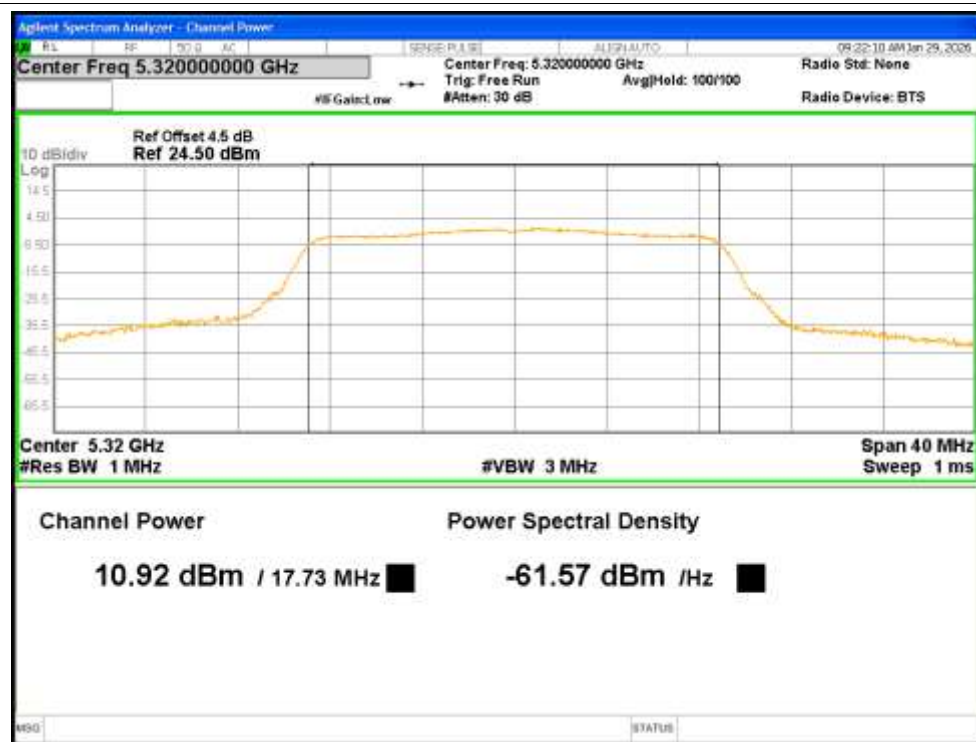

Power NVNT n40 5270MHz Ant1



Power NVNT n40 5270MHz Ant2




Power NVNT n40 5310MHz Ant1




Power NVNT n40 5310MHz Ant2




Power NVNT ac20 5260MHz Ant1

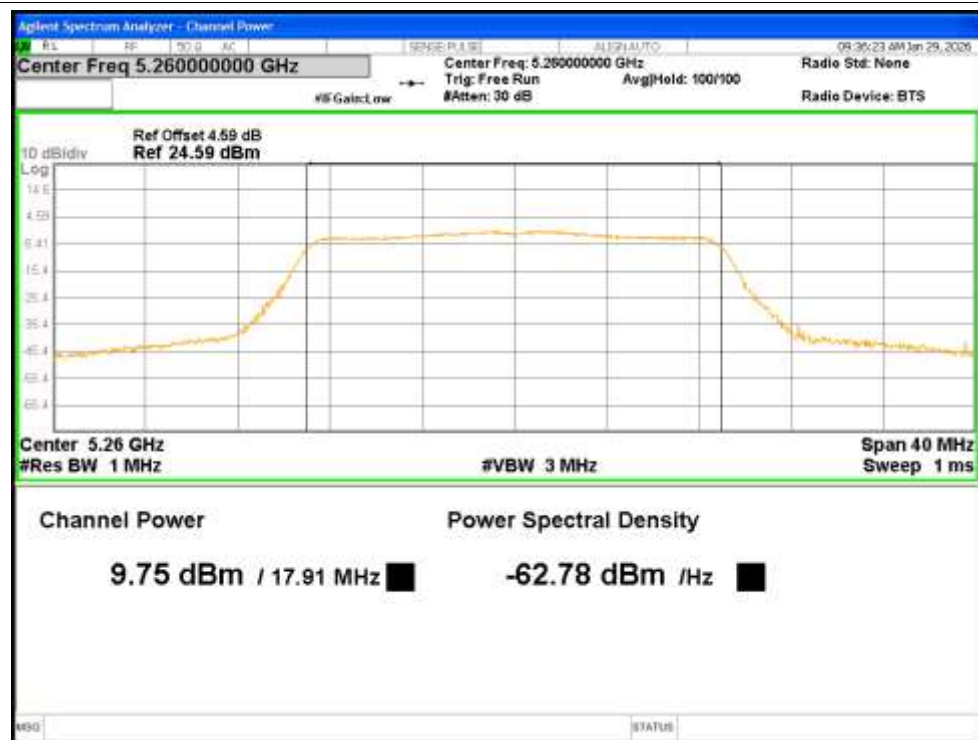


Power NVNT ac20 5260MHz Ant2

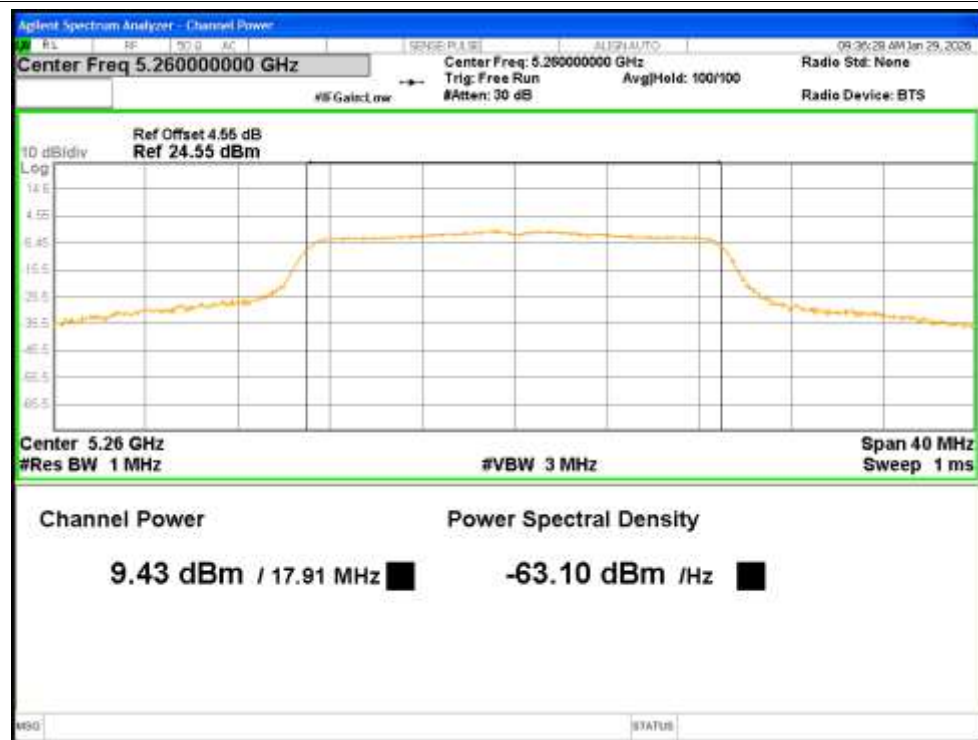


Power NVNT ac20 5300MHz Ant1

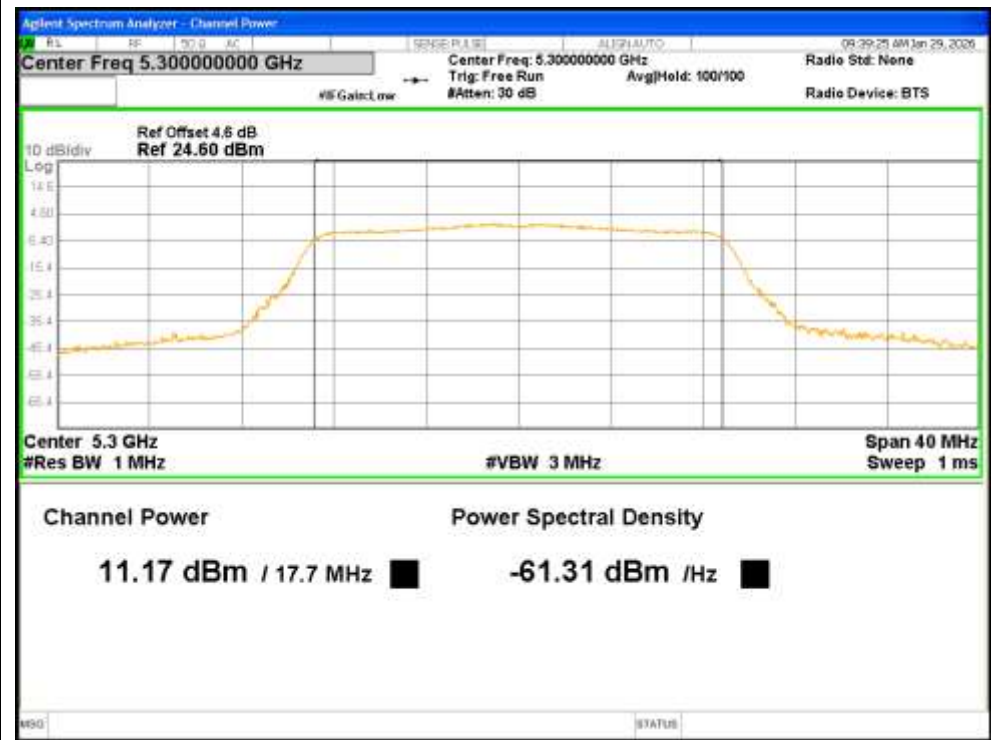


Power NVNT ac20 5300MHz Ant2

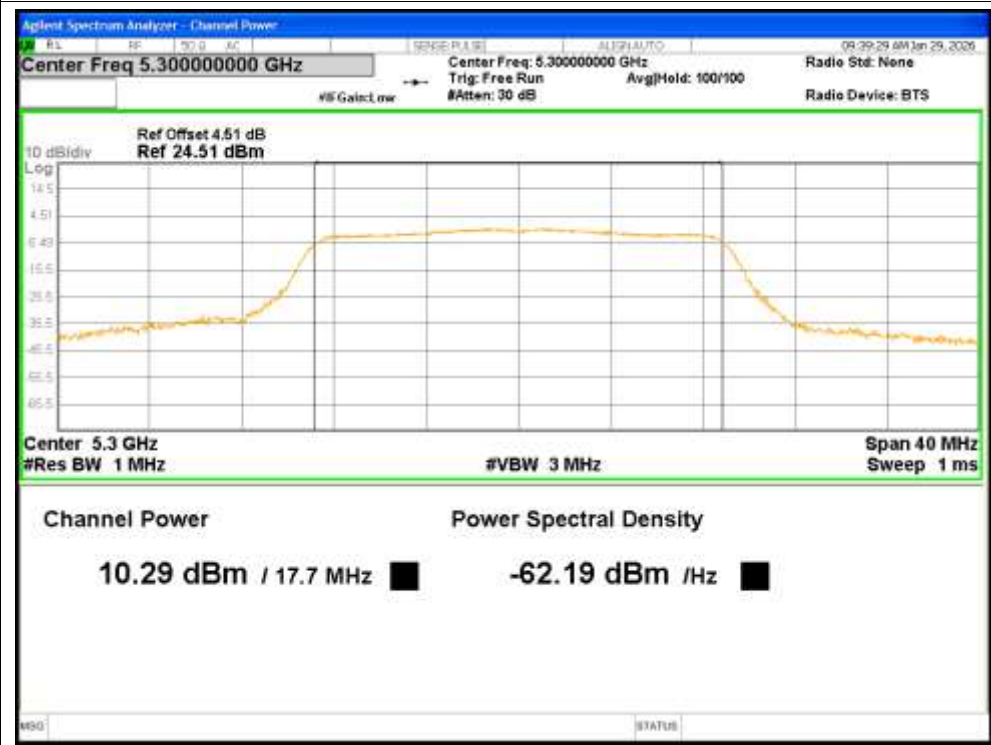


Power NVNT ac20 5320MHz Ant1

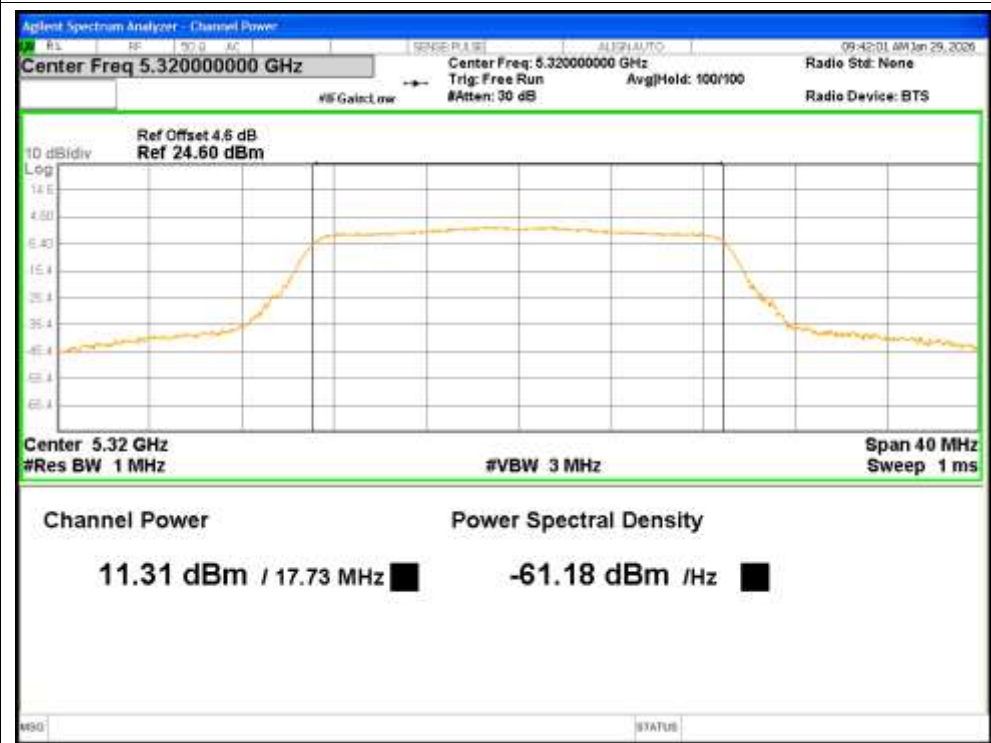


Power NVNT ac20 5320MHz Ant2

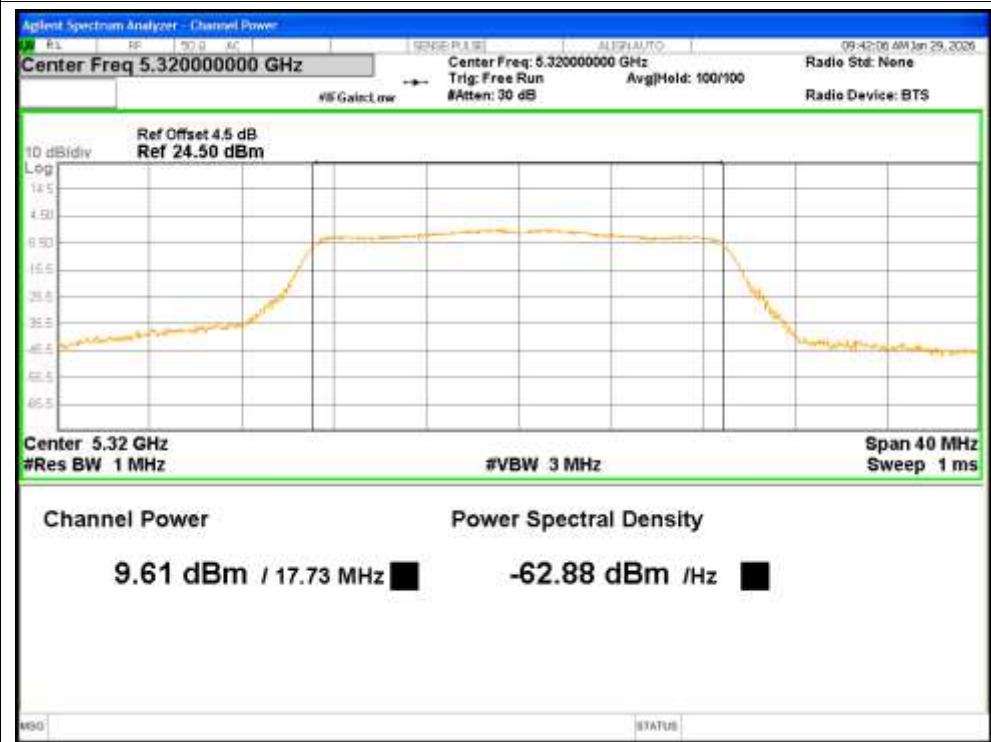

Power NVNT ac40 5270MHz Ant1

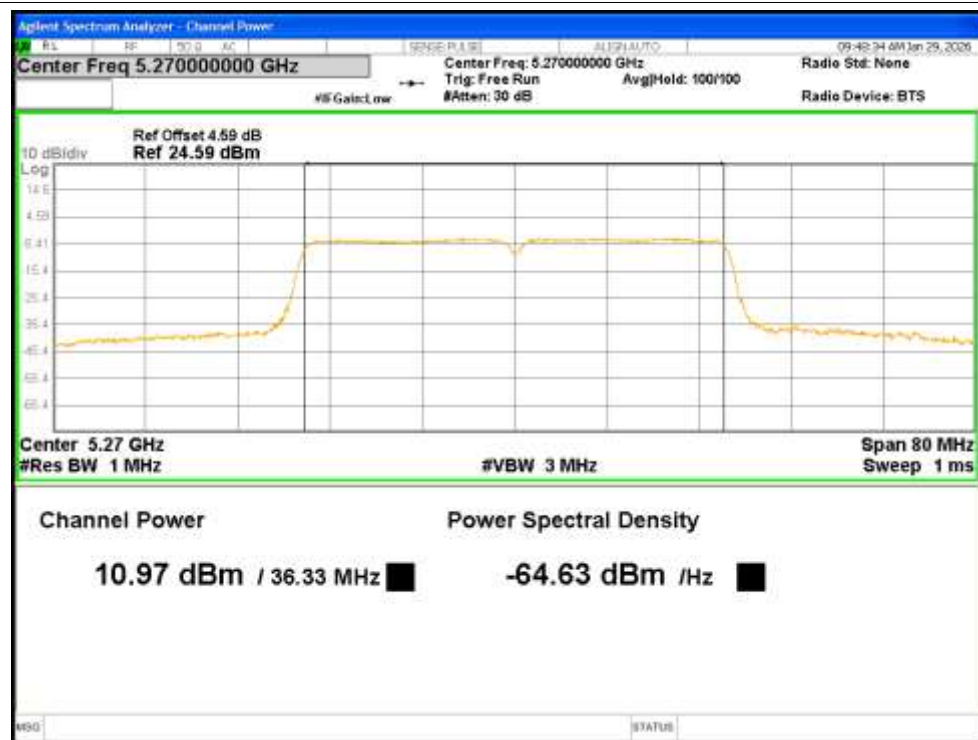

Power NVNT ac40 5270MHz Ant2

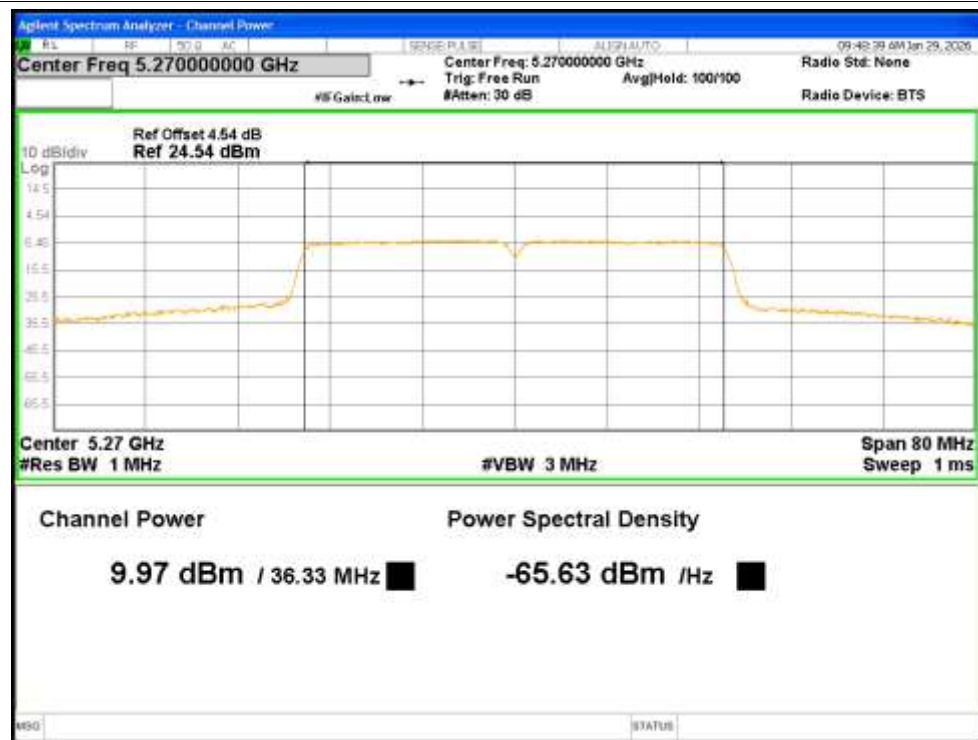

Power NVNT ac40 5310MHz Ant1




Power NVNT ac40 5310MHz Ant2



Power NVNT ac80 5290MHz Ant1




Power NVNT ac80 5290MHz Ant2

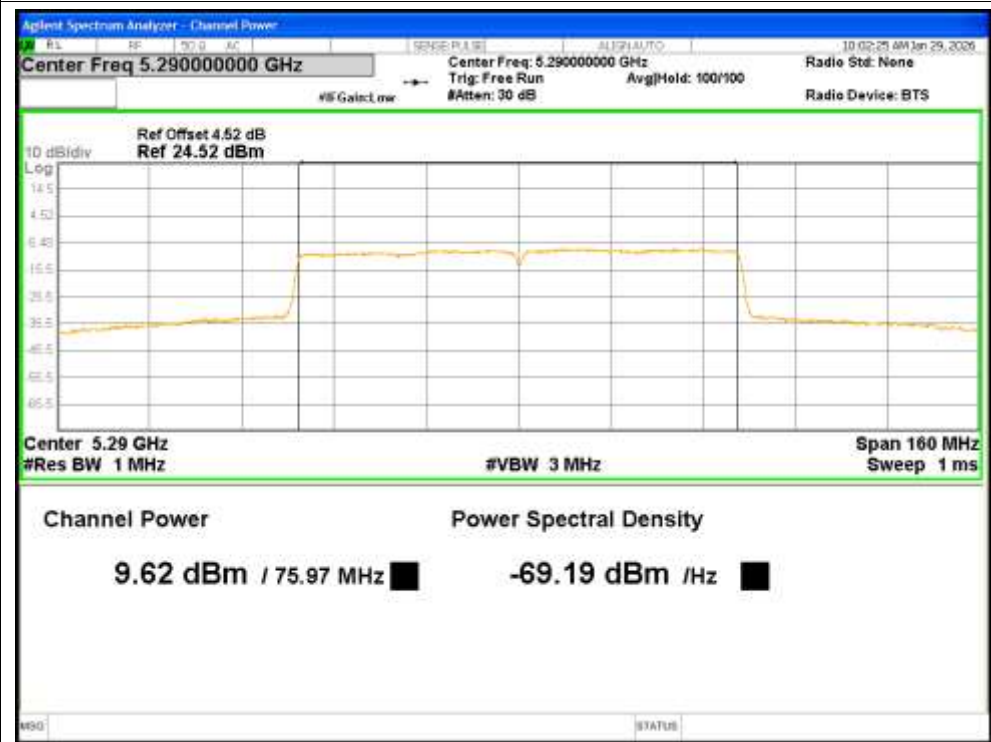

Power NVNT ax20 5260MHz Ant1



Power NVNT ax20 5260MHz Ant2

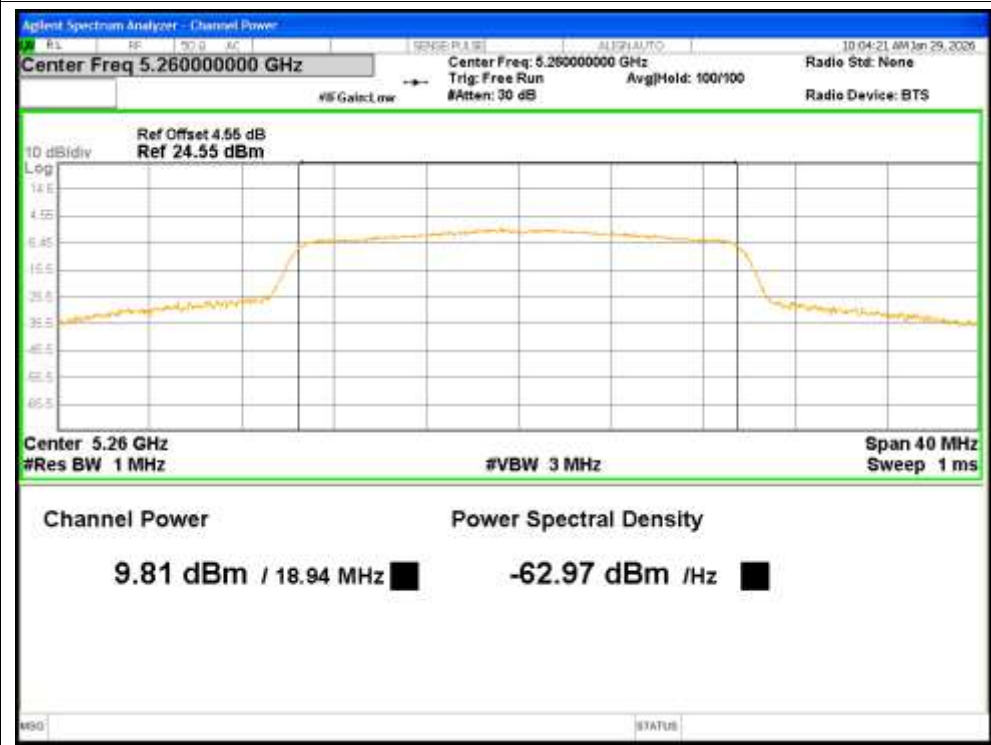

Power NVNT ax20 5300MHz Ant1



Power NVNT ax20 5300MHz Ant2



Power NVNT ax20 5320MHz Ant1



Power NVNT ax20 5320MHz Ant2



Power NVNT ax40 5270MHz Ant1



Power NVNT ax40 5270MHz Ant2



Power NVNT ax40 5310MHz Ant1




Power NVNT ax40 5310MHz Ant2



Power NVNT ax80 5290MHz Ant1



Power NVNT ax80 5290MHz Ant2

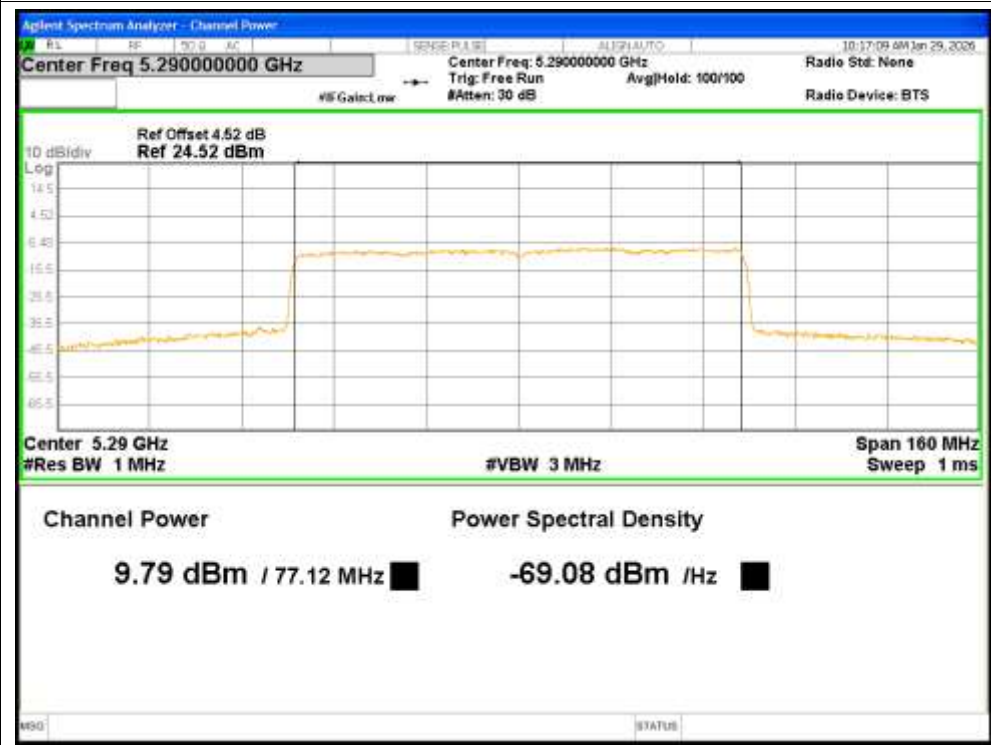

-26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	Ant1	21.32	Pass
NVNT	a	5300	Ant1	21.45	Pass
NVNT	a	5320	Ant1	21.5	Pass
NVNT	a	5260	Ant2	22.01	Pass
NVNT	a	5300	Ant2	23.91	Pass
NVNT	a	5320	Ant2	23.86	Pass
NVNT	n20	5260	Ant1	23.65	Pass
NVNT	n20	5260	Ant2	21.46	Pass
NVNT	n20	5300	Ant1	22.4	Pass
NVNT	n20	5300	Ant2	24.46	Pass
NVNT	n20	5320	Ant1	21.61	Pass
NVNT	n20	5320	Ant2	21.26	Pass
NVNT	n40	5270	Ant1	50.02	Pass
NVNT	n40	5270	Ant2	40.01	Pass
NVNT	n40	5310	Ant1	44.76	Pass
NVNT	n40	5310	Ant2	39.91	Pass
NVNT	ac20	5260	Ant1	21.72	Pass
NVNT	ac20	5260	Ant2	29.65	Pass
NVNT	ac20	5300	Ant1	21.47	Pass
NVNT	ac20	5300	Ant2	21.76	Pass
NVNT	ac20	5320	Ant1	21.66	Pass
NVNT	ac20	5320	Ant2	21.17	Pass
NVNT	ac40	5270	Ant1	45.17	Pass
NVNT	ac40	5270	Ant2	39.83	Pass
NVNT	ac40	5310	Ant1	40.24	Pass
NVNT	ac40	5310	Ant2	39.87	Pass
NVNT	ac80	5290	Ant1	83.25	Pass
NVNT	ac80	5290	Ant2	118.1	Pass
NVNT	ax20	5260	Ant1	21.46	Pass
NVNT	ax20	5260	Ant2	26.44	Pass
NVNT	ax20	5300	Ant1	20.96	Pass
NVNT	ax20	5300	Ant2	20.96	Pass
NVNT	ax20	5320	Ant1	21.38	Pass
NVNT	ax20	5320	Ant2	20.96	Pass
NVNT	ax40	5270	Ant1	42.91	Pass
NVNT	ax40	5270	Ant2	57.6	Pass
NVNT	ax40	5310	Ant1	44.08	Pass
NVNT	ax40	5310	Ant2	40.13	Pass
NVNT	ax80	5290	Ant1	82.8	Pass
NVNT	ax80	5290	Ant2	82.51	Pass

Test Graphs

-26dB Bandwidth NVNT a 5260MHz Ant1



-26dB Bandwidth NVNT a 5300MHz Ant1



-26dB Bandwidth NVNT a 5320MHz Ant1



-26dB Bandwidth NVNT a 5260MHz Ant2



-26dB Bandwidth NVNT a 5300MHz Ant2



-26dB Bandwidth NVNT a 5320MHz Ant2



-26dB Bandwidth NVNT n20 5260MHz Ant1




-26dB Bandwidth NVNT n20 5260MHz Ant2



-26dB Bandwidth NVNT n20 5300MHz Ant1



-26dB Bandwidth NVNT n20 5300MHz Ant2

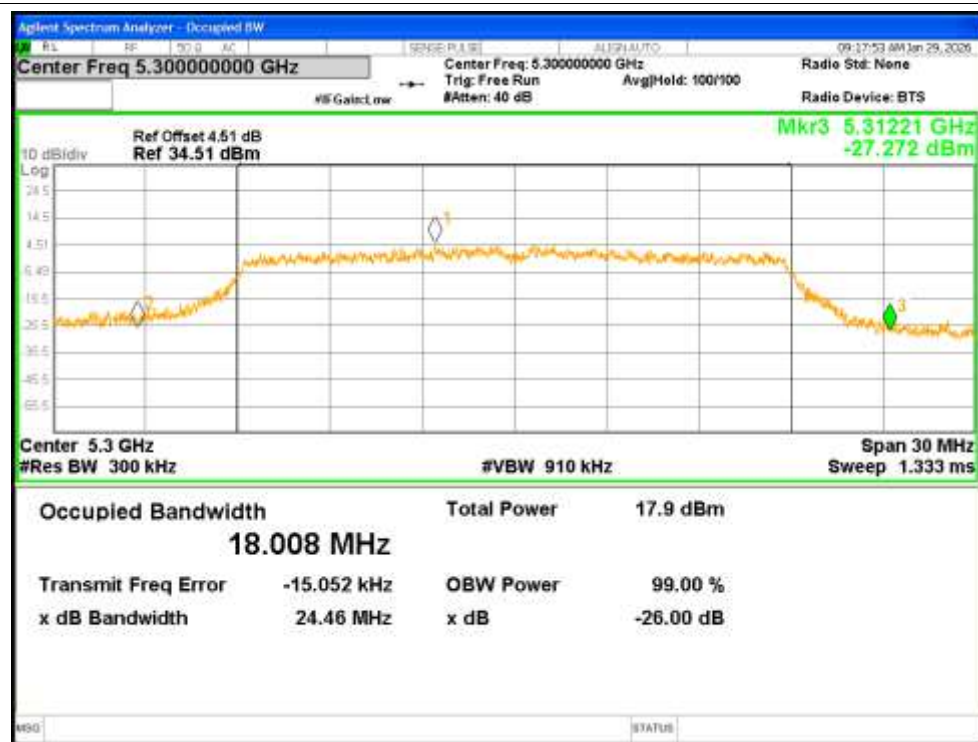


-26dB Bandwidth NVNT n20 5320MHz Ant1



-26dB Bandwidth NVNT n20 5320MHz Ant2



-26dB Bandwidth NVNT n40 5270MHz Ant1

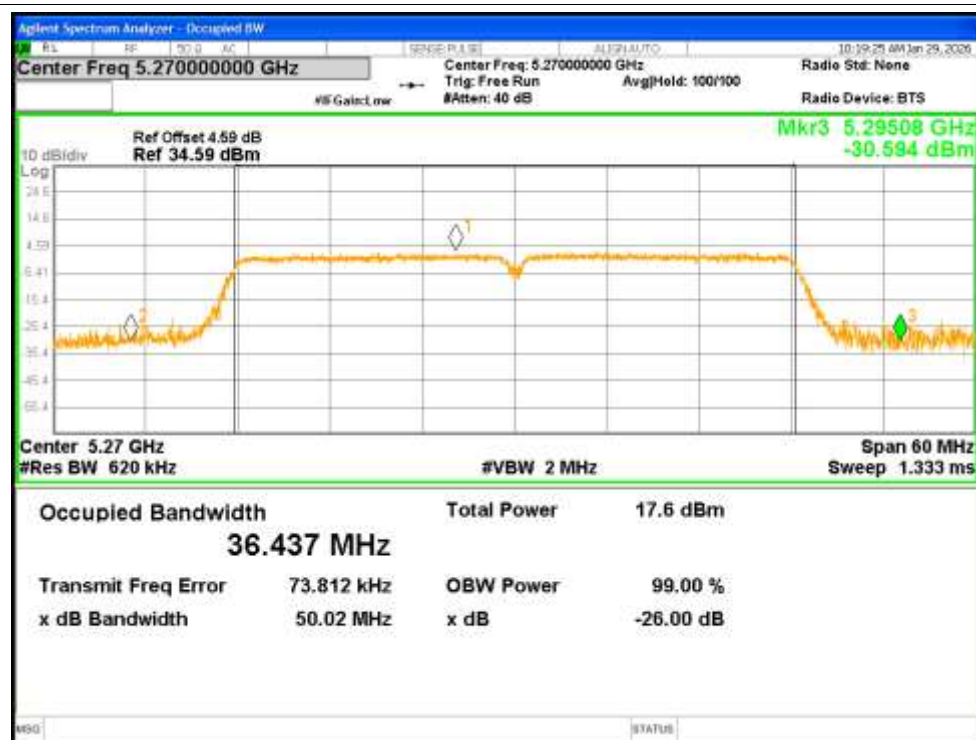

-26dB Bandwidth NVNT n40 5270MHz Ant2



-26dB Bandwidth NVNT n40 5310MHz Ant1



-26dB Bandwidth NVNT n40 5310MHz Ant2



-26dB Bandwidth NVNT ac20 5260MHz Ant1



-26dB Bandwidth NVNT ac20 5260MHz Ant2



-26dB Bandwidth NVNT ac20 5300MHz Ant1



-26dB Bandwidth NVNT ac20 5300MHz Ant2



-26dB Bandwidth NVNT ac20 5320MHz Ant1




-26dB Bandwidth NVNT ac20 5320MHz Ant2



-26dB Bandwidth NVNT ac40 5270MHz Ant1



-26dB Bandwidth NVNT ac40 5270MHz Ant2

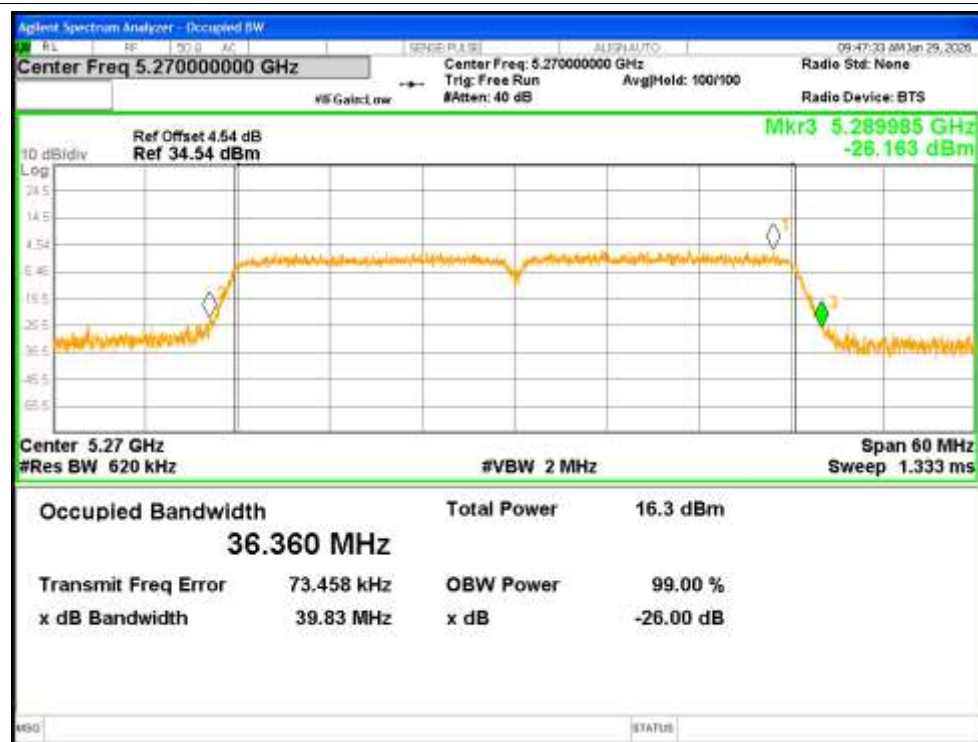

-26dB Bandwidth NVNT ac40 5310MHz Ant1




-26dB Bandwidth NVNT ac40 5310MHz Ant2



-26dB Bandwidth NVNT ac80 5290MHz Ant1



-26dB Bandwidth NVNT ac80 5290MHz Ant2

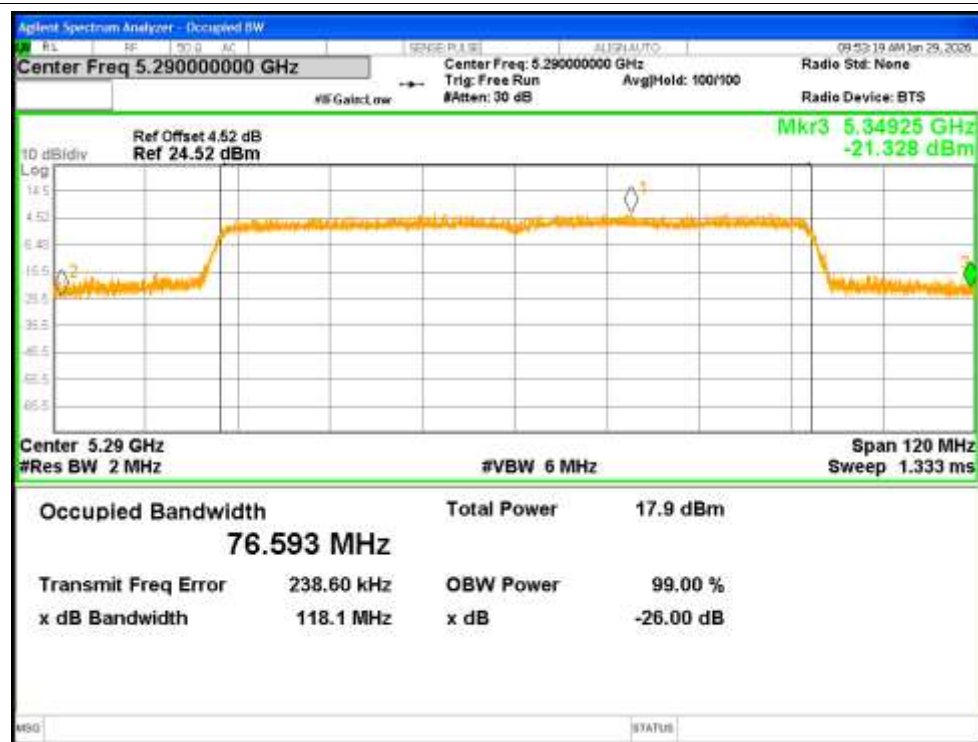

-26dB Bandwidth NVNT ax20 5260MHz Ant1



-26dB Bandwidth NVNT ax20 5260MHz Ant2



-26dB Bandwidth NVNT ax20 5300MHz Ant1



-26dB Bandwidth NVNT ax20 5300MHz Ant2



-26dB Bandwidth NVNT ax20 5320MHz Ant1




-26dB Bandwidth NVNT ax20 5320MHz Ant2



-26dB Bandwidth NVNT ax40 5270MHz Ant1



-26dB Bandwidth NVNT ax40 5270MHz Ant2

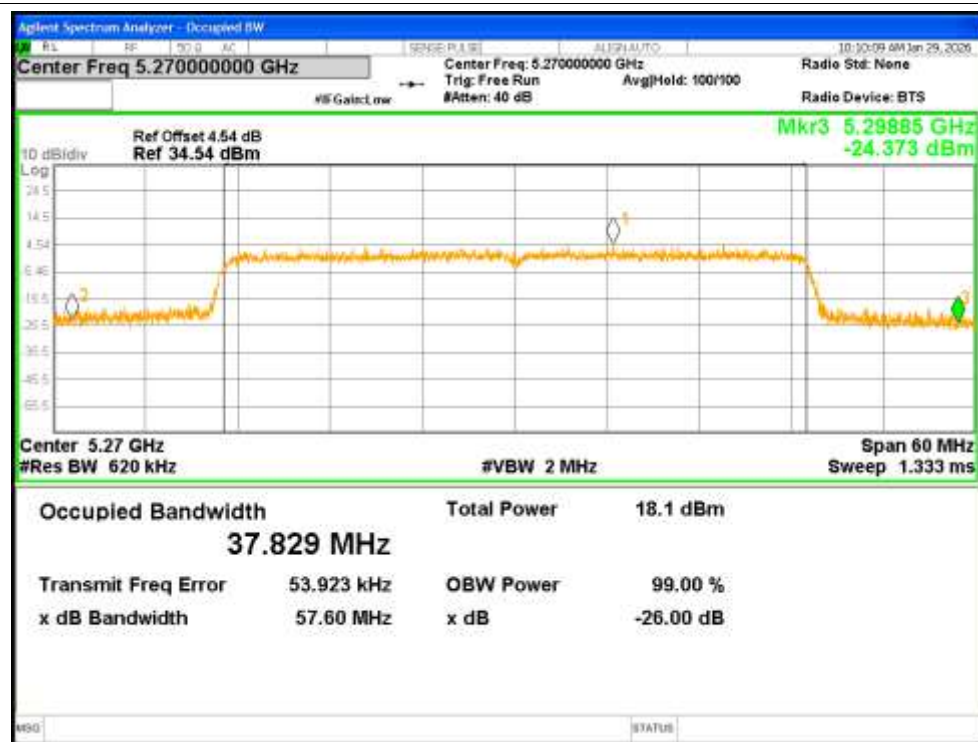


-26dB Bandwidth NVNT ax40 5310MHz Ant1



-26dB Bandwidth NVNT ax40 5310MHz Ant2



-26dB Bandwidth NVNT ax80 5290MHz Ant1

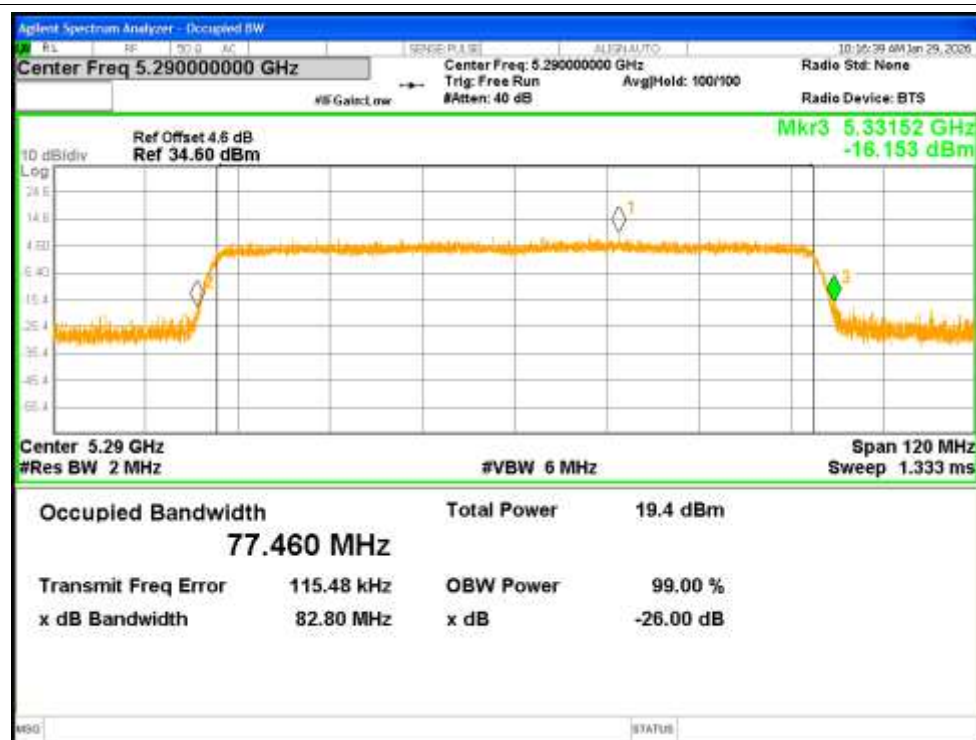

-26dB Bandwidth NVNT ax80 5290MHz Ant2




Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5260	Ant1	16.606
NVNT	a	5300	Ant1	16.561
NVNT	a	5320	Ant1	16.585
NVNT	a	5260	Ant2	16.625
NVNT	a	5300	Ant2	16.68
NVNT	a	5320	Ant2	16.631
NVNT	n20	5260	Ant1	17.755
NVNT	n20	5260	Ant2	17.723
NVNT	n20	5300	Ant1	17.713
NVNT	n20	5300	Ant2	17.817
NVNT	n20	5320	Ant1	17.726
NVNT	n20	5320	Ant2	17.71
NVNT	n40	5270	Ant1	36.285
NVNT	n40	5270	Ant2	36.502
NVNT	n40	5310	Ant1	36.33
NVNT	n40	5310	Ant2	36.341
NVNT	ac20	5260	Ant1	17.761
NVNT	ac20	5260	Ant2	17.906
NVNT	ac20	5300	Ant1	17.669
NVNT	ac20	5300	Ant2	17.7
NVNT	ac20	5320	Ant1	17.731
NVNT	ac20	5320	Ant2	17.721
NVNT	ac40	5270	Ant1	36.325
NVNT	ac40	5270	Ant2	36.284
NVNT	ac40	5310	Ant1	36.375
NVNT	ac40	5310	Ant2	36.281
NVNT	ac80	5290	Ant1	75.667
NVNT	ac80	5290	Ant2	75.973
NVNT	ax20	5260	Ant1	18.901
NVNT	ax20	5260	Ant2	18.935
NVNT	ax20	5300	Ant1	18.855
NVNT	ax20	5300	Ant2	18.911
NVNT	ax20	5320	Ant1	18.864
NVNT	ax20	5320	Ant2	18.884
NVNT	ax40	5270	Ant1	37.614
NVNT	ax40	5270	Ant2	37.753
NVNT	ax40	5310	Ant1	37.582
NVNT	ax40	5310	Ant2	37.618
NVNT	ax80	5290	Ant1	77.087
NVNT	ax80	5290	Ant2	77.116

Test Graphs

OBW NVNT a 5260MHz Ant1

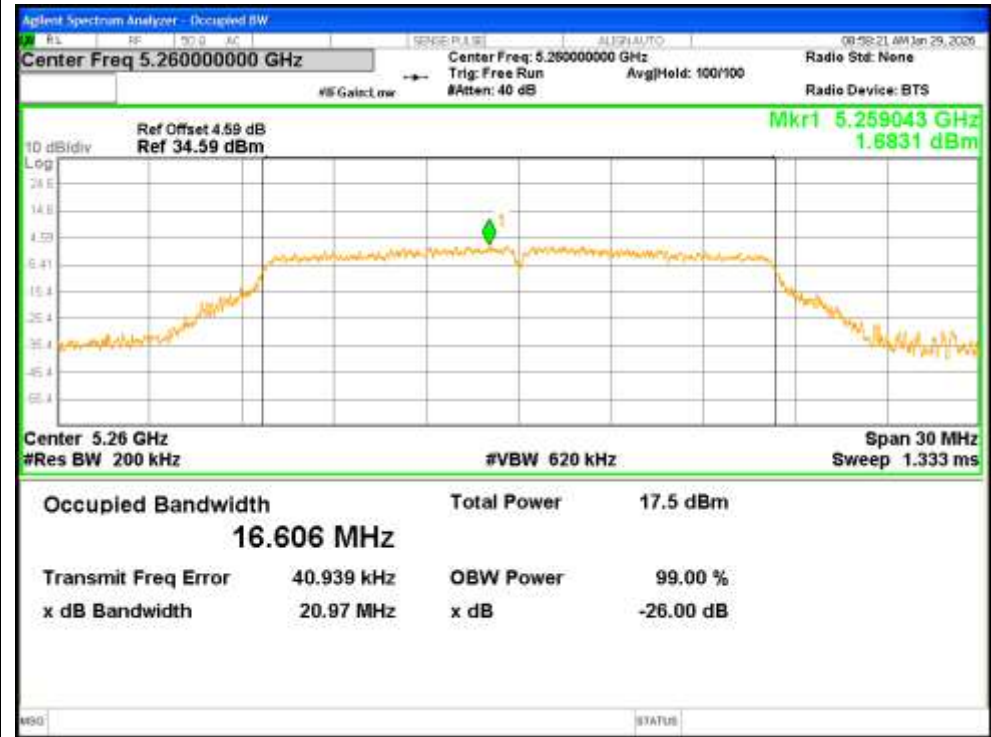

OBW NVNT a 5300MHz Ant1

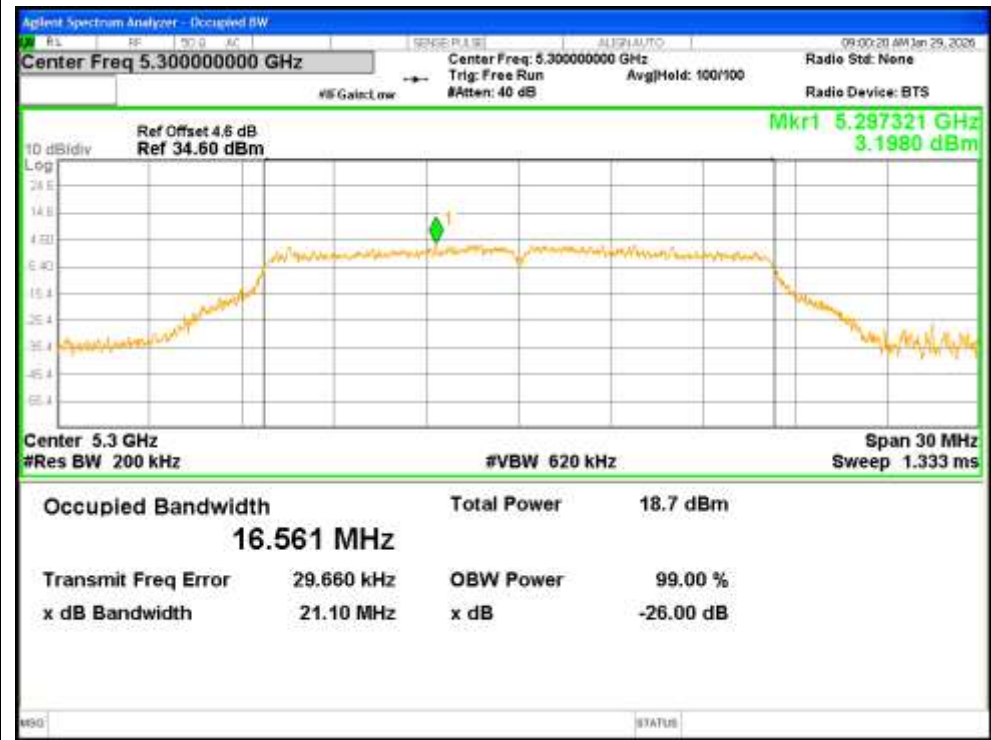

OBW NVNT a 5320MHz Ant1



OBW NVNT a 5260MHz Ant2



OBW NVNT a 5300MHz Ant2




OBW NVNT a 5320MHz Ant2



OBW NVNT n20 5260MHz Ant1



OBW NVNT n20 5260MHz Ant2

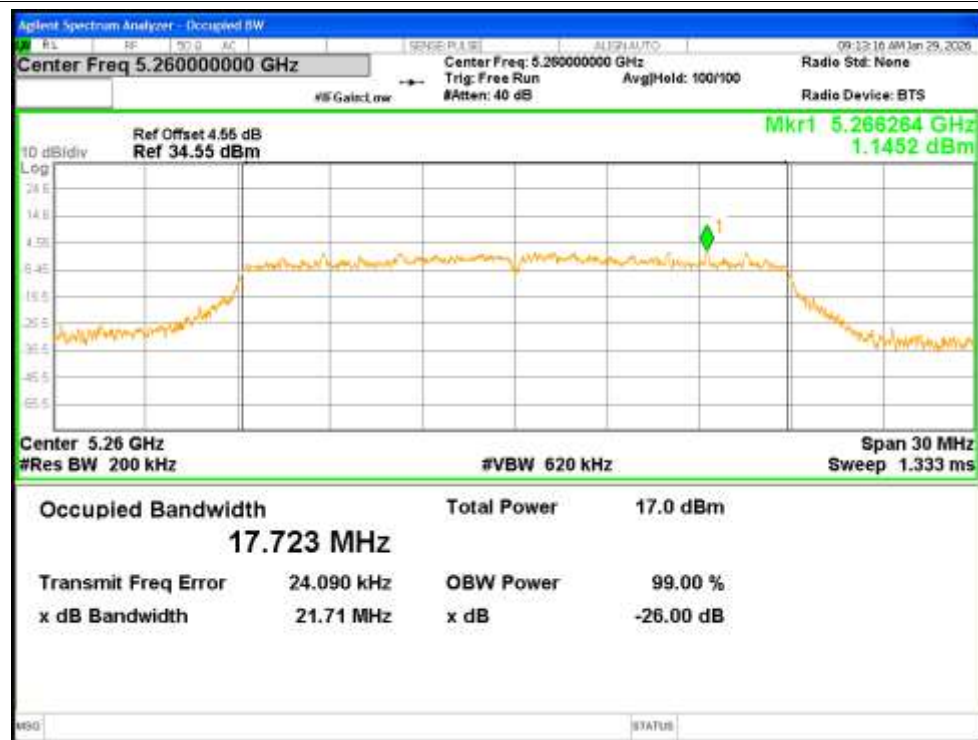

OBW NVNT n20 5300MHz Ant1



OBW NVNT n20 5300MHz Ant2



OBW NVNT n20 5320MHz Ant1



OBW NVNT n20 5320MHz Ant2



OBW NVNT n40 5270MHz Ant1




OBW NVNT n40 5270MHz Ant2



OBW NVNT n40 5310MHz Ant1



OBW NVNT n40 5310MHz Ant2

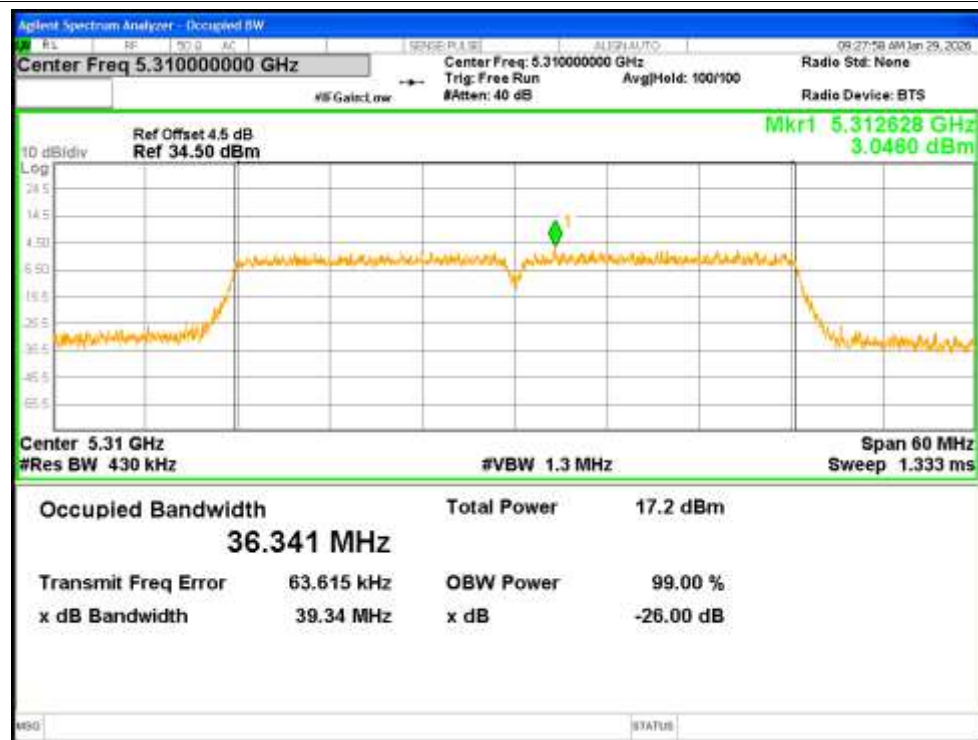

OBW NVNT ac20 5260MHz Ant1



OBW NVNT ac20 5260MHz Ant2



OBW NVNT ac20 5300MHz Ant1



OBW NVNT ac20 5300MHz Ant2




OBW NVNT ac20 5320MHz Ant1




OBW NVNT ac20 5320MHz Ant2



OBW NVNT ac40 5270MHz Ant1

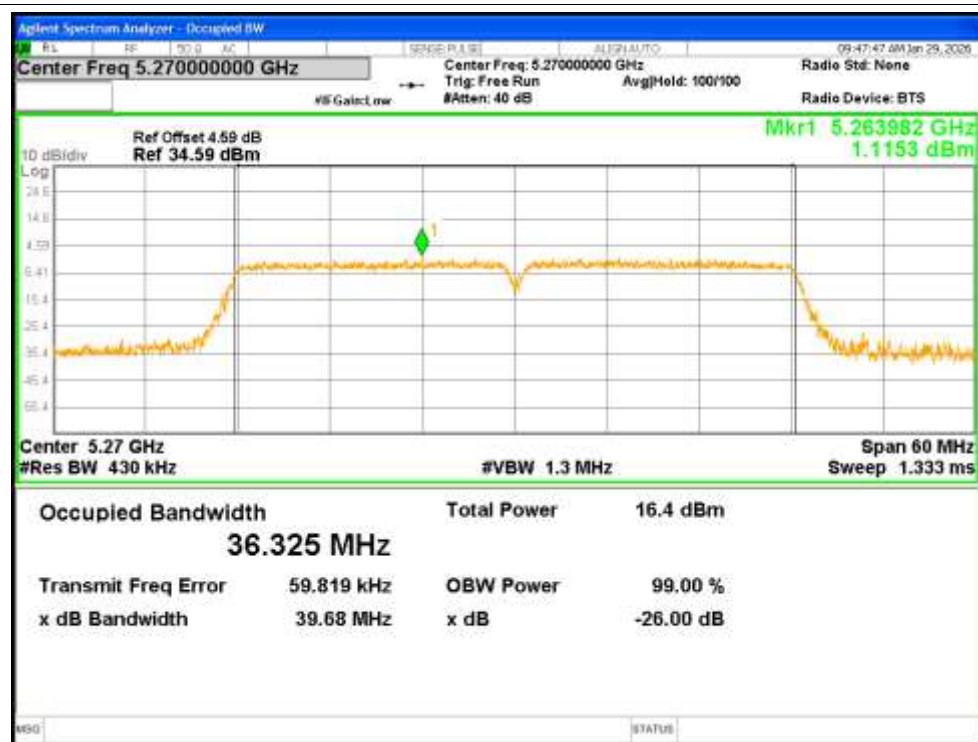


OBW NVNT ac40 5270MHz Ant2

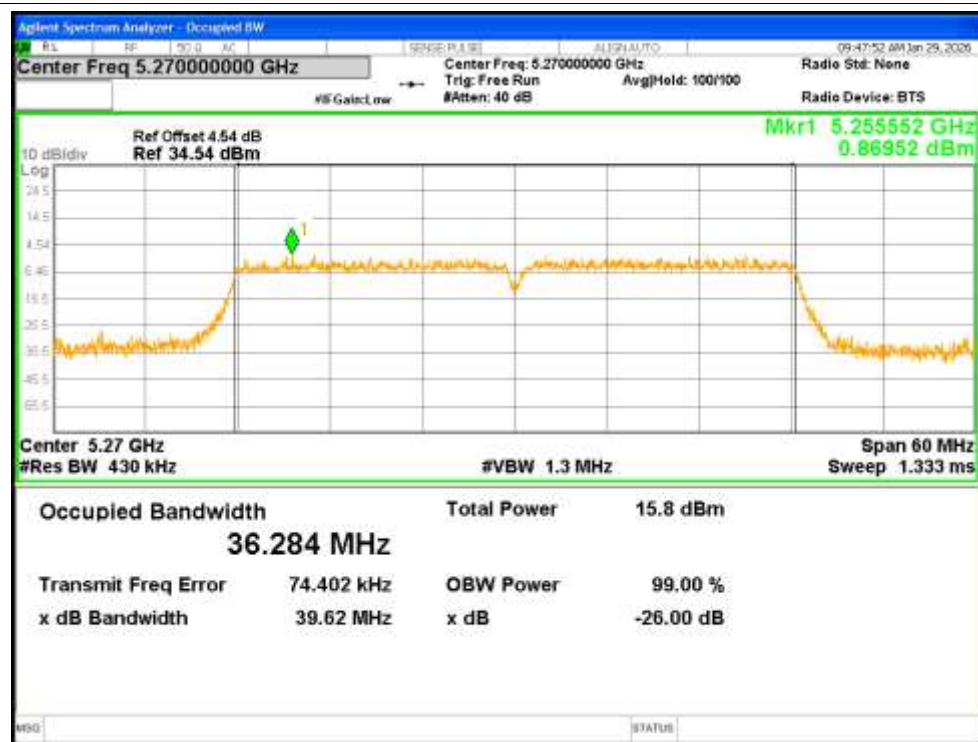


OBW NVNT ac40 5310MHz Ant1




OBW NVNT ac40 5310MHz Ant2

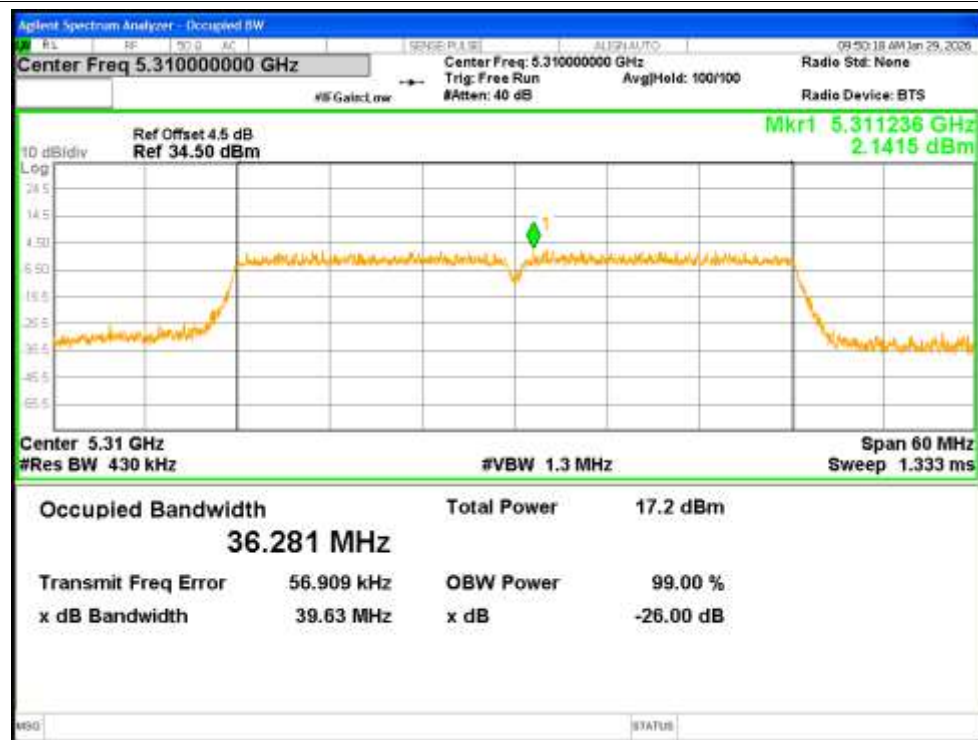

OBW NVNT ac80 5290MHz Ant1

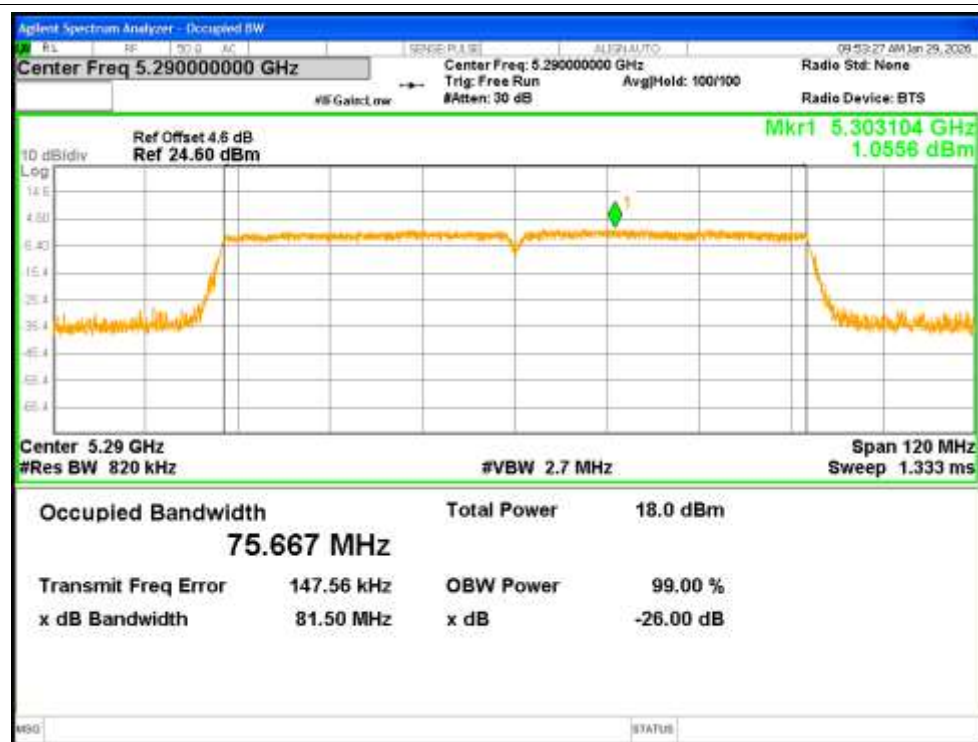

OBW NVNT ac80 5290MHz Ant2

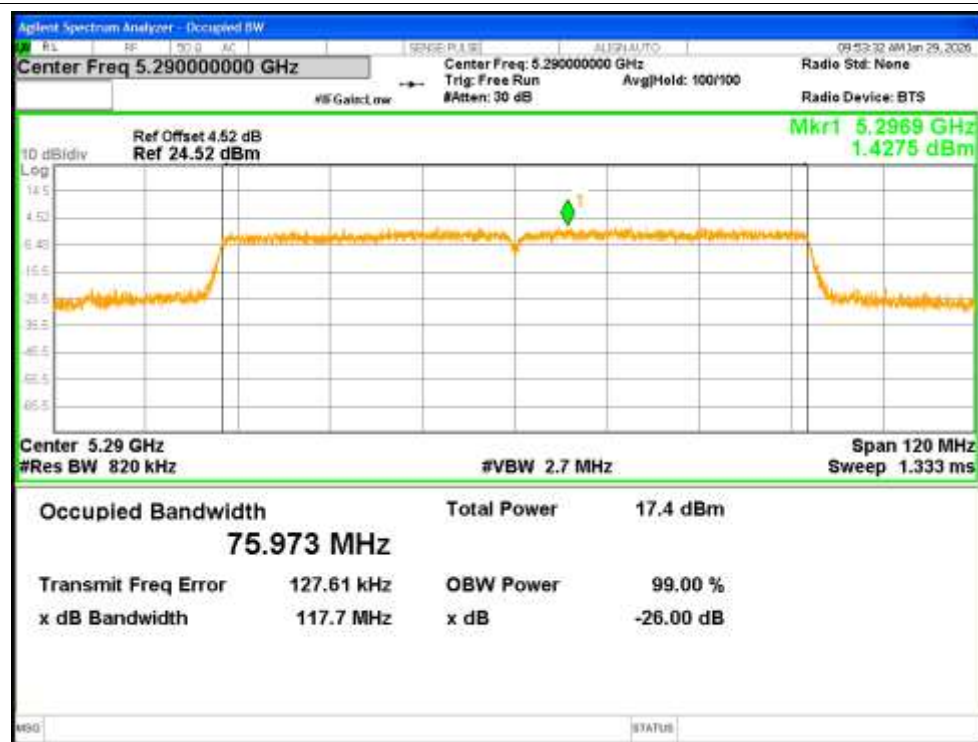

OBW NVNT ax20 5260MHz Ant1




OBW NVNT ax20 5260MHz Ant2



OBW NVNT ax20 5300MHz Ant1




OBW NVNT ax20 5300MHz Ant2

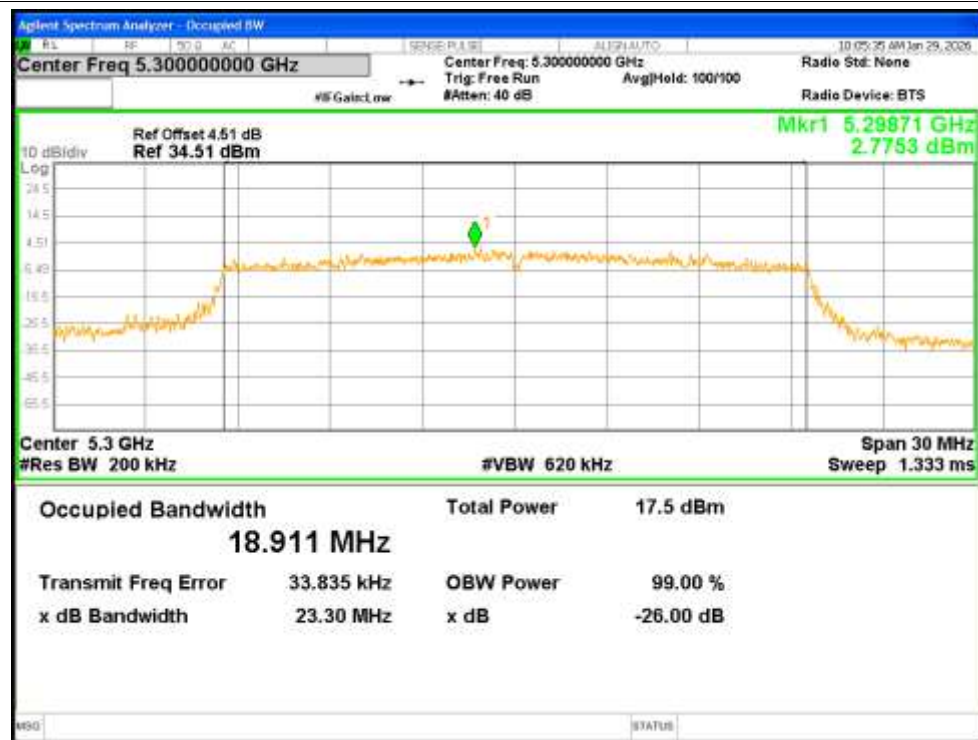

OBW NVNT ax20 5320MHz Ant1



OBW NVNT ax20 5320MHz Ant2

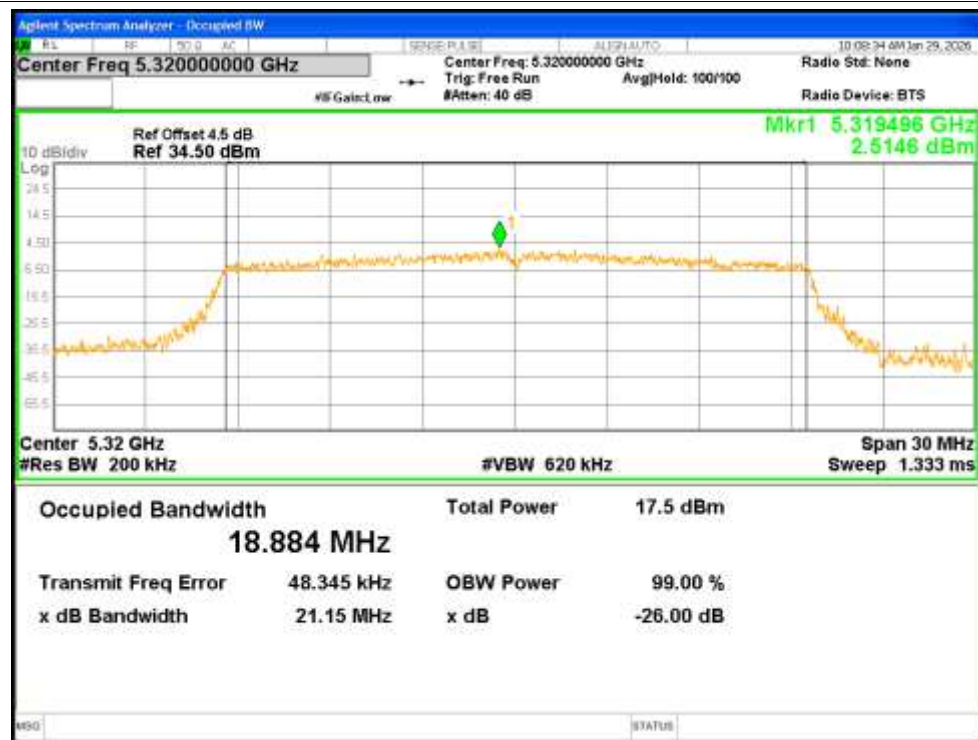

OBW NVNT ax40 5270MHz Ant1




OBW NVNT ax40 5270MHz Ant2




OBW NVNT ax40 5310MHz Ant1




OBW NVNT ax40 5310MHz Ant2

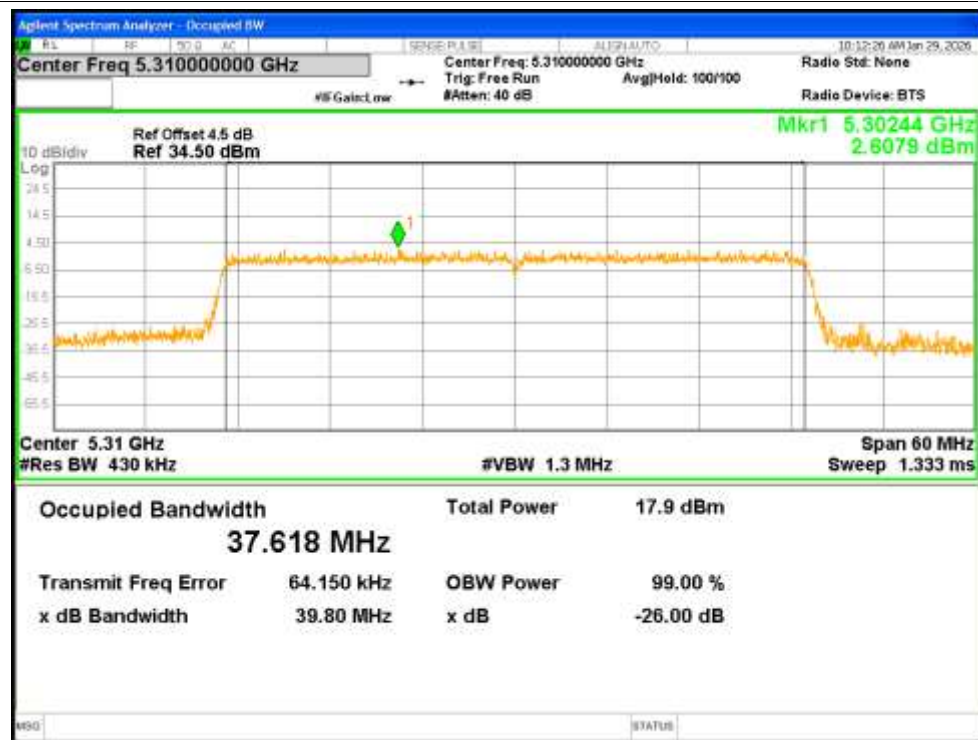

OBW NVNT ax80 5290MHz Ant1

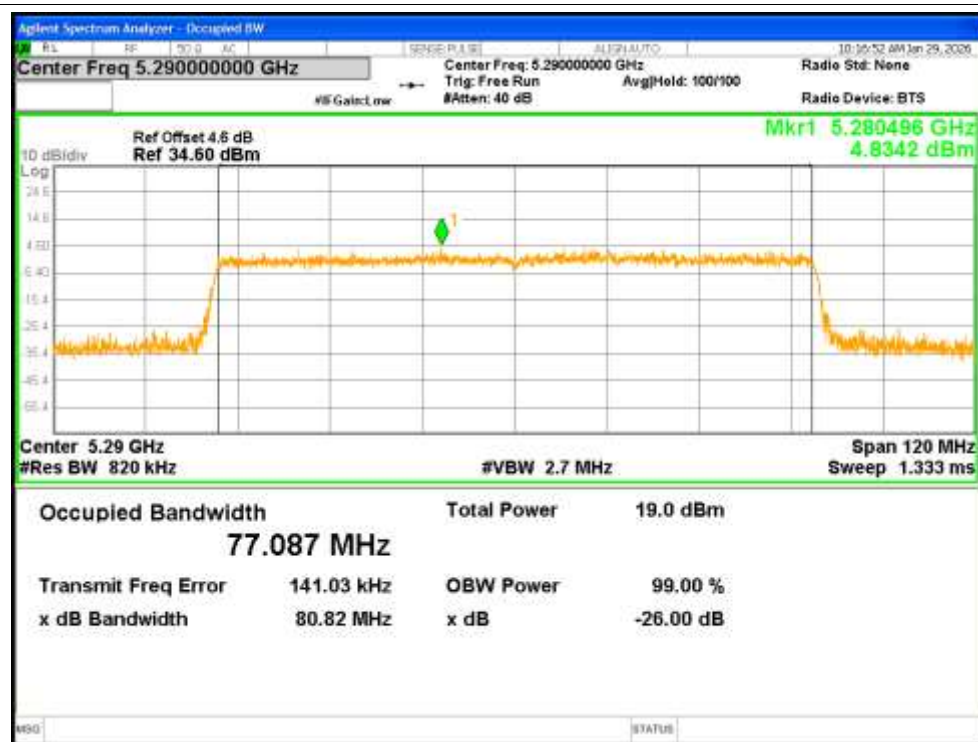

OBW NVNT ax80 5290MHz Ant2

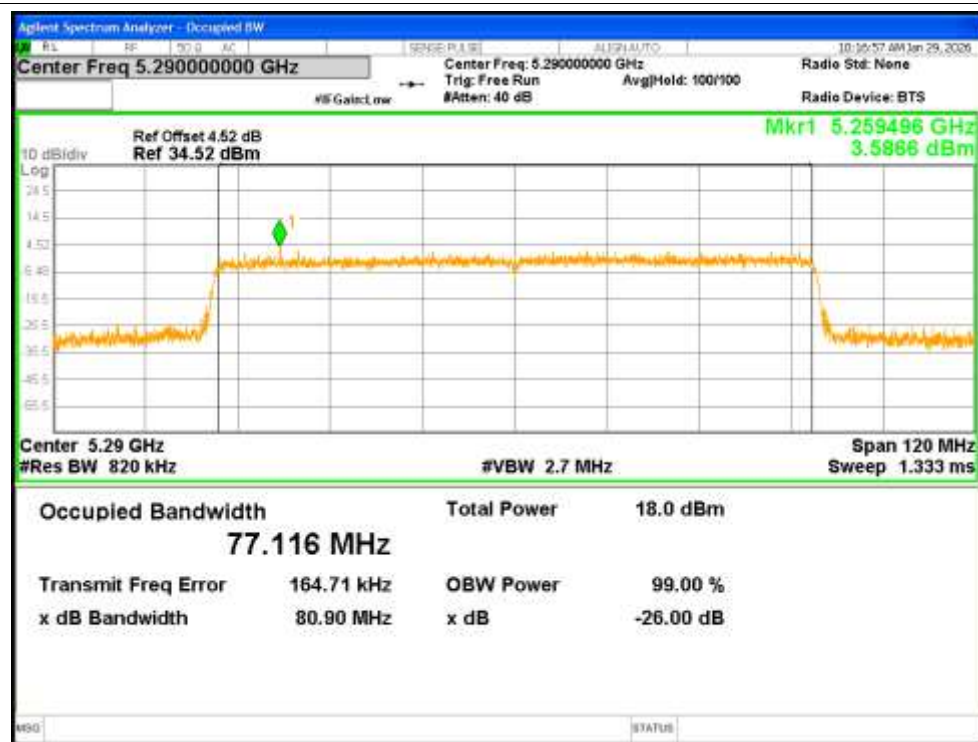

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	2.048	0.29	2.338	<=11	Pass
NVNT	a	5300	Ant1	3.343	0.29	3.633	<=11	Pass
NVNT	a	5320	Ant1	3.406	0.29	3.696	<=11	Pass
NVNT	a	5260	Ant2	1.81	0.3	2.11	<=11	Pass
NVNT	a	5300	Ant2	2.311	0.29	2.601	<=11	Pass
NVNT	a	5320	Ant2	2.676	0.3	2.976	<=11	Pass
NVNT	n20	5260	Ant1	2.101	0.32	2.421	<=11	Pass
NVNT	n20	5260	Ant2	1.859	0.32	2.179	<=11	Pass
NVNT	n20	5260	MIMO	4.992	0.32	5.312	<=11	Pass
NVNT	n20	5300	Ant1	2.49	0.32	2.81	<=11	Pass
NVNT	n20	5300	Ant2	1.851	0.32	2.171	<=11	Pass
NVNT	n20	5300	MIMO	5.193	0.32	5.513	<=11	Pass
NVNT	n20	5320	Ant1	2.133	1.22	3.353	<=11	Pass
NVNT	n20	5320	Ant2	0.83	1.22	2.05	<=11	Pass
NVNT	n20	5320	MIMO	4.54	1.22	5.76	<=11	Pass
NVNT	n40	5270	Ant1	-2.411	0.6	-1.811	<=11	Pass
NVNT	n40	5270	Ant2	-3.473	0.6	-2.873	<=11	Pass
NVNT	n40	5270	MIMO	0.101	0.6	0.701	<=11	Pass
NVNT	n40	5310	Ant1	-1.921	0.62	-1.301	<=11	Pass
NVNT	n40	5310	Ant2	-3.545	0.62	-2.925	<=11	Pass
NVNT	n40	5310	MIMO	0.353	0.62	0.973	<=11	Pass
NVNT	ac20	5260	Ant1	0.609	0.31	0.919	<=11	Pass
NVNT	ac20	5260	Ant2	0.378	0.31	0.688	<=11	Pass
NVNT	ac20	5260	MIMO	3.505	0.31	3.815	<=11	Pass
NVNT	ac20	5300	Ant1	1.861	0.31	2.171	<=11	Pass
NVNT	ac20	5300	Ant2	0.842	0.31	1.152	<=11	Pass
NVNT	ac20	5300	MIMO	4.392	0.31	4.702	<=11	Pass
NVNT	ac20	5320	Ant1	1.871	0.32	2.191	<=11	Pass
NVNT	ac20	5320	Ant2	0.938	0.32	1.258	<=11	Pass
NVNT	ac20	5320	MIMO	4.44	0.32	4.76	<=11	Pass
NVNT	ac40	5270	Ant1	-2.776	0.59	-2.186	<=11	Pass
NVNT	ac40	5270	Ant2	-3.547	0.59	-2.957	<=11	Pass
NVNT	ac40	5270	MIMO	-0.134	0.59	0.456	<=11	Pass
NVNT	ac40	5310	Ant1	-1.908	0.61	-1.298	<=11	Pass
NVNT	ac40	5310	Ant2	-3.214	0.61	-2.604	<=11	Pass
NVNT	ac40	5310	MIMO	0.498	0.61	1.108	<=11	Pass
NVNT	ac80	5290	Ant1	-5.966	1.16	-4.806	<=11	Pass
NVNT	ac80	5290	Ant2	-6.902	1.16	-5.742	<=11	Pass
NVNT	ac80	5290	MIMO	-3.399	1.16	-2.239	<=11	Pass
NVNT	ax20	5260	Ant1	0.404	0.4	0.804	<=11	Pass

NVNT	ax20	5260	Ant2	0.247	0.4	0.647	<=11	Pass
NVNT	ax20	5260	MIMO	3.337	0.4	3.737	<=11	Pass
NVNT	ax20	5300	Ant1	2.246	0.4	2.646	<=11	Pass
NVNT	ax20	5300	Ant2	1.139	0.4	1.539	<=11	Pass
NVNT	ax20	5300	MIMO	4.738	0.4	5.138	<=11	Pass
NVNT	ax20	5320	Ant1	1.905	0.39	2.295	<=11	Pass
NVNT	ax20	5320	Ant2	-0.079	0.39	0.311	<=11	Pass
NVNT	ax20	5320	MIMO	4.036	0.39	4.426	<=11	Pass
NVNT	ax40	5270	Ant1	-2.498	0.71	-1.788	<=11	Pass
NVNT	ax40	5270	Ant2	-3.265	0.71	-2.555	<=11	Pass
NVNT	ax40	5270	MIMO	0.146	0.71	0.856	<=11	Pass
NVNT	ax40	5310	Ant1	-1.783	0.71	-1.073	<=11	Pass
NVNT	ax40	5310	Ant2	-3.07	0.71	-2.36	<=11	Pass
NVNT	ax40	5310	MIMO	0.631	0.71	1.341	<=11	Pass
NVNT	ax80	5290	Ant1	-5.909	1.32	-4.589	<=11	Pass
NVNT	ax80	5290	Ant2	-6.507	1.32	-5.187	<=11	Pass
NVNT	ax80	5290	MIMO	-3.187	1.32	-1.867	<=11	Pass

Test Graphs

PSD NVNT a 5260MHz Ant1



PSD NVNT a 5300MHz Ant1



PSD NVNT a 5320MHz Ant1




PSD NVNT a 5260MHz Ant2



PSD NVNT a 5300MHz Ant2



PSD NVNT a 5320MHz Ant2

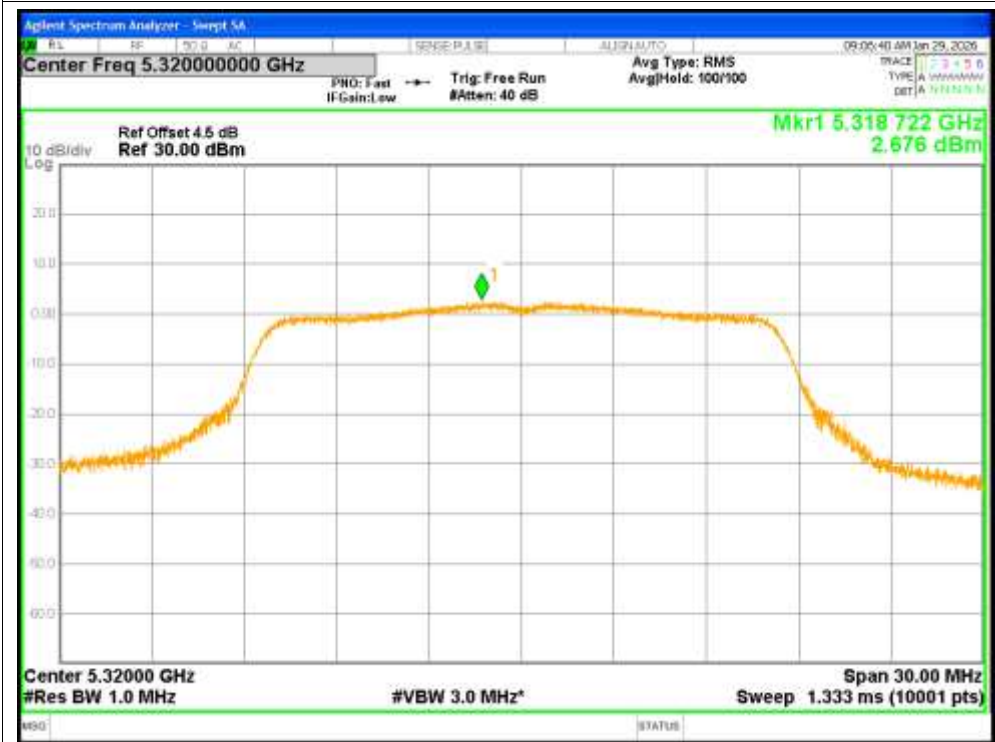


PSD NVNT n20 5260MHz Ant1



PSD NVNT n20 5260MHz Ant2



PSD NVNT n20 5300MHz Ant1

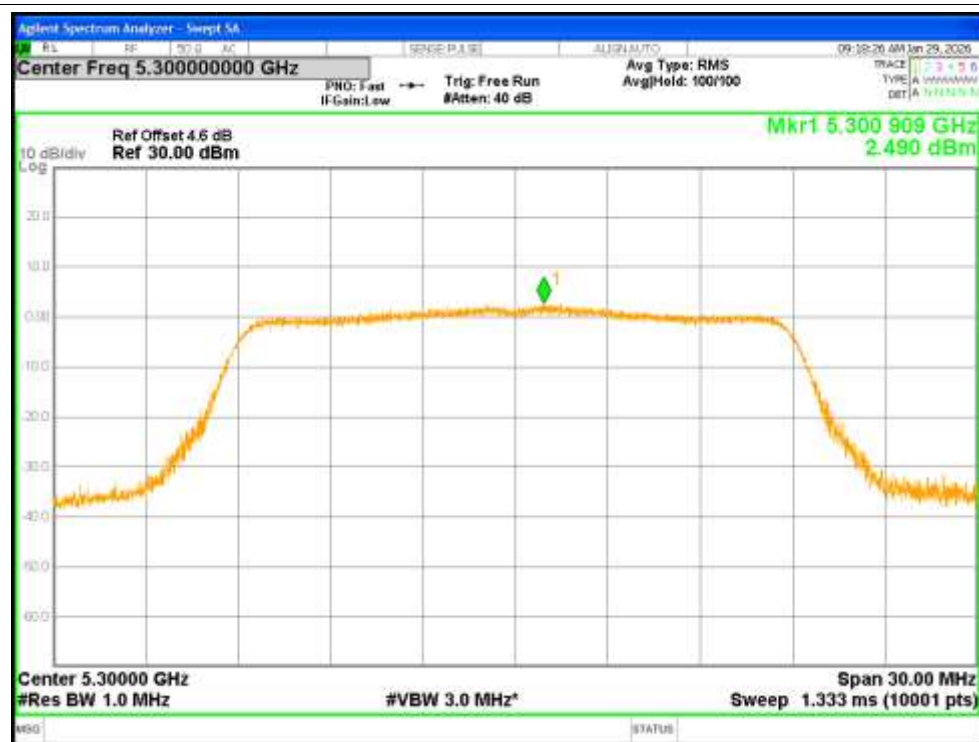

PSD NVNT n20 5300MHz Ant2



PSD NVNT n20 5320MHz Ant1




PSD NVNT n20 5320MHz Ant2



PSD NVNT n40 5270MHz Ant1



PSD NVNT n40 5270MHz Ant2

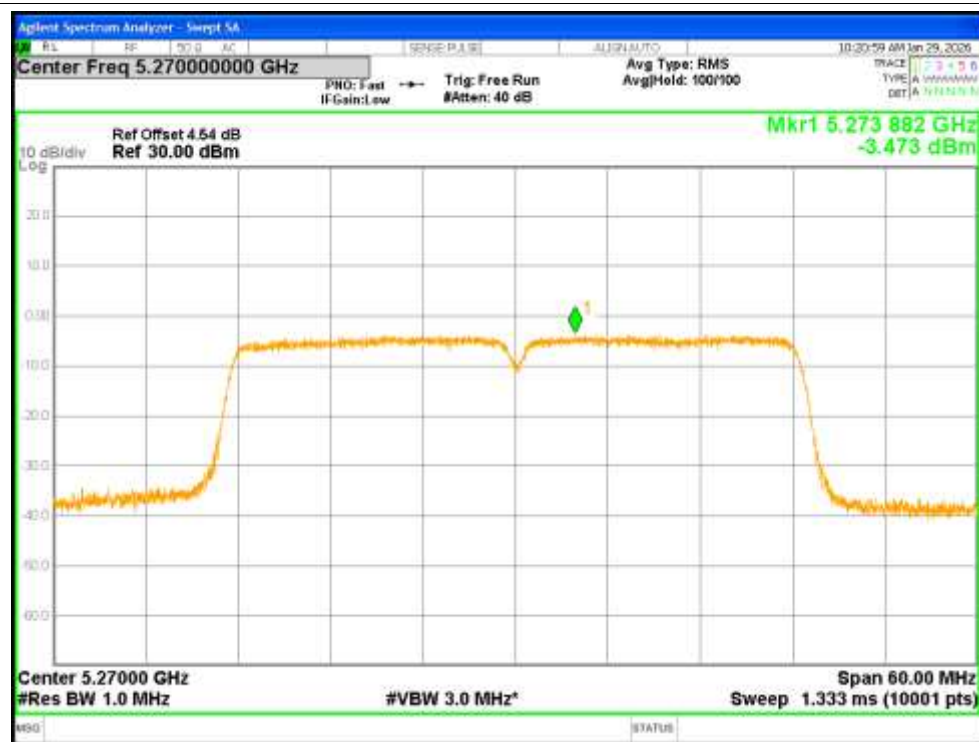

PSD NVNT n40 5310MHz Ant1



PSD NVNT n40 5310MHz Ant2



PSD NVNT ac20 5260MHz Ant1



PSD NVNT ac20 5260MHz Ant2



PSD NVNT ac20 5300MHz Ant1



PSD NVNT ac20 5300MHz Ant2



PSD NVNT ac20 5320MHz Ant1



PSD NVNT ac20 5320MHz Ant2



PSD NVNT ac40 5270MHz Ant1



PSD NVNT ac40 5270MHz Ant2



PSD NVNT ac40 5310MHz Ant1



PSD NVNT ac40 5310MHz Ant2




PSD NVNT ac80 5290MHz Ant1



PSD NVNT ac80 5290MHz Ant2



PSD NVNT ax20 5260MHz Ant1

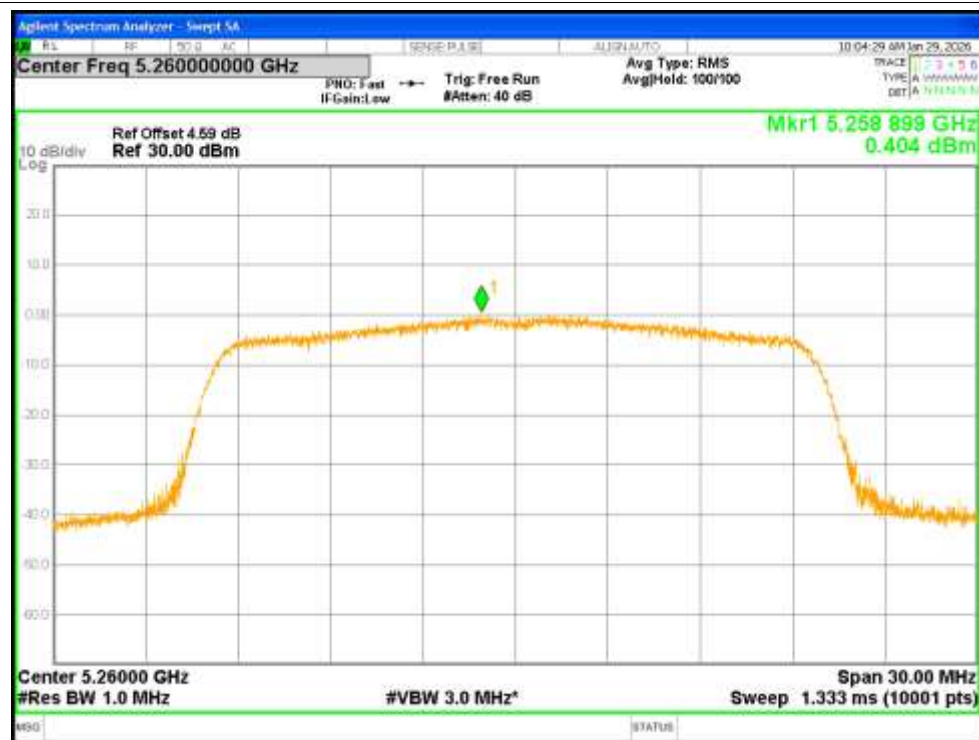

PSD NVNT ax20 5260MHz Ant2



PSD NVNT ax20 5300MHz Ant1



PSD NVNT ax20 5300MHz Ant2



PSD NVNT ax20 5320MHz Ant1



PSD NVNT ax20 5320MHz Ant2



PSD NVNT ax40 5270MHz Ant1



PSD NVNT ax40 5270MHz Ant2



PSD NVNT ax40 5310MHz Ant1



PSD NVNT ax40 5310MHz Ant2



PSD NVNT ax80 5290MHz Ant1



PSD NVNT ax80 5290MHz Ant2

