

Report No.:

0614192

Rx Mode

(Max. Heating &

Min. Lighting)

AC Main "N"

Tested By:Hong, Report No.:0614192

Scan Settings (1 Range)

Frequencies				Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2	1	9k	30M
	12	9k	30M
			EW0699
			EW0192

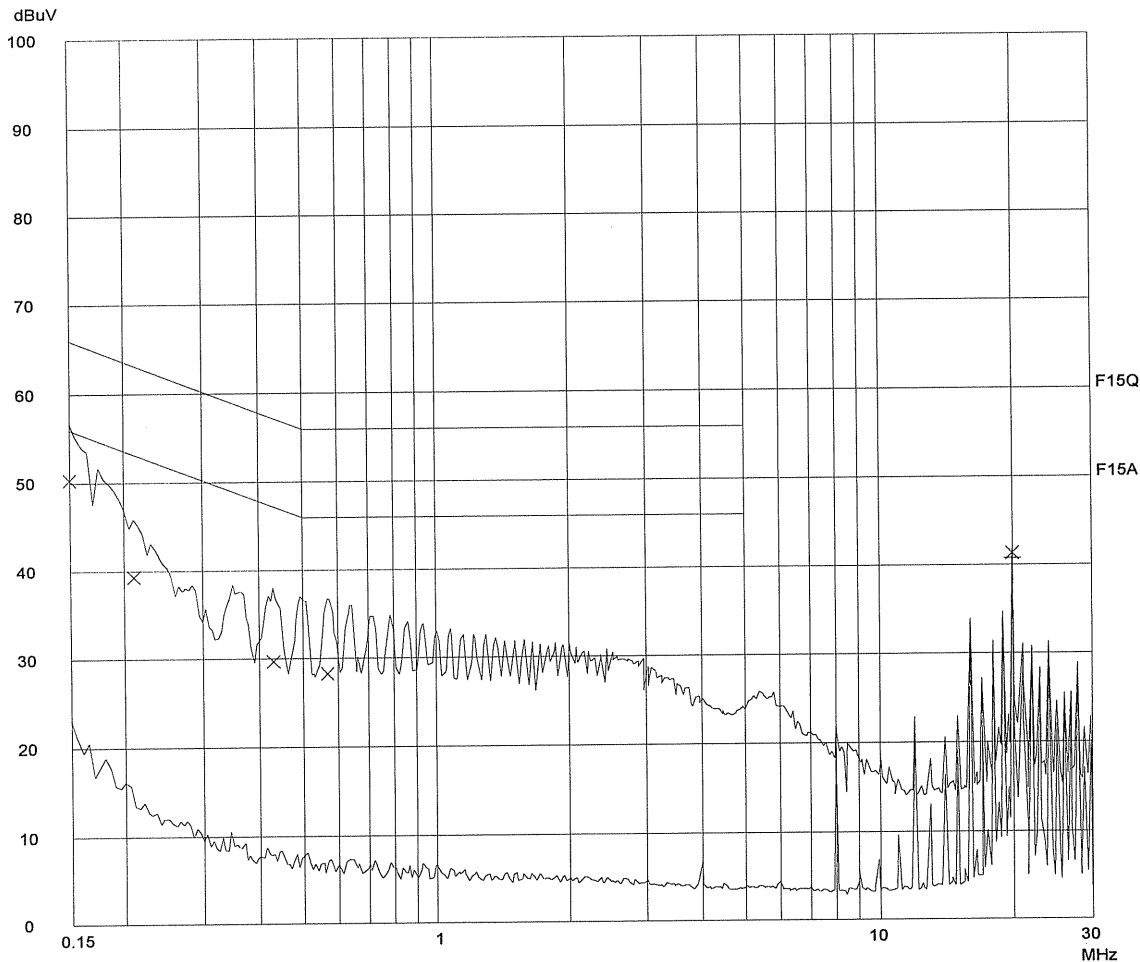

Report No.: 0614192
Rx Mode
(Max. Heating &
Min. Lighting)
AC Main "N"

Tested By: Hong, Report No.: 0614192

Scan Settings (1 Range)

----- Frequencies -----			----- Receiver Settings -----					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.15000	50.2	66.0
0.21000	39.2	63.2
0.43000	29.5	57.3
0.57000	28.1	56.0
19.97500	41.2	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

19.97500	40.7	50.0
----------	------	------

* limit

Report No.:

0614192

Rx Mode

(Max. Heating & Min. Lighting)

AC Main “L”

Tested By:Hong, Report No.:0614192

Scan Settings (1 Range)

Frequencies				Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB


Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0699
12	9k	30M	EW0192

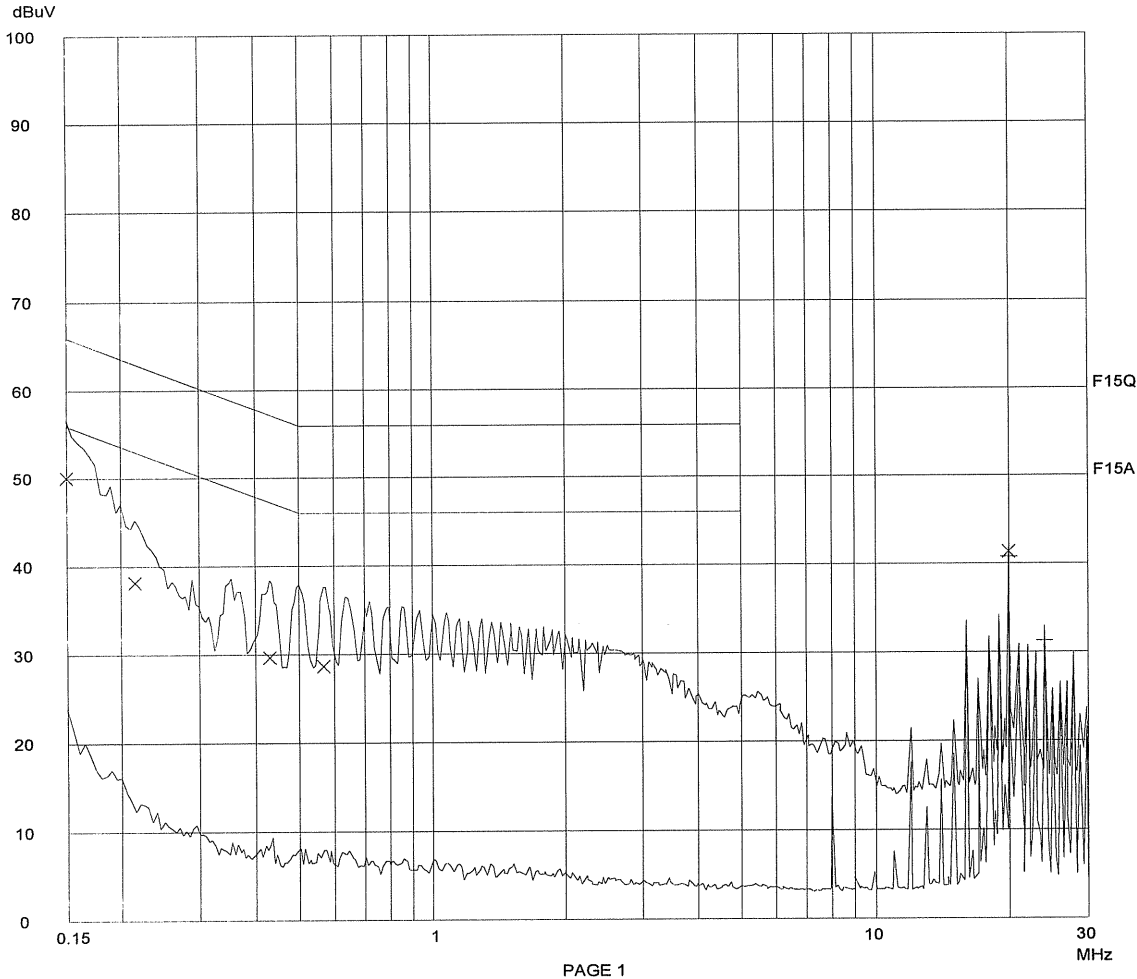

Report No.:

0614192

Rx Mode

(Max. Heating &

Min. Lighting)

AC Main “L”

Tested By:Hong, Report No.:0614192

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.15000	50.0	66.0
0.21500	38.1	63.0
0.43000	29.6	57.3
0.57000	28.5	56.0
19.97500	41.2	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

19.97500	40.6	50.0
23.97000	31.2	50.0

* limit