FCC&ISED Radio Test Report

FCC ID: EMOHBH88

IC: 986B-HBH88

This report concerns (check one): ☒**Original Grant** ☐**Class I Change** ☐**Class II Change**

Project No.	:	1711C036
Equipment	:	Bluetooth Bedside Clock with Single Day Alarm, Dual AC Outlets and Dual USB Charging
Model Name for FCC	:	HBH88, HBH88X("X" means A - Z, denotes as color of cabinet)
Model Name for RSS	:	HBH88
Applicant	:	SDI TECHNOLOGIES INC.
Address	:	1299 Main Street, Rahway, NJ 07065, U.S.A

Date of Receipt	:	Nov. 08, 2017
Date of Test	:	Nov. 08, 2017 ~ Dec. 13, 2017
Issued Date	:	Dec. 14, 2017
Tested by	:	BTL Inc.

Testing Engineer : Rot Liang
(Rot Liang)

Technical Manager : Shawn Xiao
(Shawn Xiao)

Authorized Signatory : David Mao
(David Mao)

BTL INC.

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

NVLAP TESTING NVLAP LAB CODE 200788-0

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents Page

1 . CERTIFICATION 7

2 . SUMMARY OF TEST RESULTS 8

2.1 TEST FACILITY 9

2.2 MEASUREMENT UNCERTAINTY 9

3 . GENERAL INFORMATION 10

3.1 GENERAL DESCRIPTION OF EUT 10

3.2 DESCRIPTION OF TEST MODES 12

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING 12

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 13

3.5 DESCRIPTION OF SUPPORT UNITS 13

4 . EMC EMISSION TEST 14

4.1 CONDUCTED EMISSION MEASUREMENT 14

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS 14

4.1.2 TEST PROCEDURE 14

4.1.3 DEVIATION FROM TEST STANDARD 14

4.1.4 TEST SETUP 15

4.1.5 EUT OPERATING CONDITIONS 15

4.1.6 EUT TEST CONDITIONS 15

4.1.7 TEST RESULTS 15

4.2 RADIATED EMISSION MEASUREMENT 16

4.2.1 RADIATED EMISSION LIMITS 16

4.2.2 TEST PROCEDURE 17

4.2.3 DEVIATION FROM TEST STANDARD 17

4.2.4 TEST SETUP 18

4.2.5 EUT OPERATING CONDITIONS 19

4.2.6 EUT TEST CONDITIONS 19

4.2.7 TEST RESULTS (9KHZ TO 30MHZ) 19

4.2.8 TEST RESULTS (30MHZ TO 1000MHZ) 19

4.2.9 TEST RESULTS (ABOVE 1000MHZ) 19

5 . NUMBER OF HOPPING CHANNEL 20

5.1 APPLIED PROCEDURES 20

5.1.1 TEST PROCEDURE 20

5.1.2 DEVIATION FROM STANDARD 20

5.1.3 TEST SETUP 20

5.1.4 EUT OPERATION CONDITIONS 20

5.1.5 EUT TEST CONDITIONS 20

5.1.6 TEST RESULTS 20

6 . AVERAGE TIME OF OCCUPANCY 21

Table of Contents Page

6.1 APPLIED PROCEDURES / LIMIT 21
6.1.1 TEST PROCEDURE 21
6.1.2 DEVIATION FROM STANDARD 21
6.1.3 TEST SETUP 21
6.1.4 EUT OPERATION CONDITIONS 22
6.1.5 EUT TEST CONDITIONS 22
6.1.6 TEST RESULTS 22

7 . HOPPING CHANNEL SEPARATION MEASUREMENT 23

7.1 APPLIED PROCEDURES / LIMIT 23
7.1.1 TEST PROCEDURE 23
7.1.2 DEVIATION FROM STANDARD 23
7.1.3 TEST SETUP 23
7.1.4 EUT TEST CONDITIONS 23
7.1.5 TEST RESULTS 23

8 . BANDWIDTH TEST 24

8.1 APPLIED PROCEDURES 24
8.1.1 TEST PROCEDURE 24
8.1.2 DEVIATION FROM STANDARD 24
8.1.3 TEST SETUP 24
8.1.4 EUT OPERATION CONDITIONS 24
8.1.5 EUT TEST CONDITIONS 24
8.1.6 TEST RESULTS 24

9 . PEAK OUTPUT POWER TEST 25

9.1 APPLIED PROCEDURES / LIMIT 25
9.1.1 TEST PROCEDURE 25
9.1.2 DEVIATION FROM STANDARD 25
9.1.3 TEST SETUP 25
9.1.4 EUT OPERATION CONDITIONS 25
9.1.5 EUT TEST CONDITIONS 25
9.1.6 TEST RESULTS 25

10 . ANTENNA CONDUCTED SPURIOUS EMISSION 26

10.1 APPLIED PROCEDURES / LIMIT 26
10.1.1 TEST PROCEDURE 26
10.1.2 DEVIATION FROM STANDARD 26
10.1.3 TEST SETUP 26
10.1.4 EUT OPERATION CONDITIONS 26
10.1.5 EUT TEST CONDITIONS 26
10.1.6 TEST RESULTS 26

11 . MEASUREMENT INSTRUMENTS LIST 27

12 . EUT TEST PHOTO 30

Table of Contents | Page

APPENDIX A - CONDUCTED EMISSION	34
APPENDIX B - RADIATED EMISSION (9KHZ-30MHZ)	37
APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)	42
APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)	49
APPENDIX E - NUMBER OF HOPPING CHANNEL	74
APPENDIX F - AVERAGE TIME OF OCCUPANCY	76
APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT	89
APPENDIX H - BANDWIDTH	94
APPENDIX I - PEAK OUTPUT POWER	99
APPENDIX J - ANTENNA CONDUCTED SPURIOUS EMISSION	104

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FICP-1-1711C036	Original Issue.	Dec. 14, 2017

1. CERTIFICATION

Equipment	:	Bluetooth Bedside Clock with Single Day Alarm, Dual AC Outlets and Dual USB Charging
Brand Name	:	iHome
Model Name for FCC	:	HBH88, HBH88X(“X” means A - Z, denotes as color of cabinet)
Model Name for RSS		HBH88
Applicant	:	SDI TECHNOLOGIES INC.
Manufacturer	:	HTI Technologies Inc.
Address	:	1299 Main Street, Rahway, NJ 07065, U.S.A
Factory	:	Jadestar Electronics (Shenzhen) Co. Ltd.
Address	:	Block 5, He Tai Industrial Zone, He Ping Community, Fu Yuan Town, Bao An District.
Date of Test	:	Nov. 08, 2017 ~ Dec. 13, 2017
Test Sample	:	Engineering Sample
Standard(s)	:	FCC Part15, Subpart C (15.247)/ ANSI C63.10-2013 RSS-247 Issue 2, Feb. 2017 RSS-GEN Issue 4, Nov 2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.
The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FICP-1-1711C036) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15, Subpart C (15.247) RSS-247 Issue 2, Feb 2017, RSS-GEN Issue 4, Nov 2014				
Standard(s) Section		Test Item	Judgment	Remark
FCC	**IC**			
15.207	RSS-GEN 8.8	Conducted Emission	PASS	
15.247(d)	RSS-247 5.5	Antenna conducted Spurious Emission	PASS	
15.247 (a)(1)	RSS-247 5.1 (b)	Hopping Channel Separation	PASS	
15.247(a)(1)	RSS-247 5.1 (a)	Bandwidth	PASS	
15.247 (b)(1)	RSS-247 5.4 (b)	Peak Output Power	PASS	
15.247(d) 15.209	RSS-247 5.5	Radiated Spurious Emission	PASS	
15.247 (a)(1)(iii)	RSS-247 5.1 (d)	Number of Hopping Frequency	PASS	
15.247 (a)(1)(iii)	RSS-247 5.1 (d)	Dwell Time	PASS	
15.205	RSS-GEN 8.10	Restricted Bands	PASS	
15.203	-	Antenna Requirement	PASS	

Note:

(1)" N/A" denotes test is not applicable in this test report

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.
BTL's test firm number for FCC: 854385
BTL's designation number for FCC: CN5020
BTL's test firm number for IC: 4428B-1

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

The reported uncertainty of measurement **y** ± **U**, where expanded uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95** %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 KHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

C. Other Measurement:

Test Item	Uncertainty
Conducted Spurious Emission	2.67dB
Hopping Channel Separation	53.46MHz
Peak Output Power	0.95dB
Number of Hopping Frequency	53.46MHz
Temperature	0.08℃
Humidity	1.5%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Bluetooth Bedside Clock with Single Day Alarm, Dual AC Outlets and Dual USB Charging	
Brand Name	iHome	
Model Name for FCC	HBH88, HBH88X("X" means A - Z, denotes as color of cabinet)	
Model Name for RSS	HBH88	
Model Difference	"X" means A - Z, denotes as color of cabinet	
Output Power (Max.)	Operation Frequency	2402~2480 MHz
	Modulation Technology	GFSK(1Mbps) π/4-DQPSK(2Mbps) 8-DPSK(3Mbps)
	Bit Rate of Transmitter	
	Output Power Max.	8.14 dBm(1Mbps) 7.44 dBm(3Mbps)
Power Source	AC~125V 60Hz 1300W	
Power Rating	Clock Backup: DC 3V AA x 2 AC Outlet: AC~125V/60Hz USB:DC 5V ⎓ 2.4A x 2	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3 Table for Filed Antenna:

.

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PCB	N/A	0

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode **Note (1)**

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX Mode **Note (1)**

Note:

(1) The measurements are performed at the high, middle, low available channels.

(2) The measurements for Hopping Channel Separation, Bandwidth and Peak Output Power were tested during 1Mbps, 2Mbps and 3Mbps, the worst case are 1Mbps and 3Mbps, only worst case was documented.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test Software Version	Bluetest 3		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	63	63	63
Parameters(3Mbps)	100	100	100

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.8m	AC Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

(1) The limit of " * " decreases with the logarithm of the frequency

(2) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
d. LISN at least 80 cm from nearest part of EUT chassis.
e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

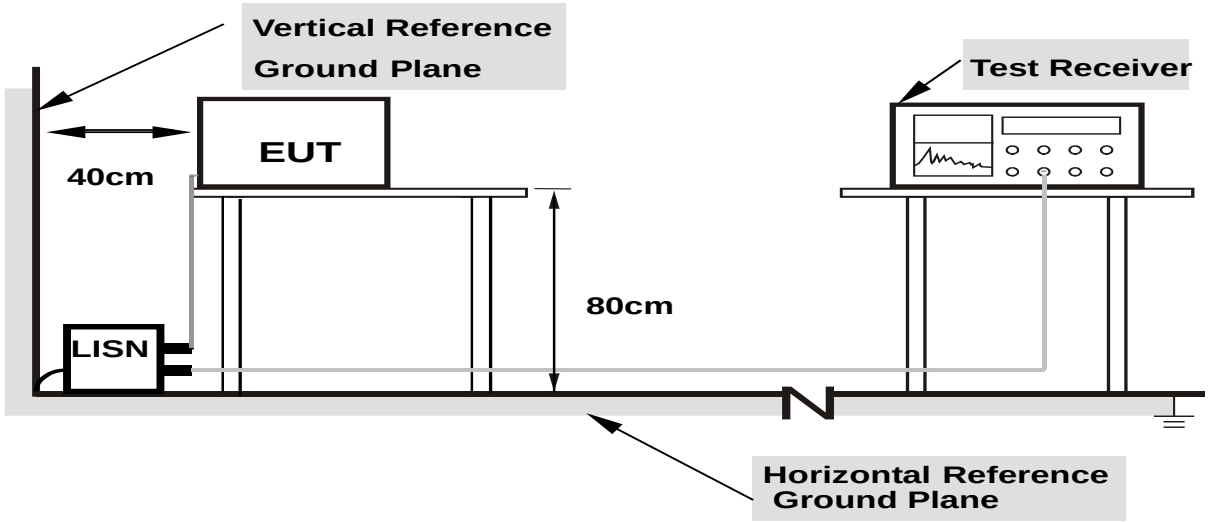

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting/receiving data or hopping on mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Appendix A.

Remark:

(1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "*" marked in AVG Mode column of Interference Voltage Measured.

(2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz -1000MHz)

In case the emission fall within the restricted band specified on 15.205(a) & RSS-247 5.5, then the 15.209(a) & RSS-Gen limit in the table below has to be followed.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C/RSS-247.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Spectrum Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz ~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz ~110KHz for QP detector
Start ~ Stop Frequency	110KHz ~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz ~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE

a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn‘t perform. (below 1GHz)
h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn‘t perform. (above 1GHz)
i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD

No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

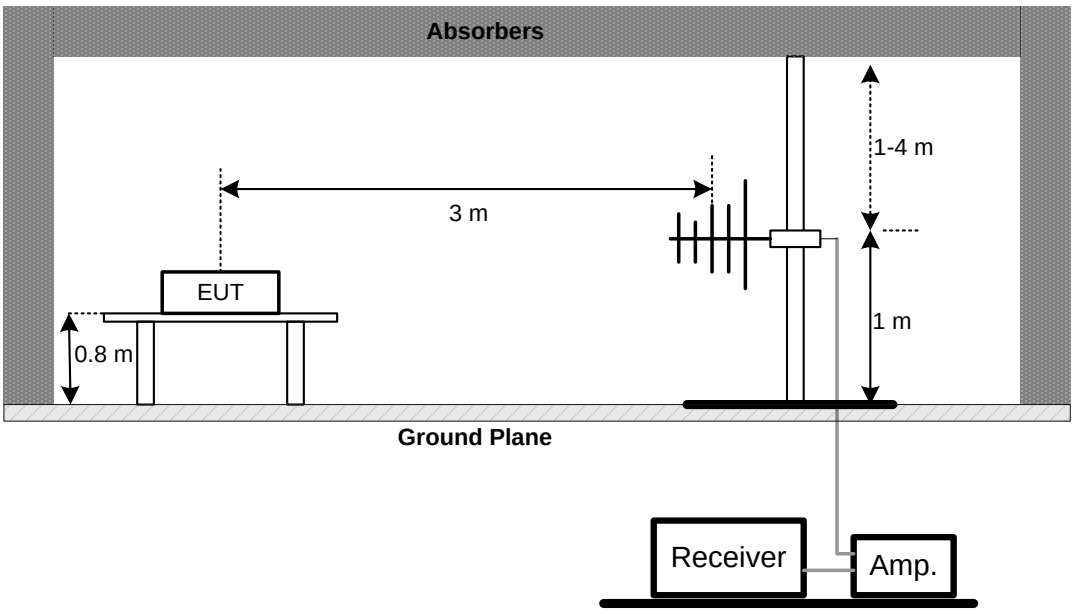

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

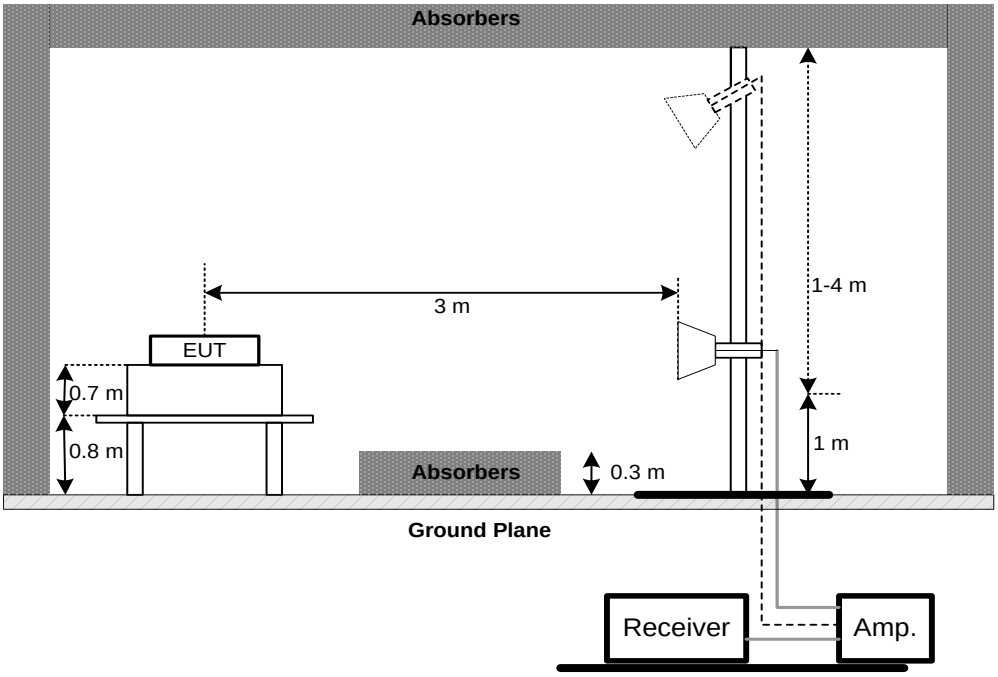

(C) For Radiated Emissions Below 30MHz

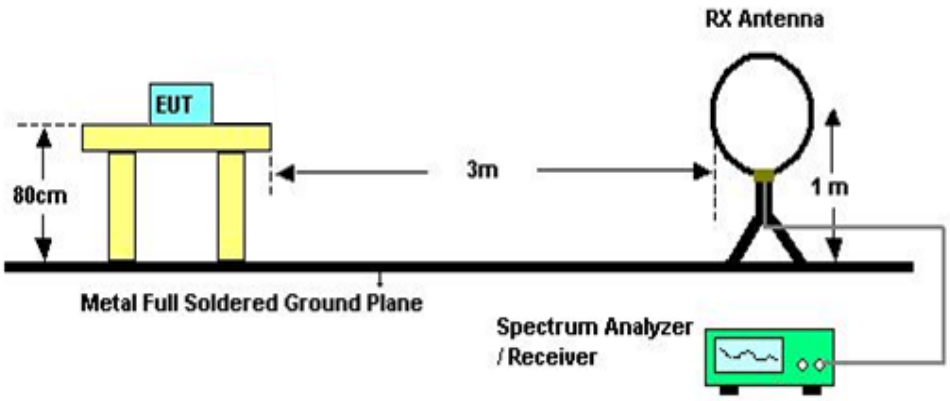

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix B

Remark:

(1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
(2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
(3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the Appendix C.

4.2.9 TEST RESULTS (ABOVE 1000MHZ)

Please refer to the Appendix D.

Remark:

(1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-247			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(1)(iii) RSS-247 5.1 (d)	Number of Hopping Channel	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting: RBW=100KHz, VBW=100KHz, Sweep time = Auto.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

5.1.6 TEST RESULTS

Please refer to the Appendix E

6. AVERAGE TIME OF OCCUPANCY

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(1)(iii) RSS-247 5.1 (d)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

a. The transmitter output (antenna port) was connected to the spectrum analyzer
b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
d. Sweep Time is more than once pulse time.
e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
f. Measure the maximum time duration of one single pulse.
g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
h. Measure the maximum time duration of one single pulse.
i. DH5 Packet permit maximum 1600/ 79 / 6 = 3.37 hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 3.37 x 31.6 = 106.6 within 31.6 seconds.
j. DH3 Packet permit maximum 1600 / 79 / 4 = 5.06 hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 5.06 x 31.6 = 160 within 31.6 seconds.
k. DH1 Packet permit maximum 1600 / 79 /2 = 10.12 hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 10.12 x 31.6 = 320 within 31.6 seconds.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Appendix F

7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.1.1 TEST PROCEDURE

a. The EUT must have its hopping function enabled

b. Span = wide enough to capture the peaks of two adjacent channels
Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span
Video (or Average) Bandwidth (VBW) ≥ RBW
Sweep = Auto
Detector function = Peak
Trace = Max Hold

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

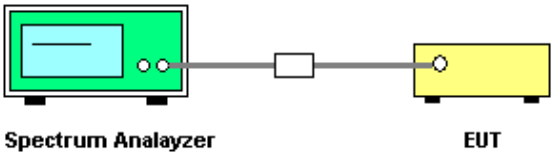

7.1.4 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

7.1.5 TEST RESULTS

Please refer to the Appendix G

8. BANDWIDTH TEST

8.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-247		
Section	Test Item	Frequency Range (MHz)
15.247(a)(2) RSS-GEN 6.6 RSS-247 5.1 (a)	Bandwidth	2400-2483.5

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz (20dB Bandwidth) / 30 KHz (Channel Separation)
VBW	100 KHz (20dB Bandwidth) / 100 KHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep Time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

8.1.6 TEST RESULTS

Please refer to the Appendix H

9. PEAK OUTPUT POWER TEST

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C/ RSS-247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1) RSS-247 5.4 (b)	Peak Output Power	1 Watt or 30dBm (hopping channel >75) 0.125Watt or 21dBm (hopping channel <75	2400-2483.5	PASS

9.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting: RBW= 1MHz/3MHz, VBW= 1MHz/3MHz, Sweep time = Auto.

9.1.2 DEVIATION FROM STANDARD

No deviation.

9.1.3 TEST SETUP



9.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

9.1.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

9.1.6 TEST RESULTS

Please refer to the Appendix I

10. ANTENNA CONDUCTED SPURIOUS EMISSION

10.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

10.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.
c. Offset=antenna gain+cable loss

10.1.2 DEVIATION FROM STANDARD

No deviation.

10.1.3 TEST SETUP



10.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

10.1.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz

10.1.6 TEST RESULTS

Please refer to the Appendix J

11. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018
2	LISN	EMCO	3816/2	52765	Mar. 26, 2018
3	50Ω Terminator	SHX	TF2-3G-A	8122901	Mar. 26, 2018
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Oct. 19, 2018

Radiated Emission Below 1GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018
2	Amplifier	HP	8447D	2944A09673	Oct. 19, 2018
3	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	Jun. 26, 2018
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	Antenna	EM	EM-6876-1	230	Mar. 06, 2018

Radiated Emission Above 1GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 26, 2018
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 08, 2018
3	Amplifier	Agilent	8449B	3008A02274	May. 16, 2018
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 26, 2018
5	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
6	Antenna	EM	EM-6876-1	230	Mar. 06, 2018
7	Controller	CT	SC100	N/A	N/A
8	Controller	MF	MF-7802	MF780208416	N/A
9	Cable	emci	EMC104-SM-SM-12000(12m)	N/A	Jun. 26, 2018
10	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Number of Hopping Channel					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Average Time of Occupancy					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Hopping Channel Separation Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Peak Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Antenna Conducted Spurious Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 20, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

12. EUT TEST PHOTO

Conducted Measurement Photos

Radiated Measurement Photos

9KHz to 30MHz

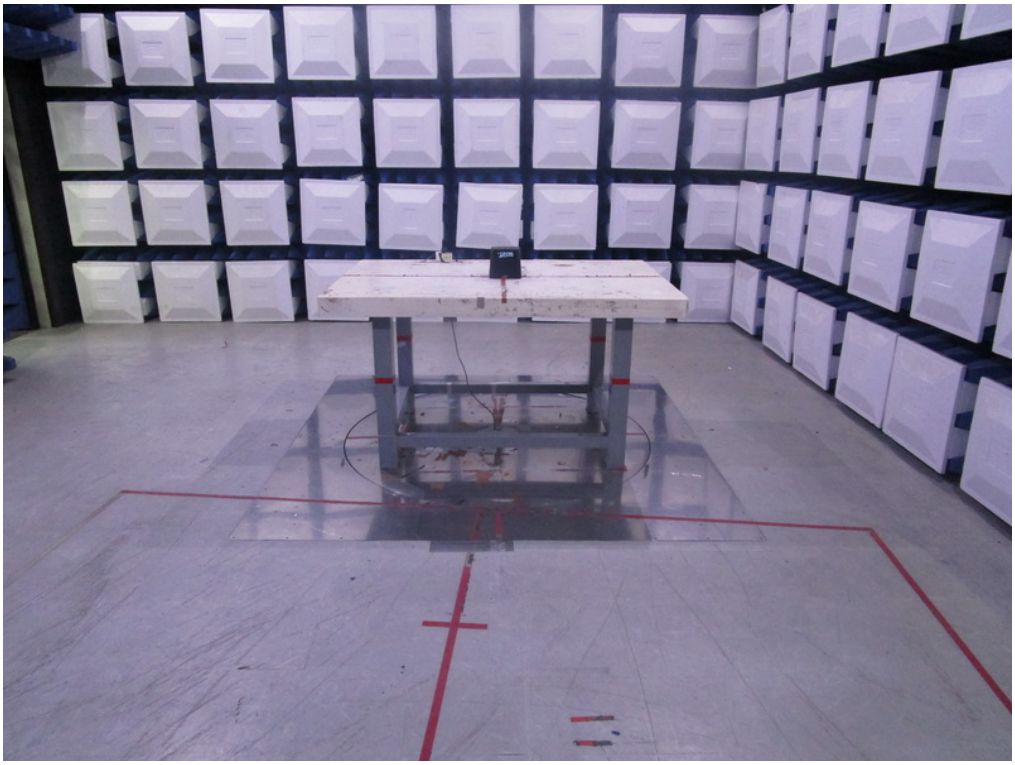

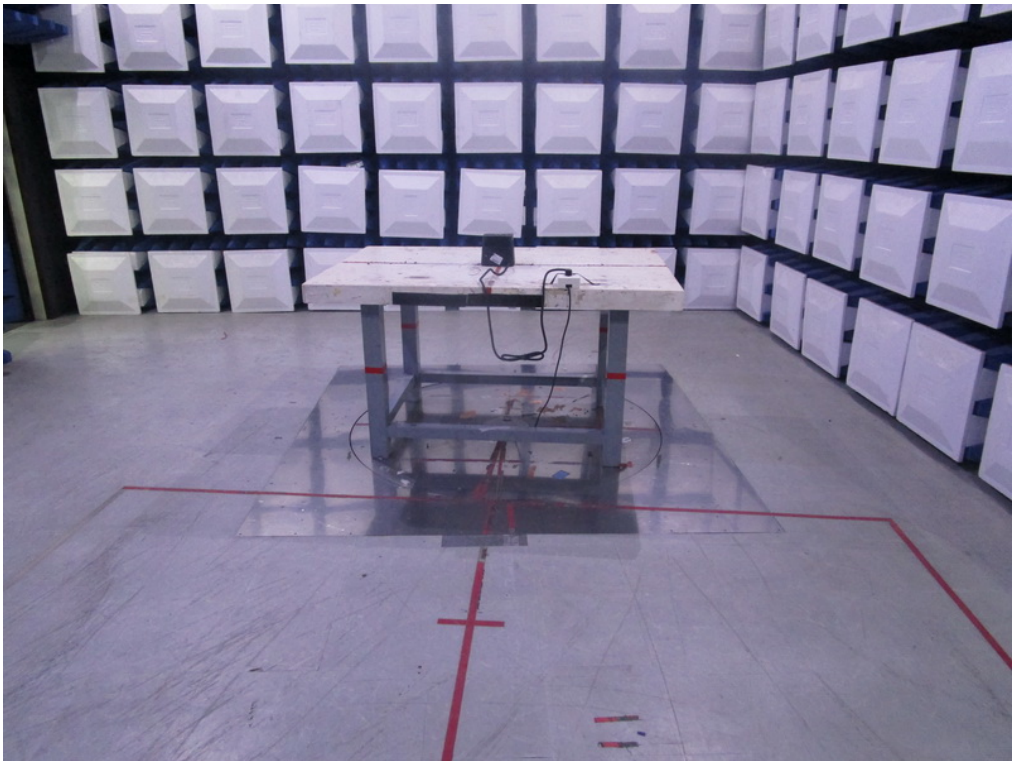

Radiated Measurement Photos

30MHz to 1000MHz

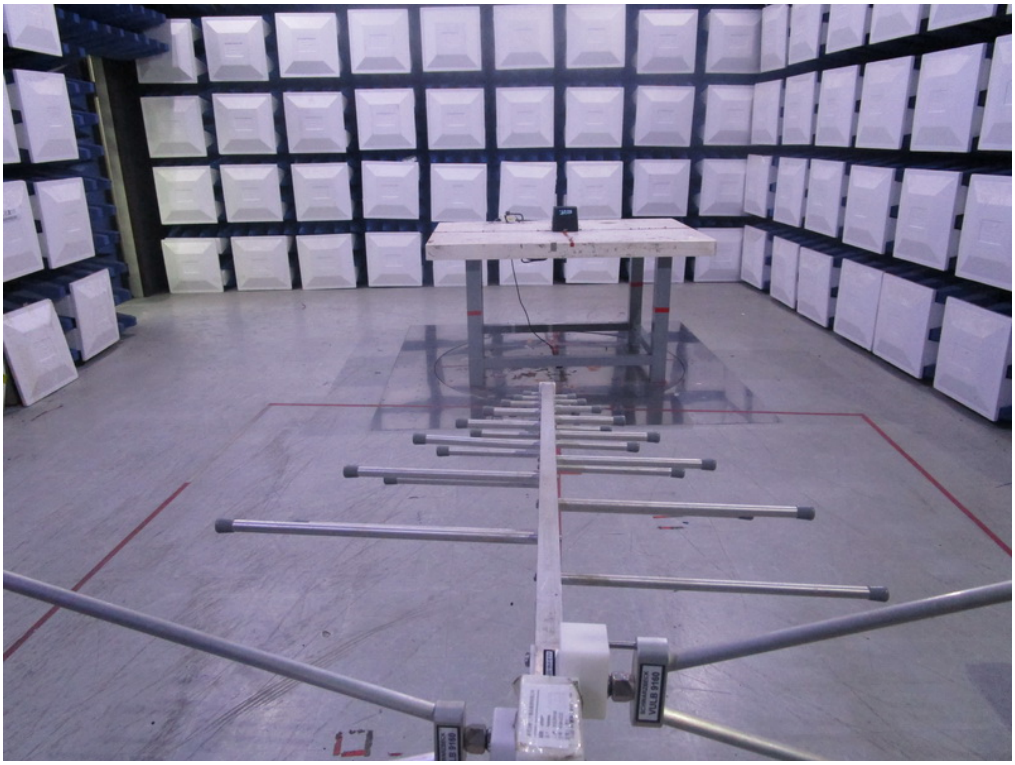

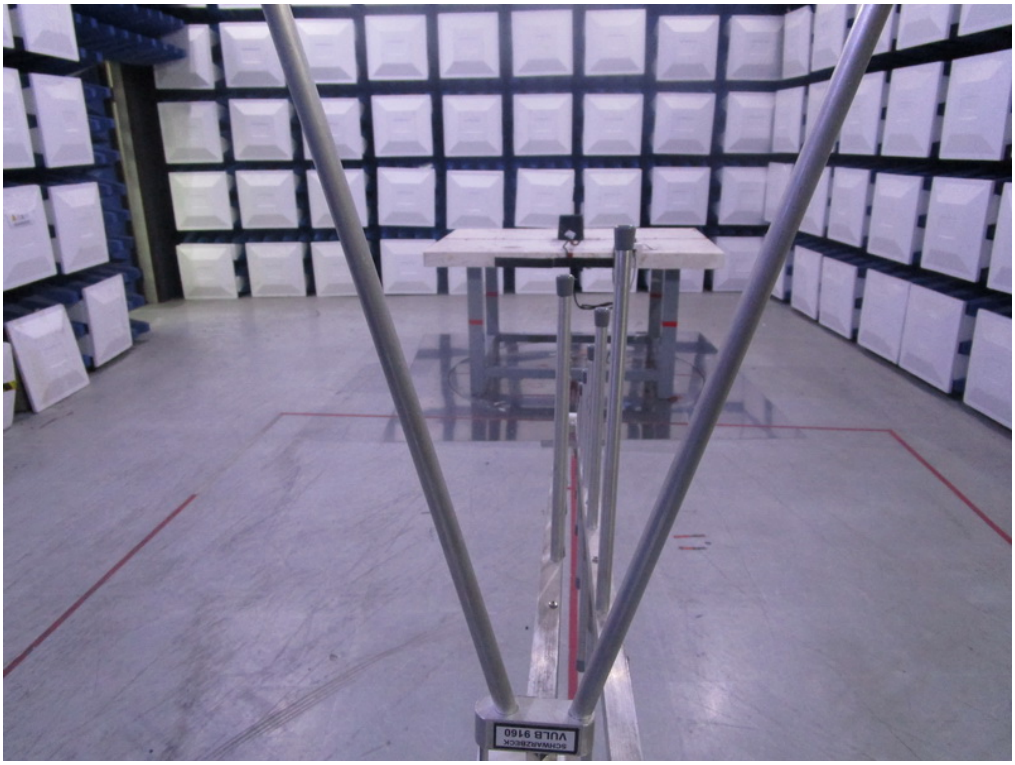

Radiated Measurement Photos

Above 1000MHz

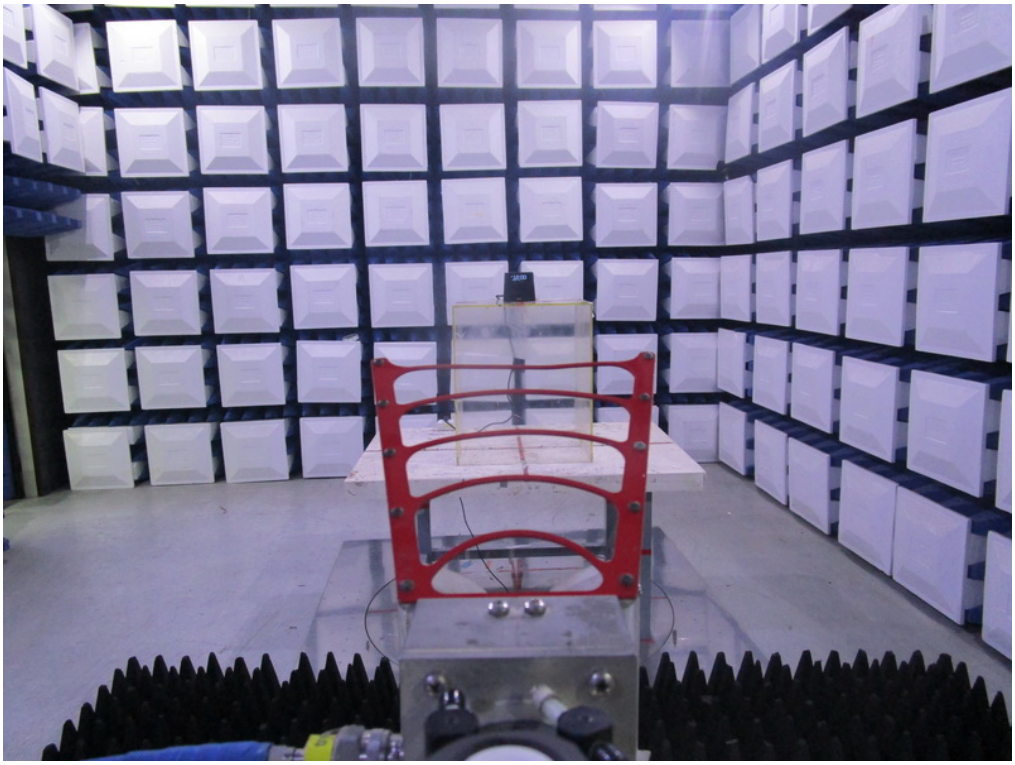

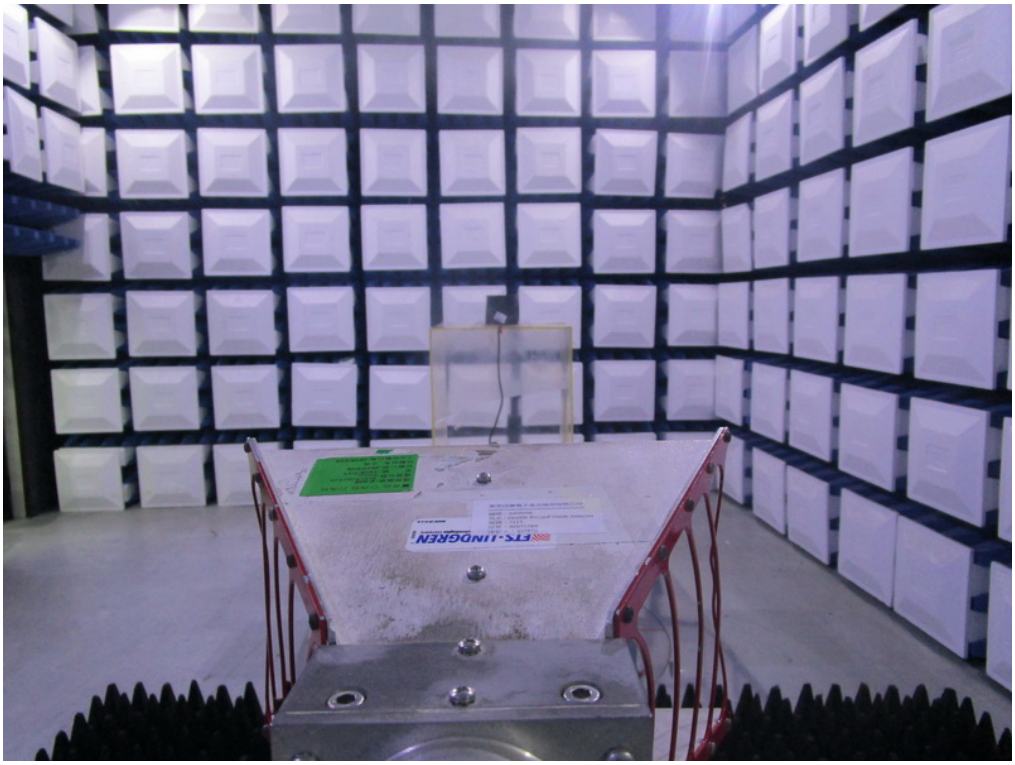

APPENDIX A - CONDUCTED EMISSION

Test Mode:	TX Mode

Line

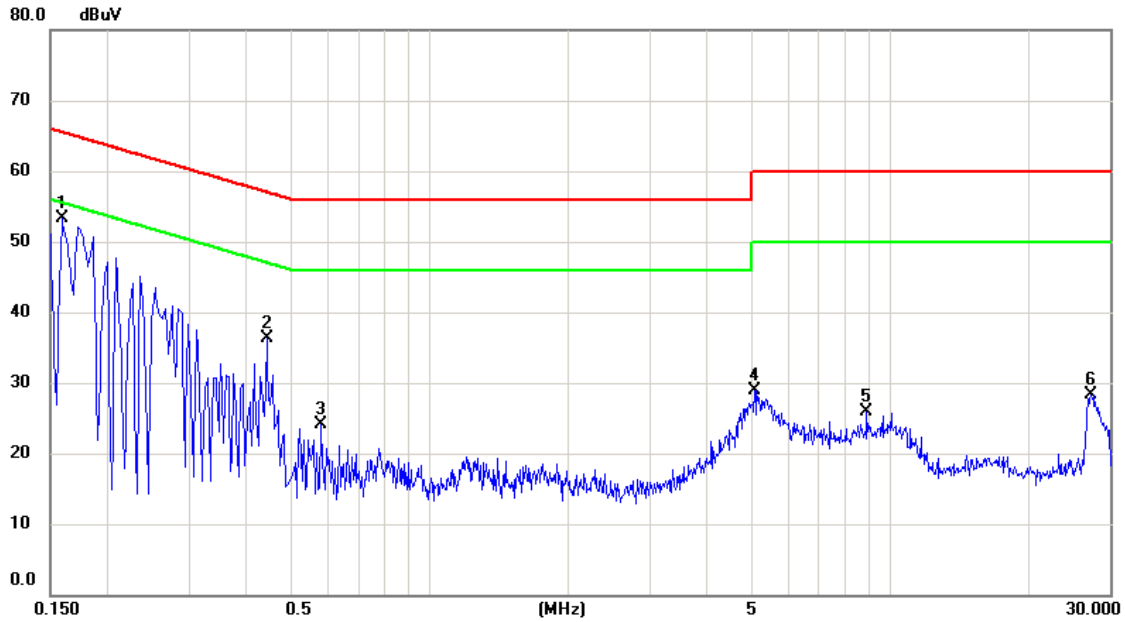

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.1590	43.53	9.79	53.32	65.52	-12.20	Peak	
2	0.4425	26.48	9.80	36.28	57.01	-20.73	Peak	
3	0.5820	14.38	9.81	24.19	56.00	-31.81	Peak	
4	5.0729	18.91	10.08	28.99	60.00	-31.01	Peak	
5	8.8890	15.60	10.27	25.87	60.00	-34.13	Peak	
6	27.3570	17.53	10.86	28.39	60.00	-31.61	Peak	

Test Mode:	TX Mode

Neutral

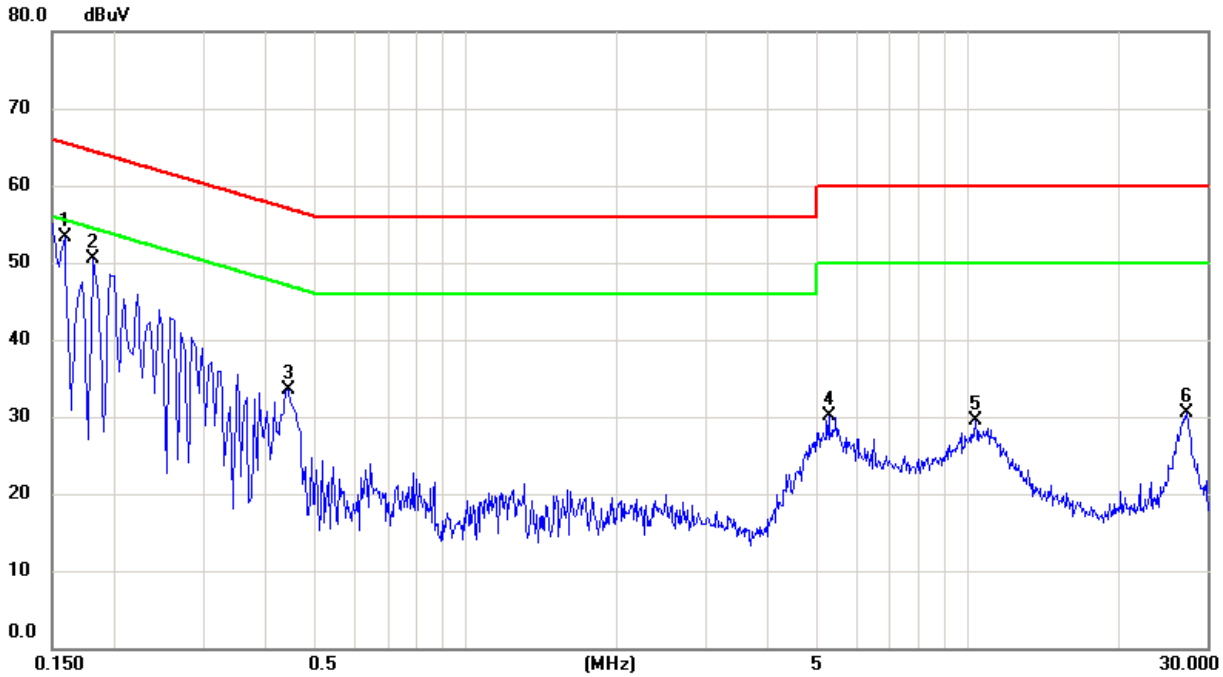

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.1590	43.63	9.68	53.31	65.52	-12.21	Peak	
2	0.1815	40.79	9.68	50.47	64.42	-13.95	Peak	
3	0.4425	23.90	9.69	33.59	57.01	-23.42	Peak	
4	5.2980	20.10	10.03	30.13	60.00	-29.87	Peak	
5	10.3784	19.17	10.30	29.47	60.00	-30.53	Peak	
6	27.3165	19.43	11.04	30.47	60.00	-29.53	Peak	

APPENDIX B - RADIATED EMISSION (9KHZ-30MHZ)

Test Mode:	TX Mode

Ant 0°

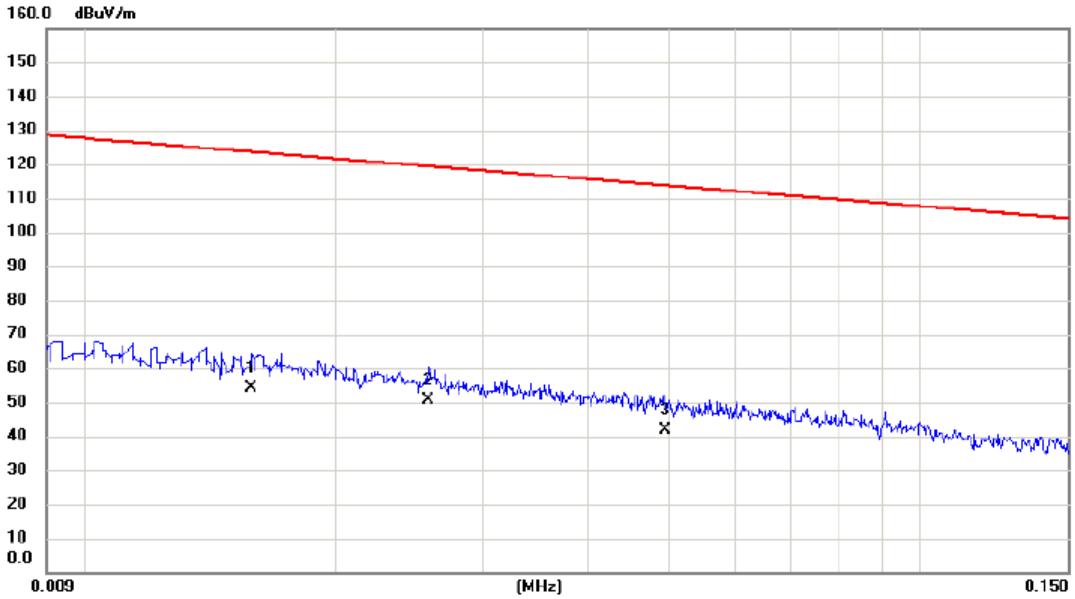

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.0158	34.17	20.17	54.34	123.63	-69.29	AVG	
2	*	0.0258	31.13	19.45	50.58	119.37	-68.79	AVG	
3		0.0495	23.05	18.73	41.78	113.71	-71.93	AVG	

Test Mode:	TX Mode

Ant 0°

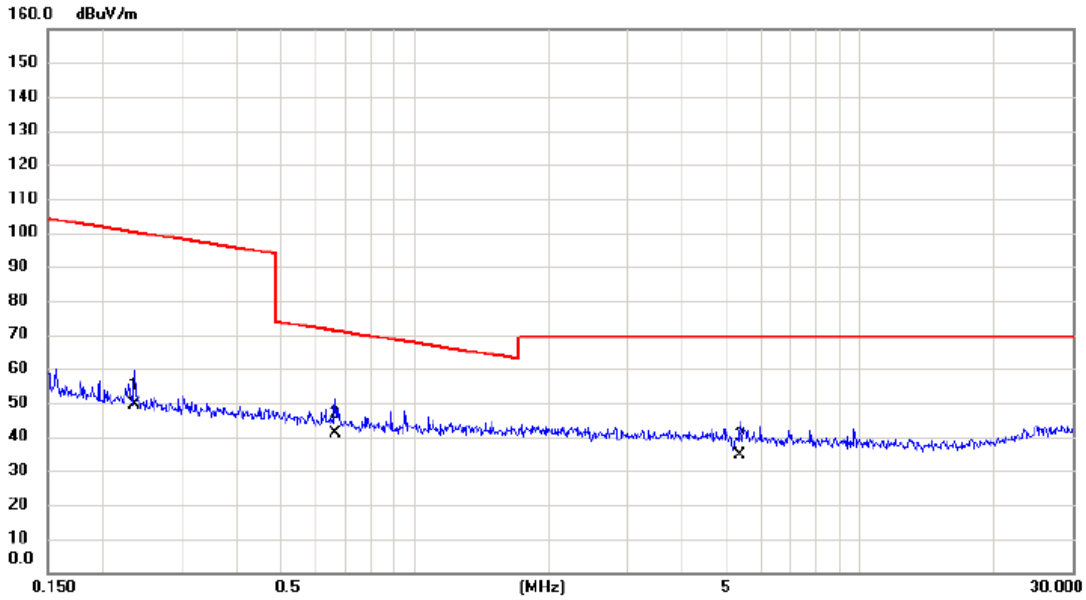

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.2341	32.82	16.70	49.52	100.22	-50.70	AVG	
2	*	0.6648	24.89	16.28	41.17	71.15	-29.98	QP	
3		5.3615	20.22	14.33	34.55	69.54	-34.99	QP	

Test Mode:	TX Mode

Ant 90°

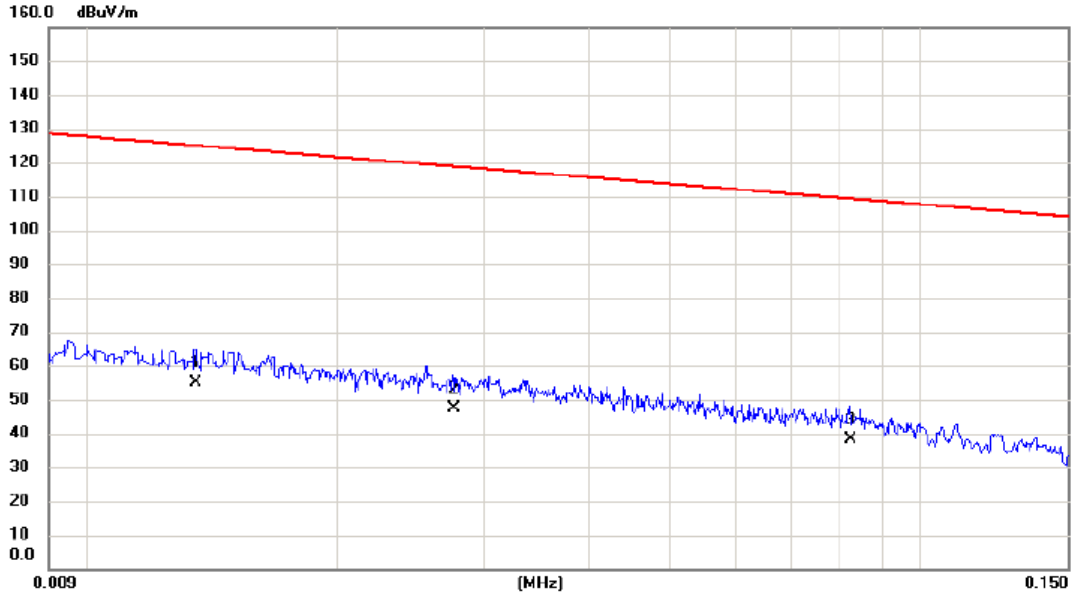

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0135	34.56	20.47	55.03	125.00	-69.97	AVG	
2		0.0276	27.91	19.39	47.30	118.79	-71.49	AVG	
3		0.0824	20.23	18.05	38.28	109.29	-71.01	AVG	

Test Mode:	TX Mode

Ant 90°

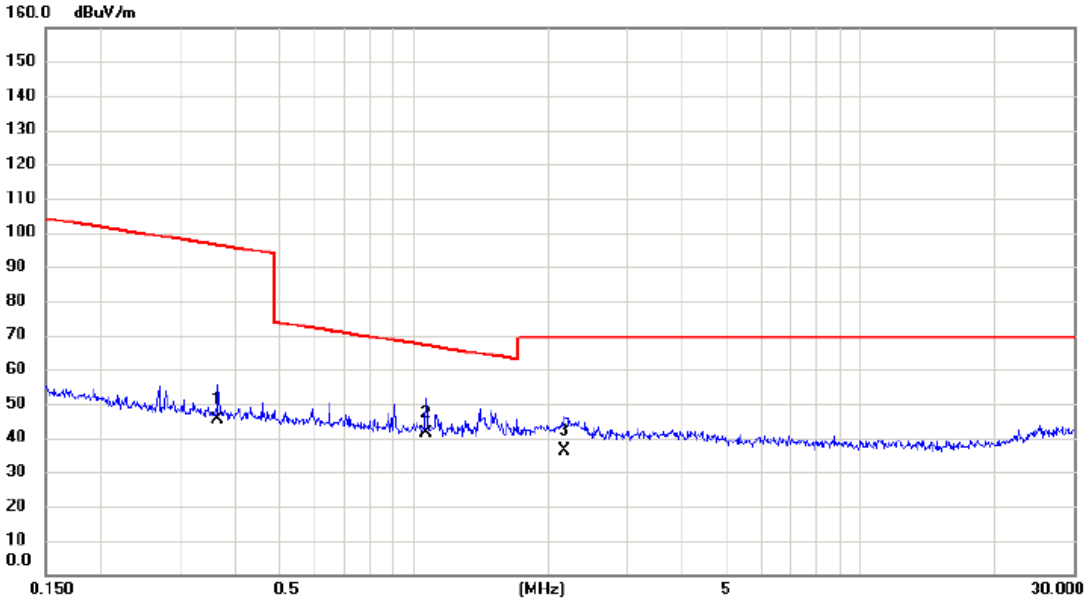

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.3653	28.99	16.57	45.56	96.35	-50.79	AVG	
2	*	1.0653	25.58	15.86	41.44	67.05	-25.61	QP	
3		2.1783	20.91	15.46	36.37	69.54	-33.17	QP	

APPENDIX C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode:	TX 2402MHz _CH00_1Mbps

Vertical

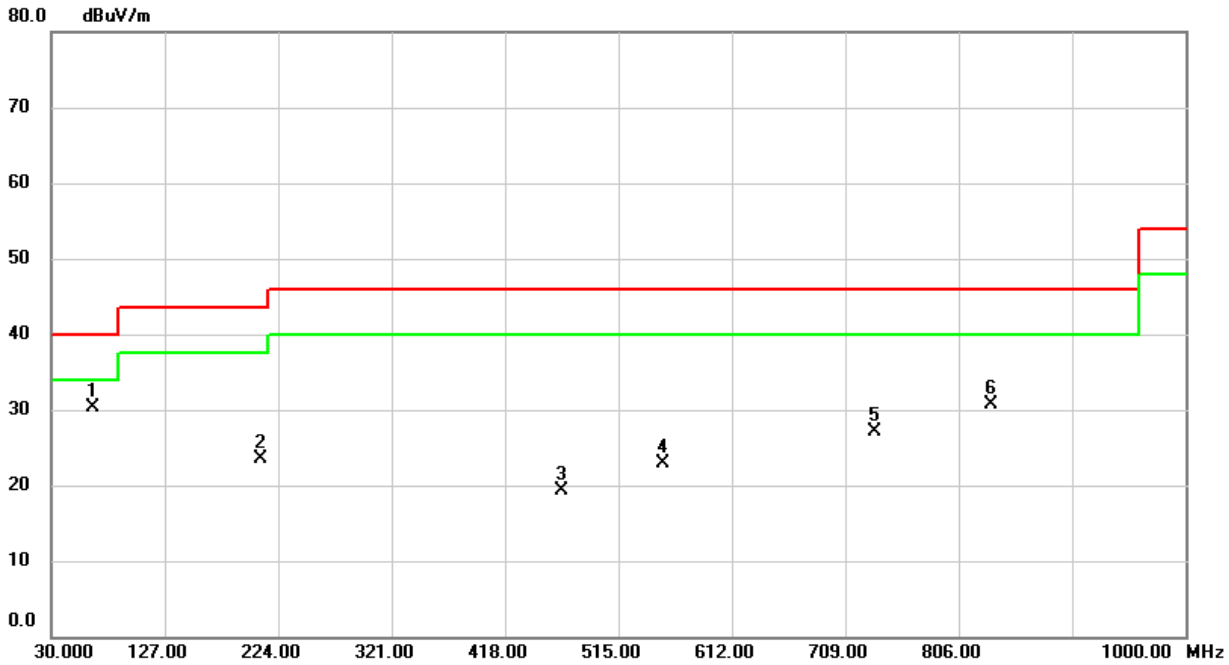

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	64.9200	45.42	-15.15	30.27	40.00	-9.73	Peak	
2	209.4500	37.45	-13.96	23.49	43.50	-20.01	Peak	
3	466.5000	28.94	-9.54	19.40	46.00	-26.60	Peak	
4	552.8300	30.49	-7.64	22.85	46.00	-23.15	Peak	
5	734.2199	30.01	-2.92	27.09	46.00	-18.91	Peak	
6	833.1599	31.08	-0.46	30.62	46.00	-15.38	Peak	

Test Mode:	TX 2402MHz _CH00_1Mbps

Horizontal

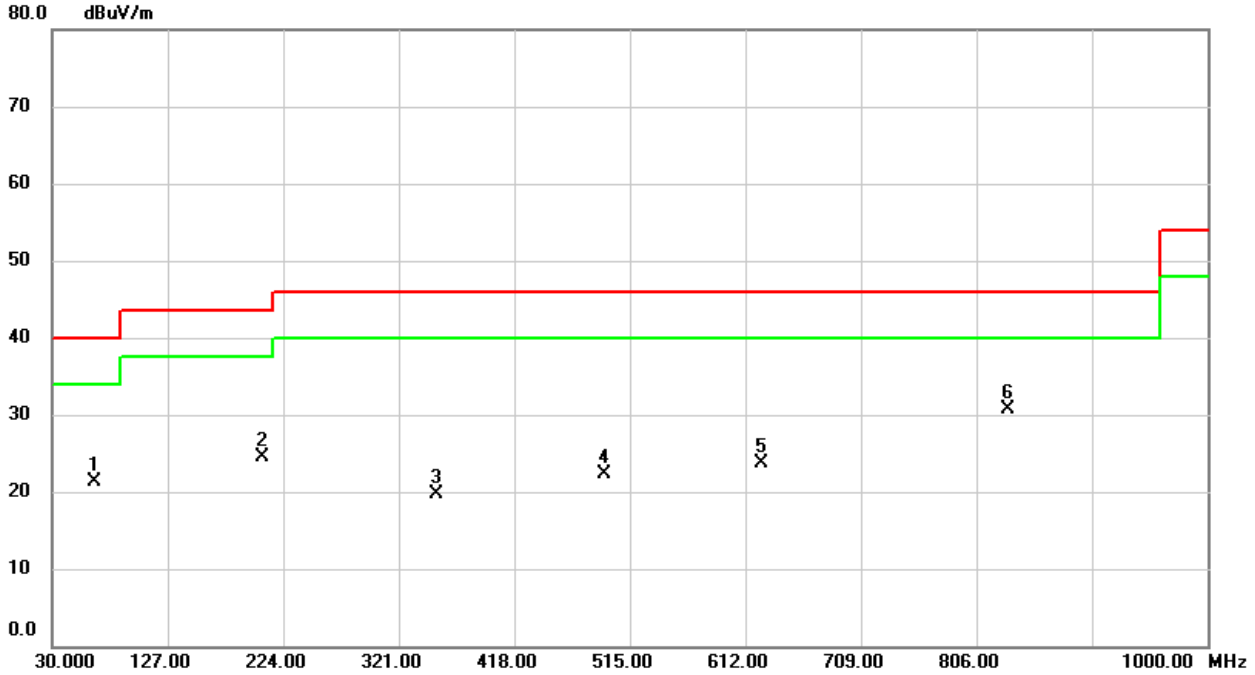

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	64.9200	36.39	-15.15	21.24	40.00	-18.76	Peak	
2	206.5399	38.47	-13.90	24.57	43.50	-18.93	Peak	
3	353.0100	31.71	-11.92	19.79	46.00	-26.21	Peak	
4	493.6600	31.09	-8.87	22.22	46.00	-23.78	Peak	
5	625.5800	29.65	-5.94	23.71	46.00	-22.29	Peak	
6 *	832.1900	31.14	-0.48	30.66	46.00	-15.34	Peak	

Test Mode:	TX 2441MHz _CH39_1Mbps

Vertical

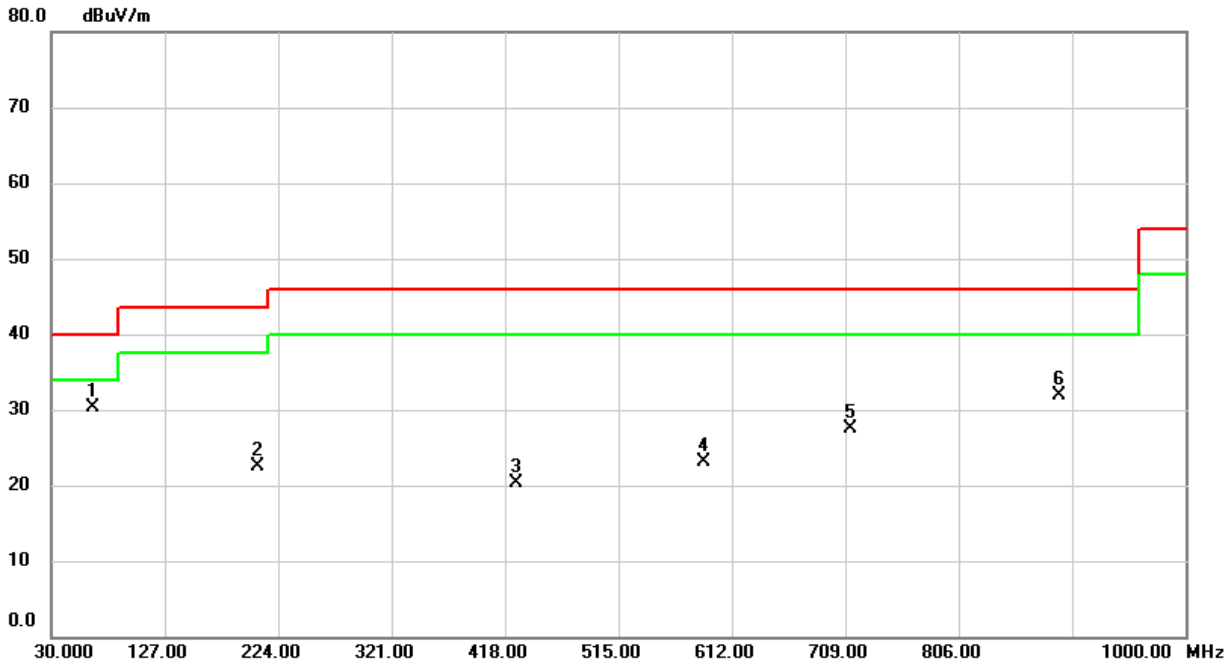

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	64.9200	45.42	-15.15	30.27	40.00	-9.73	Peak	
2	206.5399	36.40	-13.90	22.50	43.50	-21.00	Peak	
3	427.7000	30.93	-10.57	20.36	46.00	-25.64	Peak	
4	587.7500	29.78	-6.74	23.04	46.00	-22.96	Peak	
5	712.8800	31.02	-3.55	27.47	46.00	-18.53	Peak	
6	891.3600	31.02	0.85	31.87	46.00	-14.13	Peak	

Test Mode:	TX 2441MHz _CH39_1Mbps

Horizontal

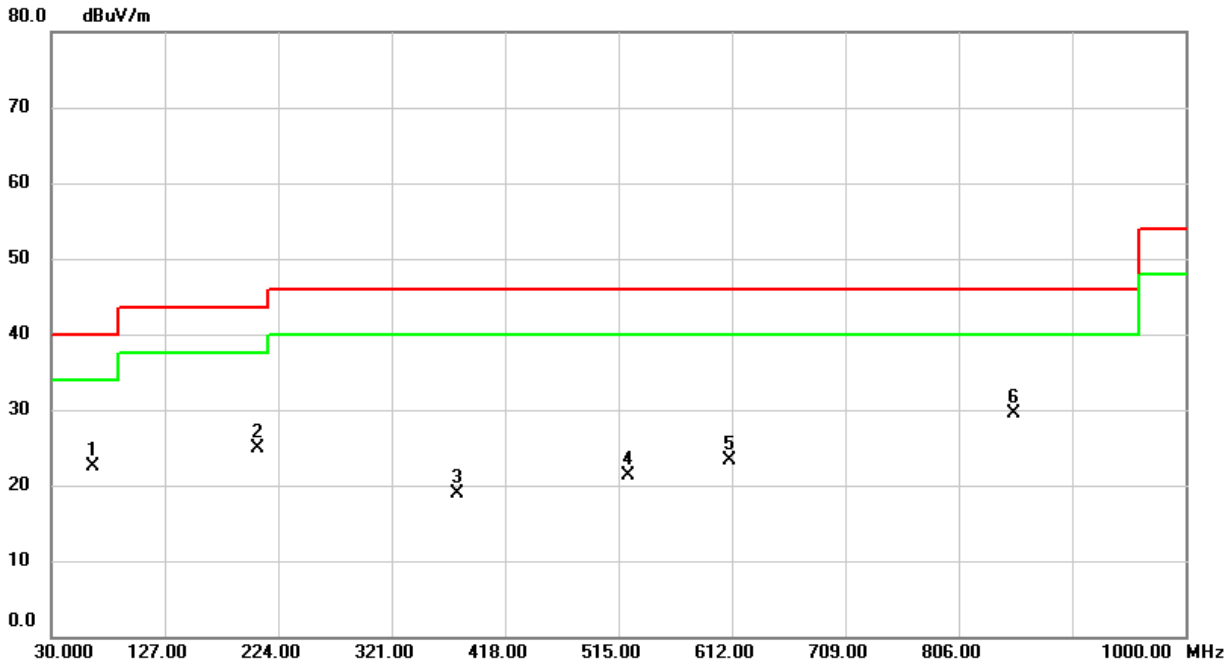

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	64.9200	37.63	-15.15	22.48	40.00	-17.52	Peak	
2	206.5399	38.88	-13.90	24.98	43.50	-18.52	Peak	
3	377.2600	30.58	-11.63	18.95	46.00	-27.05	Peak	
4	522.7600	29.58	-8.26	21.32	46.00	-24.68	Peak	
5	610.0600	29.61	-6.23	23.38	46.00	-22.62	Peak	
6 *	853.5300	29.43	0.07	29.50	46.00	-16.50	Peak	

Test Mode:	TX 2480MHz _CH78_1Mbps

Vertical

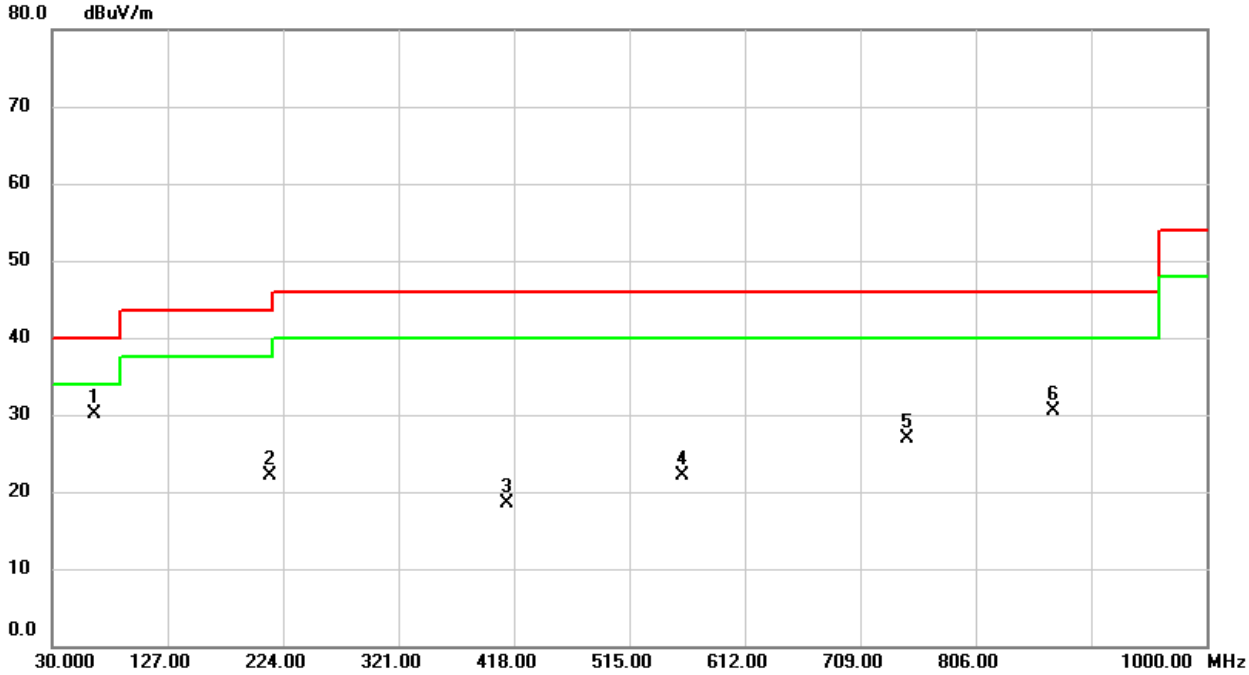

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	64.9200	45.28	-15.15	30.13	40.00	-9.87	Peak	
2	213.3300	35.97	-13.95	22.02	43.50	-21.48	Peak	
3	412.1800	29.42	-11.01	18.41	46.00	-27.59	Peak	
4	559.6200	29.52	-7.47	22.05	46.00	-23.95	Peak	
5	747.8000	29.35	-2.51	26.84	46.00	-19.16	Peak	
6	870.9900	30.07	0.43	30.50	46.00	-15.50	Peak	

Test Mode:	TX 2480MHz _CH78_1Mbps

Horizontal

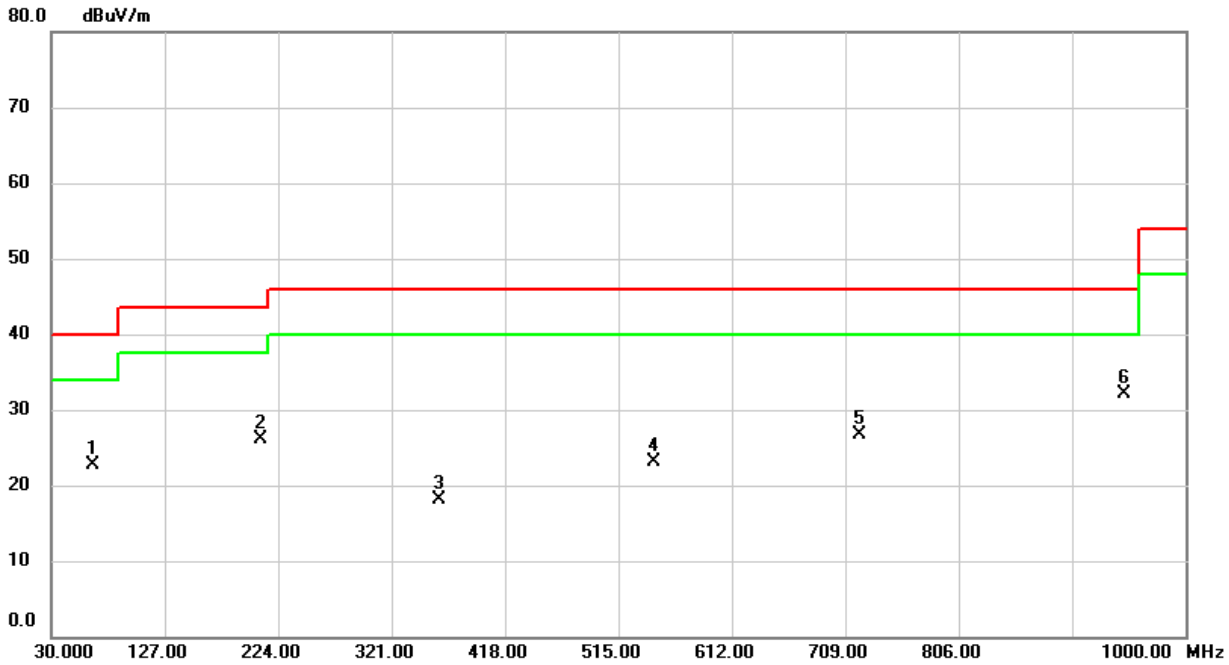

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	64.9200	37.85	-15.15	22.70	40.00	-17.30	Peak	
2	208.4800	40.05	-13.94	26.11	43.50	-17.39	Peak	
3	361.7400	29.96	-11.82	18.14	46.00	-27.86	Peak	
4	545.0700	30.97	-7.81	23.16	46.00	-22.84	Peak	
5	721.6100	30.06	-3.29	26.77	46.00	-19.23	Peak	
6 *	947.6200	30.07	1.95	32.02	46.00	-13.98	Peak	

APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)

Test Mode :	TX 2402MHz _CH00_1Mbps

Vertical

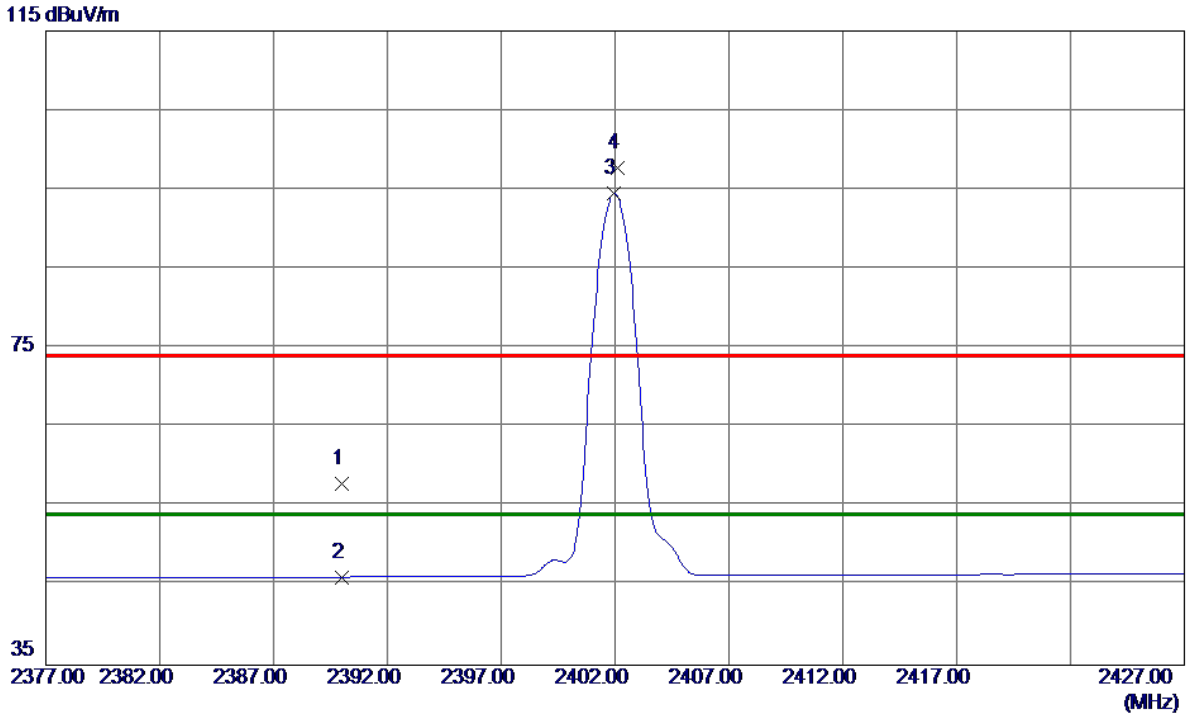

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	24.80	33.06	57.86	74.00	-16.14	Peak	
2	2390.0000	13.05	33.06	46.11	54.00	-7.89	AVG	
3 *	2401.9500	61.35	33.10	94.45	54.00	40.45	AVG	No Limit
4	2402.1000	64.66	33.10	97.76	74.00	23.76	Peak	No Limit

Test Mode :	TX 2402MHz _CH00_1Mbps

Vertical

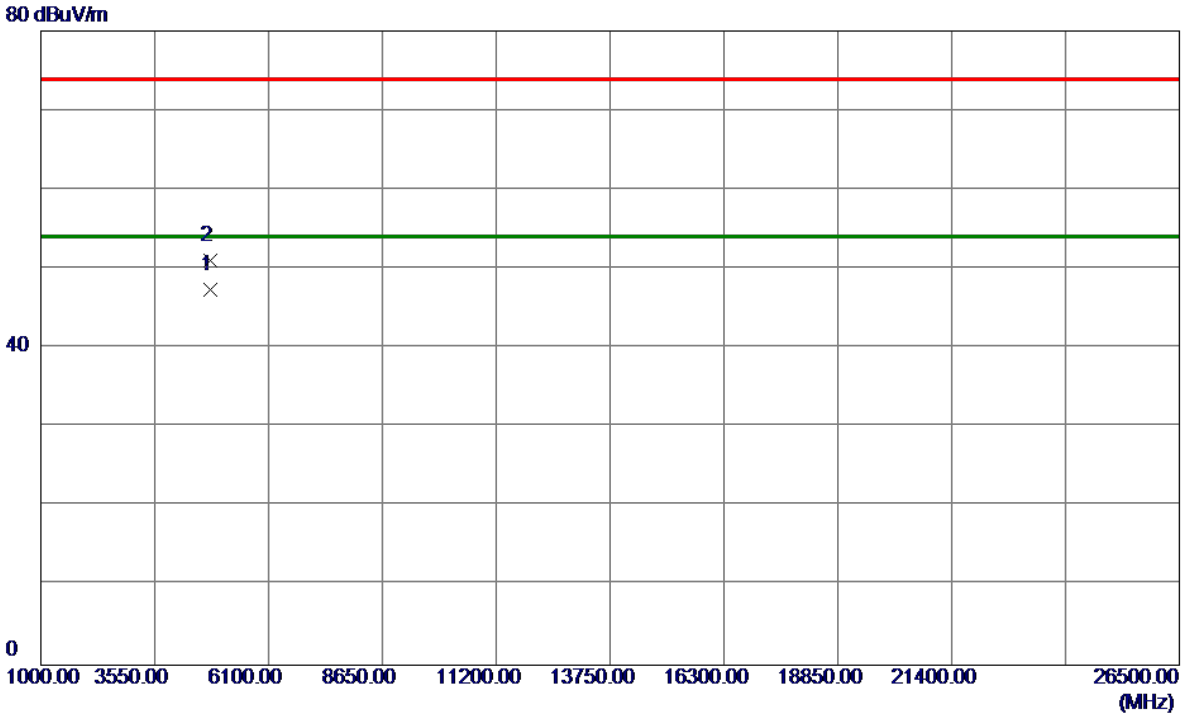

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4803.8500	40.79	6.59	47.38	54.00	-6.62	AVG	
2	4804.2500	44.42	6.59	51.01	74.00	-22.99	Peak	

Test Mode :	TX 2402MHz _CH00_1Mbps

Horizontal

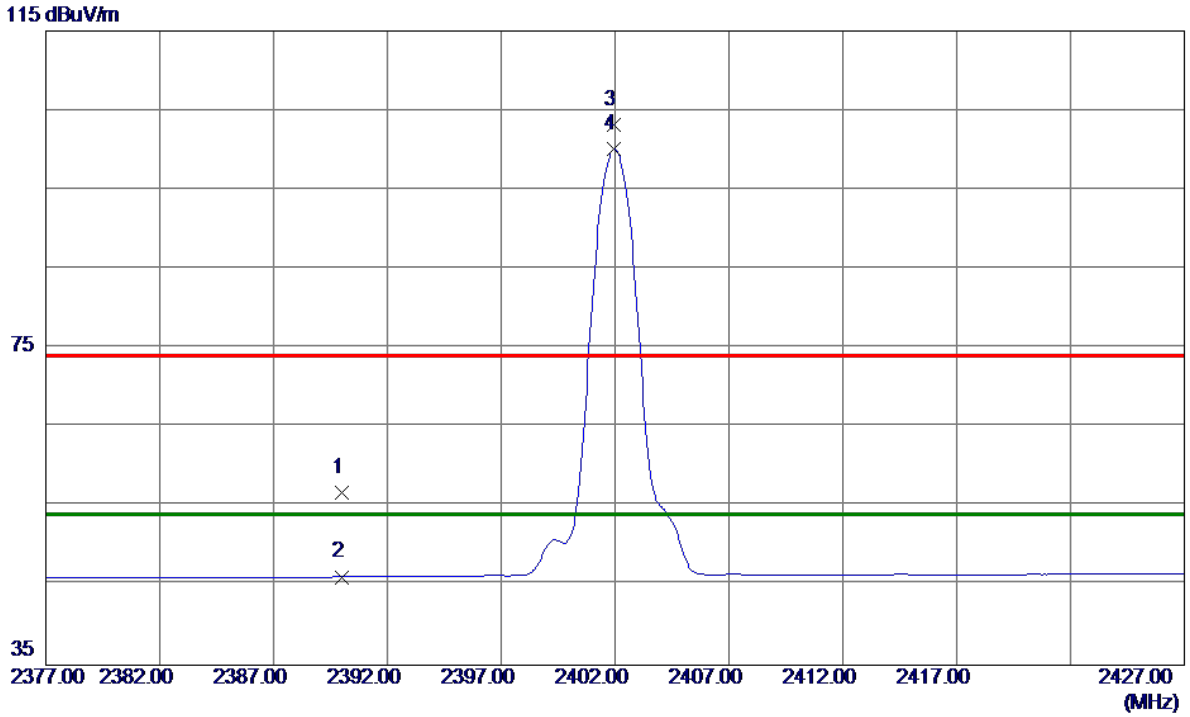

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	23.73	33.06	56.79	74.00	-17.21	Peak	
2	2390.0000	13.06	33.06	46.12	54.00	-7.88	AVG	
3	2401.9500	70.00	33.10	103.10	74.00	29.10	Peak	No Limit
4 *	2401.9500	66.97	33.10	100.07	54.00	46.07	AVG	No Limit

Test Mode :	TX 2402MHz _CH00_1Mbps

Horizontal

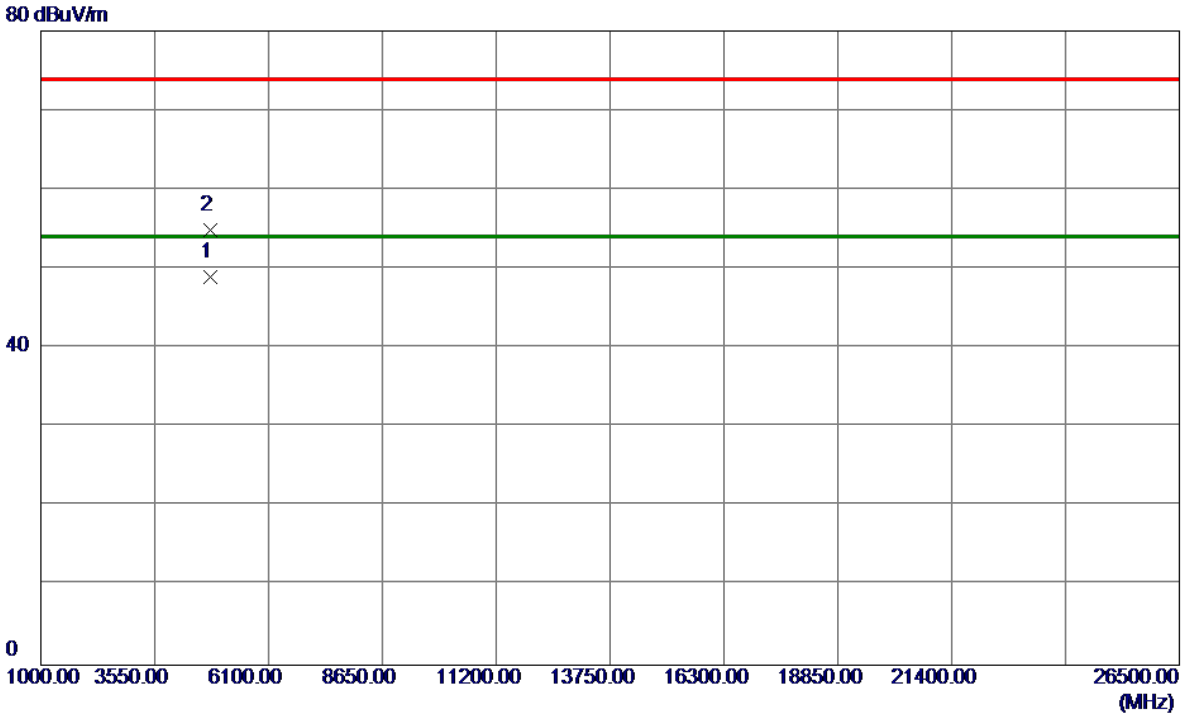

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4803.8750	42.41	6.59	49.00	54.00	-5.00	AVG	
2	4804.2150	48.34	6.59	54.93	74.00	-19.07	Peak	

Test Mode :	TX 2441MHz _CH39_1Mbps

Vertical

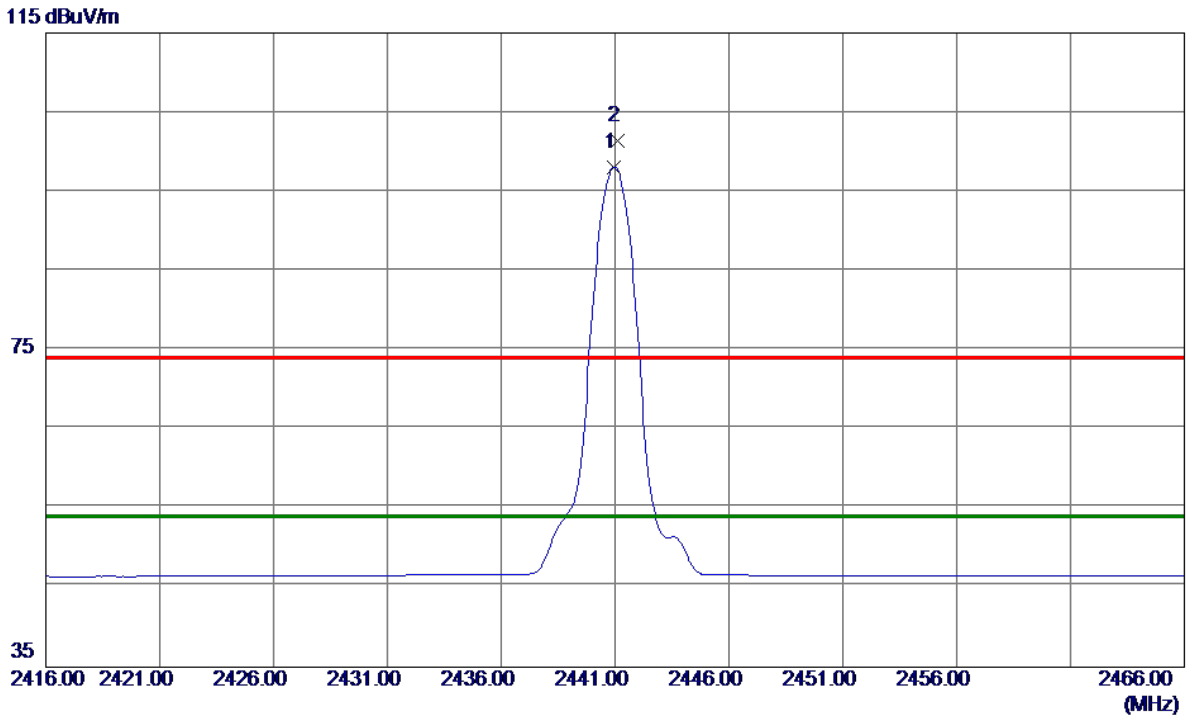

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2440.9500	64.86	33.25	98.11	54.00	44.11	AVG	No Limit
2	2441.1000	68.15	33.25	101.40	74.00	27.40	Peak	No Limit

Test Mode :	TX 2441MHz _CH39_1Mbps

Vertical

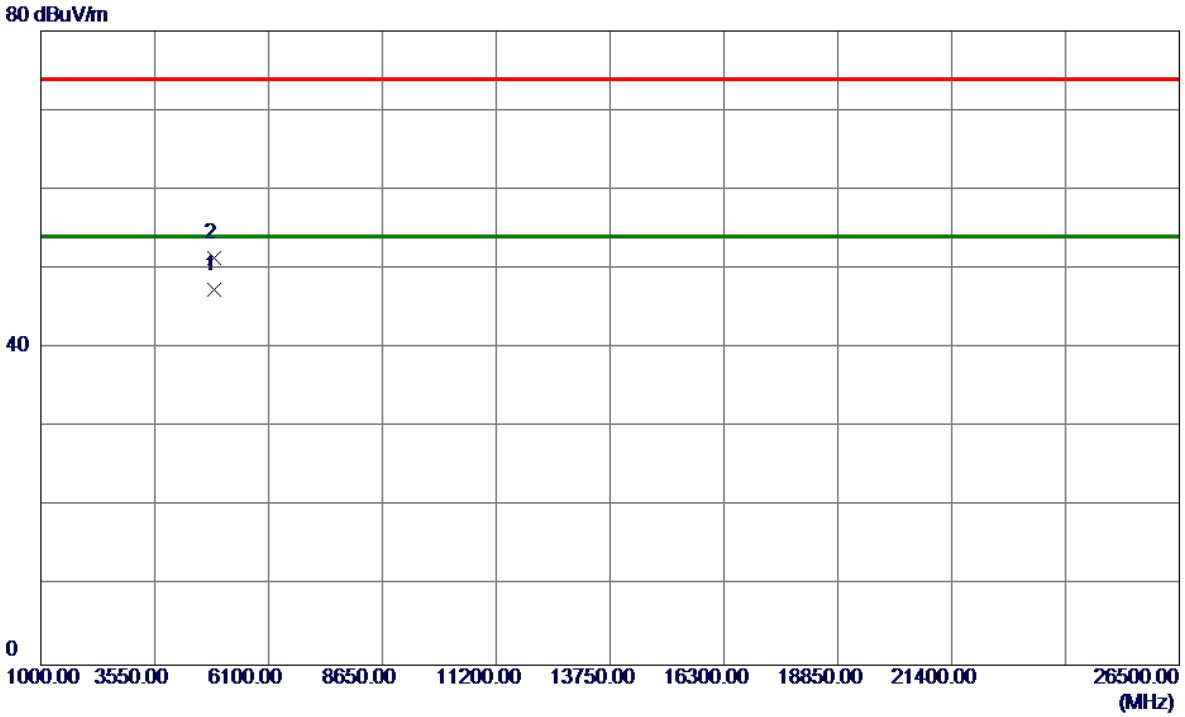

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4881.8700	40.50	6.87	47.37	54.00	-6.63	AVG	
2	4882.1800	44.53	6.87	51.40	74.00	-22.60	Peak	

Test Mode :	TX 2441MHz _CH39_1Mbps

Horizontal

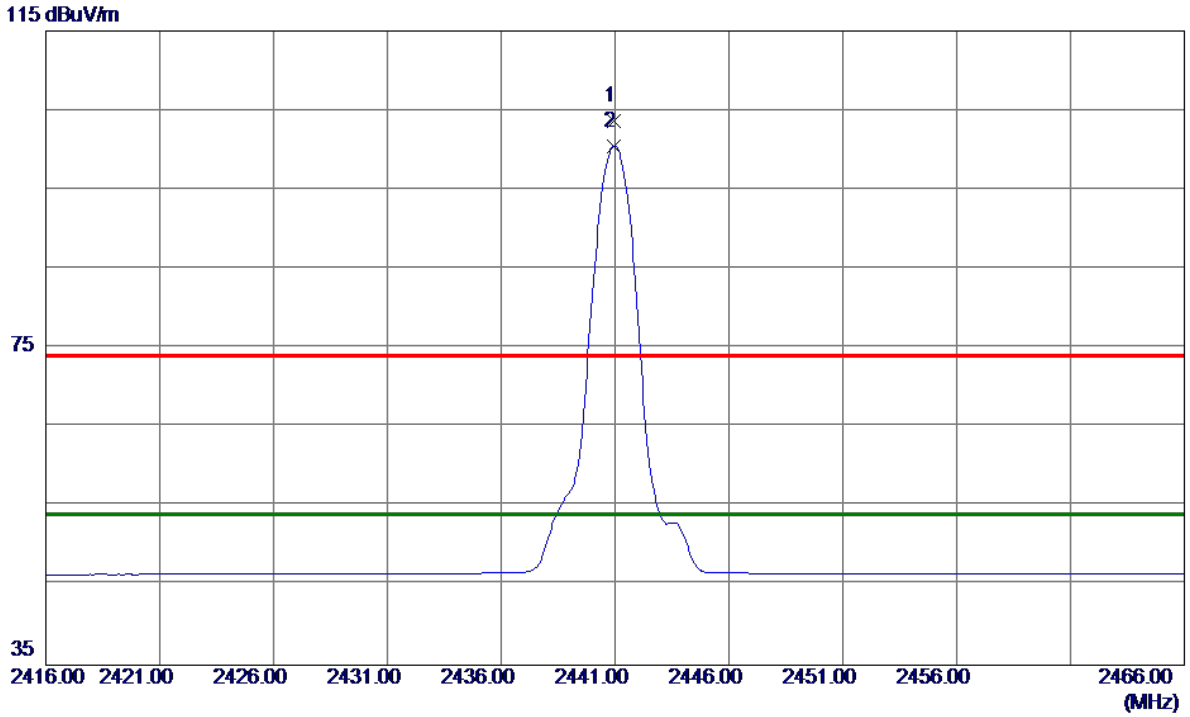

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2440.9500	70.38	33.25	103.63	74.00	29.63	Peak	No Limit
2 *	2440.9500	67.25	33.25	100.50	54.00	46.50	AVG	No Limit

Test Mode :	TX 2441MHz _CH39_1Mbps

Horizontal

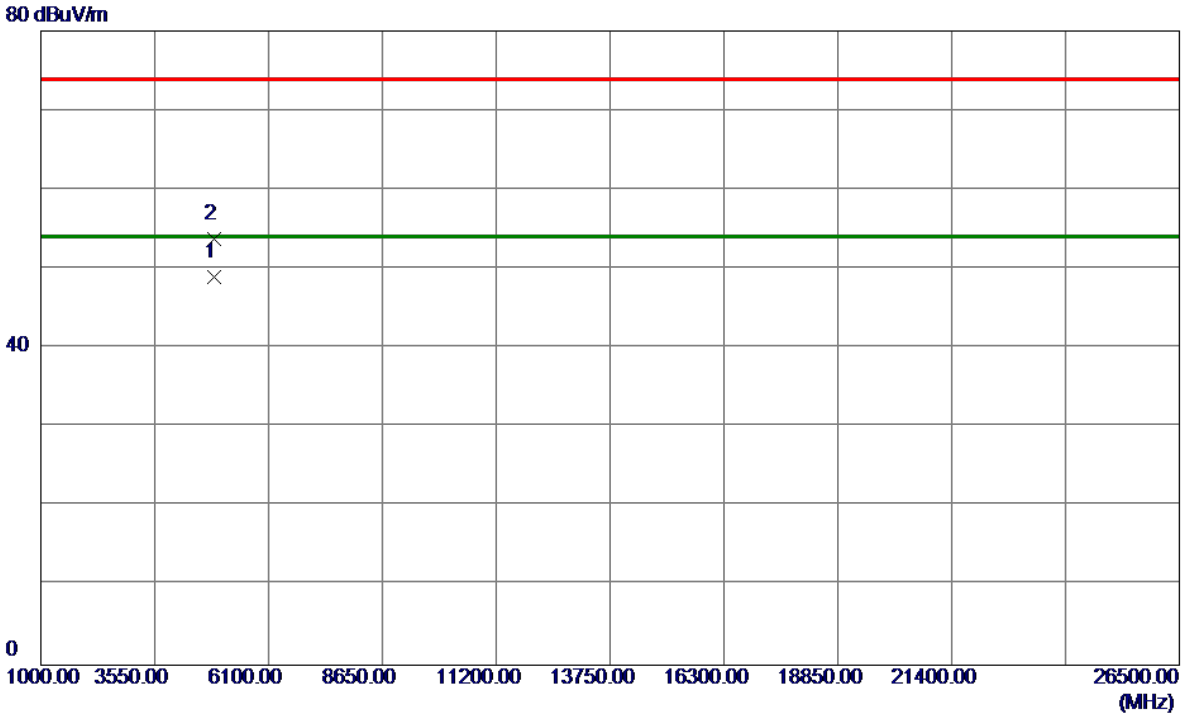

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4881.8700	42.01	6.87	48.88	54.00	-5.12	AVG	
2	4882.2700	46.94	6.87	53.81	74.00	-20.19	Peak	

Test Mode :	TX 2480MHz _CH78_1Mbps

Vertical

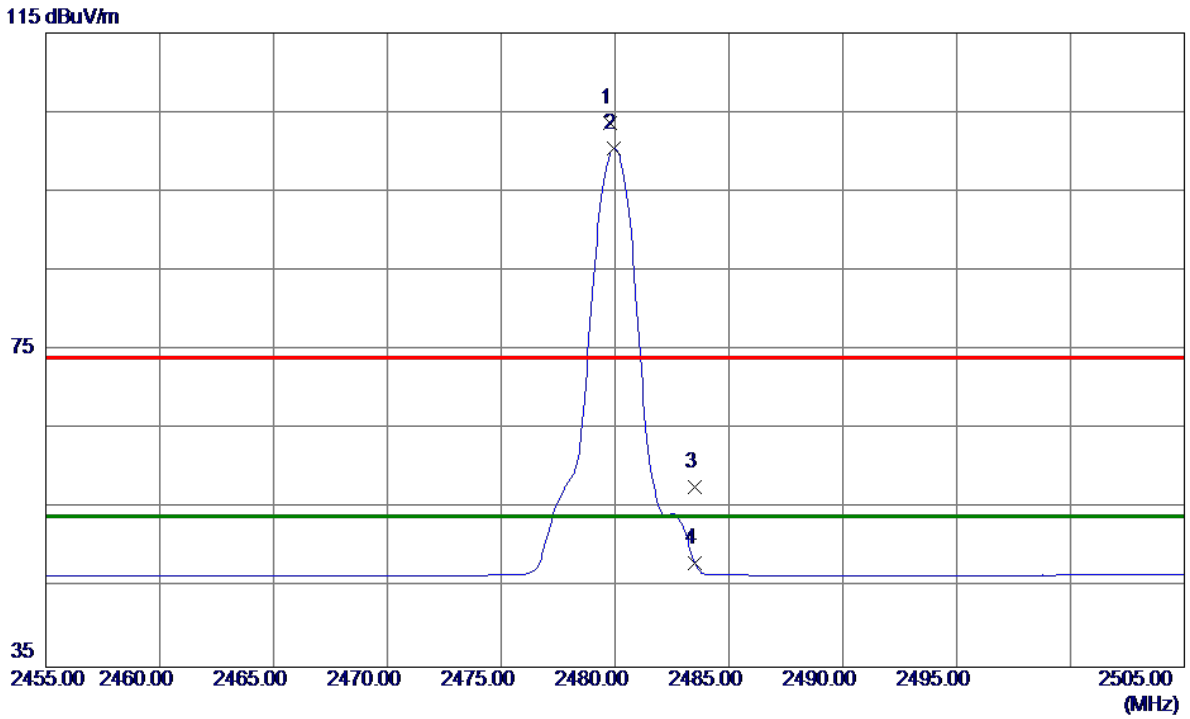

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2479.8000	70.26	33.39	103.65	74.00	29.65	Peak	No Limit
2 *	2479.9500	67.00	33.39	100.39	54.00	46.39	AVG	No Limit
3	2483.5000	24.29	33.41	57.70	74.00	-16.30	Peak	
4	2483.5000	14.73	33.41	48.14	54.00	-5.86	AVG	

Test Mode :	TX 2480MHz _CH78_1Mbps

Vertical

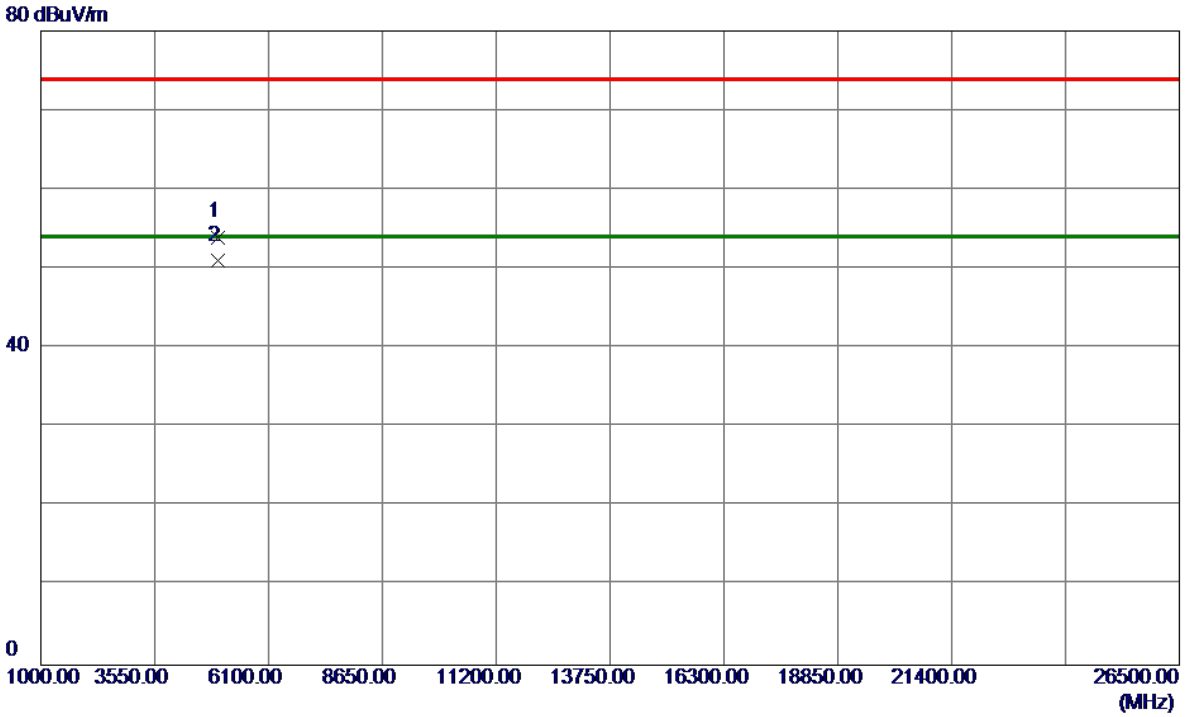

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4959.4500	46.86	7.14	54.00	74.00	-20.00	Peak	
2 *	4959.8500	43.94	7.15	51.09	54.00	-2.91	AVG	

Test Mode :	TX 2480MHz _CH78_1Mbps

Horizontal

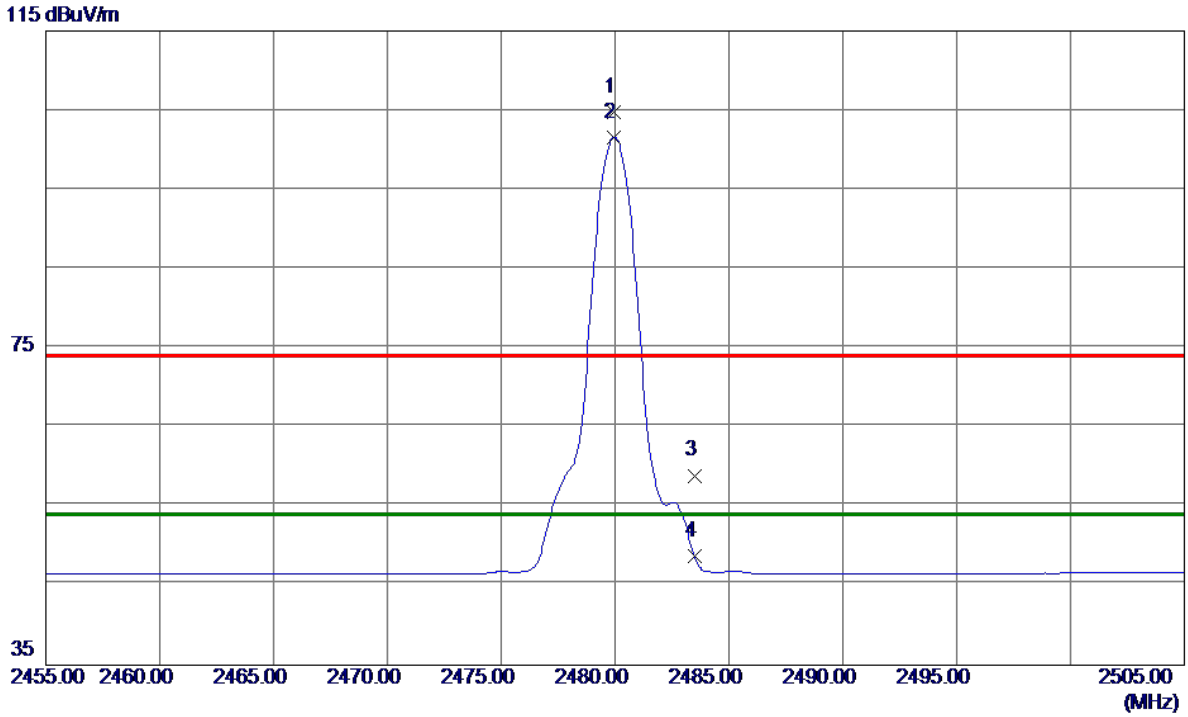

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2479.9500	71.29	33.39	104.68	74.00	30.68	Peak	No Limit
2 *	2479.9500	68.19	33.39	101.58	54.00	47.58	AVG	No Limit
3	2483.5000	25.51	33.41	58.92	74.00	-15.08	Peak	
4	2483.5000	15.32	33.41	48.73	54.00	-5.27	AVG	

Test Mode :	TX 2480MHz _CH78_1Mbps

Horizontal

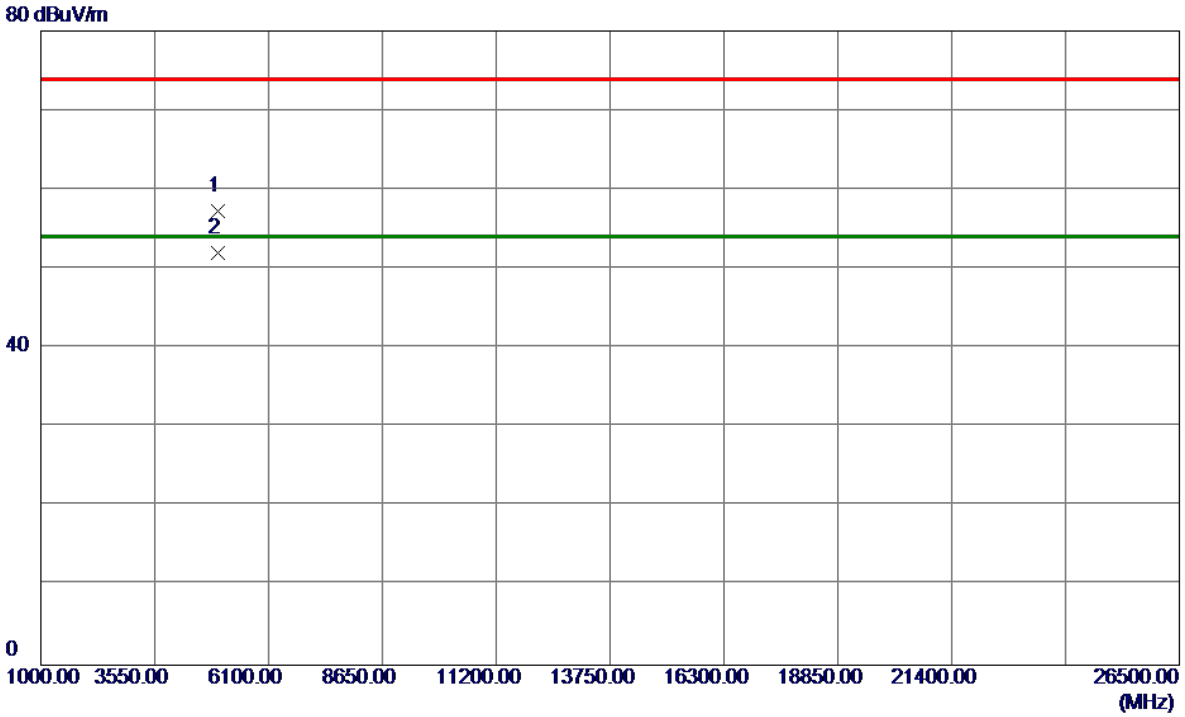

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4959.5850	50.16	7.14	57.30	74.00	-16.70	Peak	
2 *	4959.8650	44.81	7.15	51.96	54.00	-2.04	AVG	

Test Mode :	TX 2402MHz _CH00_3Mbps

Vertical

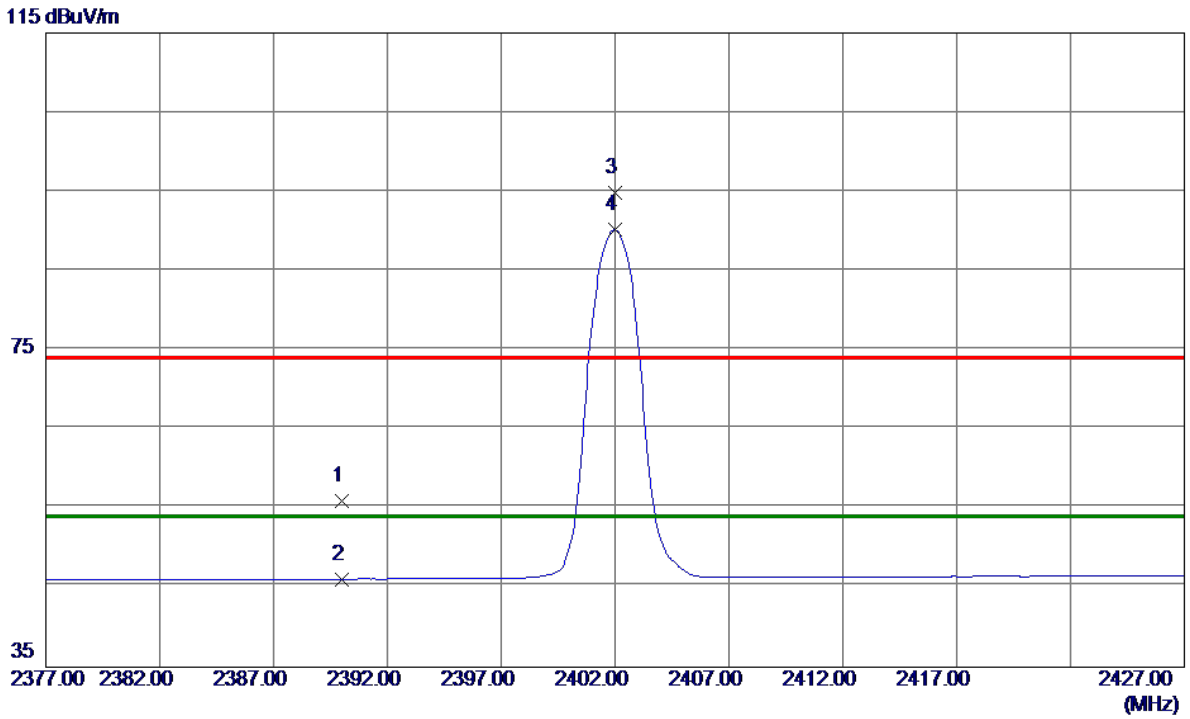

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	22.92	33.06	55.98	74.00	-18.02	Peak	
2	2390.0000	13.04	33.06	46.10	54.00	-7.90	AVG	
3	2402.0000	61.77	33.10	94.87	74.00	20.87	Peak	No Limit
4 *	2402.0000	57.03	33.10	90.13	54.00	36.13	AVG	No Limit

Test Mode :	TX 2402MHz _CH00_3Mbps

Vertical

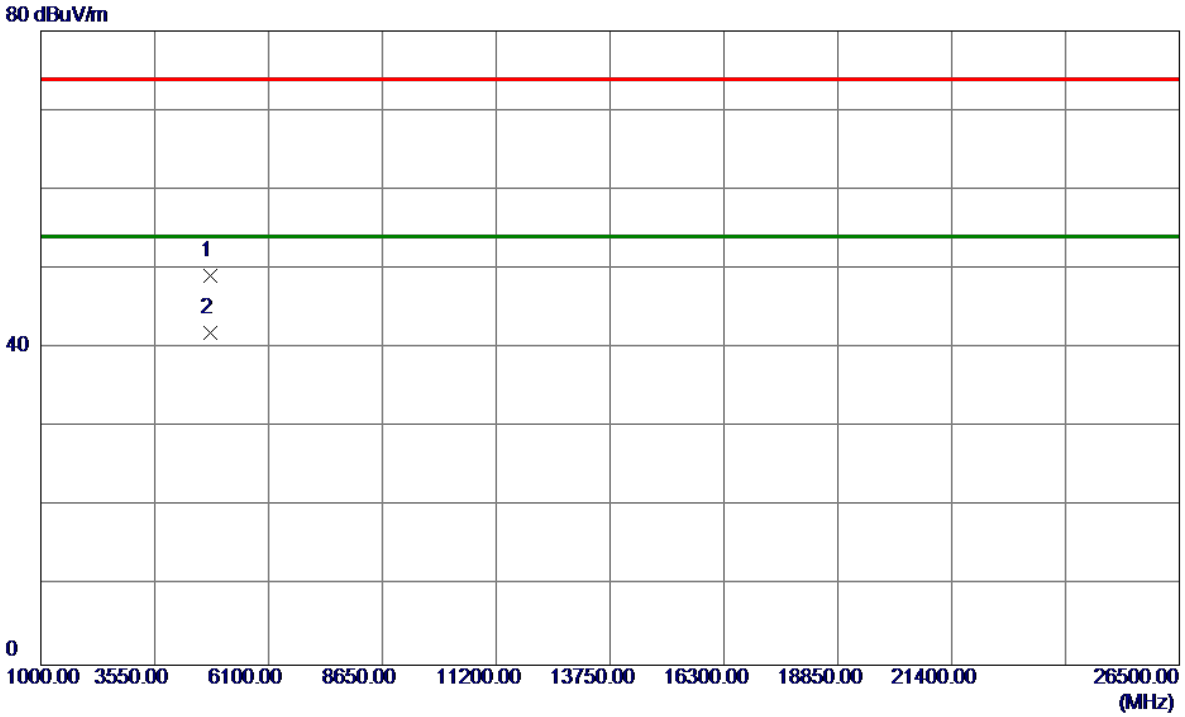

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4803.9150	42.55	6.59	49.14	74.00	-24.86	Peak	
2 *	4803.9950	35.35	6.59	41.94	54.00	-12.06	AVG	

Test Mode :	TX 2402MHz _CH00_3Mbps

Horizontal

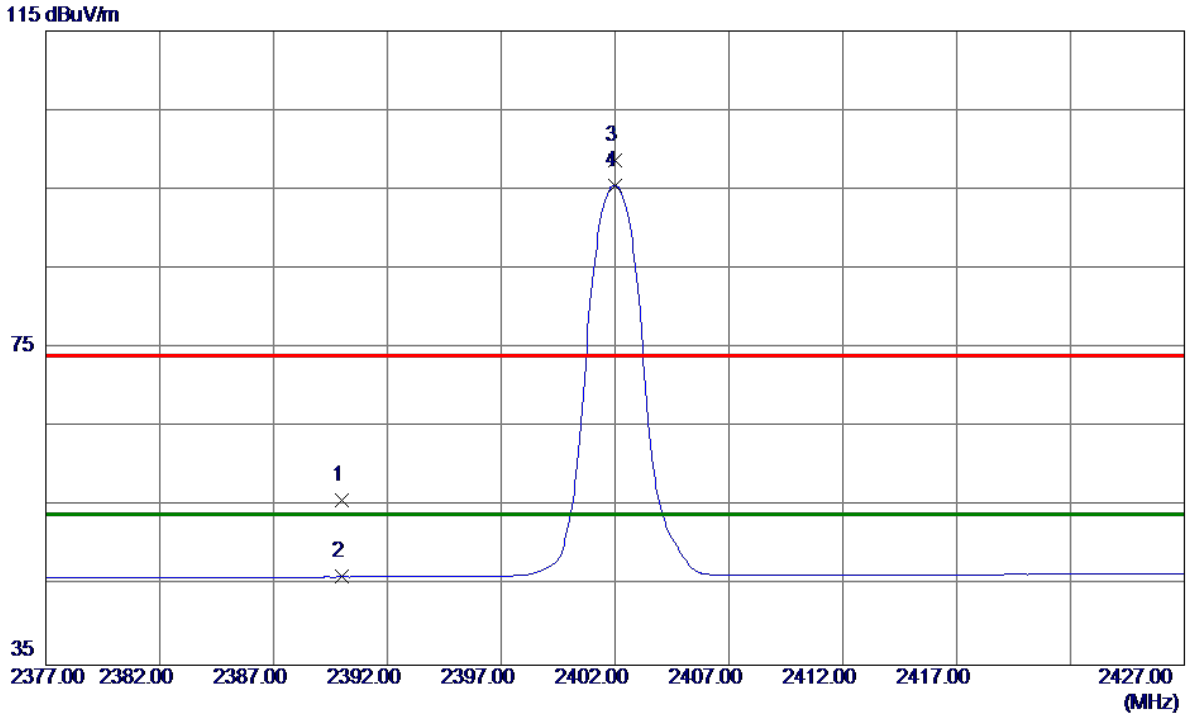

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.0000	22.75	33.06	55.81	74.00	-18.19	Peak	
2	2390.0000	13.08	33.06	46.14	54.00	-7.86	AVG	
3	2402.0000	65.52	33.10	98.62	74.00	24.62	Peak	No Limit
4 *	2402.0000	62.43	33.10	95.53	54.00	41.53	AVG	No Limit

Test Mode :	TX 2402MHz _CH00_3Mbps

Horizontal

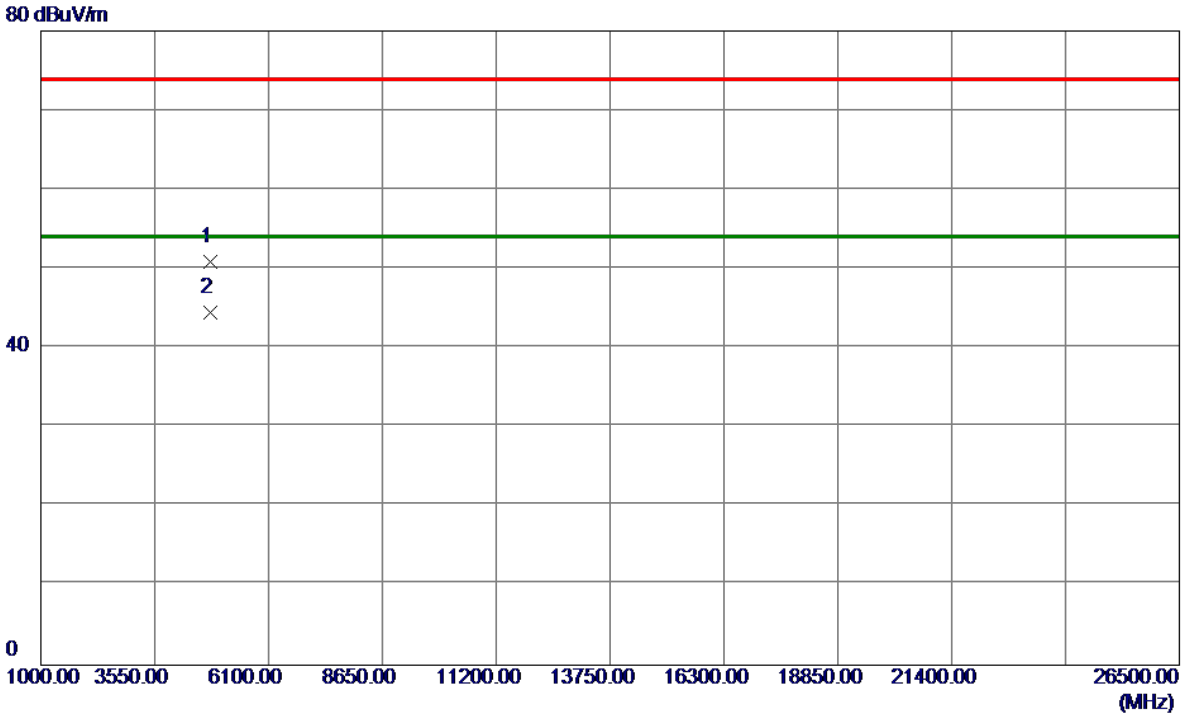

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4803.8000	44.31	6.59	50.90	74.00	-23.10	Peak	
2 *	4803.8900	37.85	6.59	44.44	54.00	-9.56	AVG	

Test Mode :	TX 2441MHz _CH39_3Mbps

Vertical

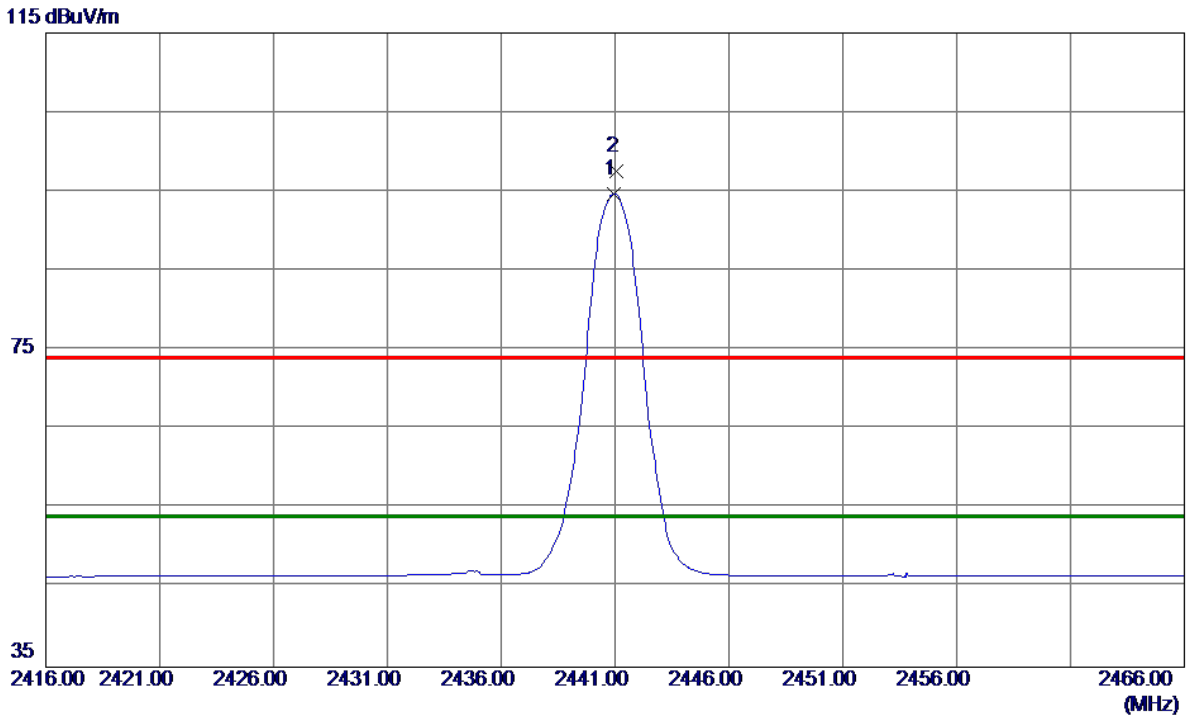

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2440.9500	61.44	33.25	94.69	54.00	40.69	AVG	No Limit
2	2441.0500	64.37	33.25	97.62	74.00	23.62	Peak	No Limit

Test Mode :	TX 2441MHz _CH39_3Mbps

Vertical

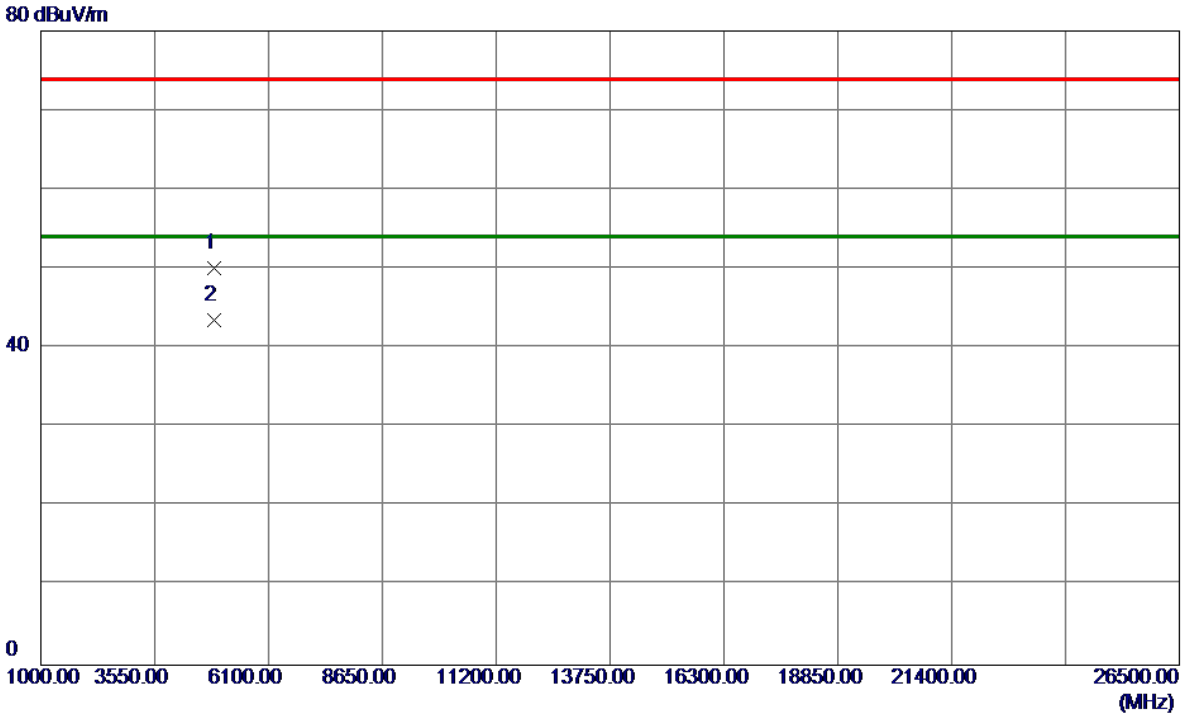

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4881.7799	43.24	6.87	50.11	74.00	-23.89	Peak	
2 *	4881.8350	36.69	6.87	43.56	54.00	-10.44	AVG	

Test Mode :	TX 2441MHz _CH39_3Mbps

Horizontal

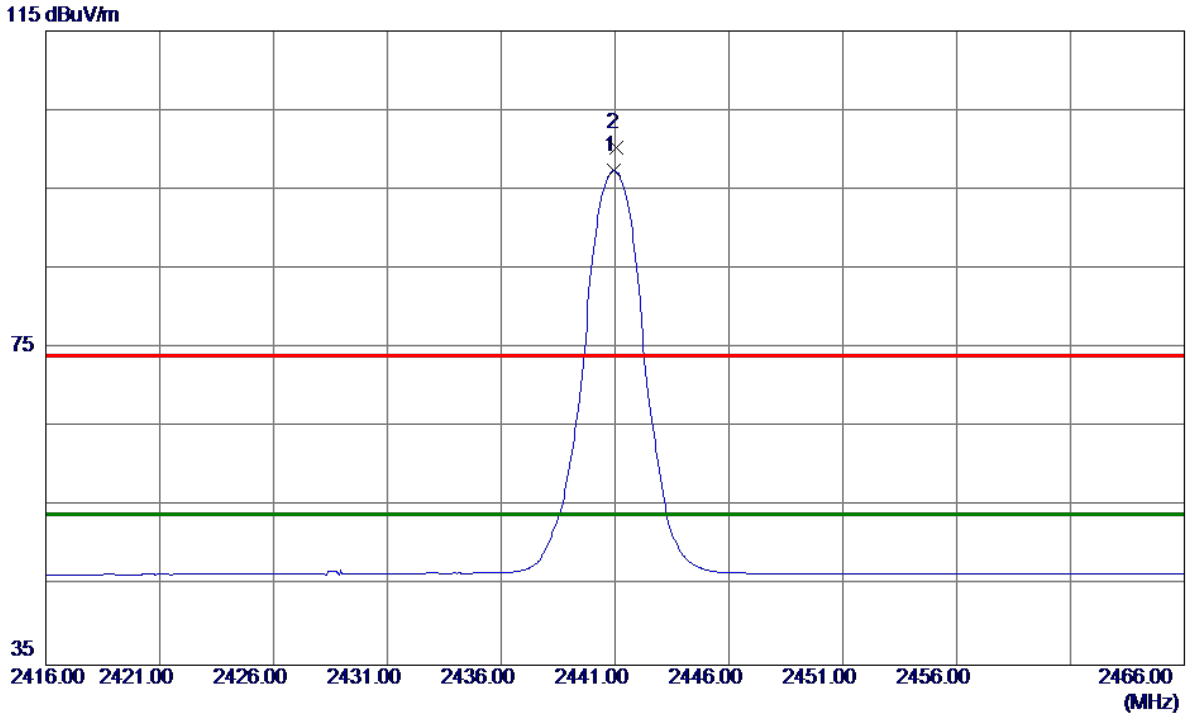

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2440.9500	64.10	33.25	97.35	54.00	43.35	AVG	No Limit
2	2441.0500	67.04	33.25	100.29	74.00	26.29	Peak	No Limit

Test Mode :	TX 2441MHz _CH39_3Mbps

Horizontal

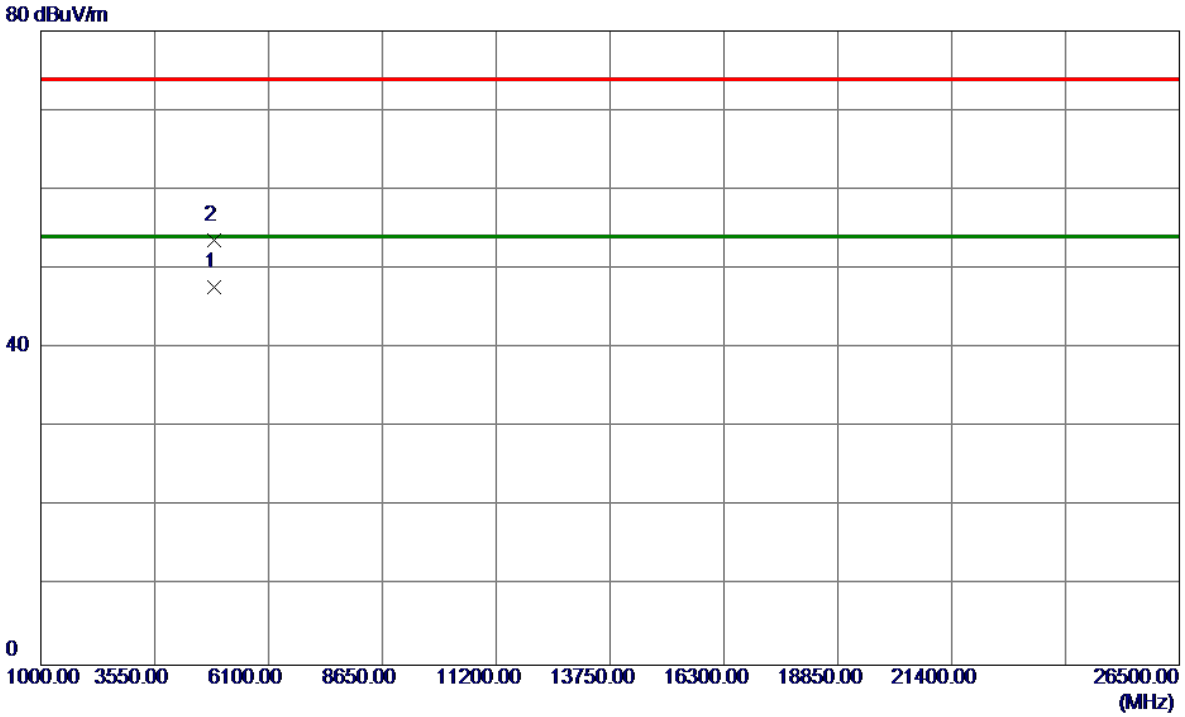

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4881.6800	40.78	6.87	47.65	54.00	-6.35	AVG	
2	4881.8849	46.68	6.87	53.55	74.00	-20.45	Peak	

Test Mode :	TX 2480MHz _CH78_3Mbps

Vertical

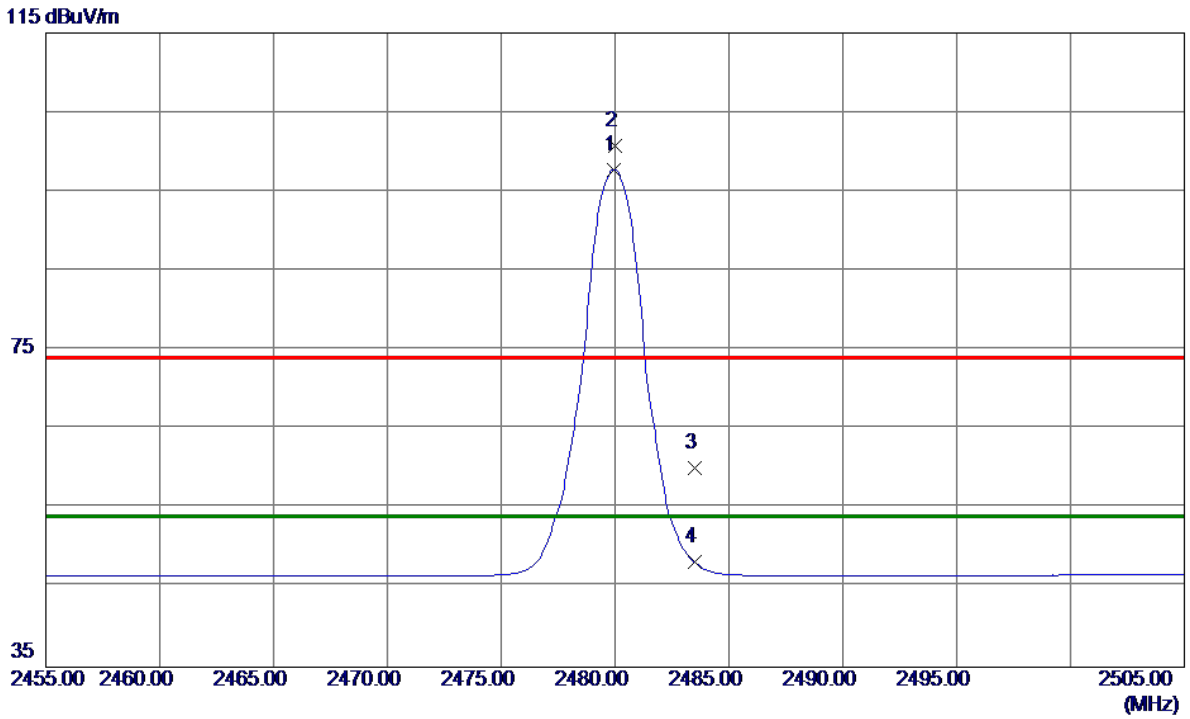

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2479.9500	64.34	33.39	97.73	74.00	23.73	Peak	No Limit
2 *	2480.0000	67.33	33.39	100.72	54.00	46.72	AVG	No Limit
3	2483.5000	26.67	33.41	60.08	74.00	-13.92	Peak	
4	2483.5000	14.80	33.41	48.21	54.00	-5.79	AVG	

Test Mode :	TX 2480MHz _CH78_3Mbps

Vertical

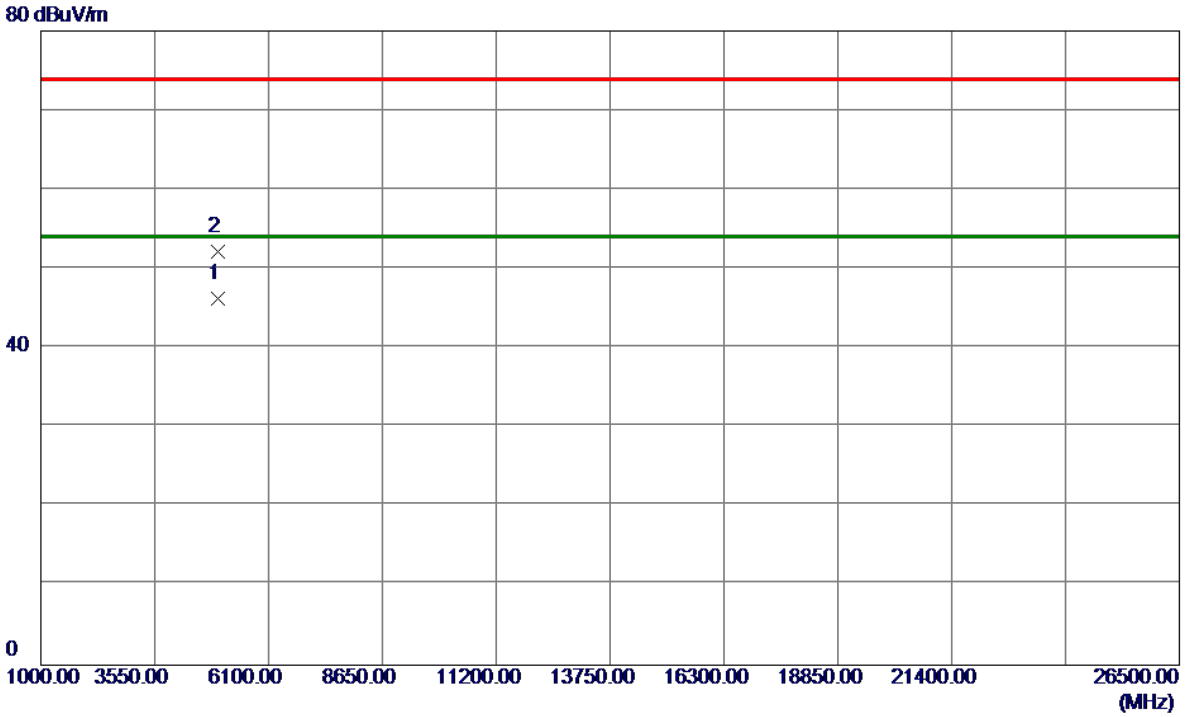

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4959.7799	39.12	7.15	46.27	54.00	-7.73	AVG	
2	4960.1700	44.99	7.15	52.14	74.00	-21.86	Peak	

Test Mode :	TX 2480MHz _CH78_3Mbps

Horizontal

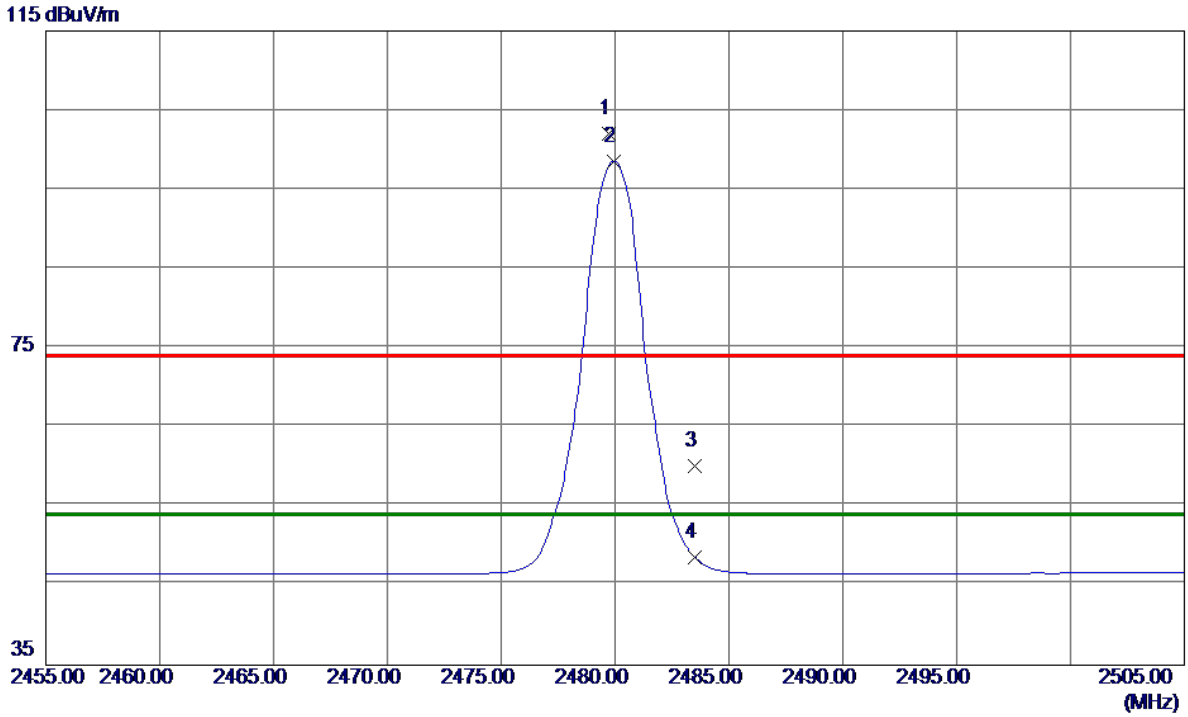

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2479.7000	68.61	33.39	102.00	74.00	28.00	Peak	No Limit
2 *	2479.9500	65.21	33.39	98.60	54.00	44.60	AVG	No Limit
3	2483.5000	26.67	33.41	60.08	74.00	-13.92	Peak	
4	2483.5000	15.23	33.41	48.64	54.00	-5.36	AVG	

Test Mode :	TX 2480MHz _CH78_3Mbps

Horizontal

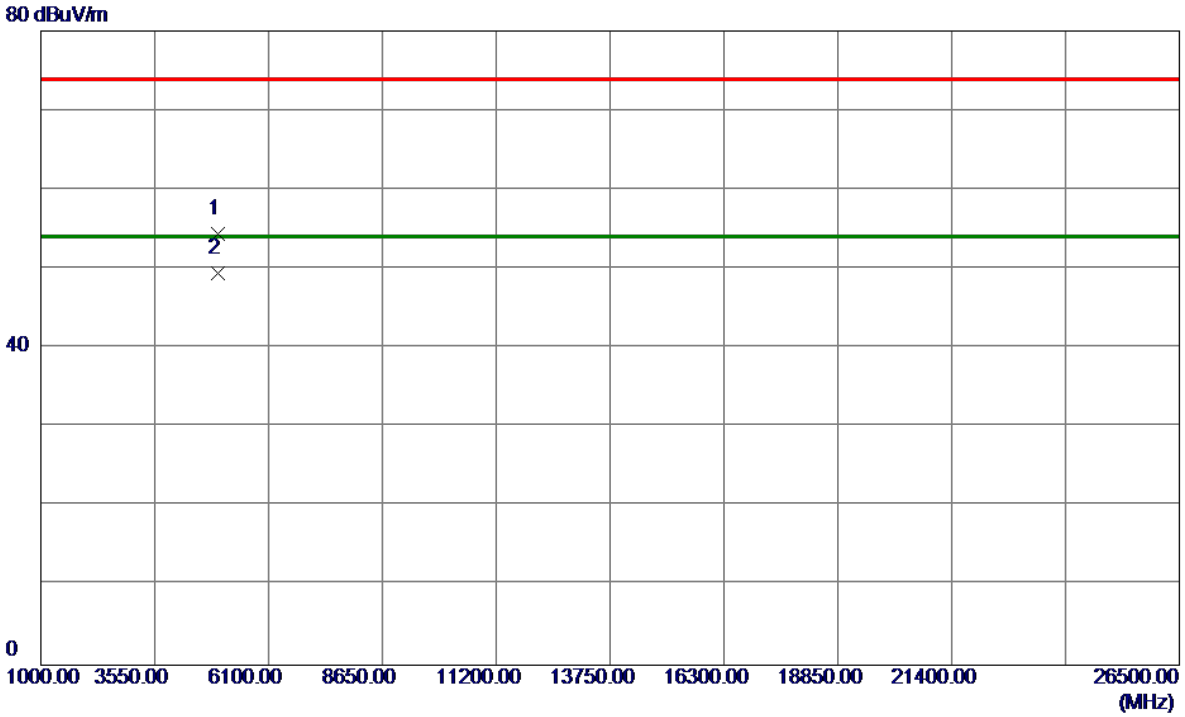

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4959.3950	47.34	7.14	54.48	74.00	-19.52	Peak	
2 *	4959.7300	42.31	7.15	49.46	54.00	-4.54	AVG	

APPENDIX E - NUMBER OF HOPPING CHANNEL

Test Mode	Hopping Mode_1Mbps
Number of Hopping Channel	79

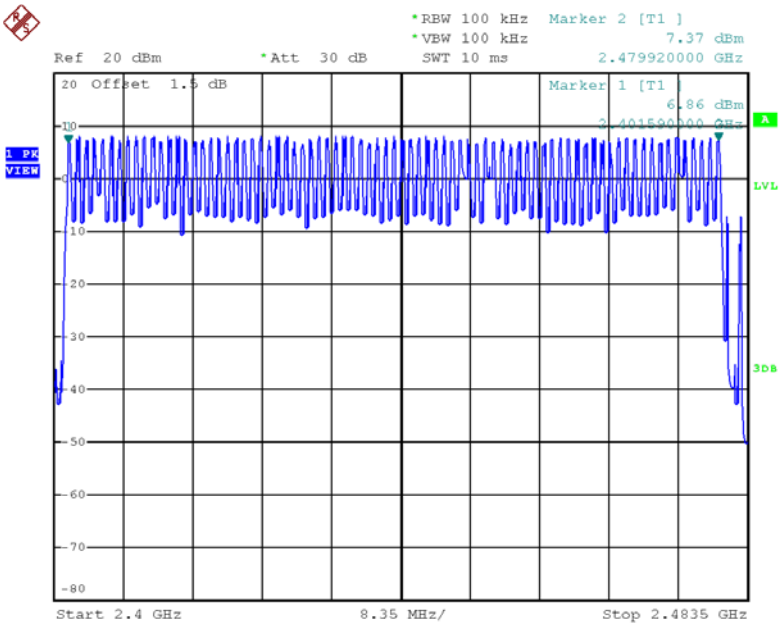

Date: 8.DEC.2017 16:07:58

Test Mode	Hopping Mode_3Mbps
Number of Hopping Channel	79

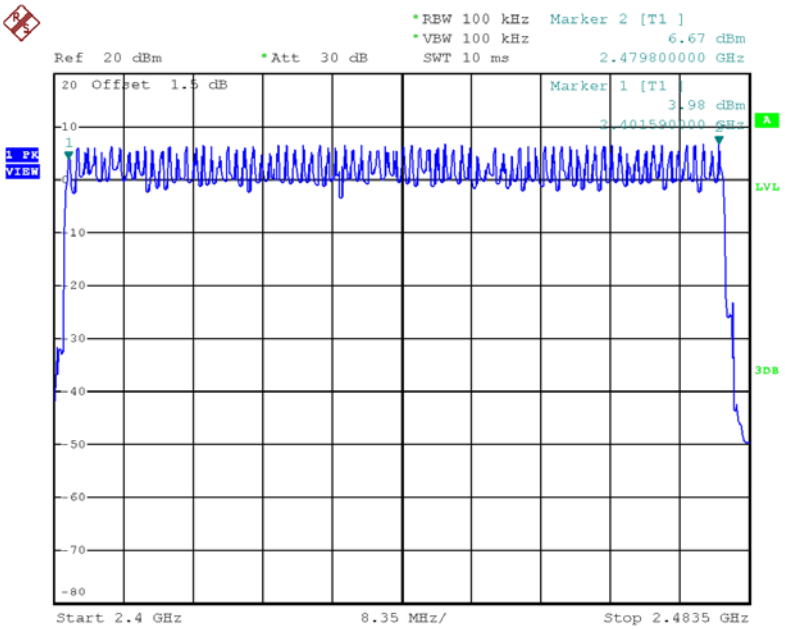

Date: 8.DEC.2017 16:31:43

APPENDIX F - AVERAGE TIME OF OCCUPANCY

Test Mode :	TX Mode_1Mbps

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402	2.9200	0.3115	0.4000	Pass
DH3	2402	1.6600	0.2656	0.4000	Pass
DH1	2402	0.3950	0.1264	0.4000	Pass
DH5	2441	2.9200	0.3115	0.4000	Pass
DH3	2441	1.6600	0.2656	0.4000	Pass
DH1	2441	0.4000	0.1280	0.4000	Pass
DH5	2480	2.9200	0.3115	0.4000	Pass
DH3	2480	1.6600	0.2656	0.4000	Pass
DH1	2480	0.4050	0.1296	0.4000	Pass

CH00-DH1

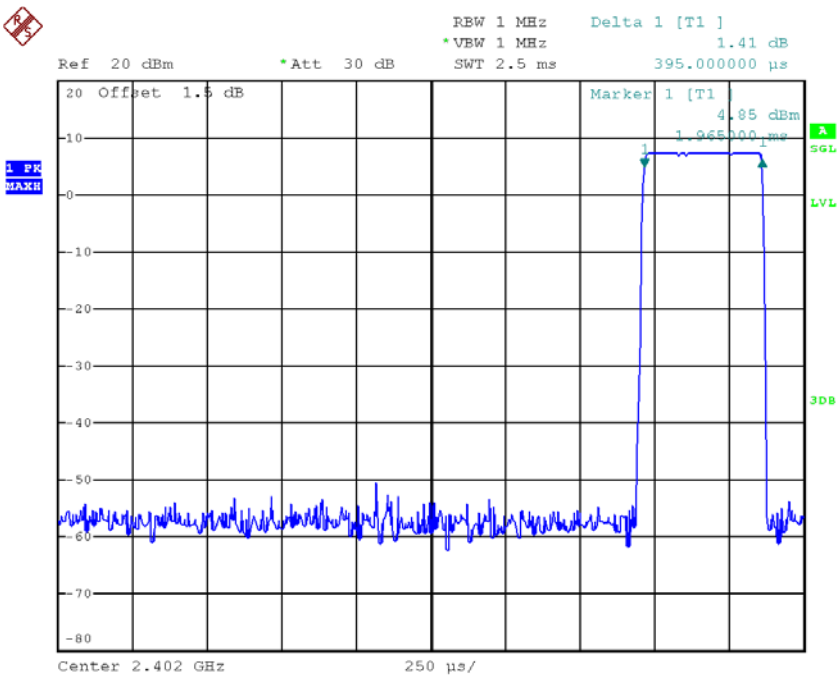

Date: 8.DEC.2017 16:01:12

CH00-DH3

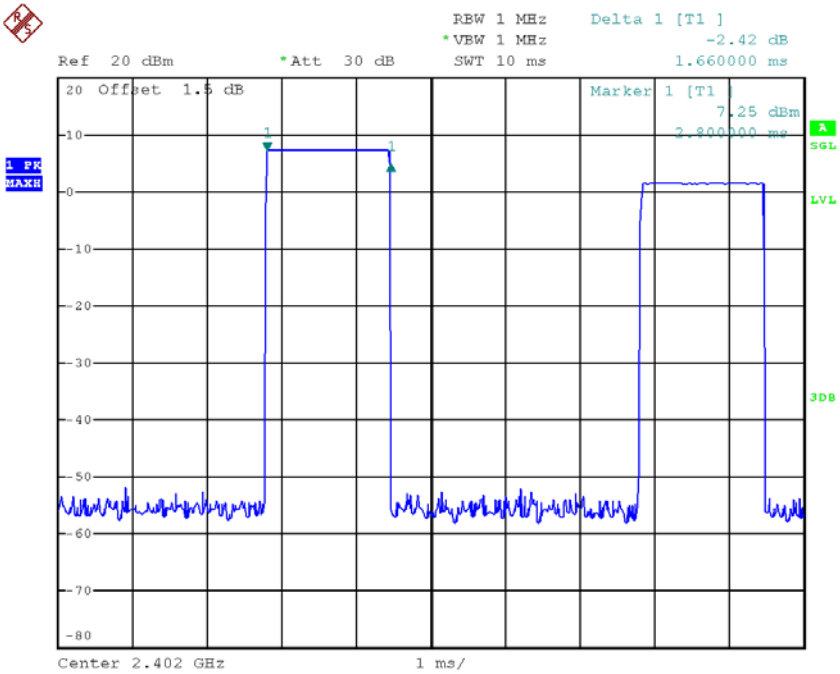

Date: 8.DEC.2017 16:10:50

CH00-DH5

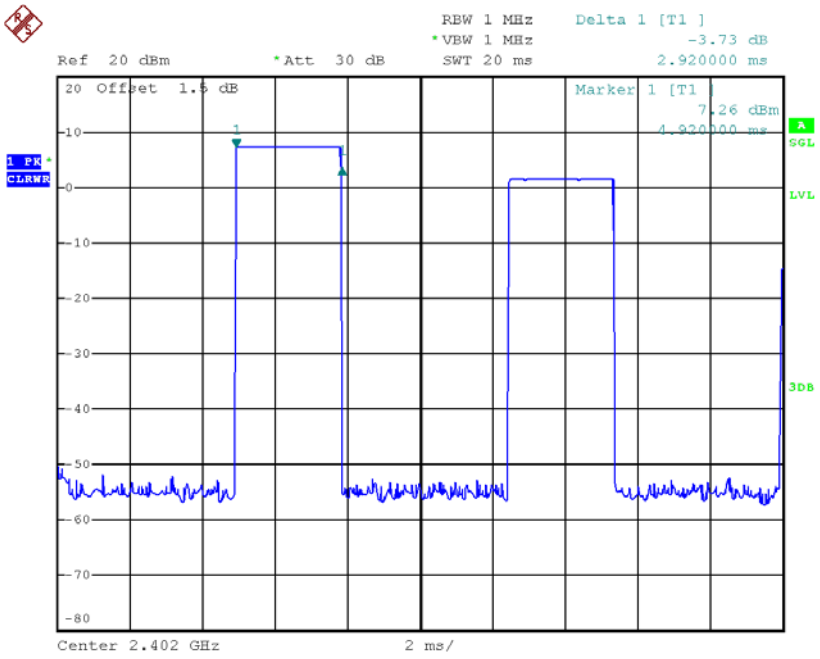

Date: 8.DEC.2017 16:13:52

CH39-DH1

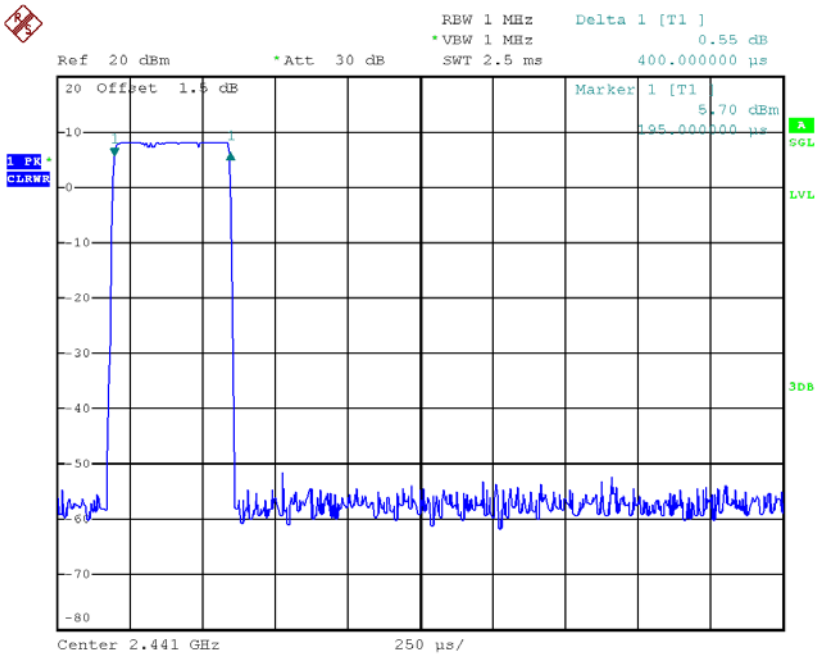

Date: 8.DEC.2017 16:02:29

CH39-DH3

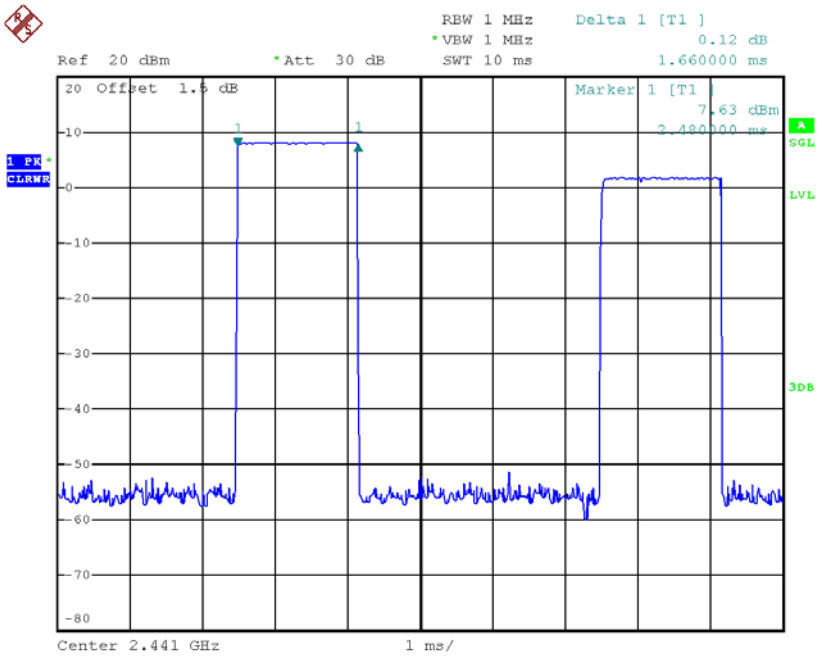

Date: 8.DEC.2017 16:10:56

CH39-DH5

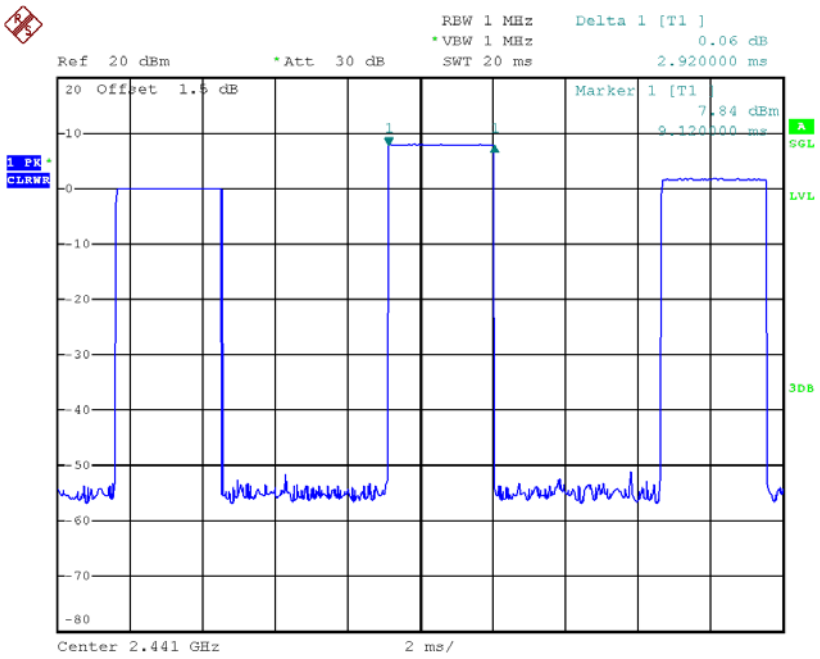

Date: 8.DEC.2017 16:14:53

CH78-DH1

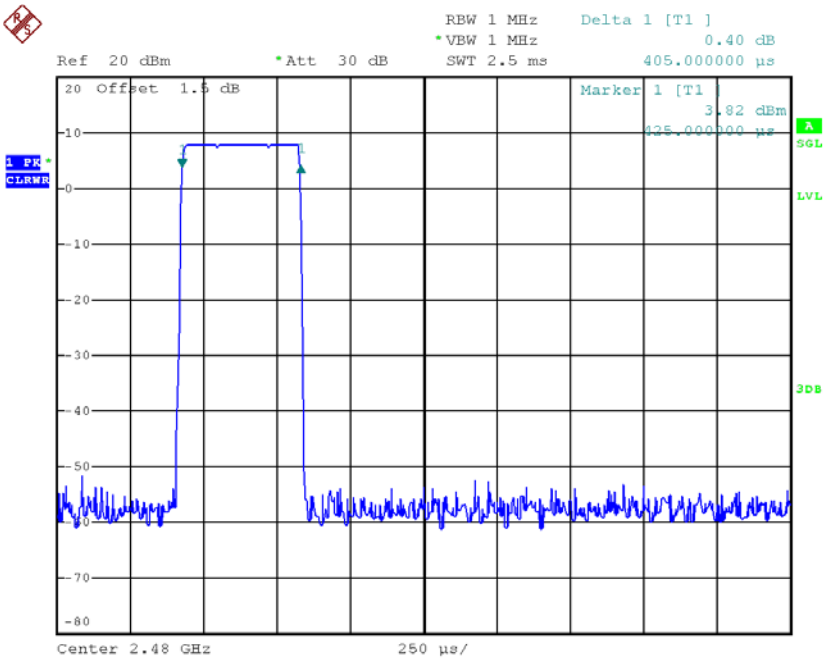

Date: 8.DEC.2017 16:02:50

CH78-DH3

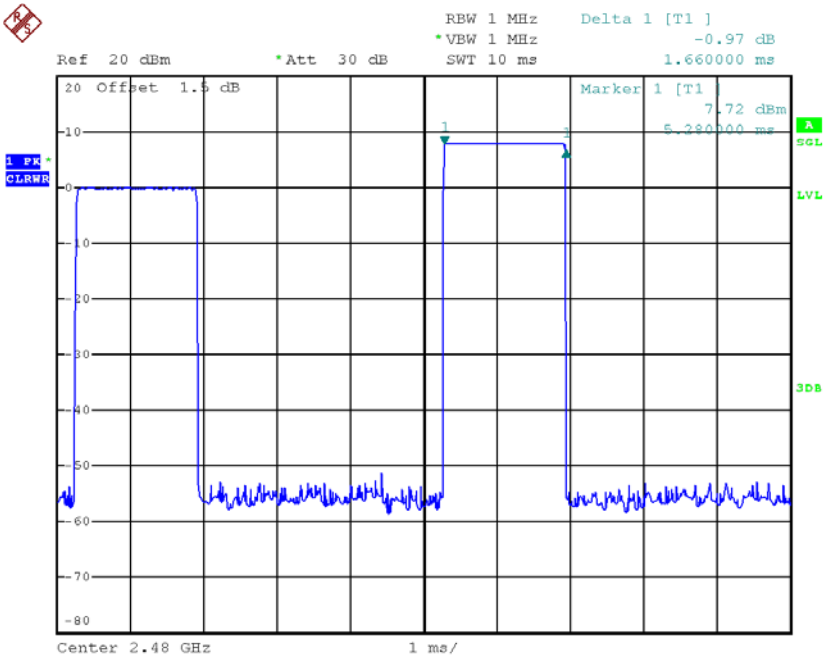

Date: 8.DEC.2017 16:11:05

CH78-DH5

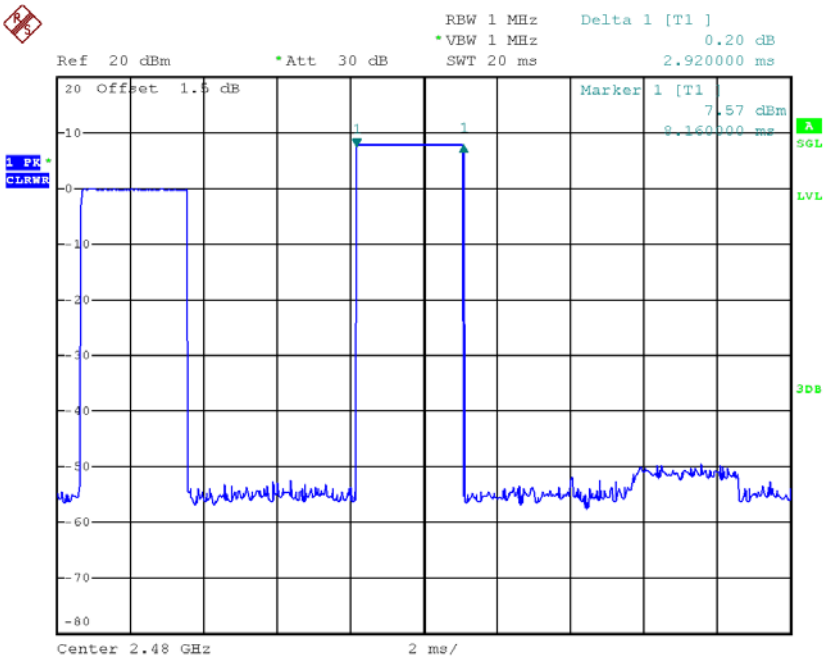

Date: 8.DEC.2017 16:14:41

Test Mode :	TX Mode_3Mbps

Data Packet	Frequency	Pulse Duration(ms)	Dwell Time(s)	Limits(s)	Test Result
DH5	2402	2.9200	0.3115	0.4000	Pass
DH3	2402	1.6600	0.2656	0.4000	Pass
DH1	2402	0.4150	0.1328	0.4000	Pass
DH5	2441	2.9200	0.3115	0.4000	Pass
DH3	2441	1.6600	0.2656	0.4000	Pass
DH1	2441	0.4150	0.1328	0.4000	Pass
DH5	2480	2.9200	0.3115	0.4000	Pass
DH3	2480	1.6600	0.2656	0.4000	Pass
DH1	2480	0.4150	0.1328	0.4000	Pass

CH00-DH1

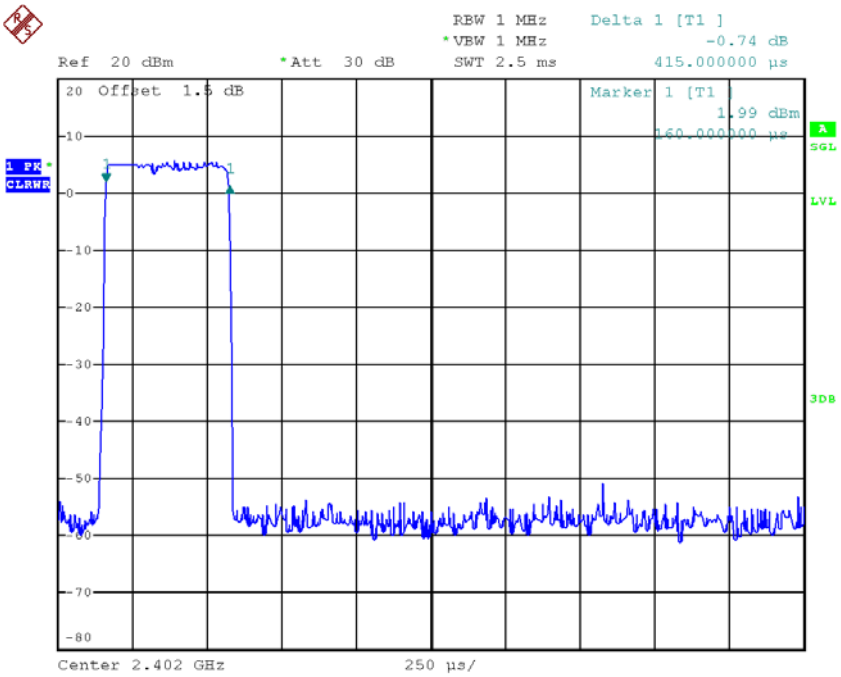

Date: 8.DEC.2017 16:25:08

CH00-DH3

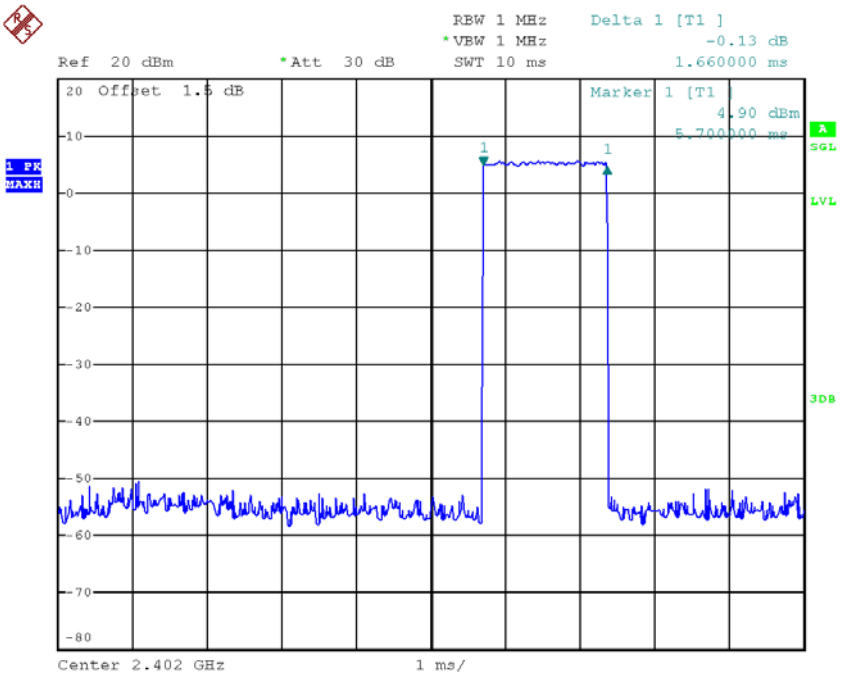

Date: 8.DEC.2017 16:33:28

CH00-DH5

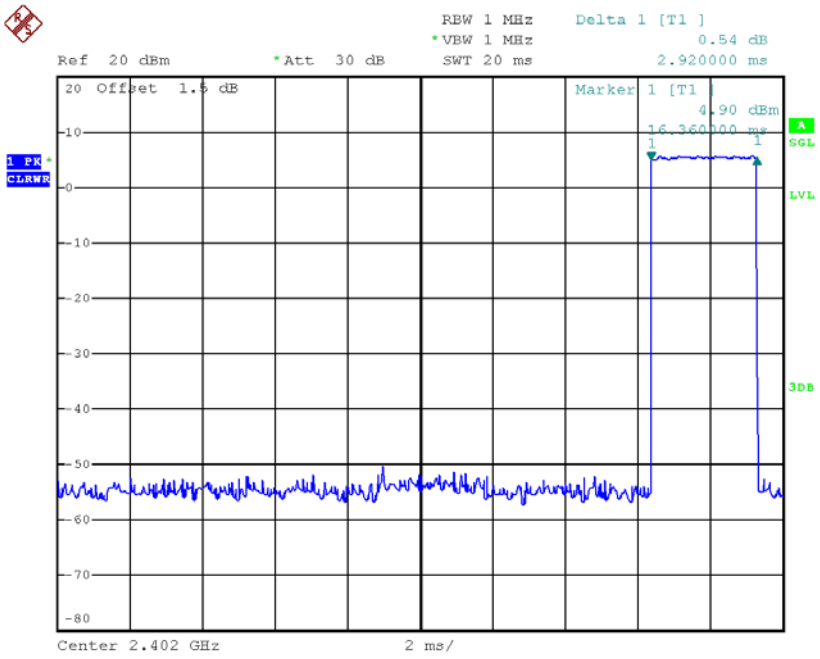

Date: 8.DEC.2017 16:34:56

CH39-DH1

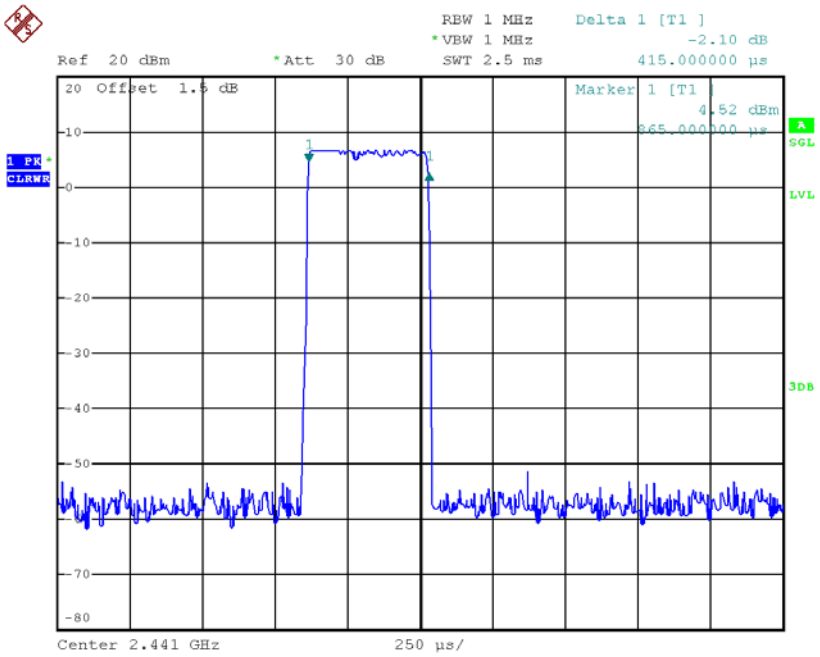

Date: 8.DEC.2017 16:25:16

CH39-DH3

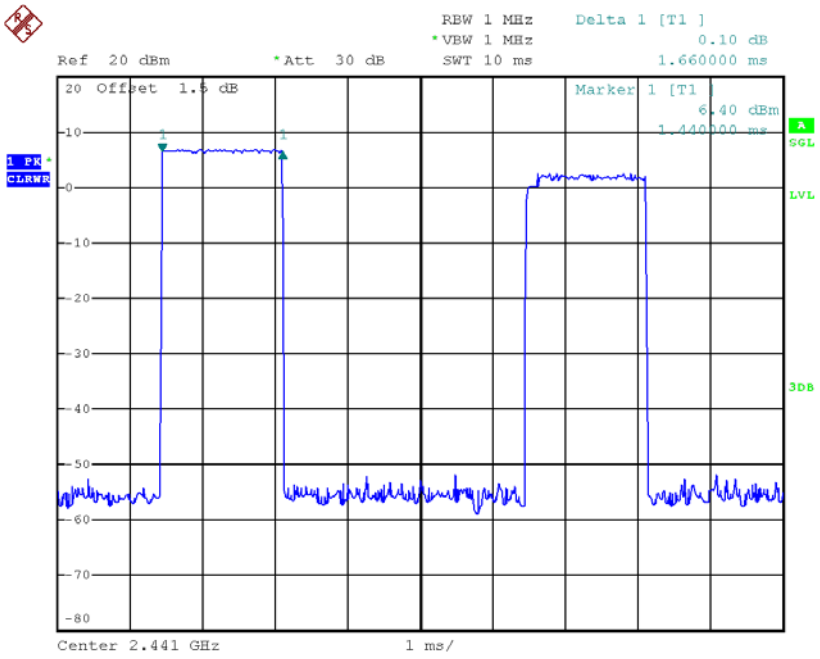

Date: 8.DEC.2017 16:34:17

CH39-DH5

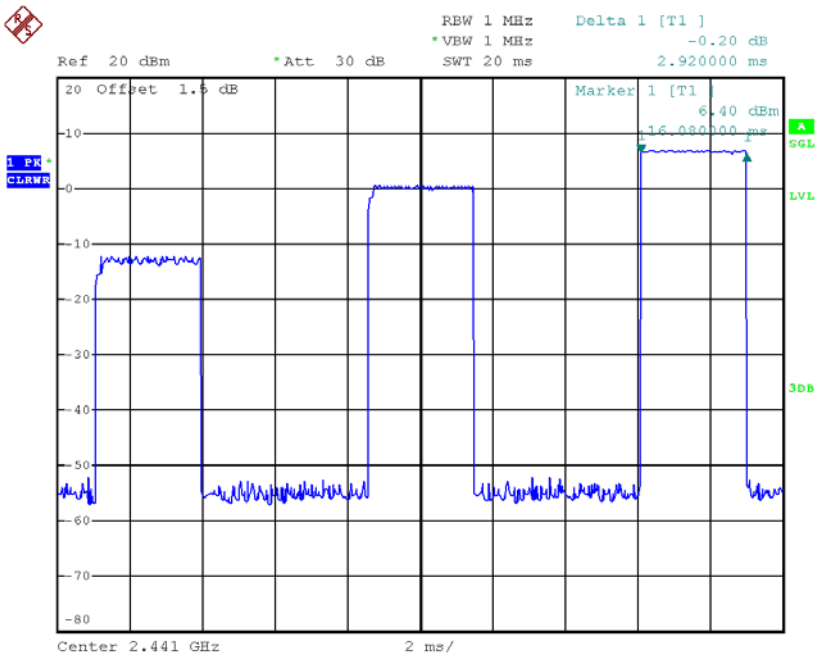

Date: 8.DEC.2017 16:35:48

CH78-DH1

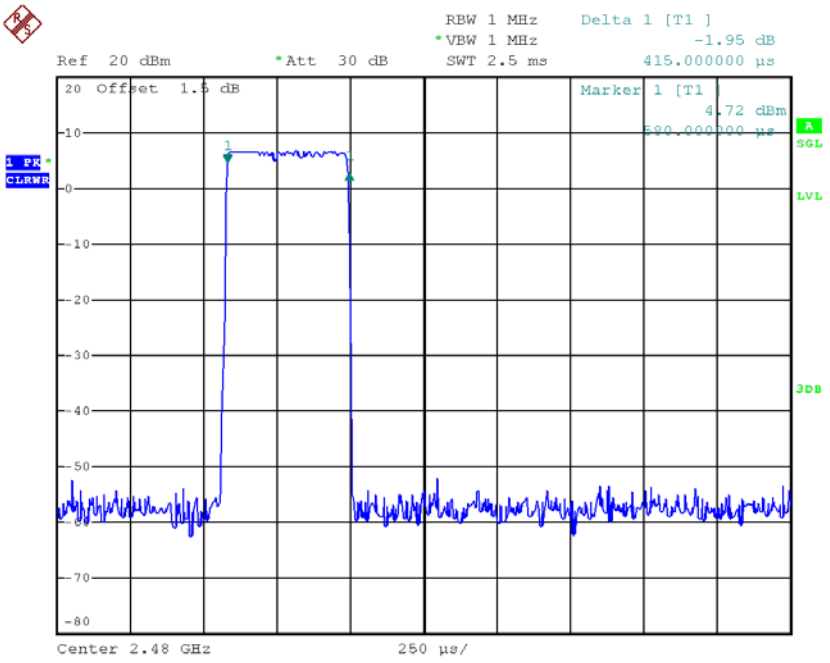

Date: 8.DEC.2017 16:25:20

CH78-DH3

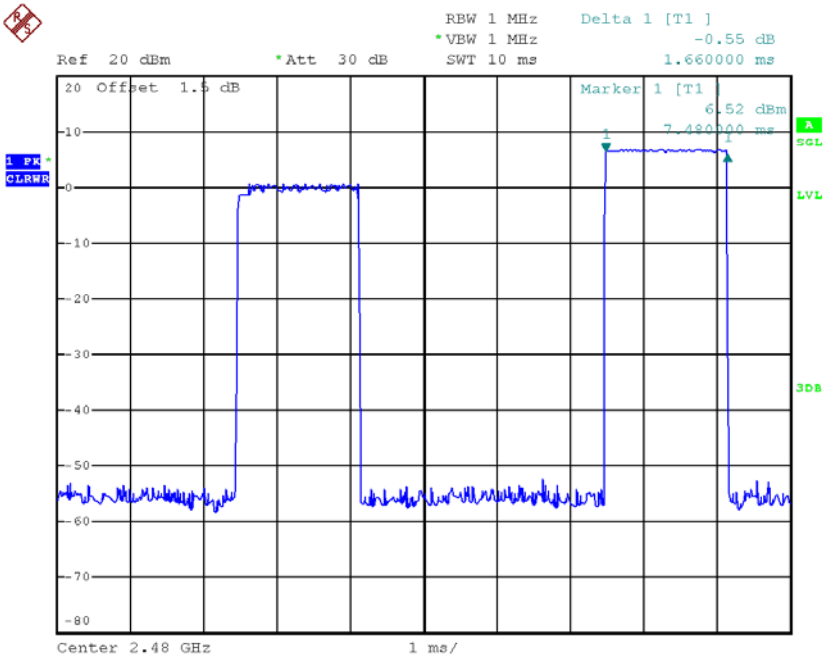

Date: 8.DEC.2017 16:33:38

CH78-DH5

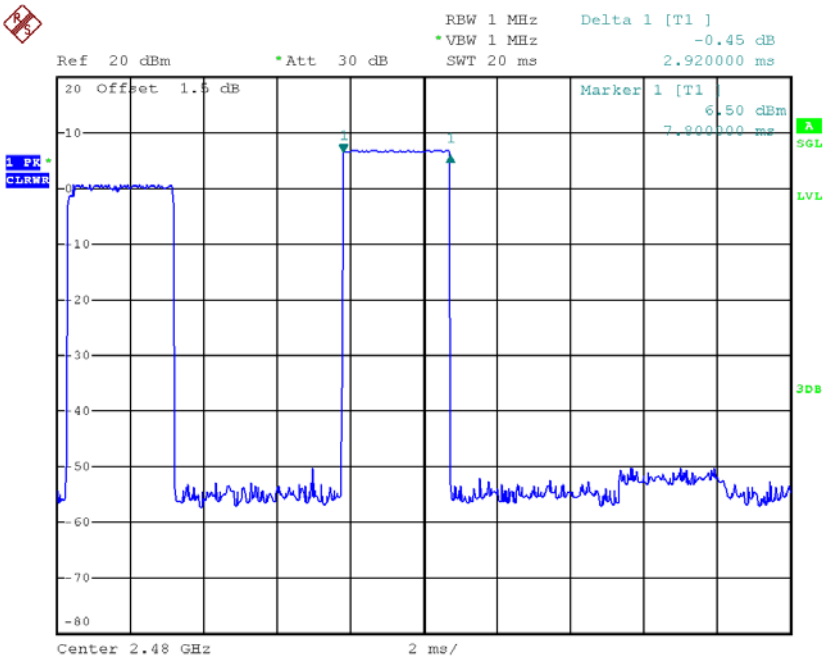

Date: 8.DEC.2017 16:35:12

APPENDIX G - HOPPING CHANNEL SEPARATION MEASUREMENT

Test Mode :	Hopping on _1Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	0.987	0.635	Pass
2441	1.001	0.623	Pass
2480	0.990	0.636	Pass

CH00

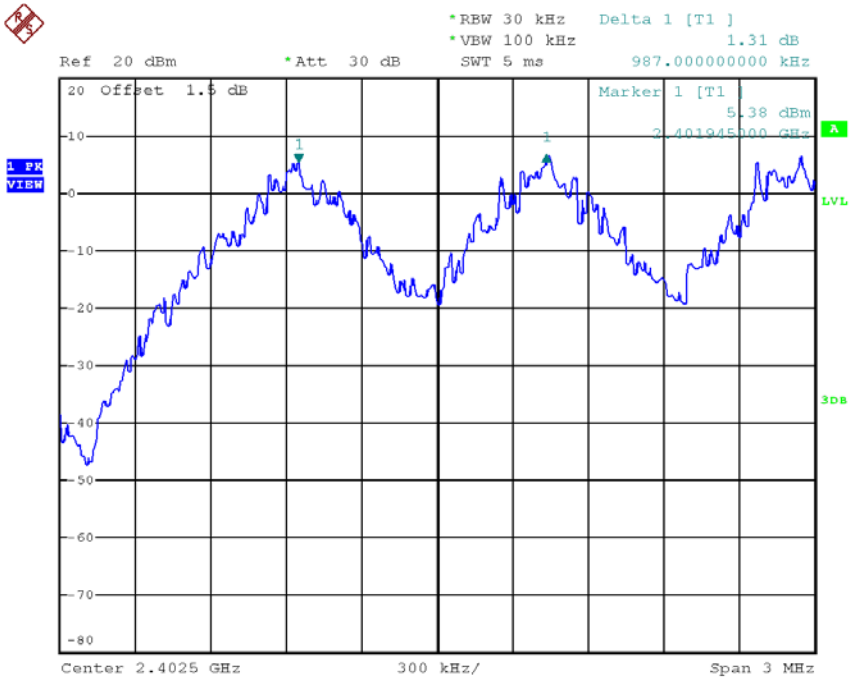

Date: 8.DEC.2017 16:03:58

CH39

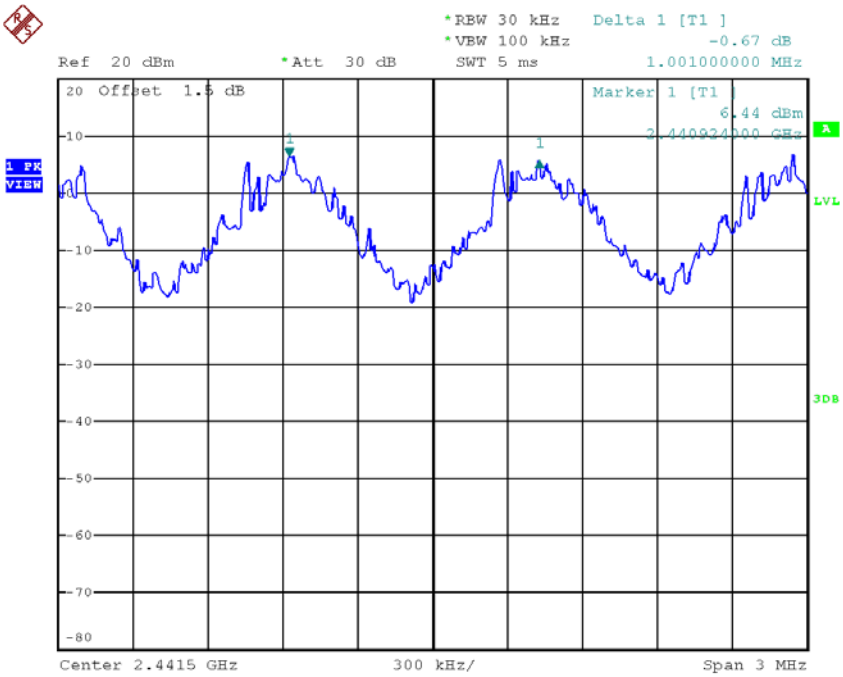

Date: 8.DEC.2017 16:05:06

CH78

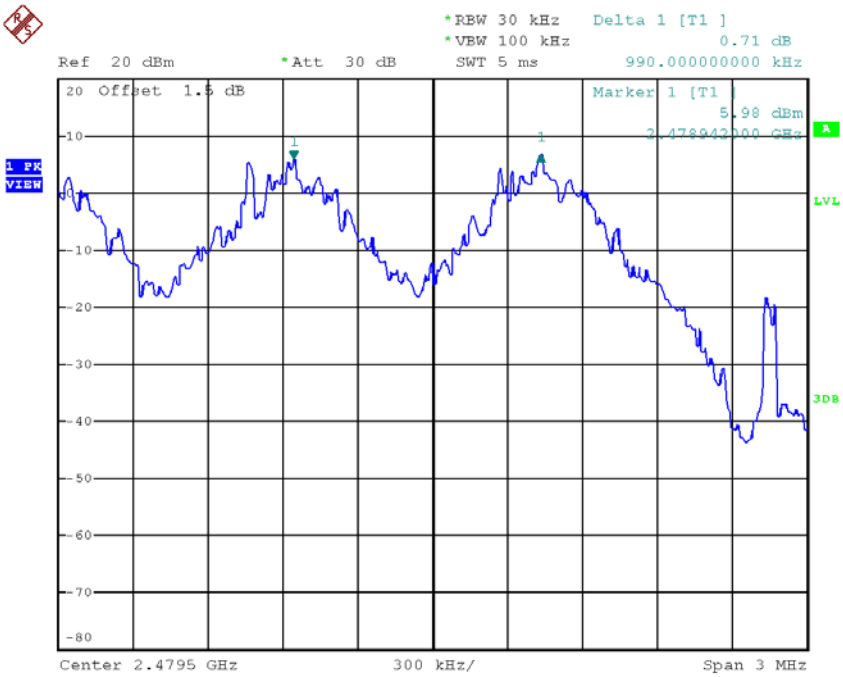

Date: 8.DEC.2017 16:06:10

Test Mode :	Hopping on _3Mbps

Frequency (MHz)	Channel Separation (MHz)	2/3 of 20dB Bandwidth (MHz)	Test Result
2402	0.984	0.863	Pass
2441	1.008	0.841	Pass
2480	1.002	0.852	Pass

CH00

CH39

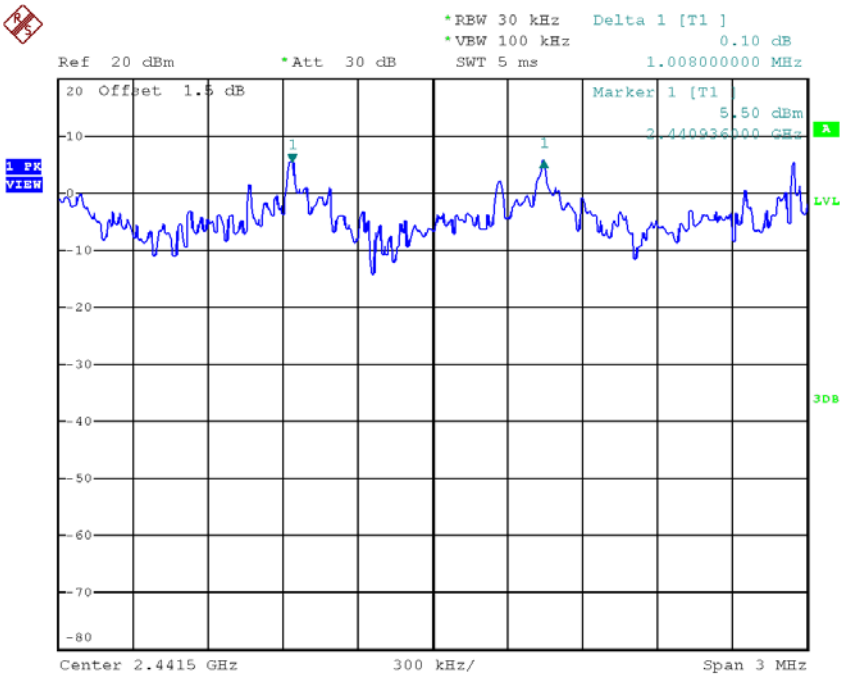

Date: 8.DEC.2017 16:27:29

CH78

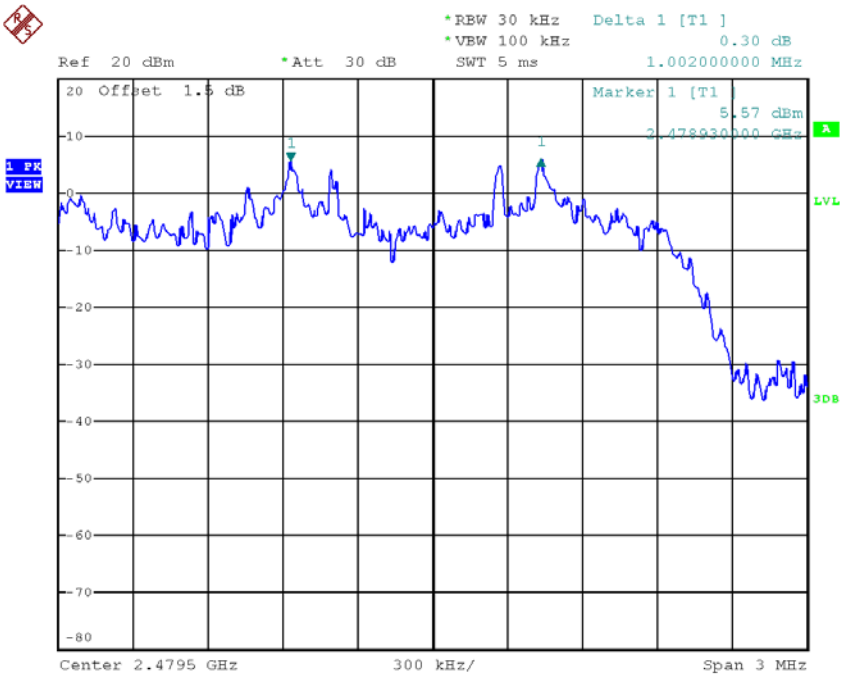

Date: 8.DEC.2017 16:29:55

APPENDIX H - BANDWIDTH

Test Mode :	TX Mode _1Mbps

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	0.953	0.864	Pass
2441	0.934	0.876	Pass
2480	0.954	0.884	Pass

CH00

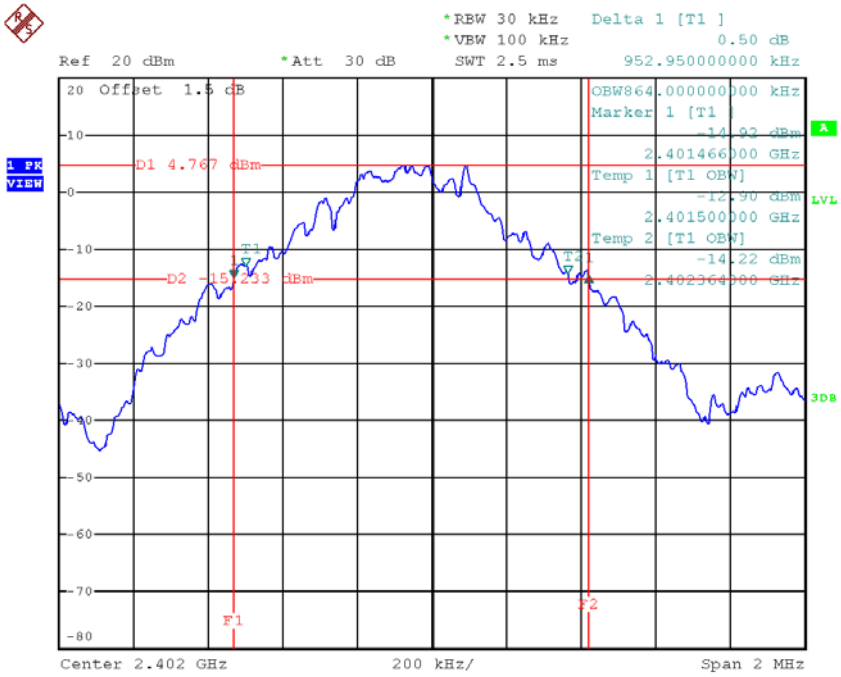

Date: 8.DEC.2017 15:52:10

CH39

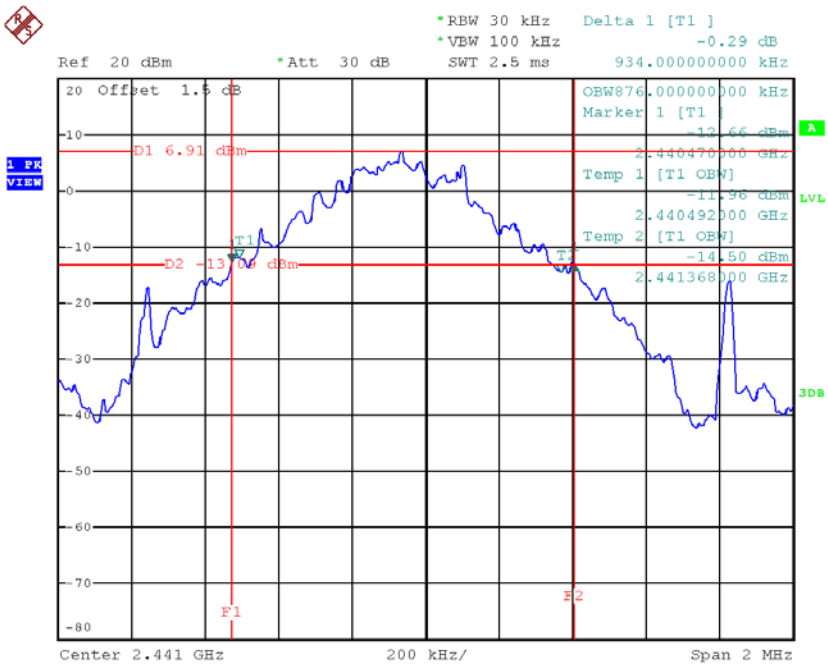

Date: 8.DEC.2017 15:58:56

CH78

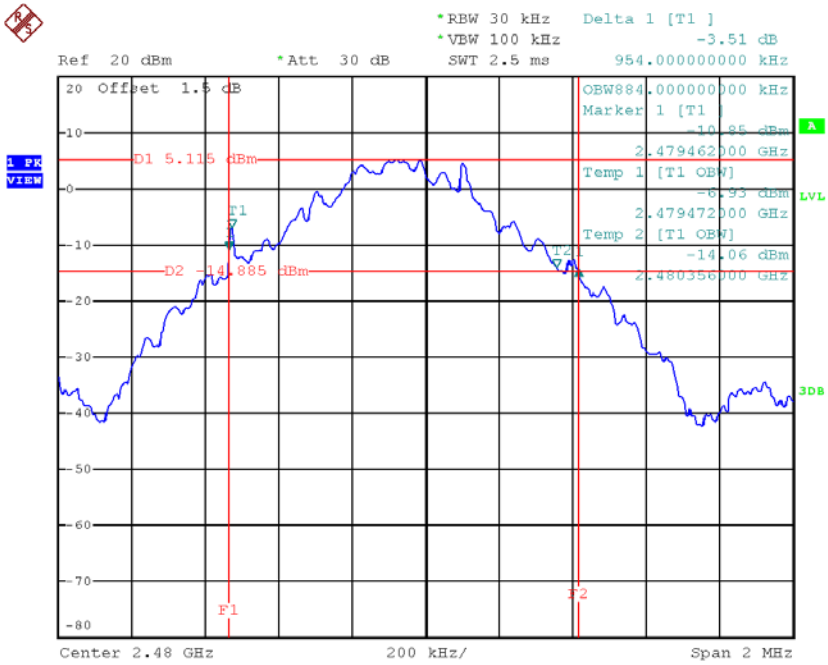

Date: 8.DEC.2017 15:59:46

Test Mode :	TX Mode _3Mbps

Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied BW (MHz)	Test Result
2402	1.294	1.188	Pass
2441	1.262	1.196	Pass
2480	1.278	1.200	Pass

CH00

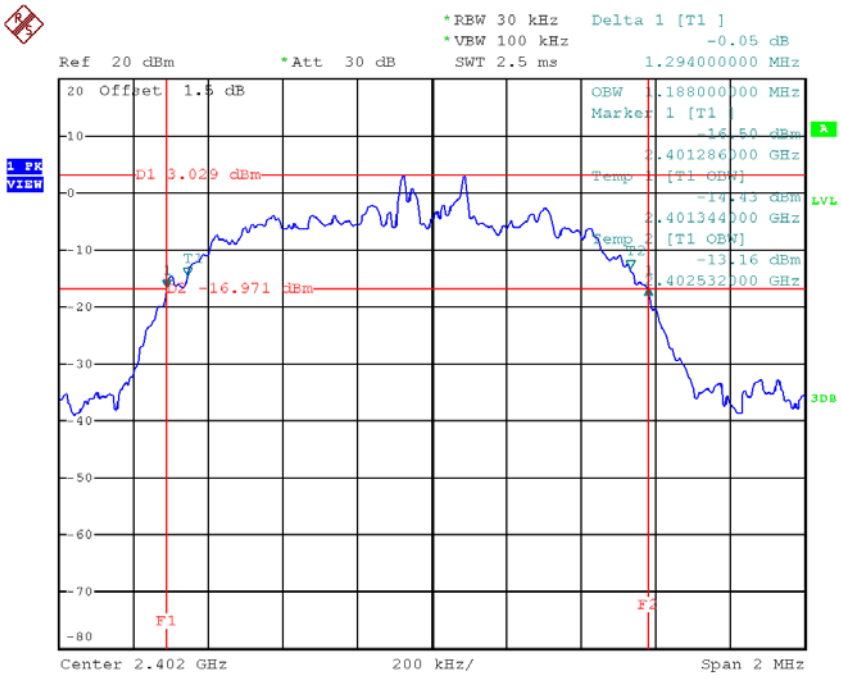

Date: 8.DEC.2017 16:20:33

CH39

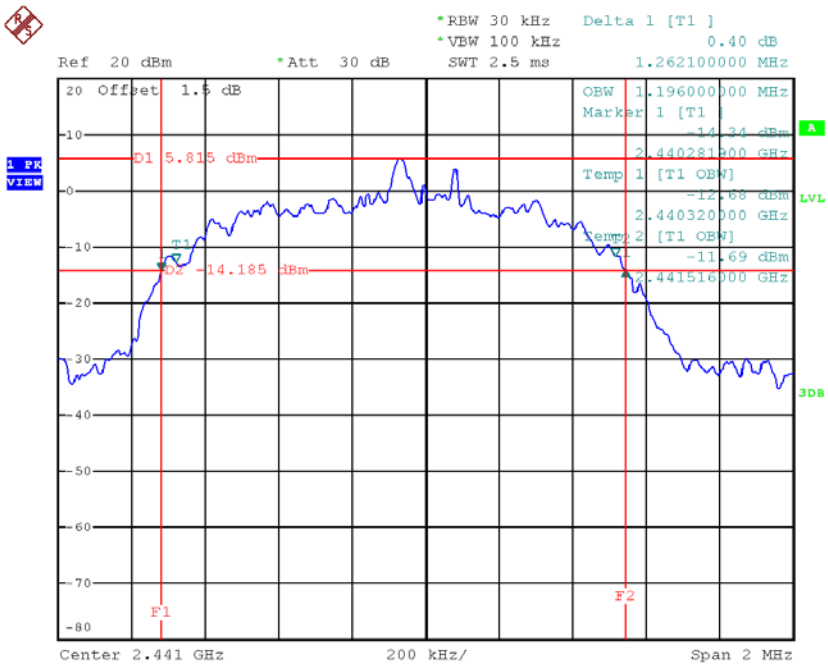

Date: 8.DEC.2017 16:22:27

CH78

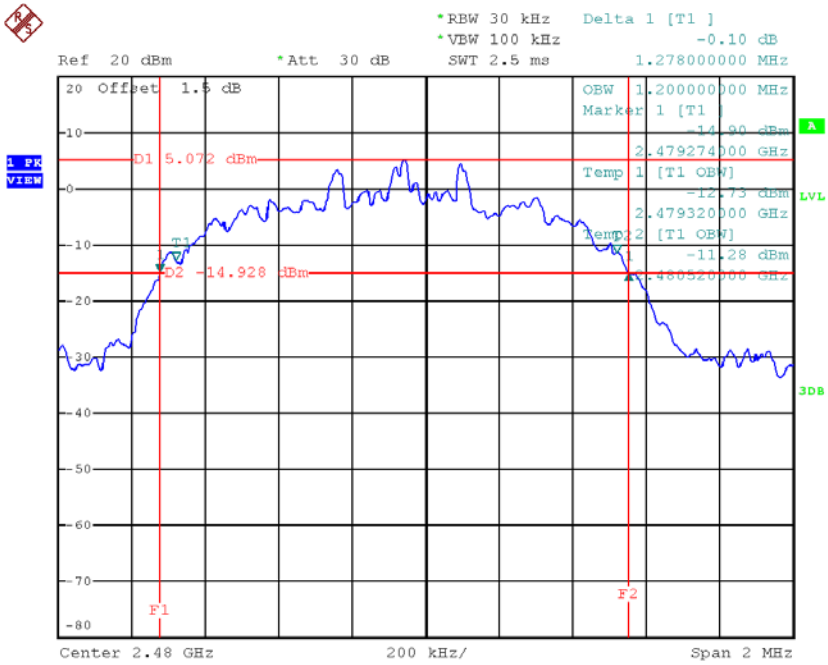

Date: 8.DEC.2017 16:23:09

APPENDIX I - PEAK OUTPUT POWER

Test Mode :	TX Mode _1Mbps

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	7.60	0.0058	30.00	1.00	Pass
2441	8.14	0.0065	30.00	1.00	Pass
2480	7.97	0.0063	30.00	1.00	Pass

CH00

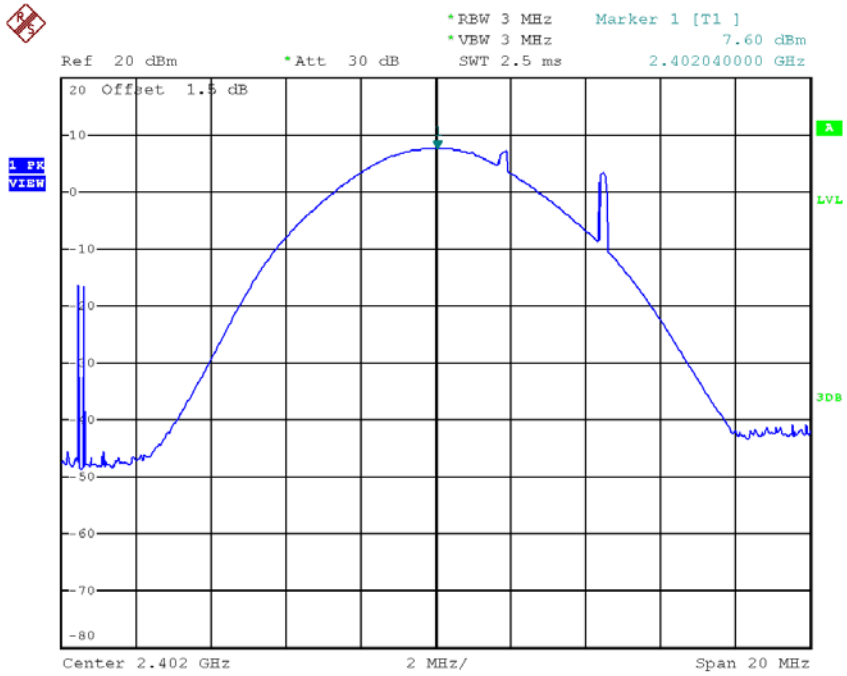

Date: 8.DEC.2017 15:53:49

CH39

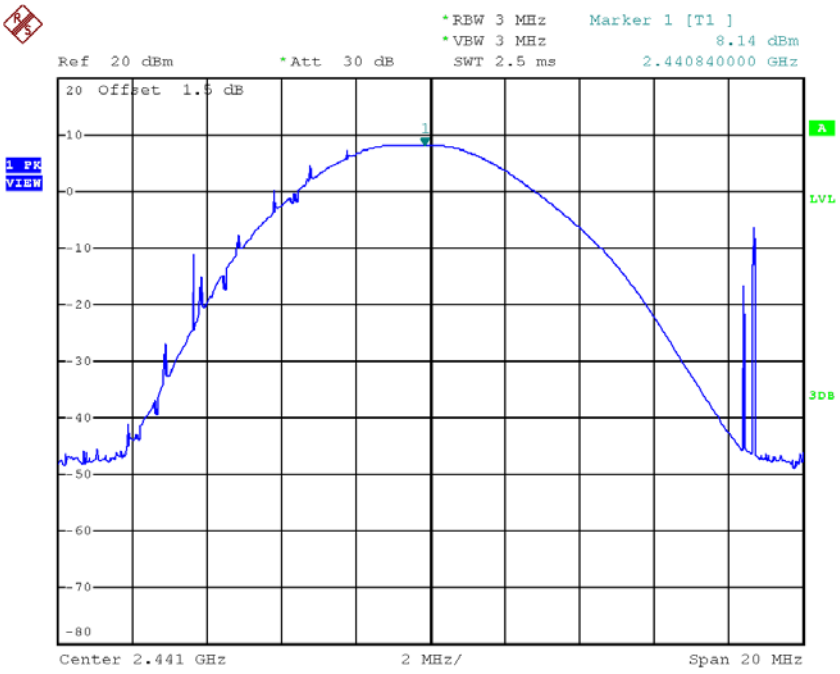

Date: 8.DEC.2017 15:54:57

CH78

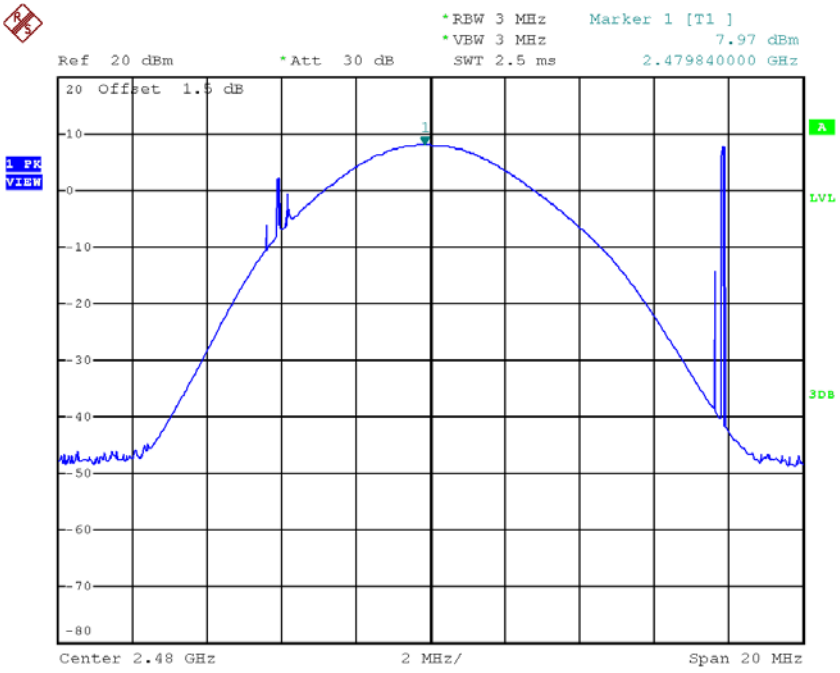

Date: 8.DEC.2017 16:00:22

Test Mode :	TX Mode _3Mbps

Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
2402	6.41	0.0044	30.00	1.00	Pass
2441	7.44	0.0055	30.00	1.00	Pass
2480	7.41	0.0055	30.00	1.00	Pass

CH00

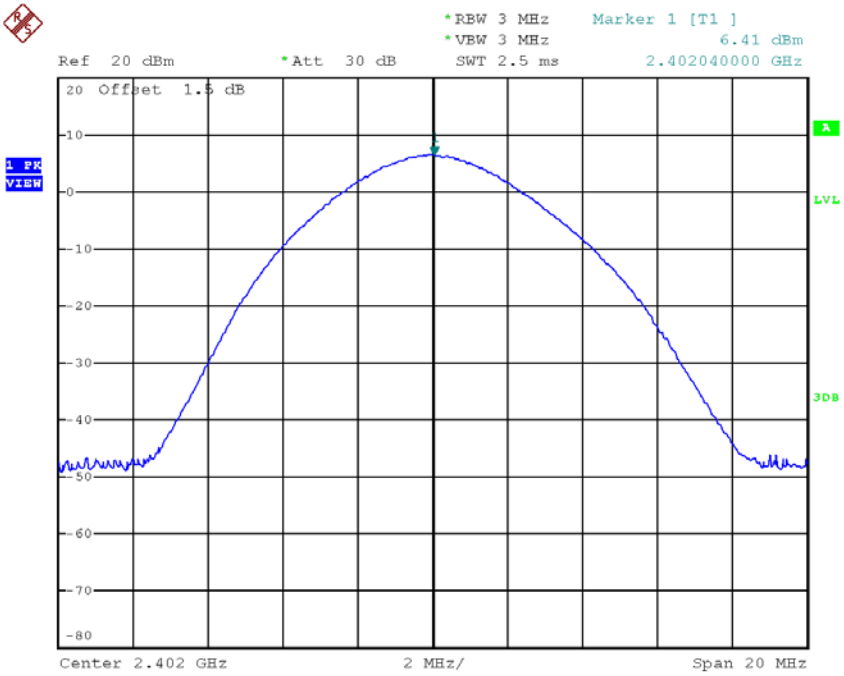

Date: 8.DEC.2017 16:18:44

CH39

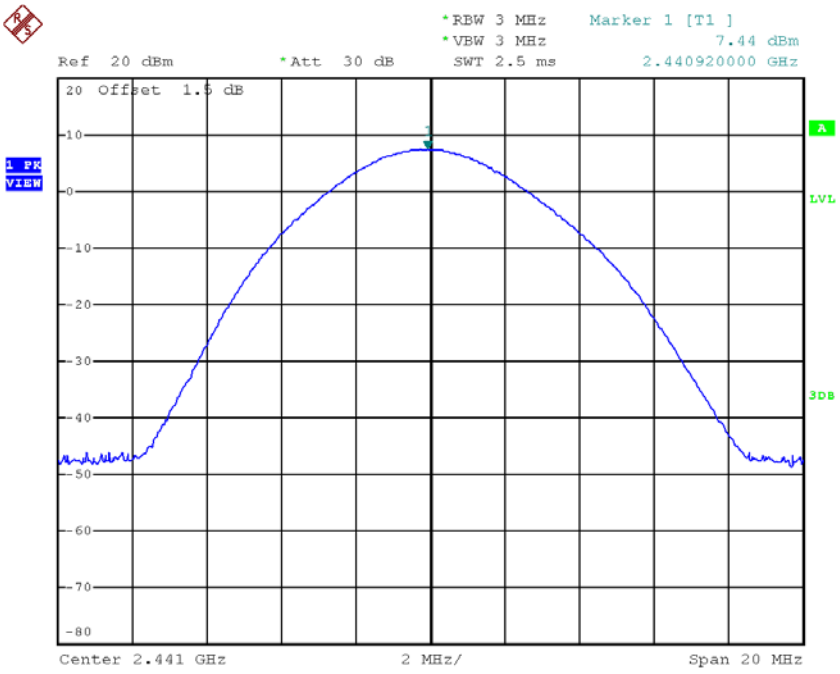

Date: 8.DEC.2017 16:18:59

CH78

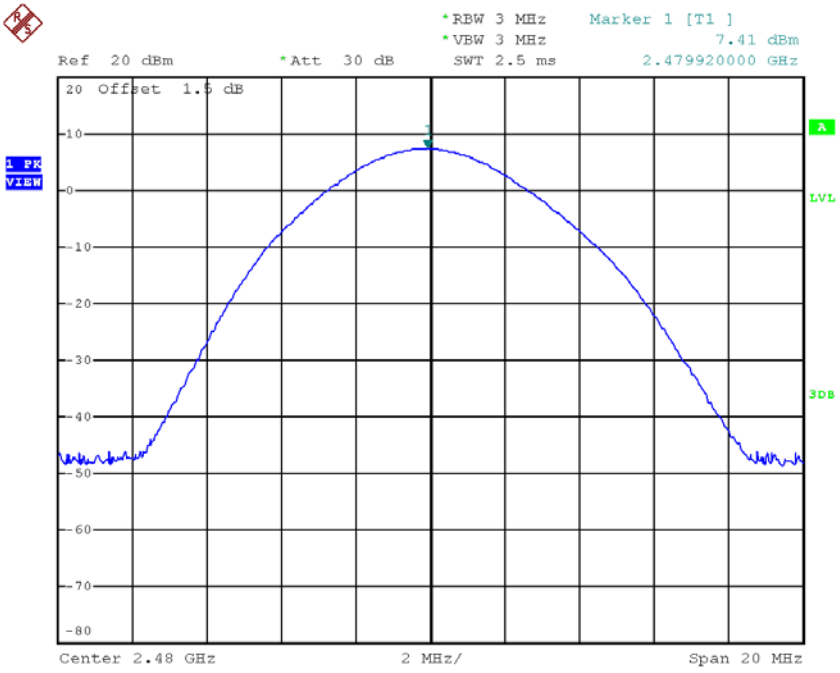

Date: 8.DEC.2017 16:19:14

APPENDIX J - ANTENNA CONDUCTED SPURIOUS EMISSION

CH00 (Lower)_1Mbps

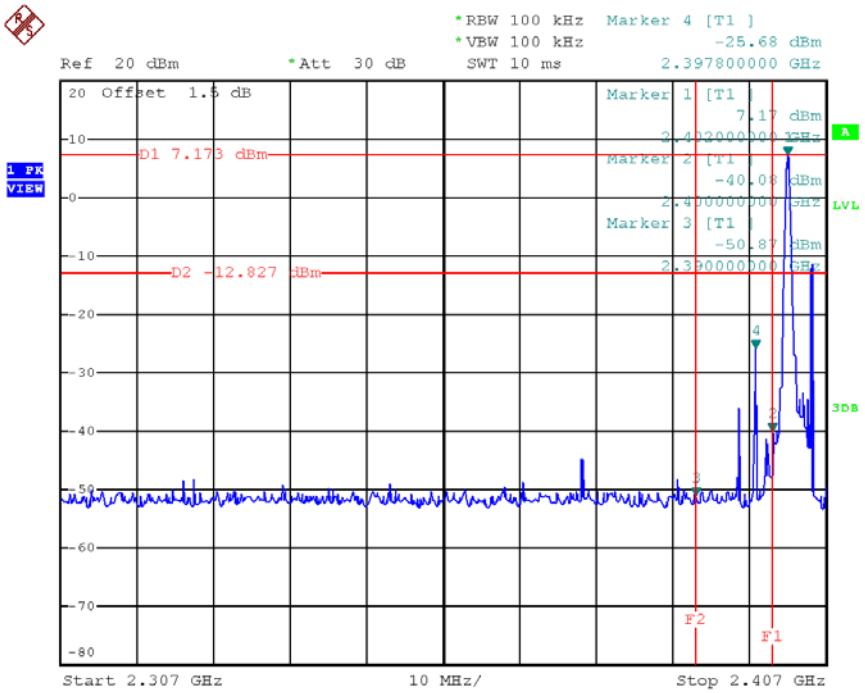

Date: 8.DEC.2017 15:51:19

CH78 (Upper) _1Mbps

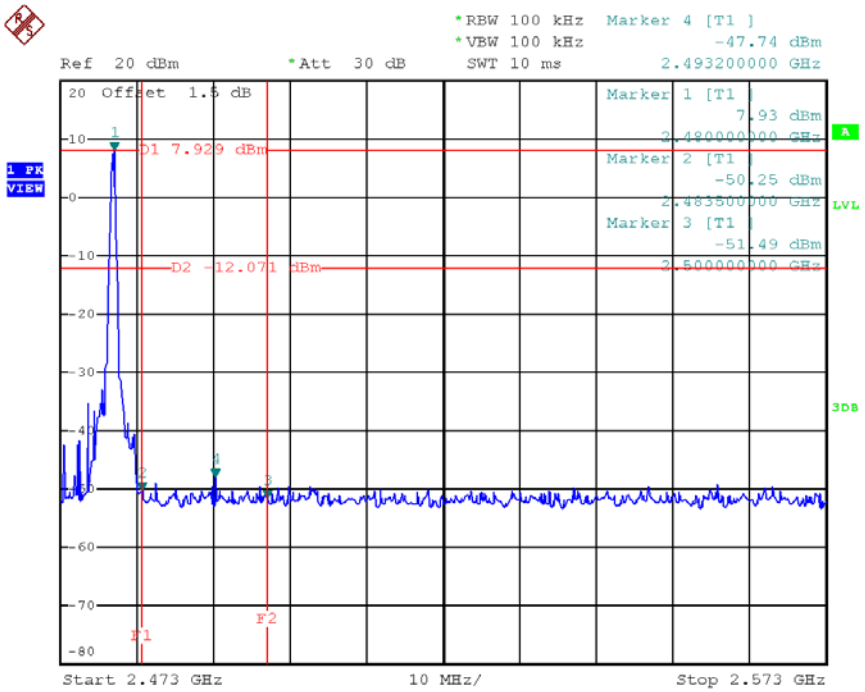

Date: 8.DEC.2017 15:59:20

CH00 Hopping on mode (Lower)_1Mbps

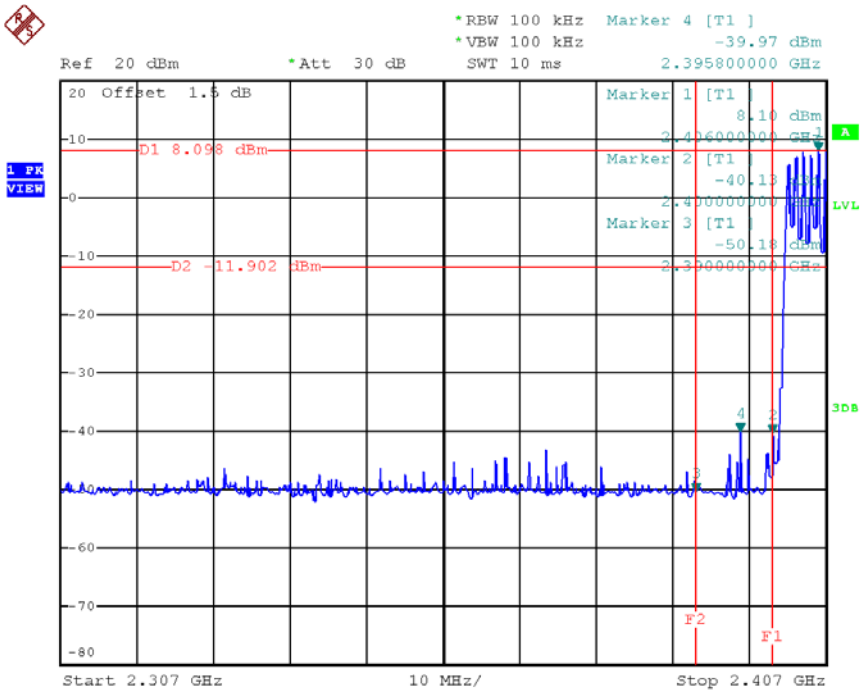

Date: 8.DEC.2017 16:08:33

CH78 Hopping on mode (Upper) _1Mbps

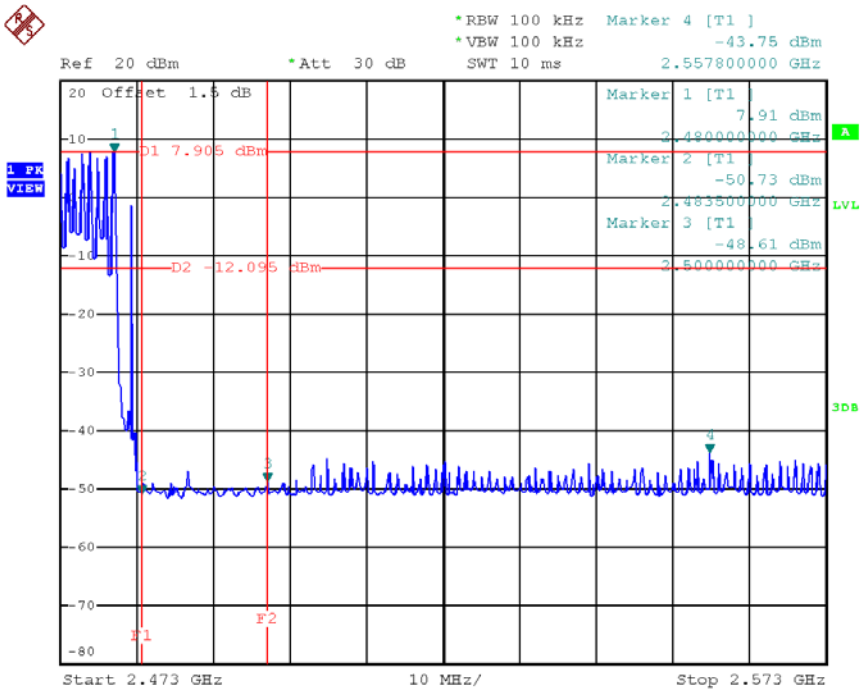

Date: 8.DEC.2017 16:09:08

CH00 (10 Harmonic of the frequency) _1Mbps

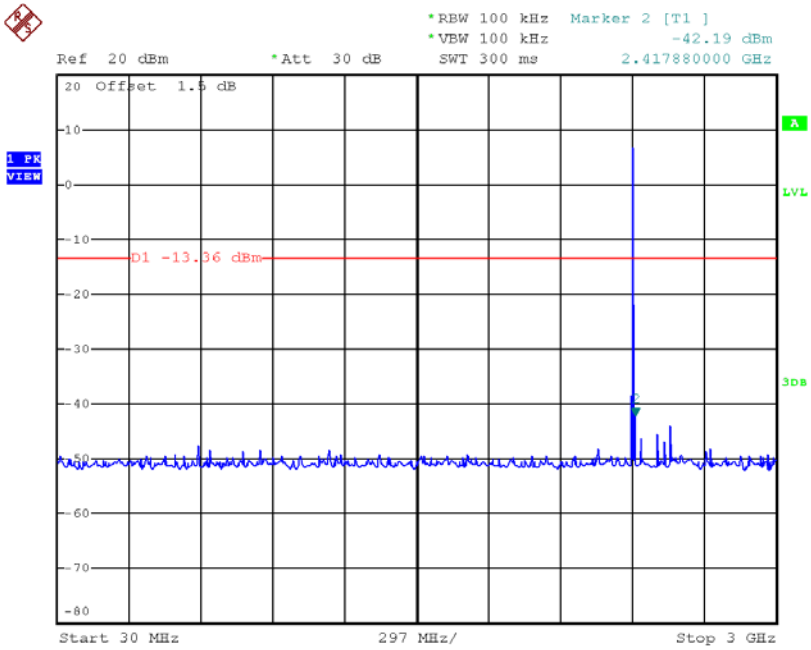

Date: 8.DEC.2017 15:52:24

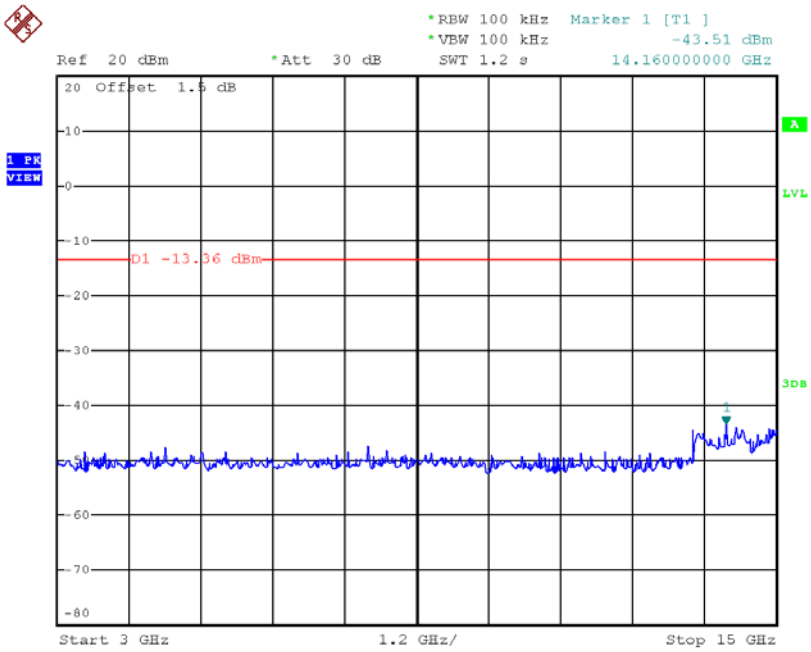

Date: 8.DEC.2017 15:52:32

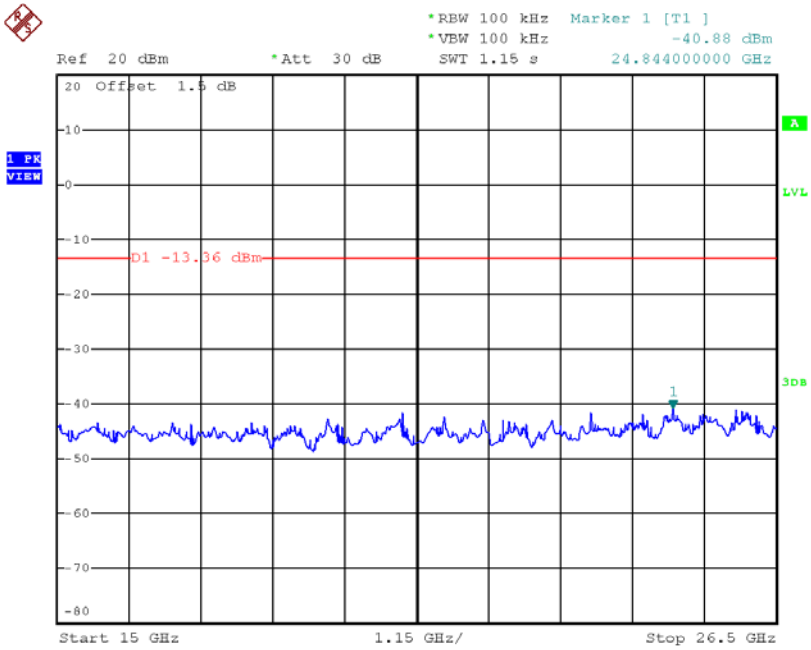

Date: 8.DEC.2017 15:52:40

CH39 (10 Harmonic of the frequency) _1Mbps

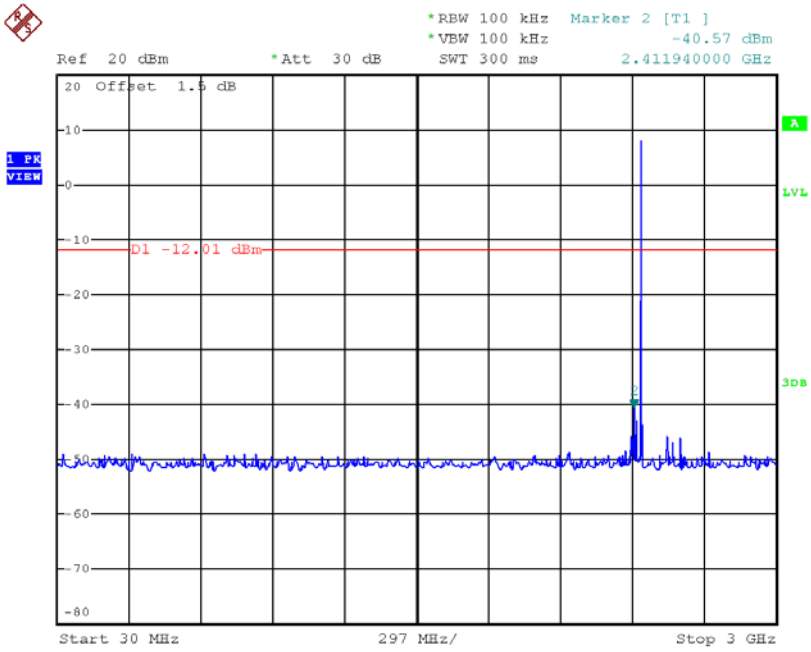

Date: 8.DEC.2017 15:54:15

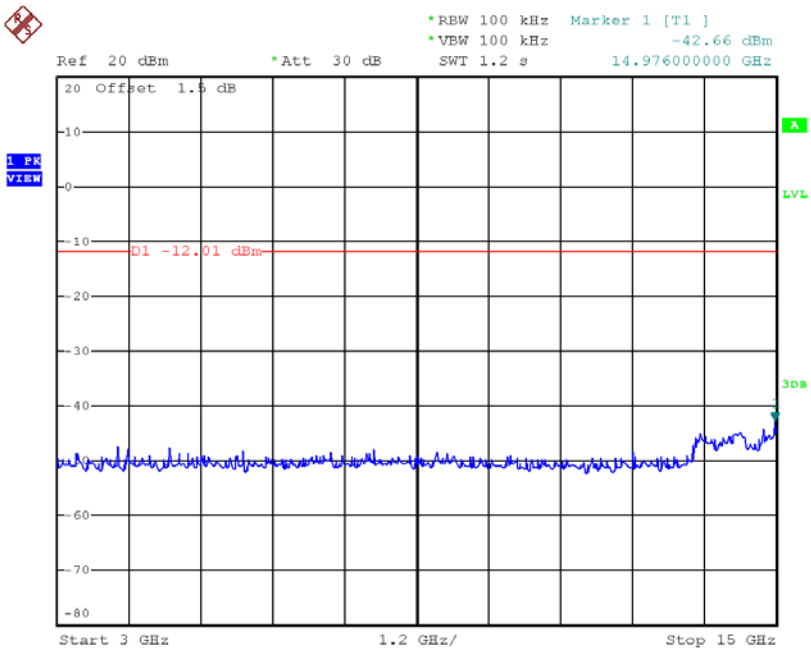

Date: 8.DEC.2017 15:54:23

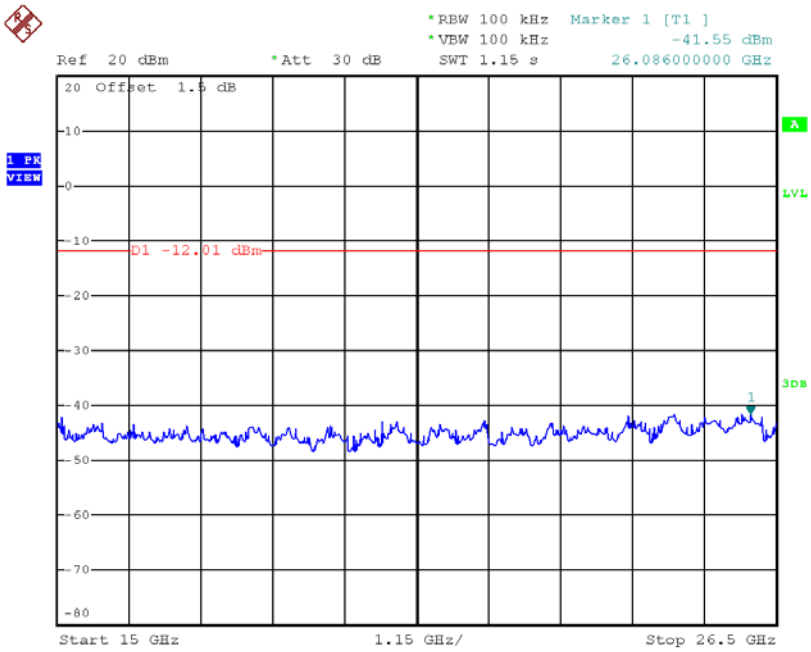

Date: 8.DEC.2017 15:54:31

CH78 (10 Harmonic of the frequency) _1Mbps

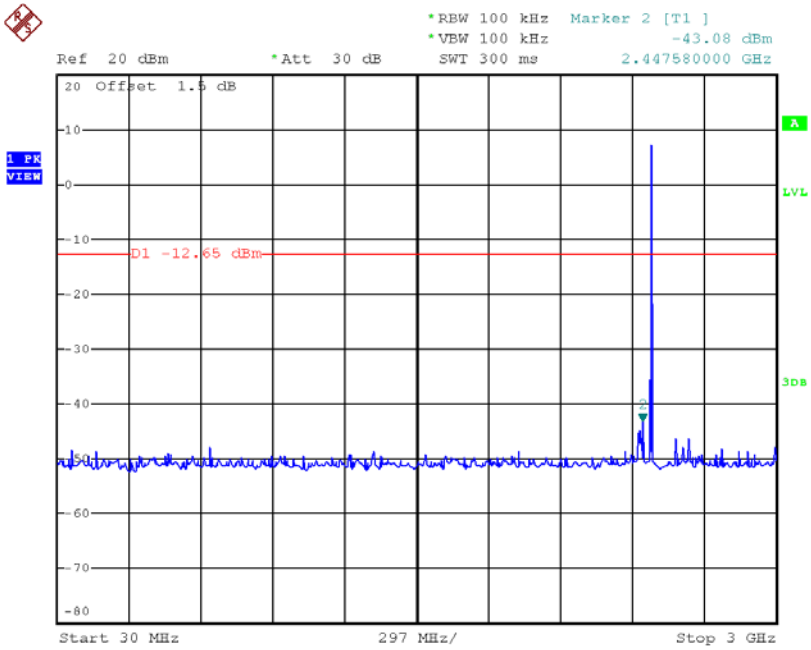

Date: 8.DEC.2017 16:00:00

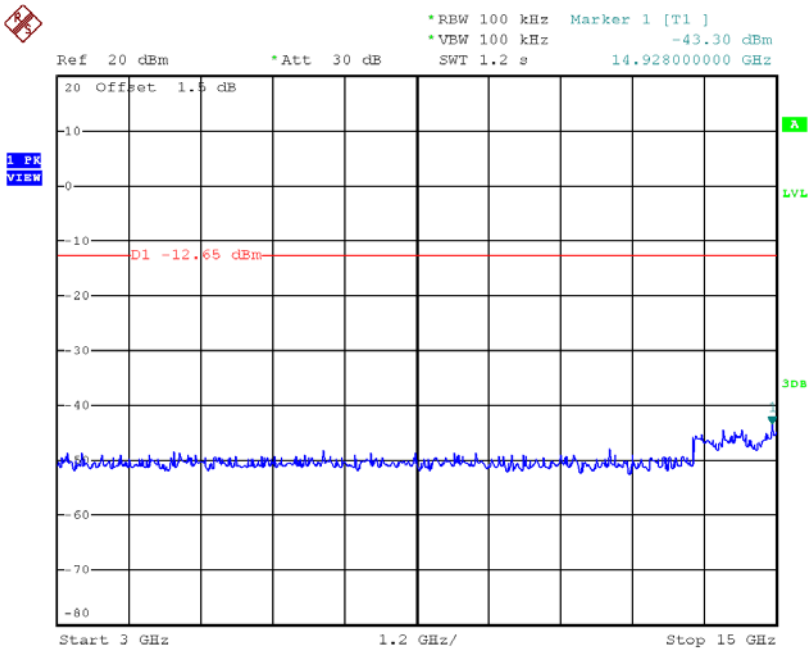

Date: 8.DEC.2017 16:00:08

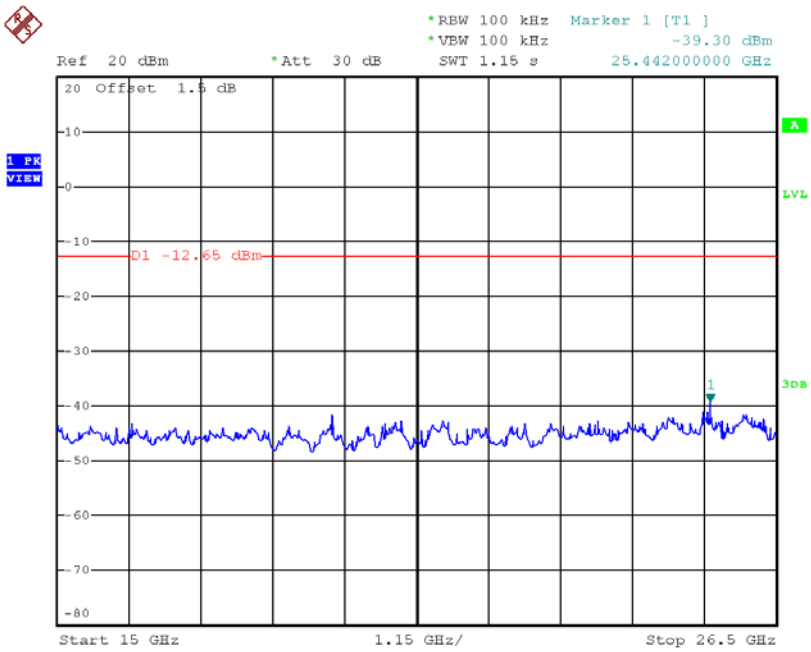

Date: 8.DEC.2017 16:00:16

CH00 (Lower) _3Mbps

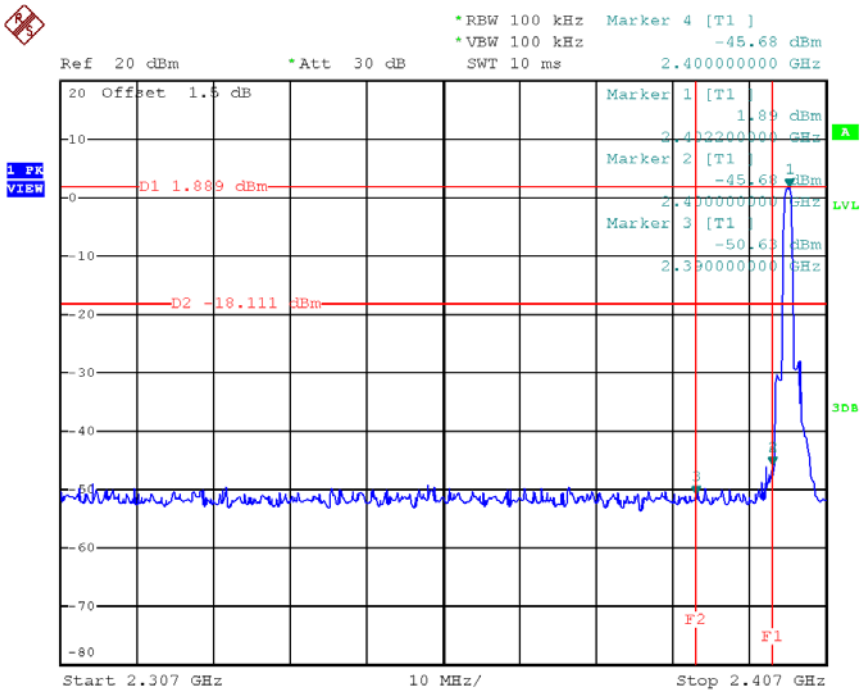

Date: 8.DEC.2017 16:20:14

CH78 (Upper) _3Mbps

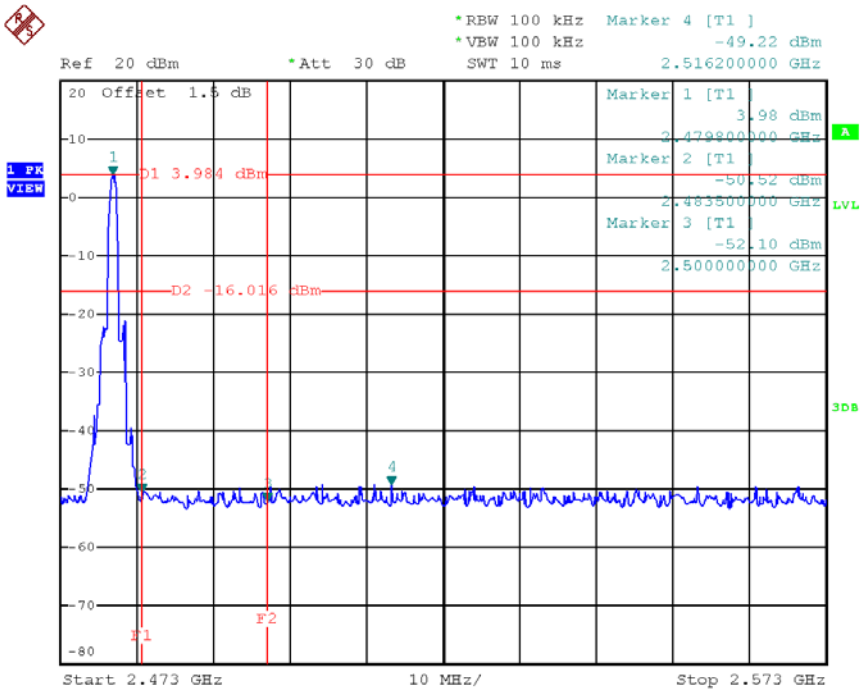

Date: 8.DEC.2017 16:22:49

CH00 Hopping on mode (Lower)_3Mbps

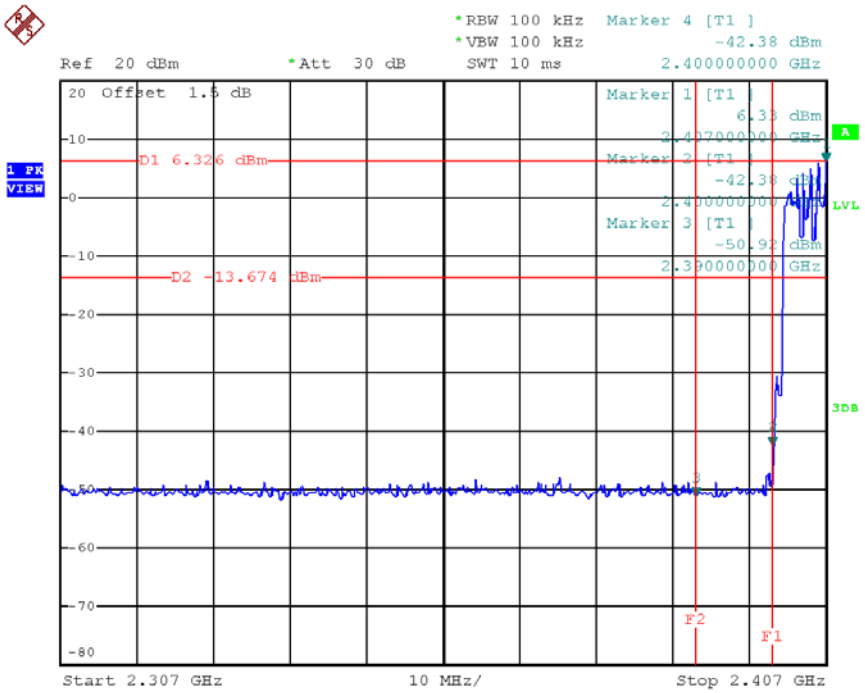

Date: 8.DEC.2017 16:32:17

CH78 Hopping on mode (Upper) _3Mbps

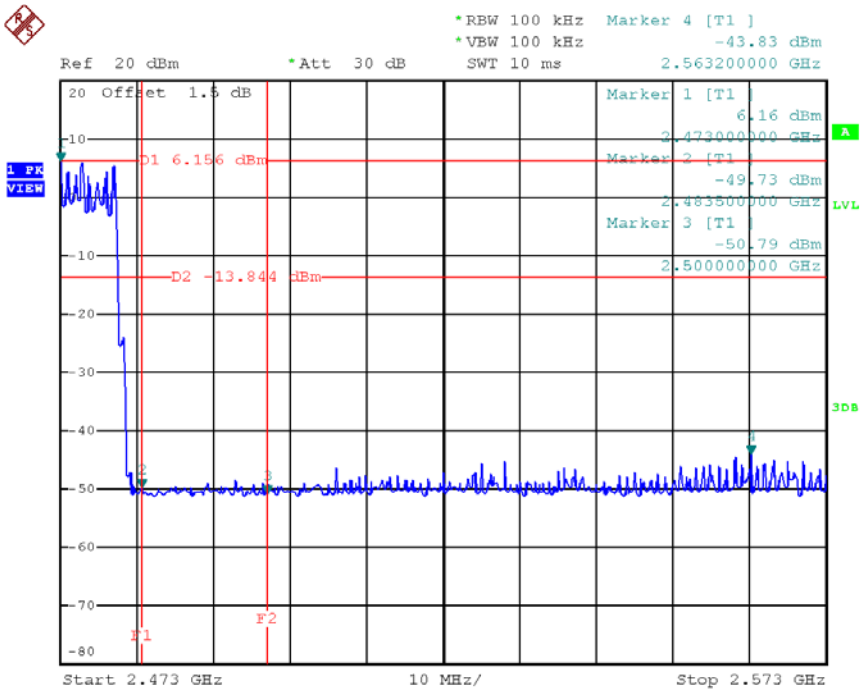

Date: 8.DEC.2017 16:32:52

CH00 (10 Harmonic of the frequency) _3Mbps

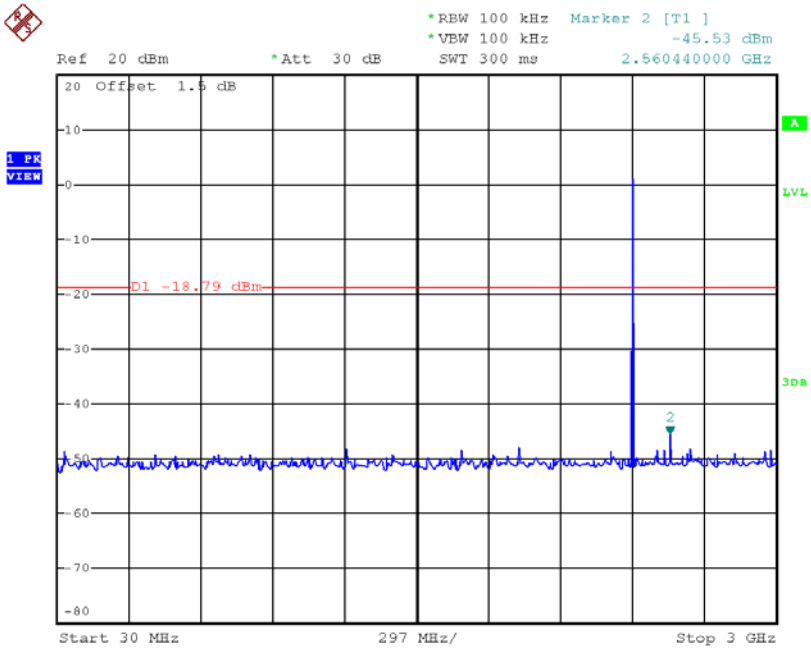

Date: 8.DEC.2017 16:20:47

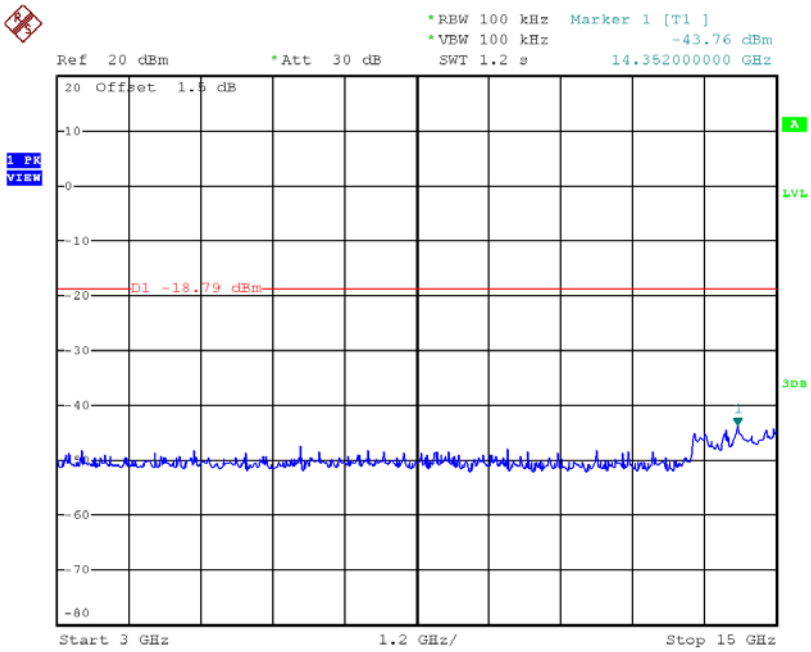

Date: 8.DEC.2017 16:20:55

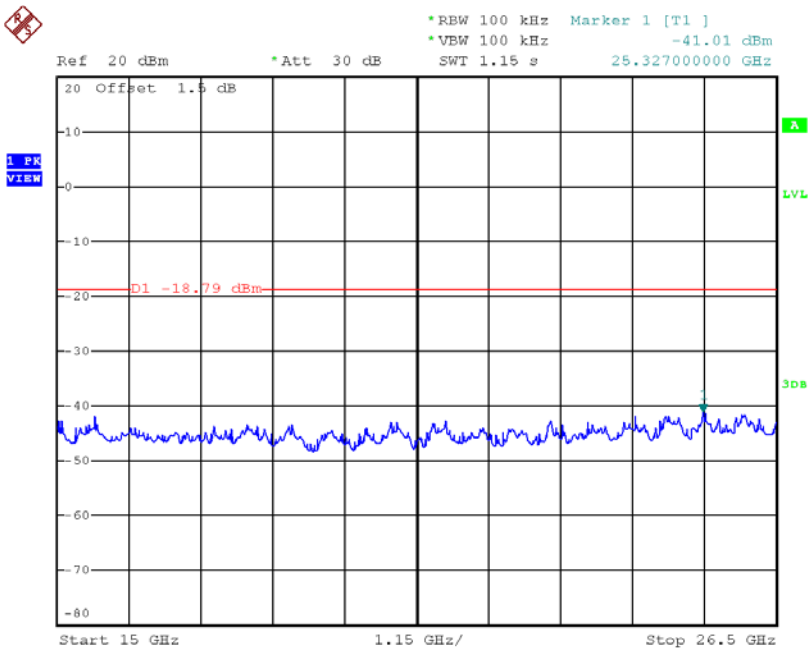

Date: 8.DEC.2017 16:21:03

CH39 (10 Harmonic of the frequency) _3Mbps

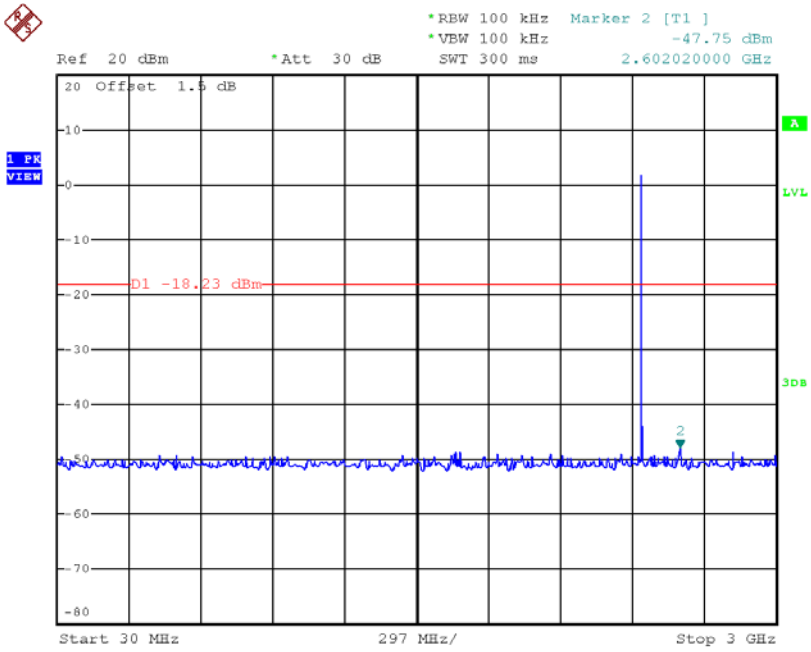

Date: 8.DEC.2017 16:21:50

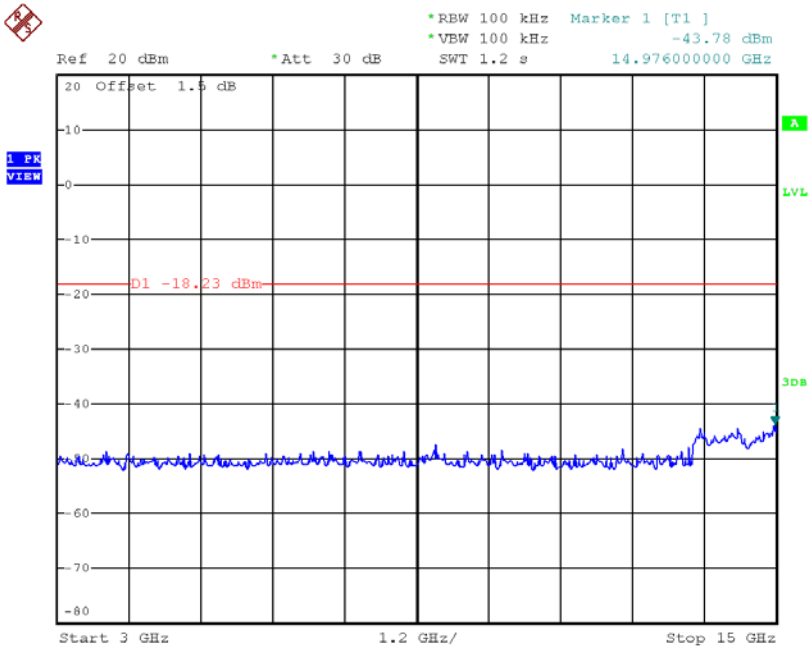

Date: 8.DEC.2017 16:21:58

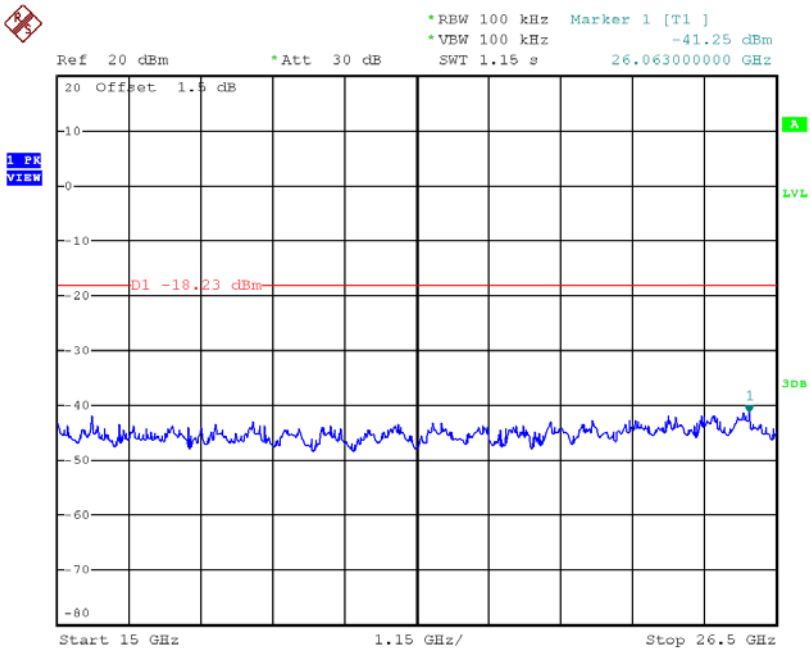

Date: 8.DEC.2017 16:22:06

CH78 (10 Harmonic of the frequency) _3Mbps

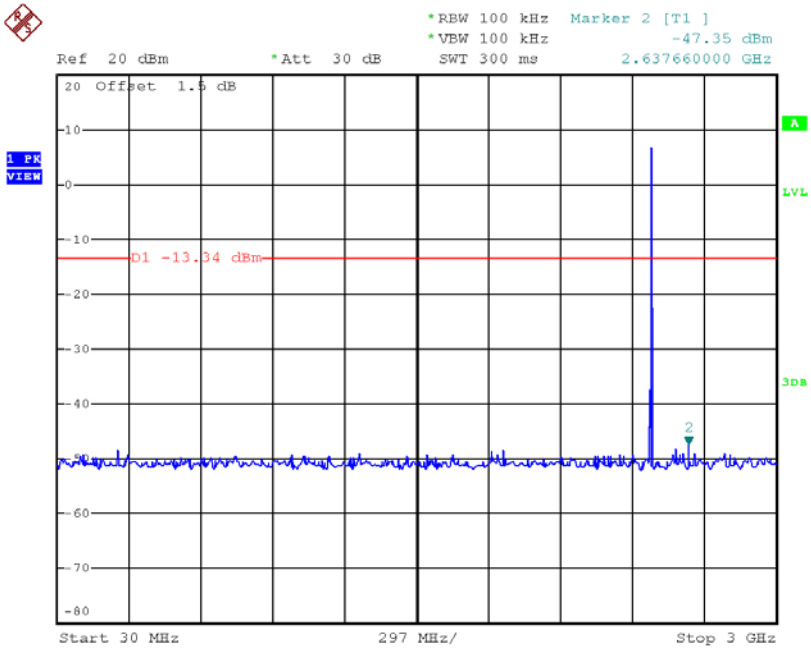

Date: 8.DEC.2017 16:23:23

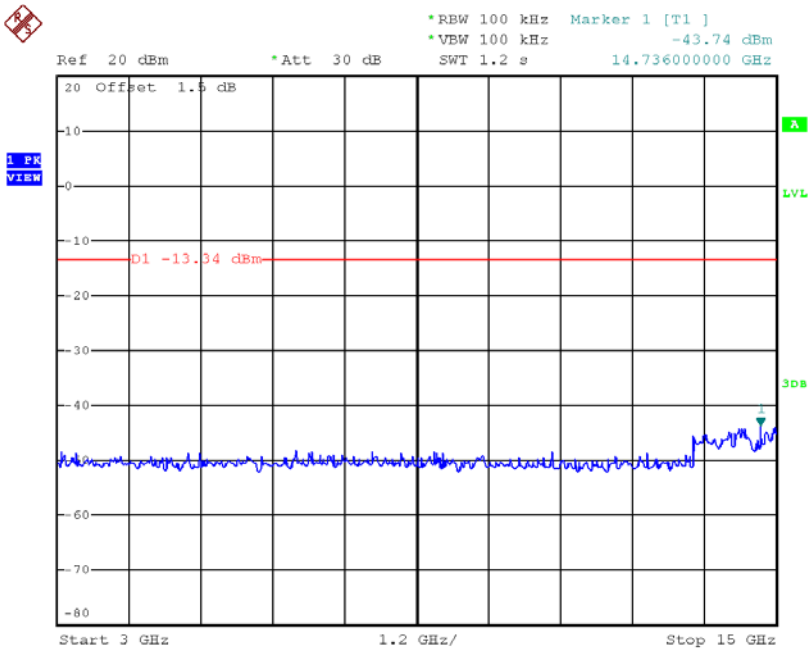

Date: 8.DEC.2017 16:23:31

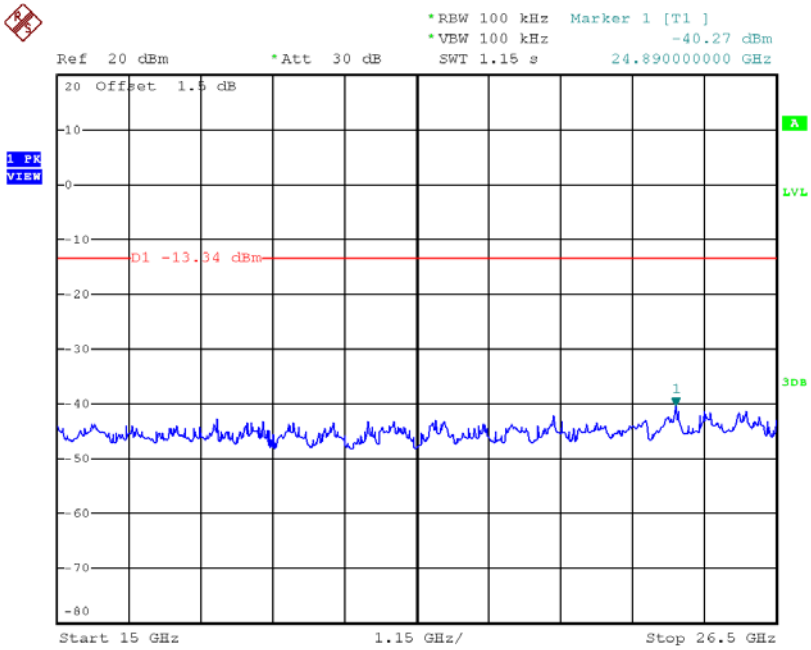

Date: 8.DEC.2017 16:23:39