



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 1 of 120

# TEST REPORT

**Application No.:** SUCR2504000320WM  
**Applicant:** COOSEA GROUP (HK) COMPANY LIMITED  
**Address of Applicant:** UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL  
**Manufacturer:** COOSEA GROUP (HK) COMPANY LIMITED  
**Address of Manufacturer:** UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL  
**EUT Description:** Smart Phone  
**Model No.:** SN333A, SN333C -----♣  
**♣** Please refer to section 2.4 of this report which indicates which model was actually tested and which were electrically identical.  
**FCC ID:** 2A28USN333  
**Standards:** FCC 47 CFR Part 2, Subpart J  
FCC 47 CFR Part 15, Subpart C  
**Date of Receipt:** April 15, 2025  
**Date of Test:** April 18, 2025 to May 5, 2025  
**Date of Issue:** May 29, 2025

|                      |               |
|----------------------|---------------|
| <b>Test Result :</b> | <b>PASS *</b> |
|----------------------|---------------|

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.  
Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.  
Wireless Laboratory

South of No. 6 Plant, No. 1, RunSheng Road, Suzhou Industrial Park,  
Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

t (86-512) 6229 2980  
[www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 2 of 120

Version

| Revision Record |             |              |        |
|-----------------|-------------|--------------|--------|
| Version         | Description | Date         | Remark |
| 01              | Original    | May 29, 2025 | /      |
|                 |             |              |        |
|                 |             |              |        |

|                          |  |                                                                                     |  |  |
|--------------------------|--|-------------------------------------------------------------------------------------|--|--|
| Authorized for issue by: |  |                                                                                     |  |  |
| Tested By                |  |    |  |  |
|                          |  | Nature Shen / Project Manager                                                       |  |  |
| Approved By              |  |  |  |  |
|                          |  | Cloud Peng/Technical Manager                                                        |  |  |



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 3 of 120

### Contents

|                                                               |           |
|---------------------------------------------------------------|-----------|
| <b>Version</b>                                                | <b>2</b>  |
| <b>1 Test Summary</b>                                         | <b>4</b>  |
| <b>2 General Information</b>                                  | <b>5</b>  |
| 2.1 Details of Client                                         | 5         |
| 2.2 Test Location                                             | 5         |
| 2.3 Test Facility                                             | 5         |
| 2.4 General Description of EUT                                | 6         |
| 2.5 Test Environment and Mode                                 | 7         |
| 2.6 Description of Support Units                              | 7         |
| 2.7 Worst-case configuration and mode                         | 7         |
| <b>3 Equipment List</b>                                       | <b>8</b>  |
| <b>4 Measurement Uncertainty (95% confidence levels, k=2)</b> | <b>10</b> |
| <b>5 Test results and Measurement Data</b>                    | <b>11</b> |
| 5.1 Antenna Requirement                                       | 11        |
| 5.2 AC Power Line Conducted Emissions                         | 12        |
| 5.3 Duty Cycle                                                | 16        |
| 5.4 Conducted Output Power                                    | 17        |
| 5.5 DTS (6 dB) Bandwidth & 99% Occupied Bandwidth             | 18        |
| 5.6 Power Spectral Density                                    | 19        |
| 5.7 Band-edge for RF Conducted Emissions                      | 20        |
| 5.8 RF Conducted Spurious Emissions                           | 21        |
| 5.9 Radiated Spurious Emissions                               | 22        |
| 5.10 Restricted bands around fundamental frequency            | 25        |
| <b>6 Photographs - Setup Photos</b>                           | <b>27</b> |
| <b>7 Appendix</b>                                             | <b>28</b> |



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 4 of 120

### 1 Test Summary

| Test Item                                                               | FCC Rule No.            | Test Method                                          | Test Result | Result                   |
|-------------------------------------------------------------------------|-------------------------|------------------------------------------------------|-------------|--------------------------|
| Antenna Requirement                                                     | 15.203/15.247(b)        | --                                                   | Clause 5.1  | PASS                     |
| AC Power Line<br>Conducted Emission                                     | 15.207                  | ANSI C63.10 2013<br>Section 6.2                      | Clause 5.2  | PASS                     |
| Duty Cycle                                                              | --                      | ANSI C63.10 2013<br>Section 11.6                     | Clause 5.3  | For<br>Report<br>Purpose |
| Conducted Output Power                                                  | 15.247 (b)(3)           | ANSI C63.10 2013<br>Section 11.9.1.3                 | Clause 5.4  | PASS                     |
| DTS (6 dB) Bandwidth & 99%<br>Occupied Bandwidth                        | 15.247 (a)(2)           | ANSI C63.10 2013<br>Section 11.8 Option<br>2 / 6.9.3 | Clause 5.5  | PASS                     |
| Power Spectral Density                                                  | 15.247 (e)              | ANSI C63.10 2013<br>Section 11.10.2                  | Clause 5.6  | PASS                     |
| Band-edge for RF<br>Conducted Emissions                                 | 15.247(d)               | ANSI C63.10 2013<br>Section 11.11                    | Clause 5.7  | PASS                     |
| RF Conducted Spurious<br>Emissions                                      | 15.247(d)               | ANSI C63.10 2013<br>Section 11.11                    | Clause 5.8  | PASS                     |
| Radiated Spurious Emissions                                             | 15.247(d);15.205/15.209 | ANSI C63.10 2013<br>Section 11.12                    | Clause 5.9  | PASS                     |
| Restricted bands around<br>fundamental frequency (Radiated<br>Emission) | 15.247(d);15.205/15.209 | ANSI C63.10 2013<br>Section 11.12                    | Clause 5.10 | PASS                     |



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 5 of 120

## 2 General Information

### 2.1 Details of Client

|                          |                                                                |
|--------------------------|----------------------------------------------------------------|
| Applicant:               | COOSEA GROUP (HK) COMPANY LIMITED                              |
| Address of Applicant:    | UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL |
| Manufacturer:            | COOSEA GROUP (HK) COMPANY LIMITED                              |
| Address of Manufacturer: | UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL |

### 2.2 Test Location

|                |                                                                                                                        |
|----------------|------------------------------------------------------------------------------------------------------------------------|
| Company:       | SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.                                                               |
| Address:       | South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone |
| Post code:     | 215000                                                                                                                 |
| Test engineer: | Tizzy Song, Ives Cheng                                                                                                 |

### 2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 6 of 120

### 2.4 General Description of EUT

|                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                      |                                 |                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------------------|--------------------|
| EUT Description:                                                                                                                                                                                                                                                                                                                                                                                                                                             | Mobile Cellular Phone                                                                                |                                 |                    |
| Model No.:                                                                                                                                                                                                                                                                                                                                                                                                                                                   | SN333A, SN333C                                                                                       |                                 |                    |
| Hardware Version:                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1.0                                                                                                  |                                 |                    |
| Software Version:                                                                                                                                                                                                                                                                                                                                                                                                                                            | SN333A10008                                                                                          |                                 |                    |
| IMEI:                                                                                                                                                                                                                                                                                                                                                                                                                                                        | RF Conducted                                                                                         | 355006370004507                 |                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                              | RSE & AC power line                                                                                  | 355006370004887                 |                    |
| Operation Frequency:                                                                                                                                                                                                                                                                                                                                                                                                                                         | 802.11b/g/n(HT20):                                                                                   |                                 | 2412MHz to 2462MHz |
| Modulation Type:                                                                                                                                                                                                                                                                                                                                                                                                                                             | 802.11b:                                                                                             | DSSS (DBPSK, DQPSK, CCK)        |                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 802.11g/n:                                                                                           | OFDM (BPSK, QPSK, 16QAM, 64QAM) |                    |
| Number of Channels:                                                                                                                                                                                                                                                                                                                                                                                                                                          | 802.11b/g/n(HT20): 11                                                                                |                                 |                    |
| Channel Spacing:                                                                                                                                                                                                                                                                                                                                                                                                                                             | 5MHz                                                                                                 |                                 |                    |
| Smart System:                                                                                                                                                                                                                                                                                                                                                                                                                                                | <input checked="" type="checkbox"/> SISO                                                             | 802.11b/g/n                     |                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <input type="checkbox"/> MIMO                                                                        | 802.11b/g/n/ax: 2Tx & 2Rx       |                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <input type="checkbox"/> Diversity                                                                   | 802.11b/g : Tx & Rx             |                    |
| Antenna Type:                                                                                                                                                                                                                                                                                                                                                                                                                                                | <input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated                    |                                 |                    |
| Antenna Gain:                                                                                                                                                                                                                                                                                                                                                                                                                                                | 0.9dBi (Ant5)                                                                                        |                                 |                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Note:<br>The antenna gain are derived from the gain information report provided by the manufacturer. |                                 |                    |
| RF Cable*:                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 1dB                                                                                                  |                                 |                    |
| Note:<br>1.Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.<br>2.The two models named SN333A, SN333C are the same product except that their model names are different for different market segments. |                                                                                                      |                                 |                    |



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 7 of 120

| Operation Frequency of each channel (802.11b/g/n HT20)                                                                                                                                                                                        |           |                                   |           |         |           |         |           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------------------------------|-----------|---------|-----------|---------|-----------|
| Channel                                                                                                                                                                                                                                       | Frequency | Channel                           | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                                                                                                                                                                                                                             | 2412MHz   | 4                                 | 2427MHz   | 7       | 2442MHz   | 10      | 2457MHz   |
| 2                                                                                                                                                                                                                                             | 2417MHz   | 5                                 | 2432MHz   | 8       | 2447MHz   | 11      | 2462MHz   |
| 3                                                                                                                                                                                                                                             | 2422MHz   | 6                                 | 2437MHz   | 9       | 2452MHz   |         |           |
| Remark:<br>In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below: |           |                                   |           |         |           |         |           |
| Channel                                                                                                                                                                                                                                       |           | Frequency for 802.11 b/g/n (HT20) |           |         |           |         |           |
| The Lowest channel                                                                                                                                                                                                                            |           | 2412MHz                           |           |         |           |         |           |
| The Middle channel                                                                                                                                                                                                                            |           | 2437MHz                           |           |         |           |         |           |
| The Highest channel                                                                                                                                                                                                                           |           | 2462MHz                           |           |         |           |         |           |

## 2.5 Test Environment and Mode

| Environment Parameter                                   | 101 kPa Selected Values During Tests |            |
|---------------------------------------------------------|--------------------------------------|------------|
| Relative Humidity                                       | 44~46 % RH Ambient                   |            |
| Value                                                   | Temperature(°C)                      | Voltage(V) |
| NTNV                                                    | 22~23                                | 3.8        |
| Remark:<br>NV: Normal Voltage<br>NT: Normal Temperature |                                      |            |

## 2.6 Description of Support Units

The EUT has been tested as an independent unit.

## 2.7 Worst-case configuration and mode

Low data rate was used to test on antenna port conducted tests and radiated spurious emissions since it has the highest maximum power. Following are the worst-case data rates set for test:

| Modulation Type | SISO - Data Rate | MIMO - Data Rate |
|-----------------|------------------|------------------|
| 802.11b         | 1 Mbps           | /                |
| 802.11g         | 6 Mbps           | /                |
| 802.11n (HT 20) | MCS0 (6.5 Mbps)  | /                |



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 8 of 120

### 3 Equipment List

| RF Test Equipment                   |               |                                  |               |            |              |
|-------------------------------------|---------------|----------------------------------|---------------|------------|--------------|
| Equipment                           | Manufacturer  | Model No.                        | Inventory No. | Cal Date   | Cal Due Date |
| Shielding Room                      | Brilliant-emc | N/A                              | SUWI-04-08-01 | 11/9/2022  | 11/8/2025    |
| Temperature and humidity meter      | MingGao       | TH101B                           | SUWI-01-01-07 | 2/13/2025  | 2/12/2026    |
| Measurement Software                | Tonscend      | TST272 V2.0                      | SUWI-03-55-03 | NCR        | NCR          |
| Signal Analyzer                     | ROHDE&SCHWARZ | FSW43                            | SUWI-01-02-04 | 1/20/2025  | 1/19/2026    |
| Temperature Chamber                 | ESPEC         | SU-242                           | SUWI-01-13-02 | 5/9/2024   | 5/8/2025     |
| Wideband Radio Communication Tester | ROHDE&SCHWARZ | CMW500                           | SUWI-01-16-05 | 1/21/2025  | 1/20/2026    |
| DC Power Supply                     | HYELEC        | HY3005B                          | SUWI-01-18-01 | 1/15/2025  | 1/14/2026    |
| Power meter                         | Anritsu       | ML2495A                          | SUWI-01-31-01 | 11/19/2024 | 11/18/2025   |
| Pulse power sensor                  | Anritsu       | MA2411B                          | SUWI-01-32-01 | 11/19/2024 | 11/18/2025   |
| MXG Vector signal genitor           | KEYSIGHT      | N5182B                           | SUWI-01-38-01 | 1/15/2025  | 1/14/2026    |
| Router                              | ASUS          | GT-AXE11000(FCC ID MSQ-RTAXJF00) | SUWI-03-14-02 | NCR        | NCR          |
| Signal Analyzer                     | KEYSIGHT      | N9020A                           | SUWI-01-02-07 | 11/19/2024 | 11/18/2025   |



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 9 of 120

| CE Test System                 |               |                 |               |           |              |
|--------------------------------|---------------|-----------------|---------------|-----------|--------------|
| Equipment                      | Manufacturer  | Model No.       | Inventory No. | Cal Date  | Cal Due Date |
| Test receiver                  | ROHDE&SCHWARZ | ESR7            | SUWI-01-10-01 | 1/15/2025 | 1/14/2026    |
| Temperature and humidity meter | MingGao       | TH101B          | SUWI-01-01-06 | 2/13/2025 | 2/12/2026    |
| Artificial network             | ROHDE&SCHWARZ | ENV216          | SUWI-01-19-03 | 5/6/2024  | 5/5/2025     |
| Artificial network             | ROHDE&SCHWARZ | ENV216          | SUWI-01-19-04 | 5/6/2024  | 5/5/2025     |
| Measurement Software           | Tonscend      | JS32-CE 4.0.0.2 | SUWI-02-09-05 | NCR       | NCR          |

| RSE Test Equipment             |                            |                  |               |            |              |
|--------------------------------|----------------------------|------------------|---------------|------------|--------------|
| Equipment                      | Manufacturer               | Model No.        | Inventory No. | Cal Date   | Cal Due Date |
| Semi-Anechoic Chamber          | Brilliant-emc              | N/A              | SUWI-04-02-01 | 6/3/2023   | 6/2/2026     |
| Temperature and humidity meter | MingGao                    | TH101B           | SUWI-01-01-05 | 2/13/2025  | 2/12/2026    |
| Signal Analyzer                | ROHDE&SCHWARZ              | FSW43            | SUWI-01-02-04 | 1/20/2025  | 1/19/2026    |
| Signal Analyzer                | KEYSIGHT                   | N9020A           | SUWI-01-02-07 | 11/21/2024 | 11/20/2025   |
| Test receiver                  | ROHDE&SCHWARZ              | ESR7             | SUWI-01-10-01 | 1/15/2025  | 1/14/2026    |
| Receiving antenna              | SCHWRZBECK MESS-ELEKTRONIK | VULB 9163        | SUWI-01-11-01 | 5/13/2023  | 5/12/2025    |
| Receiving antenna              | SCHWRZBECK MESS-ELEKTRONIK | BBHA 9120D       | SUWI-01-11-02 | 5/13/2023  | 5/12/2025    |
| Receiving antenna              | SCHWRZBECK MESS-ELEKTRONIK | BBHA 9170        | SUWI-01-11-03 | 5/12/2023  | 5/11/2025    |
| Active Loop Antenna            | SCHWRZBECK MESS-ELEKTRONIK | FMZB 1519B       | SUWI-01-21-01 | 5/13/2023  | 5/12/2025    |
| Amplifier                      | Tonscend                   | TAP9K3G32        | SUWI-01-14-06 | 11/19/2024 | 11/24/2025   |
| Amplifier                      | Tonscend                   | TAP01018050      | SUWI-01-14-04 | 11/19/2024 | 11/24/2025   |
| Amplifier                      | Tonscend                   | TAP30M7G30       | SUWI-01-14-05 | 11/19/2024 | 11/24/2025   |
| Measurement Software           | Tonscend                   | JS32-RE V4.0.0.0 | SUWI-02-09-04 | NCR        | NCR          |

Remark: NCR=No Calibration Requirement.



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 10 of 120

### 4 Measurement Uncertainty (95% confidence levels, k=2)

| No. | Item                          | Measurement Uncertainty               |
|-----|-------------------------------|---------------------------------------|
| 1   | Total RF power, conducted     | $\pm 0.54\text{dB}$                   |
| 2   | RF power density, conducted   | $\pm 1.03\text{dB}$                   |
| 3   | Spurious emissions, conducted | $\pm 0.54\text{dB}$                   |
| 4   | Radio Frequency               | 1%                                    |
| 5   | Duty Cycle                    | $\pm 0.37\%$                          |
| 6   | Occupied Bandwidth            | 1%                                    |
| 7   | Conduction Emission           | $\pm 2.90\text{dB}$ (150kHz to 30MHz) |
| 8   | Radiated Emission             | $\pm 3.13\text{dB}$ (9k -30MHz)       |
|     |                               | $\pm 4.88\text{dB}$ (30M -1GHz)       |
|     |                               | $\pm 4.75\text{dB}$ (1GHz to 18GHz)   |
|     |                               | $\pm 4.77\text{dB}$ (Above 18GHz)     |

**Remark:**

The  $U_{\text{lab}}$  (lab Uncertainty) is less than  $U_{\text{CISPR/ETSI}}$  (CISPR/ETSI Uncertainty), so the test results

– compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

– non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 11 of 120

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 47 CFR Part 15C Section 15.203 /247(b) |
| <p>15.203 requirement:<br/>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:<br/>The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>The antenna is Integrated Antenna and no consideration of replacement.<br/>The best case gain of the antenna is 0.9dBi(ANT 5).</p> <p><i>Note:</i><br/><i>The antenna gain are derived from the gain information report provided by the manufacturer.</i></p> <p><i>Remark:</i><br/><i>As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.</i></p> |                                        |



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400032006

Rev.: 01

Page: 12 of 120

### 5.2 AC Power Line Conducted Emissions

|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |              |           |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
| Test Requirement:                                | 47 CFR Part 15C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |              |           |
| Test Method:                                     | ANSI C63.10: 2013 Section 6.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |              |           |
| Test Frequency Range:                            | 150kHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |              |           |
| Receiver Setup:                                  | RBW = 9kHz, VBW = 30kHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |              |           |
| Limit:                                           | Frequency range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Limit (dBuV) |           |
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Quasi-peak   | Average   |
|                                                  | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 66 to 56*    | 56 to 46* |
|                                                  | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 56           | 46        |
|                                                  | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 60           | 50        |
| * Decreases with the logarithm of the frequency. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |              |           |
| Test Procedure:                                  | <p>1) The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</p> |              |           |
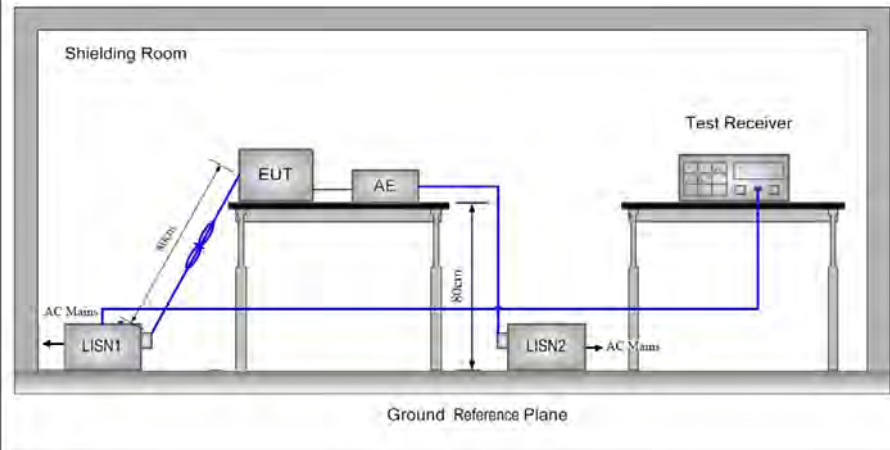
|                        |                                                                                                                              |
|------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Test Setup:            |                                            |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.<br>Adapter + Transmitting mode. |
| Final Test Mode:       | Refer to section 2.7 for details.<br>Only the worst case is recorded in the report.                                          |
| Instruments Used:      | Refer to section 3 for details.                                                                                              |
| Test Results:          | Pass                                                                                                                         |



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400032006

Rev.: 01

Page: 14 of 120

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

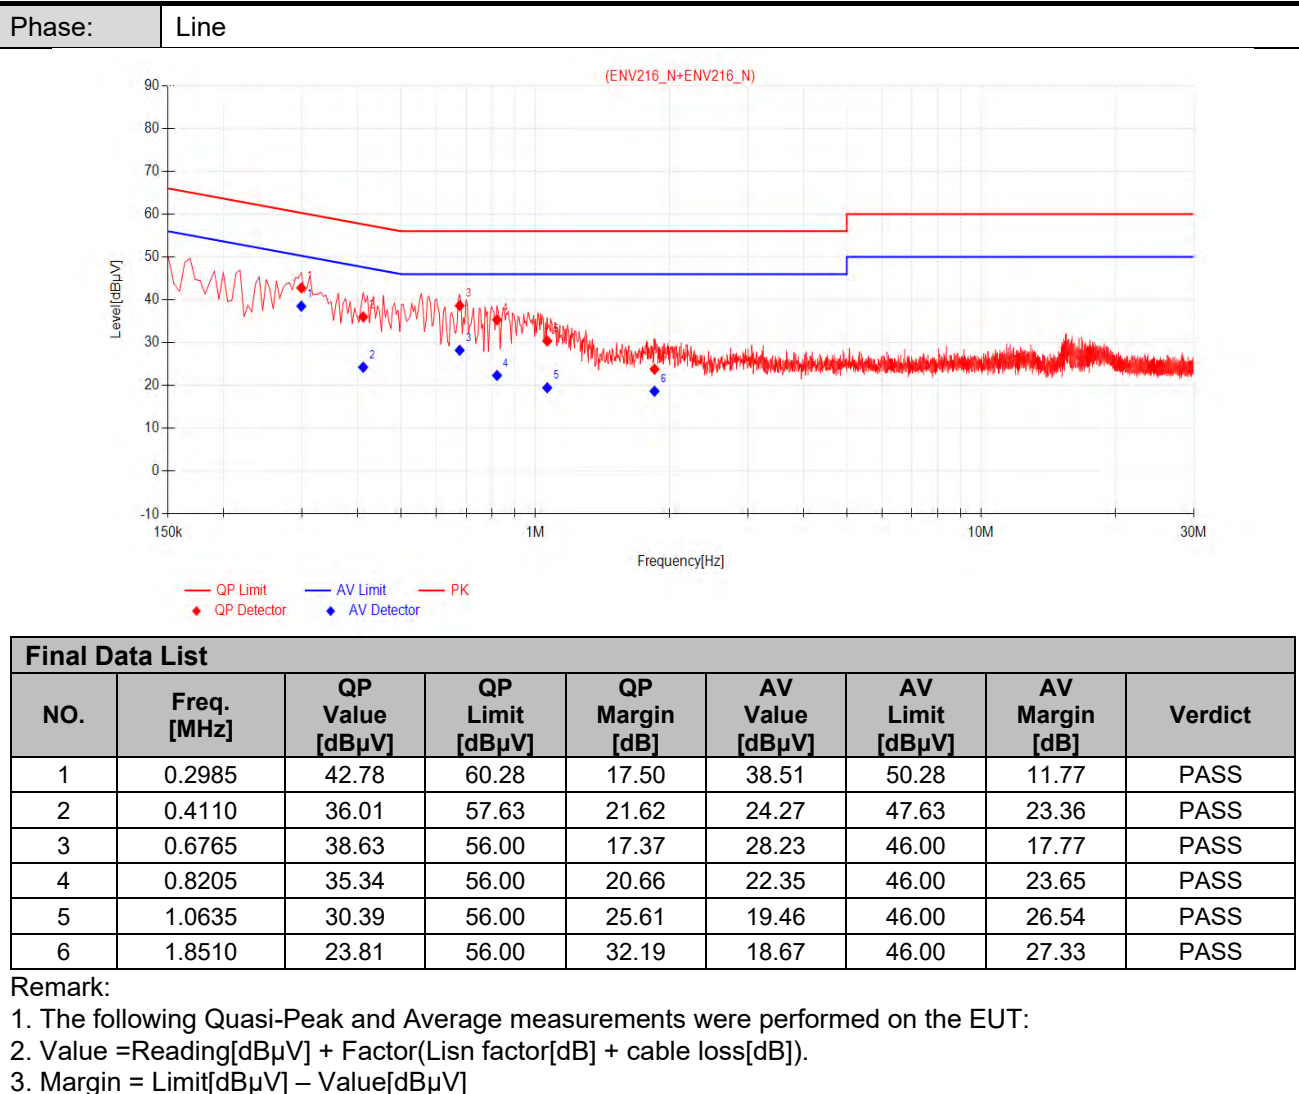




# SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400032006

Rev.: 01


Page: 15 of 120

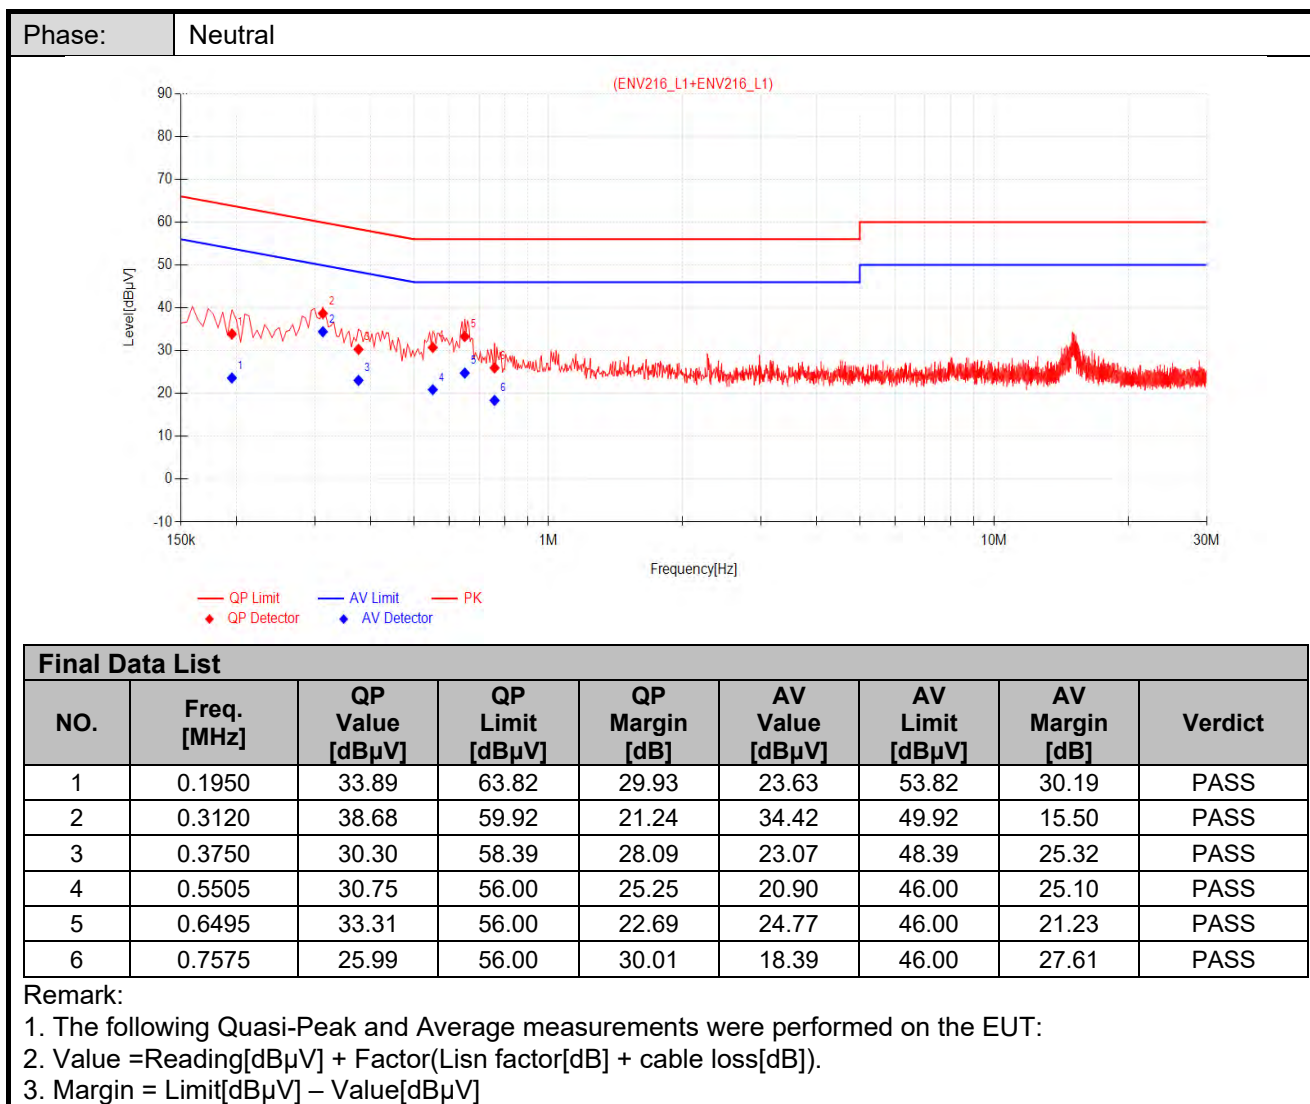


### 5.3 Duty Cycle
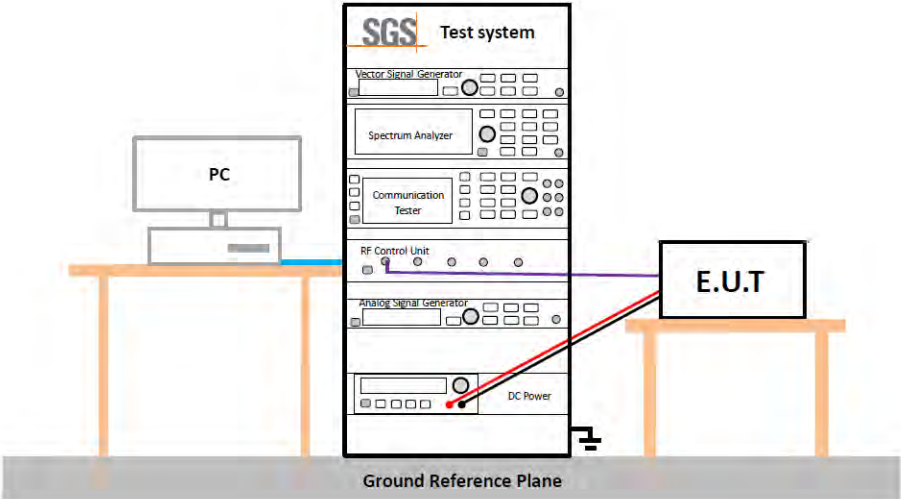
|                                             |                                                                                     |
|---------------------------------------------|-------------------------------------------------------------------------------------|
| Test Requirement:                           | ANSI C63.10 :2013 Section 11.6                                                      |
| Test Method:                                | ANSI C63.10 :2013 Section 11.6                                                      |
| Test Setup:                                 |  |
| Instruments Used:                           | Refer to section 3 for details                                                      |
| Exploratory Test Mode:                      | Transmitting with all kind of modulations, data rates                               |
| Final Test Mode:                            | Refer to section 2.7 for details.                                                   |
| Limit:                                      | No restriction limits                                                               |
| Test Results:                               | For Report Purpose                                                                  |
| The detailed test data see: <b>Appendix</b> |                                                                                     |


## 5.4 Conducted Output Power
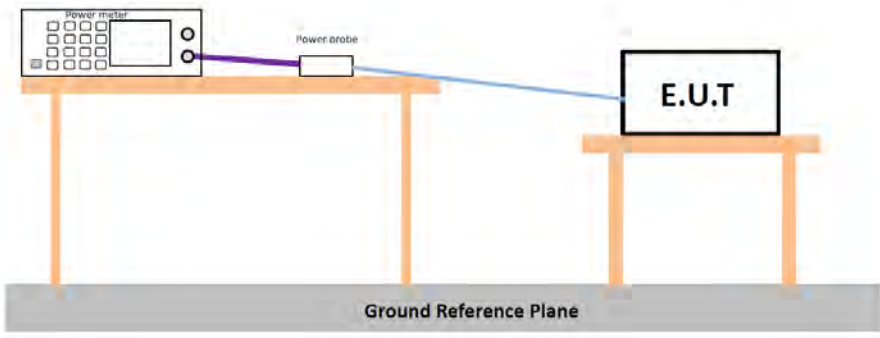
|                                             |                                                                                                                                             |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:                           | 47 CFR Part 15C Section 15.247 (b)(3)                                                                                                       |
| Test Method:                                | ANSI C63.10 :2013 Section 11.9.1.3                                                                                                          |
| Test Setup:                                 |  <p>* Test with power meter (Detector function: Peak)</p> |
| Test Instruments:                           | Refer to section 3 for details.                                                                                                             |
| Exploratory Test Mode:                      | Transmitting with all kind of modulations, data rates                                                                                       |
| Final Test Mode:                            | Refer to section 2.7 for details.                                                                                                           |
| Limit:                                      | 30dBm                                                                                                                                       |
| Test Results:                               | Pass                                                                                                                                        |
| The detailed test data see: <b>Appendix</b> |                                                                                                                                             |


## 5.5 DTS (6 dB) Bandwidth & 99% Occupied Bandwidth
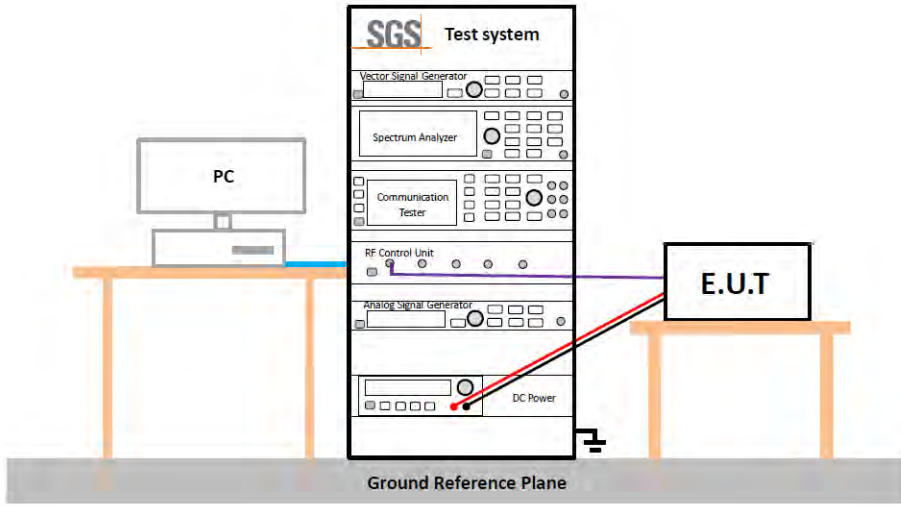
|                                             |                                                                                     |
|---------------------------------------------|-------------------------------------------------------------------------------------|
| Test Requirement:                           | 47 CFR Part 15C Section 15.247 (a)(2)                                               |
| Test Method:                                | ANSI C63.10: 2013 Section 11.8 Option 2 / 6.9.3                                     |
| Test Setup:                                 |  |
| Instruments Used:                           | Refer to section 3 for details.                                                     |
| Exploratory Test Mode:                      | Transmitting with all kind of modulations, data rates                               |
| Final Test Mode:                            | Refer to section 2.7 for details.                                                   |
| Limit:                                      | $\geq 500$ kHz for DTS Bandwidth                                                    |
| Test Results:                               | Pass                                                                                |
| The detailed test data see: <b>Appendix</b> |                                                                                     |


## 5.6 Power Spectral Density
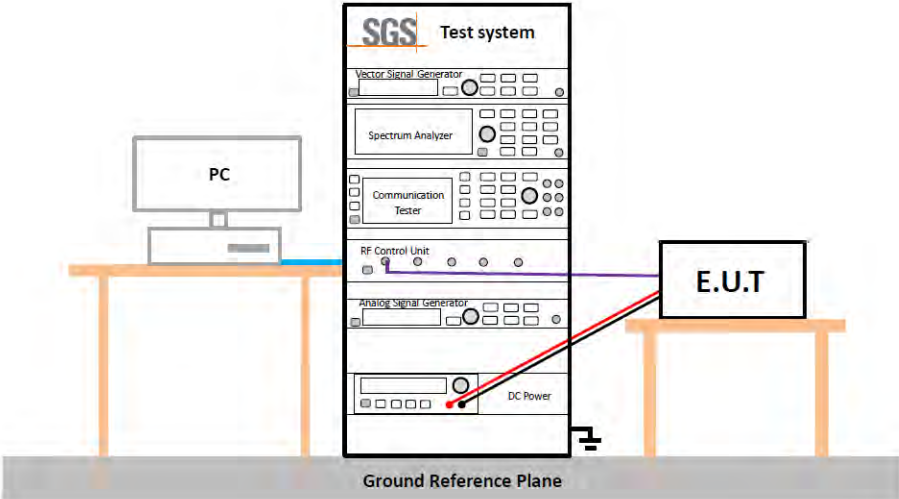
|                                             |                                                                                     |
|---------------------------------------------|-------------------------------------------------------------------------------------|
| Test Requirement:                           | 47 CFR Part 15C Section 15.247 (e)                                                  |
| Test Method:                                | ANSI C63.10 :2013 Section 11.10.2                                                   |
| Test Setup:                                 |  |
| Test Instruments:                           | Refer to section 3 for details.                                                     |
| Exploratory Test Mode:                      | Transmitting with all kind of modulations, data rates                               |
| Final Test Mode:                            | Refer to section 2.7 for details.                                                   |
| Limit:                                      | $\leq 8.00\text{dBm}/3\text{kHz}$                                                   |
| Test Results:                               | Pass                                                                                |
| The detailed test data see: <b>Appendix</b> |                                                                                     |

## 5.7 Band-edge for RF Conducted Emissions
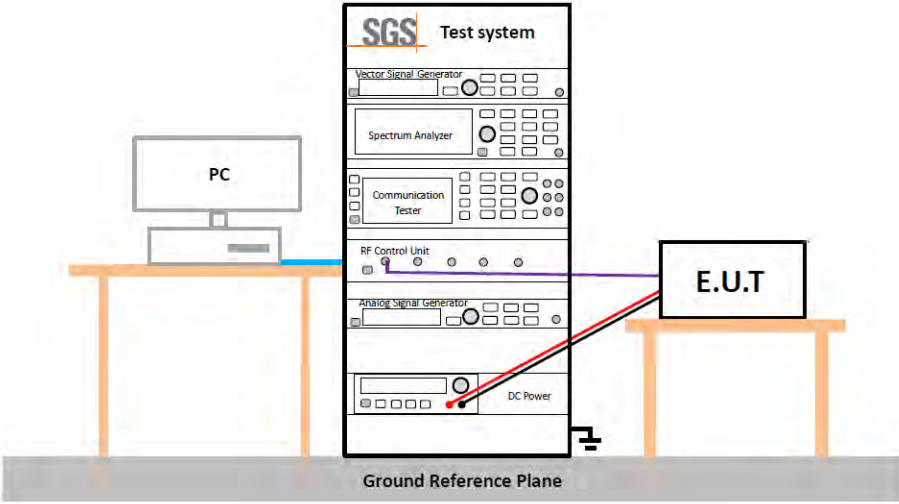
|                                             |                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:                           | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:                                | ANSI C63.10: 2013 Section 11.11                                                                                                                                                                                                                                                                                                                                                         |
| Test Setup:                                 |                                                                                                                                                                                                                                                                                                      |
| Instruments Used:                           | Refer to section 3 for details.                                                                                                                                                                                                                                                                                                                                                         |
| Exploratory Test Mode:                      | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                                                                                                                                   |
| Final Test Mode:                            | Refer to section 2.7 for details.                                                                                                                                                                                                                                                                                                                                                       |
| Limit:                                      | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Results:                               | Pass                                                                                                                                                                                                                                                                                                                                                                                    |
| The detailed test data see: <b>Appendix</b> |                                                                                                                                                                                                                                                                                                                                                                                         |

## 5.8 RF Conducted Spurious Emissions
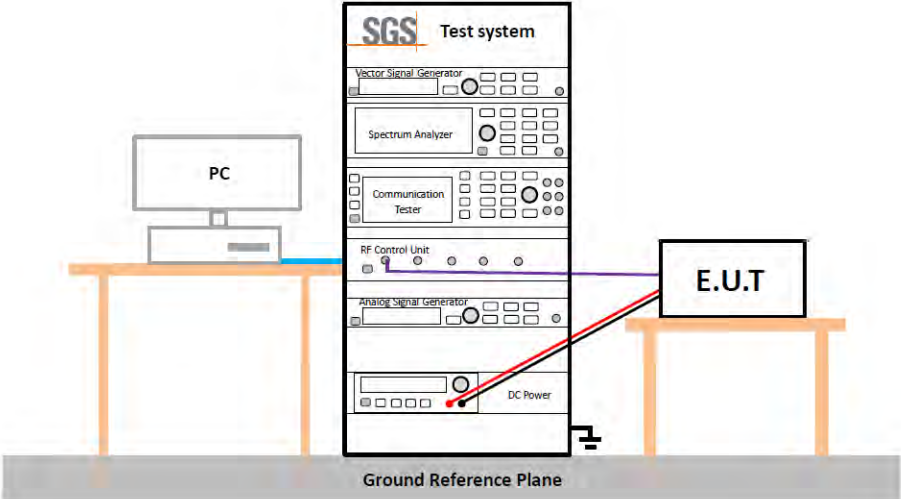
|                                             |                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:                           | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:                                | ANSI C63.10: 2013 Section 11.11                                                                                                                                                                                                                                                                                                                                                         |
| Test Setup:                                 |                                                                                                                                                                                                                                                                                                      |
| Instruments Used:                           | Refer to section 3 for details.                                                                                                                                                                                                                                                                                                                                                         |
| Exploratory Test Mode:                      | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                                                                                                                                   |
| Final Test Mode:                            | Refer to section 2.7 for details.                                                                                                                                                                                                                                                                                                                                                       |
| Limit:                                      | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Results:                               | Pass                                                                                                                                                                                                                                                                                                                                                                                    |
| The detailed test data see: <b>Appendix</b> |                                                                                                                                                                                                                                                                                                                                                                                         |



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 22 of 120

### 5.9 Radiated Spurious Emissions

|                   |                                                                                                                                                                                                                                                                               |                                     |                   |            |                             |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------|------------|-----------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205                                                                                                                                                                                                                                     |                                     |                   |            |                             |
| Test Method:      | ANSI C63.10 :2013 Section 11.12                                                                                                                                                                                                                                               |                                     |                   |            |                             |
| Test Site:        | Measurement Distance: 3m (Semi-Anechoic Chamber)                                                                                                                                                                                                                              |                                     |                   |            |                             |
| Test Frequency:   | 9kHz ~ 25GHz                                                                                                                                                                                                                                                                  |                                     |                   |            |                             |
| Receiver Setup:   | Frequency                                                                                                                                                                                                                                                                     | Detector                            | RBW               | VBW        | Remark                      |
|                   | 0.009MHz-0.090MHz                                                                                                                                                                                                                                                             | Peak                                | 10kHz             | 30kHz      | Peak                        |
|                   | 0.009MHz-0.090MHz                                                                                                                                                                                                                                                             | Average                             | 10kHz             | 30kHz      | Average                     |
|                   | 0.090MHz-0.110MHz                                                                                                                                                                                                                                                             | Quasi-peak                          | 10kHz             | 30kHz      | Quasi-peak                  |
|                   | 0.110MHz-0.490MHz                                                                                                                                                                                                                                                             | Peak                                | 10kHz             | 30kHz      | Peak                        |
|                   | 0.110MHz-0.490MHz                                                                                                                                                                                                                                                             | Average                             | 10kHz             | 30kHz      | Average                     |
|                   | 0.490MHz -30MHz                                                                                                                                                                                                                                                               | Quasi-peak                          | 10kHz             | 30kHz      | Quasi-peak                  |
|                   | 30MHz-1GHz                                                                                                                                                                                                                                                                    | Quasi-peak                          | 120kHz            | 300kHz     | Quasi-peak                  |
|                   | Above 1GHz                                                                                                                                                                                                                                                                    | Peak                                | 1MHz              | 3MHz       | Peak                        |
|                   |                                                                                                                                                                                                                                                                               | Peak                                | 1MHz              | 3MHz       | Peak                        |
| Limit:            | Frequency                                                                                                                                                                                                                                                                     | Field strength<br>(microvolt/meter) | Limit<br>(dBuV/m) | Remark     | Measurement<br>distance (m) |
|                   | 0.009MHz-0.490MHz                                                                                                                                                                                                                                                             | 2400/F(kHz)                         | -                 | -          | 300                         |
|                   | 0.490MHz-1.705MHz                                                                                                                                                                                                                                                             | 24000/F(kHz)                        | -                 | -          | 30                          |
|                   | 1.705MHz-30MHz                                                                                                                                                                                                                                                                | 30                                  | -                 | -          | 30                          |
|                   | 30MHz-88MHz                                                                                                                                                                                                                                                                   | 100                                 | 40.0              | Quasi-peak | 3                           |
|                   | 88MHz-216MHz                                                                                                                                                                                                                                                                  | 150                                 | 43.5              | Quasi-peak | 3                           |
|                   | 216MHz-960MHz                                                                                                                                                                                                                                                                 | 200                                 | 46.0              | Quasi-peak | 3                           |
|                   | 960MHz-1GHz                                                                                                                                                                                                                                                                   | 500                                 | 54.0              | Quasi-peak | 3                           |
|                   | Above 1GHz                                                                                                                                                                                                                                                                    | 500                                 | 54.0              | Average    | 3                           |
|                   | Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. |                                     |                   |            |                             |

### Test Setup:

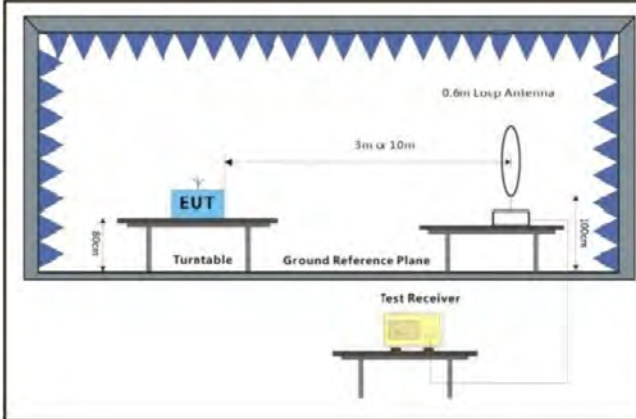


Figure 1. Below 30MHz

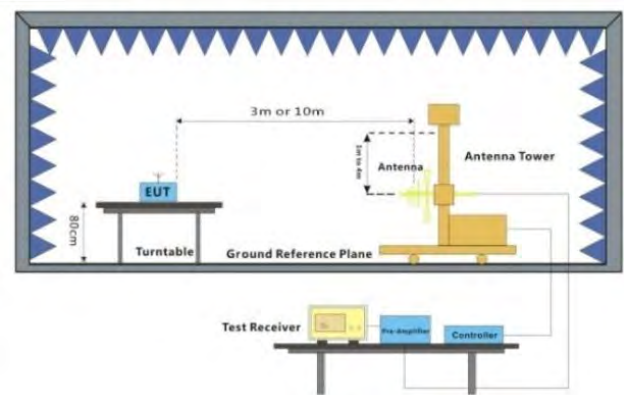


Figure 2. 30MHz to 1GHz

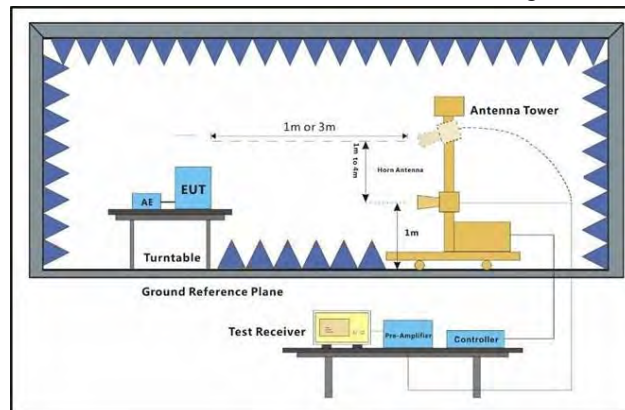


Figure 3. Above 1 GHz

### Test Procedure:

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Distance from antenna to EUT is 1m for measurements >18GHz).
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- Test the EUT in the lowest channel, the middle channel, the Highest



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 24 of 120

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                             | <p>channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> <p>j. The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported</p> <p>k. The disturbance above 18GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed.</p> <p>l. At a measurement distance of 1 meter the limit line was increased by <math>20 \cdot \text{LOG}(3/1) = 9.54 \text{ dB}</math>.</p>                                                                                                                                                                                                                                                                                                                                                                    |
| Test Configuration:                         | <p>Measurements below 30MHz</p> <ul style="list-style-type: none"> <li>• RBW = 10 kHz</li> <li>• VBW = 30 kHz</li> <li>• Detector = Peak &amp; Average &amp; Quasi-peak</li> <li>• Trace mode = max hold</li> </ul> <p>Measurements Below 1000MHz</p> <ul style="list-style-type: none"> <li>• RBW = 120 kHz</li> <li>• VBW = 300 kHz</li> <li>• Detector = Quasi-peak</li> <li>• Trace mode = max hold</li> </ul> <p>Peak Measurements Above 1000 MHz</p> <ul style="list-style-type: none"> <li>• RBW = 1 MHz</li> <li>• VBW <math>\geq 3 \text{ MHz}</math></li> <li>• Detector = Peak</li> <li>• Sweep time = auto</li> <li>• Trace mode = max hold</li> </ul> <p>Average Measurements Above 1000MHz</p> <ul style="list-style-type: none"> <li>• RBW = 1 MHz</li> <li>• VBW = 10 Hz, when duty cycle is no less than 98 percent.</li> <li>• VBW <math>\geq 1/T</math>, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</li> </ul> |
| Exploratory Test Mode:                      | <p>Transmitting with all kind of modulations, data rates.</p> <p>Adapter + Transmitting mode.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Final Test Mode:                            | <p>Refer to section 2.7 for details.</p> <p>For below 1GHz part, through pre-scan all channels, but only the worst case is recorded in the report.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Instruments Used:                           | Refer to section 3 for details.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Test Results:                               | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| The detailed test data see: <b>Appendix</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## 5.10 Restricted bands around fundamental frequency

|                   |                                                  |                |               |
|-------------------|--------------------------------------------------|----------------|---------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205        |                |               |
| Test Method:      | ANSI C63.10: 2013 Section 11.12                  |                |               |
| Test Site:        | Measurement Distance: 3m (Semi-Anechoic Chamber) |                |               |
| Limit:            | Frequency                                        | Limit (dBuV/m) | Remark        |
|                   | 30MHz-88MHz                                      | 40.0           | Quasi-peak    |
|                   | 88MHz-216MHz                                     | 43.5           | Quasi-peak    |
|                   | 216MHz-960MHz                                    | 46.0           | Quasi-peak    |
|                   | 960MHz-1GHz                                      | 54.0           | Quasi-peak    |
|                   | Above 1GHz                                       | 54.0           | Average Value |
|                   |                                                  | 74.0           | Peak Value    |

Test Setup:

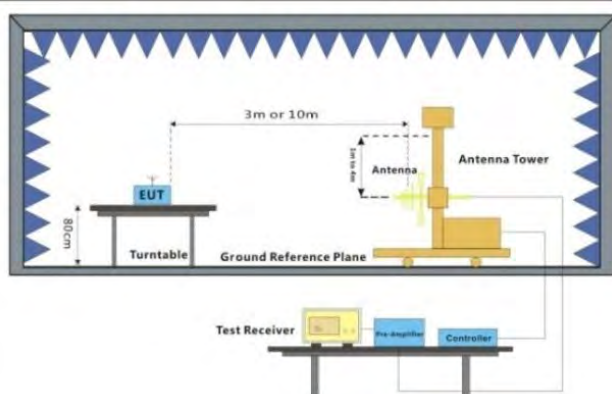


Figure 1. 30MHz to 1GHz

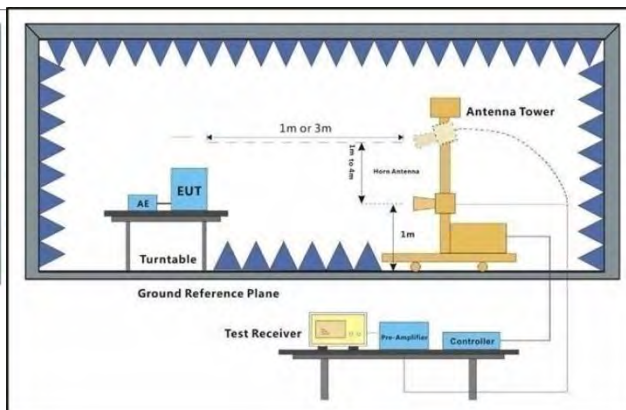


Figure 2. Above 1 GHz

# SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 26 of 120

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Procedure:                             | <p>a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</p> <p>h. Test the EUT in the lowest channel , the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p> |
| Test Configuration:                         | <p>Measurements Below 1000MHz</p> <ul style="list-style-type: none"> <li>• RBW = 120 kHz</li> <li>• VBW = 300 kHz</li> <li>• Detector = Quasi-peak</li> <li>• Trace mode = max hold</li> </ul> <p>Peak Measurements Above 1000 MHz</p> <ul style="list-style-type: none"> <li>• RBW = 1 MHz</li> <li>• VBW ≥ 3 MHz</li> <li>• Detector = Peak</li> <li>• Sweep time = auto</li> <li>• Trace mode = max hold</li> </ul> <p>Average Measurements Above 1000MHz</p> <ul style="list-style-type: none"> <li>• RBW = 1 MHz</li> <li>• VBW = 10 Hz, when duty cycle is no less than 98 percent.</li> <li>• VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Exploratory Test Mode:                      | Transmitting with all kind of modulations, data rates.<br>Adapter + Transmitting mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Final Test Mode:                            | Refer to section 2.7 for details.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Instruments Used:                           | Refer to section 3 for details.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Test Results:                               | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| The detailed test data see: <b>Appendix</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |



## **SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.**

Report No.: SUCR250400032006

Rev.: 01

Page: 27 of 120

### **6 Photographs - Setup Photos**

Refer to Appendix A.2 BT&WLAN&NFC Setup Photos.



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 28 of 120

## 7 Appendix

### 1. Duty Cycle

#### 1.1 Test Result

##### 1.1.1 Ant1

| Ant1           |         |                 |           |             |                |                                   |                       |
|----------------|---------|-----------------|-----------|-------------|----------------|-----------------------------------|-----------------------|
| Mode           | TX Type | Frequency (MHz) | T_on (ms) | Period (ms) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) | Max. DC Variation (%) |
| 802.11b        | SISO    | 2412            | 100.000   | 100.000     | 100.00         | 0.00                              | 0.00                  |
|                |         | 2437            | 100.000   | 100.000     | 100.00         | 0.00                              | 0.00                  |
|                |         | 2462            | 100.000   | 100.000     | 100.00         | 0.00                              | 0.00                  |
| 802.11g        | SISO    | 2412            | 100.000   | 100.000     | 100.00         | 0.00                              | 0.00                  |
|                |         | 2437            | 100.000   | 100.000     | 100.00         | 0.00                              | 0.00                  |
|                |         | 2462            | 100.000   | 100.000     | 100.00         | 0.00                              | 0.00                  |
| 802.11n (HT20) | SISO    | 2412            | 100.000   | 100.000     | 100.00         | 0.00                              | 0.00                  |
|                |         | 2437            | 100.000   | 100.000     | 100.00         | 0.00                              | 0.00                  |
|                |         | 2462            | 100.000   | 100.000     | 100.00         | 0.00                              | 0.00                  |




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 29 of 120

1.2 Test Graph

1.2.1 Ant1

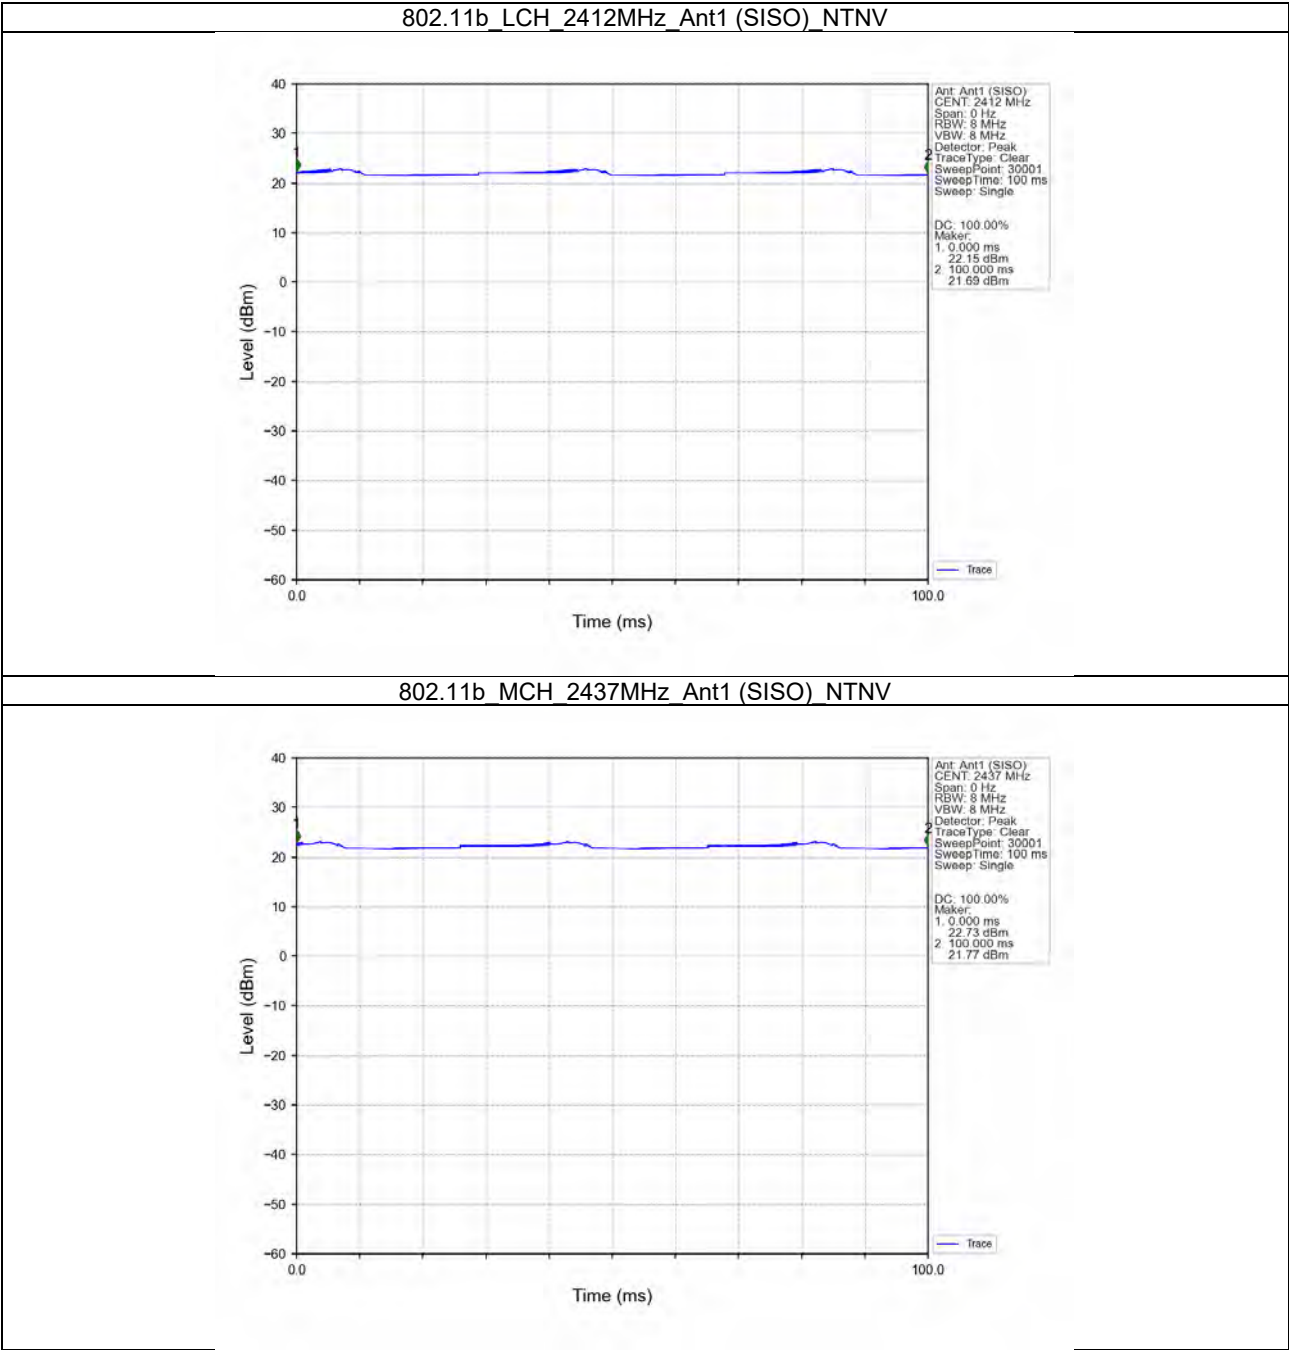





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 30 of 120

802.11b\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

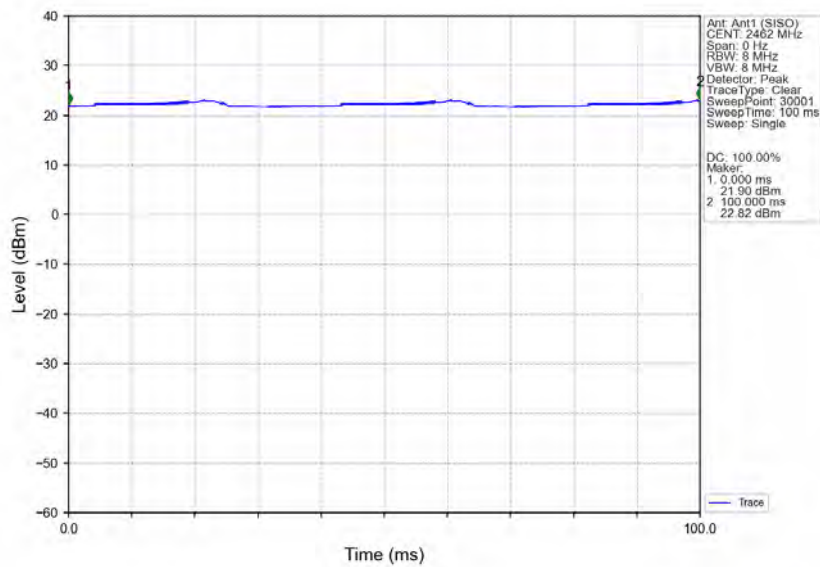

802.11g\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

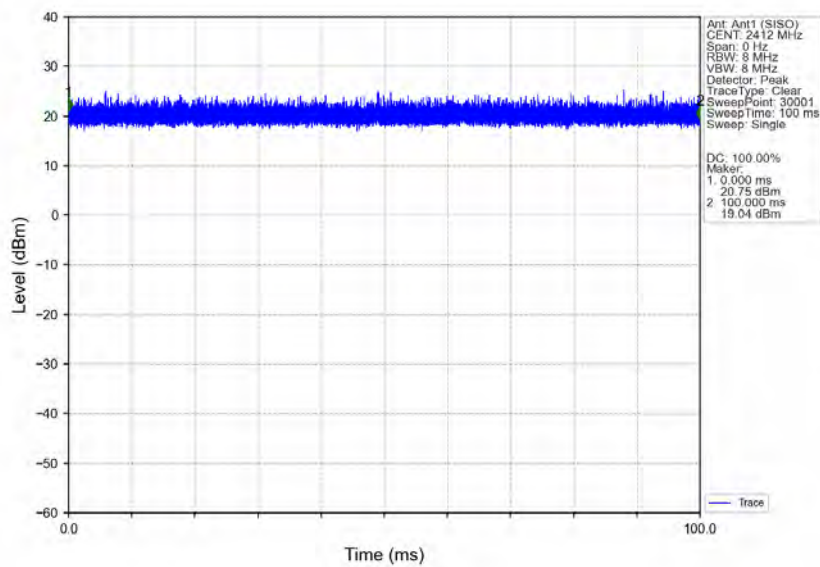





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 31 of 120

802.11g\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

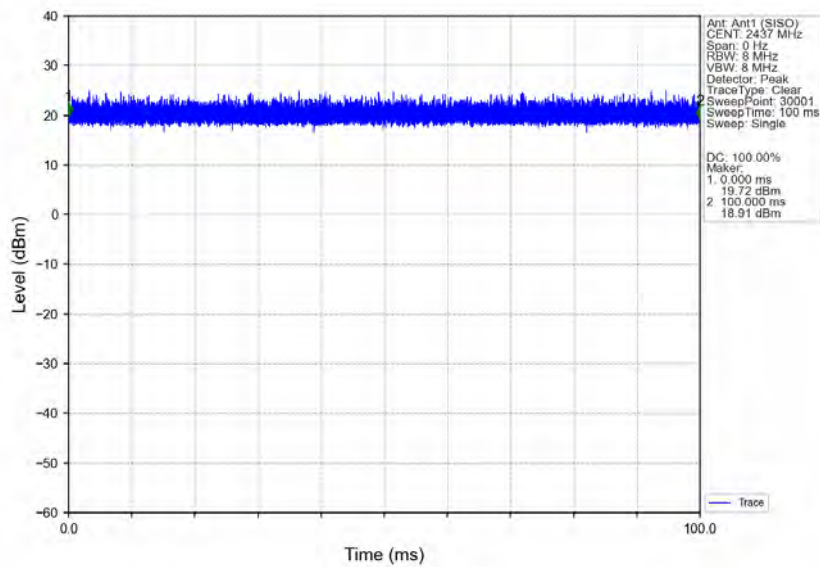

802.11g\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

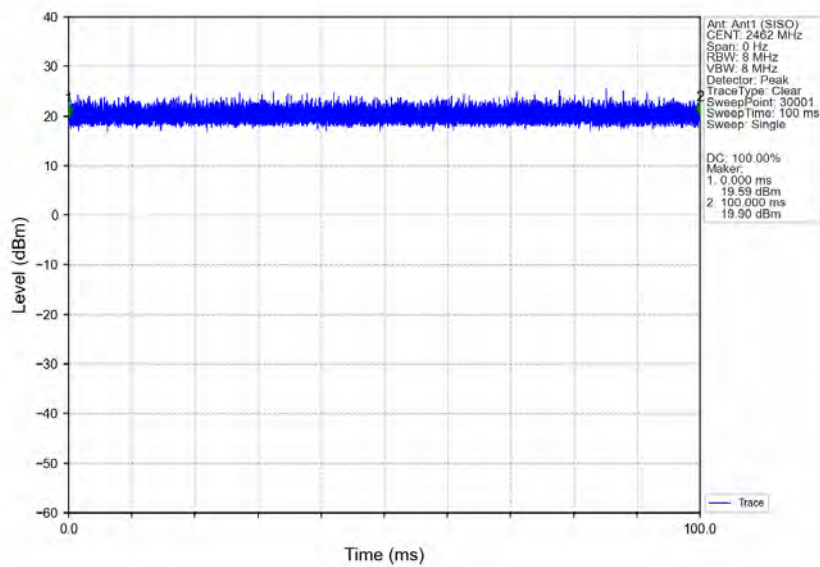





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 32 of 120

802.11n(HT20)\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

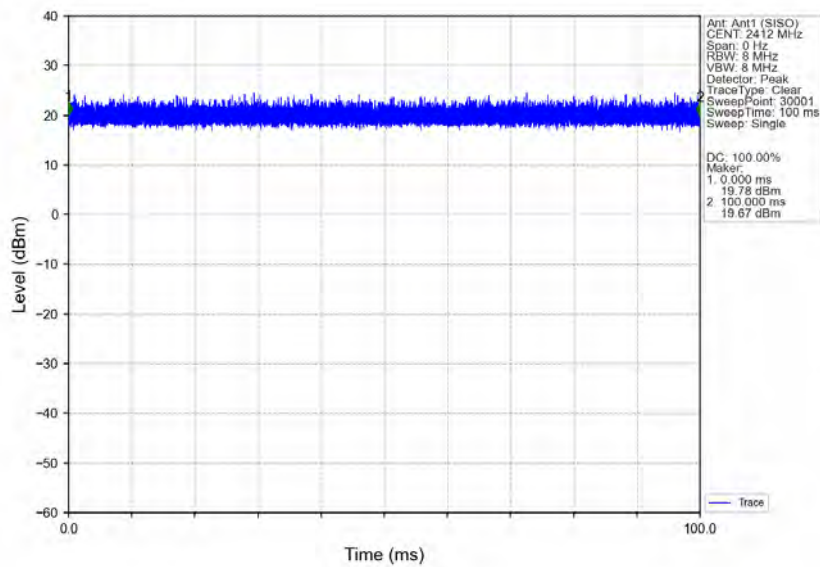


802.11n(HT20)\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

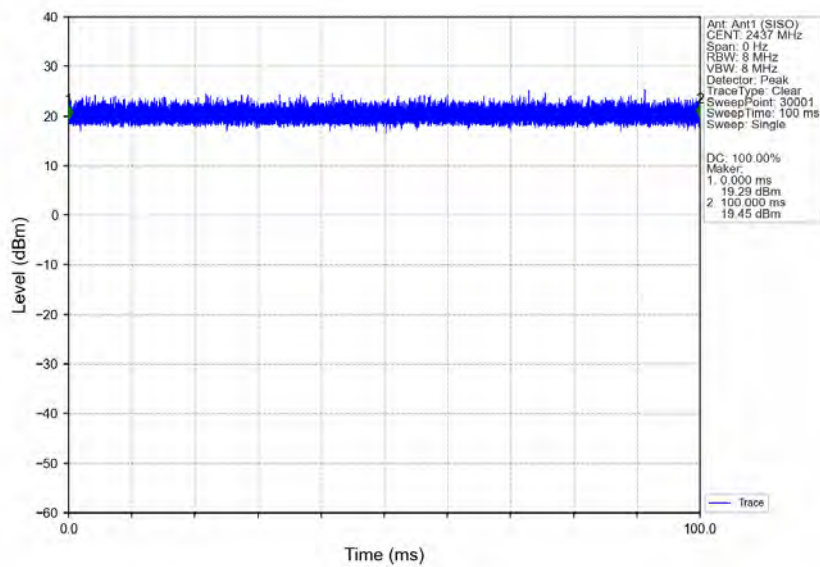



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 33 of 120

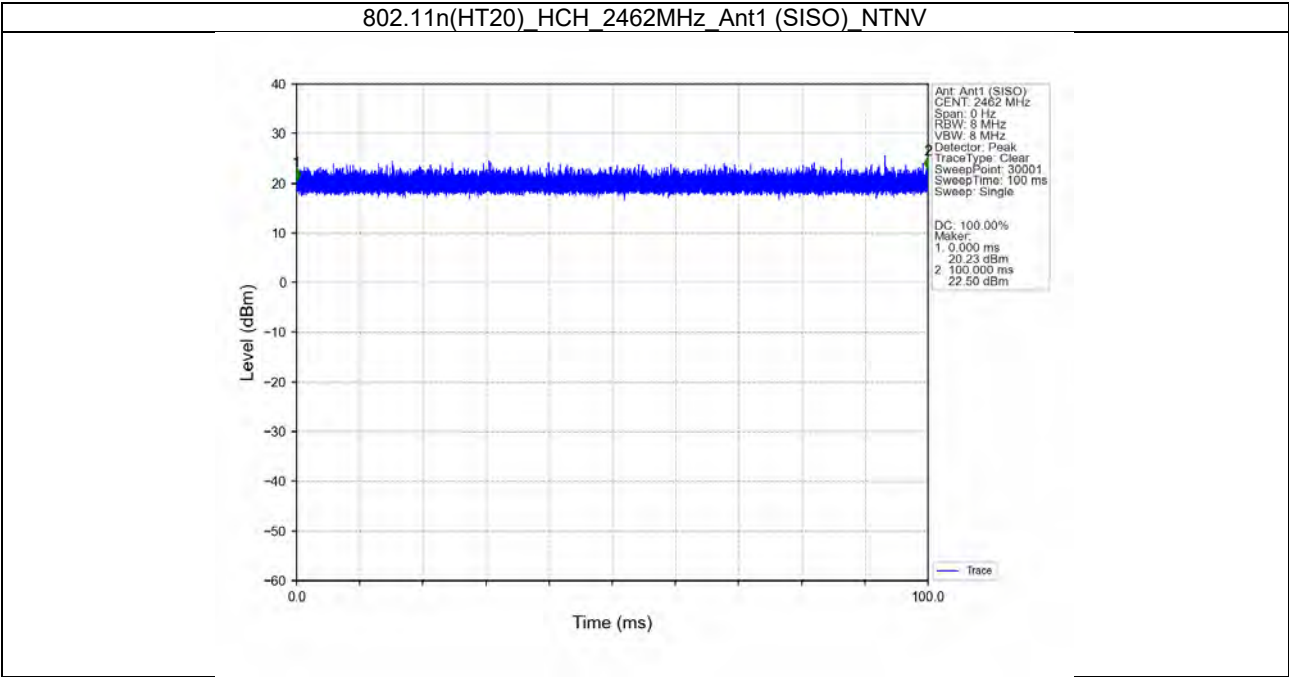



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 34 of 120

## 2. Bandwidth

### 2.1 Test Result

#### 2.1.1 OBW

| Mode           | TX Type | Frequency (MHz) | ANT | 99% Occupied Bandwidth (MHz) |       | Verdict |
|----------------|---------|-----------------|-----|------------------------------|-------|---------|
|                |         |                 |     | Result                       | Limit |         |
| 802.11b        | SISO    | 2412            | 1   | 12.952                       | /     | Pass    |
|                |         | 2437            | 1   | 12.980                       | /     | Pass    |
|                |         | 2462            | 1   | 12.901                       | /     | Pass    |
| 802.11g        | SISO    | 2412            | 1   | 17.718                       | /     | Pass    |
|                |         | 2437            | 1   | 17.700                       | /     | Pass    |
|                |         | 2462            | 1   | 17.642                       | /     | Pass    |
| 802.11n (HT20) | SISO    | 2412            | 1   | 18.413                       | /     | Pass    |
|                |         | 2437            | 1   | 18.542                       | /     | Pass    |
|                |         | 2462            | 1   | 18.352                       | /     | Pass    |

#### 2.1.2 6dB BW

| Mode           | TX Type | Frequency (MHz) | ANT | 6dB Bandwidth (MHz) |            | Verdict |
|----------------|---------|-----------------|-----|---------------------|------------|---------|
|                |         |                 |     | Result              | Limit      |         |
| 802.11b        | SISO    | 2412            | 1   | 8.099               | $\geq 0.5$ | Pass    |
|                |         | 2437            | 1   | 8.103               | $\geq 0.5$ | Pass    |
|                |         | 2462            | 1   | 8.070               | $\geq 0.5$ | Pass    |
| 802.11g        | SISO    | 2412            | 1   | 16.397              | $\geq 0.5$ | Pass    |
|                |         | 2437            | 1   | 16.375              | $\geq 0.5$ | Pass    |
|                |         | 2462            | 1   | 16.362              | $\geq 0.5$ | Pass    |
| 802.11n (HT20) | SISO    | 2412            | 1   | 17.633              | $\geq 0.5$ | Pass    |
|                |         | 2437            | 1   | 17.648              | $\geq 0.5$ | Pass    |
|                |         | 2462            | 1   | 17.620              | $\geq 0.5$ | Pass    |




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 35 of 120

2.2 Test Graph

2.2.1 OBW

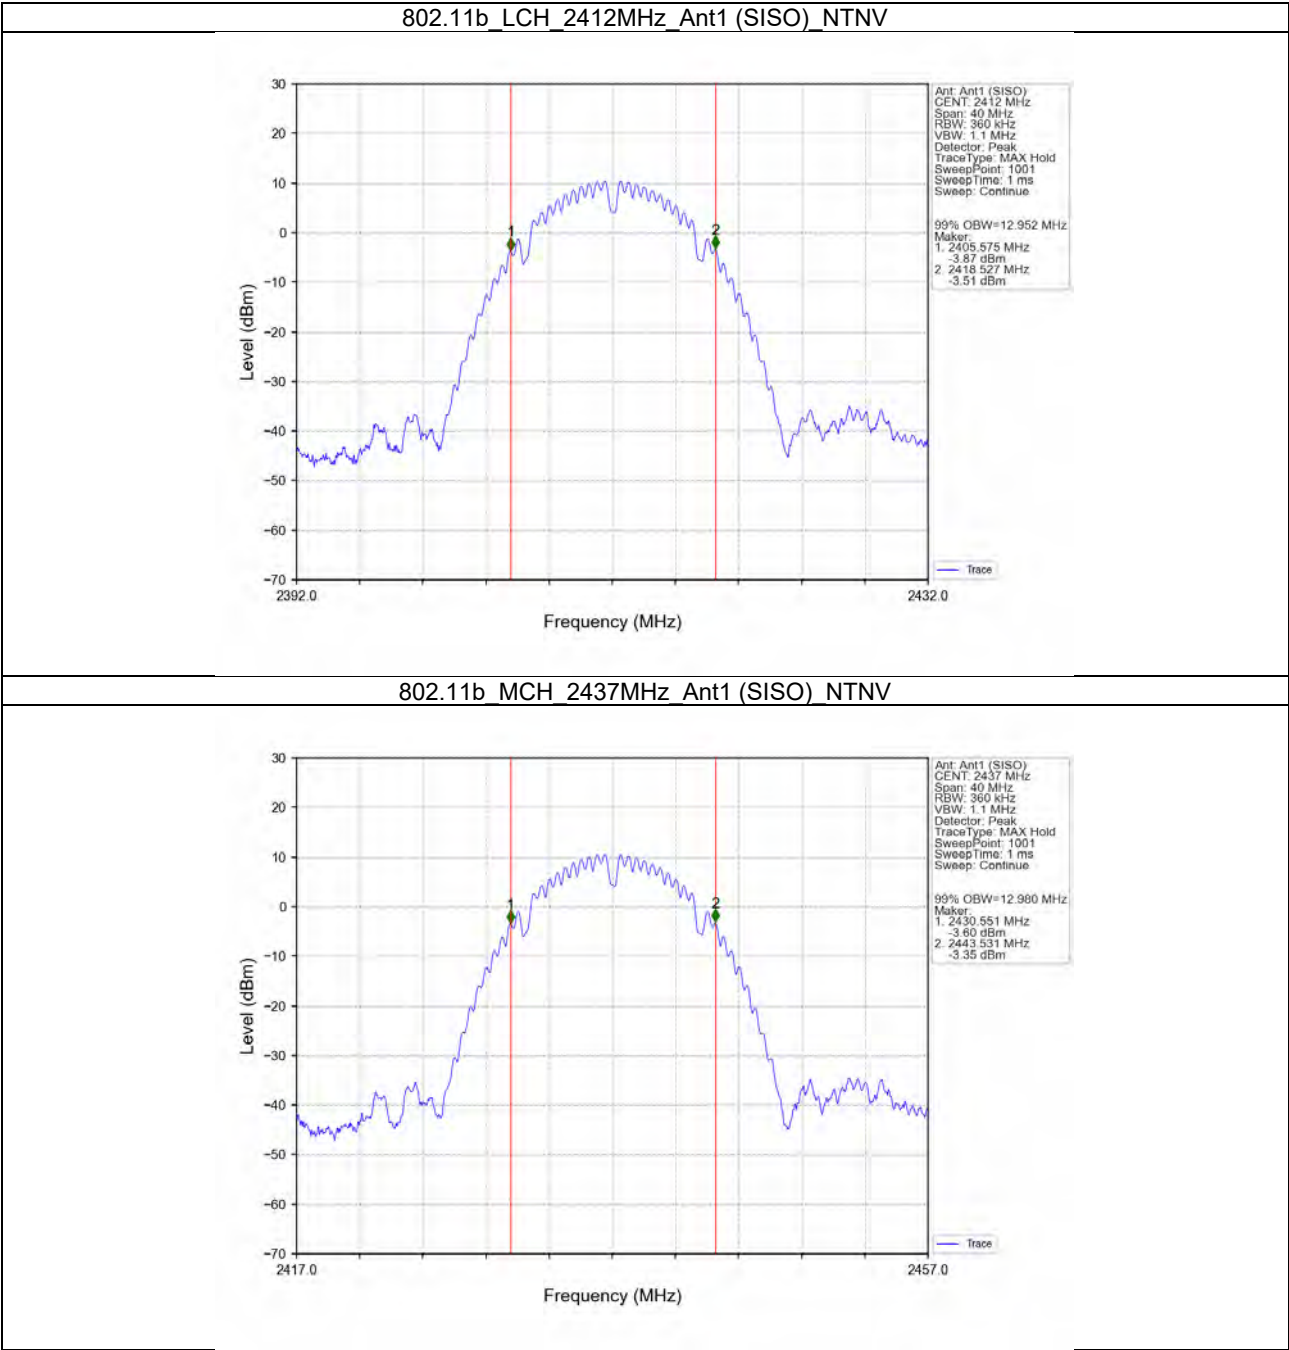





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 36 of 120

802.11b\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

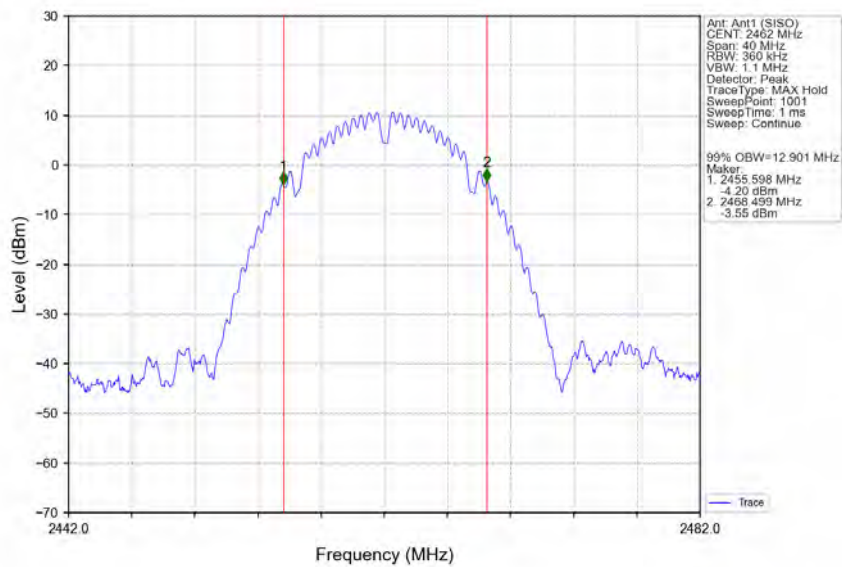

802.11g\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

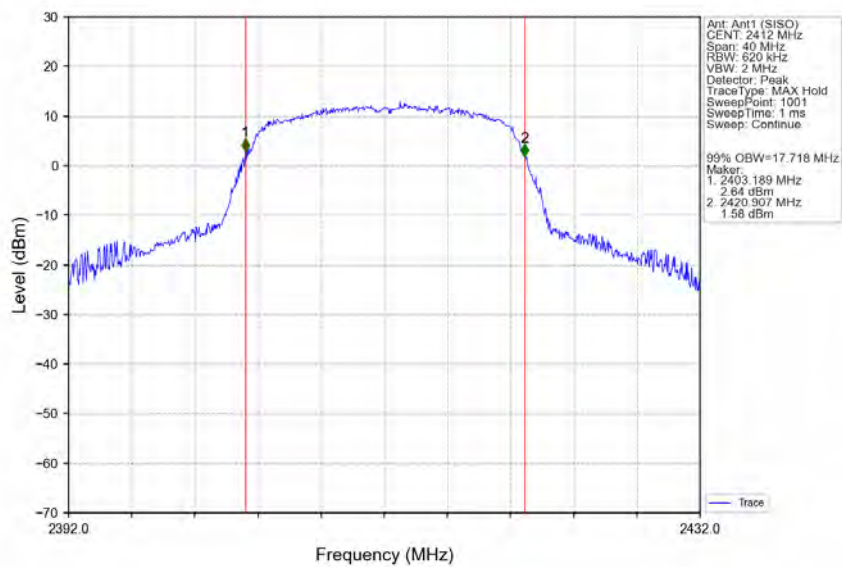





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 37 of 120

802.11g\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

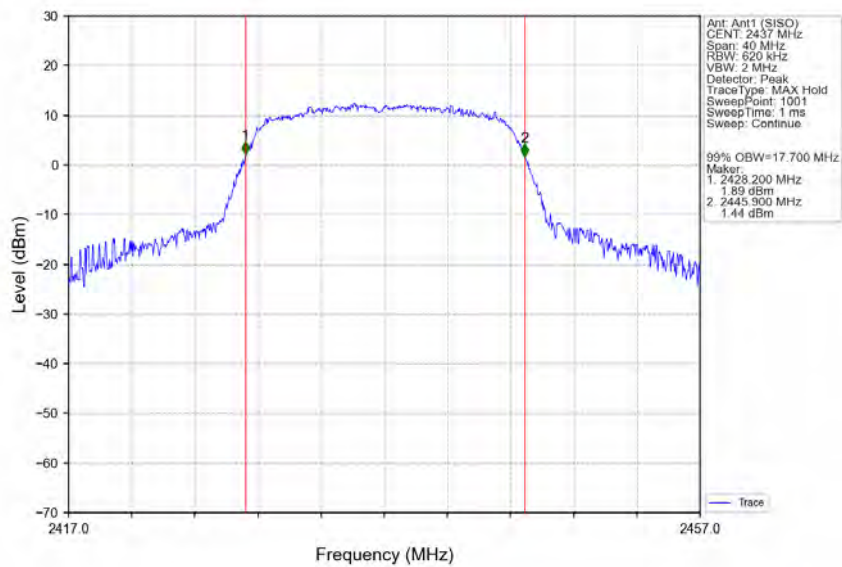

802.11g\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

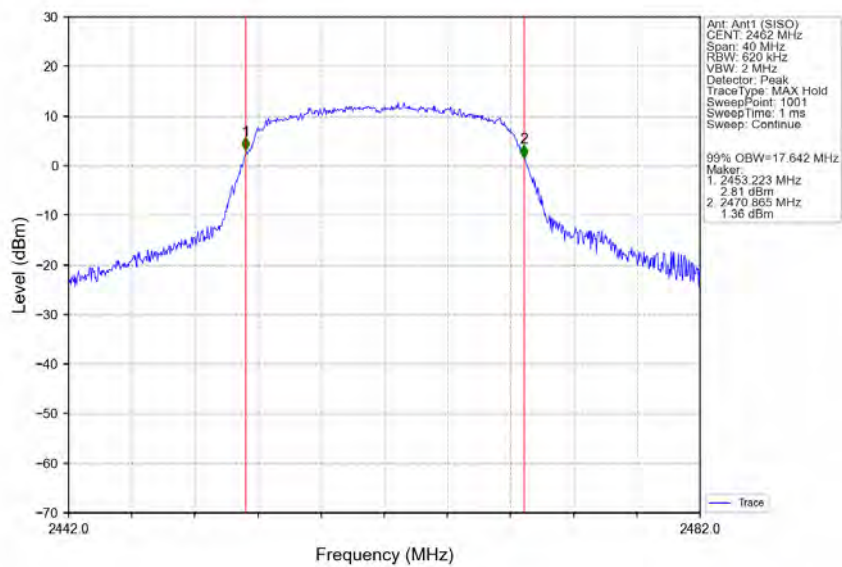





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 38 of 120

802.11n(HT20)\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

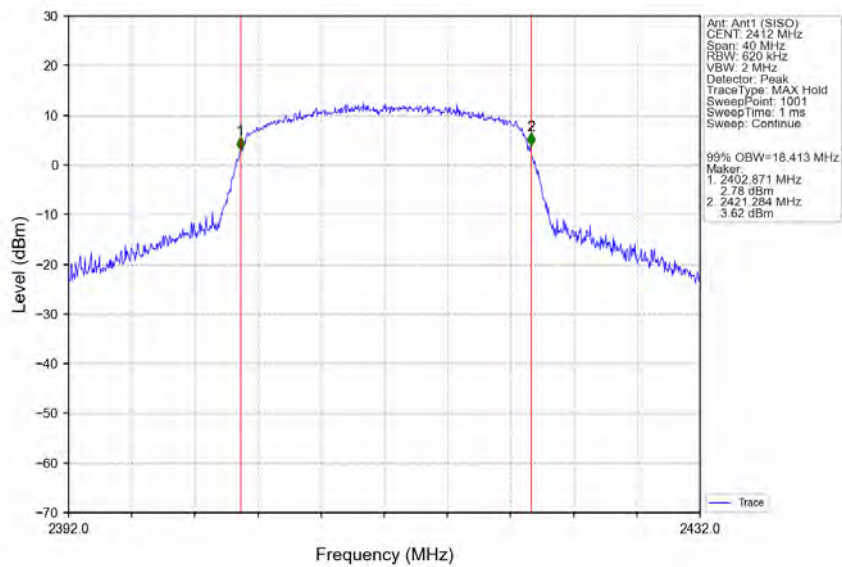


802.11n(HT20)\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

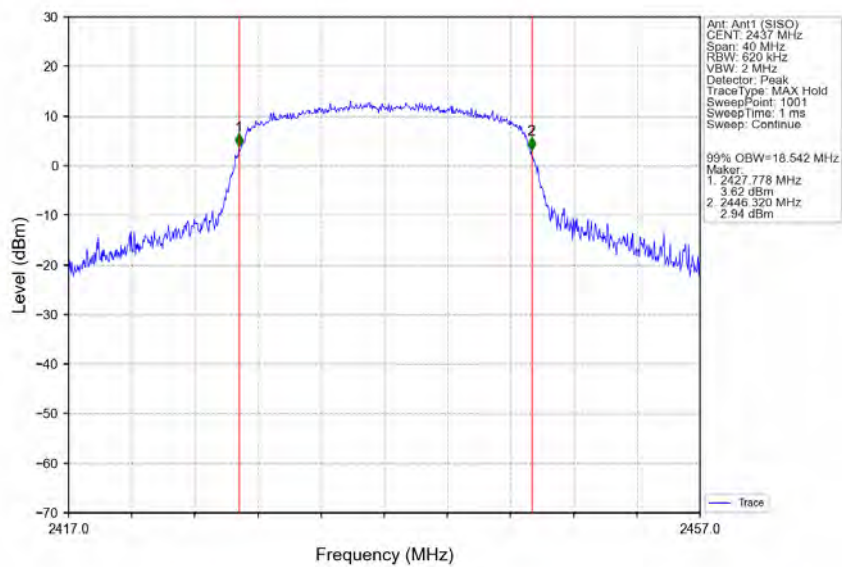




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 39 of 120

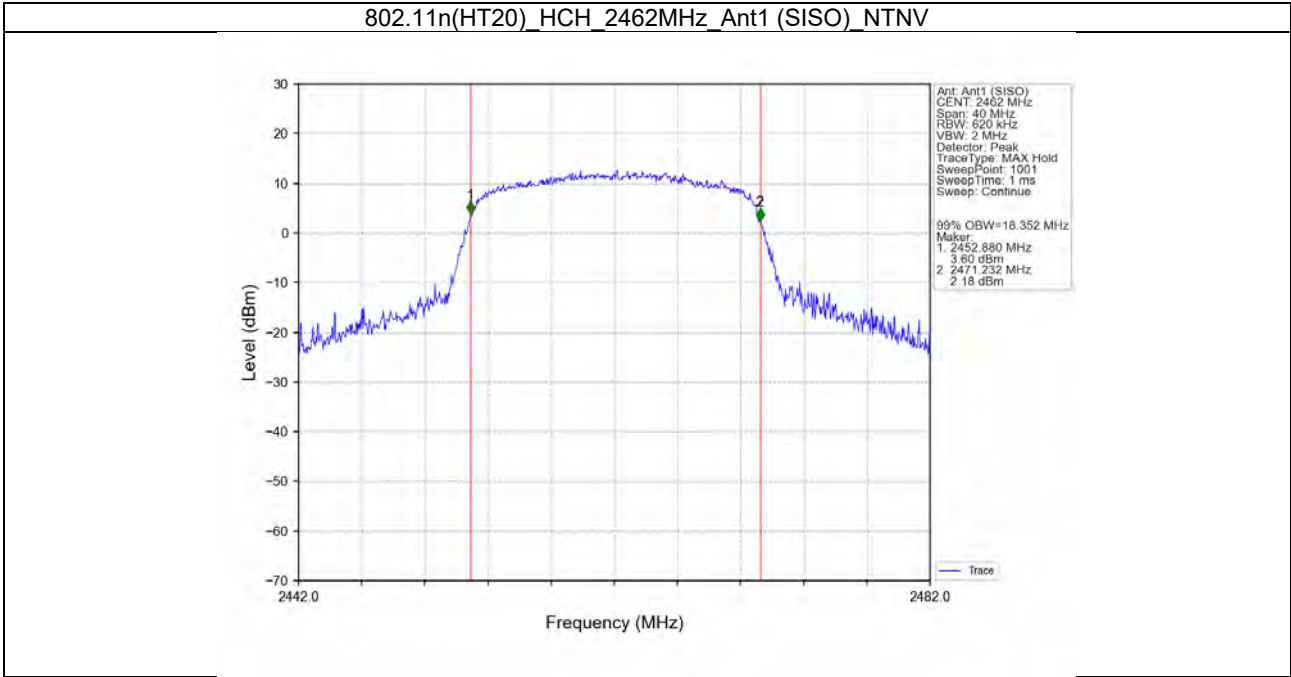

### 2.2.2 6dB BW

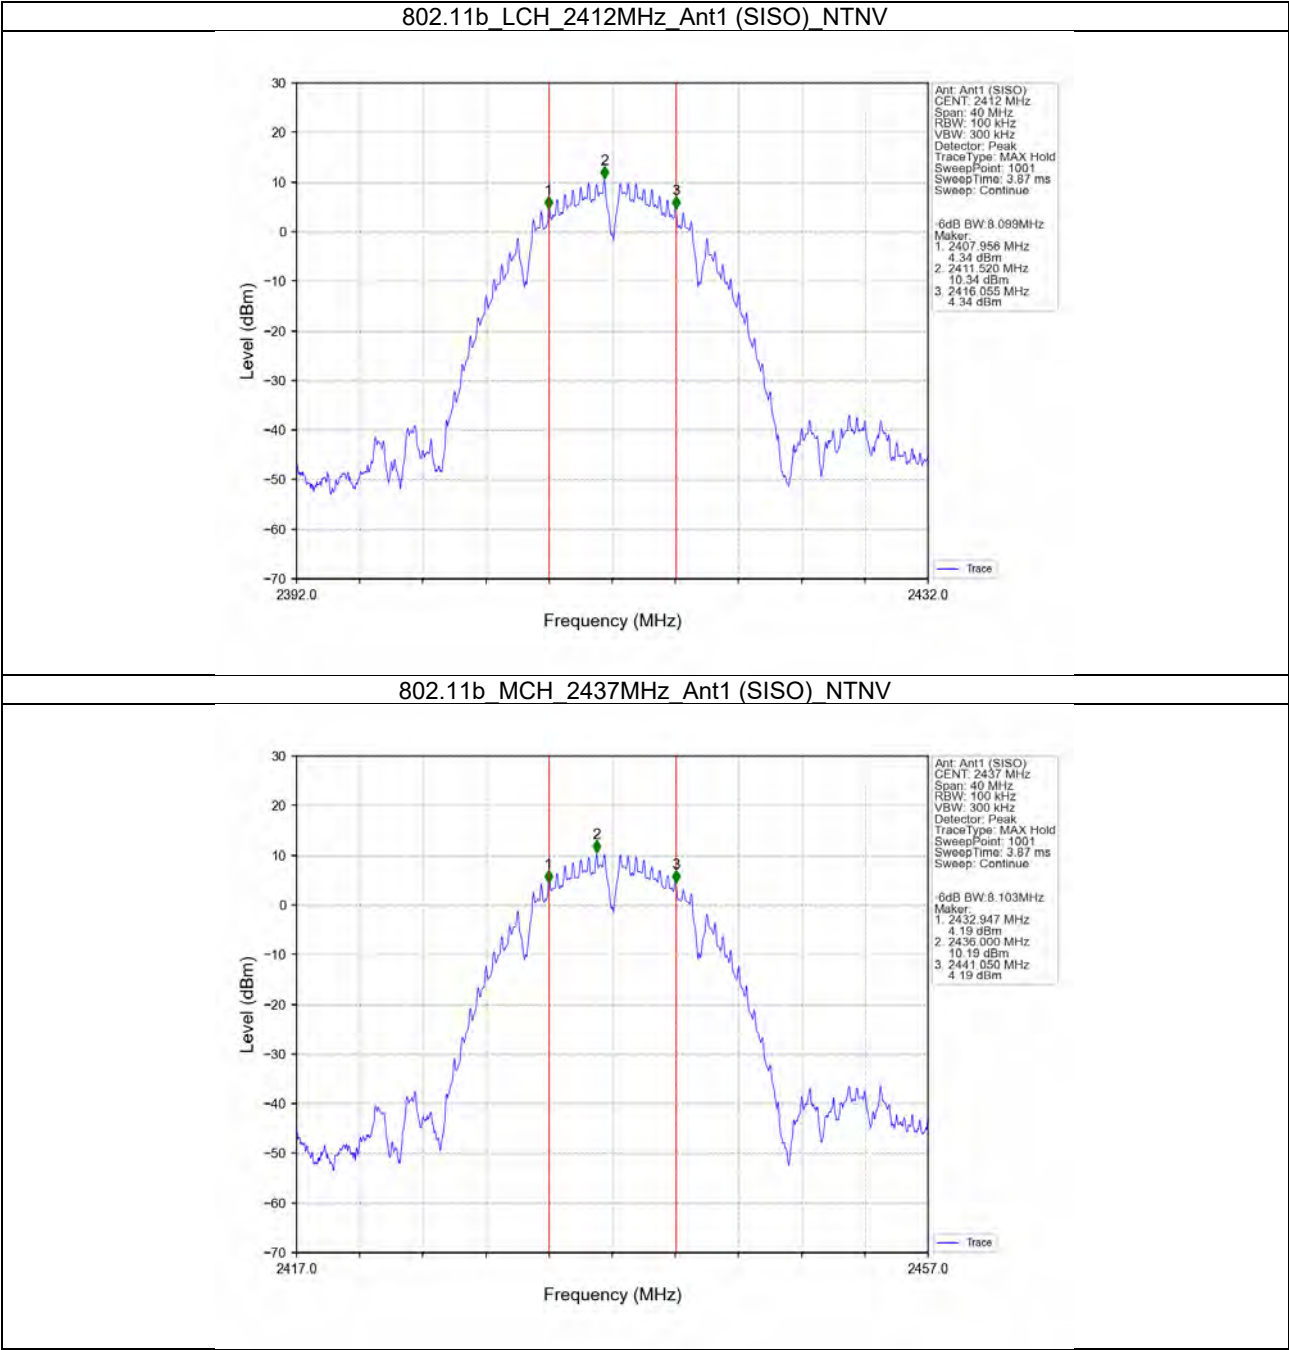





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 41 of 120

802.11b\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

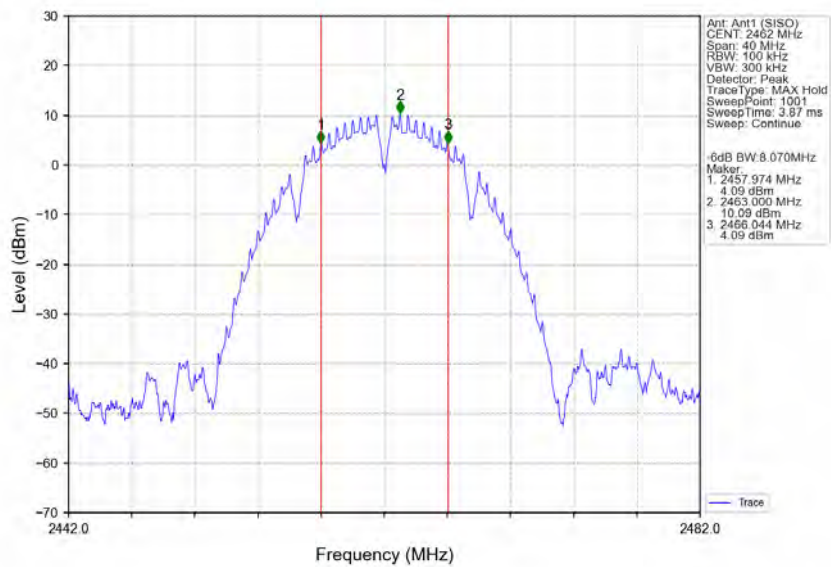

802.11g\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

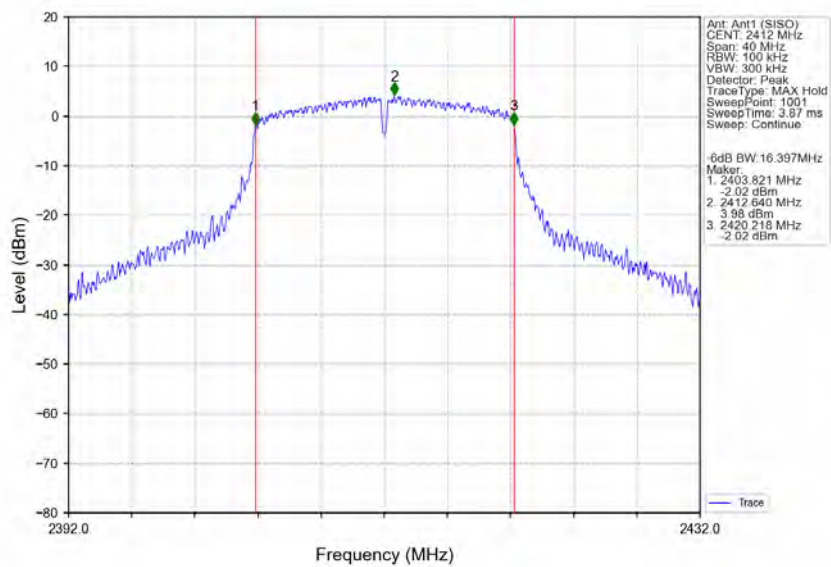





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 42 of 120

802.11g\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

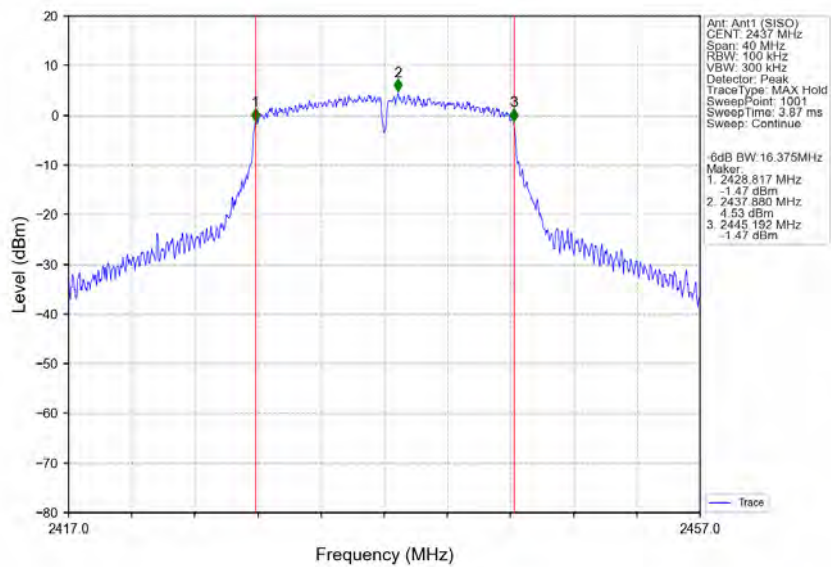

802.11g\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

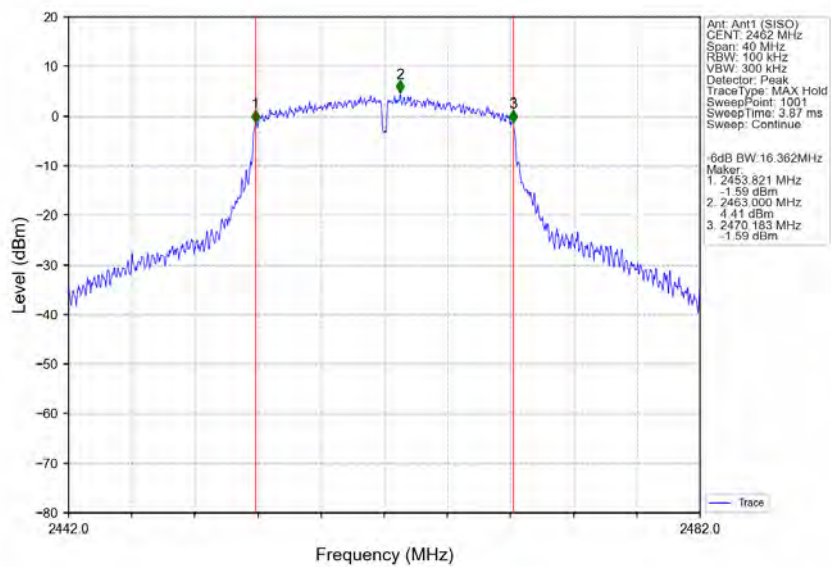





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 43 of 120

802.11n(HT20)\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

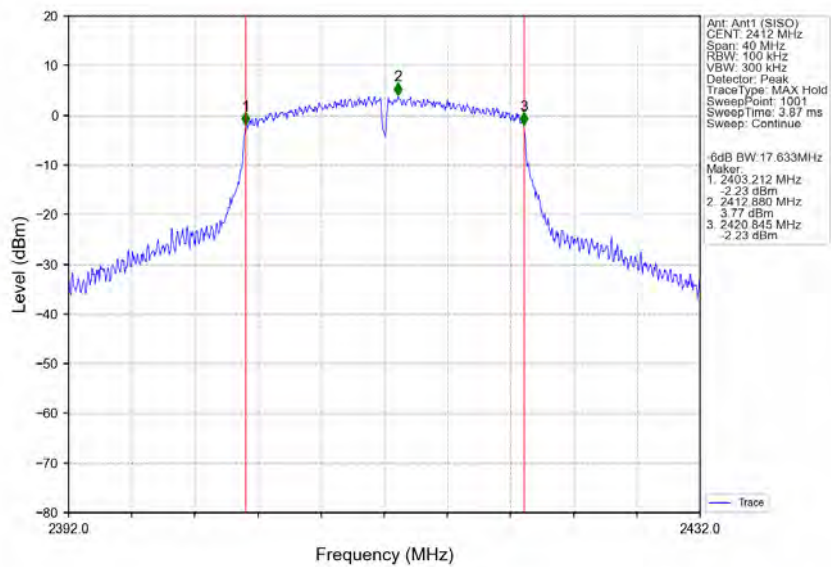


802.11n(HT20)\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

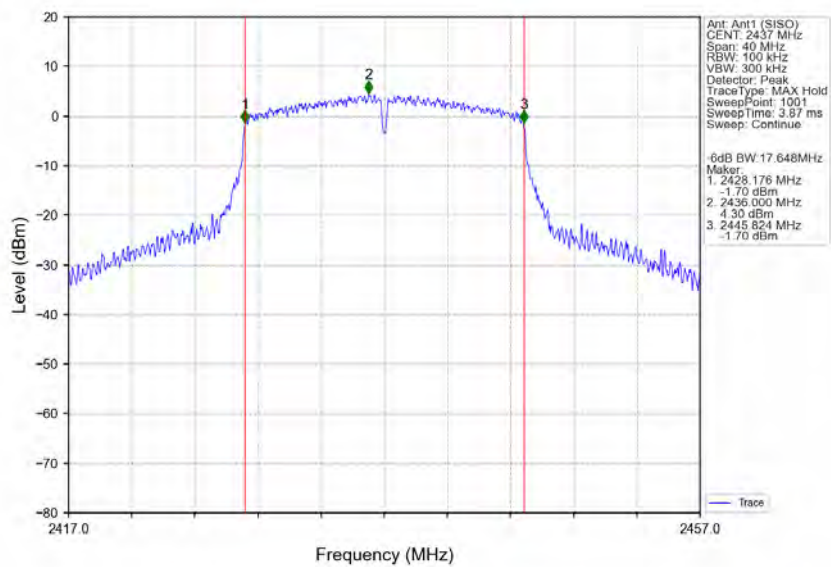



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 44 of 120

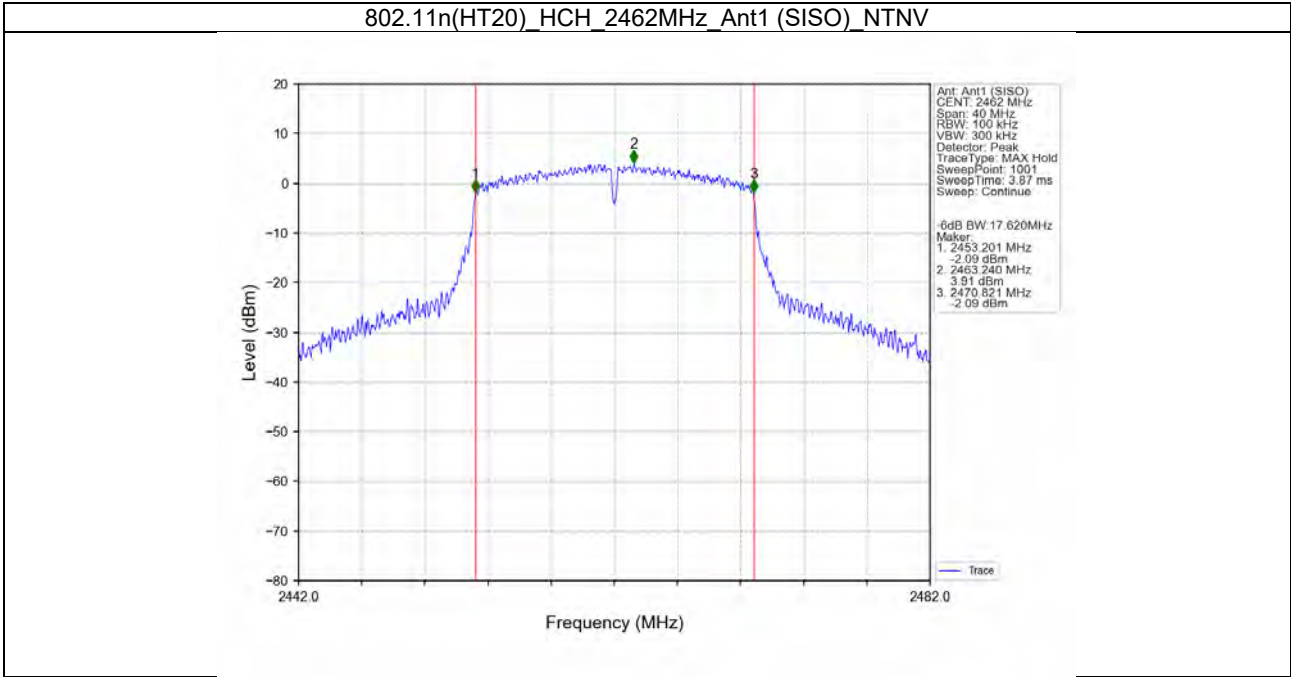



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 45 of 120

### 3. Maximum Conducted Output Power

#### 3.1 Test Result

##### 3.1.1 Power

| Mode           | TX Type | Frequency (MHz) | Maximum Peak Conducted Output Power (dBm) |       | Verdict |
|----------------|---------|-----------------|-------------------------------------------|-------|---------|
|                |         |                 | ANT1                                      | Limit |         |
| 802.11b        | SISO    | 2412            | 20.49                                     | <=30  | Pass    |
|                |         | 2437            | 20.61                                     | <=30  | Pass    |
|                |         | 2462            | 20.67                                     | <=30  | Pass    |
| 802.11g        | SISO    | 2412            | 24.68                                     | <=30  | Pass    |
|                |         | 2437            | 24.79                                     | <=30  | Pass    |
|                |         | 2462            | 24.73                                     | <=30  | Pass    |
| 802.11n (HT20) | SISO    | 2412            | 24.70                                     | <=30  | Pass    |
|                |         | 2437            | 25.20                                     | <=30  | Pass    |
|                |         | 2462            | 24.86                                     | <=30  | Pass    |

Note1: Antenna Gain: Ant1: 0.90dBi;




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 46 of 120

3.2 Test Graph


3.2.1 Power

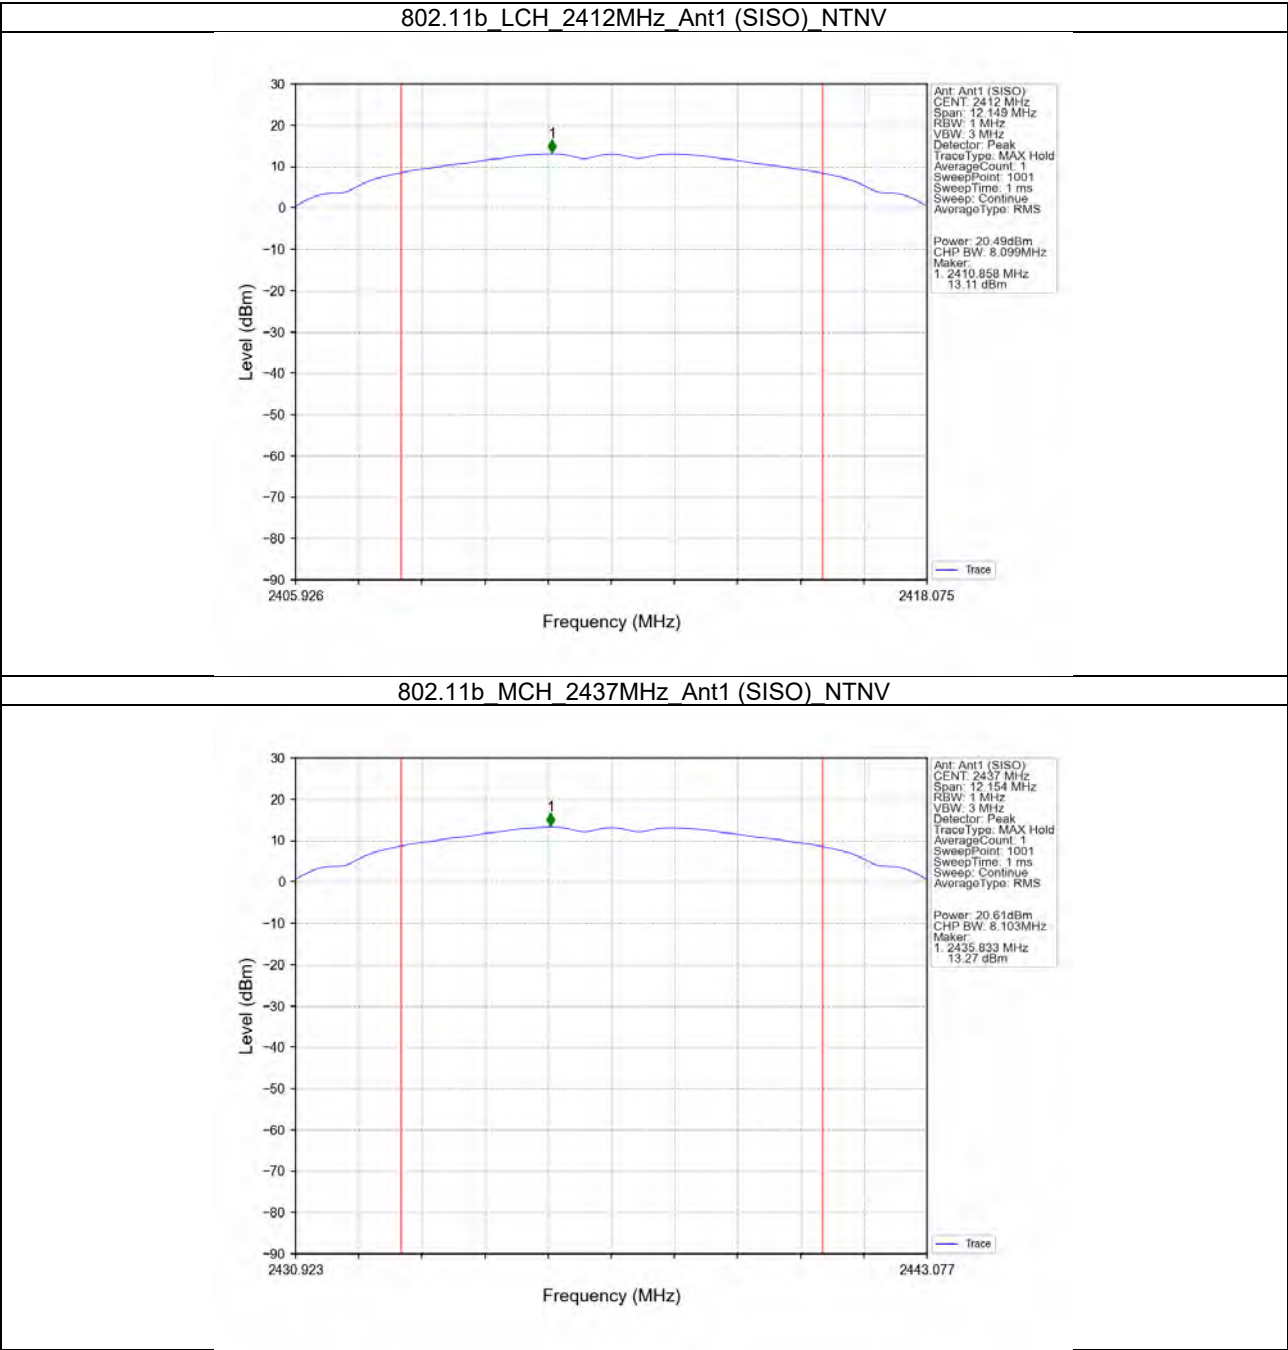



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 47 of 120

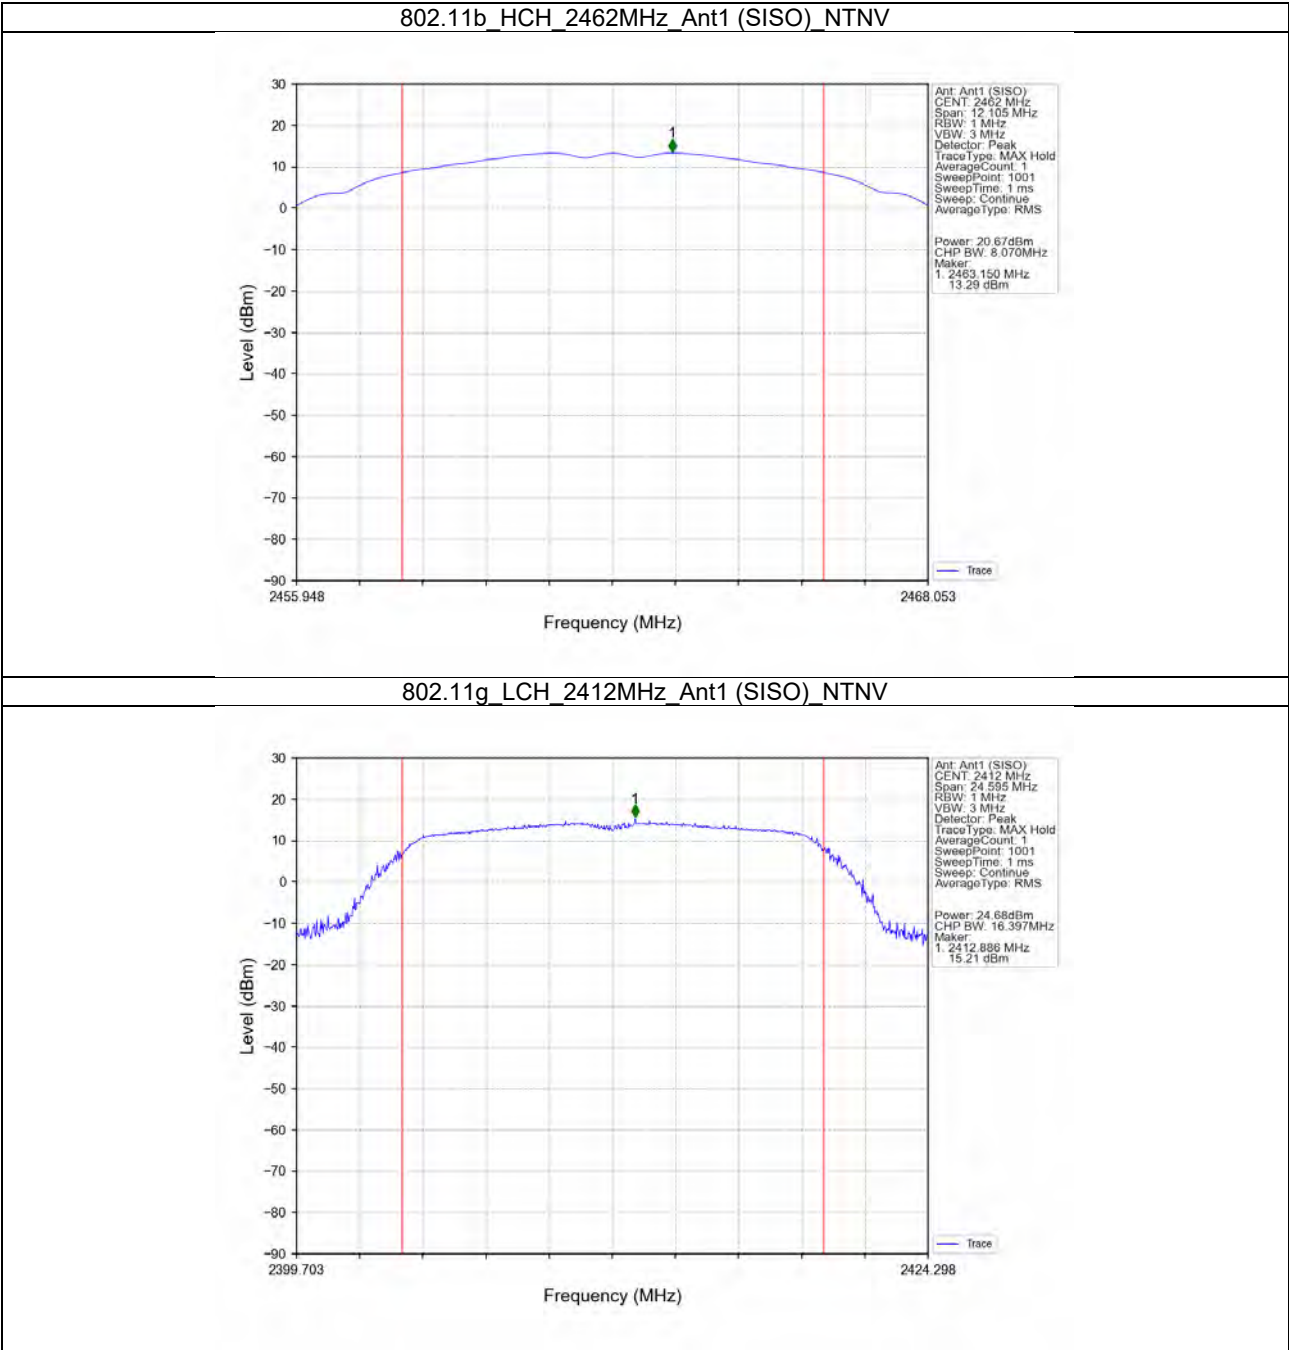





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 48 of 120

802.11g\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

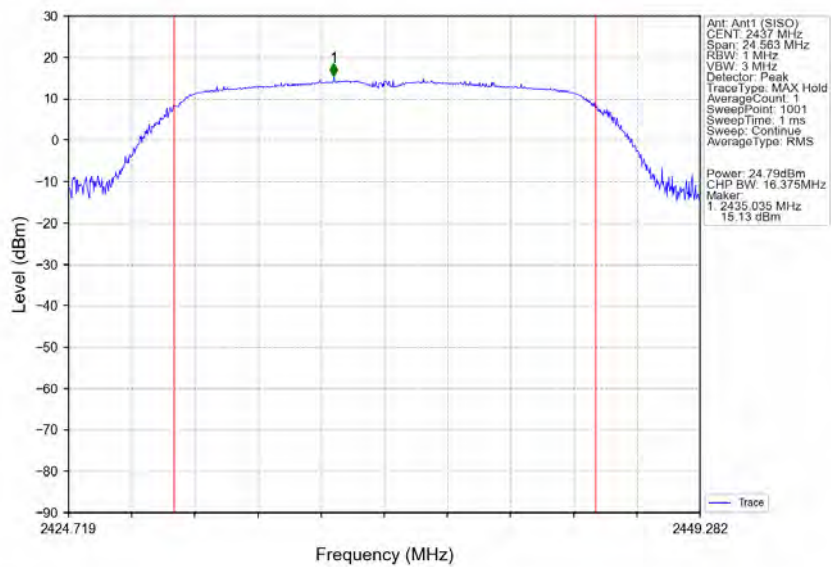

802.11g\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

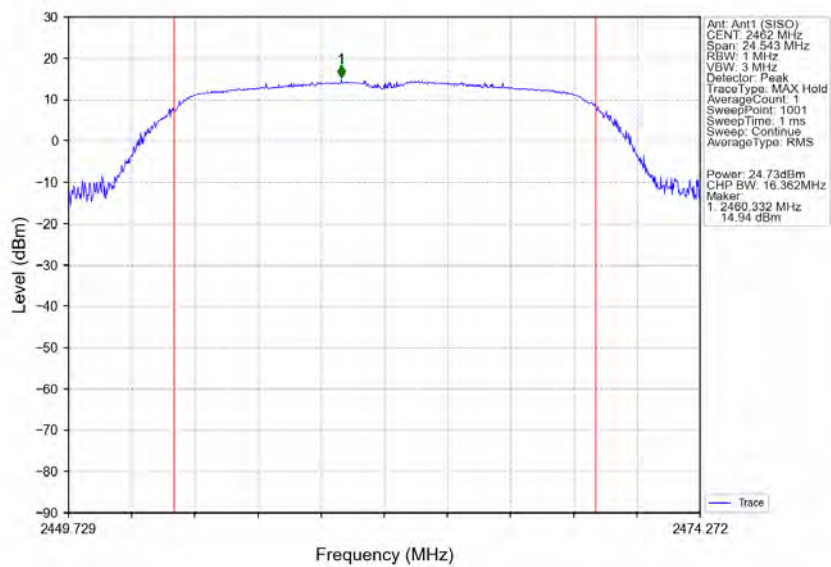





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 49 of 120

802.11n(HT20)\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

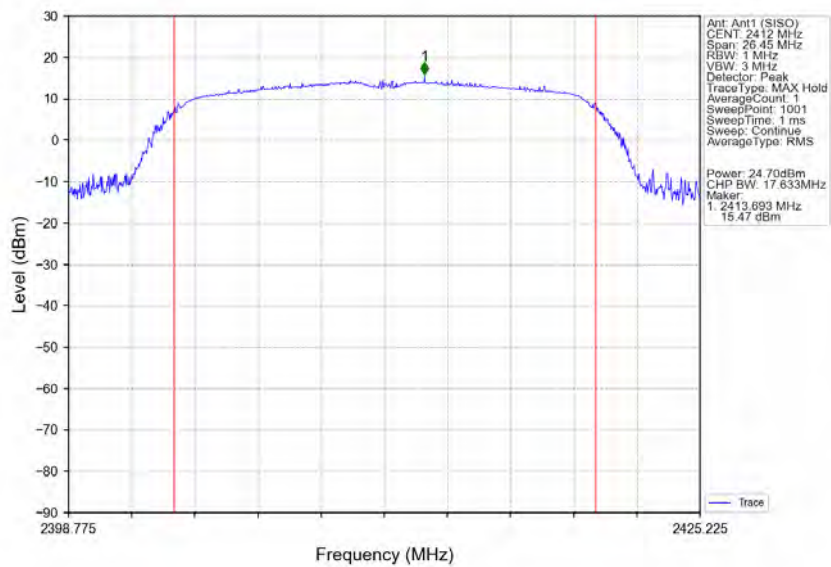


802.11n(HT20)\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

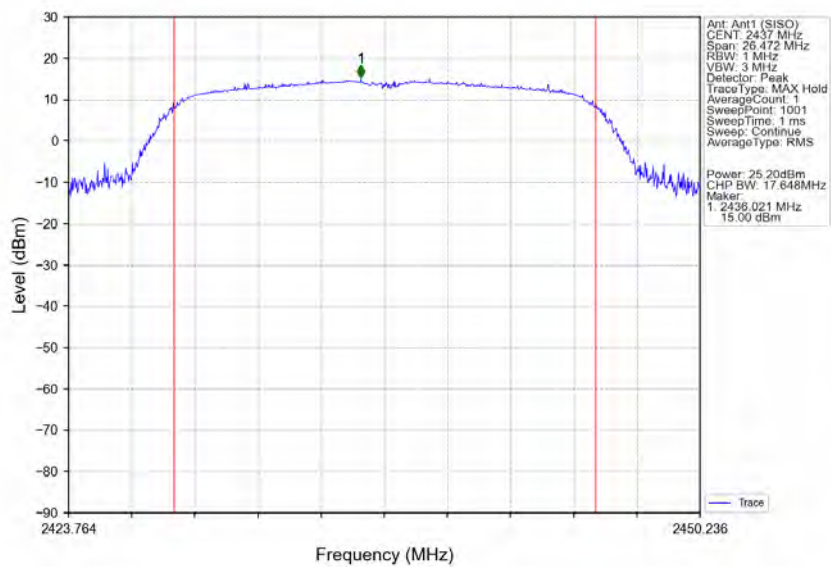



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 50 of 120

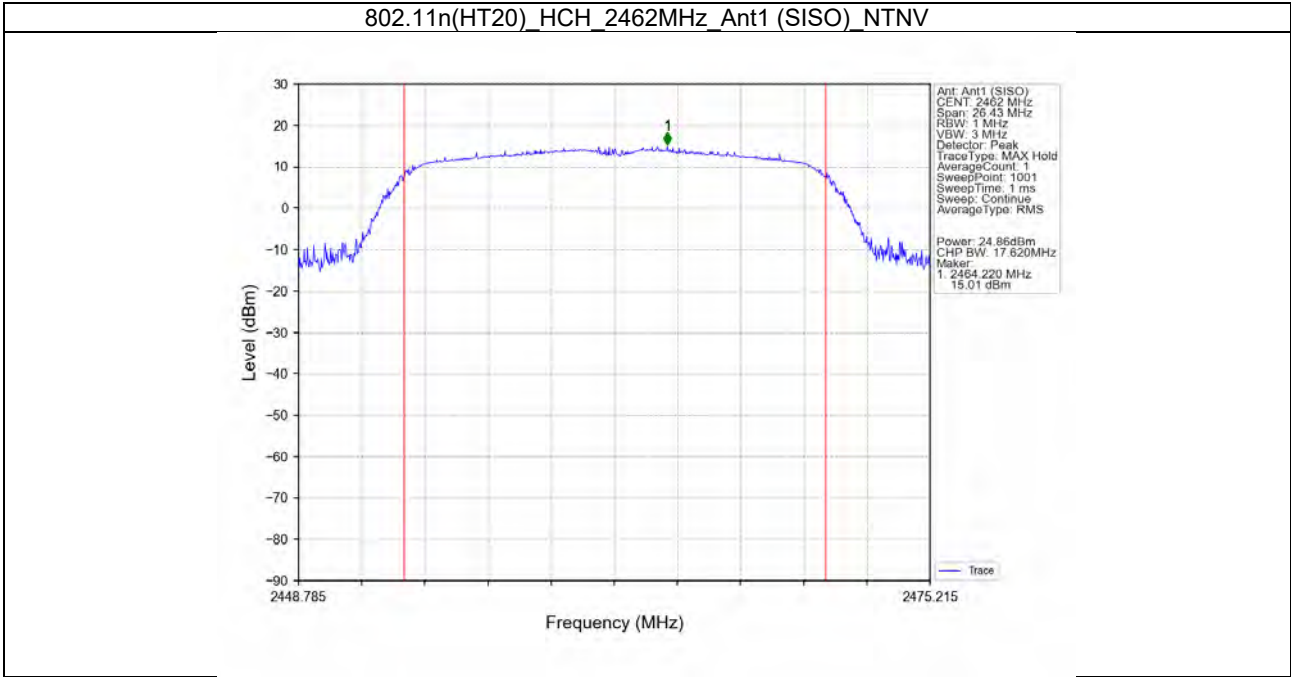



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 51 of 120

### 4. Maximum Power Spectral Density

#### 4.1 Test Result

##### 4.1.1 PSD

| Mode           | TX Type | Frequency (MHz) | Maximum PSD (dBm/3kHz) |       | Verdict |
|----------------|---------|-----------------|------------------------|-------|---------|
|                |         |                 | ANT1                   | Limit |         |
| 802.11b        | SISO    | 2412            | -4.45                  | <=8   | Pass    |
|                |         | 2437            | -3.85                  | <=8   | Pass    |
|                |         | 2462            | -3.92                  | <=8   | Pass    |
| 802.11g        | SISO    | 2412            | -7.32                  | <=8   | Pass    |
|                |         | 2437            | -7.48                  | <=8   | Pass    |
|                |         | 2462            | -6.91                  | <=8   | Pass    |
| 802.11n (HT20) | SISO    | 2412            | -6.42                  | <=8   | Pass    |
|                |         | 2437            | -7.09                  | <=8   | Pass    |
|                |         | 2462            | -7.81                  | <=8   | Pass    |

Note1: Antenna Gain: Ant1: 0.90dBi;




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 52 of 120

4.2 Test Graph

4.2.1 PSD

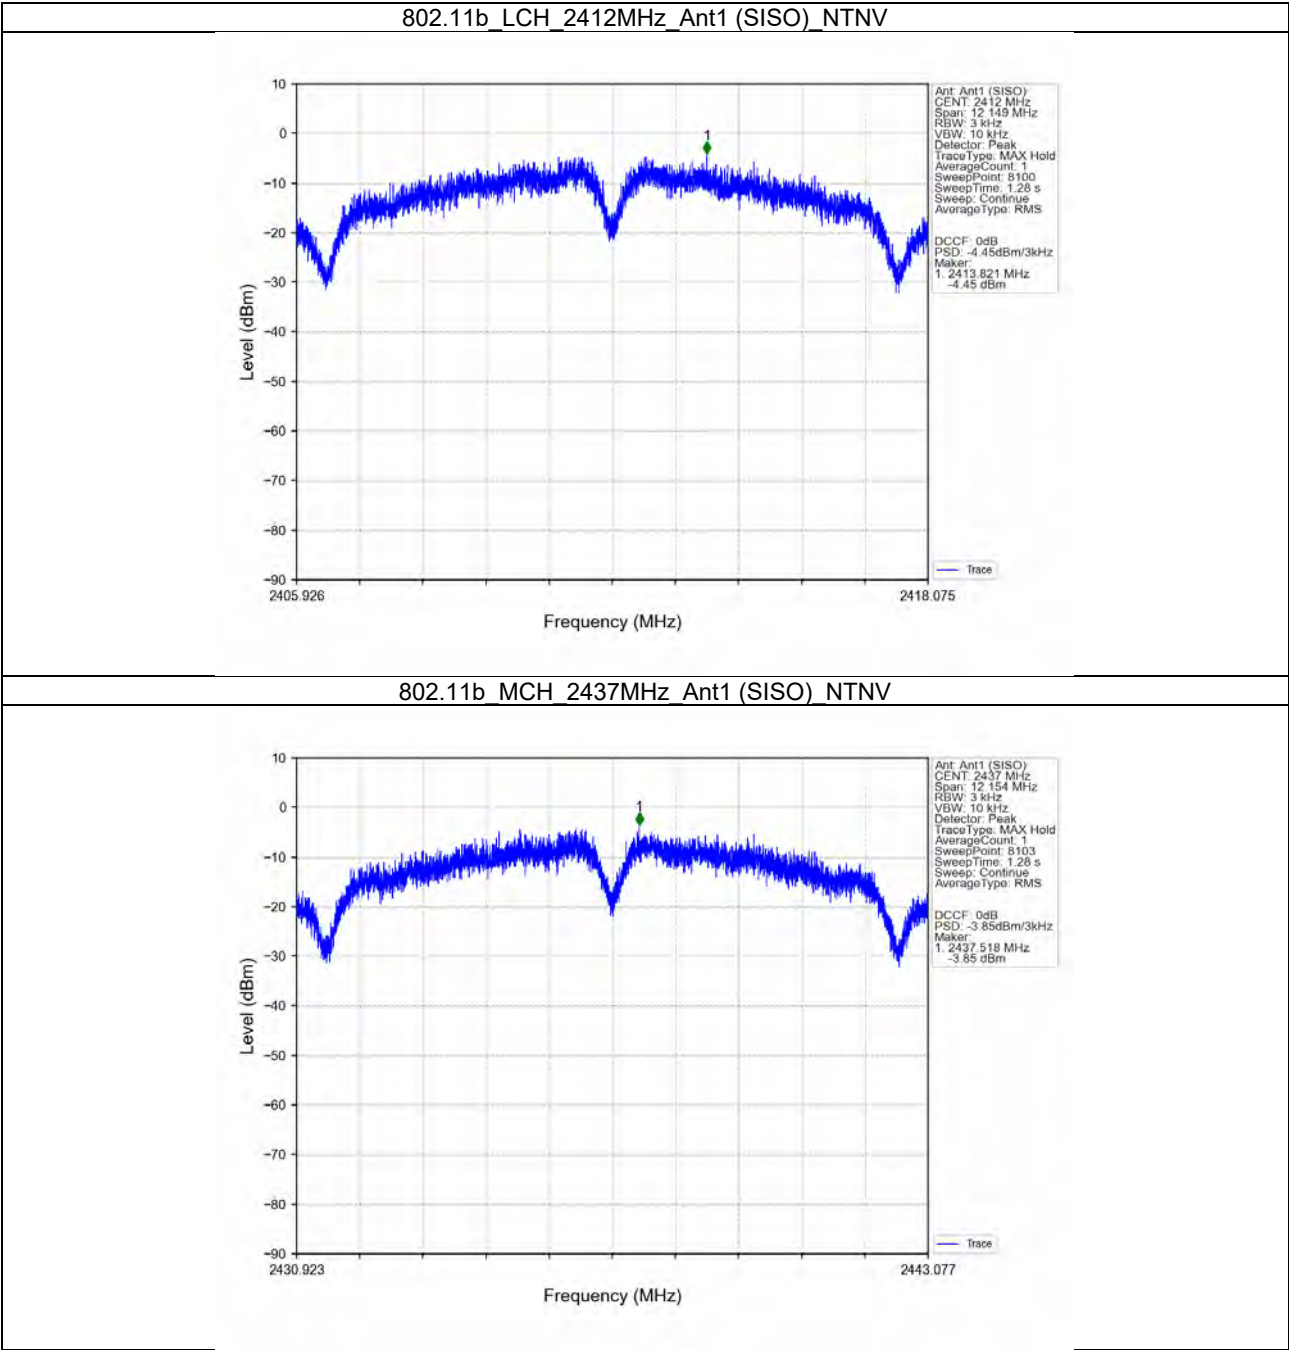





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 53 of 120

802.11b\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

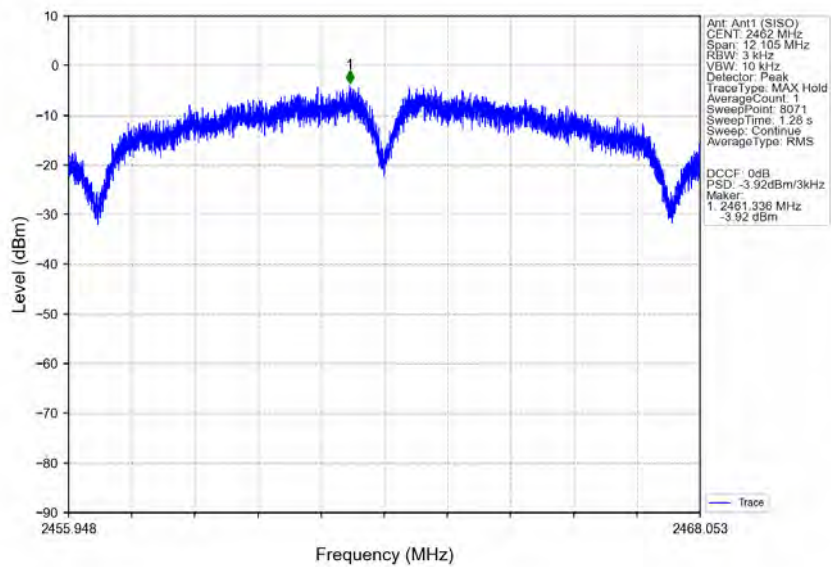


802.11g\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

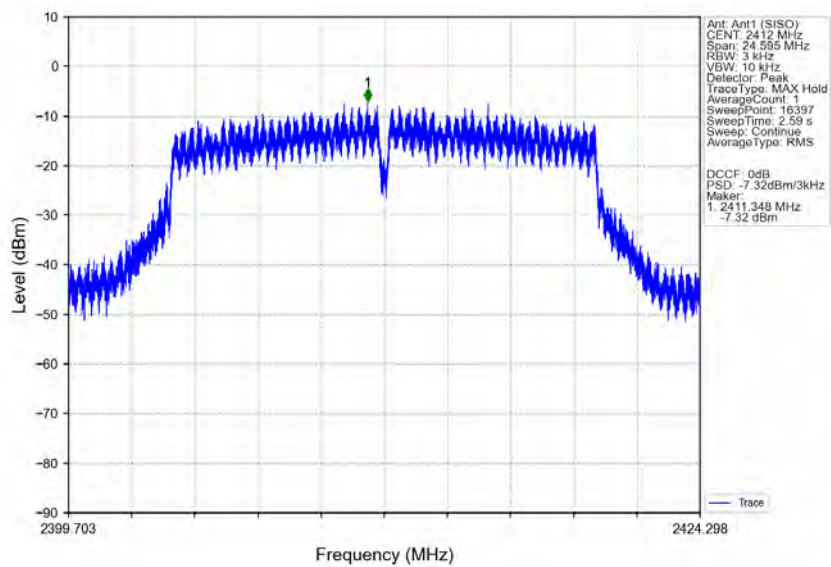



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 54 of 120

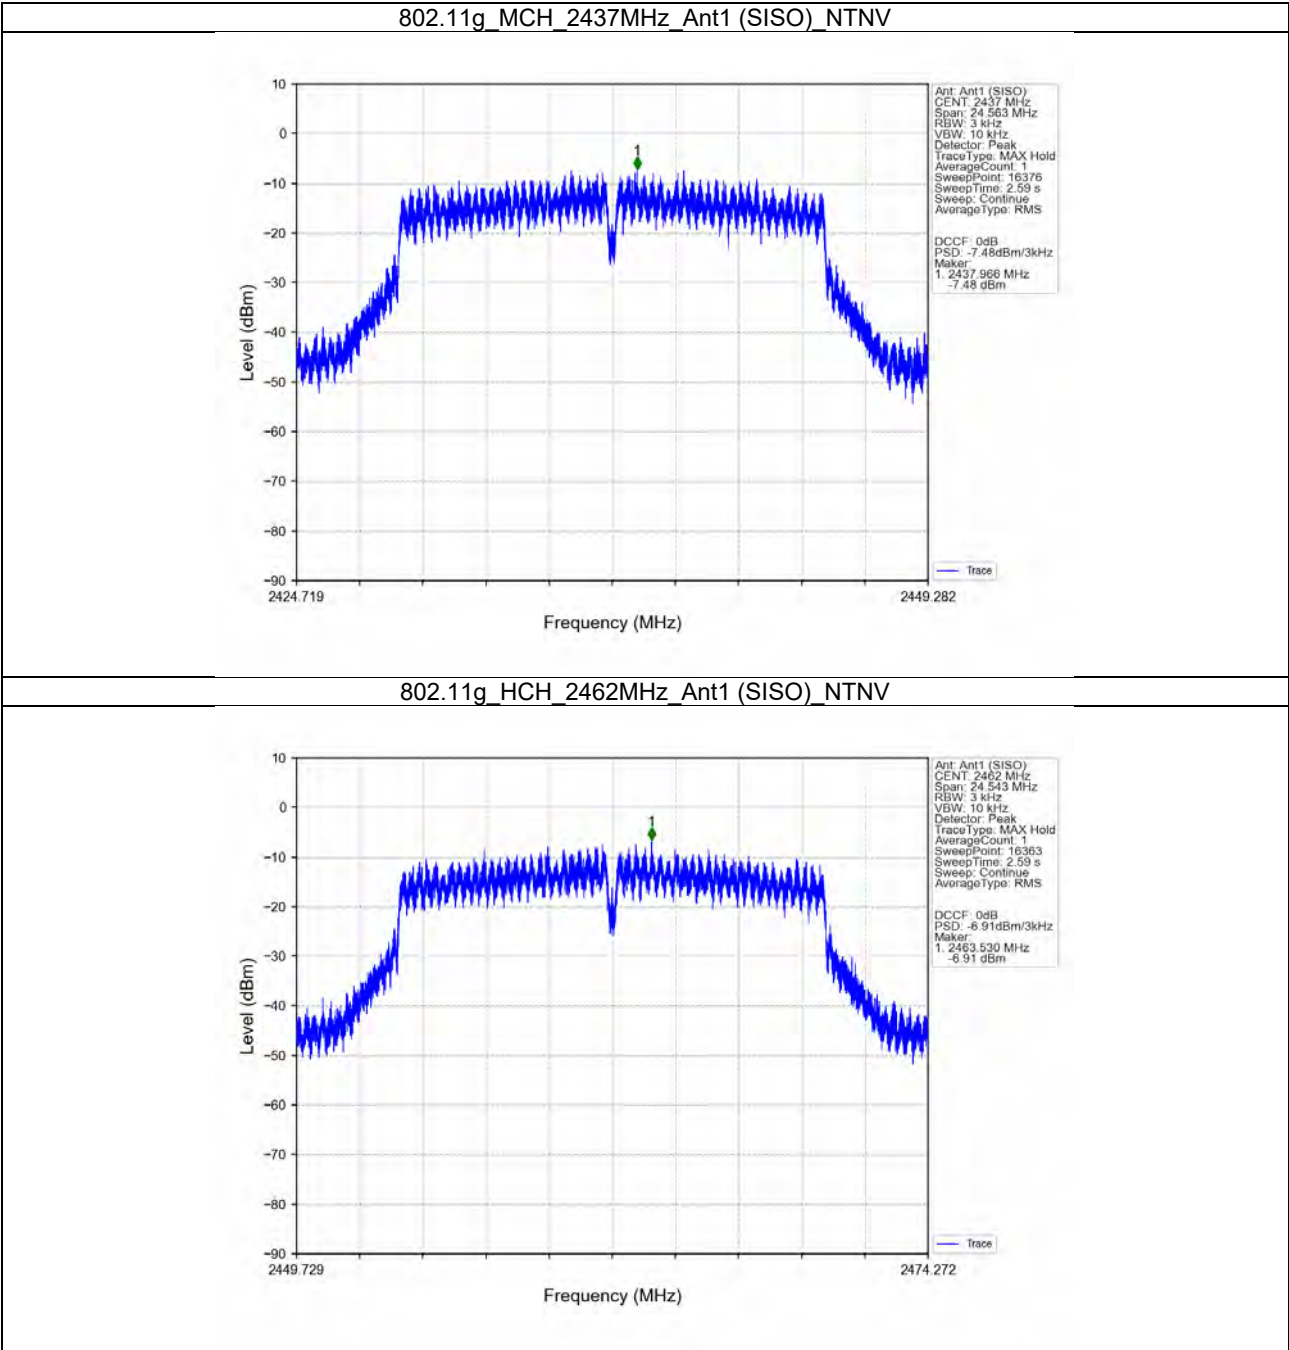





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 55 of 120

802.11n(HT20)\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

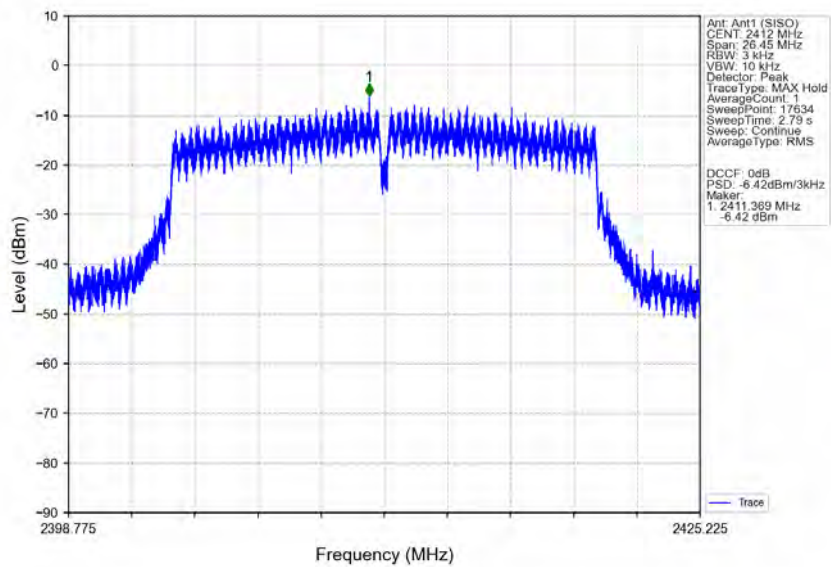


802.11n(HT20)\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

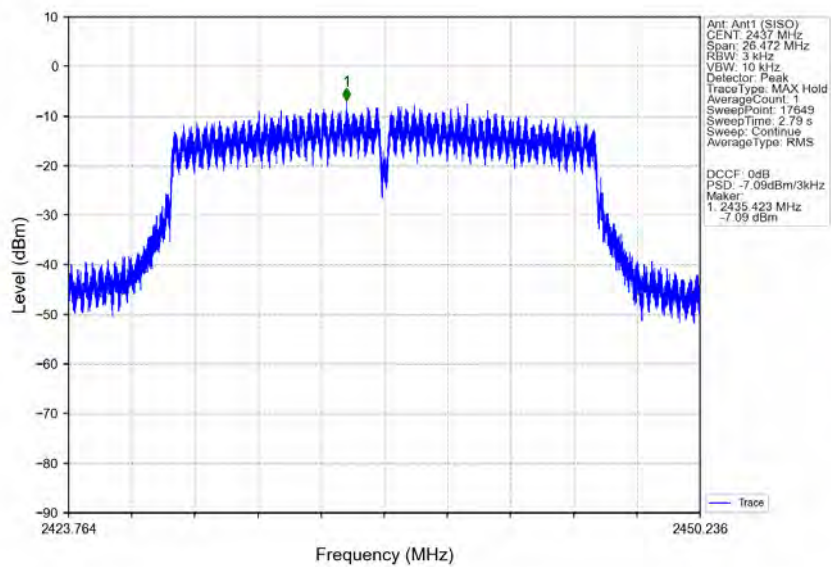



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 56 of 120

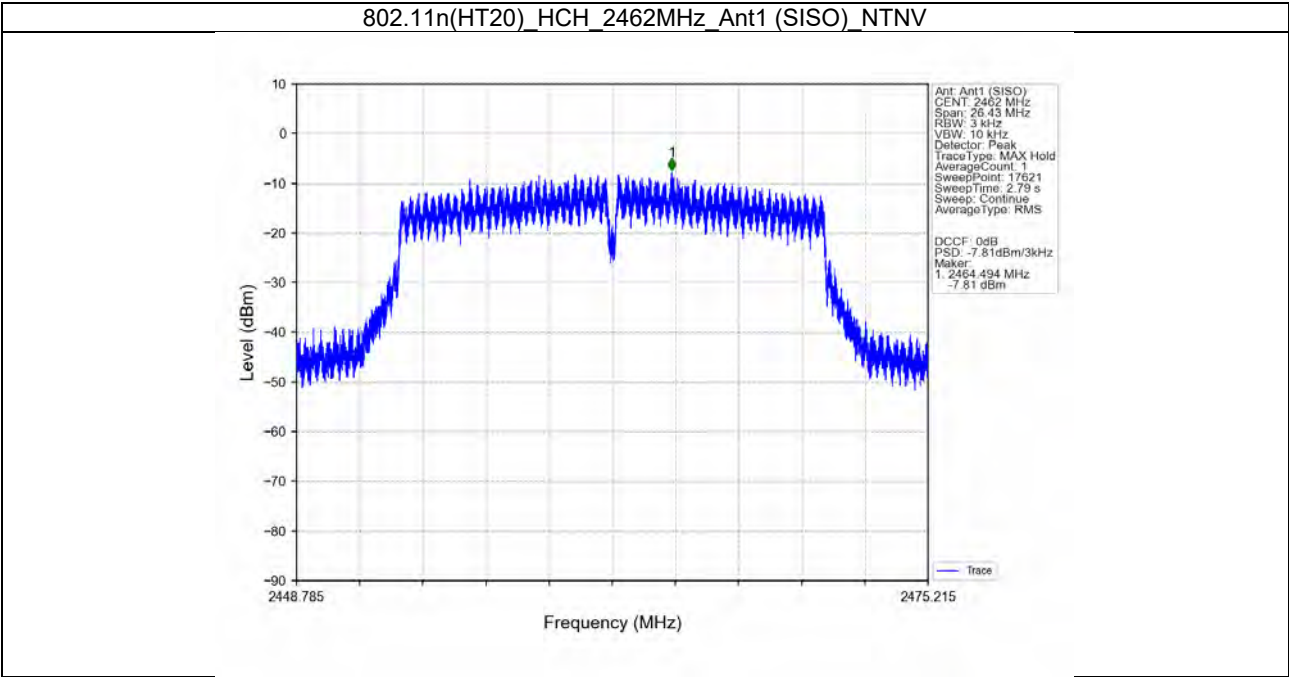



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 57 of 120

### 5. Unwanted Emissions In Non-restricted Frequency Bands

#### 5.1 Test Result

##### 5.1.1 Ref

| Mode           | TX Type | Frequency (MHz) | ANT | Level of Reference (dBm) |
|----------------|---------|-----------------|-----|--------------------------|
| 802.11b        | SISO    | 2412            | 1   | 10.23                    |
|                |         | 2437            | 1   | 10.31                    |
|                |         | 2462            | 1   | 10.56                    |
| 802.11g        | SISO    | 2412            | 1   | 3.86                     |
|                |         | 2437            | 1   | 4.03                     |
|                |         | 2462            | 1   | 4.26                     |
| 802.11n (HT20) | SISO    | 2412            | 1   | 3.59                     |
|                |         | 2437            | 1   | 4.05                     |
|                |         | 2462            | 1   | 3.84                     |

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

##### 5.1.2 CSE

| Mode           | TX Type | Frequency (MHz) | ANT | Level of Reference (dBm) | Limit (dBm) | Verdict |
|----------------|---------|-----------------|-----|--------------------------|-------------|---------|
| 802.11b        | SISO    | 2412            | 1   | 10.56                    | -9.44       | Pass    |
|                |         | 2437            | 1   | 10.56                    | -9.44       | Pass    |
|                |         | 2462            | 1   | 10.56                    | -9.44       | Pass    |
| 802.11g        | SISO    | 2412            | 1   | 4.26                     | -15.74      | Pass    |
|                |         | 2437            | 1   | 4.26                     | -15.74      | Pass    |
|                |         | 2462            | 1   | 4.26                     | -15.74      | Pass    |
| 802.11n (HT20) | SISO    | 2412            | 1   | 4.05                     | -15.95      | Pass    |
|                |         | 2437            | 1   | 4.05                     | -15.95      | Pass    |
|                |         | 2462            | 1   | 4.05                     | -15.95      | Pass    |

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 58 of 120

5.2 Test Graph

5.2.1 Ref

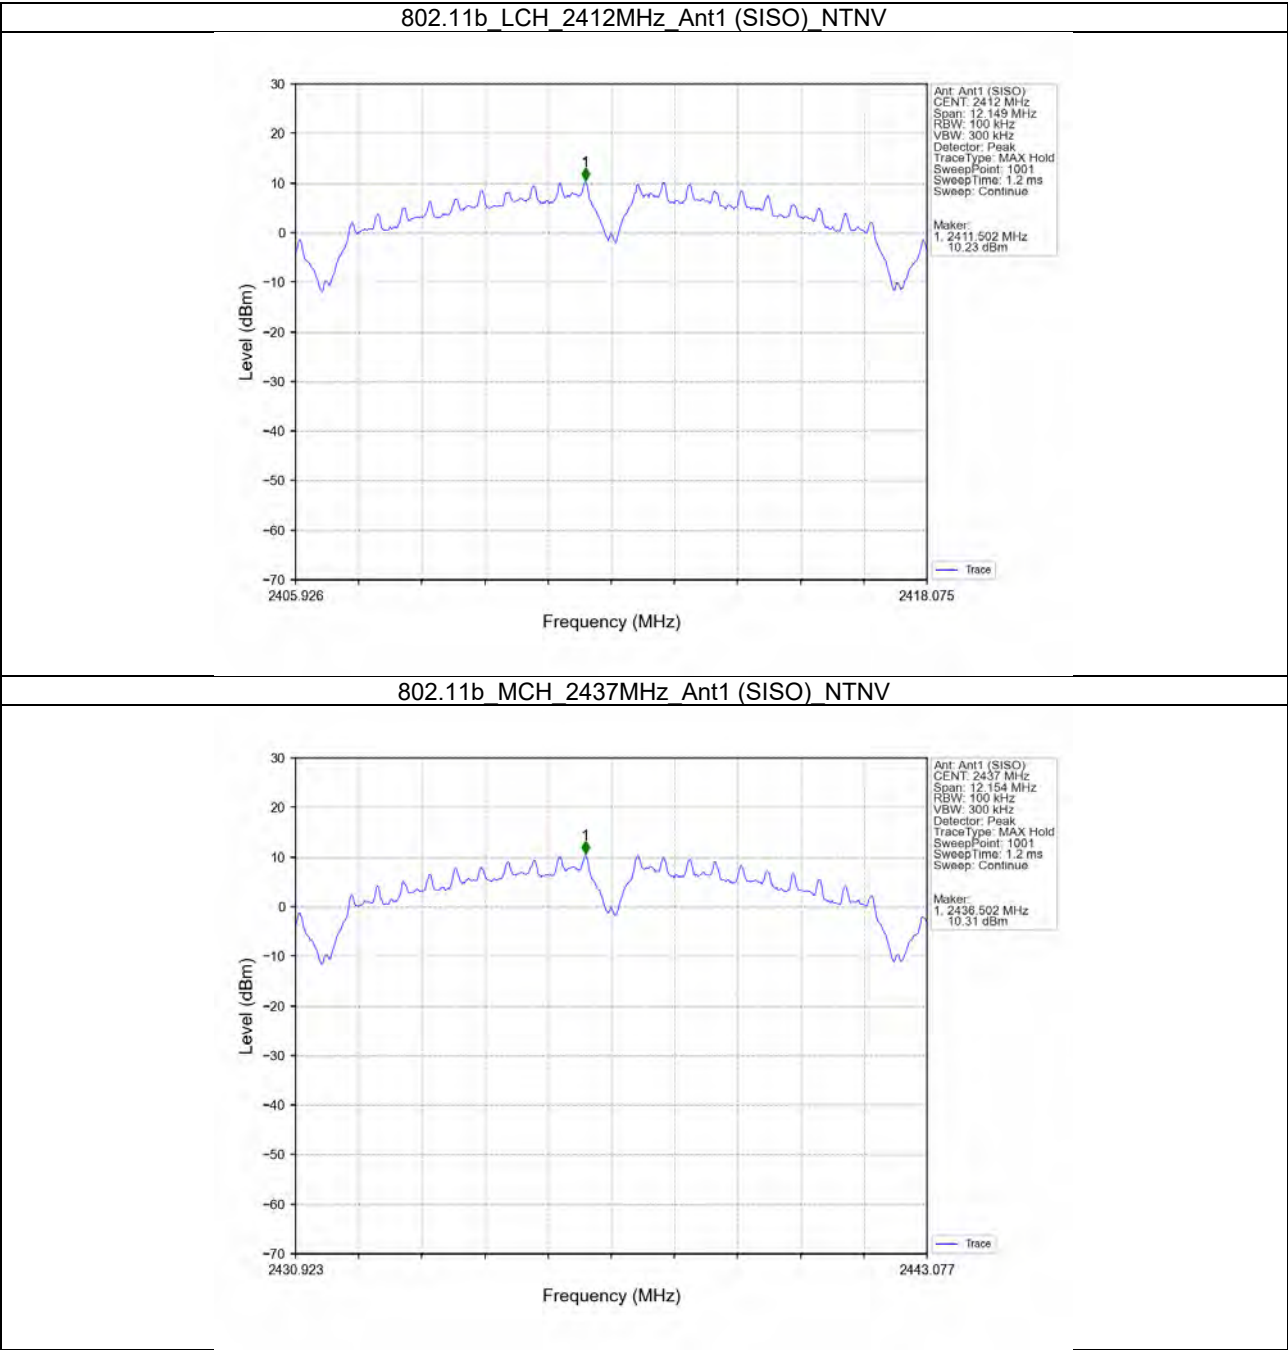





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 59 of 120

802.11b\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

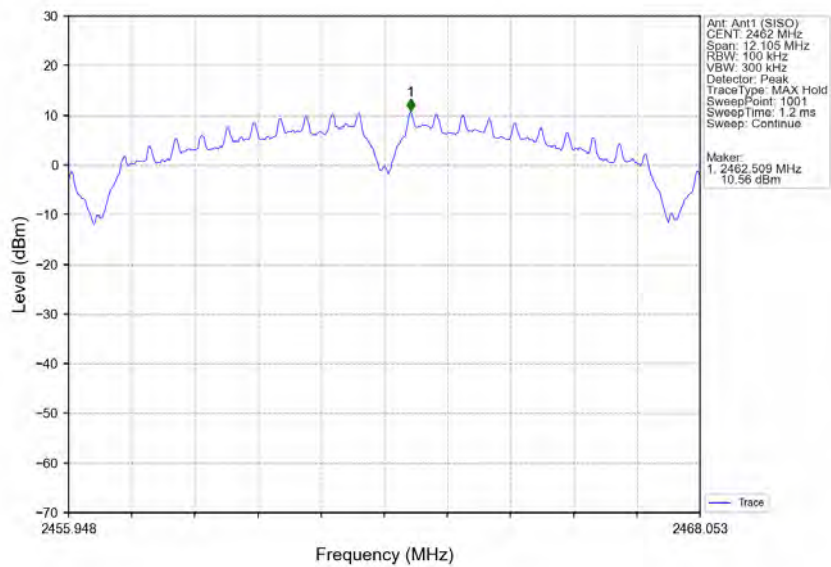

802.11g\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

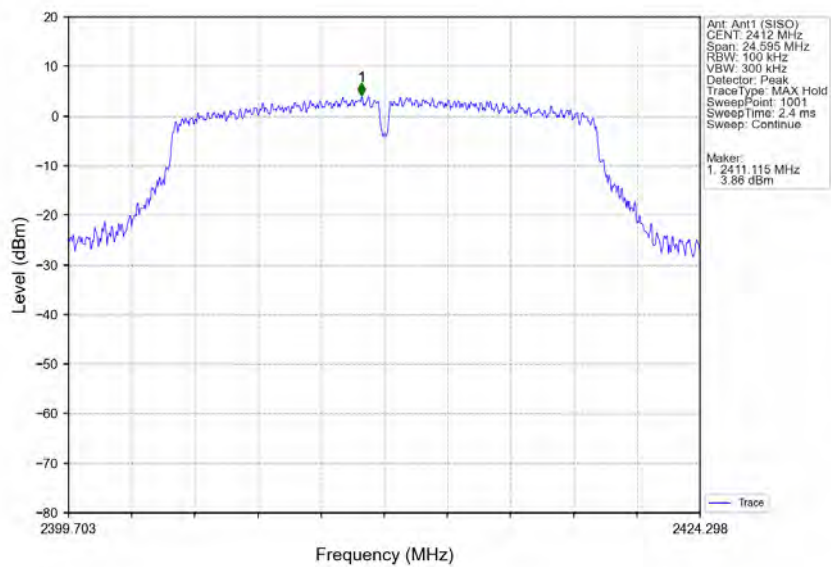





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 60 of 120

802.11g\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

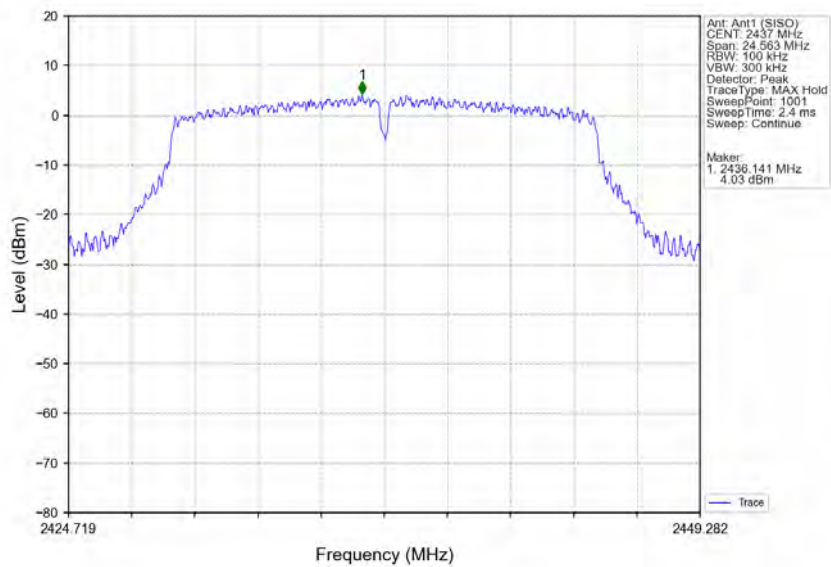

802.11g\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

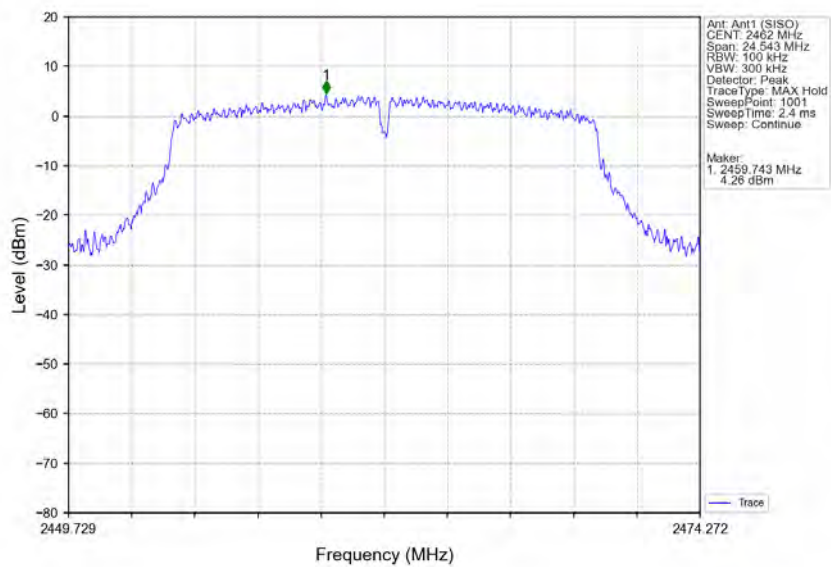





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 61 of 120

802.11n(HT20)\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

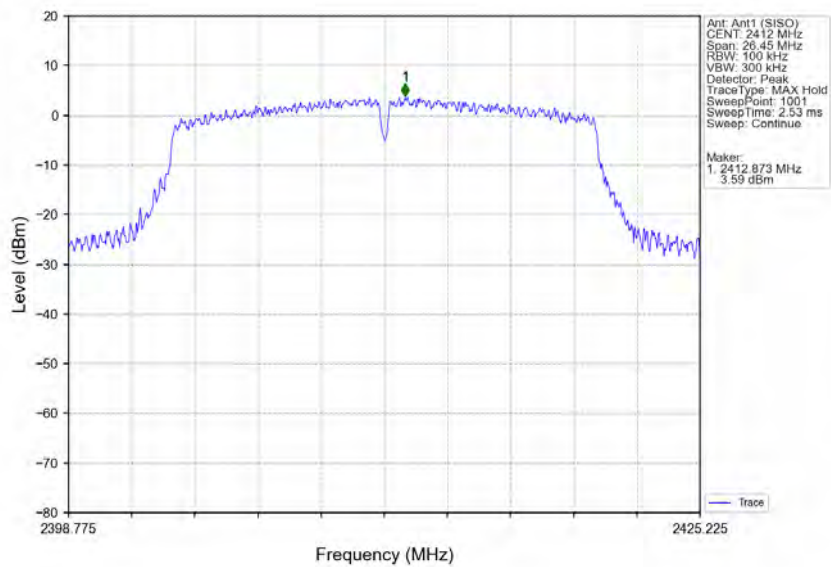


802.11n(HT20)\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

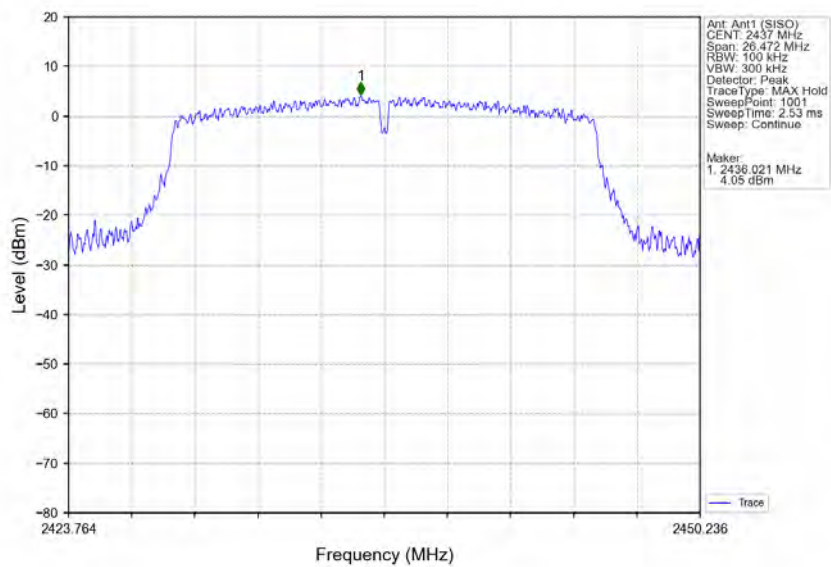



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 62 of 120

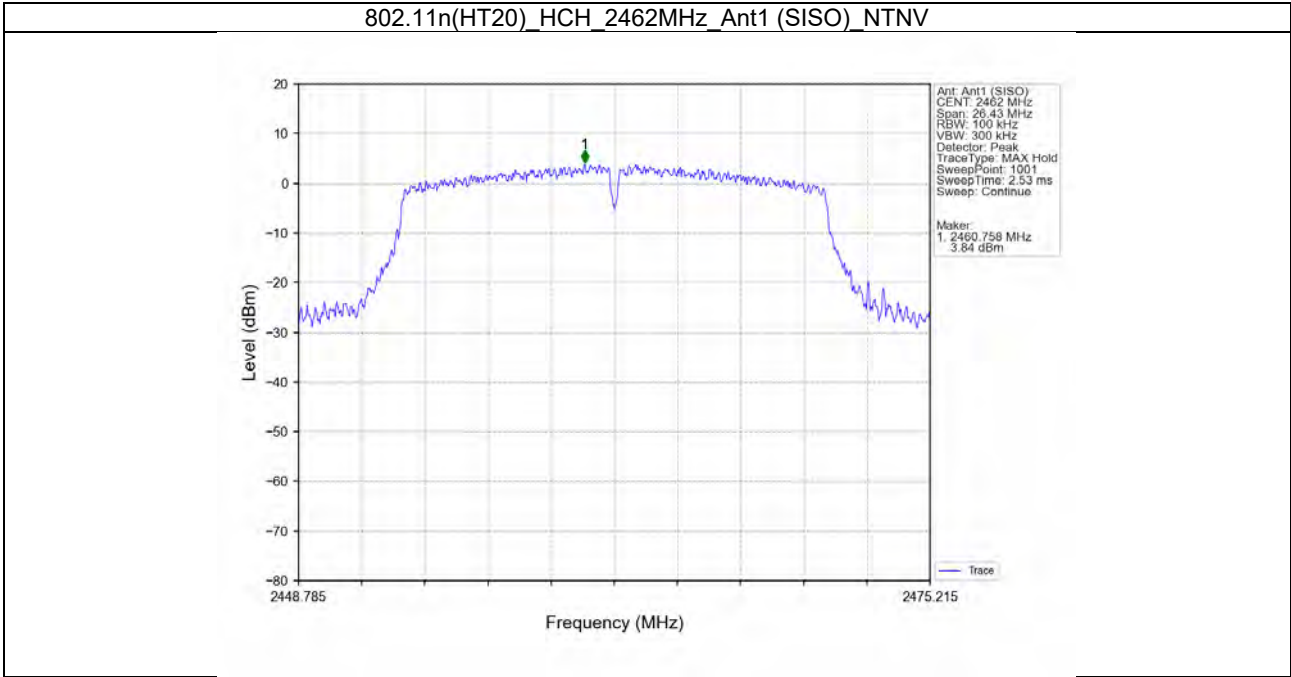




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 63 of 120

5.2.2 CSE

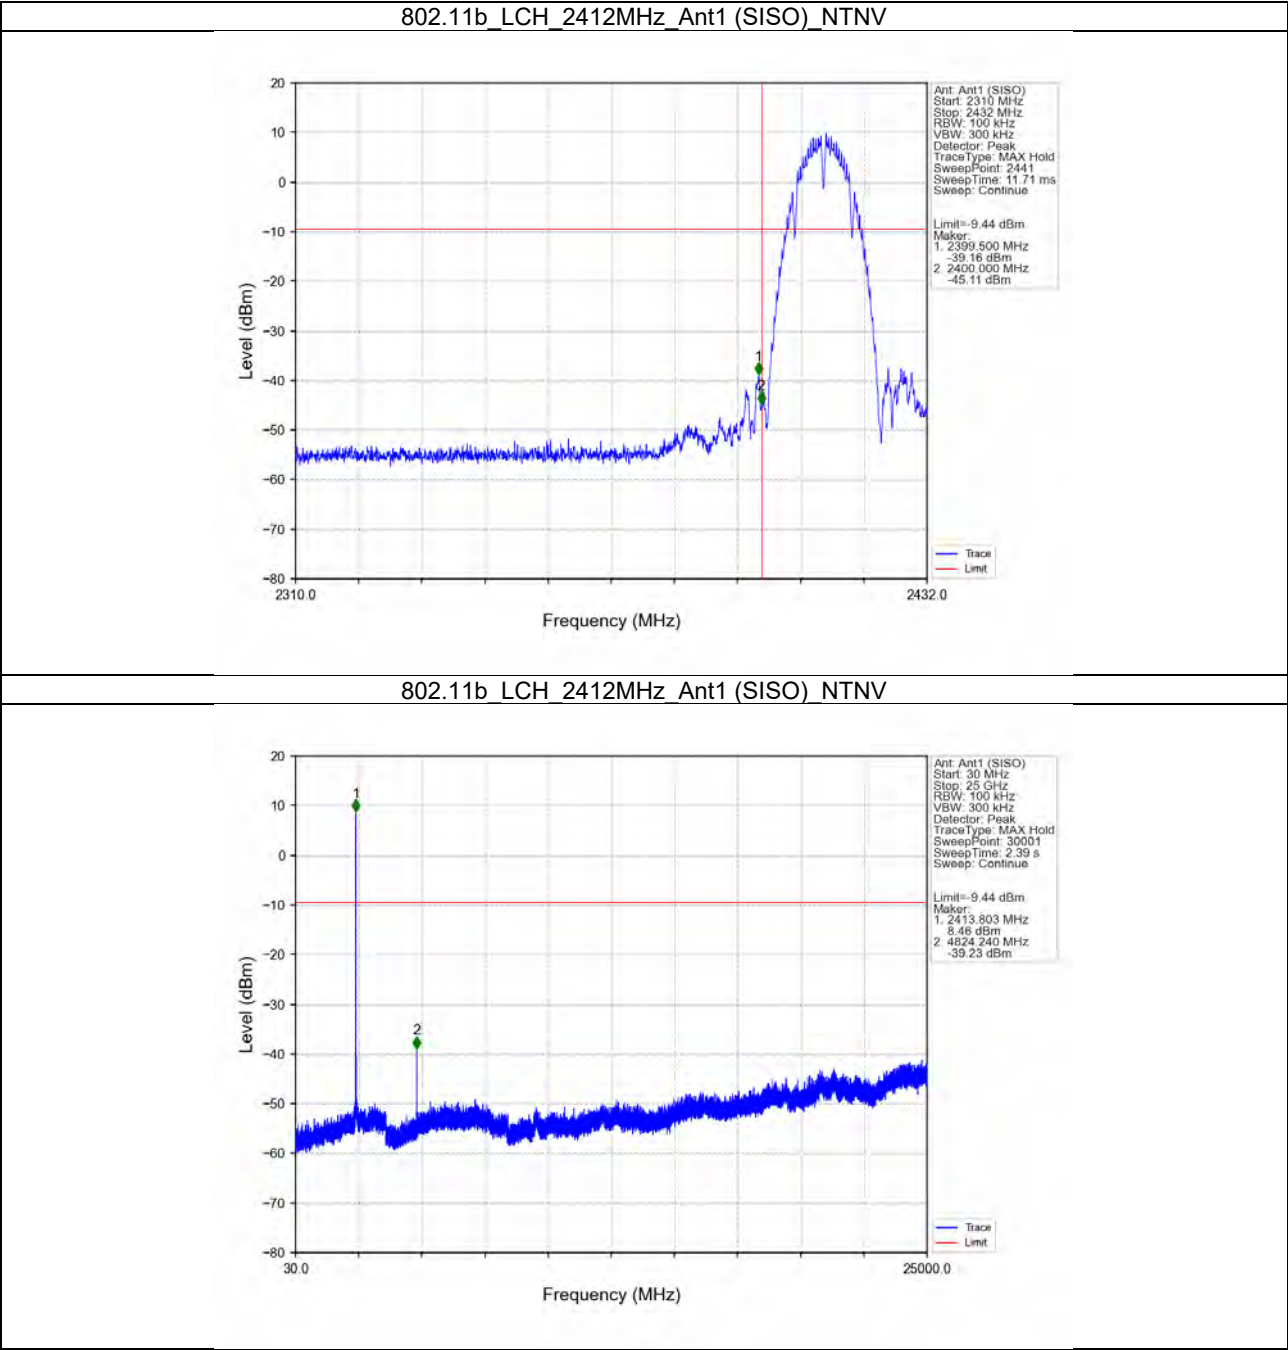





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 64 of 120

802.11b\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

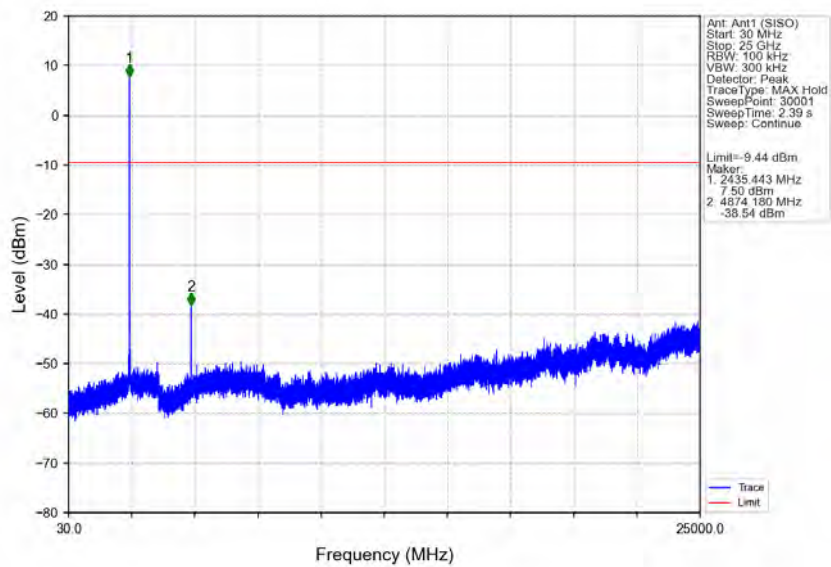

802.11b\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

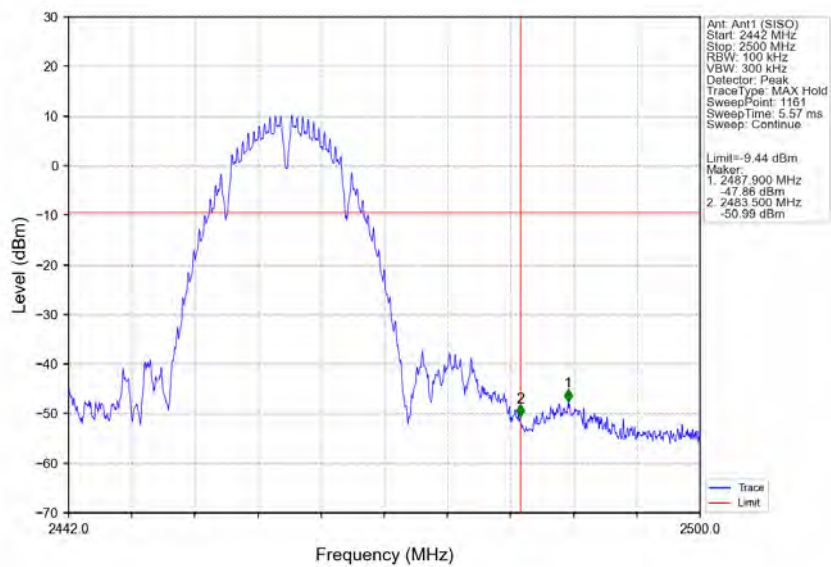





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 65 of 120

802.11b\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

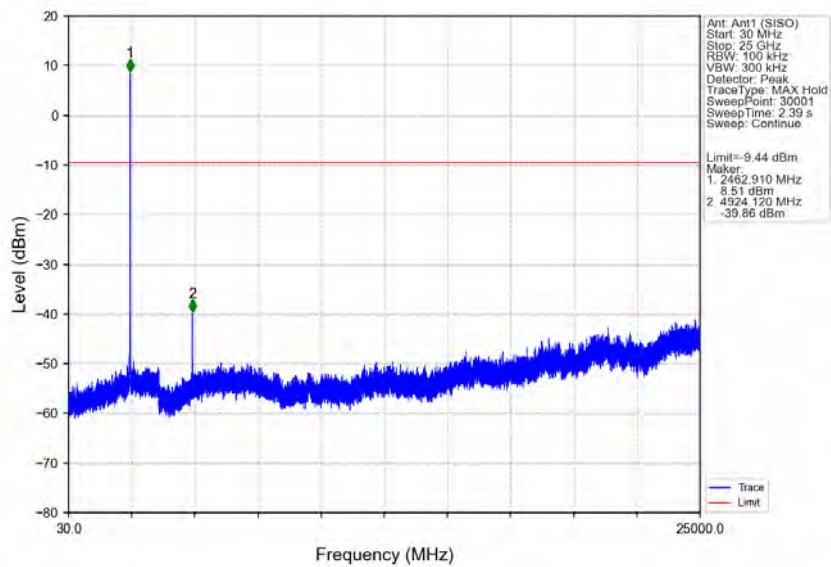

802.11g\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

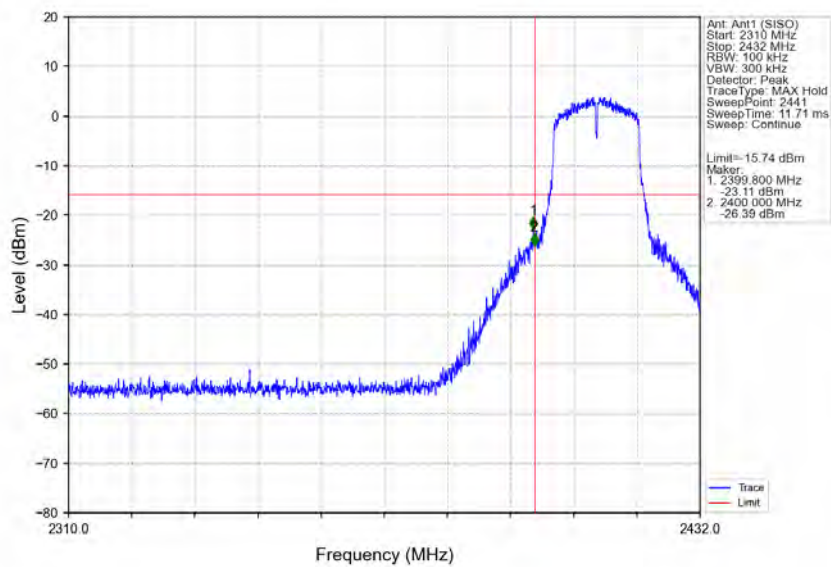





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 66 of 120

802.11g\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

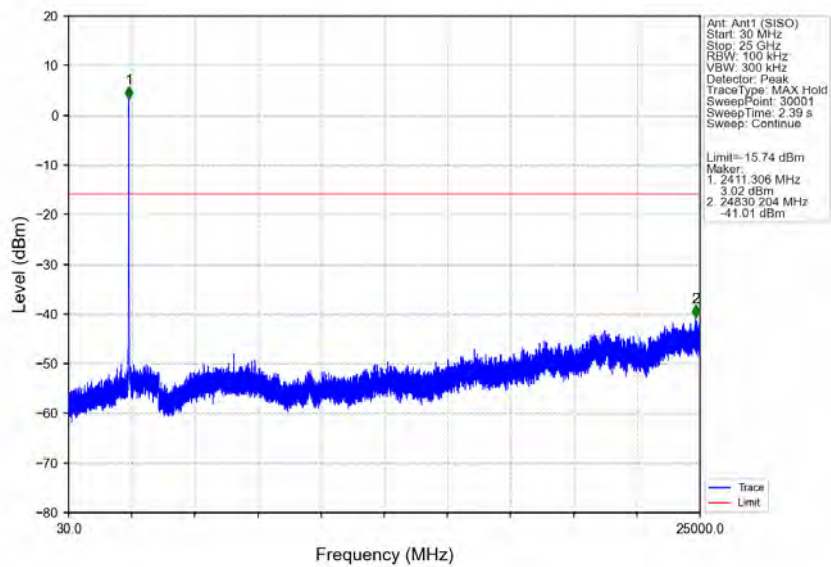

802.11g\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

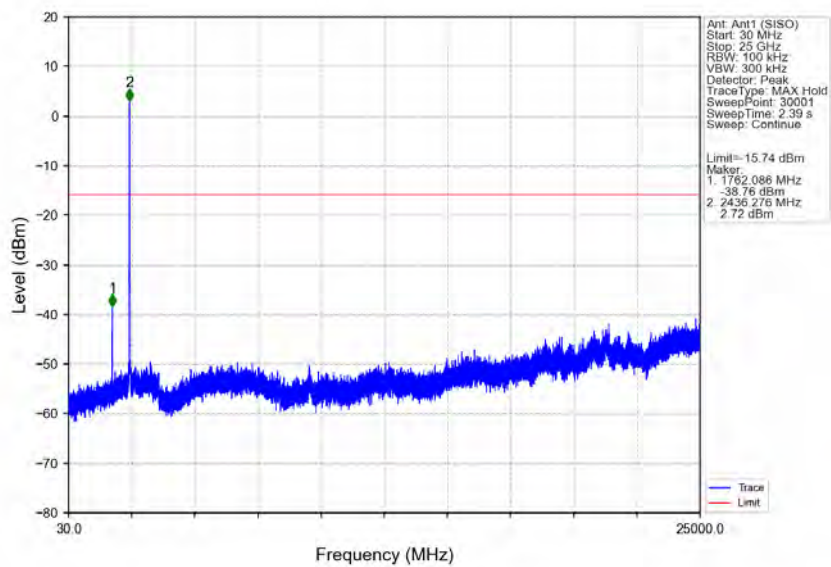





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 67 of 120

802.11g\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

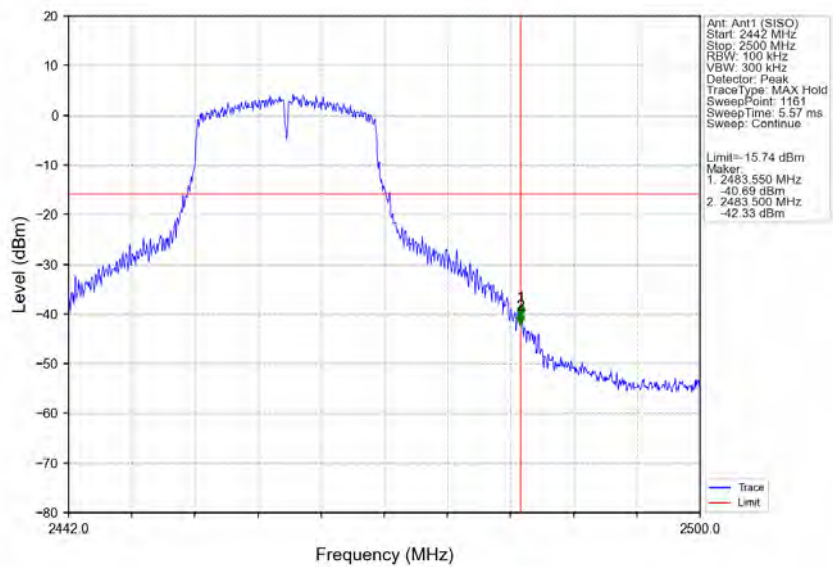

802.11g\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

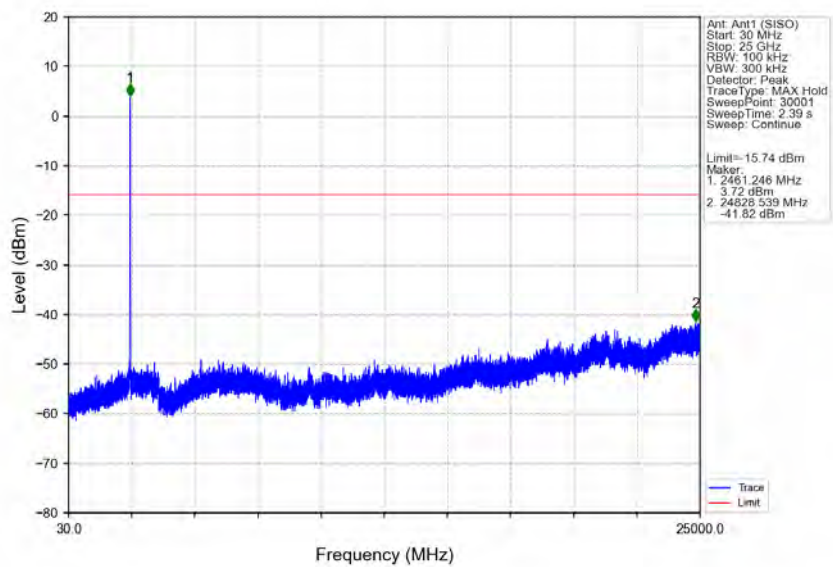





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 68 of 120

802.11n(HT20)\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

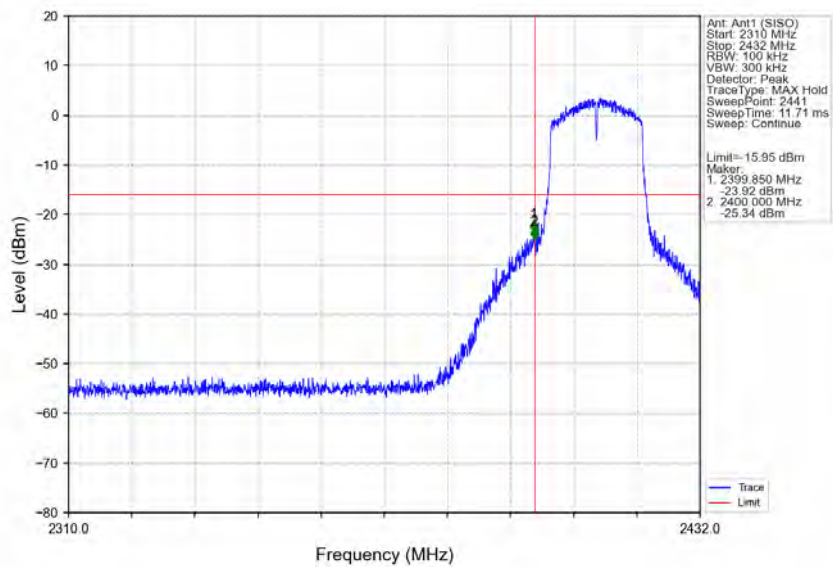

802.11n(HT20)\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

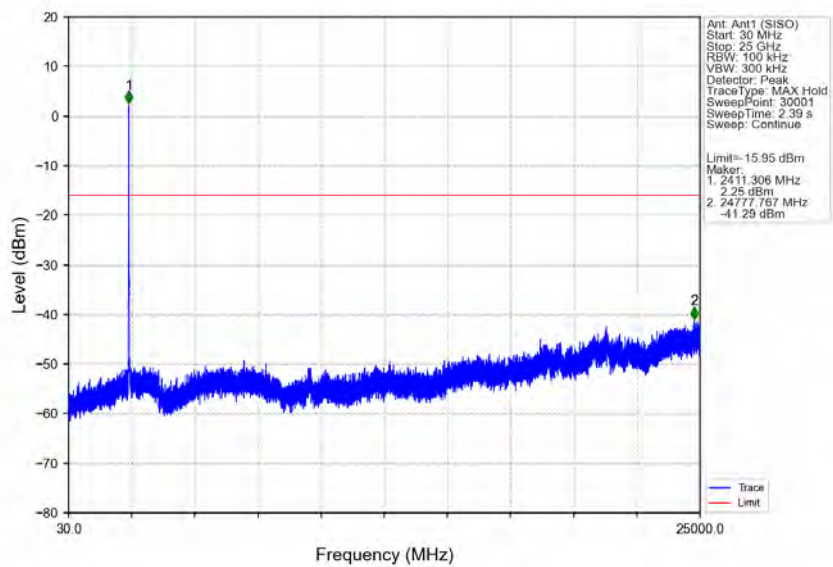





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 69 of 120

802.11n(HT20)\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

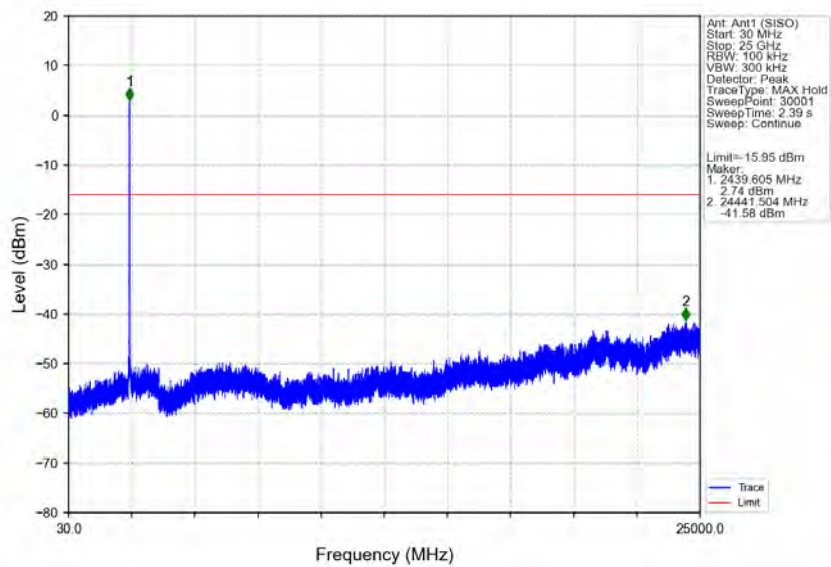


802.11n(HT20)\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

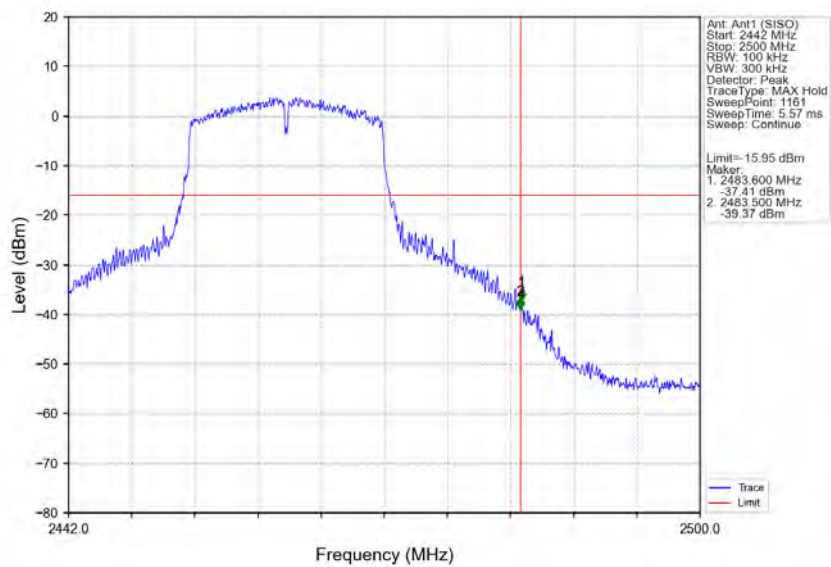



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 70 of 120

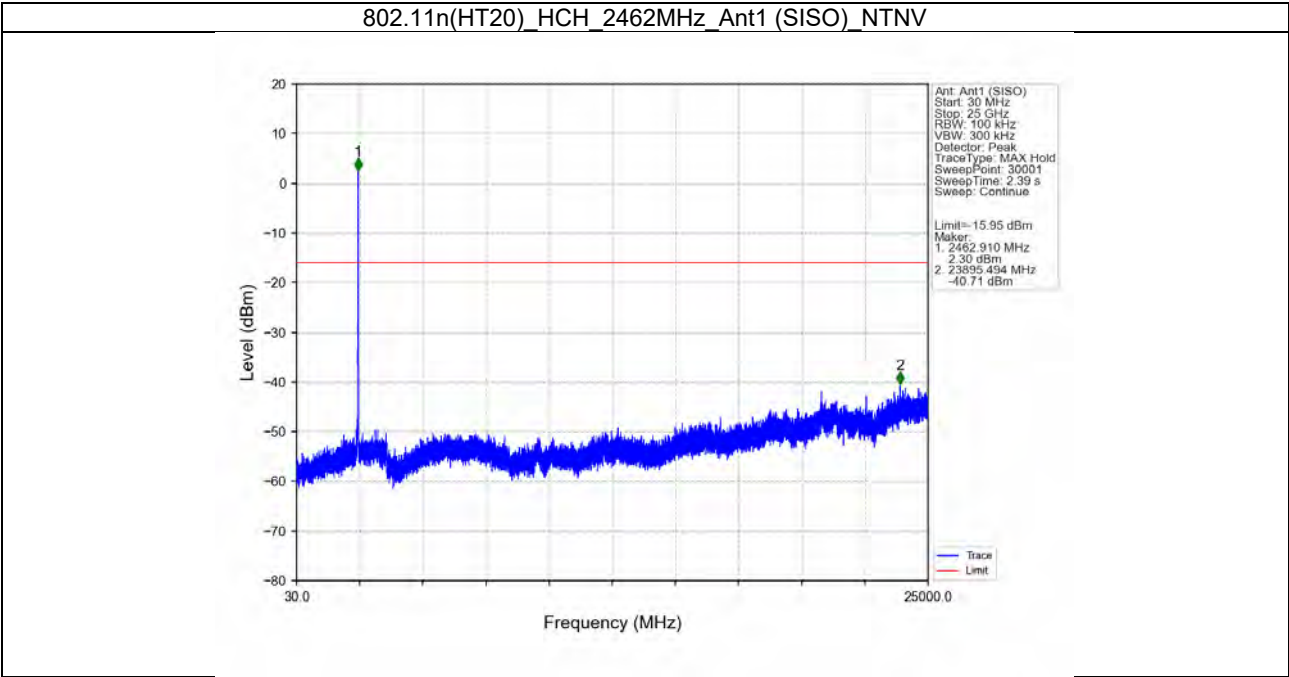



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 71 of 120

### 6. Maximum Conducted Output Power

#### 6.1 Test Result

##### 6.1.1 Power

| Mode           | TX Type | Frequency (MHz) | Maximum Average Conducted Output Power (dBm) |       | Verdict |
|----------------|---------|-----------------|----------------------------------------------|-------|---------|
|                |         |                 | ANT1                                         | Limit |         |
| 802.11b        | SISO    | 2412            | 18.12                                        | <=30  | Pass    |
|                |         | 2437            | 18.26                                        | <=30  | Pass    |
|                |         | 2462            | 18.23                                        | <=30  | Pass    |
| 802.11g        | SISO    | 2412            | 16.89                                        | <=30  | Pass    |
|                |         | 2437            | 16.94                                        | <=30  | Pass    |
|                |         | 2462            | 17.02                                        | <=30  | Pass    |
| 802.11n (HT20) | SISO    | 2412            | 16.68                                        | <=30  | Pass    |
|                |         | 2437            | 16.83                                        | <=30  | Pass    |
|                |         | 2462            | 16.90                                        | <=30  | Pass    |

Note1: Antenna Gain: Ant1: 0.90dBi;




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 72 of 120

6.2 Test Graph

6.2.1 Power

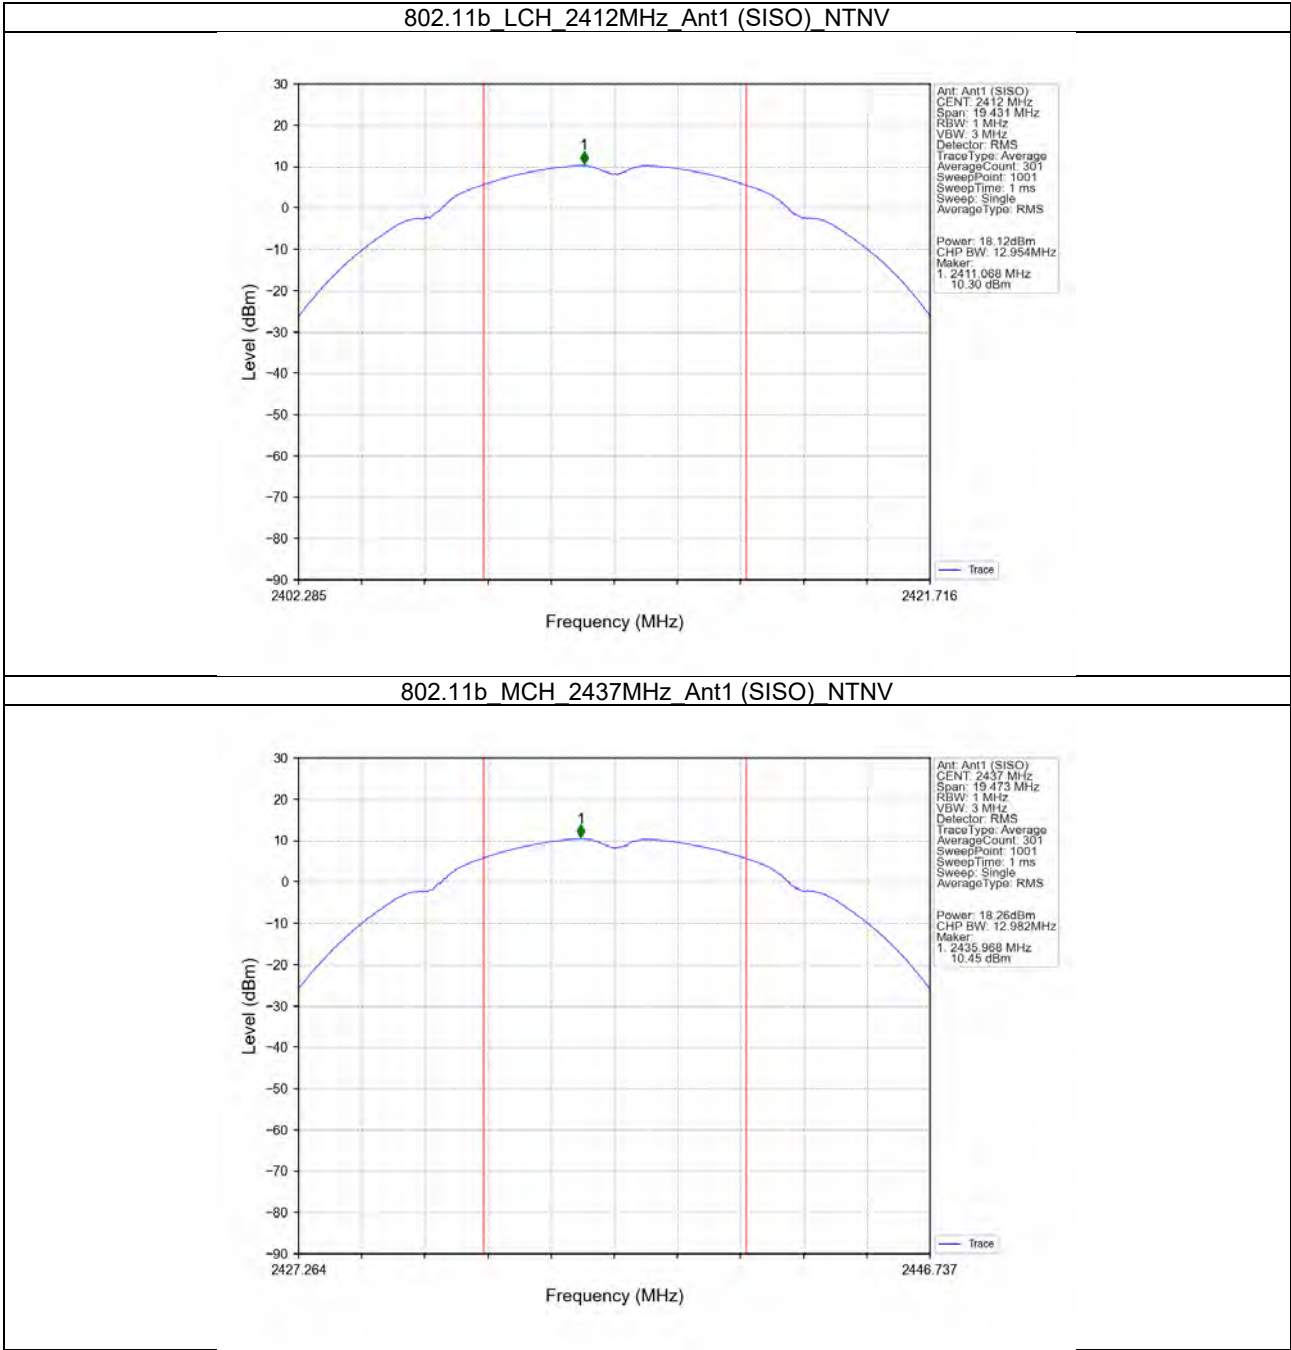





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 73 of 120

802.11b\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

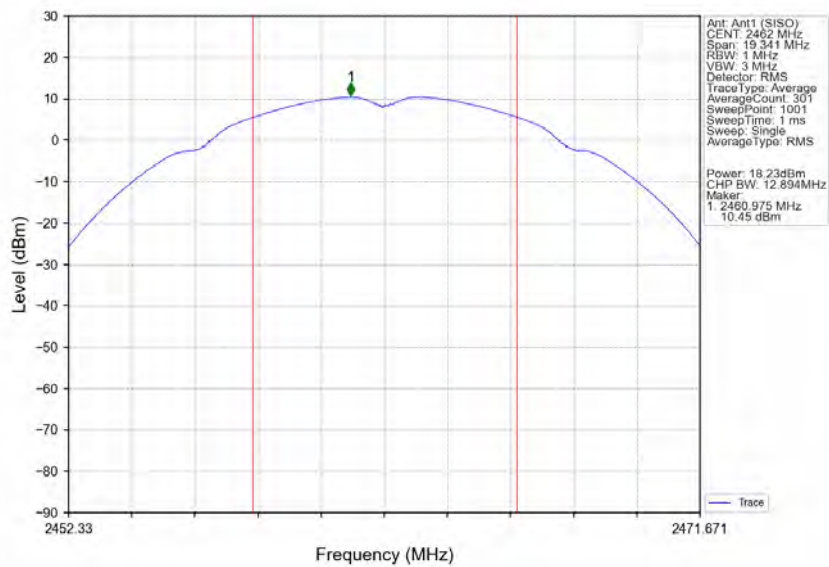

802.11g\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

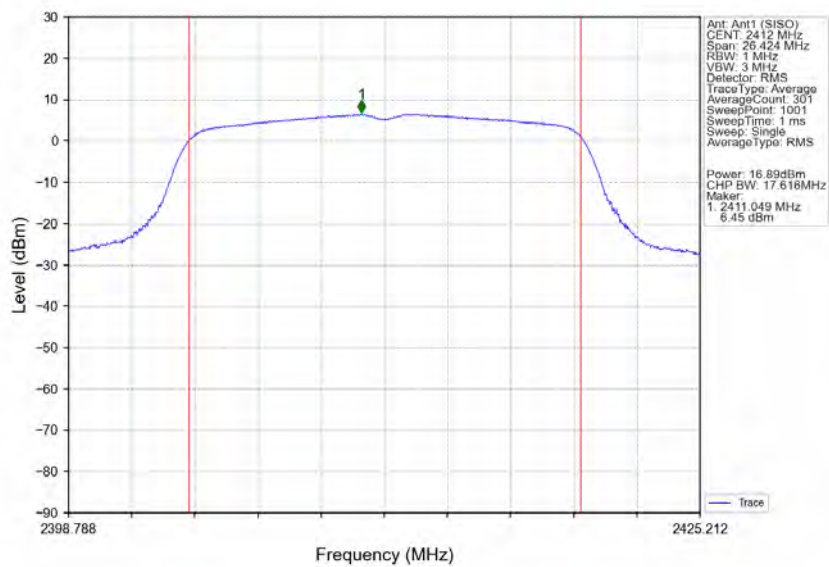





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 74 of 120

802.11g\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

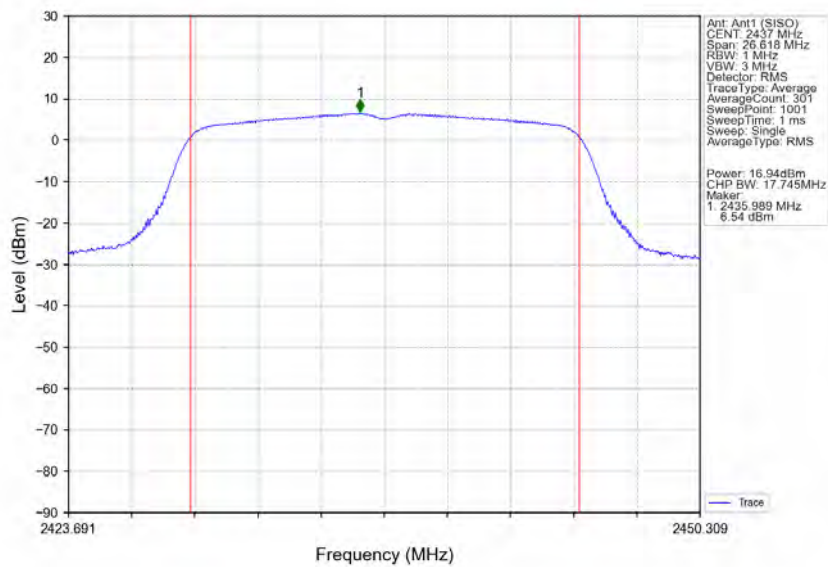

802.11g\_HCH\_2462MHz\_Ant1 (SISO)\_NTNV

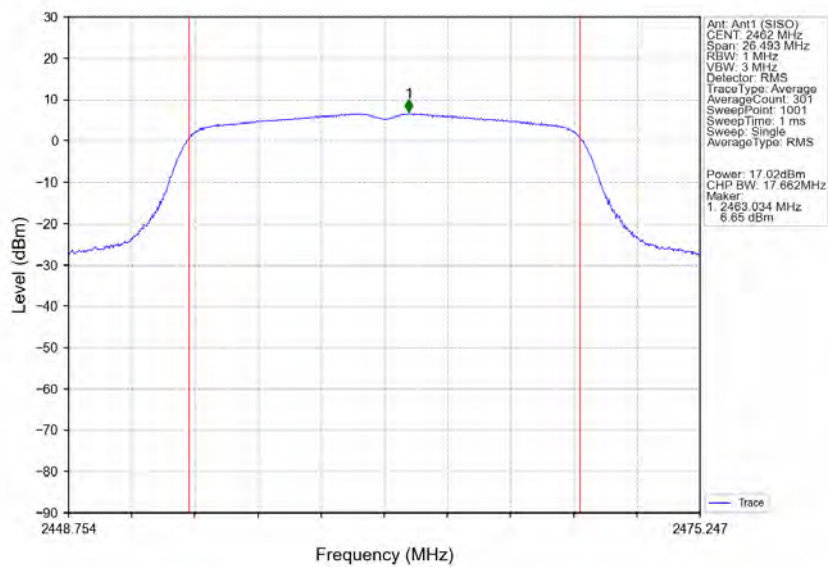





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 75 of 120

802.11n(HT20)\_LCH\_2412MHz\_Ant1 (SISO)\_NTNV

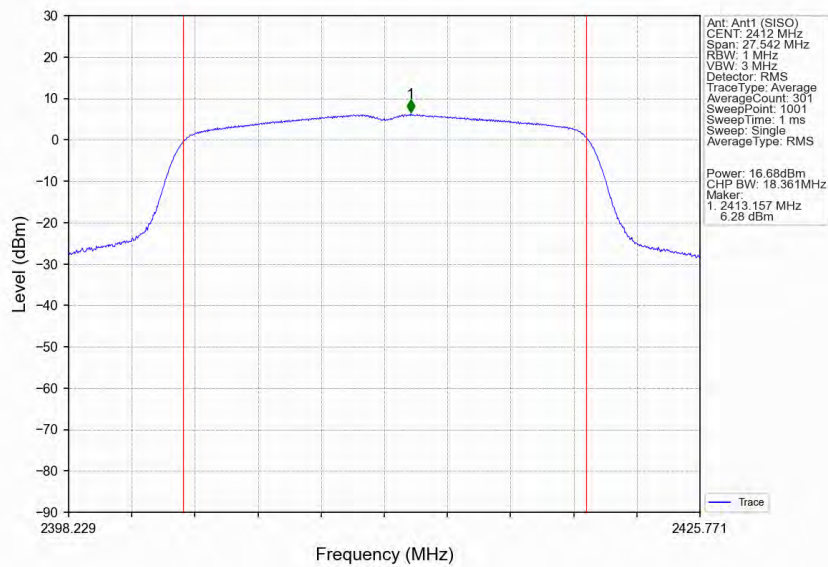


802.11n(HT20)\_MCH\_2437MHz\_Ant1 (SISO)\_NTNV

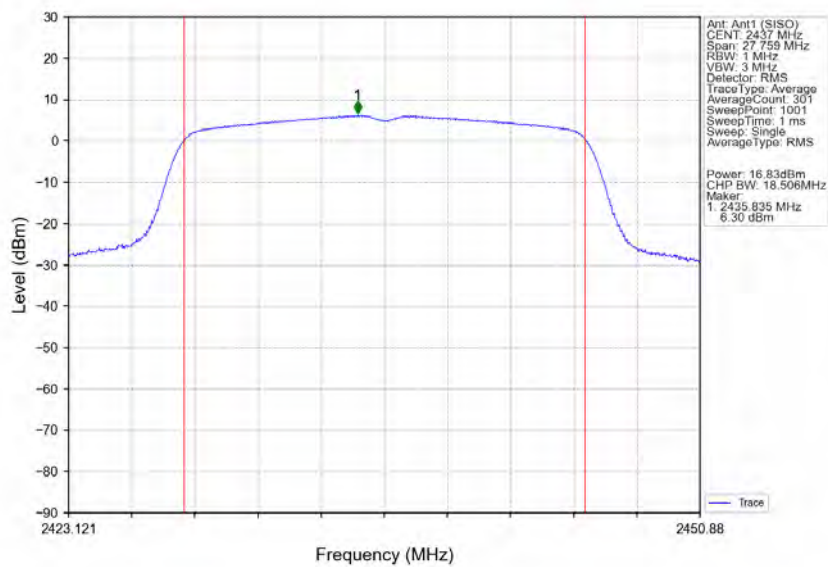



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 76 of 120

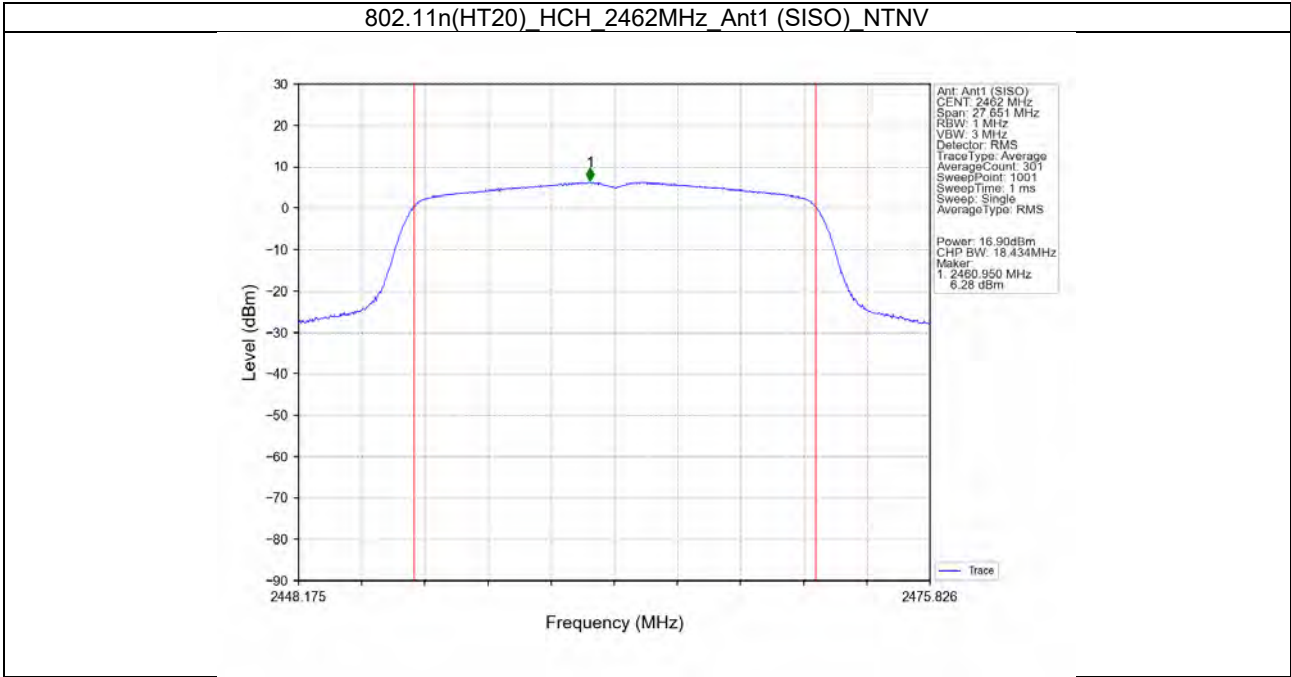



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006


Rev.: 01

Page: 77 of 120

### Radiated Spurious Emissions

#### Radiated emission below 1GHz

Worst case Mode: 802.11n20\_Channel 01

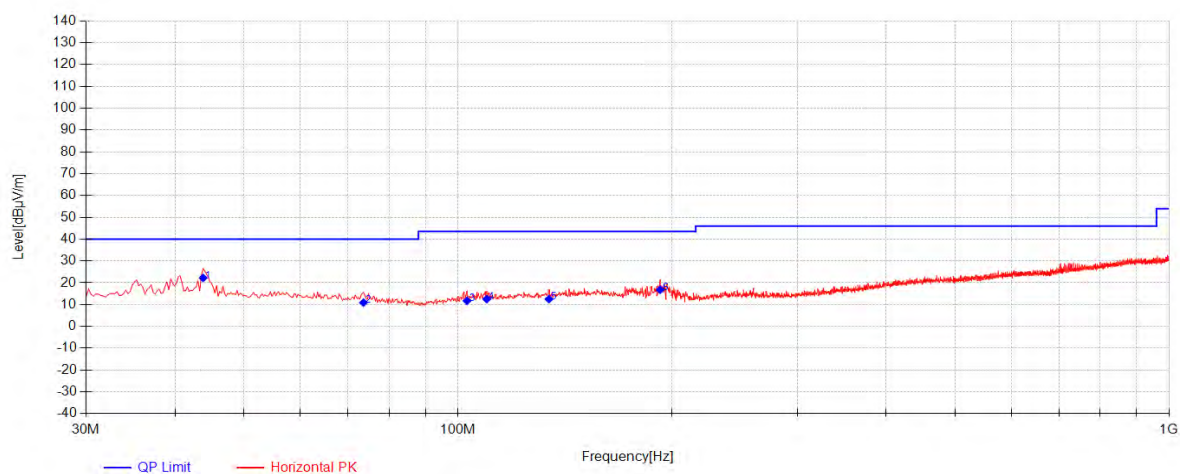

#### Final Data List

| NO. | Frequency [MHz] | Reading [dBμV] | Factor [dB] | AF [dB/m] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Polarity   |
|-----|-----------------|----------------|-------------|-----------|-------------------|-------------------|----------------|------------|
| 1   | 43.8225         | 45.23          | -42.34      | 19.33     | 22.22             | 40.00             | 17.78          | Horizontal |
| 2   | 73.65           | 36.33          | -41.99      | 16.58     | 10.92             | 40.00             | 29.08          | Horizontal |
| 3   | 102.9925        | 37.52          | -41.69      | 15.91     | 11.74             | 43.50             | 31.76          | Horizontal |
| 4   | 109.7825        | 37.89          | -41.78      | 16.38     | 12.50             | 43.50             | 31.00          | Horizontal |
| 5   | 134.275         | 36.03          | -41.53      | 18.03     | 12.52             | 43.50             | 30.98          | Horizontal |
| 6   | 192.475         | 42.03          | -40.97      | 15.76     | 16.82             | 43.50             | 26.68          | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 78 of 120

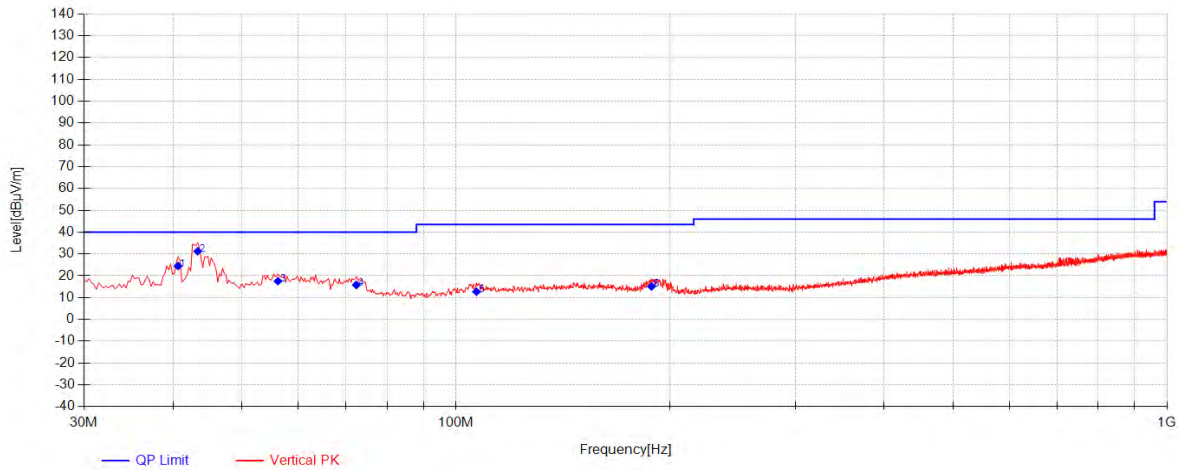

### Final Data List

| NO. | Frequency [MHz] | Reading [dBμV] | Factor [dB] | AF [dB/m] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Polarity |
|-----|-----------------|----------------|-------------|-----------|-------------------|-------------------|----------------|----------|
| 1   | 40.67           | 47.26          | -42.32      | 19.55     | 24.49             | 40.00             | 15.51          | Vertical |
| 2   | 43.3375         | 54.22          | -42.34      | 19.37     | 31.25             | 40.00             | 8.75           | Vertical |
| 3   | 56.19           | 41.11          | -42.29      | 18.71     | 17.53             | 40.00             | 22.47          | Vertical |
| 4   | 72.4375         | 41.03          | -42.02      | 16.79     | 15.80             | 40.00             | 24.20          | Vertical |
| 5   | 106.8725        | 38.26          | -41.74      | 16.18     | 12.70             | 43.50             | 30.80          | Vertical |
| 6   | 188.3525        | 40.01          | -40.96      | 16.07     | 15.12             | 43.50             | 28.38          | Vertical |

### Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:  
Value = Reading(dBμV) + AF(dB/m) + Factor(dB):  
AF = Antenna Factor(dB/m)  
Factor = Cable Factor(dB) - Preamplifier gain(dB)  
Margin = Limit(dBμV/m) – Value(dBμV/m)
- All channels have been tested, but only the worst case data displayed in this report.



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400032006

Rev.: 01

Page: 79 of 120

### Transmitter emission Above 1GHz

#### 802.11b\_Channel 01

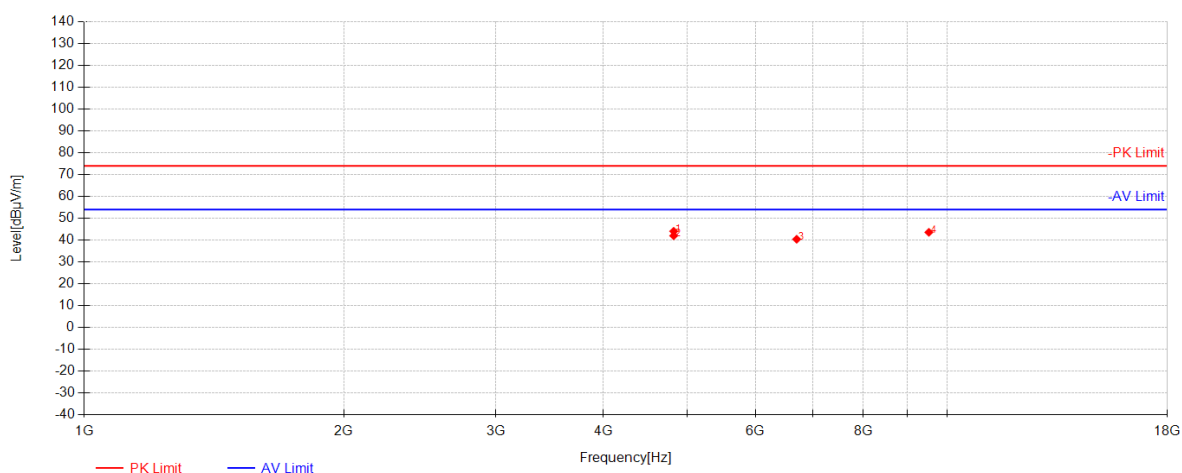

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 4824            | 58.49          | 31.12     | -45.54      | 44.07          | 74.00          | 29.93       | Horizontal |
| 2         | 4824.375        | 56.44          | 31.12     | -45.54      | 42.02          | 54.00          | 11.98       | Horizontal |
| 3         | 6698.25         | 49.79          | 34.46     | -43.82      | 40.43          | 74.00          | 33.57       | Horizontal |
| 4         | 9531.75         | 46.08          | 37.56     | -40.05      | 43.59          | 74.00          | 30.41       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 80 of 120

### 802.11b\_Channel 01

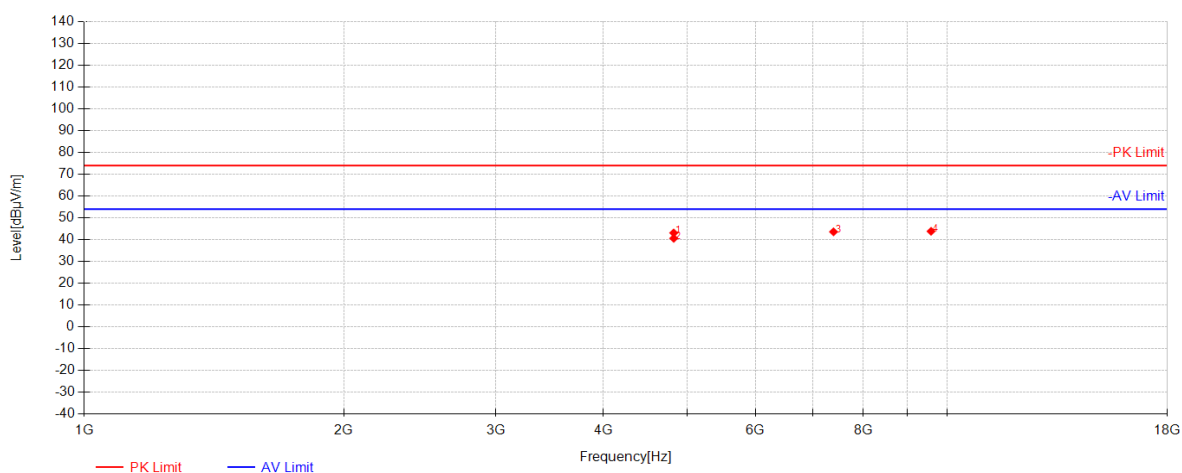

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 4824            | 57.52          | 31.12     | -45.54      | 43.10          | 74.00          | 30.90       | Vertical |
| 2         | 4824.375        | 55.03          | 31.12     | -45.54      | 40.61          | 54.00          | 13.39       | Vertical |
| 3         | 7390.125        | 50.95          | 36.09     | -43.44      | 43.60          | 74.00          | 30.40       | Vertical |
| 4         | 9588            | 45.91          | 37.68     | -39.74      | 43.85          | 74.00          | 30.15       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 81 of 120

### 802.11b\_Channel 06

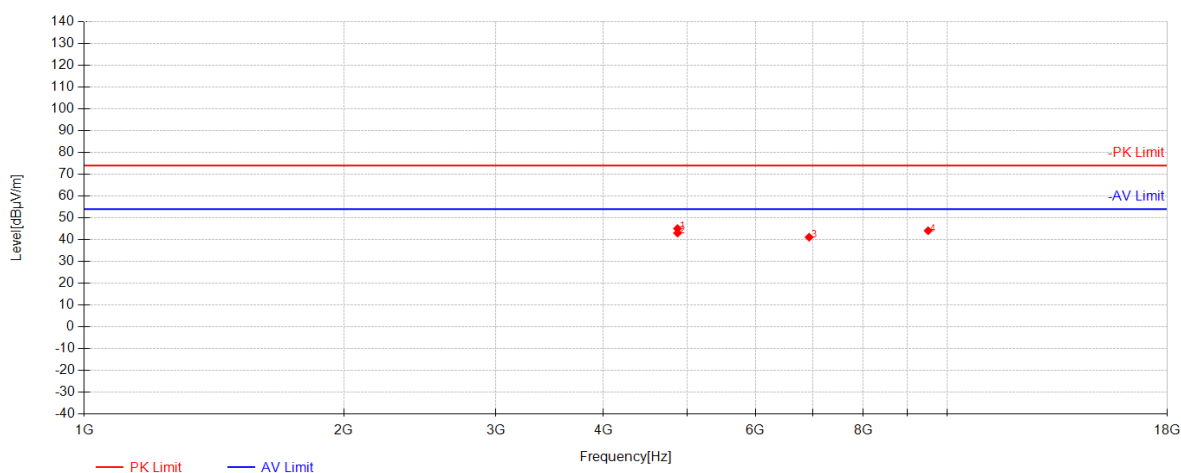

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 4873.875        | 59.43          | 31.20     | -45.53      | 45.10          | 74.00          | 28.90       | Horizontal |
| 2         | 4874.25         | 57.38          | 31.20     | -45.53      | 43.05          | 54.00          | 10.95       | Horizontal |
| 3         | 6924.375        | 50.24          | 34.86     | -43.97      | 41.14          | 74.00          | 32.86       | Horizontal |
| 4         | 9513            | 46.74          | 37.53     | -40.16      | 44.11          | 74.00          | 29.89       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 82 of 120

### 802.11b\_Channel 06

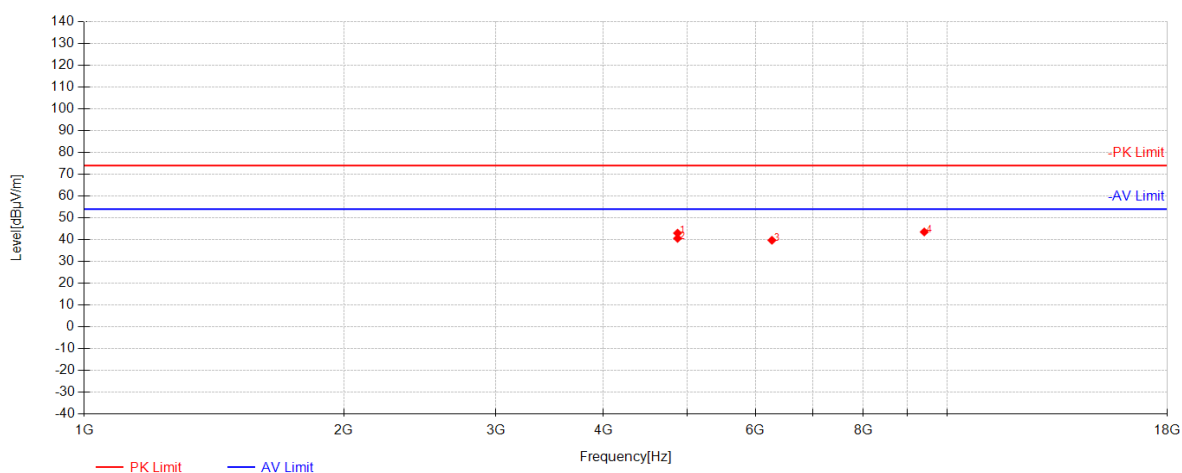


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 4873.875        | 57.34          | 31.20     | -45.53      | 43.01          | 74.00          | 30.99       | Vertical |
| 2         | 4874.25         | 54.93          | 31.20     | -45.53      | 40.60          | 54.00          | 13.40       | Vertical |
| 3         | 6269.25         | 51.01          | 33.32     | -44.61      | 39.72          | 74.00          | 34.28       | Vertical |
| 4         | 9415.875        | 46.11          | 37.33     | -39.89      | 43.55          | 74.00          | 30.45       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 83 of 120

802.11b\_Channel 11

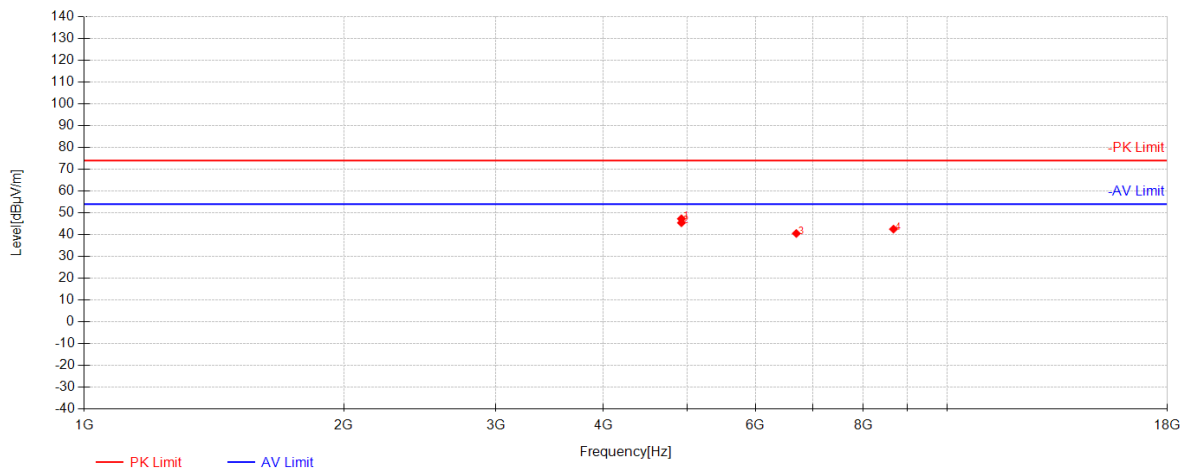

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 4924.125        | 61.58          | 31.28     | -45.56      | 47.30          | 74.00          | 26.70       | Horizontal |
| 2         | 4924.5          | 59.72          | 31.28     | -45.56      | 45.44          | 54.00          | 8.56        | Horizontal |
| 3         | 6691.5          | 49.96          | 34.44     | -43.86      | 40.55          | 74.00          | 33.45       | Horizontal |
| 4         | 8672.625        | 47.45          | 36.70     | -41.59      | 42.55          | 74.00          | 31.45       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 84 of 120

### 802.11b\_Channel 11

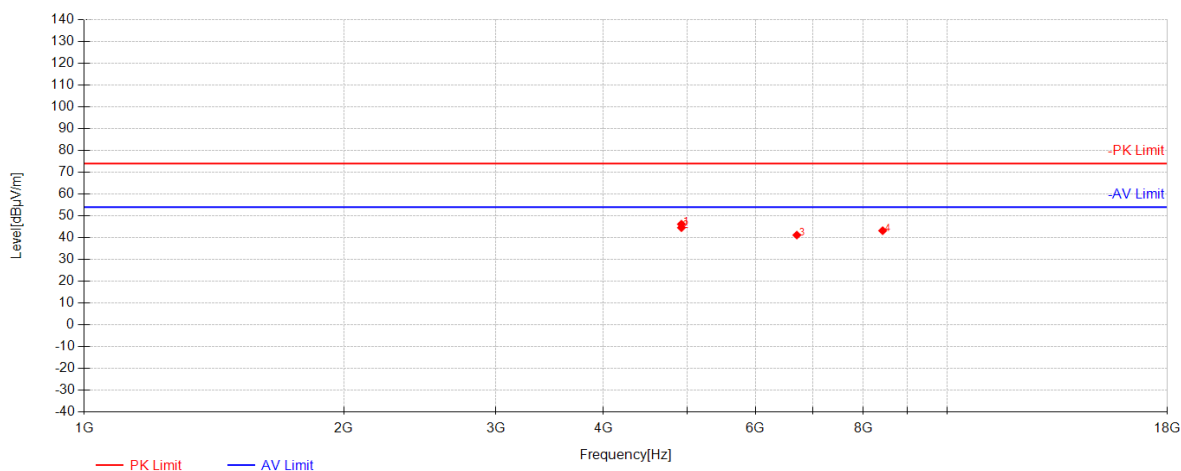

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 4924.125        | 60.48          | 31.28     | -45.56      | 46.20          | 74.00          | 27.80       | Vertical |
| 2         | 4924.5          | 58.86          | 31.28     | -45.56      | 44.58          | 54.00          | 9.42        | Vertical |
| 3         | 6700.875        | 50.55          | 34.46     | -43.81      | 41.20          | 74.00          | 32.80       | Vertical |
| 4         | 8425.875        | 47.86          | 36.84     | -41.49      | 43.21          | 74.00          | 30.79       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 85 of 120

### 802.11g\_Channel 01

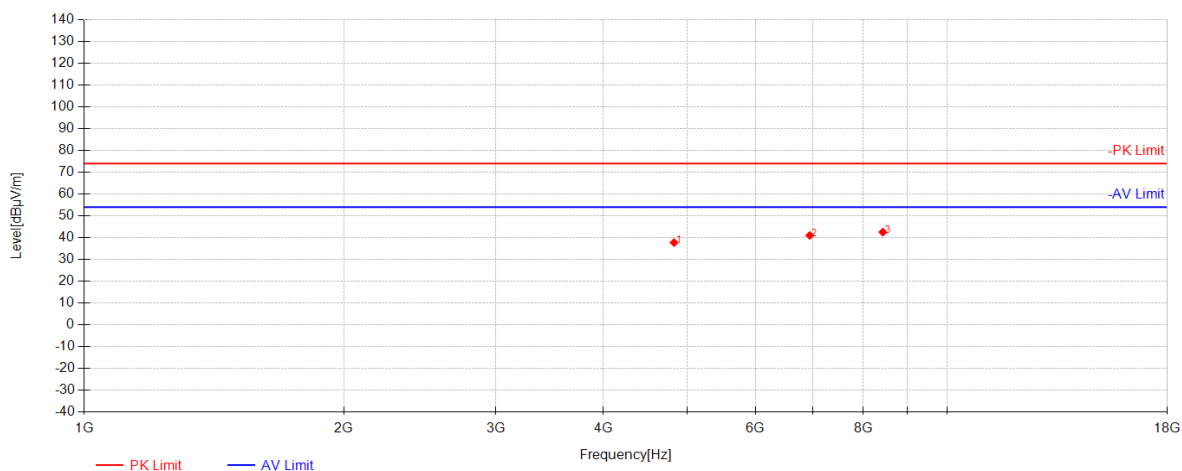

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 4828.875        | 52.14          | 31.13     | -45.54      | 37.73          | 74.00          | 36.27       | Horizontal |
| 2         | 6936.375        | 50.03          | 34.89     | -43.90      | 41.02          | 74.00          | 32.98       | Horizontal |
| 3         | 8430.75         | 47.22          | 36.84     | -41.50      | 42.56          | 74.00          | 31.44       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 86 of 120

### 802.11g\_Channel 01

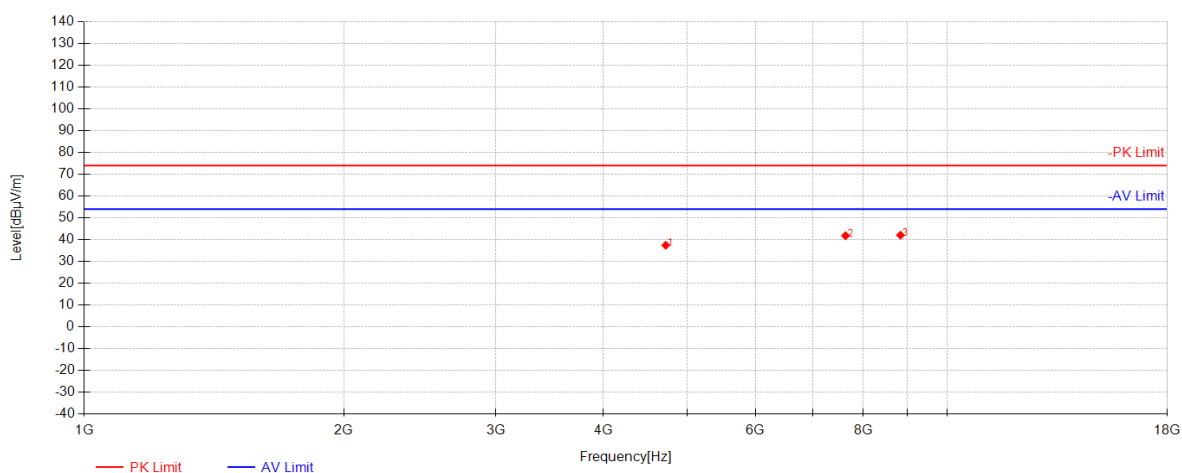

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 4722.75         | 52.05          | 30.96     | -45.59      | 37.42          | 74.00          | 36.58       | Vertical |
| 2         | 7630.5          | 48.22          | 36.58     | -42.99      | 41.81          | 74.00          | 32.19       | Vertical |
| 3         | 8836.875        | 46.73          | 36.60     | -41.25      | 42.08          | 74.00          | 31.92       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 87 of 120

### 802.11g\_Channel 06

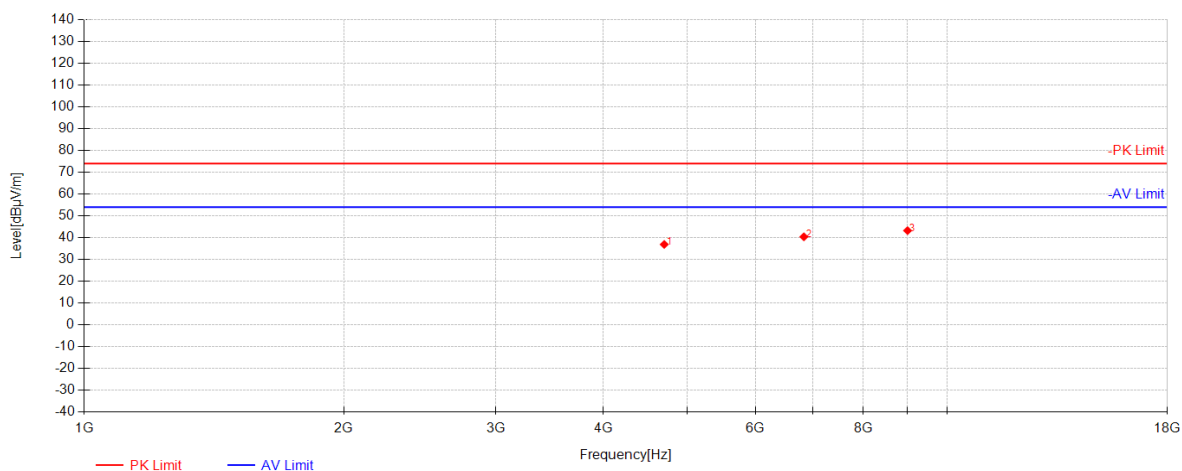

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 4703.625        | 51.56          | 30.93     | -45.60      | 36.89          | 74.00          | 37.11       | Horizontal |
| 2         | 6828            | 49.86          | 34.69     | -44.15      | 40.40          | 74.00          | 33.60       | Horizontal |
| 3         | 9004.875        | 47.71          | 36.51     | -40.97      | 43.25          | 74.00          | 30.75       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 88 of 120

### 802.11g\_Channel 06

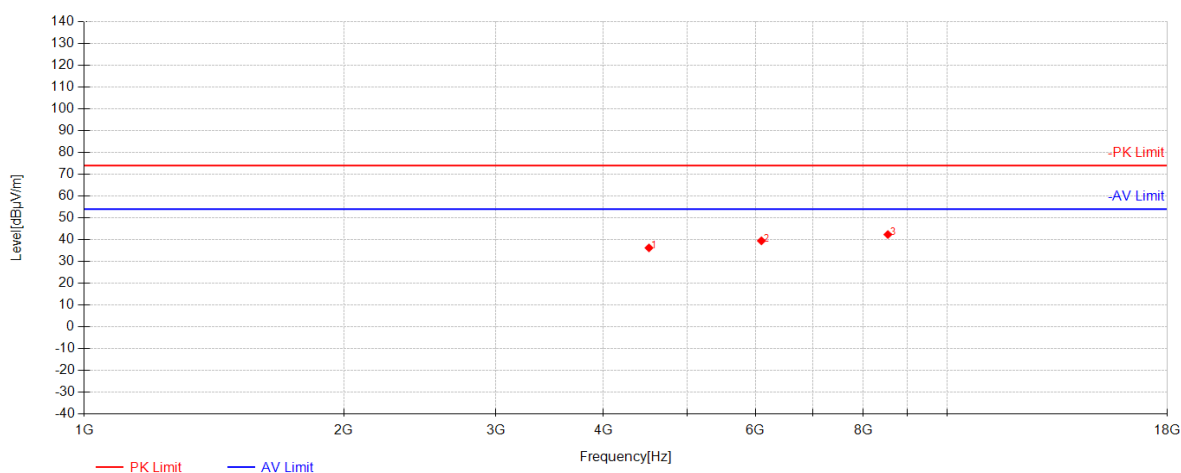

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 4516.125        | 51.32          | 30.63     | -45.70      | 36.24          | 74.00          | 37.76       | Vertical |
| 2         | 6097.125        | 51.21          | 32.73     | -44.46      | 39.48          | 74.00          | 34.52       | Vertical |
| 3         | 8544            | 47.10          | 36.77     | -41.49      | 42.38          | 74.00          | 31.62       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 89 of 120

### 802.11g\_Channel 11

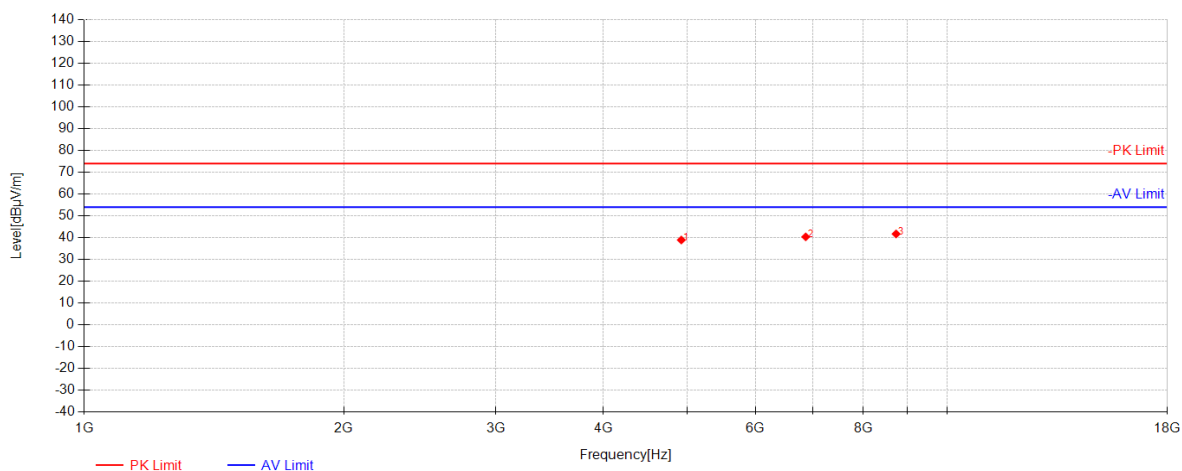

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 4923            | 53.22          | 31.28     | -45.56      | 38.94          | 74.00          | 35.06       | Horizontal |
| 2         | 6861.75         | 49.75          | 34.75     | -44.13      | 40.37          | 74.00          | 33.63       | Horizontal |
| 3         | 8733.75         | 46.60          | 36.66     | -41.54      | 41.72          | 74.00          | 32.28       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 90 of 120

### 802.11g\_Channel 111

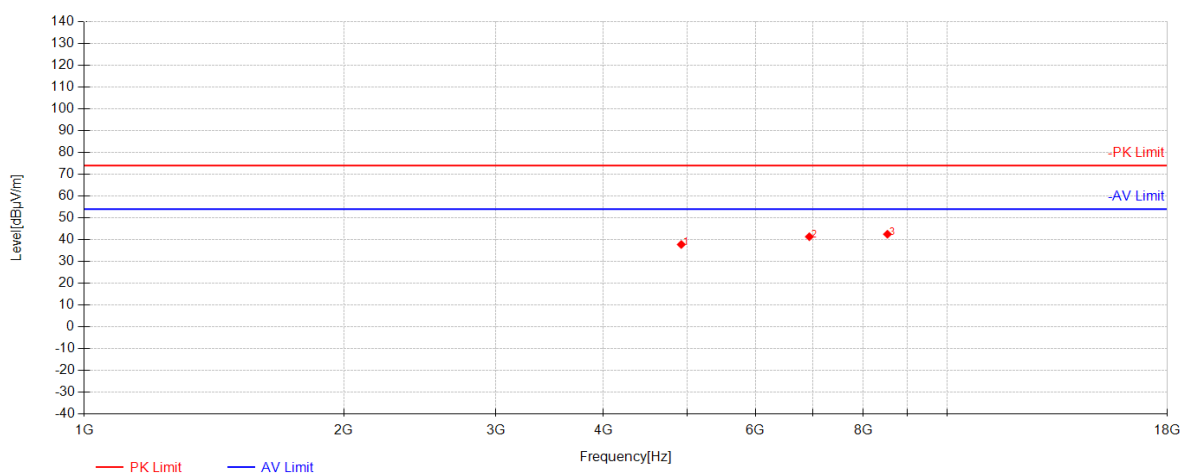

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 4923            | 52.07          | 31.28     | -45.56      | 37.79          | 74.00          | 36.21       | Vertical |
| 2         | 6928.5          | 50.42          | 34.87     | -43.94      | 41.35          | 74.00          | 32.65       | Vertical |
| 3         | 8534.25         | 47.26          | 36.78     | -41.52      | 42.52          | 74.00          | 31.48       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 91 of 120

### 802.11n20\_Channel 01

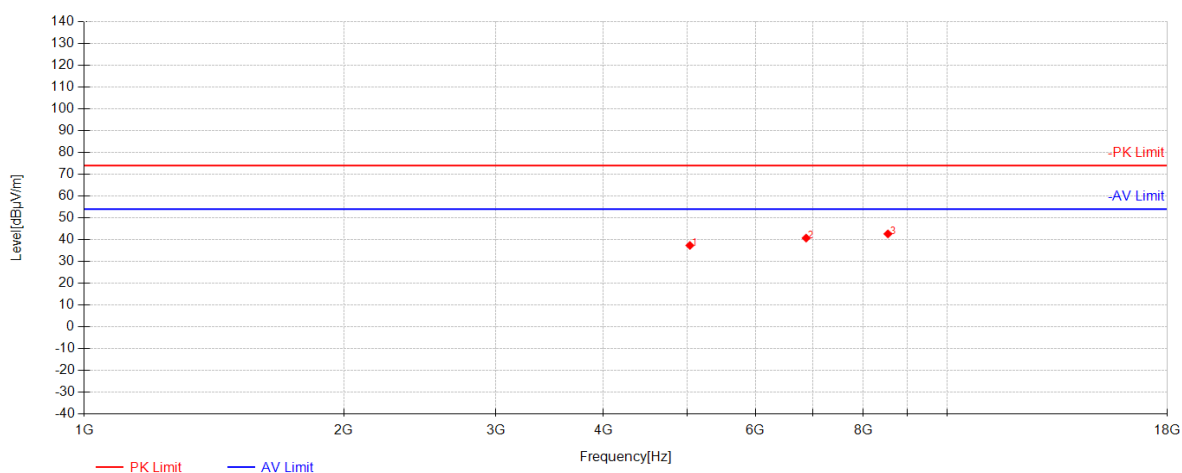


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 5037.375        | 51.42          | 31.47     | -45.54      | 37.35          | 74.00          | 36.65       | Horizontal |
| 2         | 6870            | 50.09          | 34.77     | -44.12      | 40.73          | 74.00          | 33.27       | Horizontal |
| 3         | 8546.25         | 47.37          | 36.77     | -41.49      | 42.66          | 74.00          | 31.34       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 92 of 120

802.11n20\_Channel 01

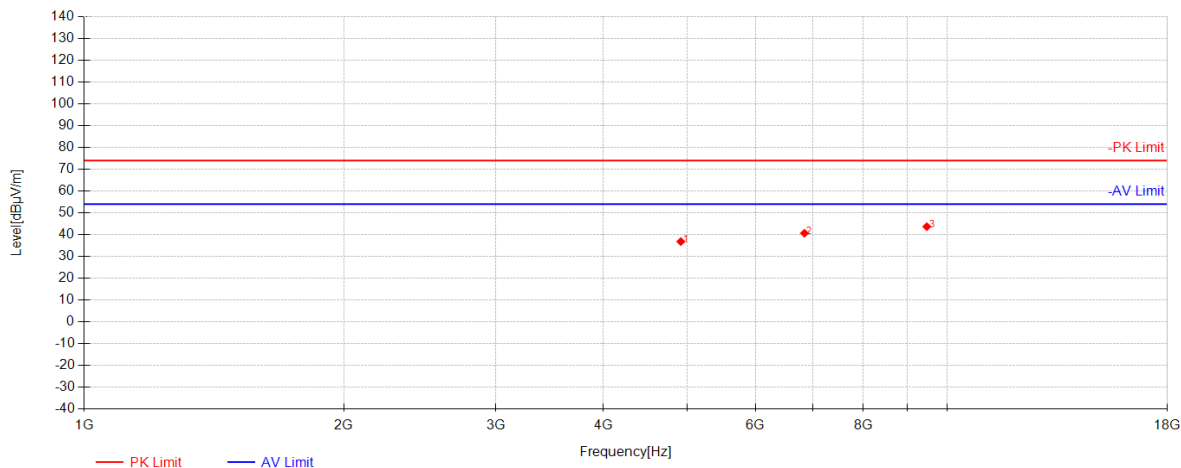

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 4916.625        | 51.11          | 31.27     | -45.55      | 36.83          | 74.00          | 37.17       | Vertical |
| 2         | 6838.5          | 50.10          | 34.71     | -44.14      | 40.67          | 74.00          | 33.33       | Vertical |
| 3         | 9480            | 46.38          | 37.46     | -40.15      | 43.69          | 74.00          | 30.31       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 93 of 120

### 802.11n20\_Channel 06

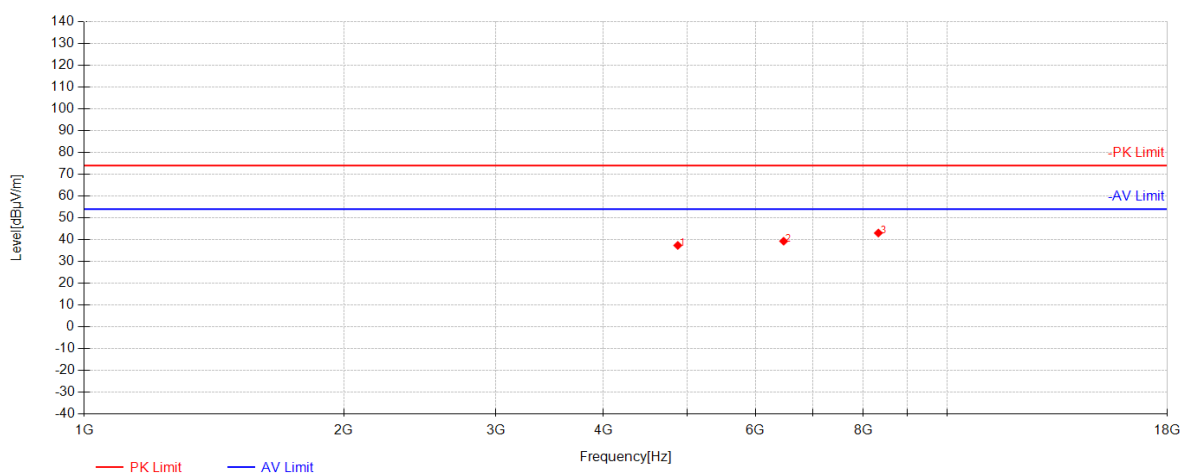


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 4876.875        | 51.70          | 31.20     | -45.53      | 37.37          | 74.00          | 36.63       | Horizontal |
| 2         | 6469.125        | 49.85          | 34.00     | -44.55      | 39.30          | 74.00          | 34.70       | Horizontal |
| 3         | 8330.25         | 48.00          | 36.90     | -41.84      | 43.06          | 74.00          | 30.94       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 94 of 120

802.11n20\_Channel 06

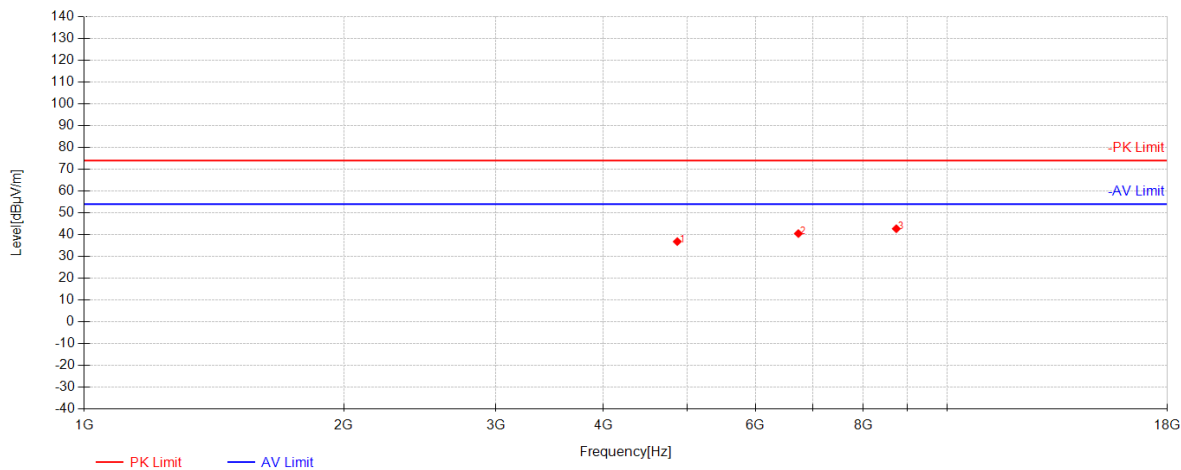

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 4870.5          | 51.17          | 31.19     | -45.53      | 36.83          | 74.00          | 37.17       | Vertical |
| 2         | 6728.625        | 49.90          | 34.51     | -43.91      | 40.50          | 74.00          | 33.50       | Vertical |
| 3         | 8738.625        | 47.60          | 36.66     | -41.52      | 42.74          | 74.00          | 31.26       | Vertical |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 95 of 120

### 802.11n20\_Channel 11

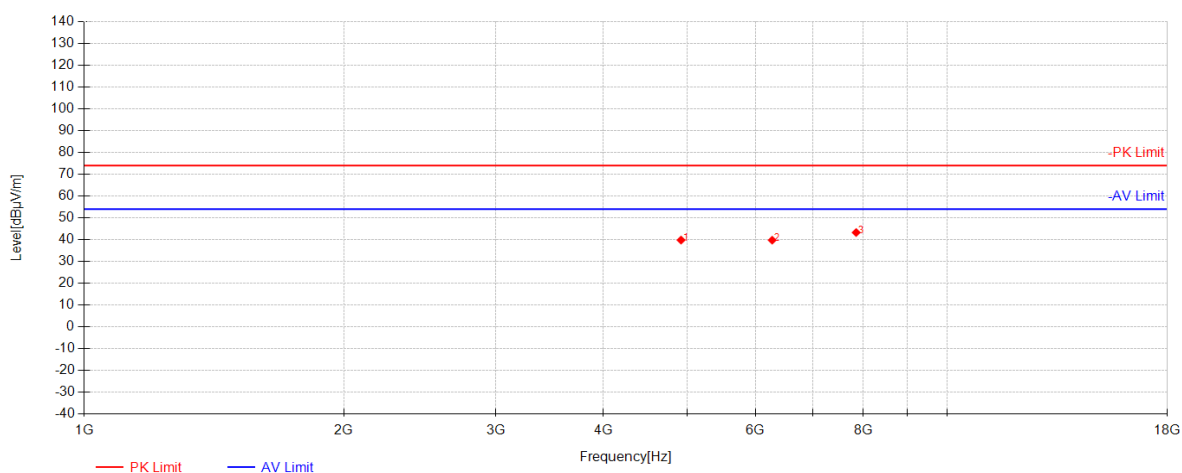

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 4920            | 54.10          | 31.27     | -45.55      | 39.82          | 74.00          | 34.18       | Horizontal |
| 2         | 6274.5          | 51.03          | 33.33     | -44.60      | 39.77          | 74.00          | 34.23       | Horizontal |
| 3         | 7850.625        | 48.97          | 36.89     | -42.57      | 43.29          | 74.00          | 30.71       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 96 of 120

### 802.11n20\_Channel 11

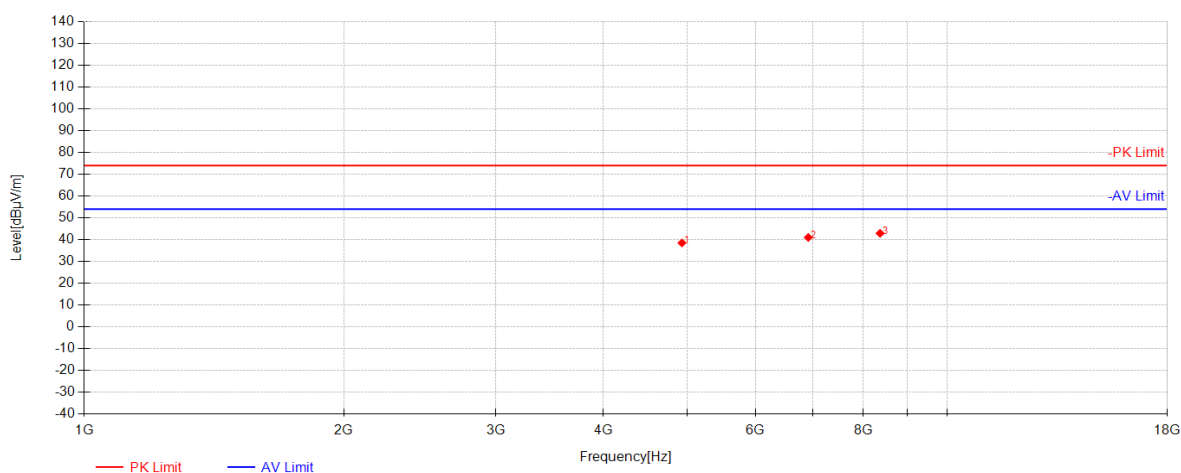

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 4931.25         | 52.78          | 31.29     | -45.56      | 38.51          | 74.00          | 35.49       | Vertical |
| 2         | 6909.375        | 50.22          | 34.84     | -44.05      | 41.01          | 74.00          | 32.99       | Vertical |
| 3         | 8367.375        | 47.67          | 36.88     | -41.63      | 42.92          | 74.00          | 31.08       | Vertical |

#### Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:  
Level = Reading(dBμV) + AF(dB/m) + Factor(dB):  
AF = Antenna Factor(dB/m)  
Factor = Cable Factor(dB) - Preamplifier gain(dB)  
Margin = Limit(dBμV/m) – Level(dBμV/m)
- 2) All channels have been tested, but only the worst case data displayed in this report.
- 3) Both peak and average measured complies with the limit line, so test result is "PASS"



## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250400032006

Rev.: 01

Page: 97 of 120

### Restricted bands around fundamental frequency

#### 802.11b\_Channel 01

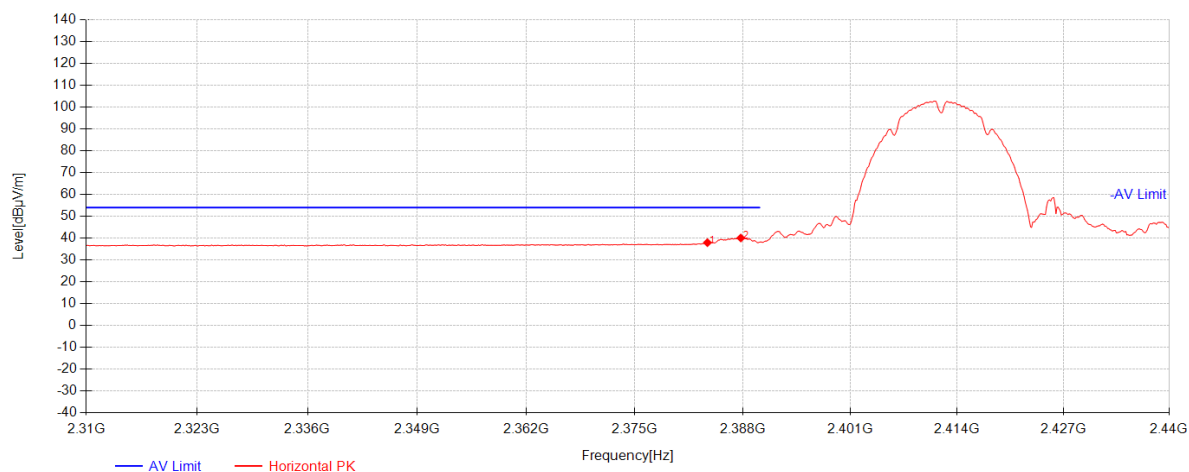


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2383.71         | 34.55          | 26.97     | -23.57      | 37.95          | 54.00          | 16.05       | Horizontal |
| 2         | 2387.74         | 36.67          | 26.98     | -23.57      | 40.07          | 54.00          | 13.93       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 98 of 120

802.11b\_Channel 01

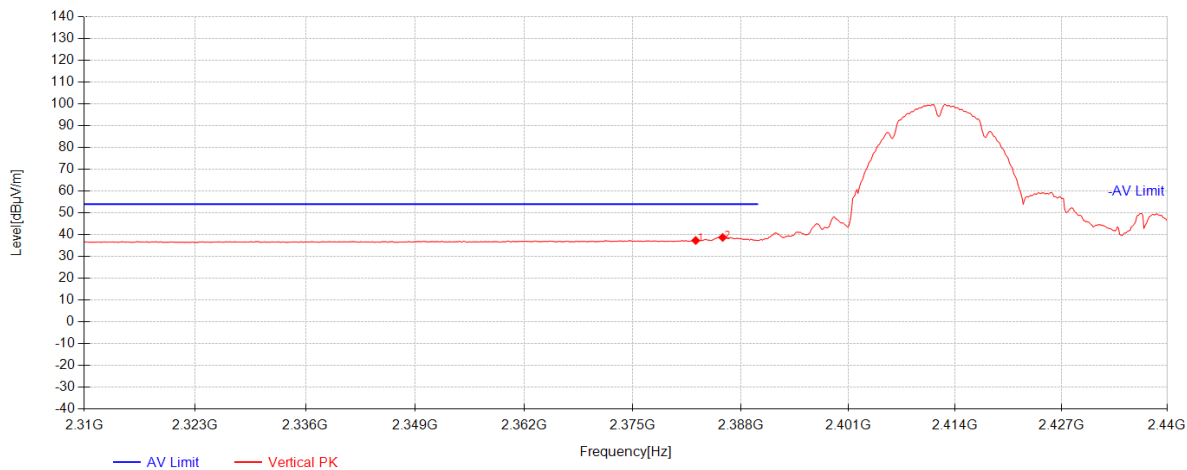


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2382.54         | 33.94          | 26.97     | -23.57      | 37.33          | 54.00          | 16.67       | Vertical |
| 2         | 2385.79         | 35.33          | 26.97     | -23.57      | 38.73          | 54.00          | 15.27       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 99 of 120

802.11b\_Channel 01

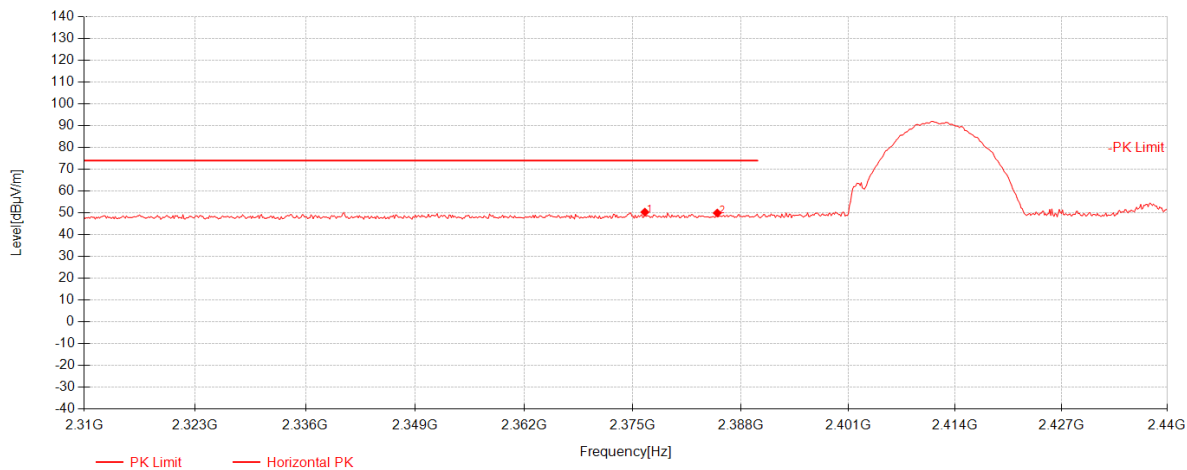


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2376.43         | 46.99          | 26.95     | -23.57      | 50.37          | 74.00          | 23.63       | Horizontal |
| 2         | 2385.14         | 46.54          | 26.97     | -23.57      | 49.94          | 74.00          | 24.06       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 100 of 120

802.11b\_Channel 01

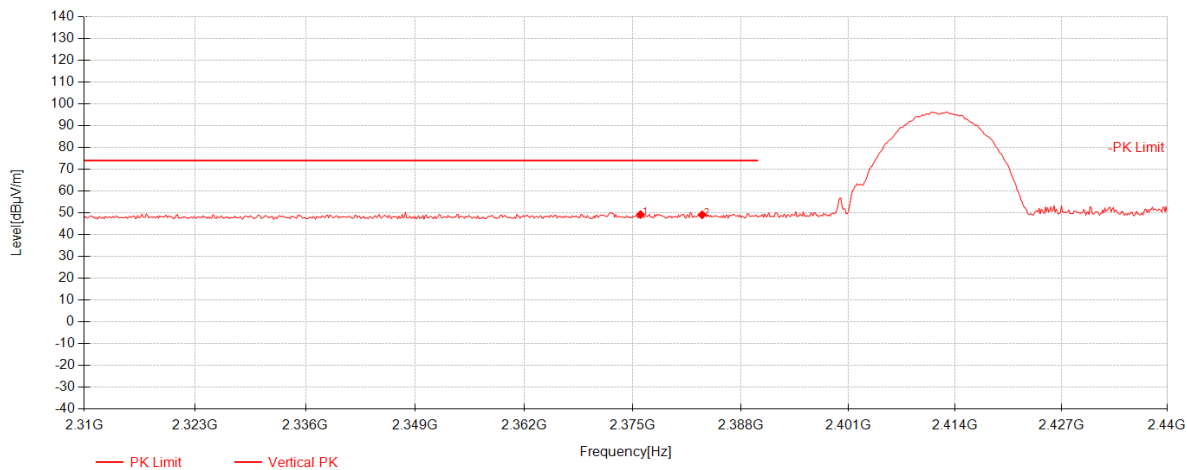


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2375.91         | 45.87          | 26.95     | -23.57      | 49.25          | 74.00          | 24.75       | Vertical |
| 2         | 2383.32         | 45.75          | 26.97     | -23.57      | 49.14          | 74.00          | 24.86       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 101 of 120

802.11b\_Channel 11

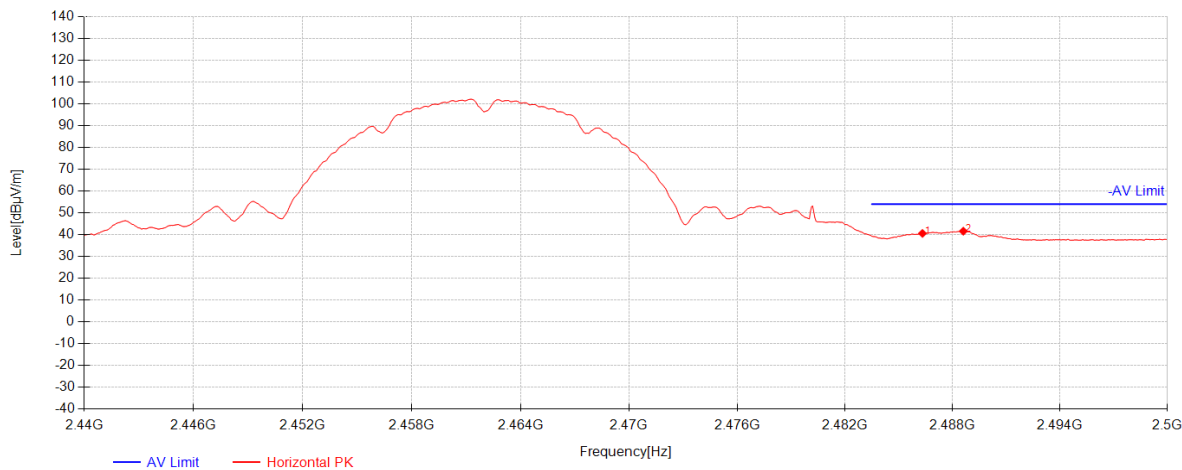


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2486.32         | 36.95          | 27.17     | -23.54      | 40.58          | 54.00          | 13.42       | Horizontal |
| 2         | 2488.6          | 37.97          | 27.18     | -23.54      | 41.60          | 54.00          | 12.40       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 102 of 120

802.11b\_Channel 11

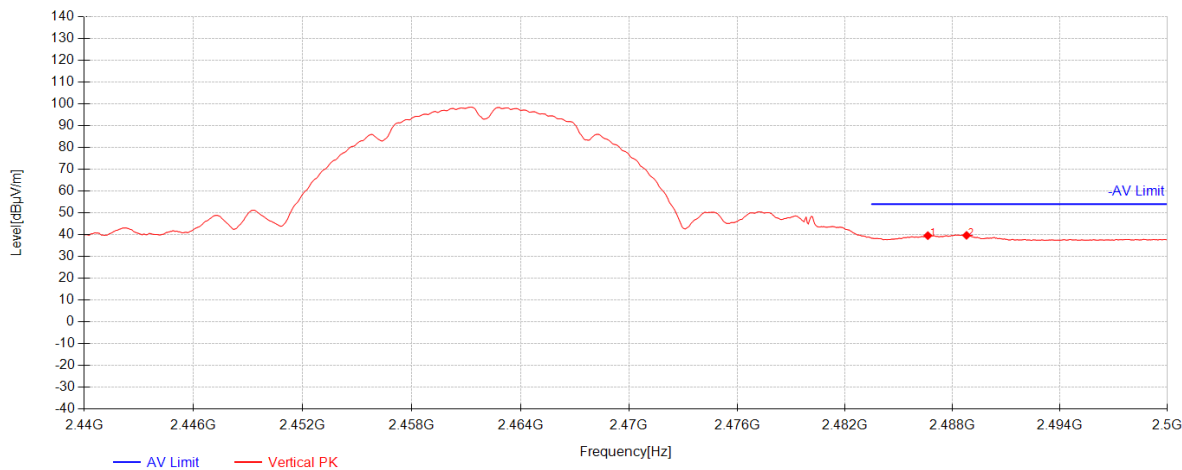


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2486.62         | 35.92          | 27.17     | -23.54      | 39.55          | 54.00          | 14.45       | Vertical |
| 2         | 2488.78         | 36.05          | 27.18     | -23.54      | 39.68          | 54.00          | 14.32       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 103 of 120

802.11b\_Channel 11

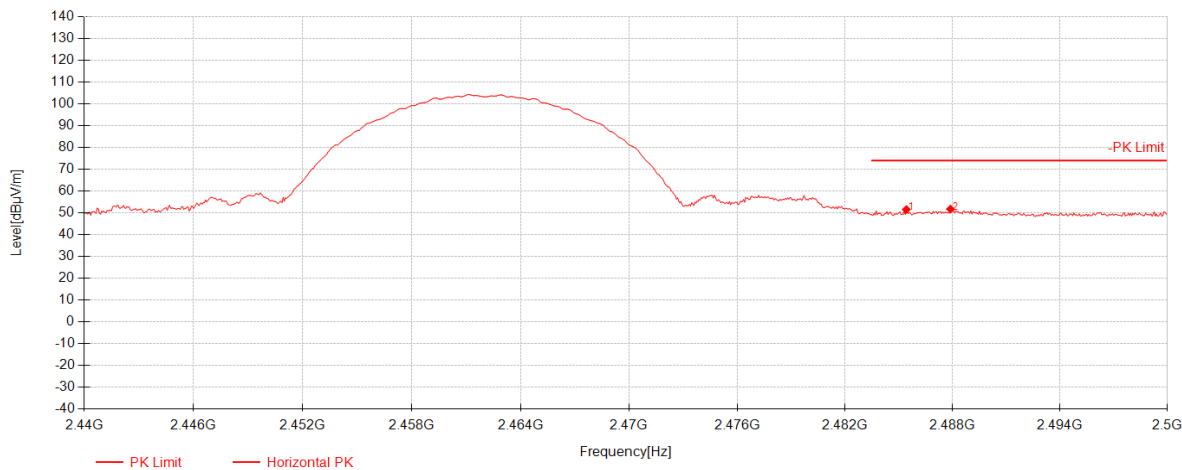


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2485.42         | 47.94          | 27.17     | -23.54      | 51.57          | 74.00          | 22.43       | Horizontal |
| 2         | 2487.88         | 48.13          | 27.18     | -23.54      | 51.76          | 74.00          | 22.24       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 104 of 120

802.11b\_Channel 11

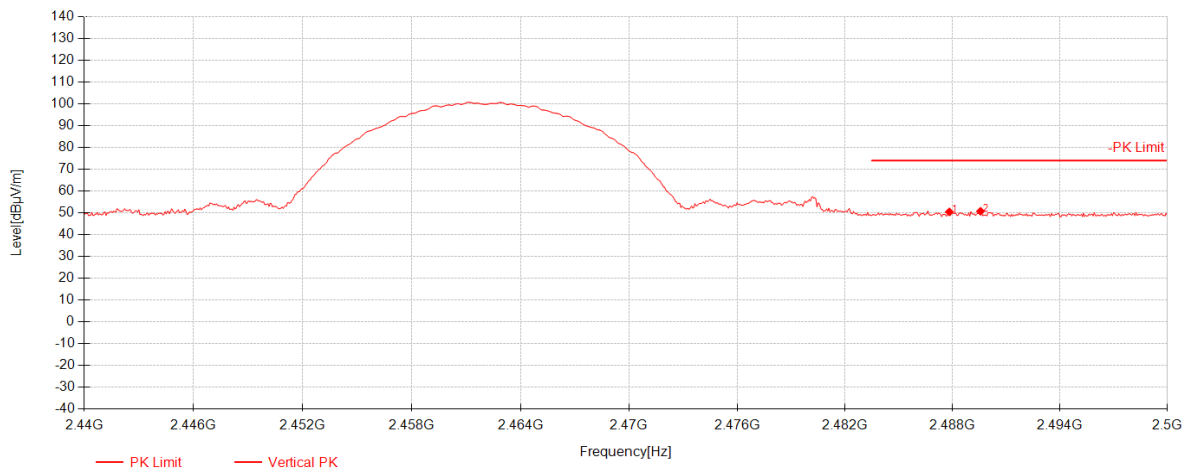


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2487.82         | 46.85          | 27.18     | -23.54      | 50.48          | 74.00          | 23.52       | Vertical |
| 2         | 2489.56         | 47.12          | 27.18     | -23.54      | 50.76          | 74.00          | 23.24       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 105 of 120

802.11g\_Channel 01

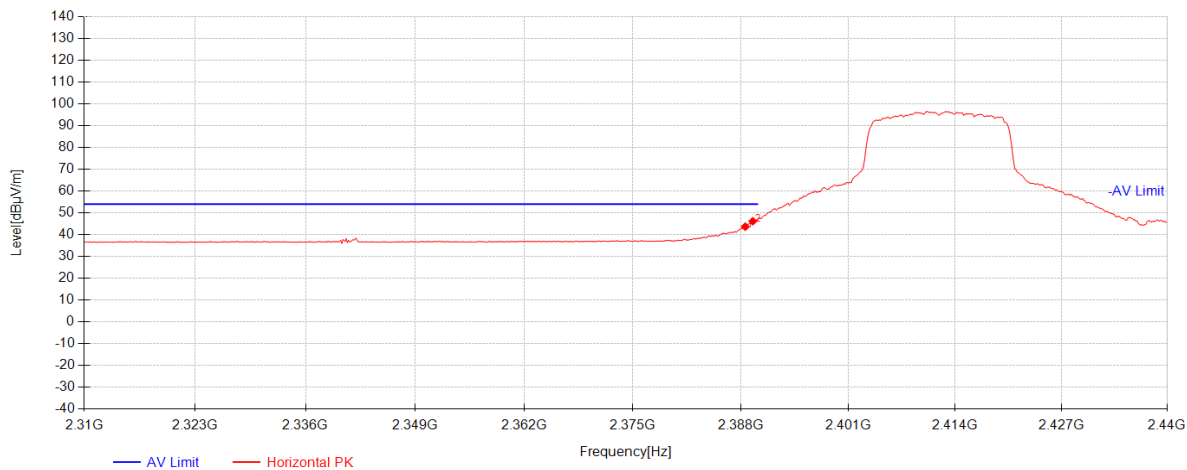


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2388.52         | 40.25          | 26.98     | -23.57      | 43.66          | 54.00          | 10.34       | Horizontal |
| 2         | 2389.43         | 42.77          | 26.98     | -23.57      | 46.18          | 54.00          | 7.82        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 106 of 120

802.11g\_Channel 01

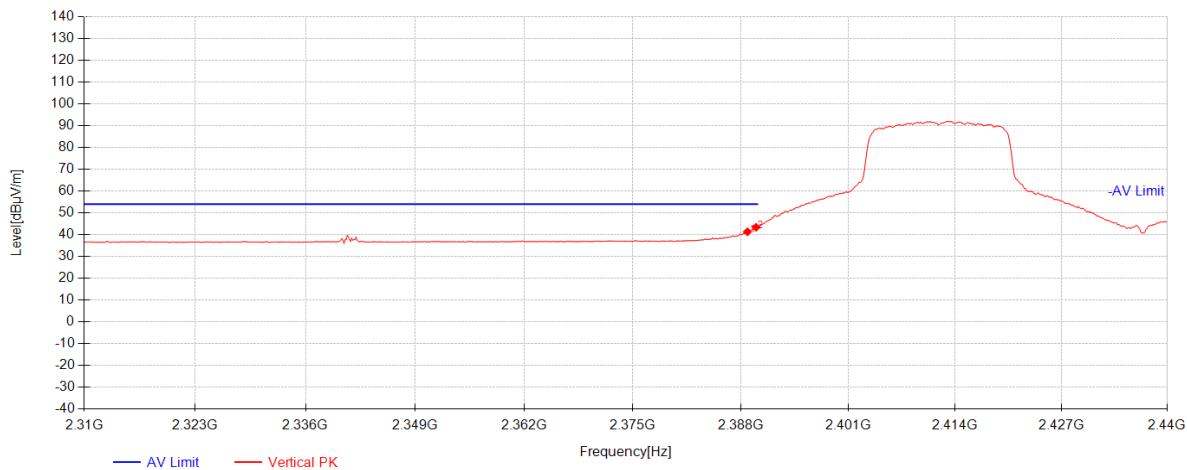


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2388.78         | 37.91          | 26.98     | -23.57      | 41.32          | 54.00          | 12.68       | Vertical |
| 2         | 2389.82         | 39.98          | 26.98     | -23.57      | 43.39          | 54.00          | 10.61       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 107 of 120

802.11g\_Channel 01

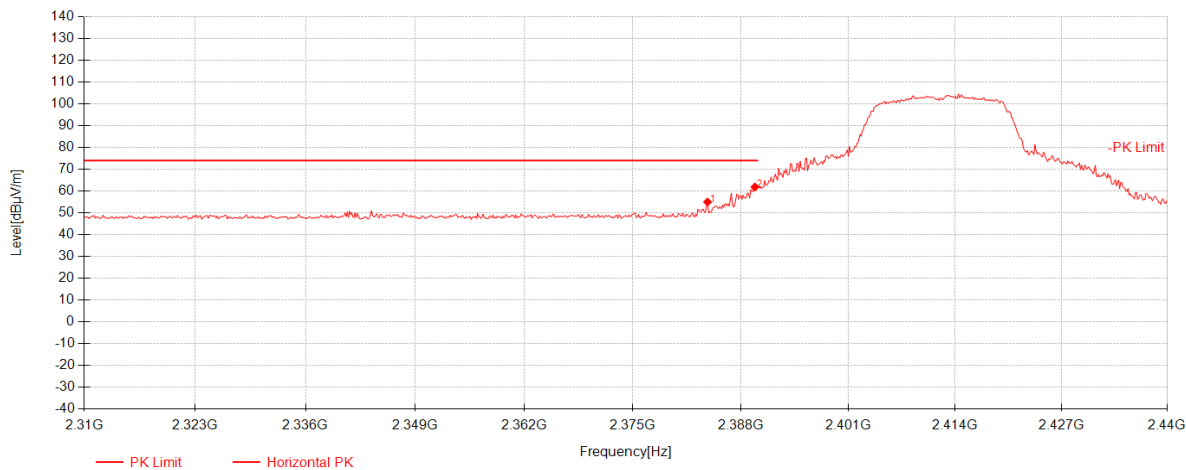


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2383.97         | 51.61          | 26.97     | -23.57      | 55.01          | 74.00          | 18.99       | Horizontal |
| 2         | 2389.69         | 58.52          | 26.98     | -23.57      | 61.93          | 74.00          | 12.07       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 108 of 120

802.11g\_Channel 01

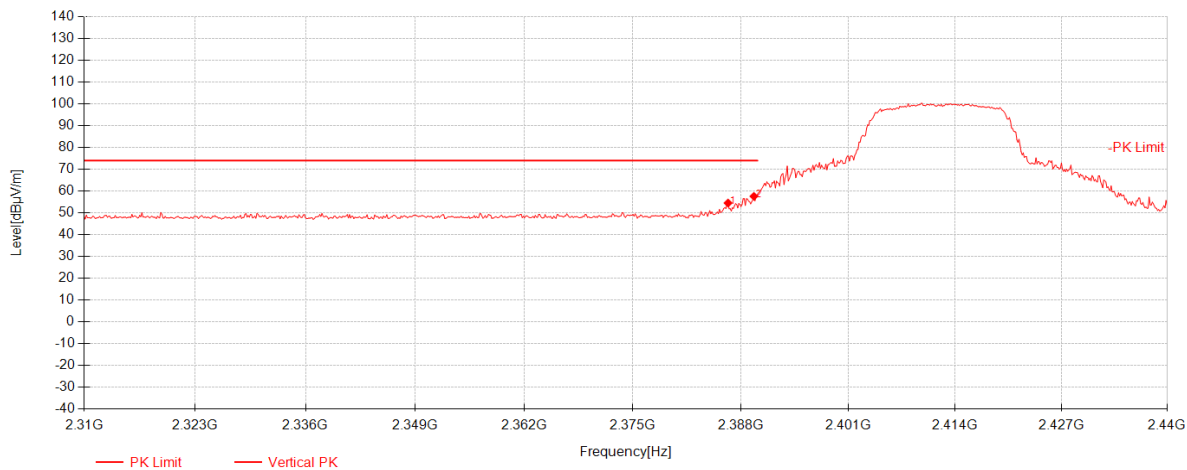


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2386.44         | 51.14          | 26.97     | -23.57      | 54.54          | 74.00          | 19.46       | Vertical |
| 2         | 2389.56         | 54.21          | 26.98     | -23.57      | 57.62          | 74.00          | 16.38       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 109 of 120

802.11g\_Channel 11

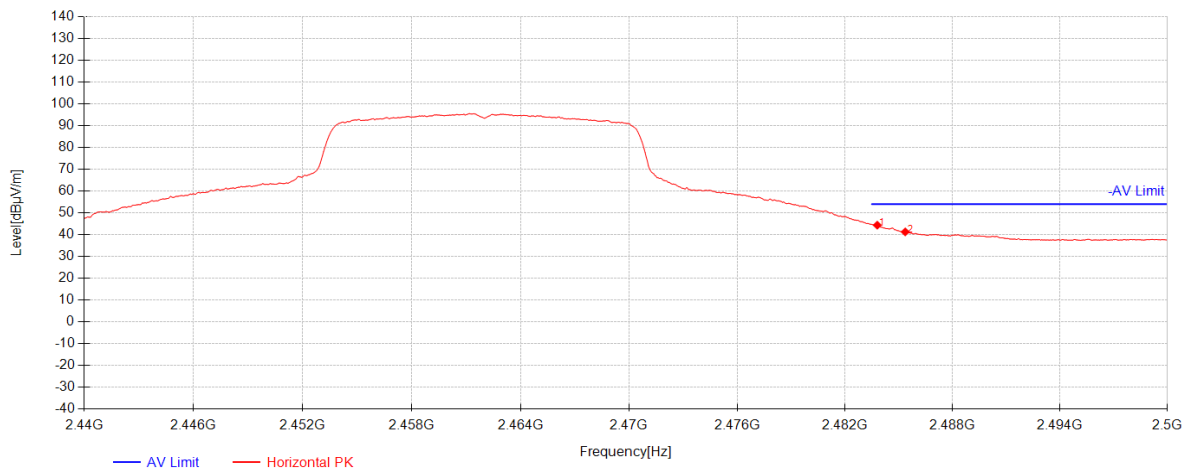


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2483.8          | 40.74          | 27.17     | -23.54      | 44.36          | 54.00          | 9.64        | Horizontal |
| 2         | 2485.36         | 37.65          | 27.17     | -23.54      | 41.28          | 54.00          | 12.72       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 110 of 120

802.11g\_Channel 11

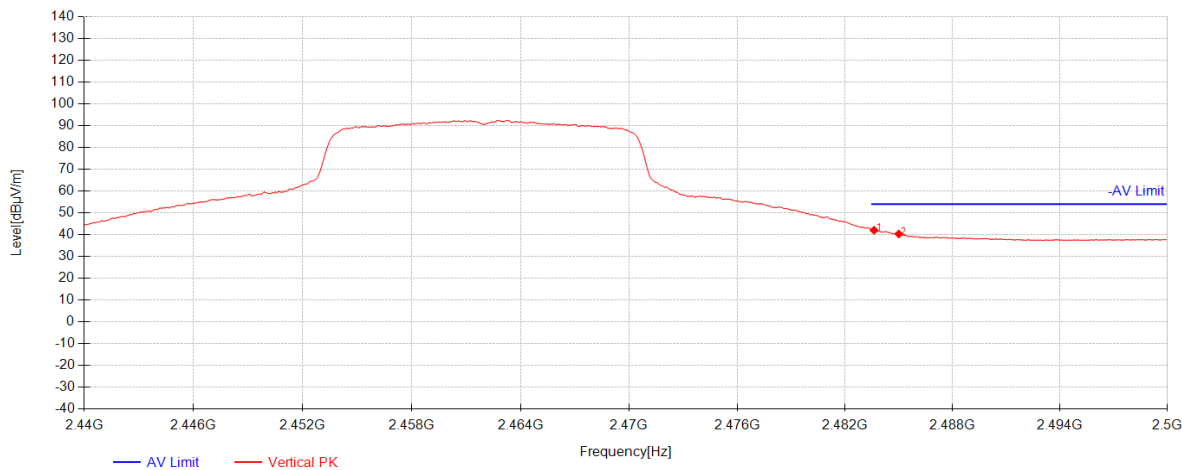


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2483.62         | 38.44          | 27.17     | -23.54      | 42.06          | 54.00          | 11.94       | Vertical |
| 2         | 2485            | 36.68          | 27.17     | -23.54      | 40.31          | 54.00          | 13.69       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 111 of 120

802.11g\_Channel 11

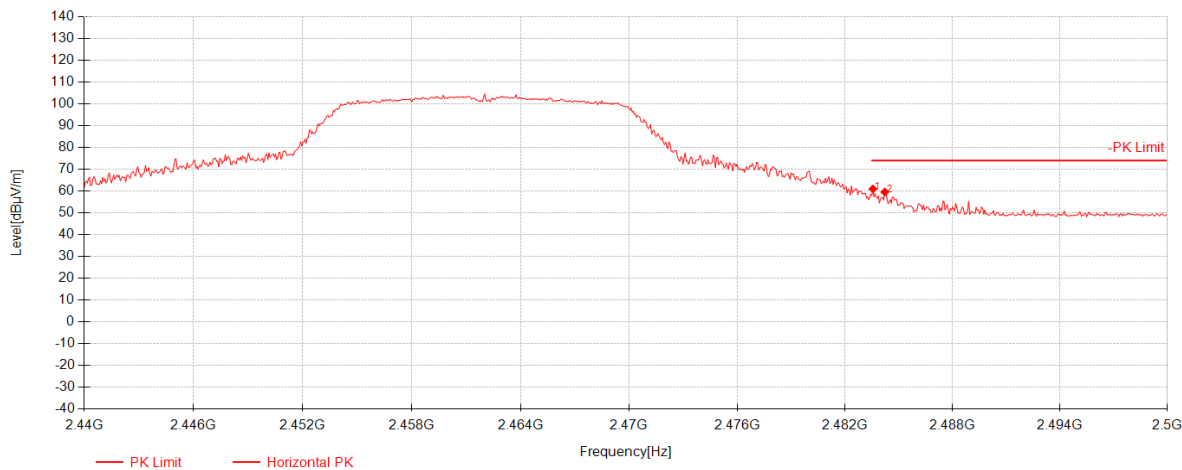


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2483.56         | 57.39          | 27.17     | -23.54      | 61.01          | 74.00          | 12.99       | Horizontal |
| 2         | 2484.22         | 55.98          | 27.17     | -23.54      | 59.60          | 74.00          | 14.40       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 112 of 120

802.11g\_Channel 11

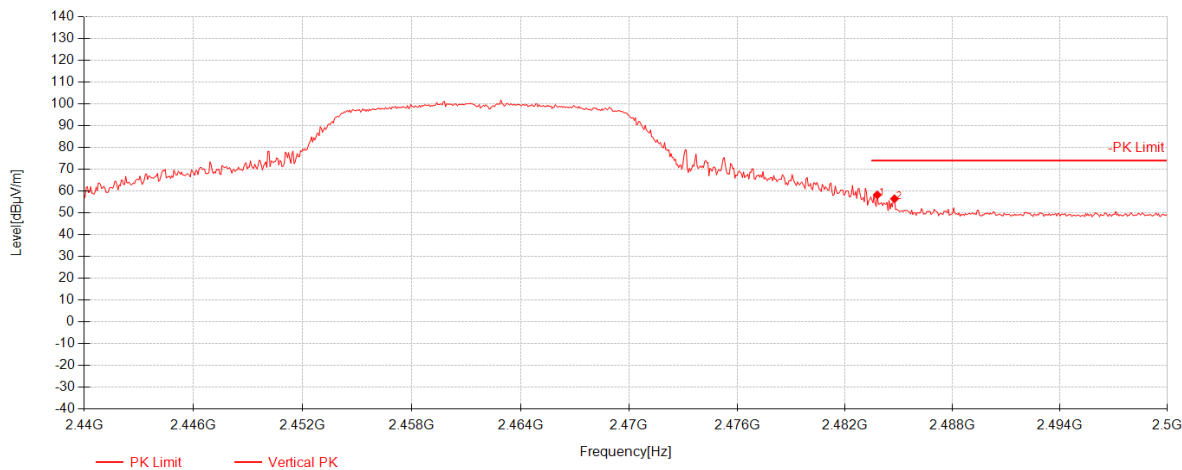


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2483.8          | 54.64          | 27.17     | -23.54      | 58.26          | 74.00          | 15.74       | Vertical |
| 2         | 2484.76         | 52.88          | 27.17     | -23.54      | 56.50          | 74.00          | 17.50       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 113 of 120

802.11n20\_Channel 01

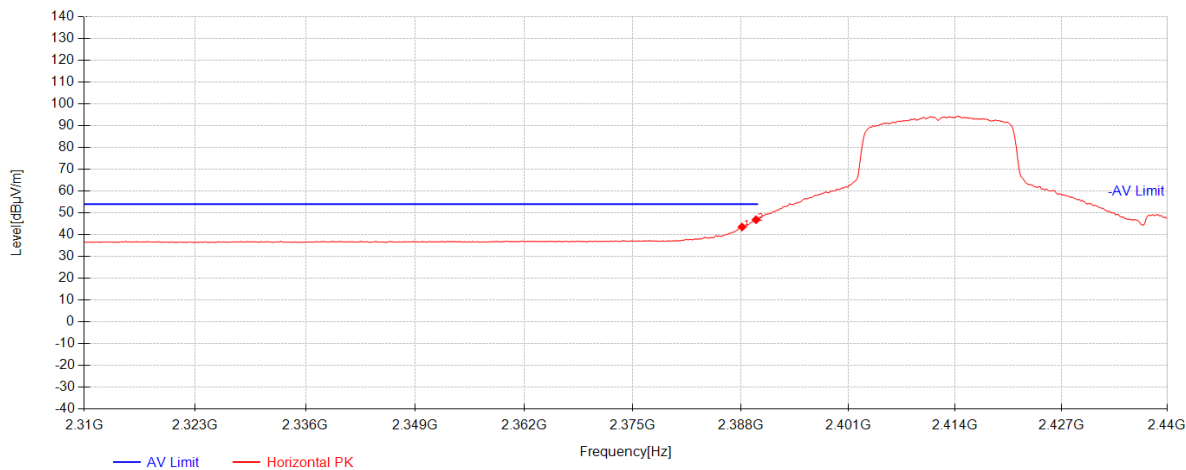


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2388.13         | 40.12          | 26.98     | -23.57      | 43.53          | 54.00          | 10.47       | Horizontal |
| 2         | 2389.82         | 43.44          | 26.98     | -23.57      | 46.85          | 54.00          | 7.15        | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 114 of 120

802.11n20\_Channel 01

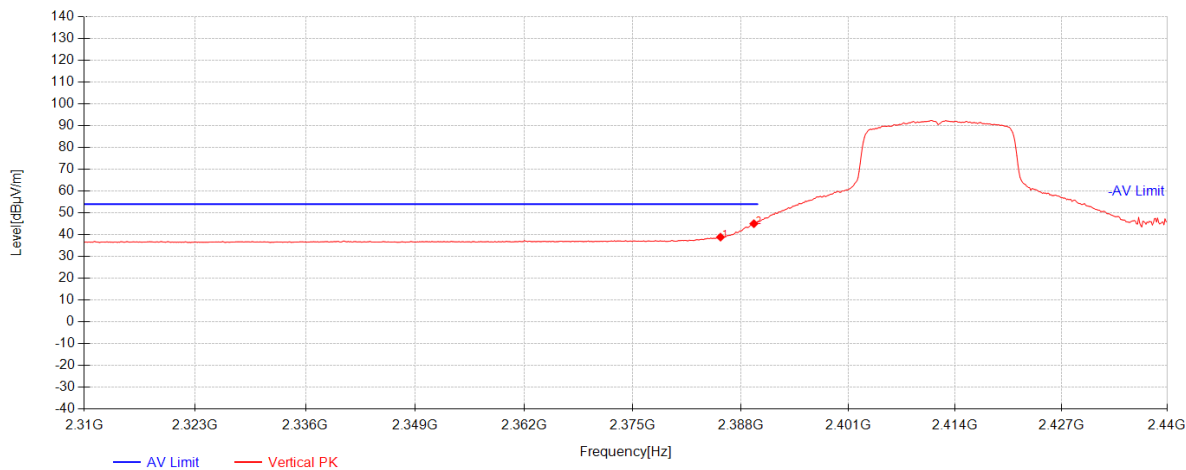


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2385.53         | 35.47          | 26.97     | -23.57      | 38.87          | 54.00          | 15.13       | Vertical |
| 2         | 2389.56         | 41.63          | 26.98     | -23.57      | 45.04          | 54.00          | 8.96        | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 115 of 120

802.11n20\_Channel 01

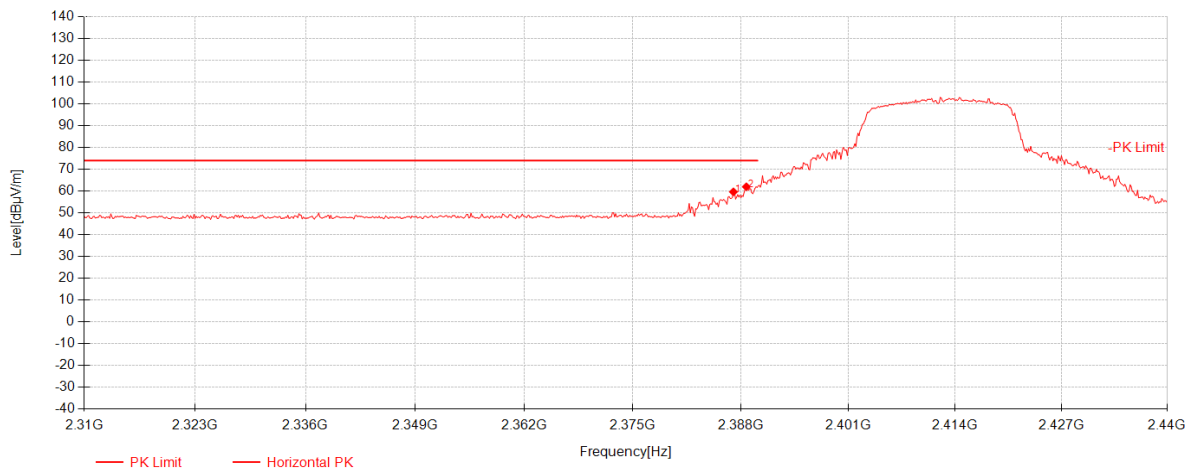


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2387.09         | 56.27          | 26.97     | -23.57      | 59.67          | 74.00          | 14.33       | Horizontal |
| 2         | 2388.65         | 58.60          | 26.98     | -23.57      | 62.01          | 74.00          | 11.99       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 116 of 120

802.11n20\_Channel 01

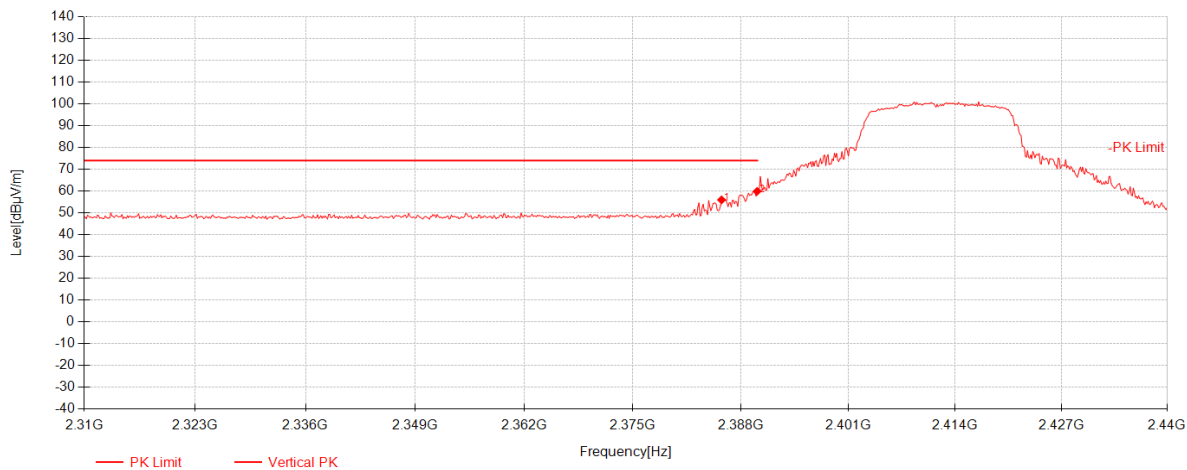


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2385.66         | 52.58          | 26.97     | -23.57      | 55.98          | 74.00          | 18.02       | Vertical |
| 2         | 2389.95         | 56.50          | 26.98     | -23.57      | 59.91          | 74.00          | 14.09       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 117 of 120

802.11n20\_Channel 11

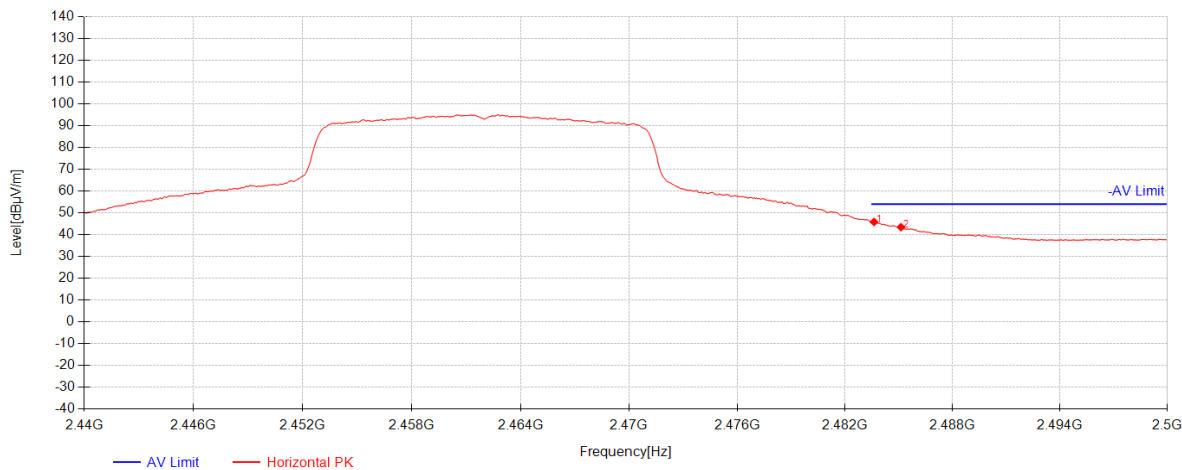


| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2483.62         | 42.21          | 27.17     | -23.54      | 45.83          | 54.00          | 8.17        | Horizontal |
| 2         | 2485.12         | 39.81          | 27.17     | -23.54      | 43.44          | 54.00          | 10.56       | Horizontal |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 118 of 120

802.11n20\_Channel 11

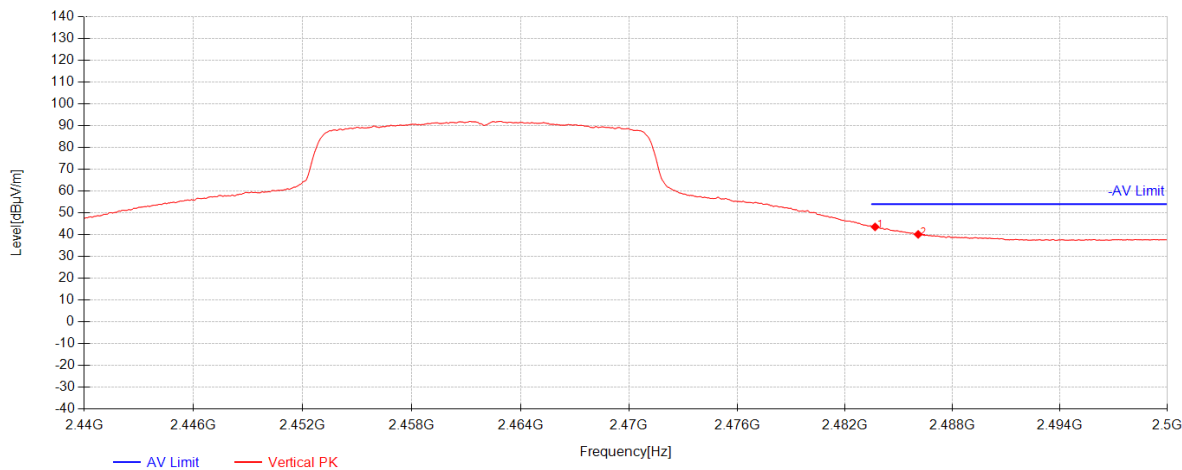


| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2483.68         | 39.95          | 27.17     | -23.54      | 43.57          | 54.00          | 10.43       | Vertical |
| 2         | 2486.08         | 36.51          | 27.17     | -23.54      | 40.14          | 54.00          | 13.86       | Vertical |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006  
Rev.: 01  
Page: 119 of 120

802.11n20\_Channel 11

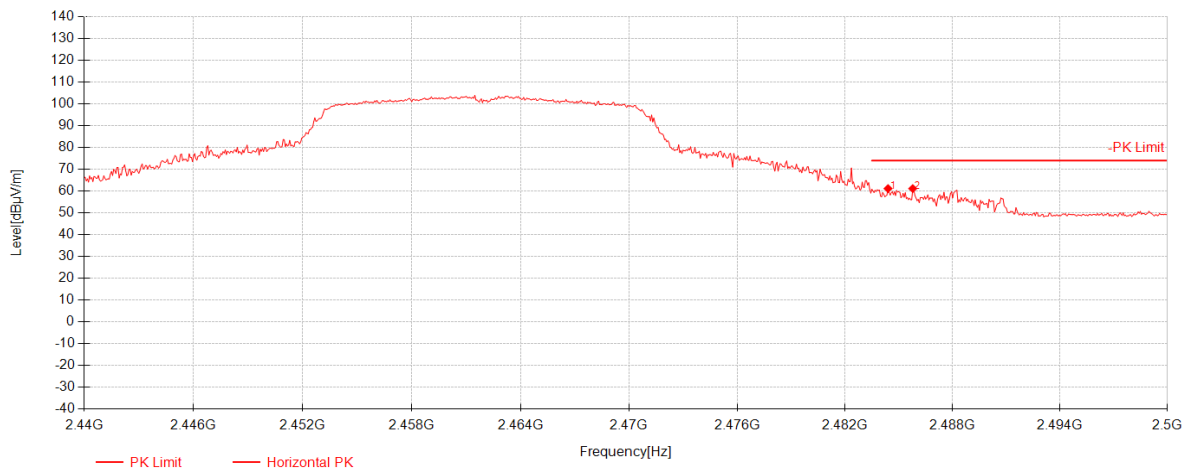

| Data List |                 |                |           |             |                |                |             |            |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|------------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity   |
| 1         | 2484.4          | 57.56          | 27.17     | -23.54      | 61.18          | 74.00          | 12.82       | Horizontal |
| 2         | 2485.78         | 57.55          | 27.17     | -23.54      | 61.18          | 74.00          | 12.82       | Horizontal |




## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250400032006

Rev.: 01

Page: 120 of 120

### 802.11n20\_Channel 11

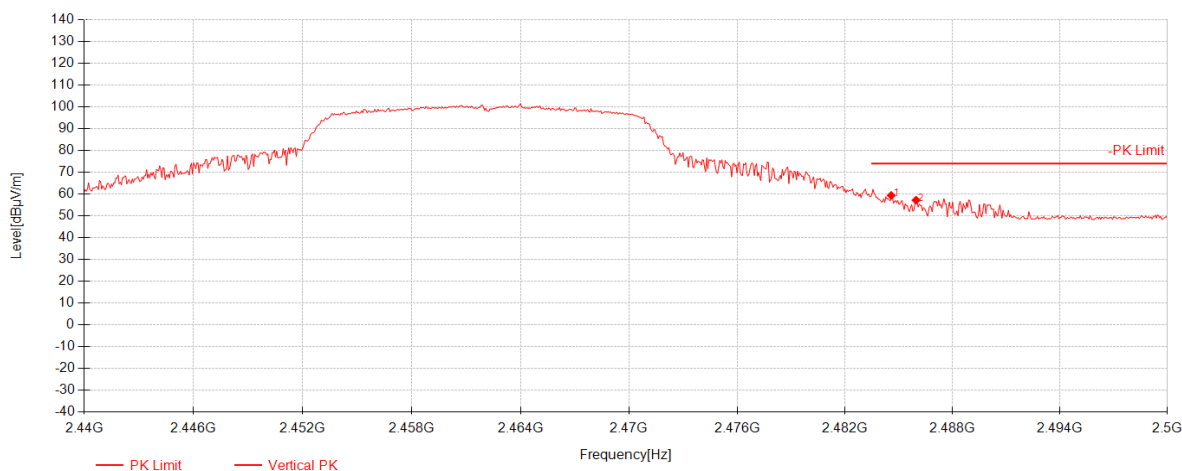

| Data List |                 |                |           |             |                |                |             |          |
|-----------|-----------------|----------------|-----------|-------------|----------------|----------------|-------------|----------|
| NO.       | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Polarity |
| 1         | 2484.58         | 55.76          | 27.17     | -23.54      | 59.38          | 74.00          | 14.62       | Vertical |
| 2         | 2485.96         | 53.58          | 27.17     | -23.54      | 57.21          | 74.00          | 16.79       | Vertical |

#### Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:

Level = Reading(dBμV) + AF(dB/m) + Factor(dB):

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain(dB)

Margin = Limit(dBμV/m) – Level(dBμV/m)

- 2) Both peak and average measured complies with the limit line, so test result is "PASS"

---End of Report---