


名称	WXM08小钢琴混音话筒说明书
尺寸	长 210mm*宽 148mm
材质	157g铜版纸

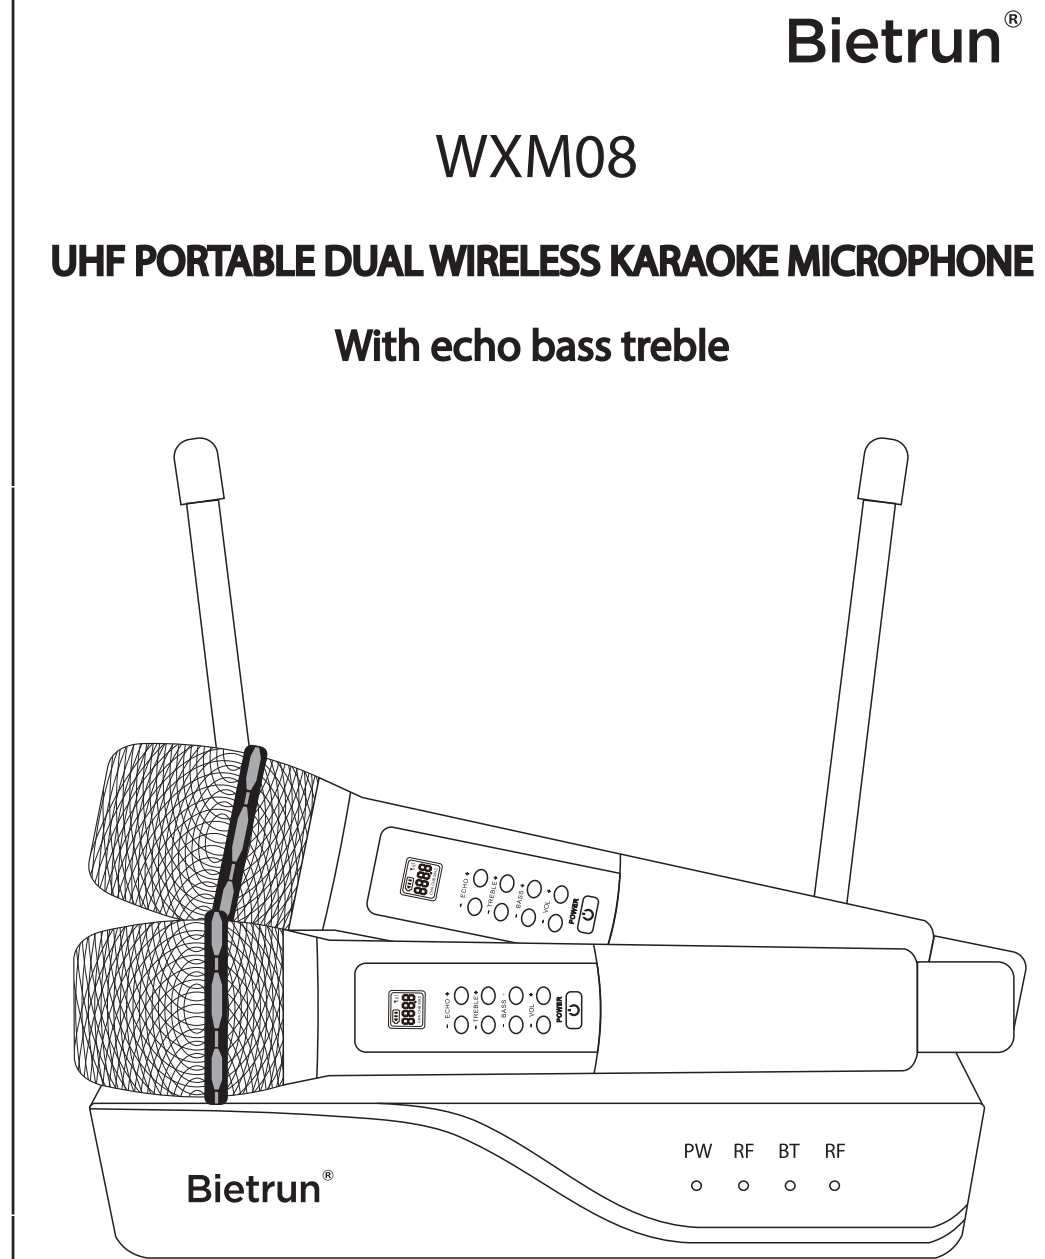


If you have any questions, please feel free to contact us.
E-mail: amazon@bietrun.com

Instructions for Mixing Microphones for Piano

Instructions
1.Our product need to use with the Smart TV, phone, STB, video palyer and other devices which has the connection of 3.5mm, RCA, or has the bluetooth function.

- (1) "AUDIO OUTPUT"
- (2) "Headset"、"PHONE"
- (3) AUX OUTPUT
- (4) Bluetooth device with A2DP

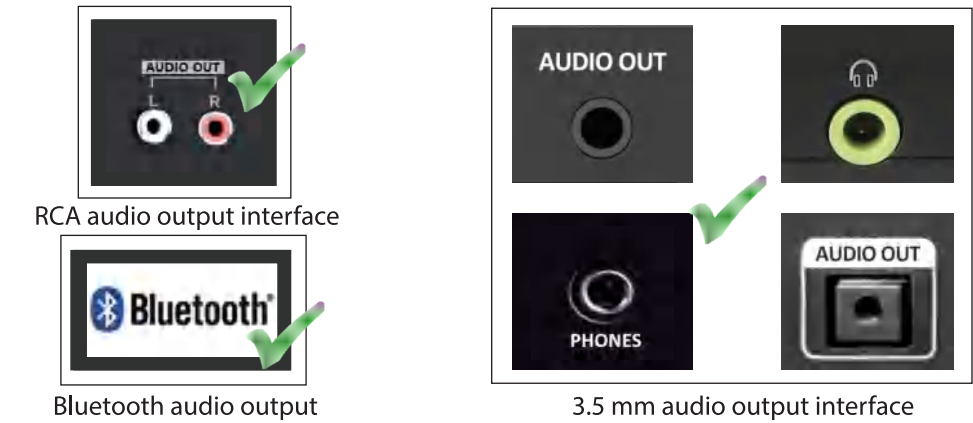

Attention:
Some of smart TVs, set-top boxes and other devices need to set the audio signal as external audio interface output in order to use the device correctly. If not, the device may have no sound even the wire connect well, which is not a problem of this product. As for the audio output Settings, please operate in the Settings menu. The device Settings way depends on different brands. Please refer to the device manual or consult the dealer.

2. The digital AUDIO output interface without the above interface or marked only with the words "DIGITAL AUDIO OUT (COAXIAL, S/PDIF,OPTIAL,)" cannot connect this product




5. Other operations

(1) Basic function of receiver




	Name	Functional specifications	Attention
1	Power adapter	Supply DC 5V 1A to the receiving host, USB output interface.	
2	Cable	Connect the power adapter to the receiving host	
3	Supply hub	Connecting supply cable	
4	Power on/off	1. Press and hold to turn on, long press to turn off. 2. Short press to turn on/off bluetooth - BT light on when bluetooth turn on.	
5	Indicator light	PW Power indicator, red bright indicate power on. RF Microphone connection indicator. Green always bright means the microphone is connected normally, flashing means is not connected. RF means microphone, RF means microphone B. BT Bluetooth status indicator: press the power button to turn on/off bluetooth. Flashing means no connection, and constant brightness means successful connection	The BT light flashes in pairing mode, and the smart device can search for the bluetooth name "Bietrun 08" to connect
6	3.5 signal input jack	Host 3.5mm stereo audio signal input	
7	3.5 interface signal output	Host 3.5mm stereo audio signal output, access to amplifying equipment	

(2) Basic function of microphone

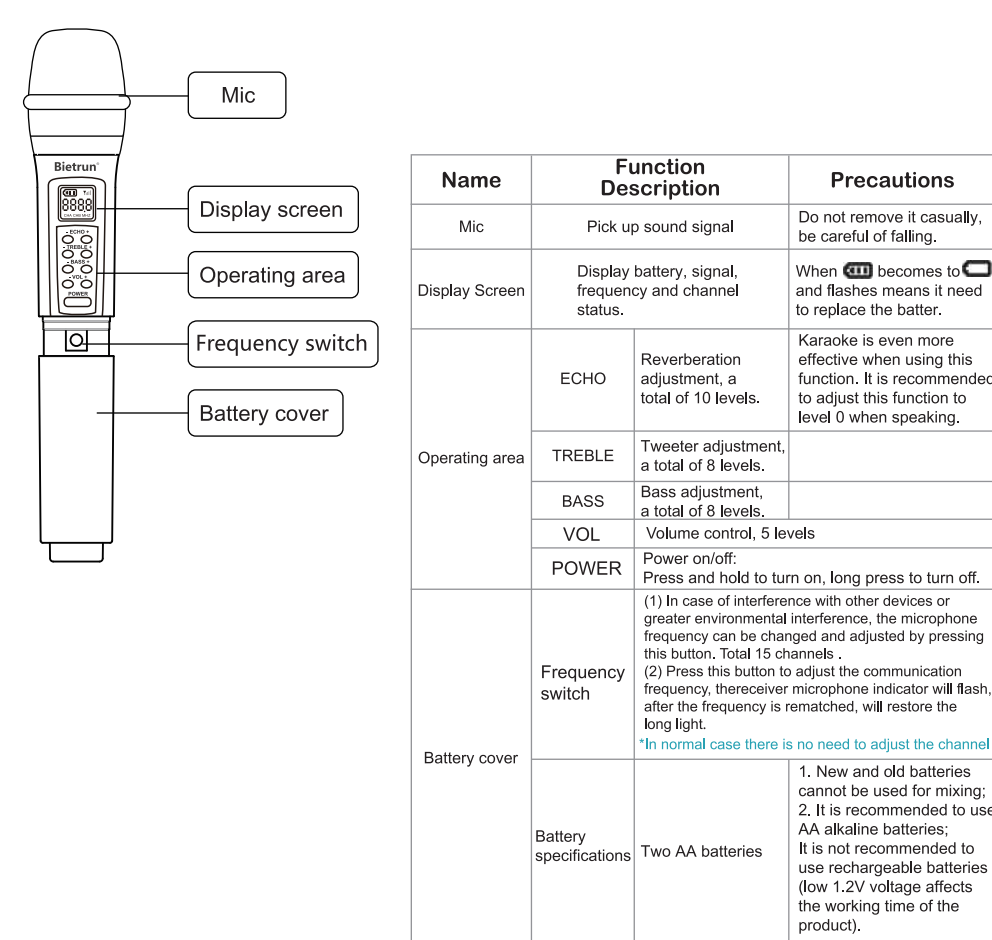


6

Many smart TVs have the function of AV audio and video input. Although they have RCA or 3.5mm ports, they can't export audio signals, so they can't be used in this product.




3. Input connection

(1) The audio source of the superior device is the RCA terminal outputs

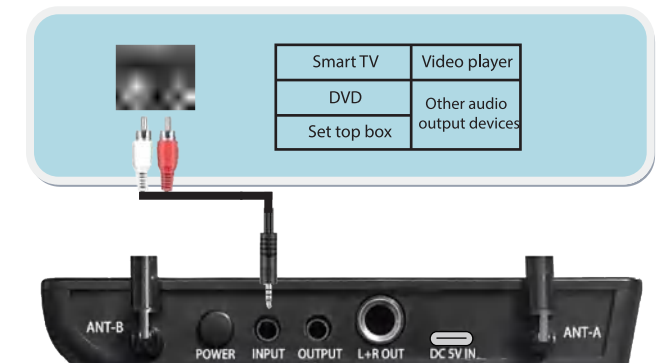

(2) The audio source of the device is 3.5mm terminal outputs.

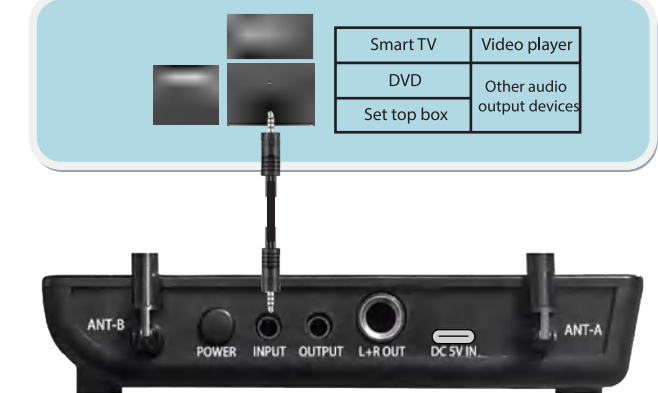

(3) Bluetooth device connection

The smart device with bluetooth audio transmission function, search the bluetooth name "Bietrun 08" in the bluetooth device list and connect it




4. Output connection


The audio amplification equipment with 6.35mm, 3.5mm and RCA three audio input interfaces can be connected to this product, including multimedia speaker, Sound Bar, pull rod speaker, power player, mixer and etc.



(1) 3.5 the output interface connects to the RCA interface of the subordinate devices

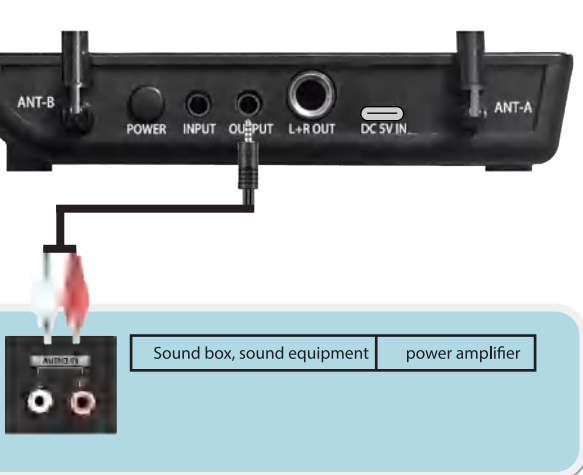

(2) 3.5 output interface connect sub-device 3.5 interface

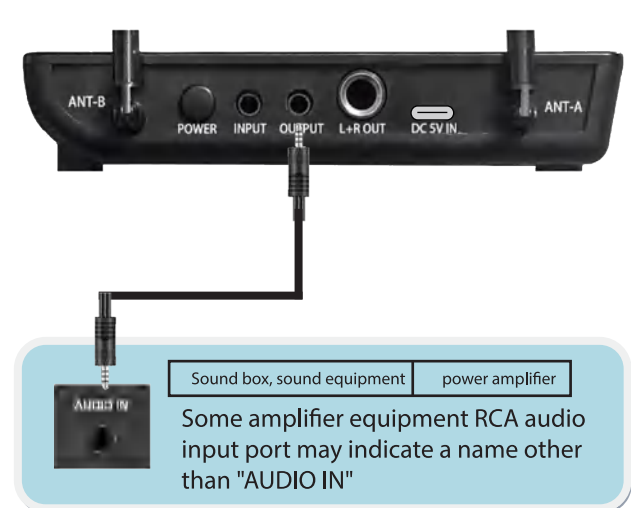

(3) 6.35 output interface connection.



6. Specifications

Receiver	Frequency stability: <0.002%
Receiving frequency: U Band	Interference frequency ratio > 90dB
Sensitivity: 2mV	Signal to noise ratio: >95dB
Image interference ratio: >88dB	Working range: Standard conditions 30 to 50 m
Audio output: 800mV-1.4V	Supply Voltage: 5V
Receive channel: 2	Antenna: universal antenna
Power consumption: 3W	
Handheld Microphone	
Carrier frequency: U Band	Frequency stability: <0.002%
Transmit power: 10mW	Current consumption: <25mA
Harmonic: <Main wave 40dB	Standard: Fixed frequency
Pickup: 600Ω single directivity	Battery: 2*AA/MIC (not included)
Antenna: built-in	

Complex Index	
Dynamic Range: >95dB	System distortion(<1%, 1K Hertz modulation
Frequency response: 50Hz-18KHz(±3dB)	

7. List of items

- 2X microphones (A, B)
- 1X receiving host
- 1X 6.35 to 6.35 signal line
- 1X 3.5 to 3.5 signal line
- 2x3.5mm to RCA signal line
- 1X charging line
- 1X user manual

Manufacturer:
SHENZHEN LONGXIANG INTELLIGENT TECHNOLOGY CO, LTD.
Address: FLOOR 4, BUILDING D, FUXINLIN INDUSTRIAL AREA, HANGCHENG INDUSTRIAL ZONE FUHUA COMMUNITY XIXIANG STREET, BAOAN DISTRICT SHENZHEN GUANGDONG CHINA

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.